

COVER LETTER

Dear Editor,

5 Thank you very much for handling our manuscript: “Laboratory modelling of urban flooding: strengths and challenges of distorted scale models”. We deeply appreciate the Referees comments and suggestions, which have enabled us to further improve the quality of the manuscript.

In particular, we have now

- defined what we mean by “artefacts”;
- 10 • highlighted limitations of current laboratory models of urban flooding as regards pointwise velocity measurements;
- mentioned the challenges related to laboratory experiments of dual drainage as well as to the representation of frictional resistance;
- clarified the experience-based nature of the recommendations by Chanson (2004);
- 15 • detailed the uncertainties in the inflow discharges;
- included a reference to full scale laboratory tests of urban flooding,
- used more specific wording at several instances.

Also, all technical comments by the Referees have been implemented.

20 In the following, we present a point-by-point response to all the comments raised by the Referees. To a great extent, the present document consists in an updated version of our responses provided during the discussion phase, in which we also describe how the revisions have indeed been incorporated in the manuscript. Note that all line numbers in our responses refer to the *revised* version of the manuscript.

Best regards,

X. Li, Corresponding author

25 **Referee 1**

Corresponding changes are highlighted in yellow in the revised manuscript.

General comment

30 The authors present an interesting paper on scale effects in the context of the modelling of urban flooding using geometrically distorted models, based on the reanalysis of existing lab data. I am not aware of any similar analysis done in this context, and the paper will be of significant interest to those undertaking such studies. The paper is well written and clear and I would certainly recommend publication. I have made some suggestions for potential improvements below.

Thank you for the positive feedback and useful comments on how to improve the manuscript.

35 **Specific comments**

1. The abstract (L17) contains a comparison of uncertainties from scale effects to those from hydrological data. This analysis does not seem to be in the paper or conclusions. The abstract should not contain information that is not in the full paper; hence this should be removed or added to the paper. Please also note the typo on the last line.

40 As suggested by the Referee, this sentence has been deleted in the revised manuscript.

45 2. Introduction (2nd paragraph) – The authors point out the difficulty in obtaining velocity data in field conditions with which to validate flood models. However point velocity data is also uncommon for lab studies of urban flooding (for example due to the low flow depths and the difficulty in installing equipment such as ADV probes). Indeed the studies the authors use is based on flow and depth data. Some studies which provide velocity data in a lab setting have recently come available (e.g. Martins et al 2018, WRR) and the authors may at some point in the paper wish to consider the benefits of velocity + depth data for model validation or scale model studies.

We concur with the Referee in acknowledging the difficulty of conducting point velocity measurements in experimental models of urban flooding at the district level.

50 Therefore, in the revised manuscript,

- we discuss explicitly this issue in the Introduction (P2, L9-14);
- we also emphasize the need for more pointwise velocity measurements as a perspective in the Conclusion (P11, L21-23).

55 We understand that the Editor recommends inclusion of these items in a Recommendation section. However, we find a bit odd to create a new section to cover this issue (since a section Recommendation does not exist in the present version of the manuscript), and we find more effective to just include dedicated paragraphs in the Introduction and at the end of the Conclusion. If really needed, we are ready to reconsider this.

60

3. P2 L16 – it would benefit the introduction if the authors could be a bit more specific regarding what they mean by ‘artefacts’. Perhaps with a specific example of how these might arise in scaled experiments, what is the physical cause etc.

According to the *Oxford English Dictionary*, an “artefact” is “A *spurious result, effect, or finding in a scientific experiment or investigation, esp. one created by the experimental technique or procedure itself.*”

65

Here, what we mean by *artefacts* are deviations between up-scaled model measurements and real-world prototype observations due to governing non-dimensional parameters (i.e. force ratios) which are not identical between the model and its prototype (Heller, 2011). This may include alteration of the flow regime (transition vs. complete turbulent), of the relative importance of frictional resistance or of 2D and 3D flow structures.

This is now clarified in the revised manuscript (P2, L26-29).

70

4. P2 L25 – Chanson gives some specific recommendations, however it would be good if the basis for these recommendations was briefly mentioned.

75

Although the recommendations by Chanson (2004) look very reasonable, no specific background information is referred to by Chanson (2004) to support the stated recommendations (scale factors below 25 to 50, distortion ratio below 5 to 10), which are mostly based on experience (personal communication with H. Chanson). Nonetheless, in the revised manuscript, we have now clarified the field of application for which these recommendations were formulated (P2, L35) and we refer explicitly to “experience-based” (P2, L37; P4, L24).

80

5. P3-P4 The authors provide a good review of physical models and scaling issues in the simulation of surface urban flood flows. The authors should briefly note that studies of ‘dual drainage’ (surface and sewer flows) also exists however the scaling issues are somehow complicated by the combination of pressurized pipe and surface flow. This generally posed some additional limitations on these studies (either associated with the hydraulic conditions which can be simulated, or the minimum size of the model).

85

The Referee highlights that scale effects in “dual drainage” models is even more intricate due to the combination of pressurized pipe flow and surface flow. Since the body of the present manuscript (especially the datasets) focuses solely on surface flow in a network of streets (not dual drainage), we propose to mention dual drainage as a perspective in the Conclusion of the revised manuscript.

Therefore, next to the sentence stating that “More controlling parameters should also be considered, such as the bottom slope ...”, we have now added a paragraph on the importance of dual drainage for urban flooding and the associated experimental modelling challenges (P11, L18-21):

90

“Moreover, in real-world urban flooding, the urban drainage system may also have a substantial influence. Laboratory modelling of dual drainage becomes even more intricate due to the combination of pressurized and surface flow (e.g. Rubinato et al., 2017). This poses additional constraints on the design of the scale models and leads to extra experimental challenges which would deserve further research.”

Again, since dual drainage is somehow “out of the scope” of the analysis we conduct based on the two specific datasets, we find it difficult to include dual drainage in the Discussion section. This may be reconsidered if needed.

95

6. P5 – For both datasets the authors do not discuss the quantification of the inflow discharge. It seems to be assumed that the error within the quantification of this discharge is negligible. Some justification for this assumption should be given.

100

We agree that information on the inflow discharge uncertainties were missing in the original manuscript. They have now been added in Section 3.1 of the revised manuscript (P5, L23 and L36).

Regarding the consequences of these uncertainties on the inflow discharge, we consider that they are lumped in the uncertainty estimate derived from the analysis of the test repetitions, as detailed in Supplements 2 and 3. This is now stated explicitly in Section 4.1 of the revised manuscript (P7, L23-L24):

“Uncertainties arising from inaccuracies in the inflow discharge are also lumped into this uncertainty estimate.”

105

7. The treatment of frictional resistance within scaled models is an interesting topic which the authors mention only briefly within the discussion. Given such models are generally constructed from smooth materials can authors comment further on the representation of roughness within scaled models and any implications? Why is friction expected to be underestimated in more distorted models?

110

As stressed by the referee, the representation of frictional resistance in scale models of urban flooding is particularly challenging. In this respect, we have clarified the following aspects in the revised manuscript.

115

- When we write that “friction is expected to be underestimated in more distorted models”, we mean “underestimated” compared to the case of an undistorted model with similar bed material (not necessarily compared to the prototype!, as clarified now). This is true because the more distorted the model, the higher the Reynolds number and the lower the relative roughness ($k_{s,m} / R_{H,m}$). Both of these effects contribute to lower the friction factor, as confirmed by the experimental results in Figure S23. This is now stated explicitly on P8, L30-L31.

120

- In the original manuscript, we hardly explained that, even without distortion, frictional resistance may not be properly represented in the scale model, particularly when smooth material is used to construct the bottom and the walls of the model. There are two competing effects (lower Reynolds number in the model compared to the prototype; but also lower relative roughness) which, in general, hamper a definite prediction on whether frictional resistance is over- or under-estimated compared to the prototype. This is now stated explicitly in the revised version of the Introduction (P2, L39 - P3, L2).

125 8. P9 L11 – Can the authors comment on why they expect third effect to be probably dominant? Perhaps this should be phrased ‘The third of these effects...’

Indeed, “the third type of effects” being dominant is not well supported at this stage. This would require additional detailed measurements and/or interpretation based on computational modelling. Our point is that, at the present stage, we may not exclude that this third effect has a substantial influence; but we are unable to confirm it based on the existing data. Therefore, in the revised manuscript, the sentence has been rephrased as follows (P9, L31):

130 *“It is possible that the third of these effects has a substantial influence on the flow. However, the available datasets ...”*

Technical comments

135 1. P2 L2 ‘than ever observed in the past’ should be removed (too many points in one sentence)

This has been removed in the revised manuscript in P.2 L3.

2. P3 L6 ‘replace ‘were’ with ‘have been’

The word ‘were’ has been replaced by ‘have been’ in revised manuscript in P.3 L21.

140

3. P3 L11 – Seems to have a divide symbol?

Indeed, the divide symbol ‘÷’ has now been replaced by the more standard symbol ‘-’. The change has been implemented throughout the manuscript (8 occurrences: P.3 L28-29; P.4 L38; Table 1).

145 4. P4 L34 - Replace ‘it was never’ with ‘has not to date been’

The wording ‘it was never’ has been replaced by ‘has not to date been’ in the revised manuscript in P.5 L9.

Referee 2

150 Corresponding changes are highlighted in green in the revised manuscript.

General comment

155 The manuscript presents an interesting study about the influence of horizontal/vertical distortions of lab hydraulic models – to the best of my knowledge this is a novel investigation in the topic. The study is based on two existing datasets that were generated with other objectives in mind and, for this reason, the results are (somewhat) not fully conclusive, as the authors mention at the later sections of the manuscript. Nevertheless, in my opinion, the results are relevant to improve urban drainage lab modelling, and perhaps more important, the study identifies the need of new lab experiments to improve the understanding of urban drainage systems hydraulics. The manuscript is well written and clear. My main concern is the lack of consideration of uncertainties in hydraulic measurements and their influence in the conclusion of the study. Below I suggest a few points that the authors may consider to improve the quality of the manuscript.

Thank you for these supportive comments and insightful suggestions to improve the manuscript.

165 We concur with Referee 2 regarding the importance of considering uncertainties in hydraulic measurements. However, we believe that these uncertainties are already carefully reported and discussed in the manuscript. Particularly, Section 4.1 is entirely devoted to the evaluation of the experimental uncertainties, with additional details provided in Supplements 2, 3, 4 and 5, as briefly summarized hereafter.

- 170 • To estimate the uncertainties affecting the experimentally measured *water depths*, we account both for the instrument accuracy and for the repeatability of the tests (flow variability). The latter is detailed in Supplements 3 and 4. The water depth profiles provided in Supplement 4 also display the corresponding uncertainties (~ 2 mm). Importantly, Figs. 3 and 5 compare the influence of the experimental uncertainties and the effect of model distortion on the upscaled water depths. See also P. 8 L9-11 and L18-19: "... despite the uncertainties in the measurements, the differences between the model runs increase very consistently as the model distortion increases ...", as well as L1-2 on p. 9: "... the differences arising from the change in model distortion greatly exceed the estimated experimental uncertainty."
- 175 • The uncertainties on estimated *outflow discharges* are also reported in Section 4.1 and details on the repeatability of the measurements are presented in Supplement 5 (see also L27-28 on P. 7: "comparing the repeated measurements demonstrates an excellent repeatability of the outflow discharge estimates"). The standard deviation of estimated outflow discharges is displayed in Fig. S21, which supports the comments formulated in Section 4.3.

180 In addition, all our main results are presented with the corresponding uncertainties (Fig. 3, Supplements 6, 7 and 8).

Specific comments

Abstract – The meaning of ‘artefacts’ should be presented, otherwise it is too vague.

185 We have now detailed what we mean by “artefacts” in the Introduction of the revised manuscript (P2, L26-29). Additionally, since the word “artefacts” is also used in the Abstract, we have now mentioned examples of such artefacts in the revised version of the Abstract (P1, L13-14).

190 P1, L34: the authors refer to aerials images as a source for reference data. Although this is in theory valid, in many urban flooding situations the events are of short duration making capture of aerial data (e.g. from satellite and un-or manned aircraft sensors) challenging.

195 We agree with the Referee about the challenges associated to the use of aerial imagery to document (short duration) urban flooding. This is actually what we meant already by “... aerial imagery are available; but they remain uncertain and insufficient ...”. To be more specific in the revised manuscript, we explicitly mention the issue of time resolution: “insufficient (e.g. inadequate time resolution)” (P1, L36).

P2, L6: the authors may also want to refer other recent lab experiments that were conducted at the real scale (e.g. Moy de Vitry et al., 2017 – ESSD). These, of course, do have other challenges than those investigated in the present manuscript, but should also be discussed in the context of urban drainage hydraulic lab experiments.

200 In the revised manuscript, we refer to the study by Moy de Vitry et al. (2017), which uses a full scale urban flooding model to explore the potential of unconventional data (video data and computer vision) for monitoring urban flooding (P2, L7-9).

P2, L11: the authors refer to ‘both scales’ at this point of the manuscript without yet having defined it. I assume the authors are referring to horizontal and vertical scales. Please clarify.

205 The wording “both scales” does not refer to the horizontal and vertical scales; but it refers to the “prototype” and the “model”. This has now been clarified in the revised manuscript (P2, L20).

P3, L35: ‘Using a distorted model...’. It seems that the sentence should start with something like ‘By using a distorted...’.

210 Indeed, this has been rephrased as ‘By using a distorted model’ in the revised manuscript in P.4 L11.

P5, L19: ‘... at least four to six...’. I believe the authors can be more specific here. The mentioned experiment as conducted in 2017, so it should not be difficult to know exactly how many runs were carried out!

215 When writing “... at least four to six experimental runs ...”, we did not mean that we do not know the exact number of runs; but simply that the number of runs depends on the considered layout of obstacles, as detailed in Table 3:

- 4 runs are available for the layout “Narrow streets ...”
- 6 runs are available for the layout “Intermediate streets ...”
- 6 runs are available for the layout “Wide streets ...”

220 This has now been made clearer in the revised manuscript (P5, L35): “For each of these layouts, between four and six experimental runs (Table 3) were conducted with various steady inflow discharges ...”.

P5, L22: ‘In contrast, ...’, I cannot understand to what (sentence or idea) this sentence is contrasting to. Please consider rephrasing it.

225 We actually mean “In contrast with the dataset of Araud (2012) ...”, the dataset of Velickovic et al. (2017) does not include discharge data. This sentence has been clarified in the revised manuscript (P6, L1).

P7, L16: ‘...may be ...’ the use of this words does not sound very scientific. Please consider a different construction, e.g. ‘is between’

230 As suggested by the Referee, this sentence has been rephrased as follows (P7, L36): “... the standard deviation remains below 2 to 6 mm (depending on the experimental run)”.

2. 9: P8, L12-17: this seems to belong to the methodology section. It is definitely not a result. Please consider moving these sentences to another section.

235 These sentences do present results, because upscaled water depths (not the original experimental observations) are obtained by applying the methodology developed in the present study.

P8, L26: ‘...almost...’. This is not very scientific word. How many? What %?

240 The words “almost” and “most” used in the Section 4.3 refer to a general trend; but we agree with the Referee that it deserves being quantified. Hence, we use now a much more specific wording:

- P9, L12-13: “... *in the range of $\pm 10\%$ in 11 streets out of 14 (and in the range of $\pm 12\%$ in 13 streets out of 14, with a maximum change of $+18\%$ in just a single street)”*”

- P9, L8-9: “... the variation of the outflow discharge partition with d shows a consistent monotonous trend (increasing, constant or decreasing) in all outlet streets”

245

Figure 6a: does the figure report V ($V = \text{SUM } Q$) or Q ? this should be made clear. Also, if it is Q , the variation can be included (error bars?).

Figure 6a presents the outflow discharge in each street, as described in Section 4.3. The variations of outflow discharge are presented in Fig. S21 in the form of error bar.

250

2. 12: P9, L9: ‘Aspect ratio’. Should this be defined? Is it similar to hydraulic radius? Please explicitly define the meaning of ‘aspect ratio’

The aspect ratio is defined as the ratio between the water depth and the street width. This definition was indeed missing in the original manuscript and it has now been added in Section 5.1 of the revised manuscript, where it is first used (P9, L29).

255

Laboratory modelling of urban flooding: strengths and challenges of distorted scale models

Xuefang Li¹, Sébastien Erpicum¹, Martin Bruwier¹, Emmanuel Mignot², Pascal Finaud-Guyot³, Pierre Archambeau¹, Michel Pirotton¹, Benjamin Dewals¹

5 ¹ Hydraulics in Environmental and Civil Engineering (HECE), University of Liège (ULiège), Liège, 4000, Belgium

² LMFA, CNRS-Université de Lyon, INSA de Lyon, Lyon, 69100, France

³ ICube laboratory (UMR 7357), Fluid mechanics team, ENGEES, Strasbourg, France

Correspondence to: Xuefang Li (xuefang.li@uliege.be)

Abstract

10 Laboratory experiments are a viable approach to improve process-understanding and generate data for the validation of computational models. However, laboratory scale models of urban flooding in street networks are often distorted, i.e. different scale factors are used in the horizontal and vertical directions. This may result in artefacts when transposing the laboratory observations to the prototype scale (e.g. alteration of secondary currents or of the relative importance of frictional resistance). The magnitude of such artefacts was not studied in the past for the specific case of urban flooding.
15 Here, we present a preliminary assessment of these artefacts based on the reanalysis of two recent experimental datasets related to flooding of a group of buildings and of an entire urban district, respectively. The results reveal that, in the tested configurations, the influence of model distortion on the upscaled values of water depths and discharges are both of the order of 10 %. This is comparable to other sources of uncertainties, such as on hydrological data.

Keywords

20 Flood risk; laboratory model; scale factor; distortion effects; urban flooding

1. Introduction

Worldwide, floods are the most frequent natural disasters and they cause over one third of overall economic losses due to natural hazards (UNISDR, 2015). Flood losses are particularly severe in urban environments and urban flood risk is
25 expected to further increase over the 21st century (Chen et al., 2015; Lehmann et al., 2015; Mallakpour and Villarini, 2015). In response, concepts such as *water-sensitive urban design* and the *sponge city* model are rapidly developing (Gaines, 2016; Liu, 2016). However, the design and sizing of measures aiming at enhancing urban flood protection require accurate tools for risk modelling and scenario analysis (Wright, 2014).

Specifically, reliable predictions of flood *hazard* are a prerequisite to support flood risk management policies. This
30 includes the accurate estimation of inundation extent, spatial distribution of water depth, discharge partition and flow velocity in urbanized flood prone areas, since these parameters are critical inputs for flood impact modelling (Dottori et al., 2016; Kreibich et al., 2014; Molinari and Scorzini, 2017). State-of-the-art numerical inundation models benefit from increasingly available remote sensing data, such as laser altimetry. Nonetheless, their validation for urban flood configurations remains incomplete because reference data from the field are relatively scarce and, to a great extent,
35 inadequate (Dottori et al., 2013). Mostly watermarks and aerial imagery are available; but they remain uncertain and insufficient (e.g. inadequate time resolution) to reflect the whole complexity of inundation flows, especially in densely

urbanized floodplains. Additional information on the velocity fields and discharge partitions are necessary to understand the multi-directional flow pathways induced by the built-up network of streets and open areas, buildings and underground systems (such as the drainage network, (Rubinato et al., 2017), particularly under more extreme flood conditions ~~than ever observed in the past~~. When available, pointwise velocity measurements remain limited in number due to the

5 challenging conditions for field measurement during a major urban flood event (Brown and Chanson, 2012, 2013).

To complement field data, laboratory models may be a viable alternative, since they enable accurate measurements of flow characteristics under controlled conditions. Recently, Moy de Vitry et al. (2017) used a full scale lab experiment to explore the potential of video data and computer vision for urban flood monitoring; but most laboratory experiments of urban flooding were performed on reduced scale models (Mignot et al., 2019). Existing lab studies representing urban

10 flooding at the district level provide data on street discharges and water depths (Finaud-Guyot et al., 2018), and in some cases also surface flow measurements (LaRocque et al., 2013). Few studies report point velocity measurements for urban flooding at the district level (Güney et al., 2014; Park et al., 2013; Smith et al., 2016; Zhou et al., 2016), while detailed velocity measurements are generally available only for more local analyses (e.g. at the level of a single manhole, Martins et al., 2018).

15 Laboratory scale models consist in replicating a full-scale configuration (also called *prototype*), at a smaller scale. The *scale factor* of such a model is defined as the ratio L_p / L_m between a characteristic length L_p in the prototype and the corresponding characteristic length L_m in the model (Novak, 1984). The design of scale models is based on the similarity theory, which states that the ratio between the dominating forces governing the flow should remain the same in the model and in the prototype. For free surface flows, Froude similarity is generally used: the ratio between inertia forces and the

20 gravity are kept identical in the model and in the prototype. This implies that the Froude number F_m in the model remains the same as the Froude number F_p in the prototype, where the Froude number is defined as $F = V / (g H)^{0.5}$, with V a characteristic flow velocity (ms^{-1}), g the gravity acceleration (ms^{-2}) and H a characteristic water depth (m).

Caution must be taken when interpreting observations from laboratory models because not all the ratios of forces can be kept the same in the prototype and in the model. For instance, when the Froude similarity is applied, the ratio between

25 inertia and viscous forces may vary between the prototype and the model. This may result in so-called *scale effects*, which are artefacts arising from the reduced size of the model compared to the real-world configuration due to governing non-dimensional parameters (i.e. force ratios) which are not identical between the model and its prototype (Heller, 2011). This may include alteration of the flow regime (laminar or transition, instead of complete turbulent), of the relative importance of friction resistance or of 2D and 3D flow structures.

30 The ratio between inertia and viscous forces is expressed through the Reynolds number: $R = 4 R_H V / \nu$, with R_H a characteristic value of the hydraulic radius (ratio between the flow area and the wetted perimeter, in m) and ν the kinematic viscosity of water (m^2s^{-1}). According to Froude similarity and without distortion (see Section 2.1), R scales with the power $-3/2$ of the scale factor of the model. Therefore, the magnitude of the scale effects tends to be magnified when a larger scale factor is used. Still, for large enough Reynolds numbers (i.e. sufficiently turbulent flow) both on the

35 prototype and in the model, the impact of the scale effects remains limited. For modelling rivers and flood plains-free surface flow, Chanson (2004) recommends to keep the Reynolds number above 5,000 for the lowest flow rate, and to use scale factors below 25 to 50. These recommended values are mainly experience-based; but they were never ascertained for urban flooding models.

One process which is particularly complex to represent in scale models of urban flooding is the frictional resistance.

40 Given that smooth material is generally used to construct the bottom and the walls of these models, there are two competing effects (lower Reynolds number in the model compared to the prototype; but also lower relative roughness)

which, in general, hamper a definite prediction on whether frictional resistance is over- or under-estimated compared to the prototype. This issue is further discussed in Section 5.1.

Recently, urban flooding in street networks has been analysed experimentally in laboratory setups that aim at representing inundation flow across a whole urban district. To cover an entire urban district in a laboratory, while keeping the Reynolds number reasonably high and limiting the measurement errors, distinct scale factors have been used along the horizontal and the vertical directions, leading to so-called *distorted* scale models. This type of models was used previously for various applications (e.g. fluvial morphodynamics); but its use for urban flooding studies is relatively new (Finaud-Guyot et al., 2018; Güney et al., 2014; Smith et al., 2016). While scale effects in general were investigated in the past for a range of configurations, such as the experimental representation of impulse waves (Heller et al., 2008) or the hydraulics of piano key weirs (Epicum et al., 2016), the specific artefacts arising from the model distortion were hardly studied and, particularly, not for experimental models of urban flooding. Given the overwhelming importance of urban flooding, the present paper focuses specifically on the effects of model distortion in laboratory modelling of urban flooding at the district level. It presents a reanalysis of two recent experimental datasets (Araud 2012; Velickovic et al., 2017) to find out to which extent a strong distortion of an entire urban district model affects the observed water depths and flow partition in-between the streets.

Section 2 provides background information and details the motivations of the study. The considered datasets and the methodology are described in section 3. The results are presented in section 4 and implications thereof are discussed in section 5. Finally, conclusions are drawn in section 6.

2. Background and motivation

2.1 Undistorted and distorted models of urban flooding

Laboratory models have been used for studying urban flooding at various levels, ranging from limited spatial extents (e.g. a single storm drain) up to the level of a whole urban district. Some laboratory models focusing on a limited spatial extent were constructed at the prototype scale, i.e. with a scale factor equal to unity (Djordjevic et al., 2013; Lopes et al., 2013, 2017). At intermediate levels, such as when a single street or a single crossroad is represented, scale factors of the order of 10 to 20 were used (Lee et al., 2013; Mignot et al., 2013; Rivière et al., 2011) which is generally deemed not to lead to excessive scale effects (Chanson, 2004). In contrast, when it comes to the experimental analysis of flooding at the level of an entire urban district, the spatial extent of the prototype to be represented becomes considerably larger ($\sim 10^2 - 10^3$ m), as summarized in Table 1 and sketched in Supplement 1, so that scale factors reach values as high as 100 - 200.

LaRocque et al. (2013) focused on a limited portion of an urbanized floodplain (280 m \times 124 m) and used a scale factor of 50, leading to a model Reynolds number of the order of $\sim 7 \times 10^4$. Testa et al. (2007) considered a scale factor of 100 to study transient flooding of a group of buildings extending over 160 m \times 120 m. This led nonetheless to model Reynolds numbers exceeding 10^5 because extreme flooding scenarios were tested (dam break-induced flood). To analyse river flooding at the level of an entire urban district (1 km \times 2 km), Ishigaki et al. (2003) also used a scale factor of 100; but in this case, despite a particularly large experimental facility (10 m \times 20 m), the model Reynolds number was of the order of 7×10^3 with water depth lower than 1 cm, and even below in some streets. Ishigaki et al. (2003) reported that the observed flow became “laminar” in some parts of the model, hence exacerbating scale effects. This questions the validity of the upscaled lab observations, and highlights a difficulty in the design of experimental models for analysing urban flooding, namely the substantial difference between the characteristic length in the horizontal direction (e.g. street width)

and in the vertical direction (e.g. water depth). This issue is similar to the case of laboratory models of large rivers and coastal systems (Wakhlu, 1984).

To partly overcome this difficulty, so-called *distorted* laboratory models have also been used. They consist in applying distinct scale factors, respectively, e_H and e_V , along the horizontal and vertical directions:

$$e_H = \frac{L_p}{L_m} \quad \text{and} \quad e_V = \frac{H_p}{H_m}, \quad (1)$$

where H_p and H_m are characteristic heights in the prototype and in the model. Since L_p is always much higher than H_p , using a horizontal scale factor e_H larger than the vertical scale factor e_V enables preserving higher water depths in the laboratory model compared to an equivalent undistorted model requiring the same horizontal space in the laboratory. This approach offers several advantages: (i) inaccuracies in water depth measurement become smaller in relative terms; (ii) the Reynolds number is higher, so that some artefacts (e.g. viscous effects) due to a change in the turbulence regime are minimized. By using a distorted model, it is even possible to keep both Reynolds and Froude numbers identical in prototype and in the model, with the same fluid (Finaud-Guyot et al., 2018). Distorted models have been used for a broad range of applications in fluvial and coastal hydraulics. Among others, Jung et al. (2012) applied scale factors $e_H = 120$ and $e_V = 50$ to study a floating island in a river; Wakhlu (1984) obtained comparable results on an undistorted ($e_H = e_V = 36$) and a distorted model ($e_H = 100$; $e_V = 17$) of a river division weir; However, since a distorted laboratory model corresponds to a representation of the prototype shrunk *differently* along the horizontal and the vertical directions, it may also lead to specific artefacts in the laboratory observations. For instance, Sharp and Khader (1984) highlighted distortion effects by comparing an undistorted ($e_H = e_V = 20$) and a distorted model ($e_H = 400$; $e_V = 100$) to study wave transmission and assess stone stability in a harbour.

2.2 Recent studies based on distorted models of urban flooding and potential artefacts

Figure 1 shows the horizontal and vertical scale factors used in recent laboratory studies of urban flooding at the district level. The grey shading in Figure 1a suggests conceptually that the larger the scale factors, the greater the expected scale effects; while Figure 1b indicates that using a strongly distorted model (i.e. a large ratio e_H / e_V) also leads to specific artefacts, which we refer to hereafter as *distortion effects*. In this regard, Based on experience, Chanson (2004) suggests to keep the ratio e_H / e_V below 5 to 10 (orange dash-dot lines in Figure 1b).

An outdoor distorted model was used by Smith et al. (2016) to represent pluvial flooding in an urban district of relatively limited extent (Table 1). The scale factors were as low as $e_H = 30$ and $e_V = 9$ (distortion ratio: $e_H / e_V = 3.3$), thus minimizing potential scale effects. Similarly, Güney et al. (2014) used an outdoor distorted model of a large urban district (Table 1), with $e_H = 150$ and $e_V = 30$ (distortion ratio: $e_H / e_V = 5$), to represent dam-break-induced flood waves. The distortion ratio of these two models remains below the upper bound of 5 to 10 as recommended by (Chanson, 2004). Lipeme Kouyi et al. (2010), Araud (2012) and Finaud-Guyot et al. (2018) considered the same geometric configuration (Supplement 1), involving seven streets aligned along one direction, crossing seven other streets. The scale factors used by Lipeme Kouyi et al. (2010) were $e_H = 100$ and $e_V = 25$. The setup of Araud (2012) and Finaud-Guyot et al. (2018) contains substantial improvements compared to the initial setup of Lipeme Kouyi et al. (2010), mainly regarding the control of the inflow in each street separately; but it uses a considerably higher horizontal scale factor ($e_H = 200$) and, simultaneously, a smaller vertical scale factor ($e_V = 20$). This leads to a particularly high ratio e_H / e_V , equal to the upper limit of 10 suggested by Chanson (2004). If the model of Araud (2012) and Finaud-Guyot et al. (2018) was not distorted, the Reynolds numbers would have been about 30 times lower ($R \sim 1 \times 10^2 - 1 \times 10^3$) than they actually are (Table 1).

2.3 Specific objective of the present study

While the motivations for using a large distortion ratio between the horizontal and vertical scale factors are not arguable (fit the model within a limited laboratory space, improve the accuracy of water depth measurement, maintain a sufficiently high Reynolds number), assuming no artefacts in experimental observations performed on a strongly distorted model may legitimately be questioned. Among other aspects, the complex three-dimensional flow structures observed in individual crossroads (Mignot et al., 2008, 2013; Rivière et al., 2011, 2014) suggest that “shrinking” the model vertically is likely to alter these flow structures, and hence also impair the representation of flow partition in-between the streets. The influence of strong distortion in laboratory scale models was investigated for some specific applications, such as in coastal engineering (Ranieri, 2007; Sharp and Khader, 1984), but it ~~was never~~ **has not to date been** analyzed in the context of laboratory models of urban flooding.

Therefore, in this paper, we aim to evaluate the artefacts arising from the use of distorted laboratory models in experimental studies of urban flooding at the district level. We base our assessment on the reanalysis of two recent datasets, presented respectively by Araud (2012) and by Velickovic et al. (2017). The latter does not represent a realistic urban district but solely of regular grid of obstacles, to some extent similar to a network of streets. We focus on the influence of model distortion on the observed water depths and discharge partition in-between the streets.

3. Data and methods

3.1 Datasets

Two datasets were reanalyzed, corresponding respectively to an entire urban district and to a group of buildings. The former dataset was collected by Araud (2012) in the ICube laboratory in Strasbourg (France) and was also presented by Arrault et al. (2016) and Finaud-Guyot et al. (2018) (Supplement 2: Figure S3a). The experimental model (5 m × 5 m) represents an idealized urban district of 1 km by 1 km at the prototype scale. It contains a total of 14 streets of various widths (0.05 m to 0.125 m) and 49 intersections (crossroads). The inflow discharge was controlled in each street individually, **and the uncertainty on the inflow discharge is estimated at about 1 % (Fiaud-Guyot et al., 2018)** and the outflow discharges were monitored downstream of each street. The uncertainties in the estimation of the outflow discharges are discussed in Section 4.1. For several steady inflow discharges, the water depths along the centreline of streets were measured using an optical gauge (1 mm accuracy, Figures S4 to S7). Hereafter, we consider the experimental runs performed with a total inflow discharge Q_m of 20, 60, 80 and 100 m³h⁻¹ in the laboratory model (Table 2). In each test, 50 % of the total inflow discharge was fed to the west face of the model and 50 % to the north face of the model. The specific inflow discharge was kept the same for each street of a given face, the outflow discharge was estimated from a calibrated rating curve (Araud, 2012). As detailed in Supplements 2 to 5, several measurements were repeated, which allows appreciating the reproducibility of the tests.

The second dataset was collected by Velickovic et al. (2017) in the Hydraulic Laboratory of Université Catholique de Louvain, Belgium. A group of 5 × 5 square obstacles (buildings) of 0.30 m by 0.30 m was installed in a horizontal flume 36 m long and 3.6 m wide. Several layouts of obstacles were considered and we analyse here three of them (aligned with the channel) (Figure S3b). **For each of these layout, between four and six** experimental runs **(Table 3)** were conducted with various steady inflow discharges **(accuracy of flowmeters: ~1 ls⁻¹)**. The three layouts differ by the distance in-between the obstacles (i.e. the street widths) in the direction normal to the main flow (0.0675 m, 0.10 m and 0.135 m). Profiles of water depth (accuracy: 0.1mm) were measured with movable ultrasonic probes along the centreline of the

streets aligned with the main flow direction. **In contrast with the dataset of Araud (2012),** the flow partition in-between the streets was not measured by Velickovic et al. (2017).

3.2 Method

As sketched in Figure 2a, the initial interpretation of the various experimental runs of Araud (2012) and Velickovic et al. (2017) was that each model run corresponds to a different flooding scenario (i.e. a different total inflow discharge Q_m into the urban district) represented with fixed scale factors e_H and e_V . In contrast, in the present reanalysis of the laboratory dataset, we propose to consider that a single flooding scenario was represented in each laboratory model; but that the various experimental runs actually correspond to different vertical scale factors e_V . This new perspective is sketched in Figure 2b.

As detailed hereafter, we followed a three-step procedure for the reanalysis, for each model:

1. select one experimental run, and assign to it plausible scale factors e_H and e_V ;
2. estimate the scale factor e_V corresponding to each of the other experimental runs, assuming that e_H remains unchanged and that all experimental runs simulate the same flood scenario;
3. upscale the experimental observations of each run to the prototype scale and compare them to each other.

15 Step 1

We considered that Run 1 (Table 2) of Araud (2012) corresponds to a representation of a given flooding scenario in a strongly distorted scale model, consistently with the original values $e_H = 200$ and $e_V = 20$ reported by Arrault et al. (2016). Similarly, for the dataset of Velickovic et al. (2017), we considered that the street width (0.10 m), in the model layout characterized by an intermediate street width, corresponds to 10 m in the prototype. This sets the horizontal scale factor to $e_H = 100$. Keeping $e_H = 100$ for the two other layouts leads to reproducing prototype street widths of 6.75 m for the narrow street layout and 13.5m for the wide street layout. As shown in Table 3, we also assumed that the experimentally observed water depth (~ 0.3 m) for the highest inflow discharge Q_m in the layout with an intermediate street width (Run 6) corresponds to about 4 m in the prototype (i.e. extreme flooding conditions such as induced by a dam break). This leads to a vertical scale factor $e_V = 13$ for this run (Table 3).

25 Step 2

For the dataset of Araud (2012), Runs 2 to 4 in Table 2 are now assumed to represent the same flooding scenario as Run1, with the same horizontal scale factor e_H ; but with adjusted vertical scale factors e_V . Similarly, all Runs in Table 3 (dataset of Velickovic et al., 2017) represent the same flooding scenario as Run 6 of the intermediate street layout; but with different vertical scale factors. For both datasets, the adjusted values of e_V were derived as follows:

- The run selected in Step 1 was upscaled to the prototype scale, enabling the determination of the inflow discharge Q_p in the prototype.
- Knowing the inflow discharge Q_m for each of the other model runs, the adjusted vertical scale factor was calculated as: $e_V = (Q_p / Q_m / e_H)^{2/3}$, consistently with Froude similarity.

The values of e_V derived from this procedure are detailed in Table 2 and Table 3 for the two datasets. The model distortion, expressed as the ratio d between e_H and e_V , varies between 3 and 7.7 in the dataset of Velickovic et al. (2017), and between 3.4 and 10 in the dataset of Araud (2012).

Step 3

Finally, for each model, the experimental observations of all model runs (measured water depths and outflow discharges) were upscaled to the prototype scale and compared. This approach is similar to the “scale series” method described by Heller (2011) and used by Erpicum et al. (2016) although here we vary only the vertical scale factor.

5 If there were no artefacts arising from the model distortion, the prototype scale predictions from the different experimental runs should superimpose. In the following, we assess the magnitude of the distortion effects by comparing the upscaled observations from each experimental run with one selected reference, namely the experimental run corresponding to the weakest distortion (minimum value of d), for which we have the highest confidence in prototype event replication: Run 4 ($d = 3.4$) in the dataset of Araud (2012) and Runs 1 of each layout ($d = 3, 4.3, 4.9$) in the dataset of Velickovic et al.
10 (2017).

4. Results

We first present an estimation of the experimental uncertainties (Section 4.1); then, we detail the effect of model distortion on the upscaled water depths (Section 4.2). Finally, we present the effect of model distortion on the partition of outflow discharges (Section 4.3).

15 4.1 Experimental uncertainties

The measurement accuracy and the fluctuations of water surface are considered as the two main sources of uncertainty in the experimental records of water depths. For the dataset of Araud (2012), the accuracy of the optical gauge is about 1 mm. As shown in Supplement 2, the water depths were measured twice at some locations for Run 3 ($60\text{m}^3\text{h}^{-1}$) and Run 2 ($80\text{m}^3\text{h}^{-1}$). The repeatability of the tests is evaluated by comparing the repeated measurements. As detailed in Supplement
20 3, the difference in water depths between two measurements remains below 2 mm for 90 % of the dataset. Therefore, we estimate here the water depth measurement uncertainty at about 2 mm. Representative profiles of measured water depths (including repetitions) are displayed in Supplement 4 and they confirm the validity of this uncertainty estimate.
Uncertainties arising from inaccuracies in the inflow discharge measurement are also lumped into this uncertainty estimate.

25 The discharge at the outlet of each street was estimated from a rating curve corresponding to a weir at the downstream end of dedicated measurement channels (located downstream of each street outlet). The water depth measurements were performed at least three times for each model run. As detailed in Supplement 5, comparing the repeated measurements demonstrates an excellent repeatability of the outflow discharge estimates (Figures S12 to S15). Hence, the main source of uncertainty in the outflow discharge estimates is assumed to stem from the accuracy of water depth measurement
30 (1 mm) over the measurement weirs (Araud, 2012). This leads to about 2 % to 6 % uncertainty in the outflow discharges, as shown in Figure S16.

For the second dataset, the accuracy of the probes, as described by Velickovic et al. (2017), is 0.1 mm. Velickovic et al. (2017) also reported the standard deviation of the recorded water depths at each probe location. We used this as a proxy for estimating the flow variability. Figure S9 in Supplement 3 shows the cumulative distribution function of this standard
35 deviation over all measured data in the three layouts and for each experimental run. For 90 % of the measurement points, the standard deviation **remains below 2 to 6 mm (depending on the experimental run)**, which reflects considerable fluctuations in the free surface, particularly for the higher flow rates.

4.2 Effect of model distortion on predicted water depths

Dataset of Araud (2012)

All measured water depths were upscaled to the prototype scale using the vertical scale factors defined in Table 2. As exemplified in Figure 3 for street 4 (and in Figures S17 and S18 in Supplement 6 for streets A, B, and C), the tests conducted with the strongest distortion ($d = 8.6$ and $d = 10$) lead to the lowest estimates of water depths at the prototype scale. Conversely, the highest predicted water depths correspond systematically to the upscaled measurements from the tests involving a weaker distortion ($d = 3.4$), except nearby the downstream boundary conditions where all predicted water depths are close to each other. The tests conducted with $d = 7.1$ lead to intermediate estimates of water depths at the prototype scale. The reasons for these differences are discussed in section 5.1. Here, the uncertainty associated to the upscaled water depths is larger when the model distortion is limited since the absolute value of the measurement uncertainty remains the same in all model run; but a larger vertical scale factor is applied.

In Figure 4, Figure 5 and Table 4, we compare quantitatively the upscaled water depths obtained from the four different model runs listed in Table 2. The model run with the weakest distortion is used as a reference for comparisons. The following observations can be made:

- The scatter plots in Figure 4 confirm that the water depths derived from the model with the lowest distortion are generally higher than those derived from the other model runs.
- The dash-dot purple lines (and corresponding labels) (Figures 4b, 4d, 4f) indicate the range containing 90 % of the data. This shows that, despite the uncertainties in the measurements, the differences between the model runs increase very consistently as the model distortion increases. This consistent trend is also emphasized by the evolution of the mean difference (MD in Table 4) from -0.058 to -0.107 as d varies from 7.1 to 10, as well as by the cumulative distribution of the differences in upscaled water depths derived from the various model runs (Figure 5).
- The 5 % percentile of the differences between the models with varying distortions is of the order of -20 to -25 cm (Table 4). When compared to the order of magnitude of the absolute value of water depths (~ 2 m), the effect of model distortion in the tested configurations is of the order of 10 % of the upscaled water depths.
- The spatial distributions provided in Figure 4 also reveal that the influence of model distortion tends to increase in the upstream part of the urban district (i.e. closer to the north and west faces). Two reasons contribute to explain this: (i) the water depths in the downstream part are mainly controlled by the free outflow boundaries and remain therefore more similar whatever the distortion; and (ii) the cumulated effect of friction (expected to be underestimated in the more distorted models compared to the less distorted or undistorted models, as detailed in Section 5.1) is stronger in the upstream part of the flow.

Dataset of Velickovic et al. (2017)

Figure S19 in Supplement 7 displays the upscaled water depth profiles based on the dataset of Velickovic et al. (2017) and the scale factors defined in Table 3 for each of the three layouts. The upscaled water depths in the three model layouts differ substantially as the same discharge Q_p is imposed (h_p in narrow street: ~ 5 m; median street: ~ 3.5 m; wide street: ~ 2.5 m). Now, for each model layout separately, we compare the observations corresponding to various inflow discharges in the same way as for the dataset of Araud (2012). It is found that the upscaled water depths in the urban area become systematically lower as the model distortion increases. This is observed consistently for the three layouts of

obstacles (narrow, intermediate and wide streets) and the differences arising from the change in model distortion greatly exceed the estimated experimental uncertainty. This result is also confirmed by the values of mean differences (MD) reported in Table 5, as well as by the cumulative distribution functions of the differences in water depths (Figure S20 in Supplement 7). In each layout, the model characterized by the lowest value of d was taken as a reference for comparison.

5 4.3 Effect of model distortion on outflow discharges

For the dataset of Araud (2012), the upscaled values of the discharge at the outlet of each street is shown in Supplement 8 (Figure S21). Although the differences in the outflow discharge appear of the same order of magnitude as the experimental uncertainties, the variation of the outflow discharge **partition** with d shows a consistent monotonous trend (increasing, **constant** or decreasing) **in all outlet streets**. Since the mass balance remains unchanged at the level of the whole district, the direction of change in the outlet discharge varies from one street to the other. In Figure 6a, we compare the upscaled outflow discharge in each street to the corresponding value derived from the less distorted model ($d = 3.4$). The changes in the estimated outflow discharge when d is varied are **in the range of $\pm 10\%$ in 11 streets out of 14 (and in the range of $\pm 12\%$ in 13 streets out of 14, with a maximum change of $+18\%$ in just a single street).**

The magnitude of model distortion effects may differ from one flow variable to the other (Heller, 2011). To be able to appreciate the relative influence of model distortion on the outflow discharge and on the water depths, we estimated for each street outlet (noted i) the change in upscaled water depth (h_i / h_{ref}) “associated” to the observed change in the outflow discharge (Q_i / Q_{ref}) when the model distortion is varied (from d_{ref} to d_i). To do so, using Froude similarity leads to: $h_i / h_{ref} = (Q_i / Q_{ref})^{2/3} e_{v,i} / e_{v,ref}$. As shown in Figure 6, the results indicate that, in the present case, the magnitude of model distortion effects appear relatively comparable for the water depths and the outflow discharges (of the order of $\pm 10\%$).

5. Discussion

5.1 Relative importance of the main causes of distortion effects

The differences in the upscaled water depths as a function of the model distortion d may result from differences in localized flow features (e.g. local head losses at street intersections) as well as from more distributed effects, which in the present case are likely to dominate only along the mainly one-dimensional flow regions (typically within a street). The latter effects may be categorized into three types:

- differences in the relative importance of the bottom roughness,
- differences in the relative importance of viscosity effects,
- differences in the aspect ratio (**ratio between water depth and street width**) of the flow section, affecting notably the secondary currents and velocity profiles of streamlines velocity.

It is possible that the third of these effects has a substantial influence on the flow. The third type of effects is probably dominant, specifically at street intersections, mainly as a result of the change in the aspect ratio of the flow section.

However, the available datasets, involving only observed water depths and discharges at the model outlets, do not enable investigating in detail these more localized effects. This could be achieved by means of new experiments with detailed velocity measurements within the urban district. 2D and 3D computational modelling may also be useful in this respect, the former enabling to account for the spatial variations of flow characteristics and the latter giving full access to the complex flow fields developing at the street intersections.

Nonetheless, we appreciate here the influence of the first two types of effects, of relevance in mainly one-dimensional flow regions. To do so, we estimate the energy slope $S_{f,p}$ at the prototype scale in the various model configurations based on Darcy-Weisbach equation:

$$S_{f,p} = \frac{e_V}{e_H} S_{f,m} = \frac{e_V}{e_H} \frac{f_m}{8} \frac{V_m^2}{gR_{H,m}} = \frac{1}{8} f_m \left(R_m, \frac{k_{s,m}}{R_{H,m}} \right) F^2 \frac{h_m}{R_{H,m}} \frac{e_V}{e_H}$$

Effect of viscosity
Effect of relative roughness height
Effect of aspect ratio

(2)

in which the friction coefficient f_m can be computed as a function of the Reynolds number R_m and the relative roughness height $k_{s,m} / R_{H,m}$ using the explicit approximation of Colebrook-White formula given by Yen (2002). The roughness height $k_{s,m}$ was taken equal to 10^{-5} m to represent the smooth bottom and walls of the experimental setups.

Figure S22 shows the values of parameters R_m , $k_{s,m} / R_{H,m}$, f_m , $h_m / R_{H,m}$, and F representative of the flow conditions at the street inlets in the various experimental runs of Araud (2012). Given the values of R_m and $k_{s,m} / R_{H,m}$, the flow is in transitional regime in the Moody diagram. All these parameters change substantially when the model distortion d is varied (Figure S23). As d is increased, the friction coefficient f_m decreases systematically ($f_{i,m} / f_{ref,m} \sim 0.8$), due to the joint effect of a higher Reynolds number and a lower relative roughness height ($k_{s,m} / R_{H,m}$). Similarly, the Froude number tends to slightly increase with the model distortion. In contrast, parameter $h_m / R_{H,m}$ shows a considerable systematic increase (1.6 ~ 2.3) as d increases, due to the change in the aspect ratio of the flow section. The resulting energy slope $S_{f,m}$ in the inlet streets in each model run and the corresponding upscaled values $S_{f,p}$ are presented in Figure 7. The energy slope is lower in major streets (4, C, F) and in the straight streets (A, B). The energy slope $S_{f,m}$ in the model increases monotonously with the model distortion (mainly due to the increased wetted perimeter), whereas the energy slope $S_{f,p}$ at the prototype scale declines as d is increased (Figure 7b). This results from a “competition” between the increase in $S_{f,m}$ and a decrease in the ratio e_V/e_H , as d increases. This latter effect appears dominant in the mainly one-dimensional flow regions.

5.2 Reference used for comparison

Here, we used the “less distorted” models as a reference for our comparisons since the aim is to assess the influence of model distortion. However, given that we simply reanalysed already existing datasets obtained in experiments which were not designed in the first place for the sake of investigating the effect of model distortion, these “less distorted” models are also those characterized by the largest vertical scale factors, hence enhancing other artefacts such as stronger viscosity effects (see markers “*” in Figure 1). Also, the upscaled measurement uncertainties are maximum in this case, as can be seen in Figure 3. Therefore, the present study needs to be complemented by new tailored experiments involving a model series (Heller 2011) with various levels of distortion and including a valid reference model, i.e. at least one model without distortion and characterized by sufficiently-small scale factors so that viscosity effects and experimental uncertainties are kept minimum. This may be achieved by considering a model series in which the vertical scale factor e_V is kept constant in all models, while only the horizontal scale factor e_H is varied. This approach contrasts with the procedure followed here, in which e_H was constant and e_V was varied to take benefit of existing datasets.

6. Conclusion

Laboratory scale models representing flooding of an entire urban district are usually distorted, in the sense that the vertical scale factor (H_p / H_m) is often considerably smaller than the horizontal one. This paper evaluates the influence of the model distortion on the upscaled values of water depths and outflow discharge for relatively extreme flood conditions

(water depth and flow velocity of the order of 1~2 m and 0.5 ~ 2 m/s at the prototype scale). Two existing experimental datasets were reanalysed for this purpose. The results show that the stronger the model distortion, the lower the values of the upscaled water depths, whereas the influence on flow partition at the outlet of the street appears more complex.

5 The change in the upscaled water depths was found of the order of 10 % when the distortion of the model is varied by a factor 3. Moreover, about 10 % deviation was also obtained for the outflow discharges. This is of the same order as the influence of small-scale obstacles, as reported by Bazin et al. (2017).

For the water depths, the effect of varying the model distortion was found generally larger than the measurement uncertainties, whereas both effects are comparable for the discharge at the street outlets in the tested configurations. Note that the relative measurement uncertainties are smaller in distorted models than in undistorted models.

10 The uncertainty in the upscaled water depths is considerably larger in the models with limited distortion, because they also correspond to the highest vertical scale factors. Using those results as a reference seems sensible to assess the effect of distortion since they correspond to the lowest values of d ; but at the same time it is somehow problematic to use as a reference the results with the highest uncertainty (e.g. Figures S17 to S18). To overcome this issue, future experimental research should involve “model series” in which the horizontal scale factor e_H is reduced without changing the vertical
15 scale factor e_V . This will enable reducing the influence of distortion without increasing the error in the estimated water depths; but this requires the collection of new experimental measurements, which are presently lacking.

More controlling parameters should also be considered, such as the bottom slope, and computational modelling should complement the laboratory experiments. Moreover, in real-world urban flooding, the urban drainage system may also
20 have a substantial influence. Laboratory modelling of dual drainage becomes even more intricate due to the combination of pressurized and surface flow (e.g. Rubinato et al., 2017). This poses additional constraints on the design of the scale models and leads to extra experimental challenges which would deserve further research. Finally, existing experiments of urban flooding at the district level have delivered mostly discharge and water depth data; but there is a need for more pointwise velocity measurements (e.g. Martins et al., 2018) to gain deeper insights into the flow processes.

7. Acknowledgements

25 This research was partly funded through a grant for Concerted Research Actions (Grant n°ARC 13-17/01) financed by the Wallonia-Brussels Federation. The Authors gratefully acknowledge Prof. Sandra Soares-Frazão (Université Catholique de Louvain, Belgium) for sharing the experimental datasets.

8. References

30 Araud, Q.: Simulation des écoulements en milieu urbain lors d'un événement pluvieux extrême, Université de Strasbourg., 2012.

Arrault, A., Finaud-Guyot, P., Archambeau, P., Bruwier, M., Erpicum, S., Piroton, M. and Dewals, B.: Hydrodynamics of long-duration urban floods: hacknewline experiments and numerical modelling, *Natural Hazards and Earth System Sciences*, 16(6), 1413–1429, doi:10.5194/nhess-16-1413-2016, 2016.

35 Bazin, P.-H., Mignot, E. and Paquier, A.: Computing flooding of crossroads with obstacles using a 2D numerical model, *Journal of Hydraulic Research*, 55(1), 72–84, doi:10.1080/00221686.2016.1217947, 2017.

Brown, R. and Chanson, H.: Suspended sediment properties and suspended sediment flux estimates in an inundated urban environment during a major flood event, *Water Resources Research*, 48(11), doi:10.1029/2012WR012381, 2012.

- Brown, R. and Chanson, H.: Turbulence and suspended sediment measurements in an urban environment during the Brisbane River flood of January 2011, *Journal of Hydraulic Engineering*, 139(2), 244–253, doi:10.1061/(ASCE)HY.1943-7900.0000666, 2013.
- 5 Chanson, H.: 14 - Physical modelling of hydraulics, in *Hydraulics of Open Channel Flow (Second Edition)*, edited by H. Chanson, pp. 253–274, Butterworth-Heinemann, Oxford., 2004.
- Chen, Y., Zhou, H., Zhang, H., Du, G. and Zhou, J.: Urban flood risk warning under rapid urbanization, *Environmental Research*, 139, 3–10, doi:https://doi.org/10.1016/j.envres.2015.02.028, 2015.
- 10 Djordjevic, S., Saul, A. J., Tabor, G. R., Blanksby, J., Galambos, I., Sabtu, N. and Sailor, G.: Experimental and numerical investigation of interactions between above and below ground drainage systems, *Water Science and Technology*, 67(3), 535–542, doi:10.2166/wst.2012.570, 2013.
- Dottori, F., Di Baldassarre, G. and Todini, E.: Detailed data is welcome, but with a pinch of salt: Accuracy, precision, and uncertainty in flood inundation modeling, *Water Resources Research*, 49(9), 6079–6085, 2013.
- Dottori, F., Figueiredo, R., Martina, M. L. V., Molinari, D. and Scorzini, A. R.: INSYDE: A synthetic, probabilistic flood damage model based on explicit cost analysis, *Natural Hazards and Earth System Sciences*, 16(12), 2577–2591, doi:10.5194/nhess-16-2577-2016, 2016.
- 15 Erpicum, S., Tullis, B. P., Lodomez, M., Archambeau, P., Dewals, B. J. and Pirotton, M.: Scale effects in physical piano key weirs models, *Journal of Hydraulic Research*, 54(6), 692–698, doi:10.1080/00221686.2016.1211562, 2016.
- Finaud-Guyot, P., Garambois, P.-A., Araud, Q., Lawniczak, F., François, P., Vazquez, J. and Mosé, R.: Experimental insight for flood flow repartition in urban areas, *Urban Water Journal*, 0(0), 1–9, doi:10.1080/1573062X.2018.1433861, 2018.
- 20 Gaines, J. M.: Flooding: Water potential, *Nature*, 531(S54-S55), 2016.
- Güney, M. S., Tayfur, G., Bombar, G. and Elci, S.: Distorted Physical Model to Study Sudden Partial Dam Break Flows in an Urban Area, *Journal of Hydraulic Engineering*, 2014.
- Heller, V.: Scale effects in physical hydraulic engineering models, *Journal of Hydraulic Research*, 49(3), 293–306, doi:10.1080/00221686.2011.578914, 2011.
- 25 Heller, V., Hager, W. H. and Minor, H.-E.: Scale effects in subaerial landslide generated impulse waves, *Experiments in Fluids*, 44(5), 691–703, doi:10.1007/s00348-007-0427-7, 2008.
- Ishigaki, T., Keiichi, T. and Kazuya, I.: Hydraulic model tests of inundation in urban area with underground space, Theme B, Proc. of XXX IAHR Congress, Greece, 2003.
- 30 Jung, S., Kang, J., Hong, I. and Yeo, H.: Case study: Hydraulic model experiment to analyze the hydraulic features for installing floating islands, *Scientific Research*, 2012.
- Kreibich, H., Van Den Bergh, J.C.J.M., Bouwer, L.M., Bubeck, P., Ciavola, P., Green, C., Hallegatte, S., Logar, I., Meyer, V., Schwarze, R. and Thieken, A. H.: Costing natural hazards, *Nature Climate Change*, 4, 303–306, 2014.
- LaRocque, L. A., Elkholy, M., Chaudhry, M. H. and Imran, J.: Experiments on Urban Flooding Caused by a Levee Breach, *Journal of Hydraulic Engineering*, doi:10.1061/(ASCE)HY.1943-7900.0000754, 2013.
- 35 Lee, S., Nakagama, H., Kawaike, K. and Zhang, H.: Experimental validation of interaction model at storm drain for development of integrated urban inundation model, *Journal of Japan Society of Civil Engineers, Ser. B1 (Hydraulic Engineering)*, 69(4), I_109–I_114, doi:10.2208/jscejhe.69.I_109, 2013.
- Lehmann, J., Coumou, D. and Frieler, K.: Increased record-breaking precipitation events under global warming, *Climatic Change*, 132(4), 501–515, doi:10.1007/s10584-015-1434-y, 2015.
- 40 Lipeme Kouyi, G., Rivière, N., Vidalat, V., Becquet, A., Chocat, B. and Guinot, V.: Urban flooding: One-dimensional modelling of the distribution of the discharges through cross-road intersections accounting for energy losses, *Water Science and Technology*, 61(8), 2021–2026, doi:10.2166/wst.2010.133, 2010.
- Liu, D.: Water supply: China's sponge cities to soak up rainwater, *Nature*, 537, 307, 2016.

- Lopes, P., Leandro, J., Carvalho, R. F., Pascoa, P. and Martins, R.: Numerical and experimental investigation of a gully under surcharge conditions, *Urban Water Journal*, 12(6), 468–476, doi:10.1080/1573062X.2013.831916, 2013.
- Lopes, P., Carvalho, R. F. and Leandro, J.: Numerical and experimental study of the fundamental flow characteristics of a 3D gully box under drainage, *Water Science and Technology*, 75(9), 2204–2215, doi:10.2166/wst.2017.071, 2017.
- 5 Mallakpour, I. and Villarini, G.: The changing nature of flooding across the central United States, *Nature Climate Change*, 5(3), 250–254, doi:10.1038/nclimate2516, 2015.
- Martins, R., Rubinato, M., Kesserwani, G., Leandro, J., Djordjevic, S. and Shucksmith, J. D.: On the Characteristics of Velocities Fields in the Vicinity of Manhole Inlet Grates During Flood Events, *Water Resources Research*, 54(9), 6408–6422, doi:10.1029/2018WR022782, 2018.
- 10 Mignot, E., Paquier, A. and Rivière, N.: Experimental and numerical modeling of symmetrical four-branch supercritical cross junction flow, *Journal of Hydraulic Research*, 46(6), 723–738, doi:10.3826/jhr.2008.2961, 2008.
- Mignot, E., Zeng, C., Dominguez, G., Li, C.-W., Rivière, N. and Bazin, P.-H.: Impact of topographic obstacles on the discharge distribution in open-channel bifurcations, *Journal of Hydrology*, 494, 10–19, doi:10.1016/j.jhydrol.2013.04.023, 2013.
- 15 Mignot, E., Li, X. and Dewals, B.: Experimental modelling of urban flooding: A review, *Journal of Hydrology*, 568, 334–342, doi:https://doi.org/10.1016/j.jhydrol.2018.11.001, 2019.
- Molinari, D. and Scorzini, A.R.: On the influence of input data quality to Flood Damage Estimation: The performance of the INSYDE model, *Water (Switzerland)*, 9(9),688, doi:10.3390/w9090688, 2017.
- 20 Moy de Vitry, M., Dicht, S. and Leitaó, J. P.: floodX: urban flash flood experiments monitored with conventional and alternative sensors, *Earth System Science Data*, 9(2), 657–666, doi:10.5194/essd-9-657-2017, 2017.
- Novak, P.: Scaling Factors and Scale Effects in Modelling Hydraulic Structures, in *Symposium on Scale Effects in Modelling Hydraulic Structures*, edited by H. Kobus, International Association for Hydraulic Research (IAHR), 1984.
- 25 Park, H., Cox, D. T., Lynett, P. J., Wiebe, D. M. and Shin, S.: Tsunami inundation modeling in constructed environments: A physical and numerical comparison of free-surface elevation, velocity, and momentum flux, *Coastal Engineering*, 79, 9–21, doi:https://doi.org/10.1016/j.coastaleng.2013.04.002, 2013.
- Ranieri, G.: The surf zone distortion of beach profiles in small-scale coastal models, *Journal of Hydraulic Research*, 45(2), 261–269, doi:10.1080/00221686.2007.9521761, 2007.
- 30 Rivière, N., Travin, G. and Perkins, R. J.: Subcritical open channel flows in four branch intersections, *Water Resources Research*, 47(10), doi:10.1029/2011WR010504, 2011.
- Rivière, N., Travin, G. and Perkins, R. J.: Transcritical flows in three and four branch open-channel intersections, *Journal of Hydraulic Engineering*, 140(4), doi:10.1061/(ASCE)HY.1943-7900.0000835, 2014.
- Rubinato, M., Martins, R., Kesserwani, G., Leandro, J., Djordjevic, S. and Shucksmith, J.: Experimental calibration and validation of sewer/surface flow exchange equations in steady and unsteady flow conditions, *Journal of Hydrology*, 35 552, 421–432, doi:10.1016/j.jhydrol.2017.06.024, 2017.
- Sharp, J. J. and Khader, M. H. A.: Scale effects in Harbour Models Involving Permeable Rubble Mound Structures, in *Symposium on Scale Effects in Modelling Hydraulic Structures*, edited by H. Kobus, International Association for Hydraulic Research (IAHR), 1984.
- 40 Smith, G. P., Rahman, P. F. and Wasko, C.: A comprehensive urban floodplain dataset for model benchmarking, *International Journal of River Basin Management*, 14(3), 345–356, doi:10.1080/15715124.2016.1193510, 2016.
- Testa, G., Zuccala, D., Alcrudo, F., Mulet, J. and Soares-Frazão, S.: Flash flood flow experiment in a simplified urban district, *Journal of Hydraulic Research*, 45(SPEC. ISS.), 37–44 [online] Available from: <https://www.scopus.com/inward/record.uri?eid=2-s2.0-34247270217&partnerID=40&md5=6f5243924139c48c989752ae43d65f93>, 2007.
- 45 UNISDR: The human cost of weather related disasters, CRED 1995-2015, United Nations, Geneva., 2015.

Velickovic, M., Zech, Y. and Soares-Frazão, S.: Steady-flow experiments in urban areas and anisotropic porosity model, *Journal of Hydraulic Research*, 55(1), 85–100, doi:10.1080/00221686.2016.1238013, 2017.

Wakhlou, O. N.: Scale Effects in Hydraulic Model Studies, in *Symposium on Scale Effects in Modelling Hydraulic Structures*, edited by H. Kobus, International Association for Hydraulic Research (IAHR), 1984.

- 5 Wright, N.: Advances in flood modelling helping to reduce flood risk, *Proceedings of the Institution of Civil Engineers: Civil Engineering*, 167(2), 52, doi:10.1680/cien.2014.167.2.52, 2014.

Yen, B. C.: Open channel flow resistance, *Journal of Hydraulic Engineering*, 128(1), 20–39, 2002.

Zhou, Q., Yu, W., Chen, A. S., Jiang, C. and Fu, G.: Experimental Assessment of Building Blockage Effects in a Simplified Urban District, in *Procedia Engineering*, vol. 154, pp. 844–852., 2016.

10

Tables

Table 1 Recent laboratory experiments of urban flooding at the district level.

References	Prototype spatial extent (km)	Model spatial extent (m)	Horizontal scale factor e_H	Vertical scale factor e_V	Reynolds number R in the model
LaRocque et al. (2013)	0.28×0.124	5.6×2.48	50	50	$\sim 7 \times 10^4$
Testa et al. (2007)	0.16×0.12	1.6×1.2	100	100	$2 - 4 \times 10^5$
Ishigaki et al. (2003)	2×1	20×10	100	100	$\sim 7 \times 10^3$
Smith et al. (2016)	0.375×0.15	12.5×5	30	9	$7 - 9 \times 10^4$
Güney et al. (2014)	$\sim 2.2 \times 2.2$	$\sim 15 \times 15$	150	30	$2 - 10 \times 10^5$
Lipeme Kouyi (2010)	1×1	10×10	100	25	$0.5 - 5 \times 10^4$
Araud (2012) and Finaud-Guyot et al. (2018)	1×1	5×5	200	20	$0.8 - 4 \times 10^4$

15

Table 2 Initial interpretation of the laboratory model runs as various flooding scenarios represented with fixed scale factors (Araud, 2012; Finaud-Guyot et al., 2018) vs. interpretation in the present reanalysis, involving a single flood scenario represented with various vertical scale factors. Notations: Q_m , Q_p refer to the total inflow in the laboratory model and in the prototype urban district, respectively.

Runs	Q_m (m^3h^{-1})	Initial interpretation by Araud (2012): fixed scale factors			Interpretation in the present reanalysis: fixed flood scenario; but varying vertical scale factor			
		Q_p (m^3s^{-1})	e_H (-)	e_V (-)	Q_p (m^3s^{-1})	e_H (-)	e_V (-)	$d = e_H / e_V$ (-)
Run 1	100	497					20	10
Run 2	80	398					23	8.6
Run 3	60	298	200	20	497	200	28	7.1
Run 4	20	99					58	3.4

Table 3 Interpretation of the dataset of Velickovic et al. (2017) in the present reanalysis. Notations Q_m and Q_p refer to the total inflow discharge in the laboratory model and in the prototype, respectively.

Layouts	Runs	Q_m ($l s^{-1}$)	Q_p ($m^3 s^{-1}$)	e_H (-)	e_v (-)	$d = e_H / e_v$ (-)
Narrow streets along the main flow direction (width: 0.0675 m)	Run 1	25	483	100	33.4	3
	Run 2	35			26.7	3.7
	Run 3	41			24.0	4.2
	Run 4	50			21.0	4.8
Intermediate streets width along the main flow direction (width: 0.10 m)	Run 1	43	483	100	23.3	4.3
	Run 2	58			19.1	5.2
	Run 3	63			18.0	5.5
	Run 4	75			16.1	6.2
	Run 5	86			14.7	6.8
	Run 6	103			13.0	7.7
Wide streets along the main flow direction (width: 0.135 m)	Run 1	52	483	100	20.5	4.9
	Run 2	64			17.9	5.6
	Run 3	75			16.1	6.2
	Run 4	80			15.4	6.5
	Run 5	92			14.0	7.1
	Run 6	99			13.3	7.5

Table 4 Differences between upscaled water depths derived from various runs of Araud (2012).

Indicators	Run 3 ($d = 7.1$) vs. Run 4 ($d = 3.4$)	Run 2 ($d = 8.6$) vs. Run 4 ($d = 3.4$)	Run 1 ($d = 10$) vs. Run 4 ($d = 3.4$)
MD^* (m)	-0.058	-0.088	-0.107
95 % percentile (m)	0.077	0.075	0.060
5 % percentile (m)	-0.181	-0.237	-0.247

5 * MD stands for Mean Difference

Table 5 Differences between upscaled water depths derived from various runs of Velickovic et al. (2017).

Layouts	Runs	MD (m)	95 % percentile (m)	5 % percentile (m)
Narrow street	$d = 3.7$ vs. $d=3$	-0.27	-0.17	-0.36
	$d = 4.2$ vs. $d=3$	-0.32	-0.22	-0.45
	$d = 4.8$ vs. $d=3$	-0.52	-0.50	-0.66
Median street	$d = 5.2$ vs. $d=4.3$	-0.24	-0.07	-0.40
	$d = 5.5$ vs. $d=4.3$	-0.37	-0.21	-0.71
	$d = 6.2$ vs. $d=4.3$	-0.47	-0.24	-0.62
	$d = 6.8$ vs. $d=4.3$	-0.46	-0.38	-0.83
	$d = 7.7$ vs. $d=4.3$	-0.77	-0.43	-1.19
Wide street	$d = 5.6$ vs. $d=4.9$	-0.45	-0.30	-0.79
	$d = 6.2$ vs. $d=4.9$	-0.59	-0.44	-0.92
	$d = 6.5$ vs. $d=4.9$	-0.63	-0.52	-0.97
	$d = 7.1$ vs. $d=4.9$	-0.72	-0.55	-1.25
	$d = 7.5$ vs. $d=4.9$	-0.75	-0.57	-1.25

* MD stands for Mean Difference

Figures

5


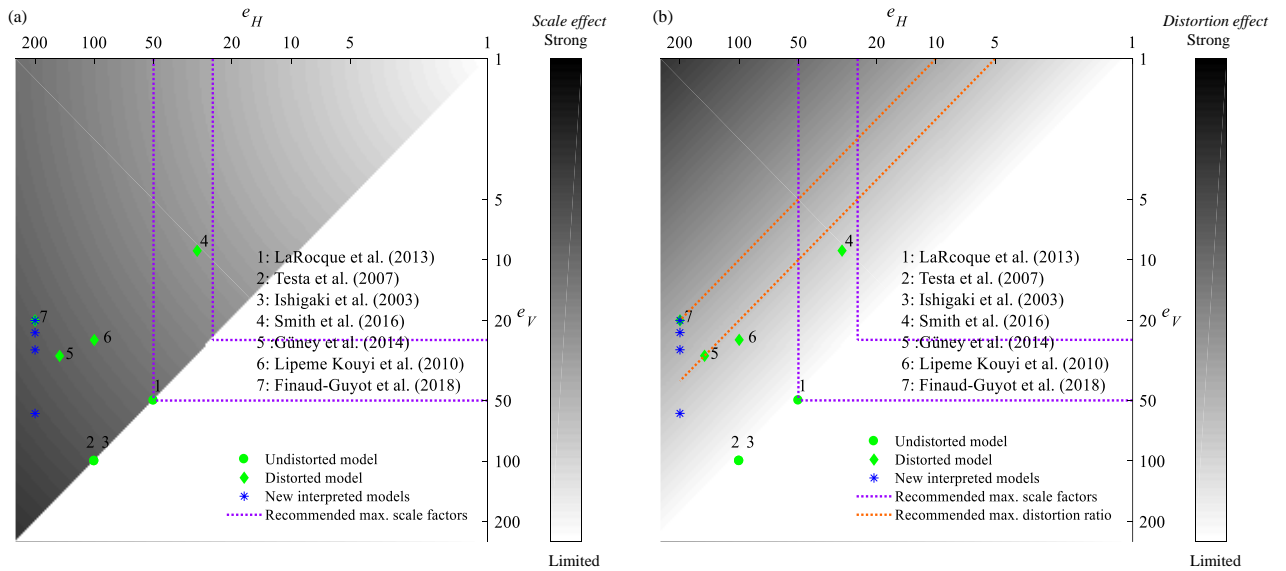


Figure 1: Recent laboratory models of urban flooding at the district level as a function of the horizontal and vertical scale factors, e_H and e_V . The grey shading reveals qualitatively the possible magnitude of (a) scale effects and (b) distortion effects; a range of maximum scale factors (purple lines) and distortion ratio (orange lines) were recommended by Chanson (2004).

- (a) Initial interpretation by Araud (2012) and Velickovic et al (2017):
Single value of the scale factors e_H and e_V ; but various flooding scenarios

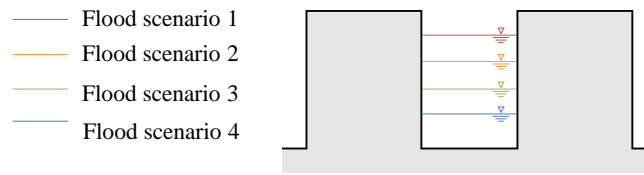

- (b) Interpretation in the present reanalysis:
Single flooding scenarios; but various values of the vertical scale factor e_V

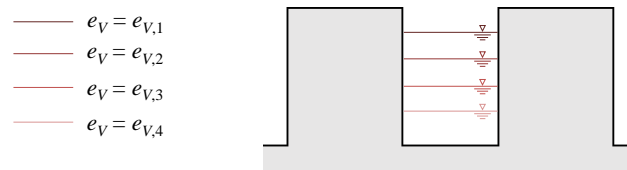


Figure 2: (a) Sketch of the initial interpretation of the laboratory model runs as various flooding scenarios represented with fixed scale factors. (b) Sketch of the interpretation in the present reanalysis, involving a single flood scenario represented with various vertical scale factors e_V .

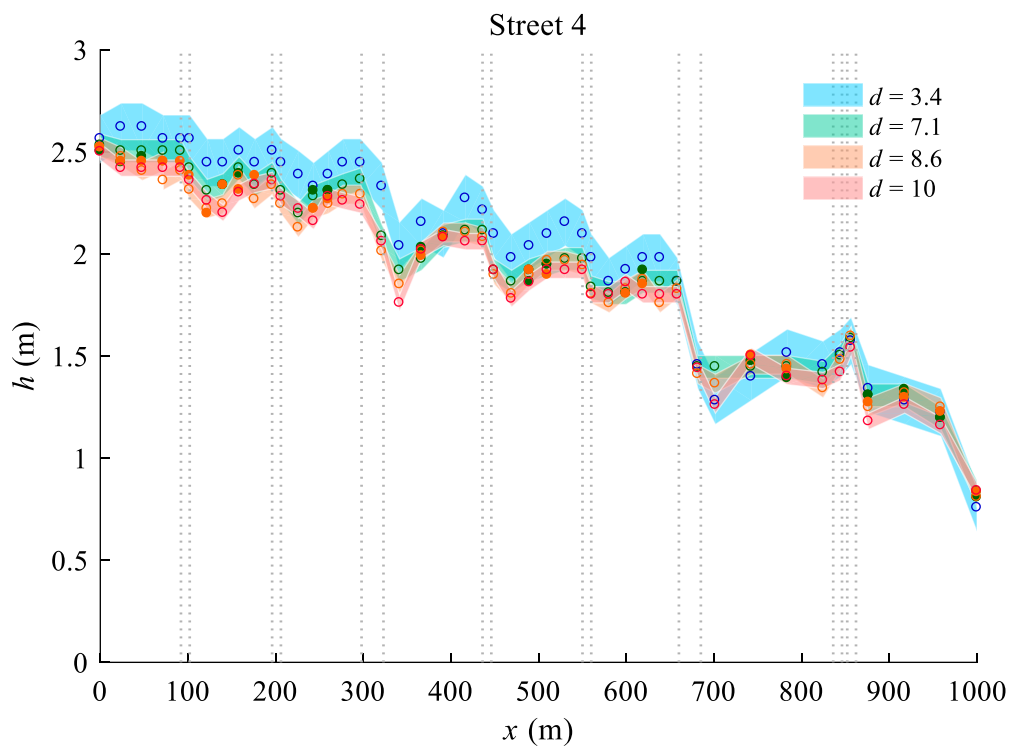


Figure 3: Upscaled water depth profiles in prototype in street 4 of Araud (2012) predictions, colour shade represents the upscaled measurement uncertainty.

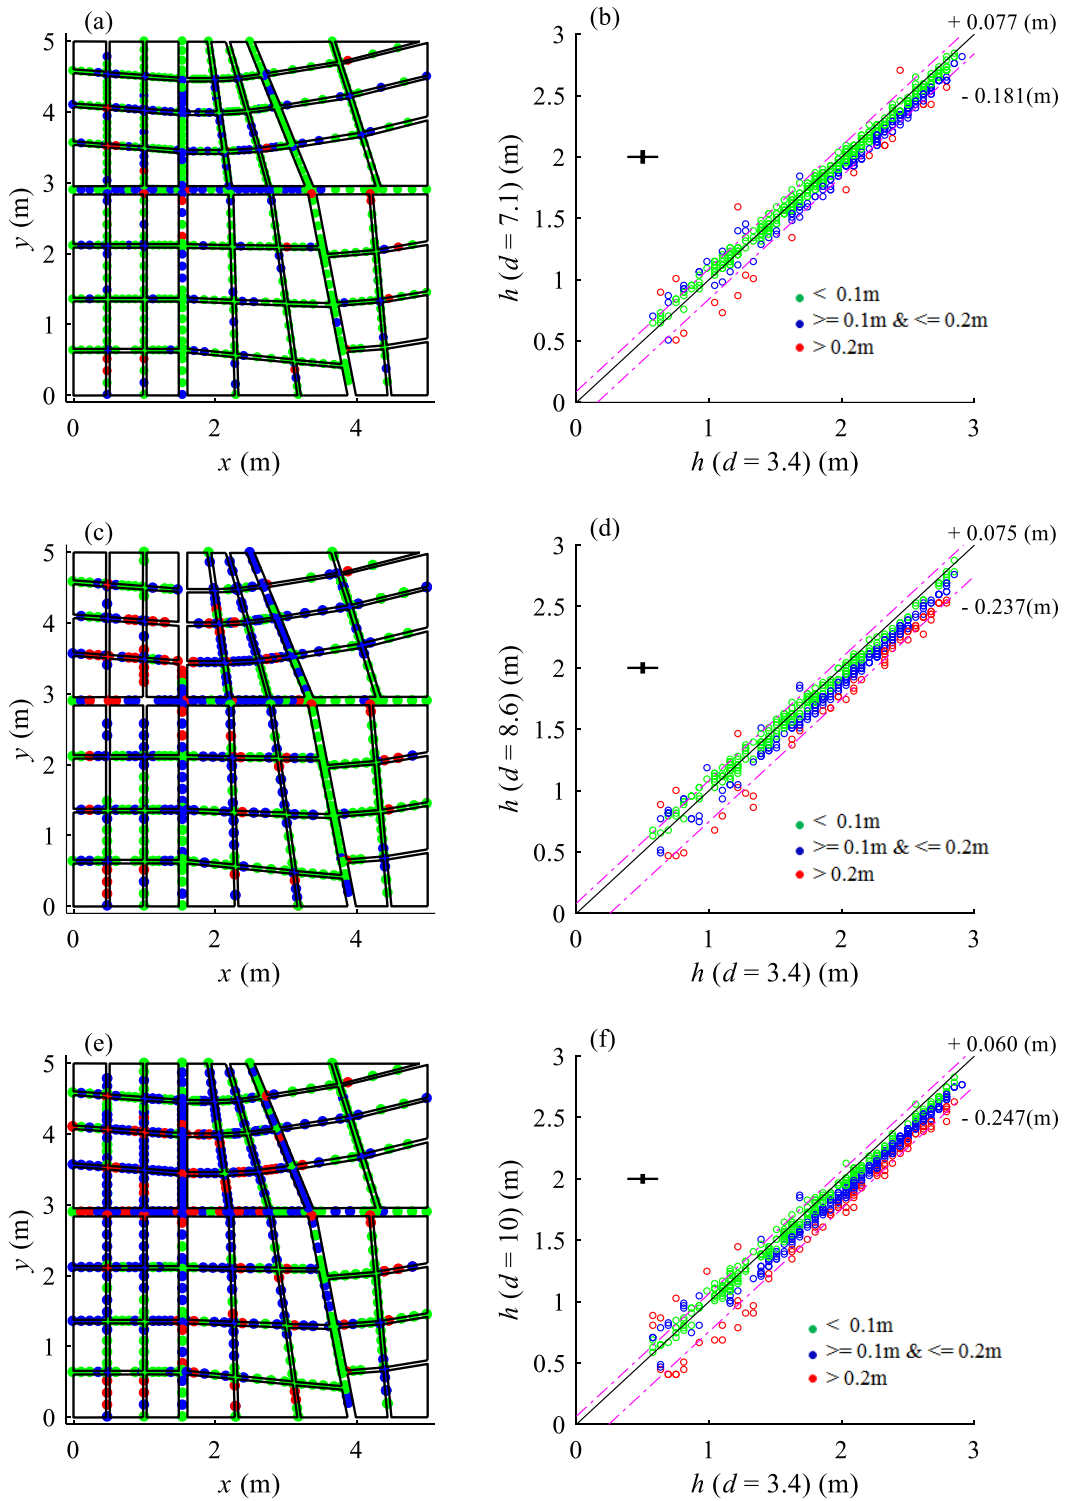


Figure 4: Spatial distributions (a, c, e) and scatter plots (b, d, f) of the differences between the upscaled water depths in Runs 3 ($d = 7.1$), 2 ($d = 8.6$) and 1 ($d = 10$) and those derived from Run 4 ($d = 3.4$) from Araud (2012). The dash-dot purple lines indicate the range containing 90 % of the data.

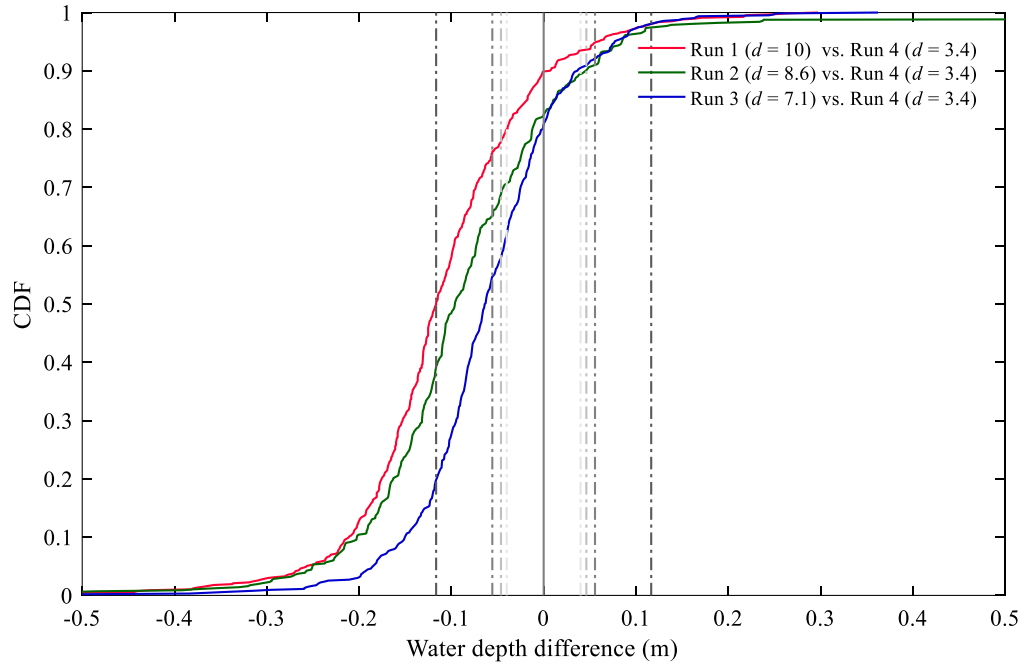


Figure 5: Cumulative distribution function of the differences between upscaled water depths from the various model runs of Araud (2012), the grey lines represent the upscaled measurement uncertainties with various ev (the more ev larger, the more line colour deeper).
5

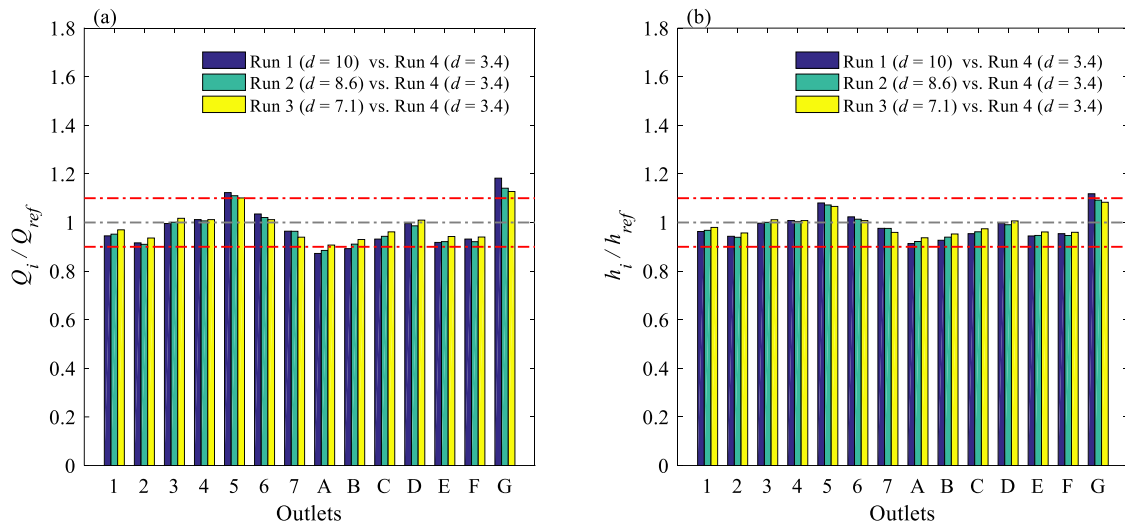


Figure 6: (a) Upscaled outflow discharge in each street compared to the corresponding value deduced from the observations in the less

distorted model ($d = 3.4$) and (b) ratio of the associated water depths from Araud (2012) and Finaud-Guyot et al. (2018). Red dash dot lines represent the $\pm 10\%$ range.

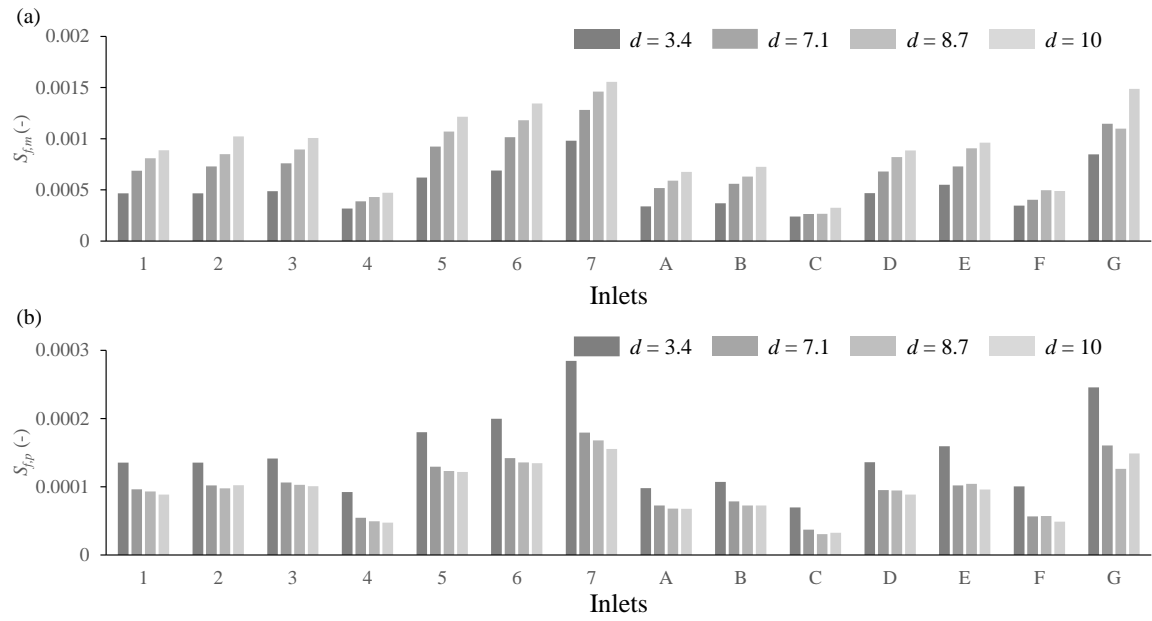


Figure 7: Distortion effect on energy slope of (a) scale models and (b) the model in prototype (dataset of Araud (2012)).