

Assessment of SWAT spatial and temporal transferability for a high altitude glacierised catchment

Maria Andrianaki¹, Juna Shrestha¹, Florian Kobierska², Nikolaos P. Nikolaidis³, Stefano M. Bernasconi¹

¹ Geological Institute, ETH Zurich, CH-8092 Zürich, Switzerland

² Agroscope, Reckenholzstrasse 191, CH-8046 Zürich

³ Department of Environmental Engineering, Technical University of Crete, 73100 Chania, Greece

Correspondence to: Maria Andrianaki (mandrianaki@hotmail.com)

Abstract. In this study, we investigated the application and the transferability of the Soil Water and Assessment Tool (SWAT) in a partly glacierised alpine catchment, characterised by extreme climatic conditions and steep terrain. The model was initially calibrated for the 10 km² watershed of the Damma glacier Critical Zone Observatory (CZO) in central Switzerland using monitoring data for the period of 2009–2011 and then was evaluated for 2012–2013 in the same area. Model performance was found to be satisfactory against both the Nash Sutcliffe criterion (NS) and a benchmark efficiency (BE). The transferability of the model was assessed by using the parameters calibrated on the small watershed and applying the model to the approximately 100 km² catchment that drains into the hydropower reservoir of the Göschenenalpsee and includes the Damma glacier CZO. Model results were compared to the reservoir inflow data from 1997 to 2010 and it was found that the model predicted successfully snowmelt timing and autumn recession but could not accurately capture the peak flow for certain years. Runoff was slightly overestimated from late May to June, when it is dominated by snowmelt. Finally, we investigated the response of the greater catchment to climate change using three different climate change scenarios and the results were compared to those of a previous study, where two different hydrological models, PREVAH and ALPINE 3D, were used. The methodology presented here, where SWAT is calibrated for a small watershed and then applied for a bigger area with similar climatic conditions and geographical characteristics, could work even under extreme conditions like ours. However, a greater attention should be given to the differences between glacier melt and snowmelt dynamics. In conclusion, this assessment test on the transferability of SWAT on different scales, gave valuable information about the strengths and weaknesses of the model when it was applied under conditions different to those that it was calibrated.

1 Introduction

The use of calibrated watershed models enables researchers and stakeholders to assess the impact of environmental changes and, as many studies have pointed out, is of high importance in water management (e.g. Arnold et al., 1998; Abbaspour et al., 2007). Climate change simulations provide crucial information for the assessment of its impact on water resources, water quality, and aquatic ecosystems (Farinotti et al., 2012; Aili et al., 2019). However, watershed modelling in high altitude alpine areas is rather challenging due to the rough terrain, heterogeneous land cover, extreme climatic conditions and glacier dynamics (Viviroli and Weingartner, 2004; Farinotti et al., 2012; Rahman et al., 2013), with the main challenge to be the lack of observed and sufficient quality data in ungauged watersheds (Sivapalan et al., 2003; Viviroli et al., 2009b; Bocchiola et al., 2011).

38 Modelling and predicting the runoff of ungauged watersheds is one of the big challenges that hydrologists face
39 today (Sivapalan et al., 2003; Hrachowitz et al., 2013). A common approach to address this problem is to calibrate
40 a hydrological model for a gauged watershed using observed data and then transfer the model to the ungauged
41 watershed by transferring the model parameters (Merz and Blöschl, 2003; Sivapalan et al., 2003). A large number
42 of methods have been suggested for transferring model parameters, which include regression techniques between
43 the model parameters and catchment attributes (e.g. Parajka et al., 2005; Deckers et al., 2010; Zhang et al., 2018)
44 and similarity approaches such as spatial proximity and physical similarity (e.g. Bárdossy, 2007; Wagener et al.,
45 2007; Patil and Stieglitz, 2014). However, as Thirel et al. (2015) point out, it is essential to assess and evaluate the
46 ability of the hydrological models to perform efficiently under conditions different from those in which they were
47 developed or calibrated.

48
49 The Soil and Water Assessment Tool (SWAT) developed by the USDA Agricultural Research Service (ARS) is a
50 public domain and open source integrated model and has been used worldwide for various applications. As a semi-
51 distributed model, it allows the spatial variation of the parameters by dividing the basin into a number of sub-
52 basins (Arnold et al., 1998; Srinivasan et al., 1998). It is equipped with a snowmelt algorithm based on a simple
53 temperature-index approach, which, although simple, is proved to be very effective in numerous studies (Hock,
54 2003) especially when net solar radiation is the dominant driving energy for snowmelt (Debele et al., 2010).

55
56 SWAT has been widely used in many studies for the simulation of runoff and nutrient cycling in agricultural and
57 forested sites. Although there is an increasing interest in applying SWAT on snow-dominated (Grusson et al.,
58 2015) and glacierised watersheds (Rahman et al., 2013; Garee et al., 2017; Omani et al., 2017), its transferability
59 at spatial and temporal scales under the extreme conditions of these high altitude environments has not been tested
60 yet. In this study, we have a quite unique situation of a small well gauged watershed, the Damma glacier watershed,
61 which is part of the larger catchment feeding the Göschenenalpsee reservoir, for which we have hydrological data
62 thanks to its use by the hydroelectric power plant. This way we were able to assess the spatial and temporal
63 transferability and upscaling of SWAT, by calibrating the model for the Damma glacier watershed and then
64 transferring it to the greater area feeding the Göschenenalpsee reservoir. Subsequently, climate change simulations
65 were conducted in order to assess the transferability of the model on a temporal scale. The assessment was
66 conducted by comparing our findings with those of a previous study for the same area, which used two other
67 hydrological models with different characteristics, PREVAH and ALPINE3D (Kobierska et al., 2013).

68

69 **2 Study Site**

70 The Damma glacier watershed (Fig. 1) is situated in the central Swiss Alps in Switzerland and was one of the
71 Critical Zone Observatories established within the European project SoilTrEC (Banwart et al., 2011). It is located
72 at an altitude between 1790 m and 3200 m above sea level, has a total area of 10 km² and a typical alpine climate
73 with an average yearly temperature of 1 °C and yearly precipitation of 2400 mm (Kobierska et al., 2013). Damma
74 glacier covers 50 % of the watershed and due to climate change has retreated at an average rate of 10 m per year
75 in the last 90 years. However, during 1920–1928 and 1970–1992 the recession was interrupted and the glacier
76 grew, resulting in two moraines (Kobierska et al., 2011). After the retreat of the glacier a soil chronosequence is

77 developed, which has a total length of 1 km (Bernaconi et al., 2008; Bernaconi et al., 2011; Kobierska et al.,
78 2013). The bedrock is coarse-grained granite of the Aare massif and is composed of quartz, plagioclase, potassium
79 feldspar, biotite and muscovite (Schaltegger, 1990). Our study site was extensively described in Bernaconi et al.
80 (2011).

81
82 The Göschenenalpsee (Fig. 1) is a hydropower reservoir of a volume of 75 million m³. A 100 km² and 20 % glacier
83 covered catchment drains into the reservoir. It includes the watersheds of the Damma, Chelen and Tiefen glaciers
84 and the Voralptal watershed. The Tiefen glacier and Voralptal watersheds do not drain directly into the reservoir
85 but their runoff is redirected through two tunnels. The site is described extensively in Kobierska et al. (2013).

86 **3 Model and Data**

87 **3.1 SWAT model**

88 In this study, we used SWAT 2012 coupled with the ArcView SWAT interface, a GIS-based graphical user
89 interface (Di Luzio et al., 2002) that enables the delineation of the watershed, definition of subbasins, and initial
90 parameterisation. It is a semi distributed, time continuous watershed simulator operating on a daily time step.

91
92 Each watershed is divided into subbasins, for which slope, river features, and weather data are considered.
93 Furthermore, the watershed is divided into hydrologic response units (HRUs), which are small surface units with
94 distinctive soil-land use combinations and necessary to capture spatially explicit processes. Each process is
95 simulated for each HRU and then summed up for the subbasin by a weighted average. Subsequently the amount
96 of water, sediment and nutrients that come out from each subbasin enter the respective river.

97
98 A modified SCS curve number method is used to calculate the surface runoff for each HRU, based on land use,
99 soil parameters, and weather conditions. The water is stored in four storage volumes: snow, soil moisture, shallow
100 aquifer and deep aquifer. The processes considered within the soil profile are infiltration, evaporation, plant uptake,
101 lateral flow, and percolation. The factors controlling snow melt are the air and snowpack temperature, the melting
102 rate and the area covered by snow. The updated snow cover model takes into account shading, drifting, topography
103 and landcover to create a nonuniform snow cover (Neitsch et al., 2011). Furthermore, runoff from frozen soil can
104 also be calculated by defining if the temperature in the first soil layer is less than 0°C. Even though the model still
105 allows significant infiltration when the frozen soils are dry, the runoff of frozen soils is larger than that of other
106 soils. A detailed description of the theory behind the model is found in Arnold et al. (1998) and Srinivasan et al.
107 (1998).

108
109 Snow processes in high alpine areas are strongly influenced by the terrain features (Ahl et al., 2008; Zhang et al.,
110 2008). Fontaine et al. (2002) revealed the importance of improving SWAT algorithms to include in the model the
111 influence of elevation and season on the dynamics of the snowpack. They found that the definition of elevation
112 bands within the model subbasins can significantly improve the performance of the model in watersheds at high
113 altitudes and with large elevation gradients. With the improved snow melting algorithm (Fontaine et al., 2002),
114 streamflow in alpine regions can be successfully simulated by SWAT (Rahman et al., 2013; Grusson et al., 2015;
115 Omani et al., 2017).

116 **3.2 Input data**

117 The input data required by SWAT are: topography, soil, land use and meteorological data.

118 **3.2.1 Topography**

119 For the topography of both study areas a high precision Digital elevation model (DEM) with 2 m grid cells
120 (swissALTI3D), produced by the Swiss Federal office for Topography
121 (https://shop.swisstopo.admin.ch/de/products/height_models/alti3D) was used.

122 **3.2.2 Soil and land use map**

123 In order to better describe the glacier forefield, detailed soil and land use maps were created based on the
124 observations, field and experimental data from the Biglink and SoilTrEC projects (Bernasconi et al., 2011; Dumig
125 et al., 2011; Andrianaki et al., 2017). The soil map was created by adding new soil types to the SWAT database
126 while the land use classes were based on existing types in the database. For the greater area feeding the
127 Göschenalpsee, the soil map used was produced and provided by the Swiss Federal Statistical Office at a scale
128 of 1:200,000. For land use, we used the Corine land cover dataset 2006 (version 16, 100m resolution) produced
129 by the European Environmental Agency (<http://www.eea.europa.eu/data-and-maps/data/corine-land-cover-2006-raster-2>).

131 **3.2.3 Climate data**

132 Meteorological data from one local weather station and one station of the SwissMetNet network were used. The
133 weather stations are located at the Damma glacier watershed (2025 m a.s.l.) and at Gütsch (2283 m a.s.l.). The
134 meteorological data of the weather Gütsch were provided by MeteoSwiss. The selection of the weather station
135 Gütsch was based on the results of previous research that showed that it has the best correlation in comparison to
136 other weather stations located in the area (Magnusson et al., 2011) with a long enough record for this study. The
137 data from both stations consist of records of air temperature, precipitation, wind speed, relative humidity, incoming
138 short-wave radiation sub-hourly from 2007–2013 for Damma weather station and hourly from 1981–2010 for
139 Gütsch. The lapse rates for temperature and precipitation, which are very important parameters in SWAT model
140 since they affect snow and glacier melt, and the interpolation methods were based on the findings of Magnusson
141 et al. (2011) who carried out non prognostic hydrological simulations for the Damma glacier watershed. The
142 precipitation and temperature lapse rate parameters of the model are PLAPS and TLAPS and were set to 5 mm
143 km^{-1} and $-5.84 \text{ }^{\circ}\text{C } \text{km}^{-1}$ respectively.

144 **Climate change scenarios:** The climate change predictions were provided by the EU regional climate modelling
145 initiative ENSEMBLES (van der Linden and Mitchell, 2009) and were based on the emission scenario A1B. The
146 model chains produced by the ENSEMBLES project are a combination of a general circulation model (GCM) with
147 a regional climate model (RCM). The delta-change method was used for the creation of the datasets (Bosshard et
148 al., 2011). Temperature and precipitation predictions are calculated using daily temperature changes ΔT , and
149 precipitation scaling factors ΔP . Incoming short-wave irradiation, wind speed and relative humidity were left
150 unchanged. Under the scenario when no action for the mitigation of climate change is taken, according to the A1B
151 scenario it is predicted that by the end of the century in Switzerland, the mean temperature will increase by 2.7–
152 4.1 $^{\circ}\text{C}$ and the precipitation will decrease 18%–24% in the summer months (CH2011, 2011).

154 In this study, three climate scenarios with interpolated data for Gütsch weather station are used. These scenarios
155 are: the CNRM ARPEGE ALADIN scenario, the ETHZ HadCM3Q0 CLM scenario, which predicts the highest
156 ΔT and ΔP in comparison to the other two, and the SHMI BCM RCA scenario, which predicts the lowest ΔT and
157 ΔP , referred to as CNRM, ETHZ and SHMI scenarios respectively. These three scenarios were chosen because
158 they are the same used in the previous study of Kobierska et al. (2013). The following periods were selected:

159 Reference period T0: 1981–2010

160 T1: 2021–2050

161 T2: 2070–2099

162

163 The highest ΔT for the T1 period is predicted to be 1.5°C in the mid-summer, 2.5°C in late spring, and below
164 1.0°C in early summer for the CNRM, ETHZ and SHMI respectively and for the T2 period is approximately 5°C
165 in the mid-summer, 4°C along the whole summer and 3°C in early summer. The biggest temperature increase is
166 predicted at the end of the century when the strongest agreement between the different model chains is observed.
167 Projected precipitation changes for the T1 period show a clear trend towards dryer summers, while for the rest of
168 the year are within the natural variability. The trend of dryer summers is most prominent for the T2 period.
169 Furthermore, most model chains predict slightly higher precipitation in autumn.

170 **3.2.4 Runoff data**

171 Runoff of the Dammareuss stream that drains the Damma glacier watershed was measured every half an hour at a
172 gauging station at the outlet of the watershed (Magnusson et al., 2011). The runoff of the total area that feeds the
173 Göschenenalpsee is the inflow of the reservoir and the data from 1997–2010 were provided by the energy company
174 responsible for the management of the reservoir.

175 **3.2.5 Glacier extent**

176 Data on the glacier extent for the present period but also for the two periods of the climate change scenarios were
177 provided by Paul et al (2007). They estimated the evolution of the Swiss glaciers by using hypsographic modelling,
178 based on the shift of the equilibrium line altitude. However, SWAT is not a model that considers glacier flow
179 dynamics and therefore, in this study, the glaciers were incorporated in SWAT as the initial snow content in each
180 subbasin and for each elevation band.

181 **4 Methodology**

182 The purpose of this study is to assess the transferability of SWAT in temporal and spatial scales at a high altitude
183 alpine and glacierised site. This way it is tested whether the model can be transferred and is capable for the
184 simulation of runoff but also for further climate change studies on an ungauged glacierised watershed.
185 Furthermore, this methodology tests its robustness under these extreme climatic and geographical conditions. For
186 this reason, SWAT was initially calibrated for the small Damma watershed, which is well monitored through the
187 CZO projects, and then it was upscaled and applied for the greater area that feeds the Göschenenalpsee reservoir
188 and includes the Damma glacier watershed. The upscaling of the model was verified by comparing model results
189 with the reservoir input flow data provided by the managing company.

190

191 Since the Damma glacier watershed is part of the greater Göschenalpsee feeding catchment, the parameters of
192 the model were transferred using the spatial proximity approach, with no further regionalisation procedure. In this
193 case, the initial setup of SWAT for the greater catchment was conducted using the input data presented in section
194 3.2 and only the parameters presented in Table 1 were changed to the calibrated values derived from the calibration
195 of the Damma glacier watershed. The initial parameterisation of the model during the setup and the watershed
196 delineation assisted in the transferability of the model since a number of parameters is already defined based on
197 the topography, land use and soil data.

198
199 Subsequently, the model was further transferred on a temporal scale, by conducting climate change simulations
200 and results were compared with those of a previous study for the same area, which used two other hydrological
201 models with different characteristics, PREVAH and Alpine 3D (Kobierska et al., 2013).

202
203 This methodology is a modified version of the proxy-basin test introduced by Klemeš (1986), which is one of the
204 proposed testing schemes for the enhancement of the calibration and validation procedure in hydrological
205 modelling. According to Klemeš (1986) the proxy basin test can be used to test the geographical transposability
206 of the model between two regions, for subsequent simulation of the streamflow in ungauged watersheds with
207 similar characteristics. The model is calibrated and validated for two watersheds and if the results are acceptable
208 it is then considered safe to be transferred and used at a third watershed with similar characteristics.

209 **5 Model setup, calibration and evaluation**

210 SWAT was initially setup for the Damma glacier CZO and the greater area feeding the Göschenalpsee using the
211 topography, soil and land use data presented in section 3.2. Following the delineation procedure, the Damma
212 watershed and the greater area were divided into 5 and 25 subbasins respectively. By setting the lowest possible
213 thresholds for land use, slope and soil, 48 HRUs were created for Damma watershed and 285 HRUs for the greater
214 area. Finally, six elevation bands were defined for each subbasin of both study sites. The setup was complete with
215 the addition of the meteorological input and the definition of the initial snow for each elevation band of each
216 subbasin. For the climate change simulations, the meteorological input consists of the climate change scenarios
217 described in section 3.2.3 and the initial snow that corresponds to the first year of each future period, as calculated
218 by the glacier extent data described in section 3.2.5.

219 **5.1 Model calibration**

220 SWAT was calibrated for the Damma watershed only, using the meteorological data from 2009 to 2011 and
221 evaluated with the data from 2012 to 2013. Data for the years 2007 and 2008 were used for the warm-up and the
222 stability of the model. The calibration was firstly conducted manually. The most important parameters are the ones
223 controlling snow melt such as the snowpack temperature lag factor (TIMP), the snow melt factors (SMFMX and
224 SMFMN), the snow fall and snow melt temperatures (SFTMP and SMTMP respectively) and finally the
225 CN_FROZ, which was set to active. In SWAT input files, a different set of snow parameters can be applied for
226 each subbasin, which can enable the user to simulate differently the snow covered from the glacier covered
227 subbasins. However, most of the subbasins of the Damma glacier watershed, delineated during the initial setup of

228 the model, were partially glacier covered, it was decided to apply the same snow parameters for all the subbasins.
229 This means that the same parameters were applied for both glacier and snow dynamics.

230
231 Groundwater flow parameters such as the groundwater delay time (GW_DELAY), the base flow alpha factor
232 (ALPHA_BF) and the surface runoff lag coefficient (SURLAG) were also found to play an important role on the
233 performance of the model. Evapotranspiration (ET) related parameters were not significant since our study site is
234 above the tree line and ET is relatively minor.

235
236 The manual calibration was followed by an automatic calibration and uncertainty analysis using the SWAT-CUP
237 software with the Sequential Uncertainty Fitting ver. 2 (SUFI-2) algorithm for inverse modelling (Abbaspour et
238 al., 2007). Starting with some initial parameter values, SUFI-2 is iterated until (a) the 95% prediction uncertainty
239 (95PPU) between the 2.5th and 97.5th percentiles include more than 90% of the measured data and (b) the average
240 distance between the 2.5th and 97.5th percentiles is smaller than the standard deviation of the measured data. A
241 model is considered calibrated when the chosen criterion between the best simulation and calibration data reaches
242 the best value (Abbaspour et al., 2007). The parameters introduced in SWAT-CUP as well as their range are the
243 ones that were identified during the manual calibration as the most important.

244
245 The criterion used for the calibration with SWAT-CUP is the Nash-Sutcliffe (Nash and Sutcliffe, 1970) model
246 efficiency (NS), since it was the criterion available in SUFI-2 that is commonly used in hydrological studies. The
247 NS shows the relationship between the measured and the simulated runoff (Eq. 1). The performance of the
248 calibrated model was further evaluated by the square of Pearson's product moment correlation R^2 , which represents
249 the proportion of total variance of measured data that can be explained by simulated data. Better model
250 performance is considered when both criteria are close to 1. NS coefficients greater than 0.75 are considered
251 "good," whereas values between 0.75 and 0.36 as "satisfactory" (Wang and Melesse, 2006).

$$252 \quad NS = 1 - \frac{\sum_{t=1}^n [q_{obs}(t) - q_{sim}(t)]^2}{\sum_{t=1}^n [q_{obs}(t) - q_{mean}(t)]^2} \quad (1)$$

253 where q_{obs} is the observed runoff; q_{sim} is the simulated runoff by SWAT; and q_{mean} is the mean observed value.

254
255 However, as Schaeefli and Gupta (2007) pointed out, the NS criterion is not enough to judge the efficiency of the
256 model when simulating runoff with high seasonality like the one in high altitude watersheds. Therefore, as an
257 additional criterion for the performance of the model, a benchmark efficiency indicator was calculated, according
258 to Eq. 2:

$$259 \quad BE = 1 - \frac{\sum_{t=1}^n [q_{obs}(t) - q_{sim}(t)]^2}{\sum_{t=1}^n [q_{obs}(t) - q_b(t)]^2} \quad (2)$$

260 where q_{obs} and q_{sim} are as above and q_b is runoff given by the benchmark model. The calendar day model was
261 chosen as benchmark (Schaeefli and Gupta, 2007), which is the observed interannual mean runoff for every calendar
262 day.

263
264 Table 1 shows the default and the after calibration values of the SWAT parameters that were changed during
265 calibration. TIMP was set to a very low value indicating that the glacier is not affected by the temperature of the
266 previous day as much as the snowpack would be. Snow and glacier melt in Damma watershed occurs from April
267 to September, a fact that explains the low value of the SMFMN (0.1 mmH₂O / °C-day), the minimum melt factor,

268 while the SMFMX is set to the value of 4.7 mmH₂O / °C-day. SMTMP is also sensitive since it is the controlling
269 factor for the initialisation of the snow melt and the availability of melted snow on a specific day. SURLAG and
270 GW_DELAY play an important role in the model performance as they control the melted snow routing process
271 and the hydrologic response of the watershed. Damma glacier watershed has a fast response and therefore
272 GW_DELAY was set to 0.5 days and ALPHA_BF to 0.95.

273
274 The results of the calibrated model for the daily runoff and the observed data are presented in Fig. 2(a), while
275 cumulative runoff is presented in Fig. 2(c). The fit of the model to the observed data is satisfactory and the results
276 of the calibrated model matched the observed data throughout most of the year. The graph of the cumulative runoff
277 (Fig. 2c) shows that runoff is slightly overestimated in July and August, when it is dominated by glacier melt. Best
278 results occur for the years 2009 and 2010. 2011 is characterised by unusually warm and dry months of September,
279 October and November which resulted in a slight underestimation of the runoff. The NS efficiency is 0.84 and R²
280 is 0.85, which means that overall SWAT performance for the calibrated period is considered very satisfactory,
281 especially considering the fact that results are in daily steps that influence the NS value. BE for this period is 0.22,
282 a value that we consider to be satisfactory.

283 **5.2 Model evaluation**

284 SWAT was evaluated using the meteorological data for 2012 and 2013 and the results as well as the measured
285 runoff are presented in Fig. 2(b). Figure 2(d) presents the cumulative graphs. The model performed efficiently,
286 similarly to the calibration period, with a Nash-Sutcliffe efficiency of 0.85, R² 0.86 and the BE 0.25. Although,
287 due to the lack of longer monitoring data, the total calibration-evaluation period 2009-2013 is short, it still includes
288 a relatively large variability in the weather conditions and precipitation amounts and despite this variability the
289 overall model performance is satisfactory. The small seasonal differences in model performance are due to the
290 evolution of runoff generation throughout the season: runoff in spring and early summer (May, June) comes mainly
291 from snowmelt while in July and August from glacier melt.

292 **6 Results and Discussion**

293 **6.1 Upscaling SWAT to the greater catchment feeding the Göschenenalpsee reservoir**

294 The results of the model for the greater area that feeds the Göschenenalpsee, are presented in Fig. 3(a) together
295 with the measured inflow in the reservoir. The observed and predictive cumulative flow is presented in Fig. 3(b).
296 Both Figures 3(a) and 3(b) show that there is an overestimation of total runoff for the period 1999-2002, which
297 might be linked to the higher precipitation amounts during this period. Measured precipitation measured at Güttsch
298 weather station for this period is up to 46 % higher than the average precipitation of 1981-2010.

299
300 The cumulative graph (Fig 3b) shows that there is an overall good agreement between model results and the
301 measured reservoir inflow. However, the performance criteria had relatively lower values, with NS efficiency
302 equal to 0.49, R² equal to 0.72 and BE to -1. This is why the predictability of the model was further tested by
303 analysing key parameters related to median runoff such as spring snowmelt timing, timing of peak flow, autumn
304 recession period and the centre of mass (COM), which can indicate temporal shifts in the hydrological regime.
305 Table 2 shows the difference in days between the observed and simulated values of the above parameters for each

306 year of the period 1997-2010. A 15 day moving average window was applied to daily runoff. Snowmelt timing
307 and autumn recession are simulated successfully since the differences for most years are zero or close to zero,
308 except for the years 2000 and 2002 for autumn recession. Peak flow timing shows some inconsistencies between
309 observed and simulated data for certain years, which are mainly related to the fact that for these years and during
310 the snowmelt period, SWAT produces results with higher peaks. Finally, the COM of the simulated data is in good
311 agreement with that of the observed data, with an average difference of 4 days.

312

313 On the whole, SWAT performance is considered to be acceptable and it was successfully transferred to the greater
314 Göschenalpsee feeding catchment. One of the main reasons for the deterioration of the model performance is
315 that SWAT does not differentiate between snow and glacier dynamics. In Omani et al. (2017) this issue was
316 addressed by applying different snow parameters to the glacier covered subbasins than those applied for the non
317 glacierised ones. However, the subbasins in our calibration watershed, the Damma glacier watershed, were partly
318 glacierised and for this reason it was decided to apply only one set of snow parameters for the whole watershed.

319

320 Furthermore, some inconsistency is caused by the fact that for the two out of the four of the watersheds of the
321 greater area feeding the Göschenalpsee, runoff is drained through tunnels into the reservoir. Furthermore,
322 Damma is characterised by very steep slopes (even up to nearly 80 degrees) and the groundwater-surface water
323 interactions are less significant since runoff originates mainly from snowmelt, glacier melt and rainfall (Magnuson
324 et al., 2012). For this reason, the ALPHA_BF parameter of SWAT was set to a high value and the GW_DELAY
325 to low, parameter trends that characterise a watershed like Damma. However, a very high ALPHA_BF and low
326 GW_DELAY might not be able to fully describe the Göschenalpsee feeding area. The combination of these two
327 factors could be the reason why some of the simulated peaks are higher but also narrower compared to the observed
328 inflows into the reservoir and SWAT does not simulate efficiently the winter low flows, shown in Fig. 4.

329

330 Finally, SWAT results were compared to results from PREVAH and ALPINE3D models, already published in
331 Magnusson et al. (2011) and Kobierska et al. (2013) (Fig. 4). PREVAH is a semi-distributed conceptual
332 hydrological model suited for applications in mountainous regions (Viviroli et al., 2009a; Viviroli et al., 2009b)
333 while ALPINE3D is a fully distributed energy balance model (Lehning et al., 2006).

334

335 Figure 4 shows the interannual average of the period 1997-2010 daily reservoir inflow for each model. SWAT
336 overestimated the inflow of the snowmelt period, from May to the beginning of July, while from mid July to late
337 September its results are close to the observed values and in agreement with the other two models. Finally, in
338 October inflow is slightly underestimated. The seasonality in variation between model results and observed values
339 is linked to the application of only one melt rate for both snowmelt and glacier melt periods. The best fit of the
340 model is observed when glacier melt is the major contributor to runoff, while it is overestimated during the
341 snowmelt period. Seasonal variability in model performance is observed not only for SWAT but also for
342 ALPINE3D and PREVAH, as ALPINE3D underestimated the reservoir inflow during the snowmelt period, from
343 May to June, while on the other hand runoff was slightly overestimated by PREVAH in October and November
344 (Kobierska et al., 2013).

345 **6.2 SWAT transferability on a temporal scale**

346 As a next step, we simulated climate change scenarios for the greater area that feeds the Göschenenalpsee and
347 compared the results with the climate change study in Kobierska et al. (2013) using the same time periods as
348 follows:

349 Reference period T0: 1981–2010

350 T1: 2021–2050

351 T2: 2070–2099

352

353 The results of SWAT are presented as the interannual average reservoir inflow for each different scenario in Fig.
354 5(a) for the T1 period and in Fig. 5(b) for T2. The reference period shows the results of SWAT forced by the
355 meteorological data of the Gütsch weather station for the period 1981-2010.

356

357 During the reference period, runoff peaks in mid June when snowmelt is combined with glacier melt. During the
358 T1 period from July to September, all scenarios predict lower reservoir inflow than the reference period, indicating
359 that the glacier melt cannot compensate the predicted decrease in precipitation. From September until the end of
360 the season, the predictions of all scenarios are higher than the reference period, which is explained by the higher
361 predicted precipitation during autumn. The annual peak remains in mid June.

362

363 For T2 period, reservoir inflow from spring to June is predicted to increase significantly for all three scenarios due
364 to more intense snowmelt and higher precipitation. Based on the available glacier extent data described in section
365 3.2.5, we estimated that in 2070, the total glacier volume would be reduced to almost half, resulting in less glacier
366 melt between July and late August. For this reason, and in combination with the significant decrease in
367 precipitation, predicted by all scenarios for this period, the simulated runoff is lower than that of the reference.
368 Finally, the snow free period is predicted to extend until December instead of September.

369

370 At the end of the T2 period, only a small part of the glacier is predicted to remain in high elevation. The date of
371 peak flow would shift to be in the beginning of June. The main projected runoff volume is observed in spring and
372 early summer while during the glacier melt period, is significantly lower than that of the reference period. Overall
373 the total water yield for the scenarios in T2 period is predicted to decrease.

374

375 To better observe the seasonal changes of estimated reservoir inflow, Fig. 6 shows the interannual average inflow
376 for a) May-June, b) July-August and c) September-October for the T1 and T2 periods divided by the average of
377 the reference period of the same months for all the three scenarios. In May and June, as mentioned above, projected
378 runoff is mainly dominated by snowmelt. The three climate change scenarios predict increased temperatures and
379 higher precipitation during May and June which result in faster snowmelt and therefore in the increased predicted
380 runoff, as observed in Fig. 6(a). The increase is higher in the T2 period due to the higher temperatures. The only
381 exemption to that is the SHMI scenario for the near future period, since it is the colder scenario that predicts the
382 lowest temperature and precipitation changes. In July and August, climate change scenarios predict a significant
383 decrease in precipitation, which is also depicted in the predicted reservoir inflow. The scenario that has the most
384 drastic effect is the ETHZ because it is the scenario that predicts the most prominent increase in the temperature
385 and decrease in the precipitation. For September and October, results do not show a clear trend for the warmer

386 ETHZ scenario, however for the CNRM and SHMI scenarios, predicted runoff is lower than the reference. Finally,
387 the predicted inflow of the far future period T2 shows higher fluctuations from year to year than that of the near
388 future period especially from September to October.

389
390 The climate change predictions of SWAT and the subsequent conclusions show many similarities in the seasonal
391 variations with that of ALPINE3D and PREVAH. There are however uncertainties and differences between the
392 models. Table 3 presents a comparison of the shift in days for the highest peak day and the COM between the three
393 models for all the scenarios. Although the shift of COM is in good agreement among the three models for each
394 scenario, the models differed significantly concerning the shift in highest peak day. ALPINE3D and PREVAH
395 predict the peak flow to shift approximately by three and six weeks for the T1 and T2 periods respectively
396 (Kobierska et al., 2013). On the other hand, the shift of the highest peak day with SWAT is significantly smaller
397 since a 10 day shift is predicted only with the warmer ETHZ scenario for the T1 period while a maximum shift of
398 approximately three weeks is predicted for the T2 period (Table 3). This finding suggests that ALPINE3D and
399 PREVAH responded at a greater extend to glacier melt regarding the climate change scenarios than SWAT. This
400 observation could be attributed to the application of one set of snow parameters for both glacier and snowmelt,
401 even though the initial glacier cover was adjusted for both future periods, T1 and T2, according to the available
402 glacier cover predictions. However, it should be noted that by transferring the model from the small Damma
403 watershed to the greater area, we increased considerably the uncertainty regarding the hydrological modelling.
404 Therefore, a further quantitative comparison between the models could not be made.

405 **7 Conclusions**

406 This study is an assessment of the transferability or upscaling of SWAT on a spatial and temporal scale for a partly
407 glacierised catchment at a high altitude. For this reason, we followed an approach similar to the proxy-basin test
408 introduced by Klemeš (1986).

409
410 Firstly, SWAT was calibrated and evaluated for the Damma glacier watershed and it was demonstrated that despite
411 the extreme conditions of this high alpine watershed, SWAT performed successfully, with satisfactory NS and BE
412 efficiencies. Subsequently, we assessed the transferability of the model by upscaling and applying SWAT for the
413 greater area that drains into the Göschenenalpsee reservoir and includes the Damma glacier watershed. By
414 comparing model results with existing inflow data, we showed that the model was able to predict key parameters
415 such as the snowmelt timing, autumn recession period and the peak flow timing. However, overestimation of
416 runoff during the snowmelt period, highlights the importance of taking into account the difference in snow and
417 glacier dynamics. It showed that better performance could have been achieved if different parameters for snow
418 and glacier melt had been applied. This observation is quite important for study sites where streamflow is greatly
419 dependent on both snow- and glacier melt.

420
421 The temporal transferability of SWAT was analysed by assessing the impact of climate change on the hydrology
422 of the greater catchment and comparing these results with a previous climate change study conducted for the same
423 area. Climate change predictions showed that the hydrological regime will change significantly in the future
424 especially towards the end of the century. Although the results of SWAT show many similarities in the seasonal

425 pattern of the predicted runoff with the results of PREVAH and ALPINE3D, there are also significant differences.
426 These differences are related to the lack of sensitivity of SWAT to changes in the snowmelt and glacier melt
427 dynamics. As the contribution of glacier melt to runoff is predicted to decrease, the significance of snowmelt
428 becomes more prominent. It is therefore important when applying SWAT on high altitude watersheds to
429 distinguish the glacier covered or snow dominated subbasins and pay particular attention to the applied snow
430 parameters. This climate change study identifies qualitatively the impact of climate change on our study site but
431 no further quantifications could be made or further conclusions drawn.

432
433 In conclusion, our findings show how important are the transferability assessment tests in identifying the strengths
434 and weaknesses of the hydrological models, when they are applied under extreme climatic and geographical
435 conditions or even under conditions different to the ones that were created and calibrated. They become even more
436 important when they concern the widely used hydrological models like SWAT. Regarding the transferability of
437 the model at a temporal scale and under climate change, more detailed tests such as the ones proposed by Klemeš
438 (1986) and Thirel et al. (2015) could give more insightful results. Finally, the upscaling methodology used here,
439 where SWAT is calibrated for a small watershed and then applied for a greater area that includes the calibration
440 watershed, is a simple but still effective approach. It can be valuable in predicting streamflow of ungauged
441 watersheds, in large scale hydrological simulations and for policy makers working in water management.

442 **Author Contributions**

443 Maria Andrianaki applied SWAT model, analysed data and prepared the manuscript with contributions from all
444 co-authors. Juna Shrestha reviewed the manuscript and assisted in the modelling procedure. Florian Kobierska
445 provided meteorological and runoff data. Nikolaos P. Nikolaidis provided guidance for the research goals. Stefano
446 M. Bernasconi was the supervisor of the research project and provided the funding that lead to this publication.

447 **Competing interests**

448 The authors declare that they have no conflict of interest.

449 **Acknowledgements**

450 This study was supported by the European Commission FP 7 Collaborative Project: Soil Transformations in
451 European Catchments (SoilTrEC) (Grant Agreement No. 244118). We thank Thomas Bosshard (Institute for
452 Atmospheric and Climate Science, ETH Zürich, Switzerland), Frank Paul (Department of Geography, University
453 of Zürich, Switzerland), MeteoSwiss and SwissTopo for providing all the necessary data for the completion of this
454 study. We would also like to thank the Editor and the reviewers for their valuable contributions in improving this
455 manuscript.

456 **References**

- 457 Abbaspour, K. C., Yang, J., Maximov, I., Siber, R., Bogner, K., Mieleitner, J., Zobrist, J., and Srinivasan, R.:
458 Modelling hydrology and water quality in the pre-alpine/alpine Thur watershed using SWAT, *J. Hydrol.*, 333, 413-
459 430, <http://dx.doi.org/10.1016/j.jhydrol.2006.09.014>, 2007.
- 460 Ahl, R. S., Woods, S. W., and Zuuring, H. R.: Hydrologic Calibration and Validation of SWAT in a Snow-
461 Dominated Rocky Mountain Watershed, Montana, U.S.A., *J. Am. Water Resour. As.*, 44, 1411-1430,
462 10.1111/j.1752-1688.2008.00233.x, 2008.
- 463 Aili, T., Soncini, A., Bianchi, A., Diolaiuti, G., D'Agata, C., Bocchiola, D. J. T., and Climatology, A.: Assessing
464 water resources under climate change in high-altitude catchments: a methodology and an application in the Italian
465 Alps, *Theor. Appl. Climatol.*, 135, 135-156, 10.1007/s00704-017-2366-4, 2019.
- 466 Andrianaki, M., Bernasconi, S. M., and Nikolaidis, N. P.: Chapter Eight - Quantifying the Incipient Development
467 of Soil Structure and Functions Within a Glacial Forefield Chronosequence, in: *Advances in Agronomy*, edited
468 by: Steven, A. B., and Donald, L. S., Academic Press, 215-239, 2017.
- 469 Arnold, J. G., Srinivasan, R., Muttiah, R. S., and Williams, J. R.: Large area hydrologic modeling and assessment
470 - Part 1: Model development, *J. Am. Water Resour. As.*, 34, 73-89, 10.1111/j.1752-1688.1998.tb05961.x, 1998.
- 471 Banwart, S., Bernasconi, S. M., Bloem, J., Blum, W., Brandao, M., Brantley, S., Chabaux, F., Duffy, C., Kram,
472 P., Lair, G., Lundin, L., Nikolaidis, N., Novak, M., Panagos, P., Ragnarsdottir, K. V., Reynolds, B., Rousseva, S.,
473 de Ruiter, P., van Gaans, P., van Riemsdijk, W., White, T., and Zhang, B.: Soil Processes and Functions in Critical
474 Zone Observatories: Hypotheses and Experimental Design, *Vadose Zone J.*, 10, 974-987, 10.2136/vzj2010.0136,
475 2011.
- 476 Bárdossy, A.: Calibration of hydrological model parameters for ungauged catchments, *Hydrol. Earth Syst. Sci.*,
477 11, 703-710, 10.5194/hess-11-703-2007, 2007.
- 478 Bavay, M., Grünwald, T., and Lehning, M.: Response of snow cover and runoff to climate change in high Alpine
479 catchments of Eastern Switzerland, *Adv. Water Resour.*, 55, 4-16,
480 <https://doi.org/10.1016/j.advwatres.2012.12.009>, 2013.
- 481 Bernasconi, S. M., Christl, I., Hajdas, I., Zimmermann, S., Hagedorn, F., Smittenberg, R. H., Furrer, G., Zeyer, J.,
482 Brunner, I., Frey, B., Plotze, M., Lapanje, A., Edwards, P., Venterink, H. O., Goransson, H., Frossard, E.,
483 Bunemann, E., Jansa, J., Tamburini, F., Welc, M., Mitchell, E., Bourdon, B., Kretzschmar, R., Reynolds, B.,
484 Lemarchand, E., Wiederhold, J., Tipper, E., Kiczka, M., Hindshaw, R., Stahli, M., Jonas, T., Magnusson, J.,
485 Bauder, A., Farinotti, D., Huss, M., Wacker, L., Abbaspour, K., and Biglink Project, M.: Weathering, soil
486 formation and initial ecosystem evolution on a glacier forefield: a case study from the Damma Glacier,
487 Switzerland, *Mineral. Mag.*, 72, 19-22, 10.1180/minmag.2008.072.1.19, 2008.
- 488 Bernasconi, S. M., Bauder, A., Bourdon, B., Brunner, I., Bunemann, E., Christl, I., Derungs, N., Edwards, P.,
489 Farinotti, D., Frey, B., Frossard, E., Furrer, G., Gierga, M., Goransson, H., Gulland, K., Hagedorn, F., Hajdas, I.,
490 Hindshaw, R., Ivy-Ochs, S., Jansa, J., Jonas, T., Kiczka, M., Kretzschmar, R., Lemarchand, E., Luster, J.,
491 Magnusson, J., Mitchell, E. A. D., Venterink, H. O., Plotze, M., Reynolds, B., Smittenberg, R. H., Stahli, M.,
492 Tamburini, F., Tipper, E. T., Wacker, L., Welc, M., Wiederhold, J. G., Zeyer, J., Zimmermann, S., and Zumsteg,
493 A.: Chemical and Biological Gradients along the Damma Glacier Soil Chronosequence, Switzerland, *Vadose Zone
J.*, 10, 867-883, 10.2136/vzj2010.0129, 2011.
- 495 Bosshard, T., Kotlarski, S., Ewen, T., and Schär, C.: Spectral representation of the annual cycle in the climate
496 change signal, *Hydrol. Earth Syst. Sci.*, 15, 2777-2788, 10.5194/hess-15-2777-2011, 2011.

- 497 CH2011: Swiss Climate Change Scenarios CH2011, published by C2SM, MeteoSwiss, ETH, NCCR Climate, and
498 OcCC, Zurich, Switzerland, 88 pp., 2011.
- 499 Bocchiola, D., Diolaiuti, G., Soncini, A., Mihalcea, C., D'Agata, C., Mayer, C., Lambrecht, A., Rosso, R., and
500 Smiraglia, C.: Prediction of future hydrological regimes in poorly gauged high altitude basins: the case study of
501 the upper Indus, Pakistan, *Hydrol. Earth Syst. Sci.*, 15, 2059-2075, 10.5194/hess-15-2059-2011, 2011.
- 502 Corine landcover database: <http://www.eea.europa.eu/data-and-maps/data/corine-land-cover-2006-raster-2>, last
503 access: 30 May 2019.
- 504 Debele, B., Srinivasan, R., and Gosain, A. K.: Comparison of Process-Based and Temperature-Index Snowmelt
505 Modeling in SWAT, *Water Resour. Manag.*, 24, 1065-1088, 10.1007/s11269-009-9486-2, 2010.
- 506 Di Luzio, M., Srinivasan, R., and Arnold, J. G.: Integration of watershed tools and SWAT model into basins, *J.*
507 *Am. Water Resour. As.*, 38, 1127-1141, 10.1111/j.1752-1688.2002.tb05551.x, 2002.
- 508 Deckers, D. L. E. H., Booij, M. J., Rientjes, T. H. M., and Krol, M. S. J. W. R. M.: Catchment Variability and
509 Parameter Estimation in Multi-Objective Regionalisation of a Rainfall–Runoff Model, *Water Resour. Manag.*, 24,
510 3961-3985, 10.1007/s11269-010-9642-8, 2010.
- 511 Dumig, A., Smittenberg, R., and Kogel-Knabner, I.: Concurrent evolution of organic and mineral components
512 during initial soil development after retreat of the Damma glacier, Switzerland, *Geoderma*, 163, 83-94,
513 10.1016/j.geoderma.2011.04.006, 2011.
- 514 Farinotti, D., Usselmann, S., Huss, M., Bauder, A., and Funk, M.: Runoff evolution in the Swiss Alps: projections
515 for selected high-alpine catchments based on ENSEMBLES scenarios, *Hydrol. Process.*, 26, 1909-1924,
516 doi:10.1002/hyp.8276, 2012
- 517 Fontaine, T. A., Cruickshank, T. S., Arnold, J. G., and Hotchkiss, R. H.: Development of a snowfall–snowmelt
518 routine for mountainous terrain for the soil water assessment tool (SWAT), *J. Hydrol.*, 262, 209-223,
519 [http://dx.doi.org/10.1016/S0022-1694\(02\)00029-X](http://dx.doi.org/10.1016/S0022-1694(02)00029-X), 2002.
- 520 Garee, K., Chen, X., Bao, A., Wang, Y., and Meng, F.: Hydrological Modeling of the Upper Indus Basin: A Case
521 Study from a High-Altitude Glacierized Catchment Hunza, *Water*, 9, doi:10.3390/w9010017, 2017.
- 522 Grusson, Y., Sun, X., Gascoin, S., Sauvage, S., Raghavan, S., Anctil, F., and Sánchez-Pérez, J.-M.: Assessing the
523 capability of the SWAT model to simulate snow, snow melt and streamflow dynamics over an alpine watershed,
524 *J. Hydrol.*, 531, 574-588, <http://dx.doi.org/10.1016/j.jhydrol.2015.10.070>, 2015.
- 525 Hock, R.: Temperature index melt modelling in mountain areas, *J. Hydrol.*, 282, 104-115,
526 [http://dx.doi.org/10.1016/S0022-1694\(03\)00257-9](http://dx.doi.org/10.1016/S0022-1694(03)00257-9), 2003.
- 527 Hrachowitz, M., Savenije, H. H. G., Blöschl, G., McDonnell, J. J., Sivapalan, M., Pomeroy, J. W., Arheimer, B.,
528 Blume, T., Clark, M. P., Ehret, U., Fenicia, F., Freer, J. E., Gelfan, A., Gupta, H. V., Hughes, D. A., Hut, R. W.,
529 Montanari, A., Pande, S., Tetzlaff, D., Troch, P. A., Uhlenbrook, S., Wagener, T., Winsemius, H. C., Woods, R.
530 A., Zehe, E., and Cudennec, C.: A decade of Predictions in Ungauged Basins (PUB)—a review, *Hydrol. Sci. J.*,
531 58, 1198-1255, 10.1080/02626667.2013.803183, 2013.
- 532 Klemeš, V.: Operational Testing of Hydrological Simulation-Models, *Hydrol. Sci. J.*, 31, 13-24,
533 <https://doi.org/10.1080/02626668609491024>, 1986.
- 534 Kobierska, F., Jonas, T., Magnusson, J., Zappa, M., Bavay, M., Bosshard, T., Paul, F., and Bernasconi, S. M.:
535 Climate change effects on snow melt and discharge of a partly glacierized watershed in Central Switzerland
536 (SoilTrec Critical Zone Observatory), *Appl. Geochem.*, 26, Supplement, S60-S62,
537 10.1016/j.apgeochem.2011.03.029, 2011.

- 538 Kobierska, F., Jonas, T., Zappa, M., Bavay, M., Magnusson, J., and Bernasconi, S. M.: Future runoff from a partly
539 glacierized watershed in Central Switzerland: A two-model approach, *Adv. Water Resour.*, 55, 204-214,
540 <http://dx.doi.org/10.1016/j.advwatres.2012.07.024>, 2013.
- 541 Lehning, M., Völksch, I., Gustafsson, D., Nguyen, T. A., Stähli, M., and Zappa, M.: ALPINE3D: a detailed model
542 of mountain surface processes and its application to snow hydrology, *Hydrol. Process.*, 20, 2111-2128,
543 10.1002/hyp.6204, 2006.
- 544 Magnusson, J., Farinotti, D., Jonas, T., and Bavay, M.: Quantitative evaluation of different hydrological modelling
545 approaches in a partly glacierized Swiss watershed, *Hydrol. Process.*, 25, 2071-2084, 10.1002/hyp.7958, 2011.
- 546 Magnusson, J., Jonas, T., and Kirchner, J. W.: Temperature dynamics of a proglacial stream: Identifying dominant
547 energy balance components and inferring spatially integrated hydraulic geometry, *Water Resour. Res.*, 48,
548 W06510, doi:10.1029/2011WR011378, 2012.
- 549 Merz, R., and Blöschl, G.: Regionalisation of catchment model parameters, *J. Hydrol.*, 287, 95-123,
550 <https://doi.org/10.1016/j.jhydrol.2003.09.028>, 2004.
- 551 Nash, J. E., and Sutcliffe, J. V.: River flow forecasting through conceptual models part I — A discussion of
552 principles, *J. Hydrol.*, 10, 282-290, [http://dx.doi.org/10.1016/0022-1694\(70\)90255-6](http://dx.doi.org/10.1016/0022-1694(70)90255-6), 1970.
- 553 Neitsch, S. L., Arnold, J. G., Kiniry, J. R., and Williams, J. R.: Soil and water assessment tool—Theoretical
554 documentation—Version 2009, Texas Water Resources Institute technical report No. 406, Texas 77843-2118,
555 2011.
- 556 Omani, N., Srinivasan, R., Karthikeyan, R., and Smith, P.: Hydrological Modeling of Highly Glaciated Basins
557 (Andes, Alps, and Central Asia), *Water*, 9, 111, 2017.
- 558 Parajka, J., Merz, R., and Blöschl, G.: A comparison of regionalisation methods for catchment model parameters,
559 *Hydrol. Earth Syst. Sci.*, 9, 157-171, 10.5194/hess-9-157-2005, 2005.
- 560 Patil, S., and Stieglitz, M.: Modelling daily streamflow at ungauged catchments: what information is necessary?,
561 *Hydrol. Process.*, 28, 1159-1169, 10.1002/hyp.9660, 2014.
- 562 Paul, F., Maisch, M., Rothenbühler, C., Hoelzle, M., and Haeberli, W.: Calculation and visualisation of future
563 glacier extent in the Swiss Alps by means of hypsographic modelling, *Global Planet. Change*, 55, 343-357,
564 <https://doi.org/10.1016/j.gloplacha.2006.08.003>, 2007.
- 565 Rahman, K., Maringanti, C., Beniston, M., Widmer, F., Abbaspour, K., and Lehmann, A.: Streamflow Modeling
566 in a Highly Managed Mountainous Glacier Watershed Using SWAT: The Upper Rhone River Watershed Case in
567 Switzerland, *Water Resour. Manag.*, 27, 323-339, 10.1007/s11269-012-0188-9, 2013.
- 568 SwissALTI3D: https://shop.swisstopo.admin.ch/de/products/height_models/alti3D, last access: 30 May 2019.
- 569 Schaeefli, B., and Gupta, H. V.: Do Nash values have value?, *Hydrol. Process.*, 21, 2075-2080,
570 doi:10.1002/hyp.6825, 2007.
- 571 Schaltegger, U.: The central Aar granite – Highly differentiated calc-alkaline magmatism in the Aar massif (central
572 Alps, Switzerland), *Eur. J. Mineral.*, 2, 245-259, 1990.
- 573 Sivapalan, M., Takeuchi, K., Franks, S.W., Gupta, V.K., Karambiri, H., Lakschmi, V., Liang, X., McDonnel, J.J.,
574 Mendiondo, E.M., O'Connell, P.E., Oki, T., Pomeroy, J.W., Schertzer, D., Uhlenbrook, S. and Zehe E., IAHS
575 Decade on Predictions in Ungauged Basins, PUB. 2003–2012: shaping an exciting future for the hydrological
576 sciences. *Hydrological Sciences Journal*, 48 (6), 857–880, <https://doi.org/10.1623/hysj.48.6.857.51421>, 2003.

- 577 Srinivasan, R., Ramanarayanan, T. S., Arnold, J. G., and Bednarz, S. T.: Large area hydrologic modeling and
 578 assessment - Part II: Model application, *J. Am. Water Resour. As.*, 34, 91-101, 10.1111/j.1752-
 579 1688.1998.tb05962.x, 1998.
- 580 Thirel, G., Andréassian, V., and Perrin, C.: On the need to test hydrological models under changing conditions,
 581 *Hydrol. Sci. J.*, 60, 1165-1173, 10.1080/02626667.2015.1050027, 2015.
- 582 Vivioli, D. and Weingartner, R.: The hydrological significance of mountains: from regional to global scale,
 583 *Hydrol. Earth Syst. Sci.*, 8, 1017-1030, <https://doi.org/10.5194/hess-8-1017-2004>, 2004.
- 584 Vivioli, D., Zappa, M., Schwanbeck, J., Gurtz, J., and Weingartner, R.: Continuous simulation for flood
 585 estimation in ungauged mesoscale catchments of Switzerland – Part I: Modelling framework and calibration
 586 results, *J. Hydrol.*, 377, 191-207, <http://dx.doi.org/10.1016/j.jhydrol.2009.08.023>, 2009a.
- 587 Vivioli, D., Mittelbach, H., Gurtz, J., and Weingartner, R.: Continuous simulation for flood estimation in
 588 ungauged mesoscale catchments of Switzerland – Part II: Parameter regionalisation and flood estimation results,
 589 *J. Hydrol.*, 377, 208-225, <http://dx.doi.org/10.1016/j.jhydrol.2009.08.022>, 2009b.
- 590 Wagener, T., Sivapalan, M., Troch, P., and Woods, R.: Catchment Classification and Hydrologic Similarity,
 591 *Geography Compass*, 1, 901-931, 10.1111/j.1749-8198.2007.00039.x, 2007.
- 592 Wang, X., and Melesse, A. M.: Effects of STATSGO and SSURGO as inputs in SWAT model's snowmelt
 593 simulation, *J. Am. Water Resour. As.*, 42, 1217-1236, 10.1111/j.1752-1688.2006.tb05296.x, 2006.
- 594 Zhang, X. S., Srinivasan, R., Debele, B., and Hao, F. H.: Runoff simulation of the headwaters of the Yellow River
 595 using the SWAT model with three snowmelt algorithms, *J. Am. Water Resour. As.*, 44, 48-61, 10.1111/j.1752-
 596 1688.2007.00137.x, 2008.
- 597 Zhang, Y., Chiew, F. H. S., Li, M., and Post, D.: Predicting Runoff Signatures Using Regression and Hydrological
 598 Modeling Approaches, *Water Resour. Res.*, 54, 7859-7878, 10.1029/2018wr023325, 2018.
- 599
- 600
- 601
- 602

603 **Table 1 The default and calibrated values of the most sensitive SWAT parameters**

Parameter	Unit	Cal.	
		Value	Default
SFTMP	°C	-0.5	1
SMTMP	°C	2.5	0.5
SMFMX	mm H ₂ O / °C day ⁻¹	4.7	4.5
SMFMN	mm H ₂ O / °C day ⁻¹	0.1	4.5
TIMP		0.011	1
SURLAG		0.001	4
CNCOEF		0.5	1
SNOCOVMX	mm H ₂ O	500	1
SNO50COV	%	0.3	0.5
ALPHA_BF	days	0.95	0.048
GW_DELAY		0.5	31
GW_REVAP		0.02	0.02

LAT_TTIME		0.0001	0
CN2		35	
SLSOIL	m	5	
ESCO		1	0.95

SOL_AWC mm H₂O/mm soil 0.05


604
605
606
607 **Table 2 Difference in days of the simulated from the measured values of the snowmelt timing, autumn recession period,
608 peak flow timing and the centre of mass (COM), for the greater catchment feeding the Göschenenalpsee.**

609	610	Year	Snowmelt 611 timing	Autumn 612 recession 613 period	Peak flow 614 timing	COM 615
611		1997	0	1	-48	7
612		1998	2	1	-2	4
613		1999	-4	0	-27	-1
614		2000	0	-16	19	-3
615		2001	0	1	-1	1
616		2002	0	-19	0	8
617		2003	2	5	-2	1
618		2004	1	4	21	2
619		2005	1	0	-1	4
620		2006	3	1	-3	4
621		2007	3	1	-7	8
622		2008	-2	0	2	3
623		2009	1	0	13	5
624		2010	2	0	-1	-6

625
626
627
628 **Table 3 Shift in days of the centre of mass (COM) and shift in the highest runoff peak of the interannual average
629 reservoir inflow for all the three scenarios. T1 and T2 stand for the T1 and T2 periods respectively.**

Parameter	Model	ETHZ T1	CNRM T1	SHMI T1	ETHZ T2	CNRM T2	SHMI T2
COM shift	SWAT	-2	-1	1	-6	-4	2
(days)	Alpine 3D	-2	-1	0	-4	-6	1
	PREVAH	-6	-2	3	-7	-8	3
Peak day shift	SWAT	-10	0	0	-22	-16	-13

(days)	Alpine 3D	-12	-12	-6	-45	-44	-30
	PREVAH	-29	-16	-6	-43	-39	-38
630							
631							
632							
633							

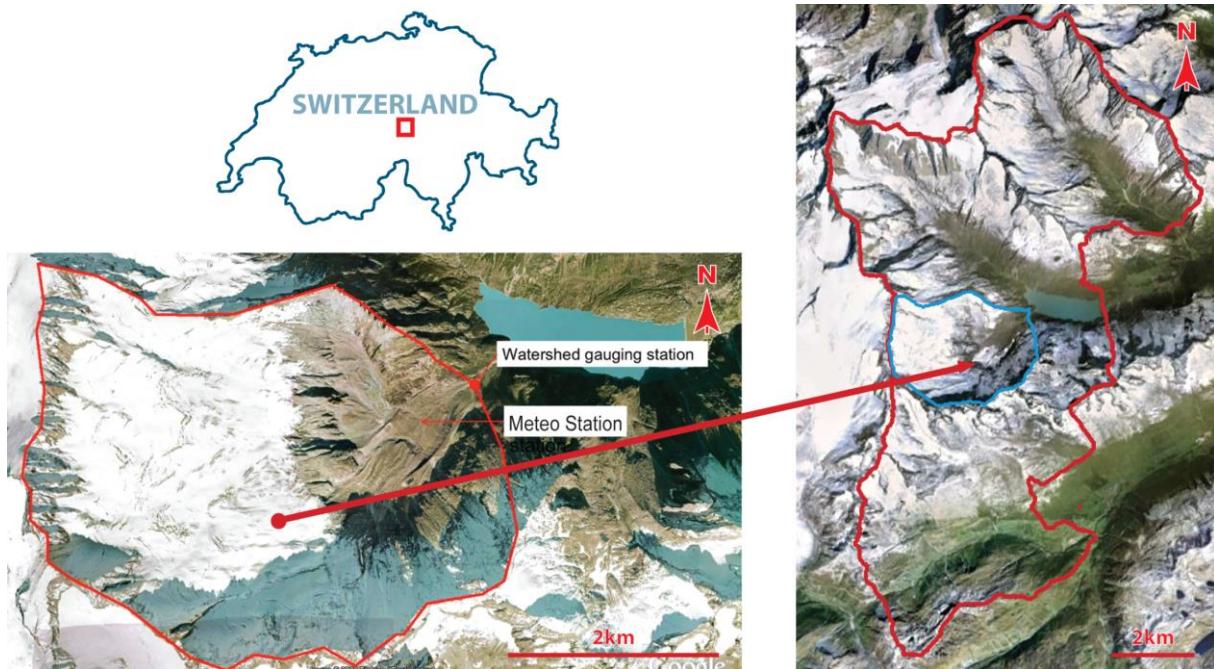

634
635 **Figure 1** Map showing the Damma glacier watershed on the left and the greater area that feeds the Göschenenalpsee on
636 the right.

637

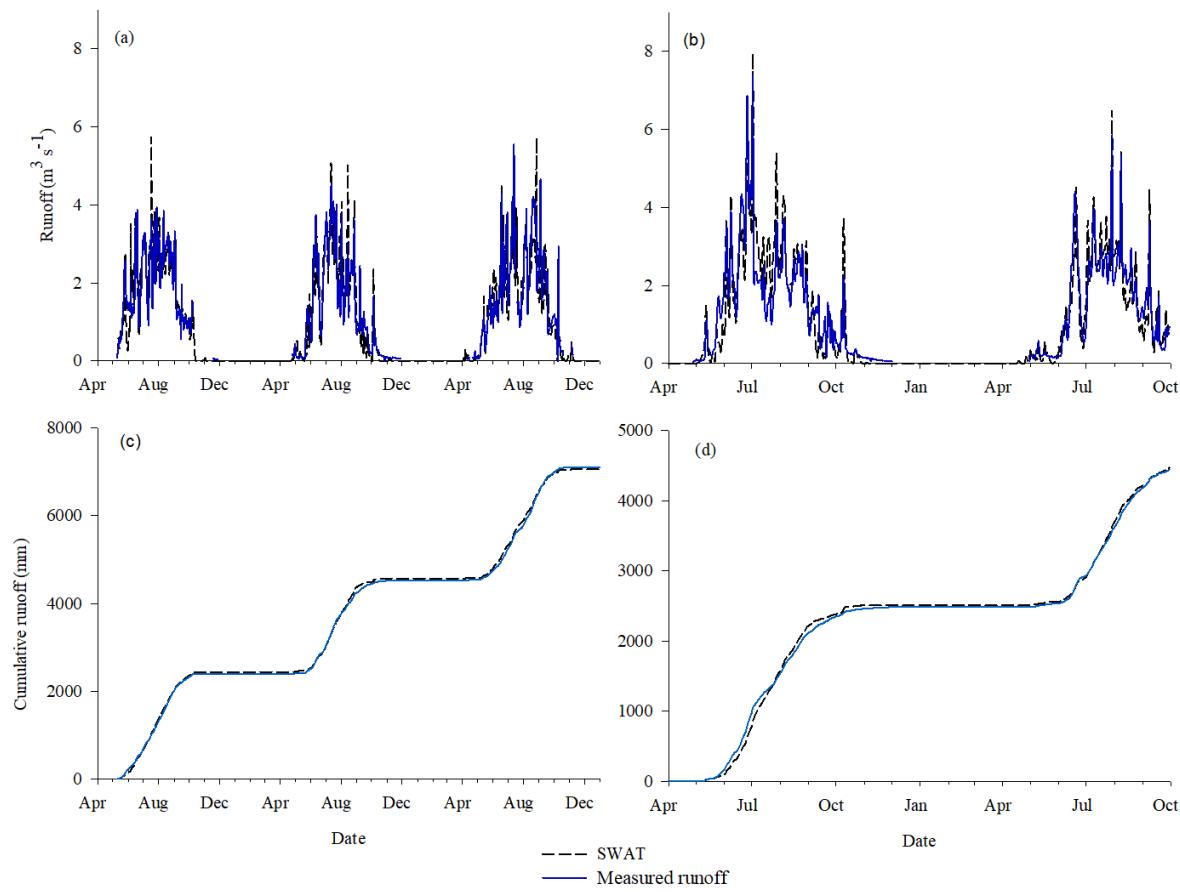


Figure 2 Results of SWAT in comparison to the measured runoff of the Damma glacier watershed for a) and c) the calibration period 2009-2011 and b) and d) the evaluation period 2012-2013. Graphs in c) and d) show the accumulative runoff.


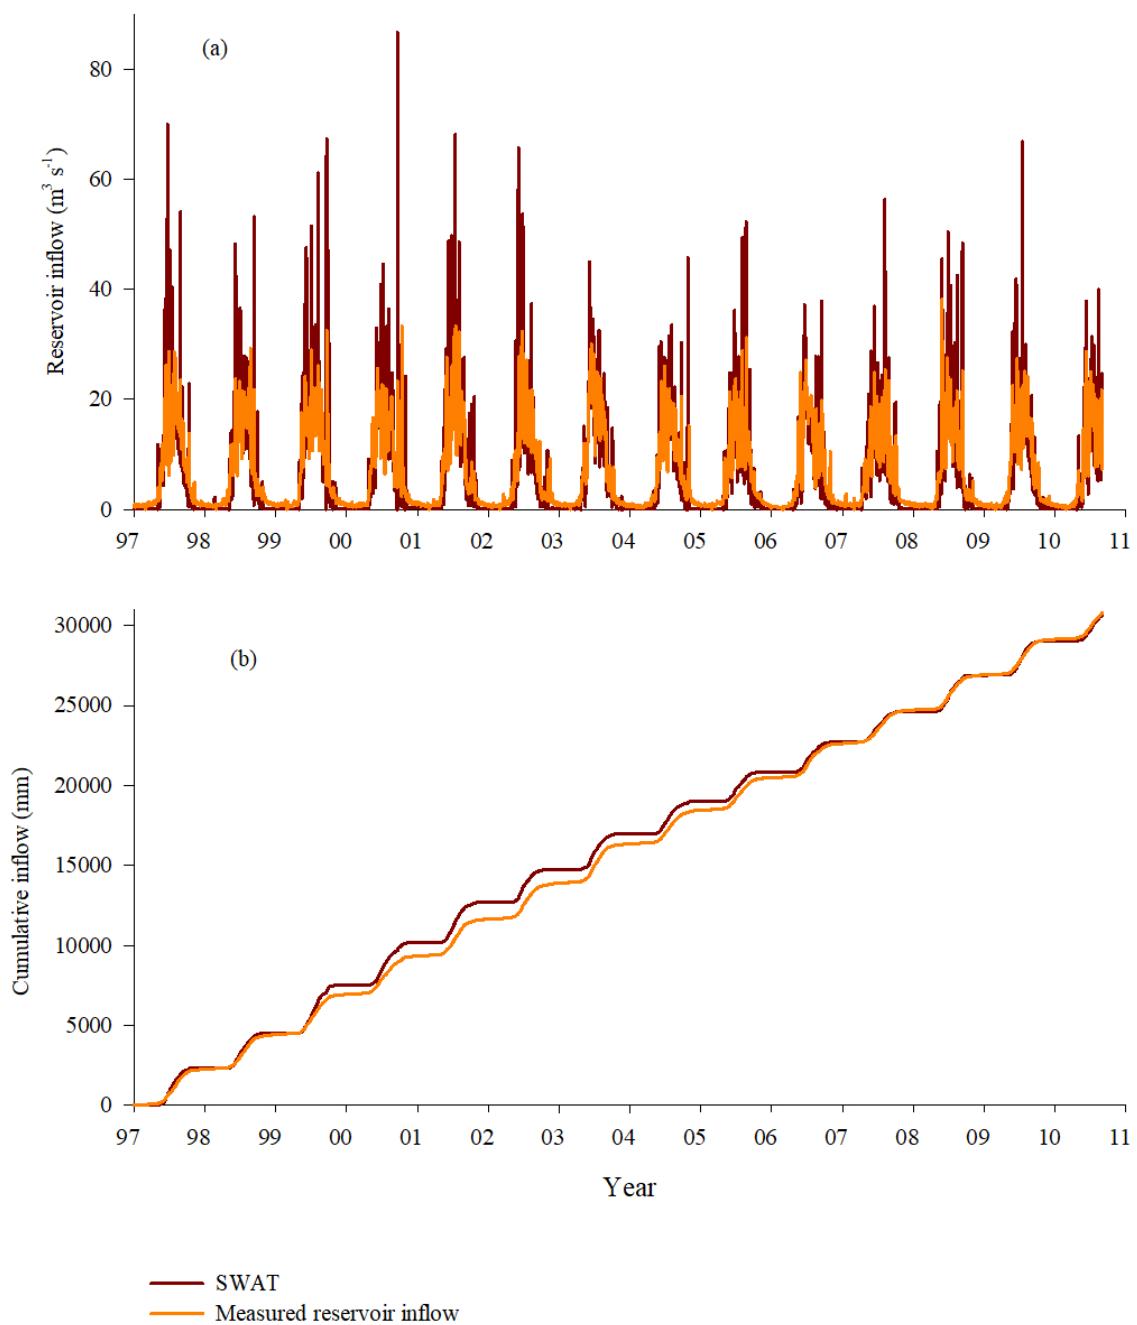


Figure 3 Results of SWAT and the measured inflow of the Göschenenalpsee reservoir for the period 1997-2010. Graphs in (b) show the measured and simulated cumulative inflow over this period.

650

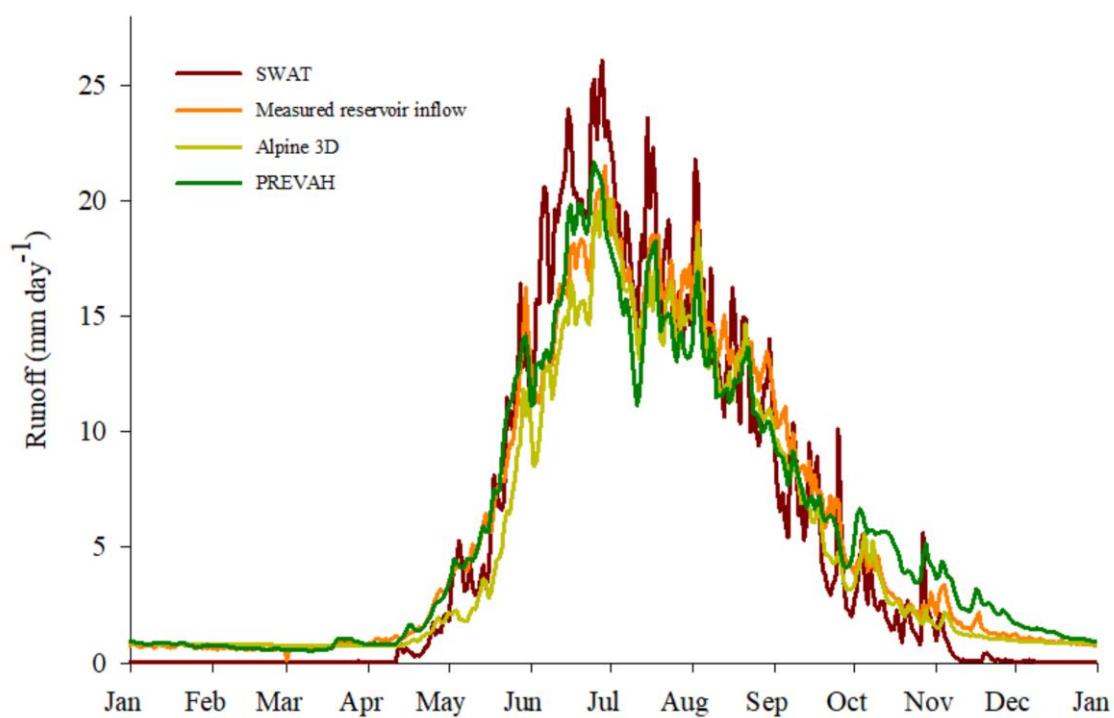

651

652 **Figure 4 Interannual average of the results of SWAT, ALPINE3D and PREVAH models and the measured runoff of**
653 **the Göschenenalpsee feeding catchment for the 1997-2010 period.**

654


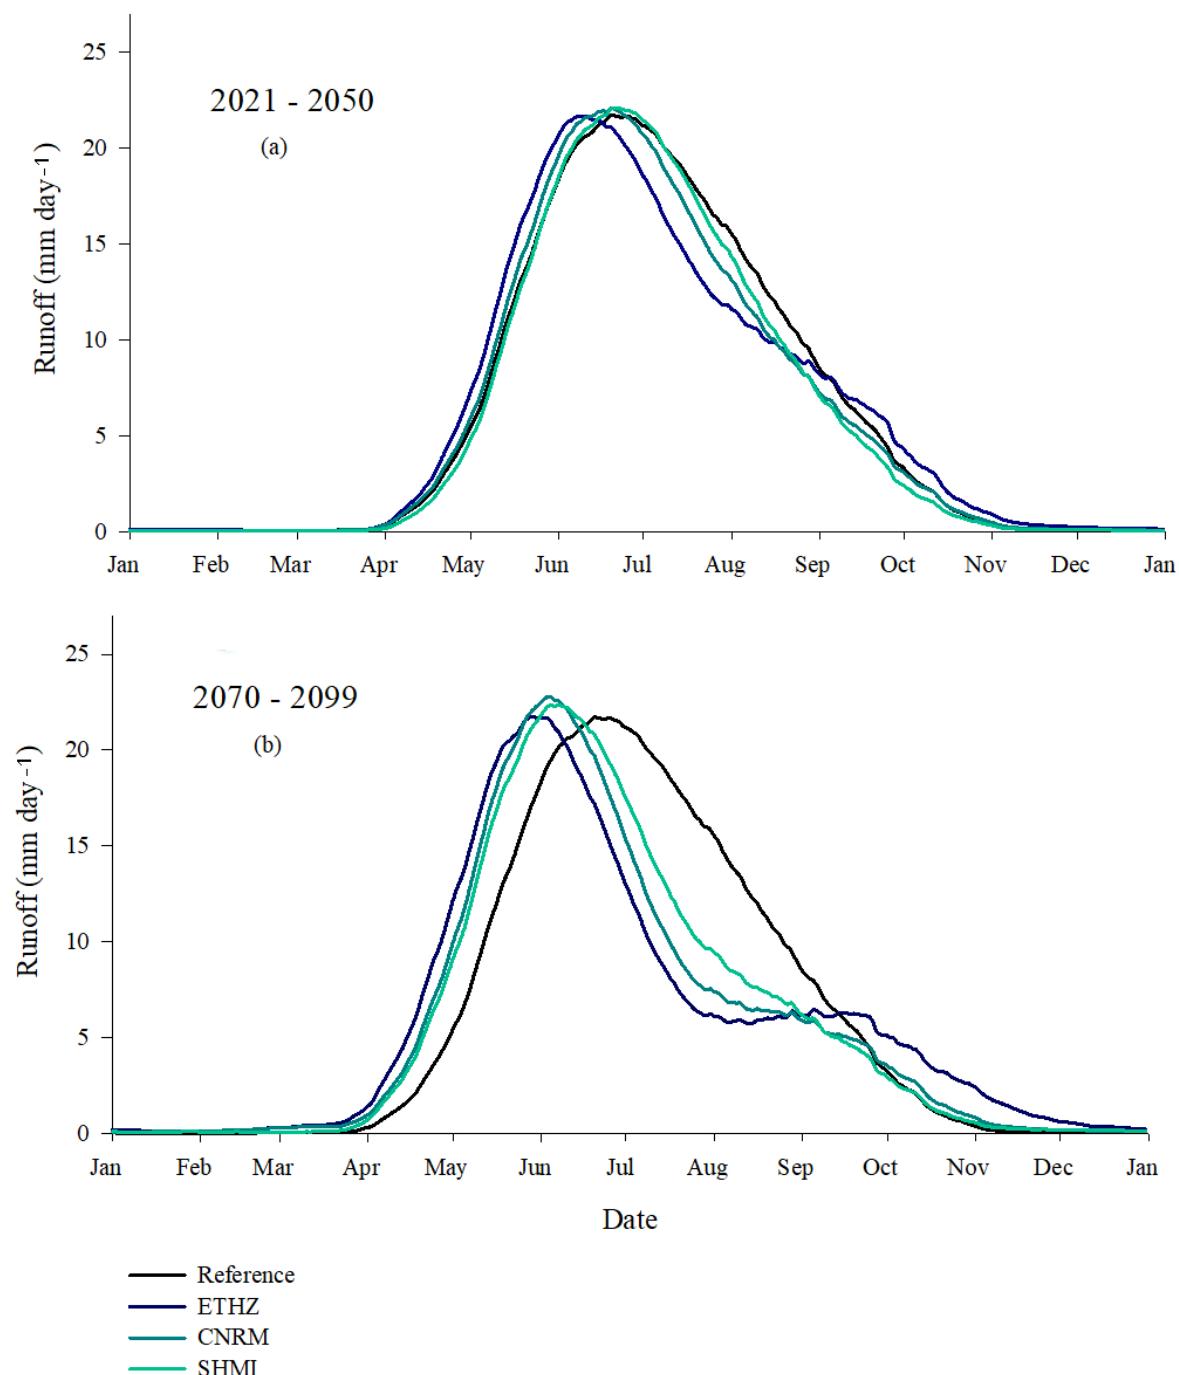


Figure 5 Interannual average of SWAT results of the three climate change scenarios and the reference period T0 for the Göschenenalpsee feeding catchment a) for the T1 period 2021-2050 and b) for the T2 period 2070-2099. A 30 day average window is applied.

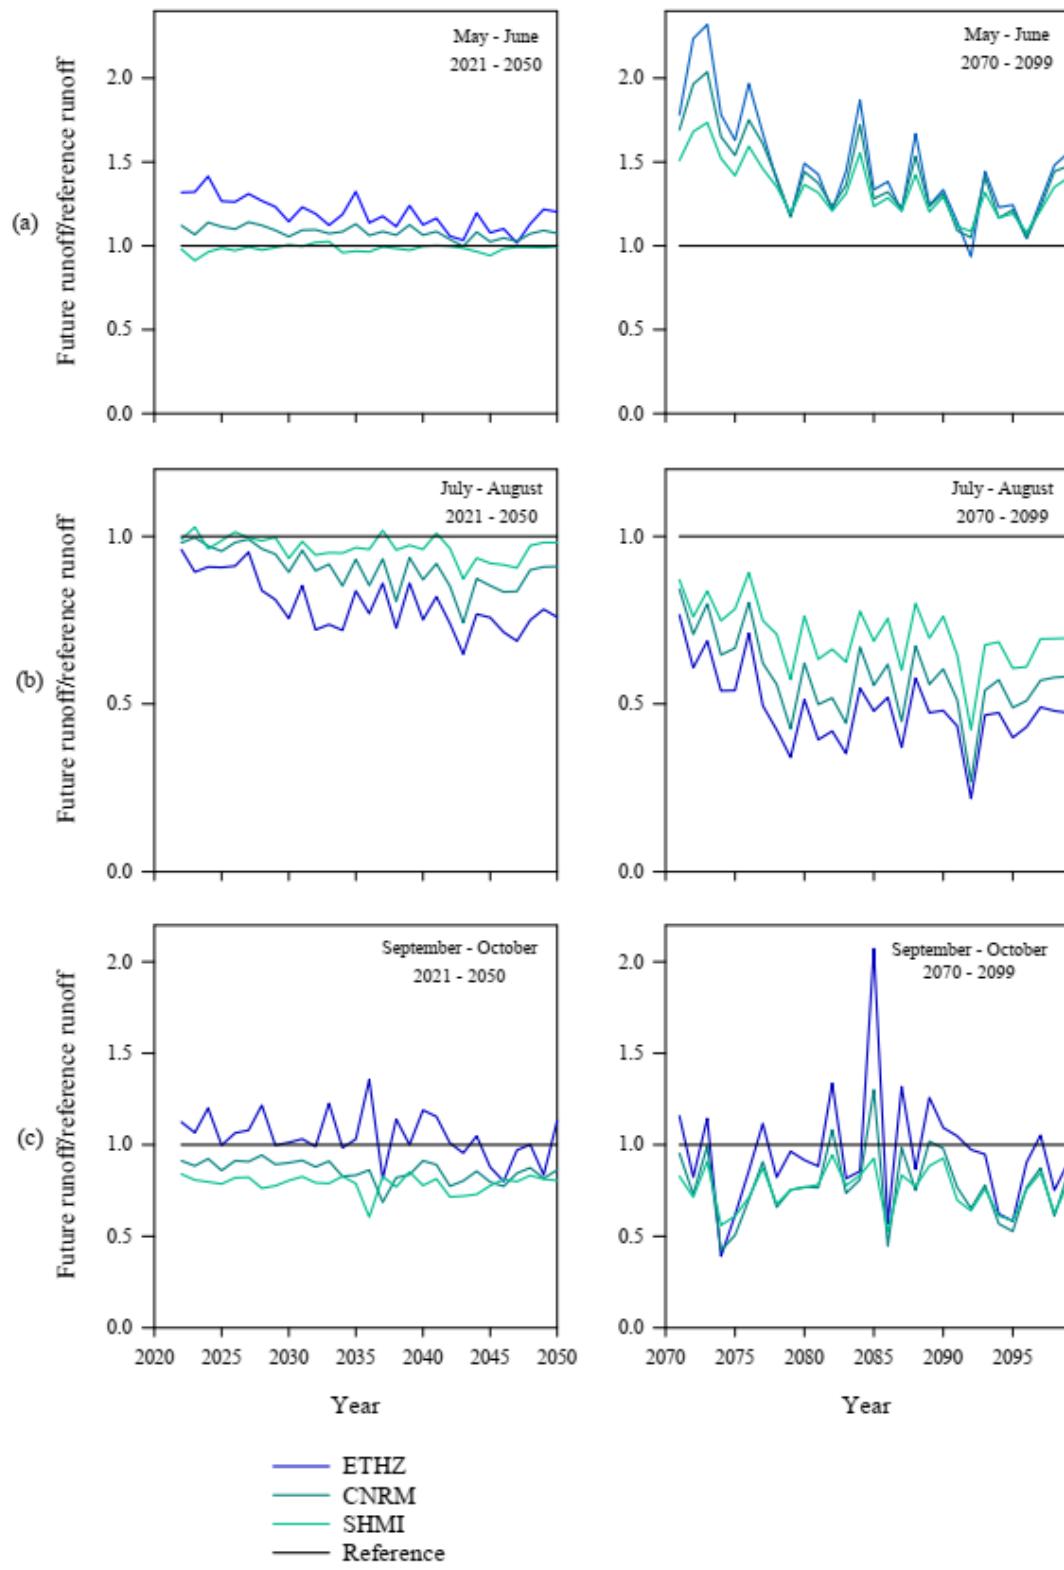

660
661 **Figure 6** Seasonal changes of the reservoir inflow simulated with SWAT for the Göschenenalpsee reservoir for the
662 reference T0 and future periods T1 and T2 for all three climate change scenarios. The interannual mean of the months
663 a) May and June, b) July and August and c) September and October is taken.

664