

Using altimetry observations combined with GRACE to select parameter sets of a hydrological model in data scarce regions

Petra Hulsman¹, Hessel C. Winsemius¹, Claire I. Michailovsky², Hubert H.G. Savenije¹, Markus Hrachowitz¹

¹Water Resources Section, Faculty of Civil Engineering and Geosciences, Delft University of Technology, Stevinweg 1, 2628 CN Delft, The Netherlands

²IHE Delft Institute for Water Education, Westvest 7, 2611 AX Delft, The Netherlands

Correspondence to: Petra Hulsman (p.hulsman@tudelft.nl)

Abstract. Limited availability of ground measurements in the vast majority of river basins world-wide increases the value of alternative data sources such as satellite observations in hydrological modelling. This study investigates the potential of using remotely sensed river water level, i.e. altimetry observations, from multiple satellite missions to identify parameter sets for a hydrological model in the semi-arid Luangwa River Basin in Zambia. A distributed process-based rainfall runoff model with sub-grid process heterogeneity was developed and run on a daily timescale for the time period 2002 to 2016. As a benchmark, feasible model parameter sets were identified using traditional model calibration with observed river discharge data. For the parameter identification using remote sensing, data from the Gravity Recovery and Climate Experiment (GRACE) were used in a first step to restrict the feasible parameter sets based on the seasonal fluctuations in total water storage. Next, three alternative ways of further restricting feasible model parameter sets using satellite altimetry time-series from 18 different locations along the river were compared. In the calibrated benchmark case, daily river flows were reproduced relatively well with an optimum Nash-Sutcliffe efficiency of $E_{NS,Q} = 0.78$ (5/95th percentiles of all feasible solutions $E_{NS,Q,5/95} = 0.61 - 0.75$). When using only GRACE observations to restrict the parameter space, assuming no discharge observations are available, an optimum of $E_{NS,Q} = -1.4$ ($E_{NS,Q,5/95} = -2.3 - 0.38$) with respect to discharge was obtained. The direct use of altimetry based river levels frequently led to over-estimated flows and poorly identified feasible parameter sets ($E_{NS,Q,5/95} = -2.9 - 0.10$). Similarly, converting modelled discharge into water levels using rating curves in the form of power relationships with two additional free calibration parameters per virtual station resulted in an over-estimation of the discharge and poorly identified feasible parameter sets ($E_{NS,Q,5/95} = -2.6 - 0.25$). However, accounting for river geometry proved to be highly effective; this included using river cross-section and gradient information extracted from global high-resolution terrain data available on Google Earth, and applying the Strickler-Manning equation to convert modelled discharge into water levels. Many parameter sets identified with this method reproduced the hydrograph and multiple other signatures of discharge reasonably well with an optimum of $E_{NS,Q} = 0.60$ ($E_{NS,Q,5/95} = -0.31 - 0.50$). It was further shown that more accurate river cross-section data improved the water level simulations, modelled rating curve and discharge simulations during intermediate and low flows at the basin outlet where detailed on-site cross-section information was available. Also, increasing the number of virtual stations used for parameter selection in the calibration period considerably improved the model performance in a spatial split sample validation. The results provide robust evidence that in the absence of directly observed discharge data for larger rivers in data scarce regions, altimetry data from multiple virtual stations combined with GRACE observations have the potential to fill this gap when combined with readily

available estimates of river geometry, thereby allowing a step towards more reliable hydrological modelling in poorly gauged or ungauged basins.

1 Introduction

Reliable models of water movement and distribution in terrestrial systems require sufficient good quality hydro-meteorological data throughout the modelling process. However, the development of robust models is challenged by the limited availability of ground measurements in the vast majority of river basins world-wide (Hrachowitz et al., 2013). Therefore, modellers increasingly resort to alternative data sources such as satellite data (Lakshmi, 2004; Winsemius et al., 2008; Sun et al., 2018; Pechlivanidis and Arheimer, 2015; Demirel et al., 2018; Zink et al., 2018; Rakovec et al., 2016; Nijzink et al., 2018; Dembélé et al., 2020).

In the absence of directly observed river discharge data, various types of remotely sensed variables provide valuable information for the calibration and evaluation of hydrological models. These include, for instance, remotely sensed time series of river width (Sun et al., 2012; Sun et al., 2015), flood extent (Montanari et al., 2009; Revilla-Romero et al., 2015), or river and lake water levels from altimetry (Getirana et al., 2009; Getirana, 2010; Sun et al., 2012; Garambois et al., 2017; Pereira-Cardenal et al., 2011; Velpuri et al., 2012).

Satellite altimetry observations provide estimates of the water level relative to a reference ellipsoid. For these observations, a radar signal is emitted from the satellite in the nadir direction and reflected back by the earth surface; the time difference between sending and receiving this signal is then used to estimate the distance between the satellite and the earth surface. As the position of the satellite is known at very high accuracy, this distance can then be used to infer the surface level relative to a reference ellipsoid (Łyszkowicz and Bernatowicz, 2017; Calmant et al., 2009). Satellite altimetry is sensed and recorded along the satellite's track. Altimetry based water levels can therefore only be observed where these tracks intersect with open-water surfaces; for rivers, these points are typically referred to as "virtual stations" (de Oliveira Campos et al., 2001; Birkett, 1998; Schneider et al., 2017; Jiang et al., 2017; Seyler et al., 2013). Depending on the satellite mission, the equatorial inter-track distance can vary between 75 km and 315 km, the along-track distance between 173 m and 374 m, and the temporal resolution between 10 days and 35 days (Schwatke et al., 2015; CNES, Accessed 2018; ESA, 2018; Łyszkowicz and Bernatowicz, 2017). Due to this rather coarse resolution, the application of remotely sensed altimetry data is at this moment limited to large lakes or rivers of more than approximately 200 m wide (Getirana et al., 2009; de Oliveira Campos et al., 2001; Biancamaria et al., 2017). Use of altimetry for hydrological models so far also remains rather rare due to the relatively low temporal resolution of the data, with applications typically limited to monthly or longer modelling time steps (Birkett, 1998).

In some previous studies, altimetry data were used to estimate river discharge at virtual stations in combination with routing models (Michailovsky and Bauer-Gottwein, 2014; Michailovsky et al., 2013) or stochastic models (Tourian et al., 2017). Other studies either directly related river altimetry to modelled discharge (Getirana et al., 2009; Getirana and Peters-Lidard, 2013; Leon et al., 2006; Paris et al., 2016) or they relied on rating curves developed with water level data from either in-situ measurements (Michailovsky et al., 2012; Tarpanelli et al., 2013; Papa et al., 2012; Tarpanelli et al., 2017) or, alternatively, from altimetry data (Kouraev et al., 2004). In typical applications, radar altimetry data from one single or only a few virtual stations were used for model calibration, validation or data assimilation; these data were mostly obtained from a single satellite mission, either

TOPEX/Poseidon or Envisat (Sun et al., 2012;Getirana, 2010;Liu et al., 2015;Pedinotti et al., 2012;Fleischmann et al., 2018;Michailovsky et al., 2013;Bauer-Gottwein et al., 2015). In previous studies, hydrological models have been calibrated or validated successfully with respect to (satellite based) river water levels for example by 1) applying the Spearman Rank Correlation coefficient (Seibert and Vis, 2016;Jian et al., 2017), or by converting modelled discharge to stream levels using 2) rating curves (Sun et al., 2012;Sikorska and Renard, 2017) or 3) the Strickler-Manning equation (Liu et al., 2015;Hulsman et al., 2018).

In the Zambezi river basin, altimetry data has been used in previous studies for hydrological modelling (Michailovsky and Bauer-Gottwein, 2014;Michailovsky et al., 2012). These studies used the altimetry data from the Envisat satellite in an assimilation procedure to update states in a Muskingum routing scheme. Including the altimetry data improved the model performance; especially when the model initially performed poorly due to high model complexity or input data uncertainties.

Despite these recent advances in using river altimetry in hydrological studies, exploitation of its potential is still limited. Various previous studies have argued and provided evidence based on observed discharge data that, in a special case of multi-criteria calibration, the simultaneous model calibration to flow in multiple sub-basins of a river basin, can be beneficial for a more robust selection of parameter sets and thus for a more reliable representation of hydrological processes and their spatial patterns (e.g. Ajami et al., 2004;Clark et al., 2016;Hrachowitz and Clark, 2017;Hasan and Pradhanang, 2017;Santhi et al., 2008). Hence, there may be considerable value in simultaneously using altimetry data not only from one single satellite mission but in combining data from multiple missions, which has not yet been systematically explored. While promising calibration results using data from Envisat were found by Getirana (2010) in tropical and Liu et al. (2015) in snow-dominated regions, altimetry data from multiple sources has not yet been used to calibrate hydrological models in semi-arid regions.

Therefore, the overarching objective of this study is to explore the combined information content (cf. Beven, 2008) of river altimetry data from multiple satellite missions and its potential to identify feasible parameter sets for the calibration of hydrological models of large river systems in a semi-arid, data scarce region.

In a step-wise approach we compare three parameter identification strategies using altimetry data from multiple virtual stations against a traditional calibration approach based on observed discharge at the outlet. The parameter identification strategies are 1) applying the Spearman Rank Correlation coefficient, or converting modelled discharge to stream levels using 2) rating curves or 3) the Strickler-Manning equation. These three strategies are tested on a distributed process-based rainfall-runoff model with sub-grid process heterogeneity for the Luangwa Basin. We test the following research hypotheses: 1) the use of altimetry data allows a meaningful selection of feasible model parameter sets to reproduce river discharge depending on the applied parameter identification strategy, and 2) the combined application of multiple virtual stations from multiple satellite missions improves the model's realism.

2 Site description

The study area is the Luangwa River in Zambia, a tributary of the Zambezi River (Figure 1). It has a basin area of 159,000 km² which is about 10% of the Zambezi River Basin. The Luangwa Basin is poorly gauged, mostly unregulated and sparsely populated with about 1.8 million inhabitants in 2005 (The World Bank, 2010). The mean annual precipitation is around 970 mm yr⁻¹, potential evaporation is around 1555 mm yr⁻¹ and river runoff

reaches about 100 mm yr^{-1} (The World Bank, 2010). The main land cover consists of broadleaf deciduous forest (55%), shrub land (25%) and savanna grassland (16%) (GlobCover, 2009). The irrigated area in the basin is limited to about 180 km^2 , i.e. roughly 0.1% of the basin area with an annual water use of about 0.7 mm yr^{-1} which amounts to $< 0.001\%$ of the annual basin water balance (The World Bank, 2010). The landscape varies between low lying flat areas along the river to large escarpments mostly in the North West of the basin and highlands with an elevation difference up to 1850 m (see Figure 1B and Section 3.2 for more information on the landscape classification). During the dry season, the river meanders between sandy banks while during the wet season from November to May it can cover flood plains several kilometres wide.

The Luangwa drains into the Zambezi downstream of the Kariba Dam and upstream of the Cahora Bassa Dam. The operation of both dams is crucial for hydropower production, and flood and drought protection, but is very difficult due to the lack of information from poorly gauged tributaries such as the Luangwa (SADC, 2008; Schleiss and Matos, 2016; The World Bank, 2010). As a result, the local population has suffered from severe floods and droughts (ZAMCOM et al., 2015; Beilfuss and dos Santos, 2001; Hanlon, 2001; SADC, 2008; Schumann et al., 2016).

2.1 Data availability

2.1.1 In-situ discharge and water level observations

In the Luangwa basin, historical in-situ daily discharge and water level observations were available from the Zambian Water Resources Management Authority at the Great East Road Bridge gauging station, located at $30^{\circ} 13' \text{ E}$ and $14^{\circ} 58' \text{ S}$ (Figure 1) about 75 km upstream of the confluence with the Zambezi. In this study, all complete hydrological years of discharge data within the time period 2002 to 2016 were used; these are the years 2004, 2006 and 2008.

2.1.2 Gridded data products

Besides the above in-situ observations, several gridded data products were used in this study for topographic description, model forcing (precipitation and temperature), and model parameter selection/calibration (total water storage anomalies), as shown in Table 1. The temperature data was used to estimate the potential evaporation according to the Hargreaves method (Hargreaves and Samani, 1985; Hargreaves and Allen, 2003).

The Gravity Recovery and Climate Experiment (GRACE) was used as proxy for the total water storage by measuring the variations in the Earth's gravity field to detect regional mass changes. These mass changes are dominated by variations in the terrestrial water storage after having accounted for atmospheric and oceanic effects (Landerer and Swenson, 2012; Swenson, 2012).

All gridded information was rescaled to the model resolution of 0.1° . The temperature and GRACE data were rescaled by dividing each cell of the satellite product into multiple cells such that the model resolution is obtained, retaining the original value. The precipitation was rescaled by taking the average of all cells located within each model cell.

Table 1: Gridded data products used in this study

	Time period	Time resolution	Spatial resolution	Product name	Source
Digital elevation map	NA	NA	0.02°	GMTED	(Danielson and Gesch, 2011)
Precipitation	2002 – 2016	Daily	0.05°	CHIRPS	(Funk et al., 2014)
Temperature	2002 – 2016	Monthly	0.5°	CRU	(University of East Anglia Climatic Research Unit et al., 2017)
Total water storage	2002 – 2016	Monthly	1°	GRACE	(Swenson, 2012; Swenson and Wahr, 2006; Landerer and Swenson, 2012)

2.1.3 Altimetry data

155 The altimetry data used in this study was obtained from the following sources: the Database for Hydrological
Time Series of Inland Waters (DAHITI; <https://dahiti.dgfi.tum.de/en/>) (Schwatke et al., 2015), HydroSat
(<http://hydrosat.gis.uni-stuttgart.de/php/index.php>) (Tourian et al., 2013), Laboratoire d'Etudes en Géophysique
et Océanographie Spatiales (LEGOS; <http://www.legos.obs-mip.fr/soa/hydrologie/hydroweb/>; see supplements
for more information), and the Earth and Planetary Remote Sensing Lab (EAPRS;
160 <http://www.cse.dmu.ac.uk/EAPRS/>). In total, altimetry data was obtained for 18 virtual stations in the Luangwa
basin (Figure 1A) for the time period 2002 – 2016 from the satellite missions Jason 1 – 3, Envisat and Saral
(Table 2, Figure S2).

Table 2: Overview of the altimetry data in the Luangwa River Basin used in this study

Nr.	Longitude	Latitude	Time period	Nr. of days with data	Source	Mission	Space Agency	Temporal resolution	Equatorial inter-track distance	Along-track distance	Literature
1	30.2823°	-14.8664°	2008-2016	246	DAHITI	Jason 2, 3	NASA/CNES	10 days	315 km	294 m	(Schwatke et al., 2015; CNES, Accessed 2018)
2	30.0864°	-14.366°	2008-2015	92	DAHITI	Jason 2, 3					
3	32.1715°	-12.4123°	2008-2016	248	DAHITI	Jason 2, 3					
4	31.1868°	-13.5927°	2002-2016	104	DAHITI	Envisat, Saral	ESA (Envisat),	35 days	80 km	374 m	(Schwatke et al., 2015; ESA, Accessed 2018)
5	31.6984°	-13.2039°	2002-2016	82	DAHITI	Envisat, Saral	ISRO/CNES (Saral)		(Envisat), 75 km	(Envisat), 173 m	(Schwatke et al., 2015; ESA, Accessed 2018)
6	32.2998°	-12.2007°	2002-2016	100	DAHITI	Envisat, Saral					
7	32.2805°	-12.1157°	2002-2016	103	DAHITI	Envisat, Saral					
8	32.831°	-11.3674°	2002-2016	105	DAHITI	Envisat, Saral					
9	30.2704°	-14.8809°	2008-2015	247	HydroSat	Jason 2	NASA/CNES	10 days	315 km	294 m	(Tourian et al., 2016; Tourian et al., 2013)
10	31.78405°	-13.0995°	2002-2010	65	EAPRS	Envisat	ESA	35 days	80 km	374 m	(Michailovsky et al., 2012; ESA, Accessed 2018)
11	31.71099°	-13.1943°	2002-2010	93	EAPRS	Envisat					
12	30.2740°	-14.8763°	2008-2015	231	LEGOS	Jason 3	NASA/CNES	10 days	315 km	294 m	(Frappart et al., 2015; CNES, Accessed 2018)
13	32.15843°	-12.412°	2016-2016	28	LEGOS	Jason 3					
14	32.15989°	-12.4127°	2002-2009	137	LEGOS	Jason 1					
15	30.2740°	-14.8763°	2008-2016	271	LEGOS	Jason 2					
16	32.16056°	-12.4125°	2008-2016	283	LEGOS	Jason 2					
17	31.80001°	-13.0909°	2013-2016	35	LEGOS	Saral	ISRO/CNES	35 days	75 km	173 m	
18	30.61577°	-14.1852°	2013-2016	24	LEGOS	Saral					

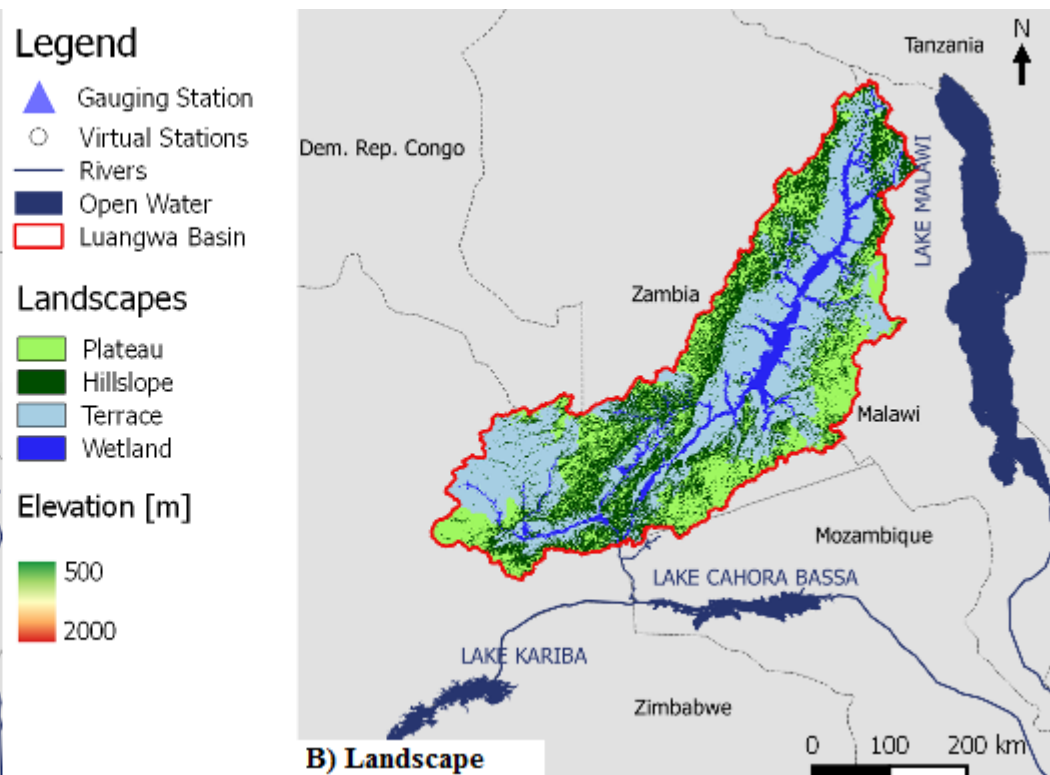
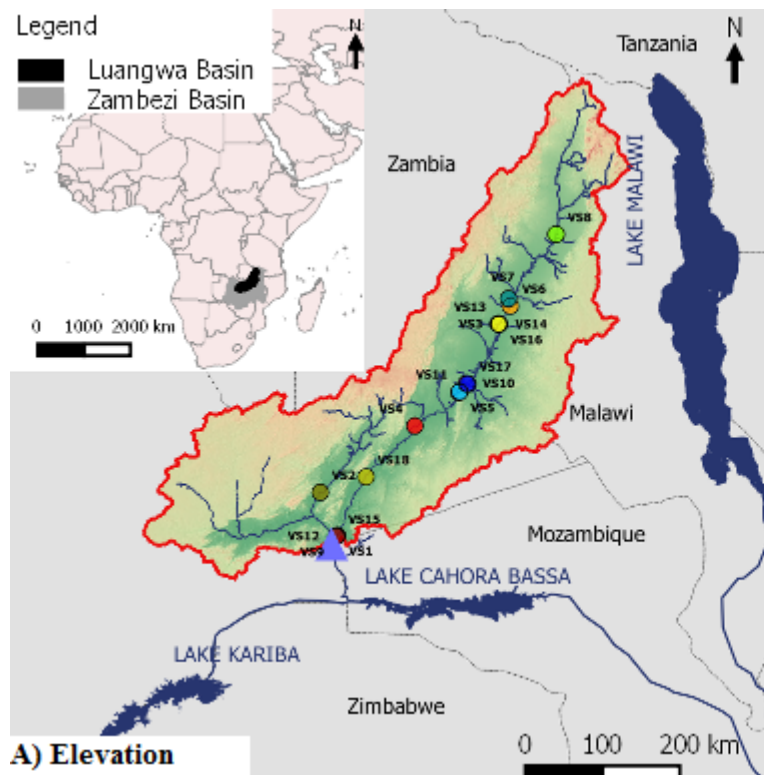


Figure 1: A) Elevation map of the Luangwa River Basin in Zambia including the Great East Road Bridges river gauging station and the locations of the 18 virtual stations (VS 1 – VS 18) with altimetry data used in this study; their colours correspond to those in Figure 3. B) Map of the Luangwa River Basin with the main landscape types (see Section 3.2).

2.1.4 River geometry information

In the Luangwa Basin, very limited detailed in-situ information was available on the river geometry such as cross-section and slope. For that reason, this information was extracted from global high-resolution terrain data available on Google Earth as done successfully in previous studies for other purposes (Pandya et al., 2017; Zhou and Wang, 2015). This was done for each virtual station and the basin outlet. Google Earth only provides river geometry information above the river water level. As the Luangwa is a perennial river, parts of the cross-section remain submerged throughout the year and thus unknown. To limit uncertainties arising from that, the cross-section geometry for each virtual station was therefore extracted from the Google Earth image with the lowest water levels at each individual virtual station. The dates of these images in general fall into the dry season, with flows at the Great East Road Bridges gauging station on the respective days ranging from 1% to 4% relative to the maximum discharge (see Supplementary Table S3 for the dates of the satellite images and the associated flows at the Great East Road Bridges gauging station). The database underlying the global terrain images in Google Earth originate from multiple, merged data sources with varying spatial resolutions. For the Luangwa Basin these include the Shuttle Radar Topography Mission (SRTM) with a spatial resolution of 30 m, the Landsat 8 with a spatial resolution of 15 m and the Satellite Pour l'Observation de la Terre 4/5 (SPOT) with a spatial resolution of 2.5 m to 20 m (Smith and Sandwell, 2003; Irons et al., 2012; Drusch et al., 2012). In addition to Google Earth data, the submerged part of the channel cross-section was surveyed in the field on April 27th 2018 near the Great East Road Bridges river gauging station at the coordinates 30° 13' E and 15° 00' S (Abas, 2018) with an Acoustic Doppler Current Profiler (ADCP).

3 Hydrological model development

3.1 General approach

The potential of river altimetry for model calibration was tested with a process-based hydrological model for the Luangwa river basin. This model relied on distributed forcing allowing for spatially explicit distributed water storage calculations. The model was run on a daily time scale for the time period 2002 to 2016. To reach the objective of this study, the following distinct parameter identification strategies were compared in a stepwise approach: (1) traditional model calibration to observed river flow as benchmark; (2) identification of parameter sets reproducing the seasonal water storage anomalies based on GRACE data only; (3a) Altimetry Strategy 1: identification of parameter sets directly based on remotely sensed water levels combined with GRACE data; (3b) Altimetry Strategy 2: identification of parameter sets based on remotely sensed water levels by converting modelled discharges into water levels using calibrated rating curves combined with GRACE data; (3c) Altimetry Strategy 3: identification of parameter sets based on remotely sensed water levels by converting modelled discharges into water levels using the Strickler-Manning equation and including river geometry information (cross-section and gradient) extracted from Google Earth combined with GRACE data; (4a) Water level Strategy 1: identification of parameter sets based on daily river water level at the catchment outlet only using the Strickler-Manning equation and including river geometry information extracted from Google Earth combined with GRACE data; and (4b) Water level Strategy 2: identification of parameter sets based on daily river water level at the catchment outlet only using the Strickler-Manning equation and including river geometry

information obtained from a detailed field survey with an Acoustic Doppler Current Profiler (ADCP) combined with GRACE data. Note that (1) is completely independent of (2) to (4) where no discharge data was used for the identification of parameter sets.

3.2 Hydrological model structure

In this study, a process-based rainfall-runoff with distributed water accounting and sub-grid process heterogeneity was developed (Ajami et al., 2004;Euser et al., 2015). The river basin was discretized into a grid with a spatial resolution of $10 \times 10 \text{ km}^2$. Each model grid cell was characterized by the same model structure and parameter sets but forced by spatially distributed, gridded input data (Table 1). Runoff was then calculated in parallel for each cell separately. Subsequently, a routing scheme was applied to estimate the aggregated flow in each grid cell at each time step.

Adopting the FLEX-Topo modelling concept (Savenije, 2010) and extending it to a gridded implementation, each grid cell was further discretised into functionally distinct hydrological response classes as demonstrated by Nijzink et al. (2016). Each point within a grid cell was assigned to a response class based on its position in the landscape as defined by its local slope and “Height-above-the-nearest-drainage” (HAND; Rennó et al., 2008;Gharari et al., 2011). Similar to previous studies (e.g. Gao et al., 2016;Nijzink et al., 2016) here the response classes plateau, hillslope, terrace and wetlands were distinguished. Reflecting earlier work (e.g. Gharari et al., 2011), all locations with slope of $> 4\%$ were assumed to be hillslope. Locations with slopes lower than that were then either defined as wetland ($\text{HAND} < 11\text{m}$), terrace ($11\text{m} \leq \text{HAND} < 275\text{m}$) or plateau ($\text{HAND} \geq 275\text{m}$); see Figure 2. Following this classification wetlands make up 8%, terraces 41%, hillslopes 28% and plateaus 23% of the total Luangwa River Basin area as mapped in Figure 1B.

Each response class consisted of a series of storage components that are linked by fluxes. The flow generated from each grid cell at any given time step is then computed as the area-weighted flow from the individual response classes plus a contribution from the common groundwater component which connects the response classes (Figure 2). Finally, the outflow from each modelling cell was routed to downstream cells to obtain the accumulated flow in each grid cell at any given time step. For this purpose, the mean flow length of each model grid cell to the outlet was derived based on the flow direction extracted from the digital elevation model. The flow velocity, which was assumed to be constant in space and time, was calibrated. With this information on the flow path length and velocity, the accumulated flow in each grid cell was calculated at the end of each time step. The relevant model equations are given in Table 3. This concept was previously successfully applied in a wide range of environments (Gao et al., 2014;Gharari et al., 2014;Fovet et al., 2015;Nijzink et al., 2016;Prenner et al., 2018).

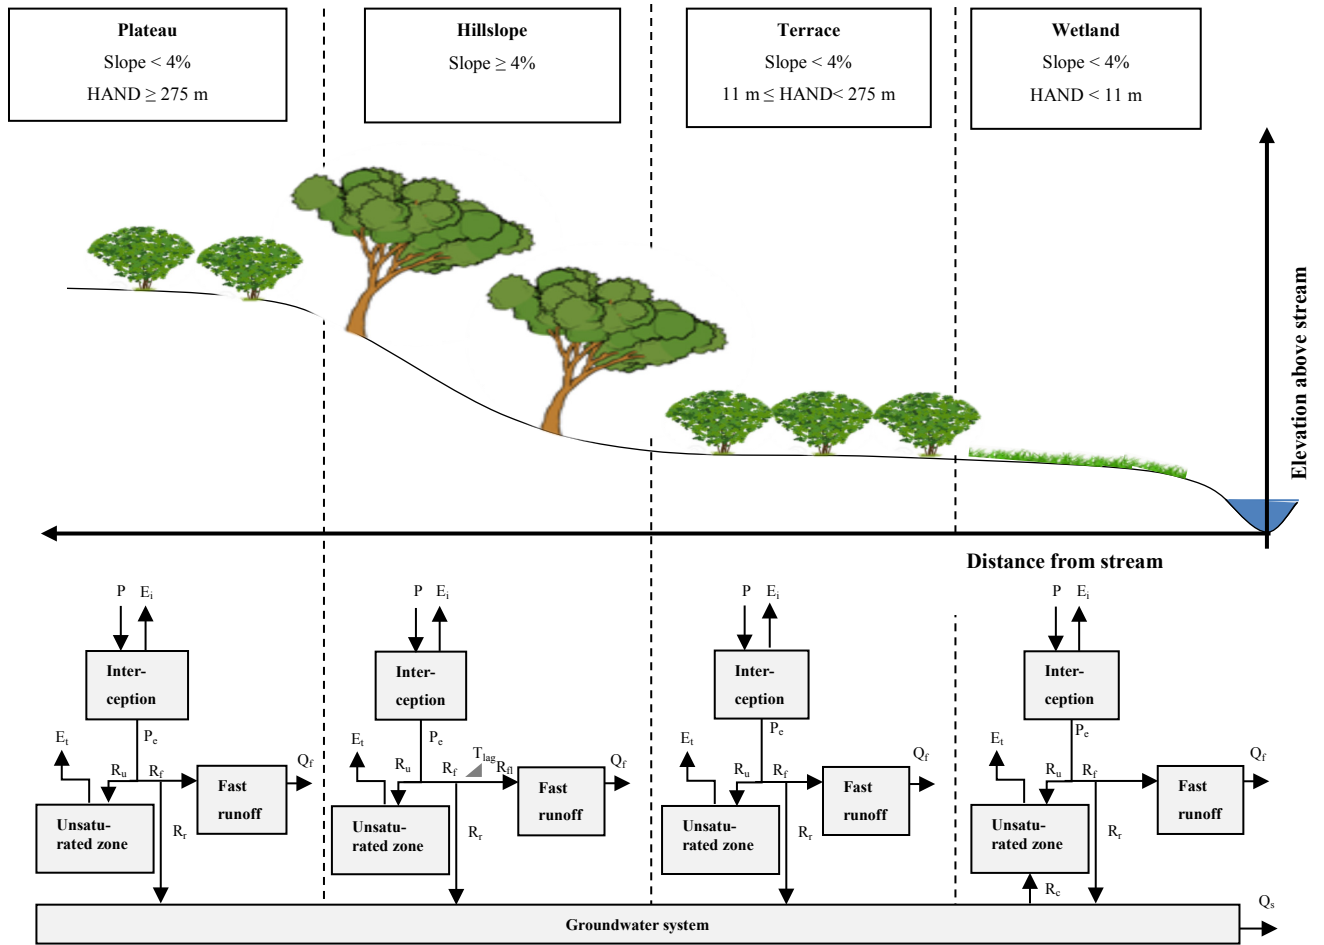


Figure 2: Sketch of the hydrological response classes including the thresholds used in this analysis for the slope and HAND (Height Above Nearest Drainage) and including their corresponding model structures. This spatial sub-grid discretization was applied to each grid cell. Symbol explanation: precipitation (P), effective precipitation (P_e), interception evaporation (E_i), plant transpiration (E_a), infiltration into the unsaturated root zone (R_u), drainage to fast runoff component (R_f), delayed fast runoff (R_n), lag time (T_{lag}), groundwater recharge (R_r), upwelling groundwater flux (R_c), fast runoff (Q_f), groundwater/slow runoff (Q_s).

Table 3: Equations applied in the hydrological model. **Fluxes** [mm d⁻¹]: precipitation (P), effective precipitation (P_e), potential evaporation (E_p), interception evaporation (E_i), plant transpiration (E_t), infiltration into the unsaturated zone (R_u), drainage to fast runoff component (R_f), delayed fast runoff (R_{fl}), groundwater recharge (R_r), upwelling groundwater (R_c), fast runoff (Q_f), groundwater/slow runoff (Q_s), total runoff (Q_m). **Storages** [mm]: storage in interception reservoir (S_i), storage in unsaturated root zone (S_u), storage in groundwater/slow reservoir (S_s), storage in fast reservoir (S_f). **Parameters**: interception capacity (I_{max}) [mm], maximum upwelling groundwater (C_{max}) [mm d⁻¹], maximum root zone storage capacity ($S_{u,max}$) [mm], splitter (W) [-], shape parameter (β) [-], transpiration coefficient (C_e) [-], time lag (T_{lag}) [d], reservoir time scales [d] of fast (K_f) and slow (K_s) reservoirs, areal weights (p_{HRU}) [-], time step (Δt) [d]. Model parameters are shown in bold letters in the table below. The equations were applied to each hydrological response unit (HRU) unless indicated differently.

Reservoir system	Water balance equation	Process functions
Interception	$\frac{\Delta S_i}{\Delta t} = P - P_e - E_i \approx 0$	$E_i = \min\left(E_p, \min\left(P, \frac{I_{max}}{\Delta t}\right)\right)$ $P_e = P - E_i$
Unsaturated zone	Plateau/Hillslope/Terrace: $\frac{\Delta S_u}{\Delta t} = R_u - E_t$ Wetland: $\frac{\Delta S_u}{\Delta t} = R_u - E_t + R_c$	$E_t = \min((E_p - E_i), \min\left(\frac{S_u}{\Delta t}, (E_p - E_i) \cdot \frac{S_u}{S_{u,max}} \cdot \frac{1}{C_e}\right))$ $R_c = \min\left(\left(1 - \frac{S_u}{S_{u,max}}\right) \cdot C_{max}, \frac{S_s}{\Delta t}\right)$ if $S_u + R_c \cdot \Delta t > S_{u,max}$: $R_c = \frac{S_{u,max} - S_u}{\Delta t}$ Plateau/Terrace/Wetland: $R_u = P_e$ Hillslope: $R_u = (1 - C) \cdot P_e$ $C = 1 - \left(1 - \frac{S_u}{S_{u,max}}\right)^\beta$
Fast runoff	$\frac{\Delta S_f}{\Delta t} = R_{fl} - Q_f$	$Q_f = \frac{S_f}{K_f}$ Terrace/Wetland: $R_f = \frac{\max(0, S_u - S_{u,max})}{\Delta t}$ $R_{fl} = R_f$ Hillslope: $R_f = (1 - W) \cdot C \cdot P_e$ $R_{fl} = R_f * f(T_{lag})$
Groundwater	$\frac{\Delta S_s}{\Delta t} = R_{r,tot} - R_{c,tot} - Q_s$	$R_r = W \cdot C \cdot P_e$ $R_{r,tot} = \sum_{HRU} p_{HRU} \cdot R_r$ $R_{c,tot} = \sum_{HRU} p_{HRU} \cdot R_c$ $Q_s = \frac{S_s}{K_s}$
Total runoff	$Q_m = Q_s + Q_{f,tot}$	$Q_{f,tot} = \sum_{HRU} p_{HRU} \cdot Q_f$
Supporting literature	(Gharari et al., 2014; Gao et al., 2014; Euser et al., 2015)	

3.3 Parameter selection procedures and model performance evaluation

To evaluate the information content and thus the utility of altimetry data for the selection of feasible model parameter sets, a step-wise procedure as specified in detail below was applied (Table 4). Note that given data scarcity and the related issues of epistemic uncertainties (Beven and Westerberg, 2011;McMillan and Westerberg, 2015) and equifinality (Beven, 2006;Savenije, 2001) we did not aim to identify the “optimal” parameter set in what is frequently considered a traditional calibration approach. In most hydrological applications the available data have limited strength for rigorous model tests (Clark et al., 2015;Gupta et al., 2008;Jakeman and Hornberger, 1993). Thus, to reduce the risk of rejecting good parameters when they should have been accepted (Beven, 2010;Hrachowitz and Clark, 2017), we rather attempted to identify and discard the most implausible parameter sets (Freer et al., 1996) that violate our theoretical understanding of the system or that are inconsistent with the available data (Knutti, 2008). This allowed us to iteratively constrain the feasible parameter space and thus the uncertainty around the modelled hydrograph (Hrachowitz et al., 2014). To do so, a Monte-Carlo sampling strategy with uniform prior parameter distributions was applied to generate $5 \cdot 10^4$ model realizations. This random set of solutions was in the following steps used as baseline and iteratively constrained by identifying parameter sets that do not satisfy pre-specified criteria (see below), depending on the data type and source used.

3.3.1 Benchmark: Parameter selection and model performance based on observed discharge data

Model calibration

As benchmark, and following a traditional calibration procedure, the model was calibrated with observed daily discharge based on the Nash-Sutcliffe efficiency (Nash and Sutcliffe, 1970) using all complete hydrological years within the time period 2002 to 2016; these are the years starting in the fall of 2004, 2006 and 2008:

$$E_{NS,Q} = 1 - \frac{\sum_t (Q_{\text{mod}}(t) - Q_{\text{obs}}(t))^2}{\sum_t (Q_{\text{obs}}(t) - \bar{Q}_{\text{obs}})^2} \quad (1)$$

To limit the solutions to relatively robust representations of the system while allowing for data and model uncertainty (e.g. Beven, 2006;Beven and Westerberg, 2011) only parameter sets that resulted in $E_{NS,Q} \geq 0.6$ were retained as feasible. The hydrological model consisted of 17 free calibration parameters (Table 4) whose uniform prior distributions are given in Table S1 in the supplementary material with associated parameter constraints as summarised in Table S2.

Table 4: Overview of the parameter identification strategies applied in this study

Calibration strategy name	Calibration data	Objective function	Nr. of calibration parameters	Comments	Discharge – water level conversion method	Benefits (+) & limitations (-)
Discharge (reference)	Discharge (at basin outlet)	$E_{NS,Q}$	17	Traditional model calibration on observed flow data Combination of 8 different flow signatures	-	-
Seasonal water storage	GRACE	$E_{NS,Stot}$	17	No discharge data used	-	-
Altimetry Strategy 1	Altimetry (at 18 virtual stations)	Altimetry: $D_{E,R,WL}$	17	No discharge data used	-	+ No extra parameters or data needed
	& GRACE	GRACE: $E_{NS,Stot}$		Combination of 18 virtual stations Combined with GRACE		+ Assumption: monotonic relation between discharge and river water level - Focus on dynamics only, not volume
Altimetry Strategy 2	Altimetry (at 18 virtual stations)	Altimetry: $D_{E,NS,RC}$	25	No discharge data used	Calibrated	+ No extra data needed
	& GRACE	GRACE: $E_{NS,Stot}$		Combination of 18 virtual stations Combined with GRACE	Rating curve	- Two extra parameters per cross-section
Altimetry Strategy 3	Altimetry (at 18 virtual stations)	Altimetry: $D_{E,NS,SM}$	18	No discharge data used	Strickler-Manning	+ Only 1 extra parameter
	& GRACE	GRACE: $E_{NS,Stot}$		Combination of 18 virtual stations Combined with GRACE		- Cross-section data needed - Assumption: constant roughness in space and time
Water level Strategy 1	Water level (at basin outlet)	Altimetry: $E_{NS,SM,GE}$	18	No discharge data used	Strickler-Manning	+ Only 1 extra parameter
	& GRACE	GRACE: $E_{NS,Stot}$		Combined with GRACE		- Cross-section data needed - Assumption: constant roughness in space and time
Water level Strategy 2	Water level (at basin outlet)	Altimetry: $E_{NS,SM,ADCP}$	18	No discharge data used	Strickler-Manning	+ Only 1 extra parameter
	& GRACE	GRACE: $E_{NS,Stot}$		Combined with GRACE		- Cross-section data needed - Assumption: constant roughness in space and time

Model evaluation

The performance of all model realizations was evaluated post-calibration with respect to discharge using seven additional hydrological signatures (e.g. Sawicz et al., 2011; Euser et al., 2013) to assess the skill of the model to reproduce the overall response of the system and thus the robustness of the selected parameters (Hrachowitz et al., 2014). The signatures included the logarithm of the daily flow time series (hereafter referred to with the subscript logQ), the flow duration curve (FDC), its logarithm (logFDC), the mean seasonal runoff coefficient during dry periods (April - September; RCdry), the mean seasonal runoff coefficient during the wet periods (October - March; RCwet), the autocorrelation function of daily flow (AC) and the rising limb density of the hydrograph (RLD). An overview of these signatures can be found in Table 5, and more detailed explanations in Euser et al. (2013) and references therein. As performance measures for the model to reproduce the individual observed signatures the Nash-Sutcliffe efficiency ($E_{NS, \log Q}$, $E_{NS, FDC}$, $E_{NS, \log FDC}$, $E_{NS, AC}$; equivalent to Eq.1 and a metric based on the relative error ($E_{R, RCdry}$, $E_{R, RCwet}$, $E_{R, RLD}$) were used (Euser et al., 2013):

$$E_{R, \theta} = 1 - \frac{|\theta_{\text{mod}} - \theta_{\text{obs}}|}{\theta_{\text{obs}}} \quad (2)$$

Where θ is any of the three signatures evaluated with E_R . The signatures were combined, with equal weights, into one objective function, which was formulated based on the Euclidian distance D_E (Schoups et al., 2005) so that a value of 1 indicates a “perfect” model:

$$D_E = 1 - \sqrt{\frac{1}{(N + M)} \left(\sum_n (1 - E_{NS, \theta_n})^2 + \sum_m (1 - E_{R, \theta_m})^2 \right)} \quad (3)$$

Where θ is a signature, n indicates the signatures evaluated based on the Nash-Sutcliffe efficiency, m indicates the signatures evaluated based on the relative error and N and M are the respective number of signatures used.

Table 5: Overview of flow signatures used in this study

Flow signature	Explanation	Function	Model performance equation
Q	Daily flow time series	-	$E_{NS,Q} = 1 - \frac{\sum_t (Q_{mod,t} - Q_{obs,t})^2}{\sum_t (Q_{obs,t} - \bar{Q}_{obs})^2}$
logQ	Logarithm of daily flow time series	-	$E_{NS,logQ} = 1 - \frac{\sum_t (Q_{log,mod,t} - Q_{log,obs,t})^2}{\sum_t (Q_{log,obs,t} - \bar{Q}_{log,obs})^2}$
FDC	Flow duration curve	-	$E_{NS,FDC} = 1 - \frac{\sum_t (Q_{sort,mod,t} - Q_{sort,obs,t})^2}{\sum_t (Q_{sort,obs,t} - \bar{Q}_{sort,obs})^2}$
logFDC	Logarithm of flow duration curve	-	$E_{NS,logFDC} = 1 - \frac{\sum_t (Q_{log,sort,mod,t} - Q_{log,sort,obs,t})^2}{\sum_t (Q_{log,sort,obs,t} - \bar{Q}_{log,sort,obs})^2}$
RCdry	Runoff coefficient during dry periods	$RC_{dry} = \frac{Q_{dry}}{P_{dry}}$	$E_{R,RCdry} = 1 - \frac{ RC_{dry,mod} - RC_{dry,obs} }{RC_{dry,obs}}$
RCwet	Runoff coefficient during wet periods	$RC_{wet} = \frac{Q_{wet}}{P_{wet}}$	$E_{R,RCwet} = 1 - \frac{ RC_{wet,mod} - RC_{wet,obs} }{RC_{wet,obs}}$
AC	Autocorrelation function	$AC_t = \frac{\sum_i (Q_i - \bar{Q}) * (Q_{i+t} - \bar{Q})}{\sum (Q_i - \bar{Q})^2}$	$E_{NS,AC} = 1 - \frac{\sum_t (AC_{mod,t} - AC_{obs,t})^2}{\sum_t (AC_{obs,t} - \bar{AC}_{obs})^2}$
RLD	Rising limb density	$RLD = \frac{N_{peaks}}{T_r}$	$E_{R,RLD} = 1 - \frac{ RLD_{mod} - RLD_{obs} }{RLD_{obs}}$

3.3.2 Parameter selection and model performance based on the seasonal water storage (GRACE)

In a next step we assumed that discharge records in the Luangwa Basin were absent. The starting assumption thus had to be that all model realizations, i.e. all sampled parameter sets, were equally likely to allow feasible representations of the hydrological system. In a stepwise approach, confronting these realizations with different types of data, we sequentially identified and discarded solutions that were least likely to provide meaningful system representations, thereby gradually narrowing down the feasible parameter space.

As altimetry data alone only contain limited information on the river flow volumes, we first identified and discarded solutions that were least likely to preserve observed the seasonal water storage (S_{tot}) fluctuations. To do so, the monthly modelled total water storage ($S_{tot,mod} = S_i + S_u + S_f + S_s$) relative to the 2004-2009 time-mean baseline in each grid cell was compared to water storage anomalies as obtained from the GRACE data product (Tang et al., 2017; Fang et al., 2016; Forootan et al., 2019; Khaki and Awange, 2019). In the GRACE product, the same time period was used for the time-mean baseline (Swenson and Wahr, 2006; Swenson, 2012; Landerer and Swenson, 2012).

The model's skill to reproduce the seasonal water storage, i.e. S_{tot} , was assessed using the Nash-Sutcliffe efficiency $E_{NS,S_{tot}}$ (Eq. 1). Note that $E_{NS,S_{tot,j}}$ was computed at first from the time series of S_{tot} in each grid cell j which were then averaged to obtain $E_{NS,S_{tot}}$. If no additional data were available, a hypothetical modeller relying on $E_{NS,S_{tot}}$ to calibrate a model, may choose only the solution with the highest $E_{NS,S_{tot}}$ or allow for some uncertainty. To mimic this traditional approach but to balance it with a sufficient number of feasible solutions to be kept for the subsequent steps we here identified and discarded the poorest performing 75% of all solutions in terms of $E_{NS,S_{tot}}$ as unfeasible for the subsequent modelling steps.

3.3.3 Parameter selection and model performance based on satellite altimetry data

Next, the remaining feasible parameter sets were used to evaluate their potential to also reproduce time series of observed altimetry applying three distinct parameter selection and model evaluation strategies. Assuming again the situation of an ungauged basin (i.e. no time-series of river flow available), we kept for each strategy as feasible the respective 1% best performing parameter sets according to the specific performance metric associated to that strategy. In a final step, these solutions were then compared for their potential to reproduce actually observed river flow time series.

Altimetry Strategy 1: Direct comparison of altimetry data to modelled discharge

Hereafter referred to as with subscript WL, i.e. water level. In the simplest approach, we directly used altimetry data to correlate observed water levels with modelled discharge based on the Spearman rank correlation coefficient ($E_{R,WL}$; Spearman, 1904):

$$E_{R,WL} = \frac{\text{cov}(r_{Q_{\text{mod}}}, r_{WL_{\text{obs}}})}{\sigma(r_{Q_{\text{mod}}}) * \sigma(r_{WL_{\text{obs}}})} \quad (4)$$

Where $r_{Q_{\text{mod}}}$ and $r_{WL_{\text{obs}}}$ are the ranks of the modelled discharge and the observed water levels, respectively. This method requires as assumption that the relationship between water level and discharge has to be monotonic. The Spearman rank correlation was applied successfully in previous studies to calibrate a rainfall-runoff model to water level time series (Seibert and Vis, 2016). As there were multiple virtual stations with water level data available in this study, the $E_{R,WL}$ was computed at each location simultaneously. The individual values $E_{R,WL}$ were weighted based on the record length of the corresponding virtual stations and then combined into the Euclidean distance as aggregate metric $D_{E,R,WL}$, equivalent to Eq. 5.

$$D_{E,\beta,\gamma} = 1 - \sqrt{\left(\sum_i w_i * (1 - E_{\beta,\gamma})^2 \right)} \quad (5)$$

Where $E_{\beta,\gamma}$ is the individual model performance for each virtual station, β is the abbreviation for the model performance metric, γ the abbreviation for the parameter selection method and w_i the relative weight.

Altimetry Strategy 2: Rating curves

In the second strategy, as successfully applied in previous studies (Getirana and Peters-Lidard, 2013; Jian et al., 2017), model parameters were selected based on the models' ability to reproduce water levels by converting the modelled discharge to water levels, assuming these two are related through a rating curve in the form of a power function (Rantz, 1982):

$$Q = a * (h - h_0)^b \quad (6)$$

Where h is the water level, h_0 a reference water level, and a and b are two additional calibration parameters, determining the shape of the function and lumping the combined influences of different river cross-section characteristics, such as geometry or roughness. Note, that here for each virtual station h_0 is the elevation that corresponds to the water level of the Google Earth image with the lowest flow available. This strategy is hereafter referred to as with subscript RC, i.e. rating curve. As river-cross sections vary in space, each of the 18

virtual stations would require an individual set of these parameters a and b . To limit the number of additional calibration parameters, we here classified the river-cross sections of the 18 virtual stations into 4 classes (Figure 1A and Figure 3). For cross-sections within each class, i.e. geometrically similar, the same values for a and b were used, resulting in 4 sets of a and b and thus a total of 8 additional calibration parameters. The river cross-sections were extracted from global high-resolution terrain data available on Google Earth (see Section 2.1.4). The modelled river water levels were evaluated against the observed water levels at each virtual station using the Nash-Sutcliffe efficiency $E_{NS,RC}$ (equivalent to Eq. 1), weighted based on the record length of the corresponding virtual stations and then combined into the Euclidean distance $D_{E,NS,RC}$ as an aggregated performance metric (Eq. 5).

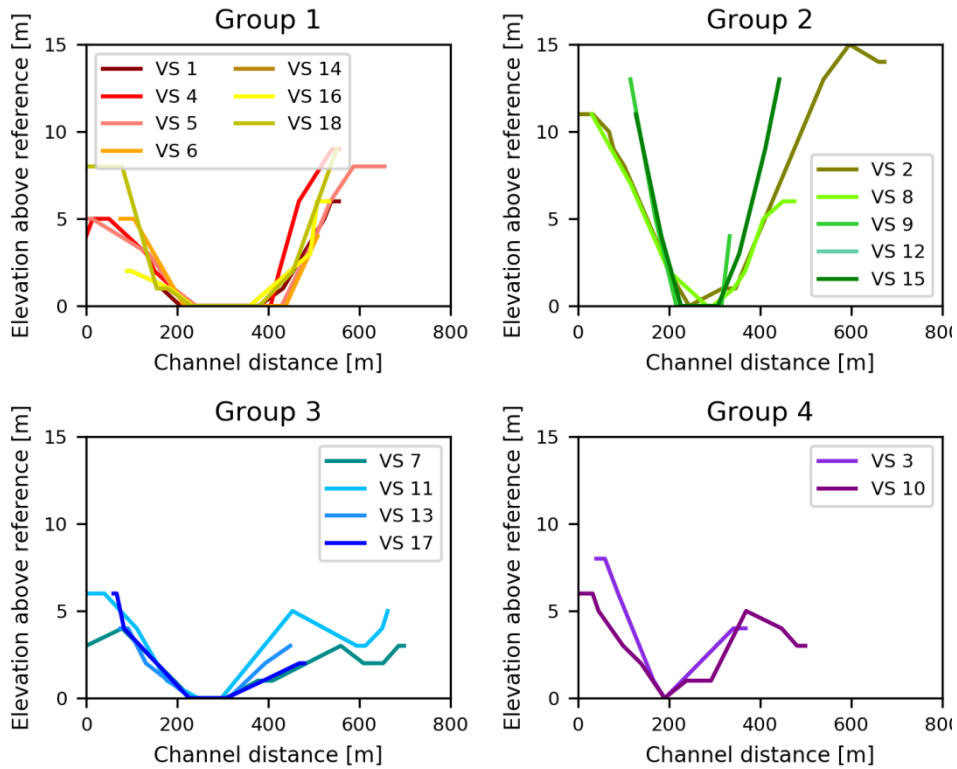


Figure 3: River profiles at 18 virtual stations (VS) divided into four groups. The reference level is equal to the lowest water level in the river profile for each location separately.

Altimetry Strategy 3: Strickler-Manning equation

As third strategy, we converted the modelled discharge to river water levels using the Strickler-Manning equation (Manning, 1891):

$$Q = k * i^{\frac{1}{2}} * A * R^{\frac{2}{3}} \quad (7)$$

Where k is a roughness parameter, here treated as free calibration parameter and assumed constant for all virtual stations, i is the mean channel slope, here over a distance of 10 km, while A and R are the river cross-section area and hydraulic radius. Assuming trapezoidal cross-sections (see Figure 4 as illustrative example), A and R were calculated for each cross section according to:

$$A = B * d + \frac{1}{2} * d^2 * (i_1 + i_2) \quad (8)$$

$$R = \frac{A}{B + d * \left((1 + i_1^2)^{\frac{1}{2}} + (1 + i_2^2)^{\frac{1}{2}} \right)} \quad (9)$$

$$d = h - h_0 \quad (10)$$

Where B is the assumed river bed width, i_1 and i_2 are the river bank slopes, d the water depth, h the water level and h_0 the reference water level, here assumed to be the lowest observed river water level to limit the number of calibration parameters. In contrast to previous studies that use a similar approach but relied on locally observed river-cross sections (Michailovsky et al., 2012;Hulsman et al., 2018;Liu et al., 2015), here both, the river bed geometries (Figure 3) at and the channel slopes upstream of the 18 virtual stations were computed using high-resolution terrain data retrieved from Google Earth (see Section 2.1.4); similar data sources were already used in previous studies to extract the river geometry (e.g. Michailovsky et al., 2012;Pramanik et al., 2010;Gichamo et al., 2012). The reader is referred to Table S3 in the supplementary material for the values of the variables for each virtual station. This strategy is hereafter referred to as with subscript SM, i.e. Strickler-Manning.

Equivalent to above, the modelled river water levels were then evaluated against the observed water levels at each virtual station using the Nash-Sutcliffe efficiency $E_{NS,SM}$ (equivalent to Eq. 1), weighted based on the record length of the corresponding virtual stations and then combined into the Euclidean distance $D_{E,NS,SM}$ as an aggregated performance metric (Eq. 5).

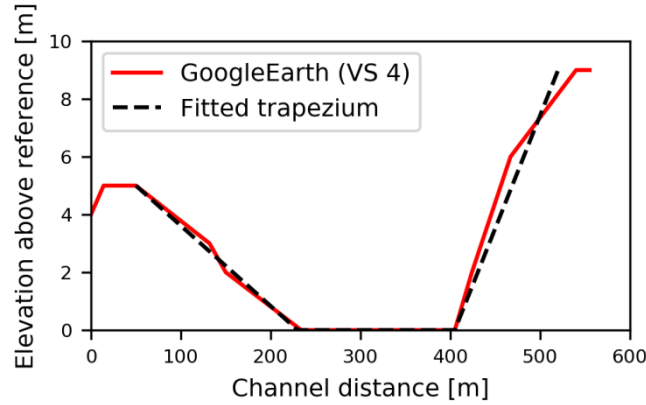


Figure 4: Example of approximating a trapezoidal cross-section (black) into the Google Earth based cross-section data (red) for virtual station “VS 4” (see also Figure 1A and Figure 3). The reference level is equal to the lowest water level in the river profile.

3.3.4 Parameter selection and model performance based on daily river water level at the basin outlet

For the previous parameter identification strategy (Altimetry Strategy 3), river geometry information was extracted from high-resolution terrain data retrieved from Google Earth which have a low accuracy. Unfortunately, more accurate cross-section information from in-situ surveys was only available at the Great East Road Bridge gauging station, i.e. the basin outlet, where, in turn, no altimetry observations were available. That is why water level time series were used to illustrate the influence of the cross-section accuracy.

As shown in Figure 5, the Google Earth based above-water cross-section at the basin outlet corresponded in general well to the field survey considering that satellite images have limited spatial resolution. However, the in-situ measurement also illustrated the relevance of the submerged part of the channel cross-section at that location on the day the image was taken (June 2nd 2008).

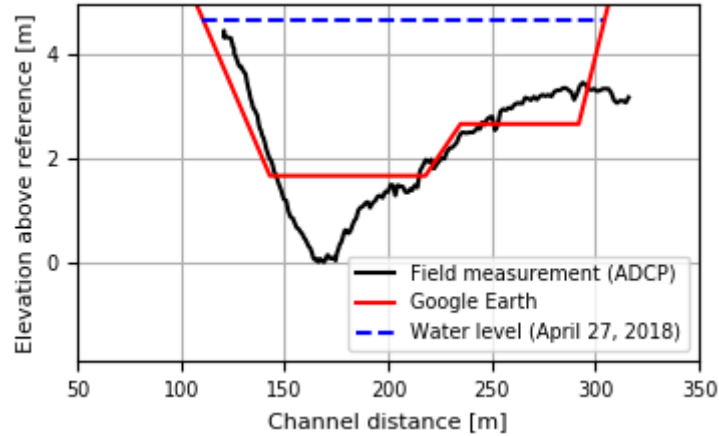


Figure 5: River cross-section at Luangwa Bridge obtained from Google Earth and detailed field survey including the river water level on June 2nd 2008. Field measurements were done with an Acoustic Doppler Current Profiler (ADCP) on April 27th 2018 at the coordinates 30° 13' E and 15° 00' S; the satellite image was taken on June 2nd 2008. The reference level is equal to the lowest elevation level measured with the ADCP.

Water level Strategy 1: River geometry information extracted from Google Earth

First, cross-section information was extracted from global high-resolution terrain data available on Google Earth (subscript GE) and used with the Strickler-Manning equation (Eq. 7) to convert the modelled discharge to water levels. This was combined with GRACE observations to restrict the parameter space in an equivalent way as in Section 3.3.3. The model performance with respect to river water levels was calculated with the Nash-Sutcliffe efficiency $E_{NS,SM,GE}$ (Eq. 1).

Water level Strategy 2: River geometry information obtained from a detailed field survey

Second, cross-section information obtained from a detailed field survey with an ADCP (subscript ADCP) was used with the Strickler-Manning equation (Eq. 7) to convert the modelled discharge to water levels. This was combined with GRACE observations to restrict the parameter space in an equivalent way as in Section 3.3.3. The model performance with respect to river water levels was calculated with the Nash-Sutcliffe efficiency $E_{NS,SM,ADCP}$ (Eq. 1).

4 Results and discussion

4.1 Parameter selection and model performance

The complete set of all model realizations unsurprisingly results in a wide range of model solutions (Figure 6A), with $E_{NS,Q}$ ranging from -6.4 to 0.78 and with the combined performance metric of all signatures D_E ranging from -334 to 0.79 (Figure 7). With respect to the individual flow signatures, the model performance varied such that the largest range was found in $E_{NS,Q}$ and smallest in $E_{NS,AC}$ as visualised in Figure 7 and tabulated in Table S4. Although containing relatively good solutions, this full set of all realizations clearly also contained many parameter sets that considerably over- and/or underestimate flows.

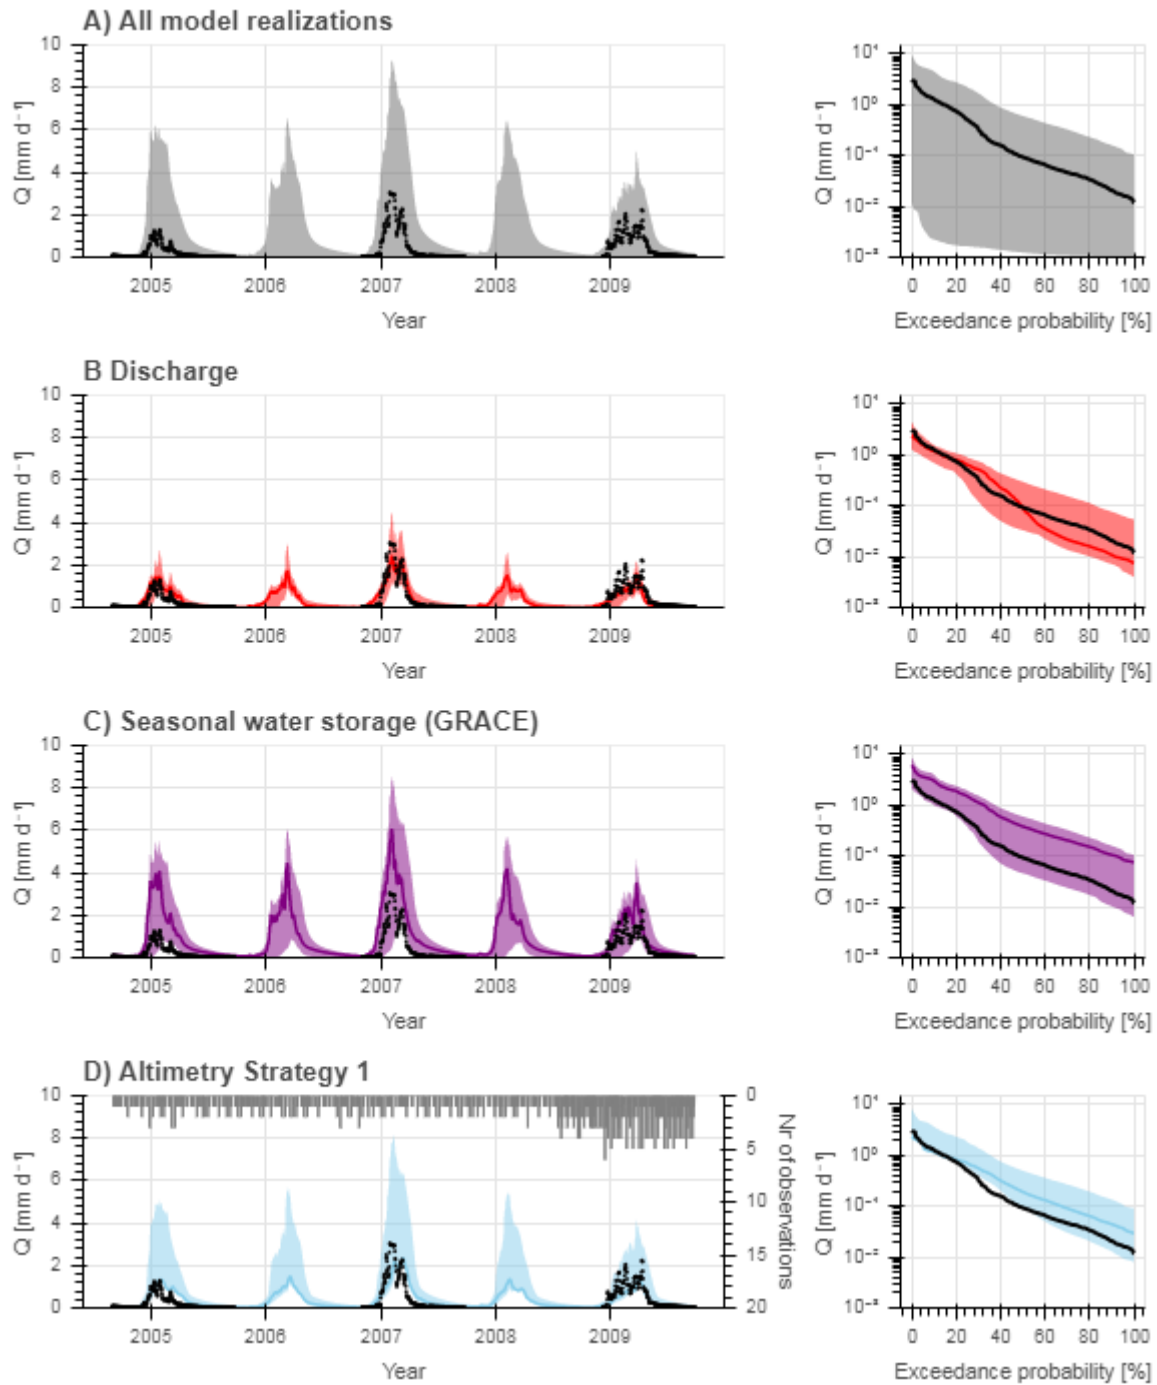


Figure 6: Range of model solutions. The left panel shows the hydrograph and the right panel the flow duration curve of the recorded (black) and modelled discharge: the line indicates the solution with the highest calibration objective function (E_{NS} or D_E) and the shaded area the envelope of the solutions retained as feasible. A) All model solutions included; solutions retained as feasible based on B) discharge (i.e. “traditional calibration”; $E_{NS,Q}$), C) GRACE ($E_{NS,Stot}$), and D) Altimetry Strategy 1 only ($D_{E,R,WL}$). The grey bars in the left subplot D indicate the number of altimetry observations available for each day.

440

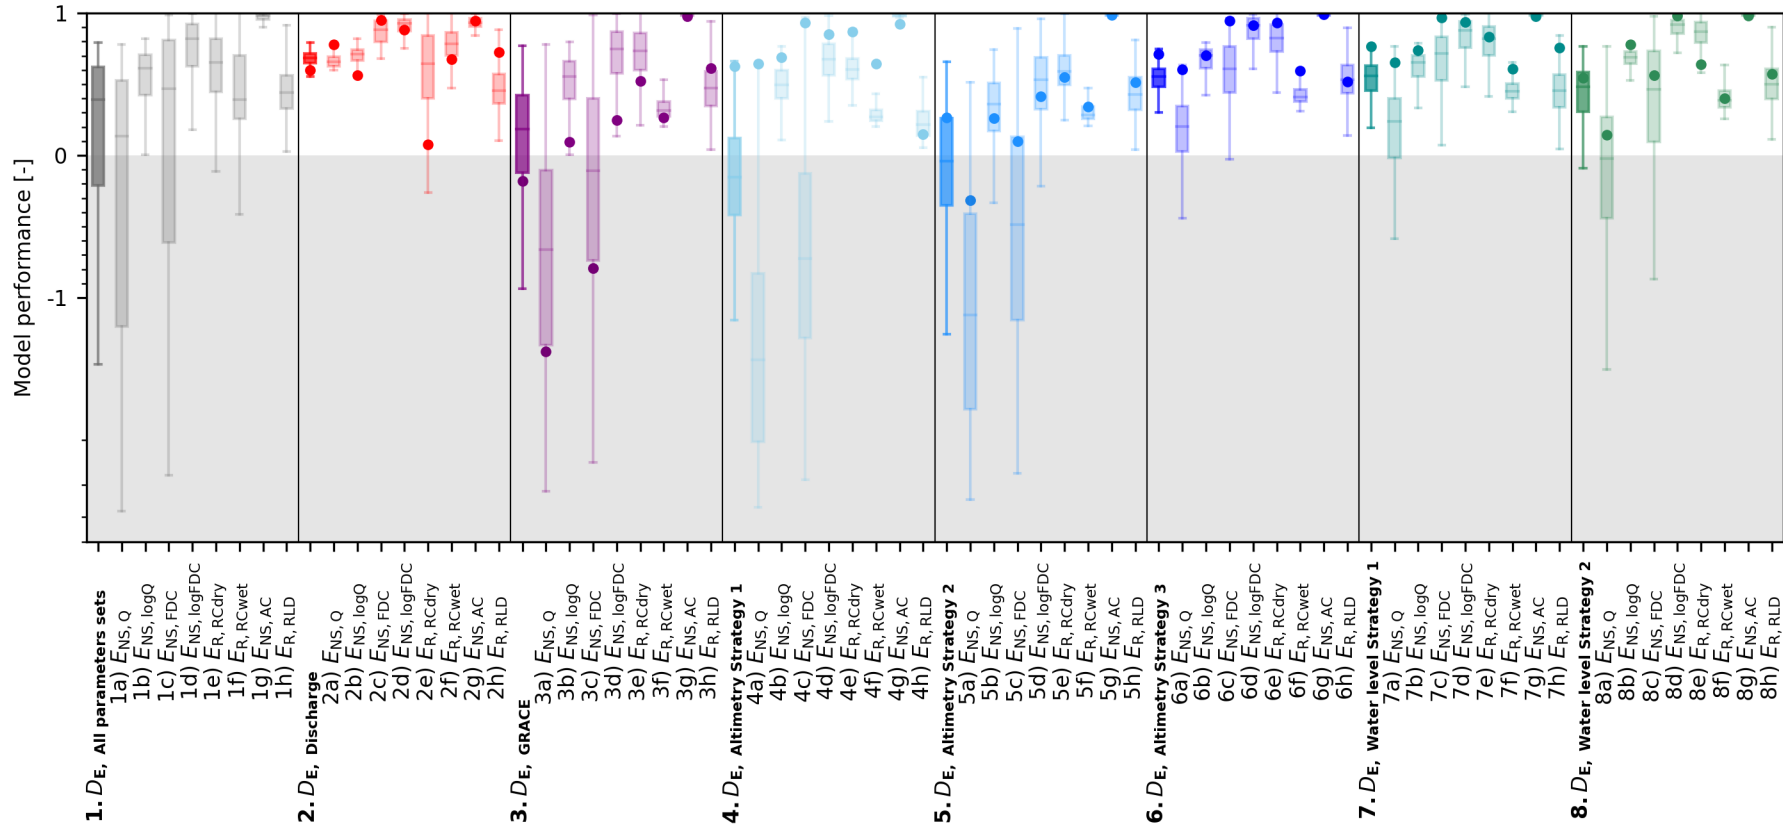


Figure 7: Comparison of different data sources to identify feasible parameter sets. Data sources applied: 1) All random parameters (no data), 2) Discharge, 3) GRACE, 4) Altimetry data combined with GRACE (Altimetry Strategy 1), 5) Altimetry data using the rating curves combined with GRACE (Altimetry Strategy 2), and 6) Altimetry data using the Strickler – Manning equation combined with GRACE (Altimetry Strategy 3), and 7) Daily river water level combined with GRACE using the Strickler – Manning equation and cross-section information retrieved from Google Earth (Water level Strategy 1), or 8) obtained from a detailed field survey with an Acoustic Doppler Current Profiler (ADCP, Water level Strategy 2). The boxplots visualise the spread in the overall model performance D_E with respect to discharge and the following individual signatures: a) daily discharge ($E_{NS,Q}$), b) its logarithm ($E_{NS,\log Q}$), c) flow duration curve ($E_{NS,FDC}$), d) its logarithm ($E_{NS,\log FDC}$), e) average runoff coefficient during the dry season ($E_{R,RCdry}$), f) average seasonal runoff coefficient during the wet season ($E_{R,RCwet}$), g) autocorrelation function ($E_{NS,AC}$), and h) rising limb density ($E_{R,RLD}$). The dots visualise the model performance when selecting the parameter set with the highest model efficiency according to each parameter identification strategy.

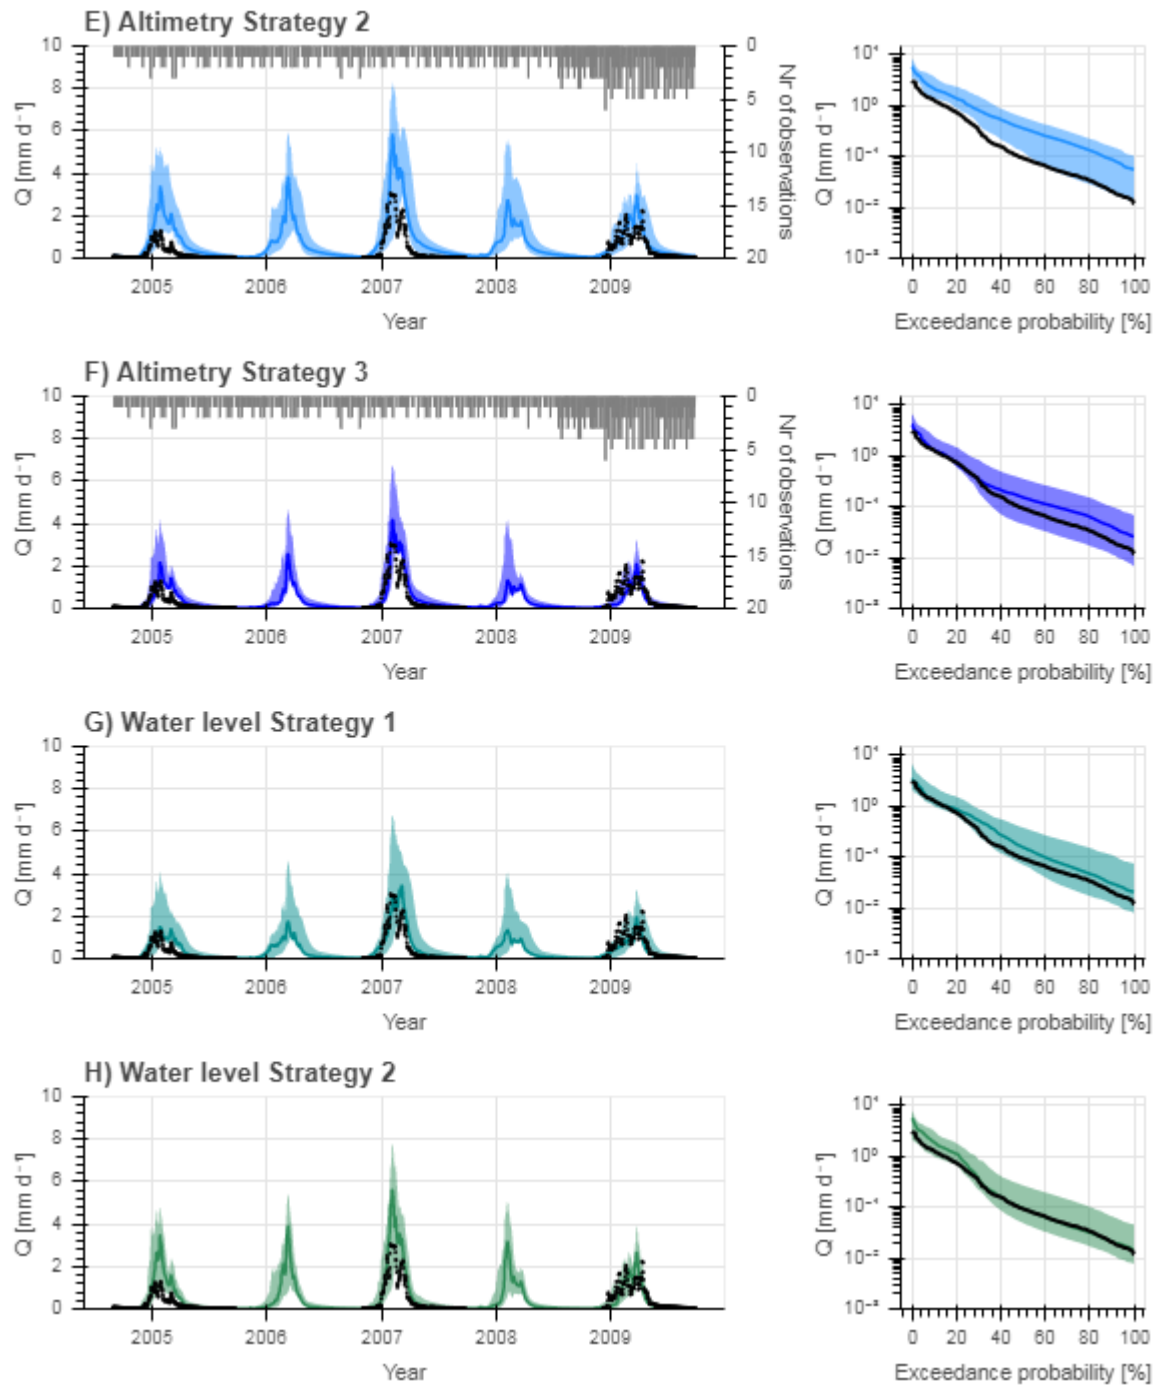


Figure 8: Range of model solutions. The left panel shows the hydrograph and the right panel the flow duration curve of the recorded (black) and modelled discharge: the line indicates the solution with the highest calibration objective function (E_{NS} or D_E) and the shaded area the envelope of the solutions retained as feasible. Solutions retained as feasible based on E) Altimetry Strategy 2 using rating curves for the discharge – water level conversion ($D_{E,NS,RC}$), F) Altimetry Strategy 3 using the Strickler-Manning equation for the discharge – water level conversion ($D_{E,NS,SM}$), and G) Daily in-situ water level using the Strickler Manning equation for the discharge – water level conversion with cross-section information retrieved from Google Earth (Water level strategy 1; $E_{NS,SM,GE}$) or H) obtained from a detailed field survey with an Acoustic Doppler Current Profiler (ADCP; Water level strategy 2; $E_{NS,SM,ADCP}$). The grey bars in the left subplots E and F indicate the number of altimetry observations available for each day.

4.1.1 Benchmark: Parameter selection and model performance based on observed discharge data

For the benchmark case, applying the traditional model calibration approach using discharge data, this parameter selection and calibration strategy results in a reasonable model performance, in which the seasonal but also the daily flow dynamics and magnitudes are in general well captured as shown in Figure 6B. For some years, a number of solutions overestimate flows in the wet season and underestimate flows during the dry season, when the river becomes a small meandering stream with almost annual morphological changes which is difficult to meaningfully observe. The best performing solution has a calibration objective function $E_{NS,Q,opt} = 0.78$ (5/95th percentiles of all feasible solutions $E_{NS,Q,5/95} = 0.61 - 0.75$; Figure 7 and Table 6). For the post-calibration evaluation of all retained solutions, it was observed that most signatures are well reproduced by the majority of solutions, except for the dry season runoff coefficient (RC_{dry} ; Figure 7 and Table S4). This resulted in aggregated model performances, combining all signatures, of $D_{E,5/95} = 0.55 - 0.76$ with the above identified best performing solution (i.e. $E_{NS,Q,opt}$) reaching a value of $D_{E,opt} = 0.60$.

Table 6: Summary of the model results: elimination of unfeasible parameter sets and detection of optimal parameter set according to each parameter identification strategy including the corresponding model performance range ($E_{NS,Q}$, D_E) indicating the model's skill to reproduce the discharge during the benchmark time period. For each strategy, the model efficiency for the optimal parameter set is summarised together with the corresponding performance metrics with respect to discharge ($E_{NS,Q,opt}$, $D_{E,opt}$); for all parameter sets retained as feasible, the maximum ($E_{NS,Q,max}$, $D_{E,max}$) and 5/95 percentiles ($E_{NS,Q,5/95}$, $D_{E,5/95}$) of all performance metrics with respect to discharge are summarised. Data sources used for the parameter set selection: 1) All parameter sets (no data), 2) Discharge, 3) GRACE, 4) Altimetry combined with GRACE (Altimetry Strategy 1), 5) Altimetry data using rating curves combined with GRACE (Altimetry Strategy 2), 6) Altimetry data using the Strickler – Manning equation combined with GRACE (Altimetry Strategy 3), and 7) Daily river water level combined with GRACE using the Strickler – Manning equation and cross-section information retrieved from Google Earth (Water level Strategy 1), or 8) obtained from a detailed field survey with an Acoustic Doppler Current Profiler (ADCP, Water level Strategy 2).

	Optimal parameter set		Feasible parameter sets	
	Model efficiency	$E_{NS,Q,opt}$ ($D_{E,opt}$)	$E_{NS,Q,max}$ ($E_{NS,Q,5/95}$)	$D_{E,max}$ ($D_{E,5/95}$)
1) All parameters sets	-	-	0.78 (-3.8 – 0.68)	0.79 (-1.4 – 0.71)
2) Discharge	$E_{NS,Q,opt} = 0.78$	0.78 (0.60)	0.78 (0.61 – 0.75)	0.79 (0.55 – 0.76)
3) Seasonal water storage (GRACE)	$E_{NS,Stot,opt} = 0.56$	-1.4 (-0.18)	0.78 (-2.3 – 0.38)	0.77 (-0.58 – 0.62)
4) Altimetry Strategy 1: Compare altimetry to discharge	$D_{E,R,WL,opt} = 0.76$	0.65 (0.63)	0.65 (-2.9 – 0.10)	0.66 (-0.83 – 0.50)
5) Altimetry Strategy 2: Rating curves	$D_{E,NS,RC,opt} = -0.50$	-0.31 (0.27)	0.51 (-2.6 – 0.25)	0.66 (-0.72 – 0.56)
6) Altimetry Strategy 3: Strickler-Manning equation	$D_{E,NS,SM,opt} = -1.4$	0.60 (0.71)	0.63 (-0.31 – 0.50)	0.75 (0.36 – 0.67)
7) Water level Strategy 1: satellite based cross-section	$E_{NS,SM,GE,opt} = -1.8$	0.65 (0.77)	0.77 (-0.48 – 0.60)	0.77 (0.28 – 0.70)
8) Water level Strategy 2: in-situ cross-section	$E_{NS,SM,ADCP,opt} = 0.79$	0.14 (0.55)	0.77 (-1.1 – 0.50)	0.77 (0.03 – 0.67)

4.1.2 Parameter selection and model performance based on the seasonal water storage (GRACE)

Starting from the set of all model realizations (Figures 6A and 7), and assuming no discharge observations are available, we then identified and discarded parameter sets as unfeasible when they did not meet the previously defined criteria to reproduce the seasonal water storage ($E_{NS,Stot}$; see Section 3.3.2). The range of random model realizations with respect to the total water storage is visualised in Figure 9. The sub-set of solutions retained as feasible resulted in a significant reduction in the uncertainty around the modelled variables, which is illustrated

by the narrower 5/95th percentiles of the solutions compared to the set of all realizations, as shown in Figure 6C. The feasible solutions with respect to the GRACE reached $E_{NS,Stot,opt} = 0.56$ ($E_{NS,Stot,5/95} = 0.45 - 0.52$) (Figure 7, Table 6). These parameter sets were then used to evaluate the model for the years 2004, 2006, 2008 used in the benchmark case. While the flow dynamics are captured relatively well, many of the retained solutions considerably overestimated flows across all seasons (Figure 6C) resulting in a decreased performance with respect to the individual flow signatures, only the dry runoff coefficient ($E_{R,RCdry}$) improved significantly compared to the benchmark as shown in Table S4 and Figure 7. The parameter set associated with the best performing model with respect to GRACE ($E_{NS,Stot,opt}$) resulted for the benchmark period in a $E_{NS,Q} = -1.4$ ($E_{NS,Q,5/95} = -2.3 - 0.38$) and the corresponding $D_{E,opt} = -0.18$ ($D_{E,5/95} = -0.58 - 0.62$) with respect to discharge (Figure 7, Table 6). As illustrated in Figure 7 and Figure 6C, many parameter sets that resulted in implausible representations of the seasonal signals were eliminated. However, as also indicated by the rather modest values of $E_{NS,Q}$ and D_E with respect to discharge, the data source used here obviously contained only limited information to avoid the over predictions of flow during all wet seasons. The sequence of applying first GRACE and then altimetry, or the reverse, did not affect the identification of feasible parameter sets when using altimetry data as shown in Figure S9; however, it did affect the selection of the “best” parameter set.

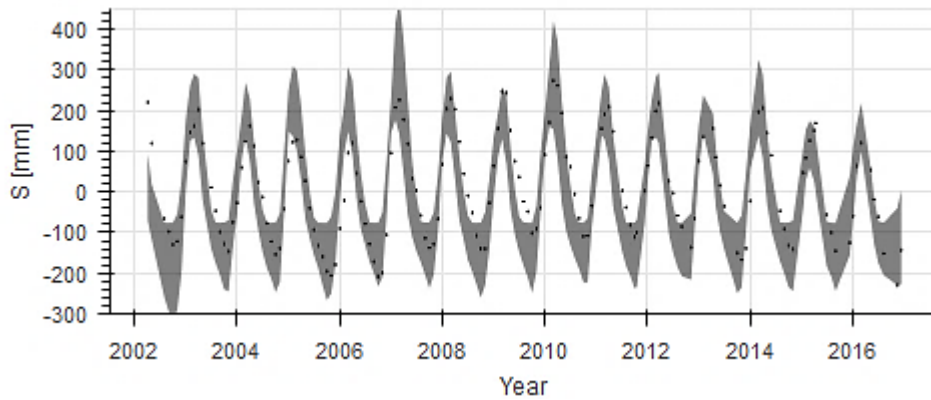


Figure 9: Range of random model realizations with respect to the total water storage (grey) including the observation according to GRACE (black)

4.1.3 Parameter selection and model performance based on satellite altimetry data

After having identified feasible parameter sets based on the seasonal water storage, additional unfeasible parameter sets were eliminated using altimetry data with three different strategies. In all three cases, the best 5% of all feasible parameter sets were selected; this resulted in 1% of all parameter sets.

Altimetry Strategy 1: Directly compare altimetry data to modelled discharge

The first approach, Altimetry Strategy 1, resulted in an overestimation of in particular intermediate and low flows as shown in Figure 6D. The feasible solutions reached an optimum of $D_{E,R,WL,opt} = 0.76$ ($D_{E,R,WL,5/95} = 0.74 - 0.75$) with respect to altimetry observations. Focusing on the model’s skill to reproduce the observed discharge using these feasible parameter sets for the benchmark period, the parameter set associated with the best performing model with respect to altimetry ($D_{E,R,WL,opt}$) resulted in a $E_{NS,Q} = 0.65$ ($E_{NS,Q,5/95} = -2.9 - 0.10$) and $D_E = 0.63$ ($D_{E,5/95} = -0.83 - 0.50$) with respect to discharge (Figure 7, Table 6). Hence, the parameter set with the highest model performance with respect to altimetry, did not perform best with respect to discharge as shown in

Table 6 and Figure S8. While the optimum model performance with respect to discharge was similar to the benchmark, the very wide range in the 5/95th percentiles of the solutions indicated that this strategy has only limited potential to identify implausible parameter sets. This was also the case with respect to the individual flow signatures as shown in Figure 7 and Table S4.

Altimetry Strategy 2: Rating curves

The second approach, Altimetry Strategy 2, also resulted in an overestimation of the flows (Figure 8E). The feasible solutions reached an optimum of $D_{E,NS,RC,opt} = -0.50$ ($D_{E,NS,RC,5/95} = -1.0 - -0.77$) with respect to altimetry observations. As example, Figure S6A visualises the simulated and observed river water level at Virtual Station 4 where the model significantly underestimated the stream levels. Focusing on the model's skill to reproduce the discharge using these parameter sets for the benchmark period, the parameter set associated with the best performing model with respect to altimetry ($D_{E,NS,RC,opt}$) resulted in $E_{NS,Q} = -0.31$ ($E_{NS,Q,5/95} = -2.6 - 0.25$) and $D_E = 0.27$ ($D_{E,5/95} = -0.72 - 0.56$) with respect to discharge (Figure 7, Table 6); hence similar to Altimetry Strategy 1, the best parameter set with respect to altimetry, did not perform best with respect to discharge (see Table 6 and Figure S8). The optimum model performance with respect to discharge was worse compared to the benchmark, and the wide range in the 5/95th percentiles of the solutions indicated this strategy poorly identified the feasible parameter sets. This was also the case with respect to the individual flow signatures as shown in Figure 7 and Table S4; only the dry runoff coefficient (E_{RCdry}) improved significantly compared to the benchmark.

Altimetry Strategy 3: Strickler-Manning equation

The third approach, Altimetry Strategy 3, resulted in improved flow predictions compared to the other two strategies using altimetry data (Figure 8F). Even though the feasible solutions exhibit a very poor ability to reproduce the altimetry data, with an optimum of $D_{E,NS,SM,opt} = -1.4$ ($D_{E,NS,SM,5/95} = -3.8 - -1.8$), the model's skill to reproduce the discharge for the benchmark period using these parameter sets, significantly increased compared to the two alternative strategies. As example, Figure S6B visualises the simulated and observed river water level at Virtual Station 4 where the model simulated the stream levels relatively well. The parameter set associated with the best performing model with respect to altimetry ($D_{E,NS,SM,opt}$) resulted in $E_{NS,Q} = 0.60$ ($E_{NS,Q,5/95} = -0.31 - 0.50$) and $D_E = 0.71$ ($D_{E,5/95} = 0.36 - 0.67$) with respect to discharge (Figure 7, Table 6). While the optimum model performance with respect to discharge was worse compared to the benchmark, the 5/95th percentiles of the solutions were significantly constrained by the removal of many implausible parameter sets; this was valid for the performance with respect to the individual flow signatures ($E_{NS,0}$ and $E_{R,0}$) and overall flow response (D_E) as shown in Figure 7 and Table S4. This indicated that, although the model performance with respect to altimetry observations was low, this strategy contains valuable information to considerably constrain the feasible solution space.

4.1.4 Parameter selection and model performance based on daily river water level at the basin outlet

Water level Strategy 1: River geometry information extracted from Google Earth

The parameter identification strategy “Water level Strategy 1”, using cross-section information extracted from Google Earth, resulted in a poor simulation of the river water level (Figure 10A) with an optimal objective function value with respect to river water levels of $E_{NS,SM,GE,opt} = -1.8$ ($E_{NS,SM,GE,5/95} = -6.8 - -3.1$). Focusing on the model’s skill to reproduce the discharge using these feasible parameter sets for the benchmark period, the parameter set associated with the best performing model with respect to river water levels ($E_{NS,SM,GE,opt}$) resulted in $E_{NS,Q,GE} = 0.65$ ($E_{NS,Q,5/95,GE} = -0.48 - 0.60$) and $D_{E,GE} = 0.77$ ($D_{E,GE,5/95} = 0.28 - 0.70$) with respect to discharge (Figure 7, Table 6); the model performance with respect to the remaining signatures as visualised in Figure 7 are tabulated in Table S4. As shown in Figure 8G, the discharge was overestimated in particular during intermediate and low flows.

Water level Strategy 2: River geometry information obtained from a detailed field survey

The parameter identification strategy “Water level Strategy 2”, using cross-section information obtained from a detailed field survey, resulted in improved river water level simulations (compare Figure 10A and B) with an optimal objective function value with respect to river water levels of $E_{NS,SM,ADCP,opt} = 0.79$ ($E_{NS,SM,ADCP,5/95} = 0.60 - 0.74$). The parameter set associated with the best performing model with respect to river water levels ($E_{NS,SM,ADCP,opt}$) resulted in $E_{NS,Q,ADCP} = 0.14$ ($E_{NS,Q,5/95,ADCP} = -1.1 - 0.50$) and in $D_{E,ADCP} = 0.55$ ($D_{E,ADCP,5/95} = 0.03 - 0.67$) with respect to discharge (Figure 7, Table 6); the model performance with respect to the remaining signatures as visualised in Figure 7 are tabulated in Table S4.

Compared to using river geometry information extracted from Google Earth (Water level Strategy 1), the overall model performance with respect to discharge did not increase since the parameter space was already restricted using GRACE data. However, the modelled flow duration curve during intermediate and low flows (compare Figure 8G with H) and rating curve (Figure 11) improved significantly when using more accurate geometry information obtained from a detailed field survey covering the cross-section that is submerged most of the year which is thus unlikely to be captured by satellite based observations. Note, that the in-situ cross-section information was limited to the submerged part during the time of measurement; the remaining part (water levels > 5 m) was extrapolated which is likely to explain the larger discrepancies during high flows visible in the flow duration curve (Figure 8H).

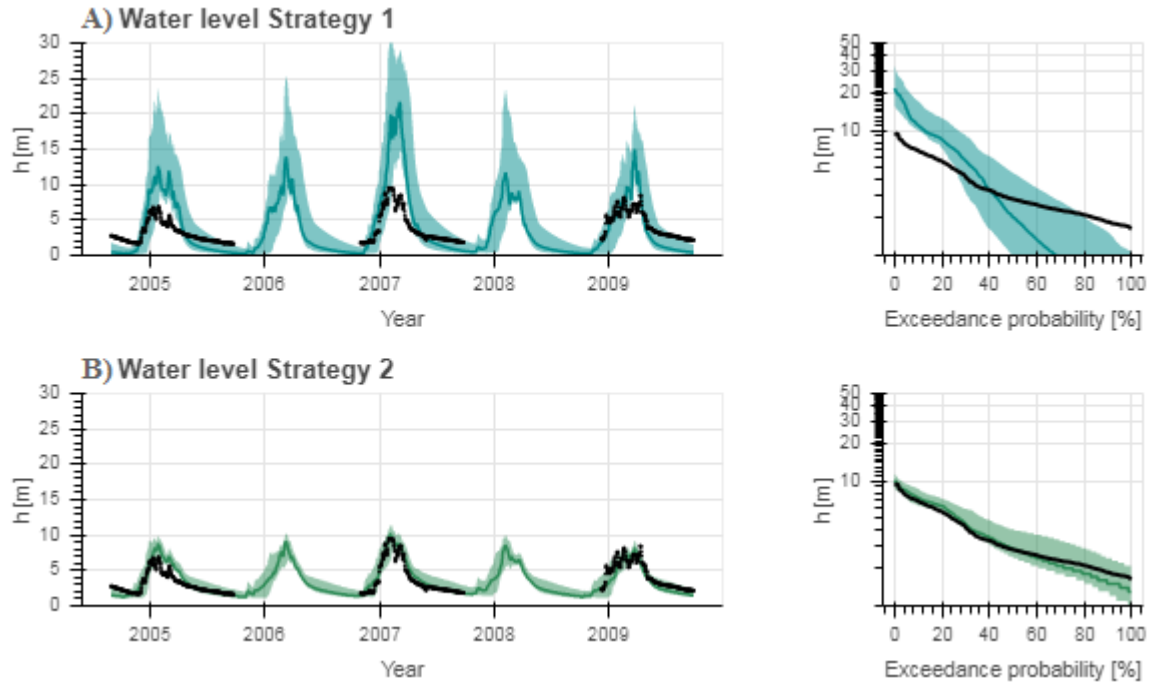


Figure 10: Range of model solutions. The left panel shows the hydrograph and the right panel the flow duration curve of the recorded (black) and modelled discharge: the line indicates the solution with the highest calibration objective function (E_{NS}) and the shaded area the envelope of the solutions retained as feasible. Solutions were retained as feasible based on daily water level time series at the basin outlet using the Strickler-Manning equation for the discharge – water level conversion; the cross-section was A) extracted from Google Earth (Water level Strategy 1), or B) obtained from a detailed field survey with an Acoustic Doppler Current Profiler (ADCP, Water level Strategy 2).

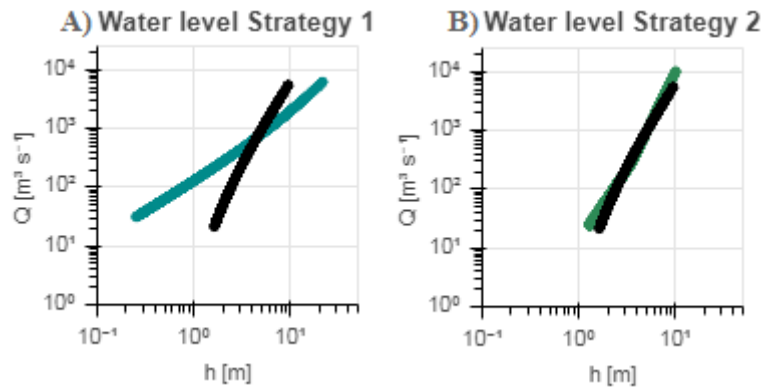


Figure 11: Discharge - water level graphs for the recorded (black) and modelled discharge and stream levels with the optimal model performance (E_{NS}) using the Strickler Manning equation for the discharge – stream level conversion with cross-section information A) extracted from Google Earth (Water level Strategy 1), or B) obtained from a detailed field survey with an Acoustic Doppler Current Profiler (ADCP, Water level Strategy 2).

4.2 Number of virtual stations used for model calibration and evaluation

In this study, altimetry data was available at 18 virtual stations. However, would the model performance change if more or less virtual stations were used? For this purpose, n random stations were selected for model calibration; the remaining stations were used for cross-validation (Klemeš, 1986; Gharari et al., 2013; Garavaglia et al., 2017). This was repeated to cover all combinations of n stations and for $n = 1, 2 \dots 17$. When applying Strategy 3 using altimetry data with the Strickler-Manning equation, this analysis revealed that when increasing the number of calibration stations, the model calibration performance $D_{E,NS,SM}$ gradually decreased, but the

ability to meaningfully reproduce the remaining observations which were not used for calibration increased significantly (Figure 12). Similar results were obtained for Strategies 1 and 2 (compare Figure 12 with Supplementary Figures S3 and S4). Also the model performance with respect to discharge increased when using more virtual stations with an optimum at 7 – 15 stations depending on the calibration strategy (Figure S5). This provides evidence that in spite of reduced calibration performance, the simultaneous use of multiple virtual stations can contribute towards more plausible selections of model parameter sets and thus increase the model realism.

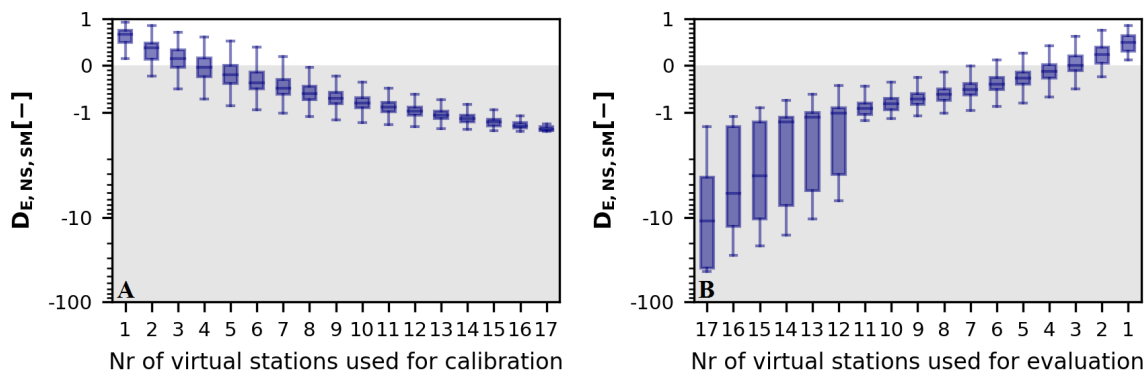


Figure 12: Influence of the number of virtual stations used for A) model calibration and B) evaluation on the model performance $D_{E,NS,SM}$ applying Altimetry Strategy 3.

4.3 Uncertainties and limitations

In the absence of discharge data for hydrological model calibration as commonly the case in poorly or ungauged regions, freely and globally available remotely sensed stream water levels could provide the opportunity to fill this gap as illustrated in this study, as well as in previous studies (e.g. Michailovsky and Bauer-Gottwein, 2014;Pereira-Cardenal et al., 2011;Sun et al., 2012). However, there are several limitations to the approach proposed in this study using altimetry for model calibration.

First, river altimetry data are prone to large uncertainties which increase for smaller river widths (Sulistioadi et al., 2015;Biancamaria et al., 2017). Unfortunately, this uncertainty could not be estimated for the virtual stations used in this study due to data limitations. However, in previous studies in the Zambezi Basin, the RMSE relative to in-situ stream levels ranged between 0.32 m and 0.72 m using Envisat (Michailovsky et al., 2012) .

Second, large uncertainties in the forcing data (precipitation and temperature) with respect to the spatial-temporal variations should not be ignored. This could compromise comparison results between modelled river water levels and altimetry within the basin since it has a low temporal resolution (10 or 35 days). Also, bias in the precipitation data affects storage calculations and hence also the identification of feasible parameter sets based on GRACE (Le Coz and van de Giesen, 2019); this could explain why the flows were frequently overestimated when using GRACE only. In addition, precipitation bias could be compensated through calibration parameters introduced for the discharge – water level conversion; therefore, such parameters should be constrained as much as possible. There are also data uncertainties in the cross-sections and river gradients extracted from high-resolution terrain data available on Google Earth due to its limited spatial resolution, but more importantly since no information is available below the water surface.

Further, GRACE observations are prone to uncertainties as a result of data (post-) processing including for example data smoothening (Landerer and Swenson, 2012;Blazquez et al., 2018). In addition, open water bodies or wetlands could affect GRACE observations if they are located in or near the basin, for example within a radius of about 300 km which is the distance often used for data smoothening. In this study, several open water bodies or wetlands were located ≤ 300 km of the Luangwa basin such as Lake Malawi, Kafue Flats, Cahora Bassa reservoir, Kariba reservoir, Bangweulu and Tanganyika. These open water bodies and wetlands had a limited impact on the GRACE observations due to limited fluctuations or different temporal variation as illustrated in Figure 13 for the Cahora Bassa reservoir.

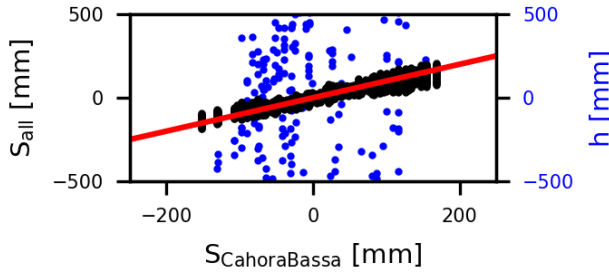


Figure 13: Temporal correlation of the GRACE observations for the cell in which the virtual station for Cahora Bassa is located (horizontal axis) and for A) all cells within an area surrounding the virtual station with a radius of 3 degree (GRACE area of influence, vertical axis, black), and B) the altimetry observation at Cahora Bassa (vertical axis, blue). The 1:1 line is visualised in red. The relatively strong temporal correlation between the GRACE cells could be a result of the strong seasonality in this area.

Uncertainties were not only introduced by the data, but also as a result of assumptions and simplifications. First, the reference level h_0 was assumed to be equal to the lowest river water level observed to limit the number of calibration parameters (Altimetry Strategy 2 and 3, Water level Strategy 1 and 2). Second, the roughness was assumed to be constant over the entire cross-section and for all virtual stations throughout the basin which affects the discharge - water level conversion and therefore also the model efficiency (Altimetry Strategy 3). Third, all 18 virtual stations were grouped based on their cross-section similarity to limit the number of calibration parameters (Altimetry Strategy 2), but differences within each group remain. Fourth, the assumption of a constant flow velocity in space and time affects the timing of the flow influencing the comparison between model results and altimetry observations (all strategies).

Another limitation is the missing flow volume information when directly using (satellite based) river water levels for model calibration, using the Spearman Rank Correlations as model performance metric (Altimetry Strategy 1; Seibert and Vis, 2016). This resulted here in an overestimation of intermediate and low flows due to the non-linear relation between stream levels and flows. In contrast, when converting the discharge to stream water levels, flow volume information was included at the cost of introducing additional calibration parameters (Altimetry Strategy 2 and 3), thereby increasing the degrees-of-freedom and thus the potential for parameter equifinality in the model (Beven, 2006;Sikorska and Renard, 2017;Sun et al., 2012).

Furthermore, it was assumed the Nash-Sutcliffe efficiency contained sufficient valuable information to describe the model performance with respect various flow signatures, river water level and total water storage. Additional study is recommended to confirm this assumption and to assess which performance metric would be most suitable.

4.4 Comparison with previous studies

Previous studies have successfully used river altimetry data to calibrate and evaluate rainfall-runoff models using a few virtual stations (Sun et al., 2012;Getirana, 2010;Getirana et al., 2010;Liu et al., 2015). In these studies, the modelled discharge was converted to stream levels by means of a hydraulic model or empirical relations. Our results support several previous findings and added a number of new ones.

Similar to previous studies, the rainfall-runoff model reproduced river flow relatively well when calibrating on remotely sensed stream water levels preferably at several virtual stations simultaneously, but discharge based calibration results performed significantly better (Getirana, 2010). Thus, while river altimetry data cannot fully substitute discharge observations, they at least provide an alternative data source that holds some informative value where no reliable discharge data are available. In addition, our results suggest that in spite of the typically limited temporal resolution of altimetry observations, these data, when using multiple virtual stations simultaneously, provide enough information to select meaningful model parameter sets (Seibert and Beven, 2009;Getirana, 2010).

In contrast to previous studies, altimetry data originated from five different satellite missions rather than a single one. As a result, altimetry data was available at 18 locations for the time period 2002 to 2016. This gave the opportunity to analyse the effect of combining different numbers of stations for calibration and evaluation. This study illustrated that better predictions can be achieved when using more virtual stations for calibration. Furthermore, this study demonstrated that in particular the combination of altimetry with information on river geometry (cross section, gradient) proved beneficial for the selection of feasible parameter sets within relatively narrow bounds comparable to the benchmark using discharge. When using more accurate cross-section information obtained from a detailed field survey rather than Google Earth based estimates, improved the water level simulations, modelled rating curve and discharge simulations during intermediate and low flows significantly for which on-site cross-section data was available. That is why it is recommended to acquire accurate cross-section information on locations concurring with altimetry overpasses (not done in this study).

4.5 Opportunities for future studies

For future studies, it would be very interesting to combine altimetry observations with river width estimates derived from Landsat or Sentinel-1/2 (Huang et al., 2018). Alternatively, the altimetry observations used here could be combined with CryoSat based altimetry observations which provide water level information at lower temporal resolution (every 369 days), but higher spatial resolution (equatorial inter-track distance of 7.5 km) providing valuable information to estimate the river slope (Schneider et al., 2017;Jiang et al., 2017). In addition, with the upcoming SWOT (Surface Water Ocean Topography) mission, more accurate altimetry observations should be available as well as river slope observations and width; the repeat cycle will be 21 days and across-track resolution between 10 m and 60 m increasing the number of observation points available within a specific area (Biancamaria et al., 2016;Langhorst et al., 2019;Oubanas et al., 2018). Also, it would be very useful to improve cross-section estimates with respect to the submerged part as already explored in previous studies (Domeneghetti, 2016). Furthermore, drone observations could be used to obtain more accurate cross-section information and estimates of the river slope and roughness (Entwistle and Heritage, 2019). Also, it would be interesting to assess and separate uncertainties related to the discharge – water level conversion from the hydrological model in a more data rich region.

5 Summary and conclusion

This study investigated the potential value of river altimetry observations from multiple satellite missions to identify feasible parameters for a hydrological model of the semi-arid and poorly gauged Luangwa River Basin. A distributed process-based rainfall-runoff model with sub-grid process heterogeneity was developed on a daily timescale for the time period 2002 to 2016. Various parameter identification strategies were implemented step-wise to assess the potential of satellite altimetry data for model calibration. As benchmark, when identifying parameter sets with the traditional model calibration strategy using discharge data, the model was able to simulate the flows relatively well ($E_{NS,Q} = 0.78$, $E_{NS,Q,5/95} = 0.61 - 0.75$). When assuming no discharge observations are available, the feasible parameter sets were restricted with GRACE data only resulting in an optimum of $E_{NS,Q} = -1.4$ ($E_{NS,Q,5/95} = -2.3 - 0.38$) with respect to discharge. Combining GRACE with altimetry data only from 18 virtual stations focusing on the water level dynamics resulted in frequently overestimated flows and poorly identified feasible parameter sets (Altimetry Strategy 1, $E_{NS,Q,5/95} = -2.9 - 0.10$). This was also the case when converting modelled discharge to water levels using rating curves (Altimetry Strategy 2, $E_{NS,Q,5/95} = -2.6 - 0.25$). The identification of the feasible parameter sets improved when including river geometry information, more specifically cross-section and river gradient extracted from Google Earth, in the discharge-water level conversion using the Strickler-Manning equation (Altimetry Strategy 3, $E_{NS,Q} = 0.60$, $E_{NS,Q,5/95} = -0.31 - 0.50$). Moreover, it was shown that more accurate cross-section data improved the water level simulations, modelled rating curve and discharge simulations during intermediate and low flows for which on-site cross-section information was available; the Nash-Sutcliffe efficiency with respect to river water levels increased from $E_{NS,SM,GE} = -1.8$ ($E_{NS,SM,GE,5/95} = -6.8 - -3.1$) using river geometry information extracted from Google Earth (Water level Strategy 1) to $E_{NS,SM,ADCP} = 0.79$ ($E_{NS,SM,ADCP,5/95} = 0.6 - 0.74$) using river geometry information obtained from a detailed field survey (Water level Strategy 2). The model performance also improved when increasing the number of virtual stations used for parameter selection. Therefore, in the absence of reliable discharge data as commonly the case in poorly or ungauged basins, altimetry data from multiple virtual stations combined with GRACE observations have the potential to fill this gap if combined with river geometry estimates.

Acknowledgement

This research is supported by the TU Delft | Global Initiative, a program of the Delft University of Technology to boost Science and Technology for Global Development. This study would not have been possible without the help of those who provided us with the data. Local hydro-meteorological data was provided by WARMA (Water Resources Management Authority in Zambia), ZMD (Zambia Meteorological Department), GRDC (Global Runoff Data Centre) and NOAA (National Oceanic and Atmospheric Administration). Remotely sensed river water levels were obtained from DAHITI, HydroSat, EARPS and LEGOS.

Literature

Abas, I.: Remote river rating in Zambia: A case study in the Luangwa river basin, Master of Science, Civil Engineering and Geosciences, Delft University of Technology, 2018.

Ajami, N. K., Gupta, H., Wagener, T., and Sorooshian, S.: Calibration of a semi-distributed hydrologic model for streamflow estimation along a river system, *Journal of Hydrology*, 298, 112-135, 10.1016/j.jhydrol.2004.03.033, 2004 Cited By :128
Export Date: 15 March 2017.

760 Bauer-Gottwein, P., Jensen, I. H., Guzinski, R., Bredtoft, G. K. T., Hansen, S., and Michailovsky, C. I.: Operational river discharge forecasting in poorly gauged basins: The Kavango River basin case study, *Hydrology and Earth System Sciences*, 19, 1469-1485, 10.5194/hess-19-1469-2015, 2015 Cited By :6
Export Date: 17 June 2019.

765 Beilfuss, R., and dos Santos, D.: Patterns of Hydrological Change in the Zambezi Delta, Mozambique, in: Working Paper #2 Program for the Sustainable Management of Cahora Bassa Dam and the Lower Zambezi Valley, International Crane Foundation, Sofala, Mozambique, 2001.

Beven, K.: A manifesto for the equifinality thesis, *Journal of Hydrology*, 320, 18-36, <https://doi.org/10.1016/j.jhydrol.2005.07.007>, 2006

770 Beven, K.: On doing better hydrological science, *Hydrological Processes*, 22, 3549-3553, 10.1002/hyp.7108, 2008

Beven, K., and Westerberg, I.: On red herrings and real herrings: disinformation and information in hydrological inference, *Hydrological Processes*, 25, 1676-1680, 10.1002/hyp.7963, 2011

Beven, K. J.: Preferential flows and travel time distributions: defining adequate hypothesis tests for hydrological process models, *Hydrological Processes*, 24, 1537-1547, 10.1002/hyp.7718, 2010

775 Biancamaria, S., Lettenmaier, D. P., and Pavelsky, T. M.: The SWOT Mission and Its Capabilities for Land Hydrology, *Surveys in Geophysics*, 37, 307-337, 10.1007/s10712-015-9346-y, 2016

Biancamaria, S., Frappart, F., Leleu, A. S., Marieu, V., Blumstein, D., Desjonquères, J.-D., Boy, F., Sottolichio, A., and Valle-Levinson, A.: Satellite radar altimetry water elevations performance over a 200m wide river: Evaluation over the Garonne River, *Advances in Space Research*, 59, 128-146, <https://doi.org/10.1016/j.asr.2016.10.008>, 2017
780

Birkett, C. M.: Contribution of the TOPEX NASA Radar Altimeter to the global monitoring of large rivers and wetlands, *Water Resources Research*, 34, 1223-1239, 10.1029/98WR00124, 1998

785 Blazquez, A., Meyssignac, B., Lemoine, J. M., Berthier, E., Ribes, A., and Cazenave, A.: Exploring the uncertainty in GRACE estimates of the mass redistributions at the Earth surface: implications for the global water and sea level budgets, *Geophysical Journal International*, 215, 415-430, 10.1093/gji/ggy293, 2018

Calmant, S., Seyler, F., and Cretaux, J.: Monitoring Continental Surface Waters by Satellite Altimetry, 247-269 pp., 2009.

790 Clark, M. P., Nijssen, B., Lundquist, J. D., Kavetski, D., Rupp, D. E., Woods, R. A., Freer, J. E., Gutmann, E. D., Wood, A. W., Gochis, D. J., Rasmussen, R. M., Tarboton, D. G., Mahat, V., Flerchinger, G. N., and Marks, D. G.: A unified approach for process-based hydrologic modeling: 2. Model implementation and case studies, *Water Resources Research*, 51, 2515-2542, 10.1002/2015WR017200, 2015

Clark, M. P., Schaefli, B., Schymanski, S. J., Samaniego, L., Luce, C. H., Jackson, B. M., Freer, J. E., Arnold, J. R., Moore, R. D., Istanbuluoglu, E., and Ceola, S.: Improving the theoretical underpinnings of process-based hydrologic models, *Water Resources Research*, 52, 2350-2365, 10.1002/2015WR017910, 2016 Cited By :5
795 Export Date: 15 March 2017.

AVISO+ Satellite Altimetry Data: www.aviso.altimetry.fr, last access: Jan 2018, Accessed 2018.

Danielson, J. J., and Gesch, D. B.: Global multi-resolution terrain elevation data 2010 (GMTED2010), Report 2011-1073, 2011.

800 de Oliveira Campos, I., Mercier, F., Maheu, C., Cochonneau, G., Kosuth, P., Blitzkow, D., and Cazenave, A.:
Temporal variations of river basin waters from Topex/Poseidon satellite altimetry. Application to the Amazon
basin, *Comptes Rendus de l'Académie des Sciences - Series IIA - Earth and Planetary Science*, 333, 633-643,
[http://dx.doi.org/10.1016/S1251-8050\(01\)01688-3](http://dx.doi.org/10.1016/S1251-8050(01)01688-3), 2001

805 Dembélé, M., Hrachowitz, M., Savenije, H. H., Mariéthoz, G., and Schaefli, B.: Improving the predictive skill of
a distributed hydrological model by calibration on spatial patterns with multiple satellite datasets, *Water
Resources Research*, 56, 2020 (accepted).

Demirel, M., Mai, J., Mendiguren González, G., Koch, J., Samaniego, L., and Stisen, S.: Combining satellite
data and appropriate objective functions for improved spatial pattern performance of a distributed hydrologic
model, 2018.

810 Domeneghetti, A.: On the use of SRTM and altimetry data for flood modeling in data-sparse regions, *Water
Resources Research*, 52, 2901-2918, 10.1002/2015WR017967, 2016

Drusch, M., Del Bello, U., Carlier, S., Colin, O., Fernandez, V., Gascon, F., Hoersch, B., Isola, C., Laberinti, P.,
Martimort, P., Meygret, A., Spoto, F., Sy, O., Marchese, F., and Bargellini, P.: Sentinel-2: ESA's Optical High-
Resolution Mission for GMES Operational Services, *Remote Sensing of Environment*, 120, 25-36,
<https://doi.org/10.1016/j.rse.2011.11.026>, 2012

815 Entwistle, N. S., and Heritage, G. L.: Small unmanned aerial model accuracy for photogrammetrical fluvial
bathymetric survey, *Journal of Applied Remote Sensing*, 13, 1-19, 19, 2019

Satellite Missions Database: <https://directory.eoportal.org/web/eoportal/satellite-missions>, last access: Jan 2018,
2018.

820 Euser, T., Winsemius, H. C., Hrachowitz, M., Fenicia, F., Uhlenbrook, S., and Savenije, H. H. G.: A framework
to assess the realism of model structures using hydrological signatures, *Hydrology and Earth System Sciences*,
17, 1893-1912, 10.5194/hess-17-1893-2013, 2013 Cited By :44
Export Date: 31 May 2017.

Euser, T., Hrachowitz, M., Winsemius, H. C., and Savenije, H. H. G.: The effect of forcing and landscape
distribution on performance and consistency of model structures, *Hydrological Processes*, 29, 3727-3743,
825 10.1002/hyp.10445, 2015

Fang, K., Shen, C., Fisher, J. B., and Niu, J.: Improving Budyko curve-based estimates of long-term water
partitioning using hydrologic signatures from GRACE, *Water Resources Research*, 52, 5537-5554,
10.1002/2016WR018748, 2016

830 Fleischmann, A., Siqueira, V., Paris, A., Collischonn, W., Paiva, R., Pontes, P., Crétaux, J. F., Bergé-Nguyen,
M., Biancamaria, S., Gosset, M., Calmant, S., and Tanimoun, B.: Modelling hydrologic and hydrodynamic
processes in basins with large semi-arid wetlands, *Journal of Hydrology*, 561, 943-959,
10.1016/j.jhydrol.2018.04.041, 2018 Cited By :4
Export Date: 20 May 2019.

835 Forootan, E., Khaki, M., Schumacher, M., Wulfmeyer, V., Mehrnegar, N., van Dijk, A. I. J. M., Brocca, L.,
Farzaneh, S., Akinluyi, F., Ramillien, G., Shum, C. K., Awange, J., and Mostafaie, A.: Understanding the global
hydrological droughts of 2003–2016 and their relationships with teleconnections, *Science of the Total
Environment*, 650, 2587-2604, 10.1016/j.scitotenv.2018.09.231, 2019 Cited By :1
Export Date: 26 April 2019.

840 Fovet, O., Ruiz, L., Hrachowitz, M., Faucheux, M., and Gascuel-Oudou, C.: Hydrological hysteresis and its
value for assessing process consistency in catchment conceptual models, *Hydrology and Earth System Sciences*,
19, 105-123, 10.5194/hess-19-105-2015, 2015 Cited By :29
Export Date: 13 June 2019.

845 Frappart, F., Papa, F., Marieu, V., Malbeteau, Y., Jordy, F., Calmant, S., Durand, F., and Bala, S.: Preliminary
Assessment of SARAL/AltiKa Observations over the Ganges-Brahmaputra and Irrawaddy Rivers, *Marine
Geodesy*, 38, 568-580, 10.1080/01490419.2014.990591, 2015

- Freer, J., Beven, K., and Ambrose, B.: Bayesian Estimation of Uncertainty in Runoff Prediction and the Value of Data: An Application of the GLUE Approach, *Water Resources Research*, 32, 2161-2173, 10.1029/95WR03723, 1996
- 850 Funk, C. C., Peterson, P. J., Landsfeld, M. F., Pedreros, D. H., Verdin, J. P., Rowland, J. D., Romero, B. E., Husak, G. J., Michaelsen, J. C., and Verdin, A. P.: A quasi-global precipitation time series for drought monitoring: U.S. Geological Survey, Data Series 832, 4, <ftp://chg-ftpout.geog.ucsb.edu/pub/org/chg/products/CHIRPS-2.0/docs/USGS-DS832.CHIRPS.pdf>, 2014
- 855 Gao, H., Hrachowitz, M., Fenicia, F., Gharari, S., and Savenije, H. H. G.: Testing the realism of a topography-driven model (FLEX-Topo) in the nested catchments of the Upper Heihe, China, *Hydrol. Earth Syst. Sci.*, 18, 1895-1915, 10.5194/hess-18-1895-2014, 2014 HESS.
- Gao, H., Hrachowitz, M., Sriwongsitanon, N., Fenicia, F., Gharari, S., and Savenije, H. H. G.: Accounting for the influence of vegetation and landscape improves model transferability in a tropical savannah region, *Water Resources Research*, 52, 7999-8022, 10.1002/2016WR019574, 2016 Cited By :1
Export Date: 15 March 2017.
- 860 Garambois, P.-A., Calmant, S., Roux, H., Paris, A., Monnier, J., Finaud-Guyot, P., Samine Montazem, A., and Santos da Silva, J.: Hydraulic visibility: Using satellite altimetry to parameterize a hydraulic model of an ungauged reach of a braided river, *Hydrological Processes*, 31, 756-767, 10.1002/hyp.11033, 2017
- 865 Garavaglia, F., Le Lay, M., Gottardi, F., Garçon, R., Gailhard, J., Paquet, E., and Mathevet, T.: Impact of model structure on flow simulation and hydrological realism: from a lumped to a semi-distributed approach, *Hydrol. Earth Syst. Sci.*, 21, 3937-3952, 10.5194/hess-21-3937-2017, 2017 HESS
<https://www.hydrol-earth-syst-sci.net/21/3937/2017/hess-21-3937-2017.pdf>.
- Getirana, A. C. V., Bonnet, M.-P., Calmant, S., Roux, E., Rotunno Filho, O. C., and Mansur, W. J.: Hydrological monitoring of poorly gauged basins based on rainfall-runoff modeling and spatial altimetry, *Journal of Hydrology*, 379, 205-219, <http://dx.doi.org/10.1016/j.jhydrol.2009.09.049>, 2009
- 870 Getirana, A. C. V.: Integrating spatial altimetry data into the automatic calibration of hydrological models, *Journal of Hydrology*, 387, 244-255, <http://dx.doi.org/10.1016/j.jhydrol.2010.04.013>, 2010
- Getirana, A. C. V., Bonnet, M. P., Rotunno Filho, O. C., Collischonn, W., Guyot, J. L., Seyler, F., and Mansur, W. J.: Hydrological modelling and water balance of the Negro River basin: evaluation based on in situ and spatial altimetry data, *Hydrological Processes*, 24, 3219-3236, 10.1002/hyp.7747, 2010
- 875 Getirana, A. C. V., and Peters-Lidard, C.: Estimating water discharge from large radar altimetry datasets, *Hydrol. Earth Syst. Sci.*, 17, 923-933, 10.5194/hess-17-923-2013, 2013 HESS
<http://www.hydrol-earth-syst-sci.net/17/923/2013/hess-17-923-2013.pdf>.
- 880 Gharari, S., Hrachowitz, M., Fenicia, F., and Savenije, H. H. G.: Hydrological landscape classification: investigating the performance of HAND based landscape classifications in a central European meso-scale catchment, *Hydrol. Earth Syst. Sci.*, 15, 3275-3291, 2011
- Gharari, S., Hrachowitz, M., Fenicia, F., and Savenije, H. H. G.: An approach to identify time consistent model parameters: sub-period calibration, *Hydrol. Earth Syst. Sci.*, 17, 149-161, 10.5194/hess-17-149-2013, 2013 HESS
<https://www.hydrol-earth-syst-sci.net/17/149/2013/hess-17-149-2013.pdf>.
- 885 Gharari, S., Hrachowitz, M., Fenicia, F., Gao, H., and Savenije, H. H. G.: Using expert knowledge to increase realism in environmental system models can dramatically reduce the need for calibration, *Hydrol. Earth Syst. Sci.*, 18, 4839-4859, 10.5194/hess-18-4839-2014, 2014 HESS.
- 890 Gichamo, T. Z., Popescu, I., Jonoski, A., and Solomatine, D.: River cross-section extraction from the ASTER global DEM for flood modeling, *Environmental Modelling & Software*, 31, 37-46, <https://doi.org/10.1016/j.envsoft.2011.12.003>, 2012
- GlobCover, 2009

Google Earth, 2018

Gupta, H. V., Wagener, T., and Liu, Y.: Reconciling theory with observations: elements of a diagnostic approach to model evaluation, *Hydrological Processes*, 22, 3802-3813, 10.1002/hyp.6989, 2008

895 Floods displace thousands in Mozambique:
<https://www.theguardian.com/world/2001/mar/28/mozambique.unitednations>, last access: Jan 2017, 2001.

Hargreaves, G. H., and Samani, Z. A.: Reference Crop Evapotranspiration from Temperature, *Applied Engineering in Agriculture*, 1, 96-99, <https://doi.org/10.13031/2013.26773>, 1985

900 Hargreaves, G. H., and Allen, R. G.: History and evaluation of hargreaves evapotranspiration equation, *Journal of Irrigation and Drainage Engineering*, 129, 53-63, 10.1061/(ASCE)0733-9437(2003)129:1(53), 2003 Cited By :435
Export Date: 13 June 2019.

905 Hasan, M. A., and Pradhanang, S. M.: Estimation of flow regime for a spatially varied Himalayan watershed using improved multi-site calibration of the Soil and Water Assessment Tool (SWAT) model, *Environmental Earth Sciences*, 76, 787, 10.1007/s12665-017-7134-3, 2017

910 Hrachowitz, M., Savenije, H. H. G., Blöschl, G., McDonnell, J. J., Sivapalan, M., Pomeroy, J. W., Arheimer, B., Blume, T., Clark, M. P., Ehret, U., Fenicia, F., Freer, J. E., Gelfan, A., Gupta, H. V., Hughes, D. A., Hut, R. W., Montanari, A., Pande, S., Tetzlaff, D., Troch, P. A., Uhlenbrook, S., Wagener, T., Winsemius, H. C., Woods, R. A., Zehe, E., and Cudennec, C.: A decade of Predictions in Ungauged Basins (PUB)—a review, *Hydrological Sciences Journal*, 58, 1198-1255, 10.1080/02626667.2013.803183, 2013

Hrachowitz, M., Fovet, O., Ruiz, L., Euser, T., Gharari, S., Nijzink, R., Freer, J., Savenije, H. H. G., and Gascuel-Oudou, C.: Process consistency in models: The importance of system signatures, expert knowledge, and process complexity, *Water Resources Research*, 50, 7445-7469, 10.1002/2014WR015484, 2014 Cited By :38
Export Date: 15 March 2017.

915 Hrachowitz, M., and Clark, M. P.: HESS Opinions: The complementary merits of competing modelling philosophies in hydrology, *Hydrol. Earth Syst. Sci.*, 21, 3953-3973, 10.5194/hess-21-3953-2017, 2017 HESS
<https://www.hydrol-earth-syst-sci.net/21/3953/2017/hess-21-3953-2017.pdf>.

920 Huang, Q., Long, D., Du, M., Zeng, C., Qiao, G., Li, X., Hou, A., and Hong, Y.: Discharge estimation in high-mountain regions with improved methods using multisource remote sensing: A case study of the Upper Brahmaputra River, *Remote Sensing of Environment*, 219, 115-134, <https://doi.org/10.1016/j.rse.2018.10.008>, 2018

925 Hulsman, P., Bogaard, T. A., and Savenije, H. H. G.: Rainfall-runoff modelling using river-stage time series in the absence of reliable discharge information: a case study in the semi-arid Mara River basin, *Hydrol. Earth Syst. Sci.*, 22, 5081-5095, 10.5194/hess-22-5081-2018, 2018 HESS
<https://www.hydrol-earth-syst-sci.net/22/5081/2018/hess-22-5081-2018.pdf>.

Irons, J. R., Dwyer, J. L., and Barsi, J. A.: The next Landsat satellite: The Landsat Data Continuity Mission, *Remote Sensing of Environment*, 122, 11-21, <https://doi.org/10.1016/j.rse.2011.08.026>, 2012

Jakeman, A. J., and Hornberger, G. M.: How much complexity is warranted in a rainfall-runoff model?, *Water Resources Research*, 29, 2637-2649, 10.1029/93WR00877, 1993

930 Jian, J., Ryu, D., Costelloe, J. F., and Su, C.-H.: Towards hydrological model calibration using river level measurements, *Journal of Hydrology: Regional Studies*, 10, 95-109, <https://doi.org/10.1016/j.ejrh.2016.12.085>, 2017

Jiang, L., Schneider, R., Andersen, O. B., and Bauer-Gottwein, P.: CryoSat-2 altimetry applications over rivers and lakes, *Water (Switzerland)*, 9, 10.3390/w9030211, 2017 Export Date: 1 May 2017.

- 935 Khaki, M., and Awange, J.: The application of multi-mission satellite data assimilation for studying water storage changes over South America, *Science of the Total Environment*, 647, 1557-1572, 10.1016/j.scitotenv.2018.08.079, 2019 Cited By :2
Export Date: 26 April 2019.
- 940 Klemeš, V.: Operational testing of hydrological simulation models, *Hydrological Sciences Journal*, 31, 13-24, 10.1080/0262668609491024, 1986 Cited By :550
Export Date: 24 July 2018.
- Knutti, R.: Should we believe model predictions of future climate change?, *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 366, 4647-4664, 10.1098/rsta.2008.0169, 2008 Cited By :140
945 Export Date: 25 March 2019.
- Kouraev, A. V., Zakharova, E. A., Samain, O., Mognard, N. M., and Cazenave, A.: Ob' river discharge from TOPEX/Poseidon satellite altimetry (1992-2002), *Remote Sensing of Environment*, 93, 238-245, 10.1016/j.rse.2004.07.007, 2004 Cited By :130
Export Date: 20 May 2019.
- 950 Lakshmi, V.: The role of satellite remote sensing in the Prediction of Ungauged Basins, *Hydrological Processes*, 18, 1029-1034, 10.1002/hyp.5520, 2004
- Landerer, F. W., and Swenson, S. C.: Accuracy of scaled GRACE terrestrial water storage estimates, *Water Resources Research*, 48, 11, doi:10.1029/2011WR011453, 2012
- 955 Langhorst, T., Pavelsky, T. M., Frasson, R. P. d. M., Wei, R., Domeneghetti, A., Altenau, E. H., Durand, M. T., Minear, J. T., Wegmann, K. W., and Fuller, M. R.: Anticipated Improvements to River Surface Elevation Profiles From the Surface Water and Ocean Topography Mission, *Frontiers in Earth Science*, 7, 102, 2019
- Le Coz, C., and van de Giesen, N.: Comparison of rainfall products over sub-Sahara Africa, *Journal of Hydrometeorology*, 10.1175/JHM-D-18-0256.1, 2019
- 960 Leon, J. G., Calmant, S., Seyler, F., Bonnet, M. P., Cauhopé, M., Frappart, F., Filizola, N., and Fraizy, P.: Rating curves and estimation of average water depth at the upper Negro River based on satellite altimeter data and modeled discharges, *Journal of Hydrology*, 328, 481-496, 10.1016/j.jhydrol.2005.12.006, 2006 Cited By :98
Export Date: 20 May 2019.
- 965 Liu, G., Schwartz, F. W., Tseng, K. H., and Shum, C. K.: Discharge and water-depth estimates for ungauged rivers: Combining hydrologic, hydraulic, and inverse modeling with stage and water-area measurements from satellites, *Water Resources Research*, 51, 6017-6035, 10.1002/2015WR016971, 2015 Cited By :4
Export Date: 21 February 2018.
- Łyszkowicz, A. B., and Bernatowicz, A.: Current state of art of satellite altimetry, *Geodesy and Cartography*, 66, 259-270, <https://doi.org/10.1515/geocart-2017-0016>, 2017
- 970 Manning, R.: On the flow of water in open channels and pipes, *Transactions of the Institution of Civil Engineers of Ireland*, 20, 161-207, 1891
- McMillan, H. K., and Westerberg, I. K.: Rating curve estimation under epistemic uncertainty, *Hydrological Processes*, 29, 1873-1882, 10.1002/hyp.10419, 2015 Cited By :4
Export Date: 30 May 2016.
- 975 Michailovsky, C. I., McEnnis, S., Berry, P. A. M., Smith, R., and Bauer-Gottwein, P.: River monitoring from satellite radar altimetry in the Zambezi River basin, *Hydrol. Earth Syst. Sci.*, 16, 2181-2192, 10.5194/hess-16-2181-2012, 2012 HESS
<http://www.hydrol-earth-syst-sci.net/16/2181/2012/hess-16-2181-2012.pdf>.
- Michailovsky, C. I., Milzow, C., and Bauer-Gottwein, P.: Assimilation of radar altimetry to a routing model of the Brahmaputra River, *Water Resources Research*, 49, 4807-4816, 10.1002/wrcr.20345, 2013

- 980 Michailovsky, C. I., and Bauer-Gottwein, P.: Operational reservoir inflow forecasting with radar altimetry: the Zambezi case study, *Hydrol. Earth Syst. Sci.*, 18, 997-1007, 10.5194/hess-18-997-2014, 2014 HESS
<http://www.hydrol-earth-syst-sci.net/18/997/2014/hess-18-997-2014.pdf>.
- Montanari, M., Hostache, R., Matgen, P., Schumann, G., Pfister, L., and Hoffmann, L.: Calibration and sequential updating of a coupled hydrologic-hydraulic model using remote sensing-derived water stages, *Hydrol. Earth Syst. Sci.*, 13, 367-380, 10.5194/hess-13-367-2009, 2009 HESS
985 <http://www.hydrol-earth-syst-sci.net/13/367/2009/hess-13-367-2009.pdf>.
- Nash, J. E., and Sutcliffe, J. V.: River flow forecasting through conceptual models part I — A discussion of principles, *Journal of Hydrology*, 10, 282-290, [https://doi.org/10.1016/0022-1694\(70\)90255-6](https://doi.org/10.1016/0022-1694(70)90255-6), 1970
- Nijzink, R. C., Samaniego, L., Mai, J., Kumar, R., Thober, S., Zink, M., Schäfer, D., Savenije, H. H. G., and Hrachowitz, M.: The importance of topography-controlled sub-grid process heterogeneity and semi-quantitative prior constraints in distributed hydrological models, *Hydrol. Earth Syst. Sci.*, 20, 1151-1176, 10.5194/hess-20-1151-2016, 2016 HESS
990 <https://www.hydrol-earth-syst-sci.net/20/1151/2016/hess-20-1151-2016.pdf>.
- Nijzink, R. C., Almeida, S., Pechlivanidis, I. G., Capell, R., Gustafssons, D., Arheimer, B., Parajka, J., Freer, J., Han, D., Wagener, T., van Nooijen, R. R. P., Savenije, H. H. G., and Hrachowitz, M.: Constraining Conceptual Hydrological Models With Multiple Information Sources, *Water Resources Research*, 54, 8332-8362, 10.1029/2017WR021895, 2018
995
- Oubanas, H., Gejadze, I., Malaterre, P. O., Durand, M., Wei, R., Frasson, R. P. M., and Domeneghetti, A.: Discharge Estimation in Ungauged Basins Through Variational Data Assimilation: The Potential of the SWOT Mission, *Water Resources Research*, 54, 2405-2423, 10.1002/2017WR021735, 2018
1000
- Pandya, U., Patel, A., and Patel, D.: RIVER CROSS SECTION DELINEATION FROM THE GOOGLE EARTH FOR DEVELOPMENT OF 1D HEC-RAS MODEL-A CASE OF SABARMATI RIVER, GUJARAT, INDIA, *International Conference on Hydraulics, Water Resources & Coastal Engineering*, Ahmedabad, India, 2017.
- Papa, F., Bala, S. K., Pandey, R. K., Durand, F., Gopalakrishna, V. V., Rahman, A., and Rossow, W. B.: Ganga-Brahmaputra river discharge from Jason-2 radar altimetry: An update to the long-term satellite-derived estimates of continental freshwater forcing flux into the Bay of Bengal, *Journal of Geophysical Research: Oceans*, 117, 10.1029/2012JC008158, 2012 Cited By :58
1005 Export Date: 20 May 2019.
- Paris, A., Dias de Paiva, R., Santos da Silva, J., Medeiros Moreira, D., Calmant, S., Garambois, P. A., Collischonn, W., Bonnet, M. P., and Seyler, F.: Stage-discharge rating curves based on satellite altimetry and modeled discharge in the Amazon basin, *Water Resources Research*, 52, 3787-3814, 10.1002/2014WR016618, 2016 Cited By :6
1010 Export Date: 21 February 2018.
- Pechlivanidis, I. G., and Arheimer, B.: Large-scale hydrological modelling by using modified PUB recommendations: The India-HYPE case, *Hydrology and Earth System Sciences*, 19, 4559-4579, 10.5194/hess-19-4559-2015, 2015 Cited By :26
1015 Export Date: 26 April 2019.
- Pedinotti, V., Boone, A., Decharme, B., Crétaux, J. F., Mognard, N., Panthou, G., Papa, F., and Tanimoun, B. A.: Evaluation of the ISBA-TRIP continental hydrologic system over the Niger basin using in situ and satellite derived datasets, *Hydrology and Earth System Sciences*, 16, 1745-1773, 10.5194/hess-16-1745-2012, 2012 Cited By :36
1020 Export Date: 20 May 2019.
- Pereira-Cardenal, S. J., Riegels, N. D., Berry, P. A. M., Smith, R. G., Yakovlev, A., Siegfried, T. U., and Bauer-Gottwein, P.: Real-time remote sensing driven river basin modeling using radar altimetry, *Hydrol. Earth Syst. Sci.*, 15, 241-254, 10.5194/hess-15-241-2011, 2011 HESS
1025 <http://www.hydrol-earth-syst-sci.net/15/241/2011/hess-15-241-2011.pdf>.

- Pramanik, N., Panda, R. K., and Sen, D.: One Dimensional Hydrodynamic Modeling of River Flow Using DEM Extracted River Cross-sections, *Water Resour Manage*, 24, 835-852, 10.1007/s11269-009-9474-6, 2010
- 1030 Prenner, D., Kaitna, R., Mostbauer, K., and Hrachowitz, M.: The Value of Using Multiple Hydrometeorological Variables to Predict Temporal Debris Flow Susceptibility in an Alpine Environment, *Water Resources Research*, 54, 6822-6843, 10.1029/2018WR022985, 2018 Cited By :1
Export Date: 13 June 2019.
- 1035 Rakovec, O., Kumar, R., Attinger, S., and Samaniego, L.: Improving the realism of hydrologic model functioning through multivariate parameter estimation, *Water Resources Research*, 52, 7779-7792, 10.1002/2016WR019430, 2016
- Rantz, S. E.: Measurement and computation of streamflow: Volume 2, Computation of Discharge, Report 2175, 1982.
- 1040 Rennó, C. D., Nobre, A. D., Cuartas, L. A., Soares, J. V., Hodnett, M. G., Tomasella, J., and Waterloo, M. J.: HAND, a new terrain descriptor using SRTM-DEM: Mapping terra-firme rainforest environments in Amazonia, *Remote Sensing of Environment*, 112, 3469-3481, <https://doi.org/10.1016/j.rse.2008.03.018>, 2008
- Revilla-Romero, B., Beck, H. E., Burek, P., Salamon, P., de Roo, A., and Thielen, J.: Filling the gaps: Calibrating a rainfall-runoff model using satellite-derived surface water extent, *Remote Sensing of Environment*, 171, 118-131, <http://dx.doi.org/10.1016/j.rse.2015.10.022>, 2015
- 1045 SADC: Integrated Water Resources Management Strategy and Implementation Plan for the Zambezi River Basin, Euroconsult Mott MacDonald, 2008.
- Santhi, C., Kannan, N., Arnold, J. G., and Di Luzio, M.: Spatial Calibration and Temporal Validation of Flow for Regional Scale Hydrologic Modeling, *JAWRA Journal of the American Water Resources Association*, 44, 829-846, 10.1111/j.1752-1688.2008.00207.x, 2008
- 1050 Savenije, H. H. G.: Equifinality, a blessing in disguise?, *Hydrological Processes*, 15, 2835-2838, 10.1002/hyp.494, 2001
- Savenije, H. H. G.: Topography driven conceptual modelling (FLEX-Topo), *Hydrol. Earth Syst. Sci.*, 14, 2681-2692, 2010
- 1055 Sawicz, K., Wagener, T., Sivapalan, M., Troch, P. A., and Carrillo, G.: Catchment classification: Empirical analysis of hydrologic similarity based on catchment function in the eastern USA, *Hydrology and Earth System Sciences*, 15, 2895-2911, 10.5194/hess-15-2895-2011, 2011
- Schleiss, A. J., and Matos, J. P.: Chapter 98: Zambezi River Basin, in: *Chow's Handbook of Applied Hydrology*, edited by: Singh, V. P., McGraw-Hill Education - Europe, United States, 2016.
- 1060 Schneider, R., Godiksen, P. N., Villadsen, H., Madsen, H., and Bauer-Gottwein, P.: Application of CryoSat-2 altimetry data for river analysis and modelling, *Hydrol. Earth Syst. Sci.*, 21, 751-764, 10.5194/hess-21-751-2017, 2017 HESS
<http://www.hydrol-earth-syst-sci.net/21/751/2017/hess-21-751-2017.pdf>.
- 1065 Schoups, G., Lee Addams, C., and Gorelick, S. M.: Multi-objective calibration of a surface water-groundwater flow model in an irrigated agricultural region: Yaqui Valley, Sonora, Mexico, *Hydrol. Earth Syst. Sci.*, 9, 549-568, 10.5194/hess-9-549-2005, 2005 HESS
<https://www.hydrol-earth-syst-sci.net/9/549/2005/hess-9-549-2005.pdf>.
- Schumann, G., Kirschbaum, D., Anderson, E., and Rashid, K.: Role of Earth Observation Data in Disaster Response and Recovery: From Science to Capacity Building, in: *Earth Science Satellite Applications* edited by: Hossain, F., Springer International Publishing, Seattle, USA, 2016.
- 1070 Schwatke, C., Dettmering, D., Bosch, W., and Seitz, F.: DAHITI – an innovative approach for estimating water level time series over inland waters using multi-mission satellite altimetry, *Hydrol. Earth Syst. Sci.*, 19, 4345-4364, 10.5194/hess-19-4345-2015, 2015 HESS

<http://www.hydrol-earth-syst-sci.net/19/4345/2015/hess-19-4345-2015.pdf>.

- 1075 Seibert, J., and Beven, K. J.: Gauging the ungauged basin: how many discharge measurements are needed?, *Hydrol. Earth Syst. Sci.*, 13, 883-892, 10.5194/hess-13-883-2009, 2009 HESS
<https://www.hydrol-earth-syst-sci.net/13/883/2009/hess-13-883-2009.pdf>
- Seibert, J., and Vis, M. J. P.: How informative are stream level observations in different geographic regions?, *Hydrological Processes*, 30, 2498-2508, 10.1002/hyp.10887, 2016
- 1080 Seyler, F., Calmant, S., Silva, J. S. d., Moreira, D. M., Mercier, F., and Shum, C. K.: From TOPEX/Poseidon to Jason-2/OSTM in the Amazon basin, *Advances in Space Research*, 51, 1542-1550, <https://doi.org/10.1016/j.asr.2012.11.002>, 2013
- Sikorska, A. E., and Renard, B.: Calibrating a hydrological model in stage space to account for rating curve uncertainties: general framework and key challenges, *Advances in Water Resources*, 105, 51-66, <https://doi.org/10.1016/j.advwatres.2017.04.011>, 2017
- 1085 Smith, B., and Sandwell, D.: Accuracy and resolution of shuttle radar topography mission data, *Geophysical Research Letters*, 30, 10.1029/2002GL016643, 2003
- Spearman, C.: The proof and measurement of association between two things, *The American Journal of Psychology*, 15, 72-101, 1904
- 1090 Sulistioadi, Y. B., Tseng, K. H., Shum, C. K., Hidayat, H., Sumaryono, M., Suhardiman, A., Setiawan, F., and Sunarso, S.: Satellite radar altimetry for monitoring small rivers and lakes in Indonesia, *Hydrol. Earth Syst. Sci.*, 19, 341-359, 10.5194/hess-19-341-2015, 2015 HESS
<http://www.hydrol-earth-syst-sci.net/19/341/2015/hess-19-341-2015.pdf>
- 1095 Sun, W., Ishidaira, H., and Bastola, S.: Calibration of hydrological models in ungauged basins based on satellite radar altimetry observations of river water level, *Hydrological Processes*, 26, 3524-3537, 10.1002/hyp.8429, 2012
- Sun, W., Ishidaira, H., Bastola, S., and Yu, J.: Estimating daily time series of streamflow using hydrological model calibrated based on satellite observations of river water surface width: Toward real world applications, *Environmental Research*, 139, 36-45, <http://dx.doi.org/10.1016/j.envres.2015.01.002>, 2015
- 1100 Sun, W., Fan, J., Wang, G., Ishidaira, H., Bastola, S., Yu, J., Fu, Y. H., Kiem, A. S., Zuo, D., and Xu, Z.: Calibrating a hydrological model in a regional river of the Qinghai-Tibet plateau using river water width determined from high spatial resolution satellite images, *Remote Sensing of Environment*, 214, 100-114, <https://doi.org/10.1016/j.rse.2018.05.020>, 2018
- Swenson, S. C., and Wahr, J.: Post-processing removal of correlated errors in GRACE data, *Geophys. Res. Lett.*, 33, doi:10.1029/2005GL025285, 2006
- 1105 Swenson, S. C.: GRACE monthly land water mass grids NETCDF RELEASE 5.0, in, PO.DAAC, CA, USA, 2012.
- Tang, Y., Hooshyar, M., Zhu, T., Ringler, C., Sun, A. Y., Long, D., and Wang, D.: Reconstructing annual groundwater storage changes in a large-scale irrigation region using GRACE data and Budyko model, *Journal of Hydrology*, 551, 397-406, <https://doi.org/10.1016/j.jhydrol.2017.06.021>, 2017
- 1110 Tarpanelli, A., Barbeta, S., Brocca, L., and Moramarco, T.: River discharge estimation by using altimetry data and simplified flood routing modeling, *Remote Sensing*, 5, 4145-4162, 10.3390/rs5094145, 2013 Cited By :45
Export Date: 20 May 2019.
- 1115 Tarpanelli, A., Amarnath, G., Brocca, L., Massari, C., and Moramarco, T.: Discharge estimation and forecasting by MODIS and altimetry data in Niger-Benue River, *Remote Sensing of Environment*, 195, 96-106, 10.1016/j.rse.2017.04.015, 2017 Cited By :17
Export Date: 20 May 2019.

The World Bank: The Zambezi River Basin: A Multi-Sector Investment Opportunities Analysis, in, 2010.

Tourian, M. J., Sneeuw, N., and Bárdossy, A.: A quantile function approach to discharge estimation from satellite altimetry (ENVISAT), *Water Resources Research*, 49, 2013

- 1120 Tourian, M. J., Tarpanelli, A., Elmi, O., Qin, T., Brocca, L., Moramarco, T., and Sneeuw, N.: Spatiotemporal densification of river water level time series by multitemission satellite altimetry, *Water Resources Research*, 52, 1140-1159, 10.1002/2015WR017654, 2016

- 1125 Tourian, M. J., Schwatke, C., and Sneeuw, N.: River discharge estimation at daily resolution from satellite altimetry over an entire river basin, *Journal of Hydrology*, 546, 230-247, <https://doi.org/10.1016/j.jhydrol.2017.01.009>, 2017

University of East Anglia Climatic Research Unit, Harris, I. C., and Jones, P. D.: CRU TS4.01: Climatic Research Unit (CRU) Time-Series (TS) version 4.01 of high-resolution gridded data of month-by-month variation in climate (Jan. 1901- Dec. 2016), Centre for Environmental Data Analysis,, doi:10.5285/58a8802721c94c66ae45c3baa4d814d0, 2017

- 1130 Velpuri, N. M., Senay, G. B., and Asante, K. O.: A multi-source satellite data approach for modelling Lake Turkana water level: calibration and validation using satellite altimetry data, *Hydrol. Earth Syst. Sci.*, 16, 1-18, 10.5194/hess-16-1-2012, 2012 HESS
<http://www.hydrol-earth-syst-sci.net/16/1/2012/hess-16-1-2012.pdf>.

- 1135 Winsemius, H. C., Savenije, H. H. G., and Bastiaanssen, W. G. M.: Constraining model parameters on remotely sensed evaporation: justification for distribution in ungauged basins?, *Hydrol. Earth Syst. Sci.*, 12, 1403-1413, 10.5194/hess-12-1403-2008, 2008 HESS
<http://www.hydrol-earth-syst-sci.net/12/1403/2008/hess-12-1403-2008.pdf>.

ZAMCOM, SADC, and SARDC: Zambezi Environment Outlook 2015, Harare, Gaborone, 2015.

Zhou, X., and Wang, H.: Application of Google Earth in Modern River Sedimentology Research, 1-8 pp., 2015.

- 1140 Zink, M., Mai, J., Cuntz, M., and Samaniego, L.: Conditioning a Hydrologic Model Using Patterns of Remotely Sensed Land Surface Temperature, *Water Resources Research*, 54, 2976-2998, 10.1002/2017WR021346, 2018
Cited By :5
Export Date: 26 April 2019.