

## Authors' Responses

The authors thank the editor (Prof. Fuqiang Tian) for the opportunity to address the comments by the reviewers. We have carefully revised the entire manuscript, corrected typos and errors, checked missing co-authors and their affiliations, terminology, updates of data in tables and variables in equations. In the following document, we are providing the responses to reviewers, as we have submitted in the interactive discussion. Please find below your reproduced comments, followed by our point-by-point responses (in blue or red). Below the responses to reviewers, we are providing the marked-up revised document.

### Response to Anonymous Referee #1 (RC1)

#### General comments

The manuscript uses timeseries of soil moisture data to estimate the soil water budget components, especially evapotranspiration, in an irrigated agricultural field of a desert oasis. This study is well conducted, and the authors responded the comments well. I think it is worth publishing after minor revisions. I have several comments listed as below.

**RESPONSE:** We warmly thank the Anonymous Referee #1 for the overall favorable impression of the work, and for his or her thorough review and the detailed, helpful comments. Please find below your reproduced comments, followed by our point-by-point responses.

#### Specific comments

1) The anonymous reviewer 3# concerns the locations of Section 3.1, 3.2, and 3.3, and the authors insisted the former locations. I think the problem may be arisen by the title of them. The current titles may be misleading to about the dataset, nor the observed or calculated results. For example, Section 3.2 is about calculated irrigation amount. The meteorological data should be introduced in the materials section.

**RESPONSE:** We have reorganized the sub-titles of Section 3 as: “3.1 Soil hydrophysical characteristics”, “3.2 Soil moisture dynamics (SMDs)”, and “3.3 Soil water budget components (SWBCs)”. The results about irrigation amount has been merged into section “3.3 Soil water budget components (SWBCs)”, and the descriptions upon meteorological data has been moved to “2.2 Site description”. Thanks to the nice suggestion, this part looks much better than before.

2) I am confused by the  $S_{\text{stop}}$  and  $S_{\text{max}}$ . Is  $S_{\text{stop}}$  larger than  $S_{\text{max}}$ , as shown in Fig. 2.

**RESPONSE:** Very nice question, and the answer is:  $S_{\text{max}}$  is larger than  $S_{\text{stop}}$ . As we mentioned in “2.3 Calculation methods 1) Water storage and irrigation amounts”,  $S_{\text{max}}$  was defined as the recorded maximum soil water storage of the root zone, and  $S_{\text{stop}}$  is the recorded soil water storage when irrigation event ends (moisture of uppermost soil layer starts to decrease). Although the real water storage in the entire root-zone soil should keep constant during the short periods between irrigation ends and deep drainage starts, it is not naturally been recorded by the soil moisture sensors at any time of this period, because of the continuously redistributing soil water profile and limited number of soil moisture sensor. In this work, the real water storage in root-zone soil was assumed to be equal to  $S_{\text{max}}$ , and thus  $S_{\text{stop}}$  would tend to approach  $S_{\text{max}}$  if more soil moisture sensors were installed in the soil profile. To clarify this point, more detailed explanations on this point has been included in the revision. Please see the caption of Figure 2 for details in the revision.

3) Please check the captions appeared in the text. For example, Fig.7 appears earlier than Fig. 5. Where is Fig. 6?

**RESPONSE:** We feel very sorry for the careless. “Fig. 7” appeared in Section 3.2 has been replaced by “Table 3” in the text, and we further checked all the figure captions to avoid any other similar mistakes.

4) Fig.3, It is better to show the specific irrigation amount and compare it with rainfall event.

**RESPONSE:** Thanks for the suggestion, Fig.3 has been reorganized to show the average amount of each irrigation event during 2016 in the revision. We also corrected an error of the irrigation date in this figure. We feel very sorry for the careless data checking and glad that we find the mistakes and corrected it in this revision.

## **Response to Anonymous Referee #2 (RC2)**

We thank the anonymous Referee #2 for taking the time to review our manuscript and for their generally positive feedback on our study. Please find below your reproduced comments, followed by our point-by-point responses.

### **Specific comments**

1) Lines 14, 61 etc.: drainage is not, and has been never considered as a "driver" of hydrological cycle. Irrigation is taken as a factor that interferes hydrological cycle, and seldomly taken as a "driver". You may call evapotranspiration a driver of the hydrological cycle. It is a component of the hydrological cycle as a matter of fact. Usually, the drivers of the hydrological cycle refer to the climatic factors.

**RESPONSE:** Thanks for the nice suggestion, we have changed “driven” as “dominated”, and changed “driver” as “components”.

2) Lines 314, 315. "Because the inverse method proposed by Zuo et al. (2002) and Guderle and Hildebrandt (2015) had never been applied throughout an entire growing season for farmland...", this is hard to say.

**RESPONSE:** We have removed this sentence in the revision to solve the concern.

3) As indicated in the last paragraph of the introduction section, this work aims to investigate performance of the inverse method to the coarse-textured soils. Thus, "coarse-textured soils" should be focused and highlighted in the discussion. This might have been something new in this paper.

**RESPONSE:** Nice suggestion. Some related discussion will be added in the Section 4.2 and 4.5 in the coming revision to highlight the “coarse-textured soils”. Please see “4.2 Accuracy of the other estimated SWBCs” in the revision for details.

## **Response to Dr. Michael W. I. Schmidt (SC1)**

### **General comments**

\* A note upfront from the submitting person:

This review was prepared by Basil Frefel and Michèle Bösiger, both master students in geography at the University of Zurich.

The review was part of an exercise during a second semester master level seminar on “the biogeochemistry of plant-soil systems in a changing world”, which I organize. We would like to highlight that the depth of scientific knowledge and technical understanding of these reviewers represents that of master students. We enjoyed discussing the manuscript in the seminar, and hope that our comments will be helpful for the authors.\*.

Addressing sustainable irrigation in semi-desert regions, Li et al. observed in a soil moisture time series the soil-water holding ability in the Heihe River Basin, northern China. Soil properties such as saturated hydraulic conductivity and soil retention capabilities were combined with the soil water balance method and the inverse Richards equation (water movement in unsaturated soil) in order to estimate the Soil Water Base Components (evapotranspiration, irrigation, drainage). The measurements were taken at six sites in sandy soils, which differed in agricultural technique (rotational, permanent cultivation), plant species and mulching application. The results show that the estimation of the Soil Water Base Components corresponds to the soil-moisture time series and thus should be helpful for future irrigation planning.

Overall, the issue addressed by Li et al. is of great importance regarding future water management. Especially with increasing water scarcity, the study lays the foundation for a sustainable water strategy for one of the biggest agricultural producers worldwide for rice and wheat and thus is a valid contribution to the present scientific knowledge. The article is well structured, and the thinking steps are described profoundly, in addition to the reflected approach to the results. However, we have also found some caveats.

**RESPONSE:** We would like to thank Dr. Michael W. I. Schmidt for organizing the seminar to discuss our manuscript. We also warmly thank Basil Frefel, Michèle Bösiger for their thoughtful review, and for the specific suggestions, with which our manuscript is significantly improved in both its clarity and organization. We have taken the time to think through all the review comments and have adequately addressed all the comments item-by-item in the following pages.

In general, the type size is too small, and the sentences tend to be too long and interlaced to comprehend the article at the first read (see further comments).

**RESPONSE:** 1) Following the reviewer’s suggestion, we have carefully revised our manuscript and these long sentences that may be unclear or confusing to a reader were rewritten in the revision.

Moreover, the exact time span of the experiment is unclear, and it should be mentioned what (important) role sandy soils play in the agricultural production of China and the world.

**RESPONSE:** The long-term experiment that was design to investigate the accumulative effect of different cropping systems and agronomic manipulation on soil property evolution was set up in 2007, and will run as long as the funding allows, and the in-situ soil moisture measurements were carried out since 2015, and was designed to continue until the long-term field experiment is ended. We have clarified this point in our revision. In addition, more information about “**what (important) role sandy soils play in the agricultural production of China and the world**” was included in this revision. Please see Line 110-111 for details.

Besides, the abstract should be shortened to stay attractive for the reader and abbreviations such as NT1-NT6 should not be used in this very first paragraph. In our opinion, many explanations are too complicated; Keep explanations short and simple. In contrast to the detailed abstract, the conclusion is too short, again overloaded with abbreviations and therefore not understandable standing alone. More detailed remarks are listed below.

**RESPONSE:** As suggested, we slightly shortened the **Abstract** and removed the abbreviations such as NT1-NT6 in this **part**, and try our best to make the explanations as concise as possible. Also, the **Conclusion** part has been slightly expanded to solve the reviewer’s concern. All the abbreviations that could be ambiguous also were carefully defined in the revision. More details can be found in our below responses to specific comments.

## Specific comments

1) Lines 12: SWBC: In this paper the term soil water budget components and its abbreviation SWBC is used as if it were a standard term in soil science or hydrology. is this really the case? Otherwise it should be mentioned that this term as such is only used in this paper.

**RESPONSE:** Thanks for the nice suggestion. No, this abbreviation is not a standard term both in soil science and hydrology, and it is only used in this paper. We have defined that in the Introduction and then to use it in the following text to reduce repeated use of the term and thus to make the paper as concise as possible. According to the suggestion, we have mentioned that “the abbreviation is used here for simplicity, and effective only in this paper” when it first appeared in the revision. See Line 57-58 in the revision for details.

2) Lines 22: Since the inverse Richards equation is of great importance in this work, but is not necessarily known to the general public, a brief description of what this method is used for, e.g. in parentheses, would be helpful.

**RESPONSE:** Thanks for pointing out this issue. A brief description of what this method is used for have been added in our revision, i.e., “(which is a model of unsaturated soil water flow based on the Richards equation)”. See Line 23-24 in the revision for details.

3) Lines 26: Why only one site without film-mulch? Comparison to other sites without mulching would have been helpful.

**RESPONSE:** As we mentioned in Section 2.2, this long-term field experiment was set up in 2007, and the six experiment plots have very different treatments, i.e., from NT1 to NT6, they were sequentially set as: (1) continuous pasture cropping, (2) continuous maize cropping, (3) continuous maize cropping with straw return, (4) maize-maize-pasture rotation, (5) maize-pasture rotation, (6) maize-pasture intercropping. In general, only the maize fields need to be film-mulched, and maize were planted in all the plots except NT1 (which was planted with alfalfa in the growing season of 2016), so that NT1 is the only one plot without film-mulch in this study.

4) Lines 29: What should be special about an obvious correlation between the volume of irrigation and drained water? is this really a significant result of the study or could this statement also be omitted?

**RESPONSE:** Yes, we do think this is a significant result of the study. Although similar results were also reported by other works, we found that this linear positive correlation is particularly noticeable in the coarse textured soils like the desert oasis in arid China, as we also discussed in Section 4.2. We think this is a useful result for further improve irrigation strategies, and thus would like to keep it here.

5) Lines 47: What is a high leaching fraction? Explain.

**RESPONSE:** Leaching fraction (LF) represent the ratio of the actual depth of drainage to the depth of irrigation (Dudley, Ben-Gal, & Shani, 2008), we have explained it in the coming revision. Please see Line 48-49 in the revision for details.

6) Lines 40-54 and 55-69: The second paragraph is redundant.

**RESPONSE:** The second paragraph has been slightly shortened to eliminate any redundant in the revision.

7) Lines 106-107: Reference is needed for the sentence “The annual average precipitation...”

**RESPONSE:** Added as suggested.

8) Lines 107: What does a dryness index of 15.9 mean. Please put this number into context. Is this a high or a low value compared to the surrounding region or the rest of China? Is the dryness Index a common value which is need to be stated?

**RESPONSE:** Dryness index adopted here is a climate index that was widely used to reflect the degree of dryness in the atmosphere; it often defined as the ratio of potential evaporation to precipitation (Xiao, Yang, Shi, Nakatsuka, & Shi, 2013). A dryness index of 15.9 means a very dry climate, under which potential evaporation rate could be ~15 times higher than the precipitation received. The dryness index of 15.9 is a common value for the arid northwestern China, but much higher than the rest regions of China. We have clarified this point in our revision. Please see Line 105-106 in the revision for details.

9) Lines 111: What exactly is meant with sandy soil? What official soil name does it correspond to? leave out "...coarse texture and...". Scotch or Scots pine? Use familiar expression.

**RESPONSE:** According to Yang and Liu (2010), the zonal soils in our study region are loamy sand and sandy soil, which are two soil types typical for arid and semiarid environments (Zhao, Ji, Kang, Zhang, & Jin, 2010), we will further clarify this point in our revision. As suggested, "coarse texture" has been removed from the revision, and "Scotch Pine" was replaced with "Scots pine" too. Please see Line 110-111 in the revision for details.

10) Lines 124-126: Please explain why the different treatments used in the study were chosen.

**RESPONSE:** As we mentioned at the beginning of this paragraph, the different treatments used in the study were chosen to investigate the accumulative effect of different cropping systems and agronomic manipulation on soil property evolution. More details have been included in the revision to solve this concern.

11) Lines 127: Why using exactly this type of irrigation (furrow irrigation)? Please explain in more detail.

**RESPONSE:** Because it was the most widely used irrigation type in our study area, and even the entire northwestern China. More details have been added in the revision to solve this concern. Please see Line 129-130 in the revision for details.

12) Lines 128: Why just using one site with no film-mulching and five with mulching? Not a sufficient comparison possible between the sites.

**RESPONSE:** Please refer to our response to Question 3 of SC1.

13) Lines 242: Is it not unrealistic to use a ground level of the soil matric potential, even though the water level never reaches that high up?

**RESPONSE:** I guess this question may be raised by some misleading description about the lower boundary, for example, "i.e.,  $h = -5\text{cm}$ ". In fact, we adopted a free drainage boundary, which also can be described as "a unit vertical hydraulic gradient boundary condition which can account for a variable flux". To clarify this point, we have reorganized this sentence as "A free-drainage boundary condition was applied along the bottom boundary". Please see Line 355-356 in the revision for details.

14) Lines 245: Which software? Please specify.

**RESPONSE:** We do this calculation by coding in MATLAB environment. It has been clarified in the revision.

15) Lines 343: In what dimension is the soil water content measured?

**RESPONSE:** According to the Operator's Manual, each TDR sensor (5TE, Decagon Devices Inc. Pullman, WA, USA) uses an electromagnetic field (dimensions: 9.3 x 2.4 x 6.5 cm) to measure the dielectric permittivity  $\epsilon$  and thus the soil water content of the surrounding medium. In this study, the TDR sensors were installed at 5 different depths (20, 40, 60, 80, and 100 cm) at each plot, to monitor the soil water moisture of the root zone (0-110 cm).

16) Lines 55-59: The sentence is too long, therefore hard to follow and should be divided into two or three sentences. End the first sentence with a full stop after (Wright, 1971).

**RESPONSE:** This sentence has been deleted from in the revision (including the related reference), due to the potential redundancy with the previous paragraph.

17) Lines 92-95: Unorganized sentence order makes it even harder to follow the content.

**RESPONSE:** To make it clearer and more understandable, we have reorganized this sentence as "Exploring a reliable farmland *SWBC* estimation model, which can make the most of the vast amounts of soil moisture data, is crucial for irrigation management optimization in arid regions with coarse-textured soils (Musters & Bouten, 2000; Sharma, Shukla, Bosland, & Steiner, 2017)". Please see Line 91-93 in the revision.

18) Lines 165-171: Subdivision into subsets probably better for this sentence.

**RESPONSE:** Changed as suggested.

19) Lines 219-226: Hard to follow the derivation.

**RESPONSE:** We have reorganized this part to make the derivation easier to follow in the revision. Please see Line 229-237 in the revision for details.

20) Lines 42: missing 'the' ...the Heihe river basin (HRB) is one of the largest...

**RESPONSE:** Corrected as suggested.

21) Lines 81: Cross out "...quite common and..."

**RESPONSE:** Corrected as suggested.

22) Lines 83: Cross out "...and more..."

**RESPONSE:** Corrected as suggested.

23) Lines 85: Also, with this process\_, ...

**RESPONSE:** Corrected as suggested.

24) Lines 86: ..., almost no work\_ have been...

**RESPONSE:** Corrected as suggested.

25) Lines 112: ... (planted since the 1970s), include *Haloxylon ammodendron*, ... →either no comma or 'including'

**RESPONSE:** Corrected as suggested.

26) Figure 1: The figure is not entirely clear: to what do the roots belong on the right? /figure on the left→layout and position of the legend and unprecise placement of the small map of China.

**RESPONSE:** We have reorganized this figure to make it clearer and more understandable in the revision according to this comment.

27) Figure 2: Probably better 'day of year' as axis label instead of DOY.

**RESPONSE:** We have added the explanation in the note. Please see page 6 line 183 in the revision.

28) Lines 140: 'was' instead of 'were'.

**RESPONSE:** Corrected as suggested.

29) Lines 195: 'dominates' instead of 'dominants'.

**RESPONSE:** Corrected as suggested

30) Table 1: we propose to insert this nomenclature-table at the beginning of the chapter.

**RESPONSE:** We decide to keep them at the original places just for the tidy layout.

31) Table2: Vertical lines between wilting point value of one study site and the saturated water conductivity of the next study site could probably increase readability (see attached pdf).

**RESPONSE:** Thanks for the nice suggestion, we have added vertical lines for Table 2 in the revision.

32) Figure 5: Does it need this figure at this place? and what exactly, apart from the clearly visible irrigation events, should be shown with it?

**RESPONSE:** This figure shows all the soil moisture dynamics that we used in this paper to further do our calculations, analysis and discussions, so that we would like to keep it in the manuscript.

33) Figure 6: left graph: use other scaling, since nothing is readable/ right graph: why is the scale in the middle of the graph (a bit weird position), why using such fancy boxplots if normal rectangular ones could be used?

**RESPONSE:** Both the two panels in Figure 6 have been reorganized to solve the concerns, however, the original box and Whisker plot (with diamond patterns) was kept in this revision, because this design would make the figure looks much better.

34) Lines 437: explains

**RESPONSE:** Corrected as suggested.

35) Lines 381: 'Literature' instead of 'literatures'?

**RESPONSE:** Corrected as suggested.

36) Lines 443: ... (Fares & Alva, 2000), suggesting that there is... In general: Reflect on the placement and use of figures and tables in the work, so that these stylistic tools fulfil their purpose of increasing the attractiveness of a scientific paper.

**RESPONSE:** Added as suggested.

37) Lines 1-2: as the use of soil moisture measurements is a major part of the scientific work, we would adjust the title as follows: Estimation of Evapotranspiration and Other Soil Water Budget Components, Using Soil Moisture Measurements, in an Irrigated Agricultural Field of a Desert Oasis Or also the following possibility seems easier to understand to us: Estimation of Evapotranspiration, Irrigation and Drainage, Using Soil Moisture Measurements, in an Irrigated Agricultural Field of a Desert Oasis

**RESPONSE:** According the suggestion, we have changed the title as “Estimation of Evapotranspiration and Other Soil Water Budget Components, Using Soil Moisture Measurements, in an Irrigated Agricultural Field of a Desert Oasis”.

38) Lines 29-30: Leave out the obvious parts and concentrate on the findings

**RESPONSE:** Because this part is one of the most important findings and we would prefer to keep in the abstract.

39) Lines 106: lowest and highest temperatures for winter and summer, respectively→that’s logical, no need of repetition. Pleonasm. It would be probably better to use the terms ‘minimum’ and ‘maximum’ in this context.

**RESPONSE:** Corrected as suggested.

40) Lines 323-324: water content values are difficult to read in the presented form of a listing.

**RESPONSE:** We have reorganized this sentence as “For the same interval of time, the water contents in the 40-, 60-, 80- and 100-cm depths of soil decreased from 25.4%, 19.8%, 18.5% and 14.2%, to 15.7%, 14.3%, 15.4% and 12.8%, respectively”. Please see Page 10 Line 322-323 in the revision.

41) Lines 512: Setting upper boundaries would have been a nice addition.

**RESPONSE:** Yes, we agree, but we don’t have more detailed information to set such a special upper boundary for inter-cropping treatments in this study. However, uncertainty that may be caused by this simplicity have been discussed in our manuscript.

42) Lines 566: It would be desirable for the conclusion to mention what would be appropriate irrigation methods for this variety of agricultural soil.

**RESPONSE:** Good idea, but this is beyond the scope of this article, and we are preparing another paper to discuss this issue.

#### **References:**

- Dudley, L. M., Ben-Gal, A., & Shani, U. (2008). Influence of plant, soil, and water on the leaching fraction. *Journal Of Environmental Quality*, 39(2), 713-724.
- Fares, A., & Alva, A. K. (2000). Evaluation of capacitance probes for optimal irrigation of citrus through soil moisture monitoring in an entisol profile. *Irrigation Science*, 19(2), 57-64. doi:10.1007/s002710050001
- Musters, P. A. D., & Bouten, W. (2000). A method for identifying optimum strategies of measuring soil water contents for calibrating a root water uptake model. *Journal Of Hydrology*, 227(1-4), 273-286.
- Sharma, H., Shukla, M. K., Bosland, P. W., & Steiner, R. (2017). Soil moisture sensor calibration, actual evapotranspiration, and



crop coefficients for drip irrigated greenhouse chile peppers. *Agricultural Water Management*, 179, 81-91.

Xiao, Z., Yang, F., Shi, F., Nakatsuka, T., & Shi, J. (2013). Comparison of the dryness/wetness index in China with the Monsoon Asia; Drought Atlas. *Theoretical & Applied Climatology*, 114(3-4), 553-566.

Yang, R., & Liu, W. (2010). Nitrate contamination of groundwater in an agroecosystem in Zhangye Oasis, Northwest China. *Environmental Earth Sciences*, 61(1), 123-129. doi:10.1007/s12665-009-0327-7

Zhao, W., Ji, X., Kang, E., Zhang, Z., & Jin, B. (2010). Evaluation of Penman-Monteith model applied to a maize field in the arid area of Northwest China. *Hydrology and Earth System Sciences Discussions*, 7(1), 461-491.

### **Other Changes:**

The missing affiliations of co-authors were included. The details of Author contributions and Competing interests were added according to journal's style guidelines.

# 1 Estimation of Evapotranspiration and Other Soil Water Budget Components, 2 Using Soil Moisture Measurements, in an Irrigated Agricultural Field of a Desert 3 Oasis 4

5 Zhongkai Li<sup>a,b,c</sup>, Hu Liu<sup>a,b</sup>, Wenzhi Zhao<sup>a,b</sup>, Qiyue Yang<sup>a,b</sup>, Rong Yang<sup>a,b</sup>, Jintao Liu<sup>d</sup>

6 a Linze Inland River Basin Research Station, Chinese Ecosystem Research Network, Lanzhou 730000, China

7 b. Key Laboratory of Ecohydrology of Inland River Basin, Northwest Institute of Eco-Environment and Resources, Chinese Academy of Sciences, Lanzhou, 730000, China

8 c. University of Chinese Academy of Sciences, Beijing 100039, China

9 d. State Key Laboratory of Hydrology-Water Resources and Hydraulic Engineering, Hohai University, Nanjing 210098, China

10 Correspondence: Hu Liu (lhayz@lzb.ac.cn)

## 11 Abstract 12

13 An accurate assessment of soil water budget components (*SWBCs*) is necessary for improving irrigation strategies in any water-limited environment. However, quantitative information of *SWBCs* is usually challenging to obtain, because none of the components (i.e., irrigation, drainage, and evapotranspiration) can be easily measured under actual conditions. Soil moisture is a variable that integrates the water balance components of land surface hydrology, and the evolution of soil moisture is assumed to contain the memory of antecedent hydrologic fluxes, and thus can be used to determine *SWBCs* from a hydrologic balance. A database of soil moisture measurements from six experimental plots with different treatments in the middle Heihe River Basin of China was used to test the potential of a soil moisture database in estimating the *SWBCs*. We first compared the hydrophysical properties of the soils in these plots, such as vertical saturated hydraulic conductivity ( $K_s$ ) and soil water retention features, for supporting the *SWBC* estimations. Then we determined evapotranspiration and other *SWBCs* through a method that combined both the soil water balance method and the inverse Richards equation (which is a model of unsaturated soil water flow based on the Richards equation). To test the accuracy of our estimation, we used both the indirect methods (such as power consumption of the pumping irrigation well, and published *SWBCs* values at nearby sites), and the water balance equation technique to verify the estimated *SWBCs* values, all of which showed a good reliability of our estimation. Finally, the uncertainties of the proposed methods were analyzed to evaluate the systematic error of the *SWBC* estimation and the restriction for its application. The results showed significant variances among the film-mulched plots in both the cumulative irrigation volumes (652.1~ 867.3 mm) and deep drainages (170.7~364.7 mm). Moreover, the unmulched plot had remarkably higher values in both cumulative irrigation volumes (1186.5 mm) and deep drainages (651.8 mm) compared with the mulched plots. Obvious correlation existed between the volume of irrigation and that of drained water. However, the ET demands for all the plots behaved pretty much the same, with the cumulative ET values ranging between 489.1 and 561.9 mm for the different treatments in 2016, suggesting that the superfluous irrigation amounts had limited influence on the accumulated ET throughout the growing season because of the poor water-holding capacity of the sandy soil. This work confirmed that relatively reasonable estimations of the *SWBCs* in coarse-textured sandy soils can be derived by using soil moisture measurements; the proposed methods provided a reliable solution during the entire growing season and showed a great potential for identifying appropriate irrigation amounts and frequencies, and thus a move toward sustainable water resources management, even under traditional surface irrigation conditions.

## 14 Keywords

15 Evapotranspiration, Soil water budget, Desert oasis, Soil moisture, Inverse Richards Equation.

## 16 1. Introduction

17 Arid inland river basins in northwestern China are unique ecosystems consisting of ice and snow, frozen soil, alpine vegetation, oases, deserts, and riparian forest landscapes, in a delicate eco-hydrological balance (Liu et al., 2015). Among these inland basins, the Heihe River Basin (HRB) is one of largest (Chen et al., 2007). The oasis plains in the middle reaches of the HRB have become an important source of grains, including the largest maize seed production center in China (Yang et al., 2015). Crop water requirements in this region are supplied mainly by irrigation from the river and from groundwater (Zhou et al., 2017). According to Wang et al. (2014), agriculture consumes 80 to 90% of the total water resources in the HRB, and has fundamentally altered the regional hydrological processes and even resulted in eco-environmental deterioration (Zhao and Chang, 2014). Traditional irrigation,

48 namely flood irrigation in the HRB, has low efficiency (i.e., a high leaching fraction—the ratio of the actual depth of drainage to  
49 the depth of irrigation) (Li et al., 2017; Deng et al., 2006) and the extensive fertilization practices have given rise to higher levels of  
50 potential nitrate contamination in the groundwater, because water and pollutants percolate into the deep sandy soils of the desert  
51 oasis, which have low water-holding capacities (Zhao and Chang, 2014). It is crucial to adopt a mechanism that can preserve the  
52 role of irrigation in food security, yet with minimal consumption of the already scarce water, in order to increase water productivity  
53 and conservation. Reducing water drainage and thus nitrate contamination in groundwater, saving water, and increasing water and  
54 nitrogen use efficiency, are turning out to be important steps toward sustainable agriculture in this region (Hu et al., 2008; Yu et al.,  
55 2019)—steps that are being implemented by developing effective irrigation schedules (Su et al., 2014).

56 An efficient irrigation scheduling program should aim to replenish the water deficit within the root zone while minimizing leaching  
57 below this depth (Bourazanis et al., 2015). Accordingly, an accurate assessment of soil water budget components (*SWBCs*, the  
58 abbreviation is used here for simplicity, and effective only in this paper) is necessary for improving the irrigation management  
59 strategies in the oasis fields. However, quantitative information of *SWBCs* is usually challenging to obtain (Dejen, 2015). In desert  
60 oasis settings, the hydrological process of farmland is principally dominated by irrigation (*I*), drainage (*D*), and evapotranspiration  
61 (*ET*). None of these components is easily measured in practice, however. For example, not even the optimal irrigation amount can  
62 be determined accurately: the two most common methods of measuring irrigation water—water meters or indirect methods—pose  
63 both economic and operational challenges to water managers, due to the wide spatial distribution of small fields throughout rural  
64 areas (Folhes et al., 2009). Measurement of deep percolation is also difficult, and reliable data are rare in practice, and thus  
65 percolation is often calculated as a residual of the water balance (Bethune et al., 2008; Odofin et al., 2012). *ET* is another source of  
66 uncertainty inherent in water budget estimations (Dolman and De Jeu, 2010), and its estimation at the field scale is usually through  
67 the application of mathematical models: it is commonly calculated by relying on reference *ET* (*ET<sub>0</sub>*) or potential *ET* (*PET*) (Allen  
68 et al., 2011; Suleiman and Hoogenboom, 2007; Wang and Dickinson, 2012; Ibrom et al., 2007).


69 Soil moisture is a variable that integrates the water balance components of land surface hydrology (Rodriguez-Iturbe and Porporato,  
70 2005), and over time it can be used to develop a record of antecedent hydrologic fluxes (Costa-Cabral et al., 2008). Soil moisture  
71 measurements were used to estimate the infiltration for unsaturated porous mediums by numerical solutions as early as the 1950s  
72 (Hanks and Bowers, 1962; Gardner and Mayhugh, 1958). With the advent of automated soil moisture monitors (Topp et al., 1980),  
73 *ET* estimation was implemented using continuous soil moisture data by simple water balance approaches (Young et al., 1997), but  
74 the computations are usually interrupted during rainfall or irrigation periods, as there is no means of accounting for drainage or  
75 recharge, due to inadequate turbulent flux measurements (Naranjo et al., 2011). It has only been during recent years that some  
76 researchers, including Schelde et al. (2011) and Guderle and Hildebrandt (2015), have started exploring the potential of using highly  
77 resolved soil moisture measurements to determine *ET* and sink term profiles, by accounting for vertical flow, demonstrating that  
78 such measurements can work when the appropriate approach is used. Rahgozar et al. (2012) and Shah et al. (2012) extended these  
79 methodologies to determine other components of the water budget, such as lateral flow, infiltration, interception capture, storage,  
80 surface runoff, and other fluxes. During the last 30 years, Time Domain Reflectometry (TDR) has become popular for measuring  
81 volumetric soil moisture content around the world (Kimak and Akpinar, 2016). For example, it is being used more frequently for  
82 monitoring soil moisture dynamics of agro-ecosystems in both the Chinese Ecosystem Research Network (CERN) and the U.S.  
83 Long-Term Ecological Research Network (US-LTER) (Fu et al., 2010; Sr et al., 2003), because of its flexibility and accuracy  
84 (Schelde et al., 2011). Also, with this process, methods based on soil moisture data have become one of the most promising ways to  
85 quantify *SWBC* information in different ecosystems (Li et al., 2010). So far, however, almost no work have been published on testing  
86 the potential of using a soil moisture database as a method to systematically estimate all the *SWBCs* of farmland in dry lands,  
87 including the desert oasis of the middle HRB (Liu et al., 2015), where the principal soils are coarse-textured (Grayson et al.,  
88 1999; Yang et al., 2018b). As one of the efforts in this region, intensive TDR measurements of soil moisture were conducted in a  
89 long-term field experiment that was originally designed to test the accumulative impacts of different cropping systems (i.e., maize  
90 and alfalfa) and agronomic manipulation (i.e., succession cropping, crop rotation, row intercropping) on soil property evolution in  
91 the ecotones of desert and oasis. Exploring a reliable farmland *SWBC* estimation model can make the most of the vast amounts of  
92 soil moisture data, and crucial for irrigation management optimization (Musters and Bouten, 2000; Sharma et al., 2017), especially  
93 for irrigating arid regions with coarse-textured soils.

Based upon a soil moisture database, as mentioned above, this work aimed 1) to investigate the performance of using soil moisture measurements to determine  $ET$  and other  $SWBCs$  in the croplands of a desert oasis, serving as a framework for farmland  $SWBC$  estimation for coarse-textured soils; 2) to estimate the effects of different cropping systems and agronomic histories, on the hydrophysical soil properties, and to discuss these effects on the practical application of our method in different fields; and 3) to determine the potential for using a soil-moisture data-based method to improve irrigation strategies in a desert oasis.

## 2. Materials and Methods

### 2.1 Study area

The study sites were located in the transition zone between the Badain Jaran Desert and the Zhangye Oasis in the middle HRB (Fig. 1). More specifically, they were in the Linze Inland River Basin Research Station of the Chinese Academy of Science (39°21'N, 100°17'E, altitude 1382m). This region has a temperate continental desert climate. The annual average temperature is about 7.6°C, and the **minimum and maximum temperatures are -27°C and 39.1°C**, respectively. The annual average precipitation is 117 mm and the mean potential evaporation is about 2,366 mm/a (Liu et al., 2015). The annual dryness index (**defined as the ratio of potential evaporation to precipitation**) is 15.9, **which is a common value for the arid northwestern China**. About 60% of the total precipitation, with low rainfall intensity, is received during July–September, with only 3% occurring during winter. Northwest winds prevail throughout the year, with intense sandstorm activity in spring. This region was part of a sandstorm-eroded area, and the research site was converted into an artificial oasis during the 1970s. As a result, the soil types are dominated by sandy loam and sandy soil (**which are two soil types most widely distributed in arid and semiarid environments, and thus important for potential agricultural production in these regions**), and characterized by rapid infiltration (Zhao et al., 2010). The local dominant species are *Scots pine*, *Gansu poplar*, *wheat*, and *maize* (Liu et al., 2015), and sand-fixation plant species (planted since the 1970s), including *Haloxydon ammodendron*, *Elaeagnus angustifolia*, *Tamarix ramosissima*, *Nitraria sphaerocarpa*, and annual herbaceous species such as *Bassia dasyphylla*, *Halogeton arachnoideus*, *Suaeda glauca* and *Agriophyllum squarrosum*. The growing season of these plants and forages usually starts in early April and normally continues through the month of September (**Day of year or DOY 94–288, with temperature larger than 0°C**).

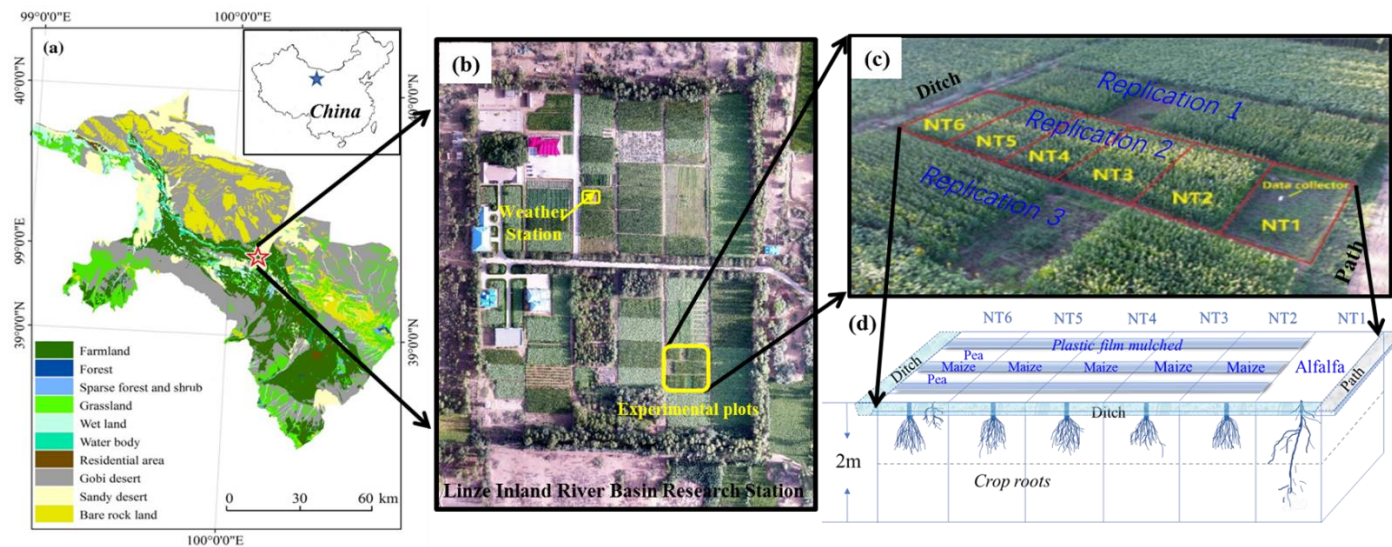

**Figure 1.** a) Map of study area and research site; b) aerial view of the Linze Inland River Basin Research Station, c) aerial view of the study site; d) detailed design of the field experiments in 2016.

### 2.2 Site description

In order to investigate the accumulative effect of different cropping systems and agronomic manipulation on soil property evolution, a long-term field experiment with six different treatments was set up in 2007, **and will run as long as the funding allows**. The experiment was performed with randomized complete block design with three replications (Figs. 1b and 1c), so that in total, 18 plots of 6m × 9m were established. We assumed that the soil texture and cultivation history (about 40 years) of the plots subjected to the different treatments were essentially identical before the experiment was conducted. The middle area of the three replications (6

plots, NT1 to NT6, (Fig. 1d) was selected for installing the TDR sensors. The applied treatments of NT1 to NT6 were sequentially as follows: (1) continuous pasture cropping; (2) continuous maize cropping; (3) continuous maize cropping with straw return; (4) maize-maize-pasture rotation; (5) maize-pasture rotation; (6) maize-pasture intercropping. Plastic film mulching was applied during the initial growing season, and furrow irrigation was selected for this experiment because it was the most widely used irrigation type in the study area, and even the entire northwestern China (Zhao et al., 2015). In 2016, NT1 was planted in alfalfa without plastic film mulch; NT2 to NT5 in maize with plastic film mulch; and NT6 in interlaced maize (mulched) and peas (non-mulched) (Fig. 1d). Maize and peas are annual crops, and about 80% of the maize roots were distributed in the soil layers between 0 and 40 cm. Only a few maize roots can reach 100 cm, while pea roots are usually found within 30-cm depth. Alfalfa is a perennial forage legume which normally lives four to eight years, and about 70% of alfalfa roots were distributed in the soil layers between 0 and 30 cm; only a few alfalfa roots can reach 110 cm in the sandy soils of this region (Sun et al., 2008). The growing season of maize and alfalfa in the region is usually from early April until late September (Zhao and Zhao, 2014). Alfalfa was harvested twice during the growing season of 2016. Harvest 1 was conducted on 16 July, and the subsequent re-growth was harvested on 28 September (Su et al., 2010).

The mean temperature of the growing season in 2016 was 27.12°C, or 3.12 degrees Celsius warmer than the long-term average of the growing seasons in 2007-2016 (24.0°C), and the mean rainfall during the period was about 60.2 mm, or 47 percent less than the long-term average of 115.4 mm (2005-2016), indicating that the weather was hotter and drier during the growing season in 2016 than in the previous ten years. The groundwater table depth fluctuated from 5 to 8 m at the experimental field during the year 2016. Irrigation with water extracted from a nearby pumping irrigation well was applied one by one in the plots from NT6 to NT1 during each irrigation event, and this work was usually completed in 3 hours or less. The power consumption of the pumping irrigation well was recorded as an in-situ observation to obtain the actual total irrigation amount of all plots through a well-built relationship at field scale: i.e., it obtained the average actual irrigation amount of the six plots. The in-situ soil moisture measurements were carried out since 2015, and was designed to continue until the long-term field experiment is ended. The volumetric soil moisture of the six plots (NT1 to NT6) was measured with a TDR system (5TE, Decagon Devices Inc. Pullman, WA, USA), which was installed at 5 different depths (20, 40, 60, 80, and 100 cm) at each plot, with measurement intervals of 10 minutes. Before use, the TDR was calibrated from soil columns in the laboratory with known volumetric water content ( $\theta_v$ ). A maximum likelihood fitting procedure was used to correct the observed data to eliminate the potential errors induced by the soil texture and salinity (Muñoz-Carpena, 2004). Soil bulk density ( $\rho_b$ ), vertical saturated hydraulic conductivity ( $K_s$ ), and soil water retention were determined using standard laboratory procedures on undisturbed soil cores in steel cylinders (110 cm<sup>3</sup> in volume, 5 cm in height) taken at 20-cm intervals down to 100-cm depth. Soil water retention curves were measured at the pressure heads of -0.01, -0.05, -0.1, -0.2, -0.4, -0.6, -0.8, -1, -2, -5, -10, -15, -20, and -25 bars.  $K_s$  was measured with an undisturbed soil core using the constant head method, i.e., measured 36 h after saturated water flow at a constant head gradient (5 cm) (Salazar et al., 2008). The values of field capacity ( $\theta_{fc}$ ) and wilting point ( $\theta_w$ ) were empirically related to the corresponding soil water (matrix) potentials through the determined soil-water retention curves (-0.1 bar for  $\theta_{fc}$  and -15 bar for  $\theta_w$ ). Hourly climatic data, including precipitation, temperature, radiation, wind, and potential evaporation were recorded by a weather station located about 150 meters away from the experimental site (Fig. 1).

## 2.3 Calculation methods

### 1) Water storage and irrigation amounts

Soil water storage ( $S$ ) was calculated for the soil depth within the root zone (0-110 cm) based on the sensor readings through the equation (see Table 1 for a list of symbols used in this paper):


$$S = \sum_{i=1}^5 \theta_i Z'_i \quad (1)$$

where  $\theta_i$  is the soil moisture of layer  $i$ ; and  $Z'_i$  is the layer thickness between 10 cm above and 10 cm below the sensor installation depth (except for the top 30-cm soil layer, which is represented by the TDR installed at 20cm). At the field level, examples of inflows are irrigation and rainfall, and examples of outflows are evaporation and deep leakage beyond the root zone. An irrigation event usually lasted 20 to 30 minutes in each of the independent plots depending on the growth stages of the plants. Soil moisture increased rapidly following irrigation events and decreased quickly as well during the subsequent dry-down period. Rapid drying usually occurs for a few hours after a soil has been thoroughly wetted because of high water conductivity (Fig. 2). The preferential

171 flow was neglected in the selected soil profiles because the larger hydraulic conductivity of sandy soil itself neutralizes the effects  
 172 of preferential flow, and because coarse soil is relatively inimical to the formation of stable preferential flow paths (Hamblin, 1985).  
 173 **Due to** the relatively short irrigation times that hampered the form of the steady infiltration rate (Bautista and Wallender, 1993; Selle  
 174 et al., 2011), we hypothesized that no surface-water excess or steady-state flow took place during any irrigation event, and assumed  
 175 that deep percolation began after soil moisture storage reached maximum. **The** irrigation volume ( $V$ ) could be calculated as the  
 176 difference between  $S_{max}$  and  $S_{ini}$ :

$$V = S_{max} - S_{ini} \quad (2)$$

177 where  $S_{max}$  is the **recorded** maximum soil water storage of the root zone (0-110cm) after one irrigation event began and  $S_{ini}$  is  
 178 the initial soil water storage of the root zone before irrigation (Fig. 2a). Although the deep percolation of NT2 in this irrigation event  
 179 had begun before its soil moisture storage reached maximum (Fig. 2b), it had little effect on the estimation of irrigation volume  
 180 because the maximum soil water storage differed little (by only 1.86 mm) before and after deep percolation began. We checked all  
 181 sixty of the irrigation events of NT1-NT6 during the entire growing season period, and there were no underestimates of  $S_{max}$   
 182 except for two irrigation events in NT2, which **only** had a slight underestimates of 1.86 mm and 10.3 mm, **and** generated errors of  
 183 1.1% and 4.1%, respectively.

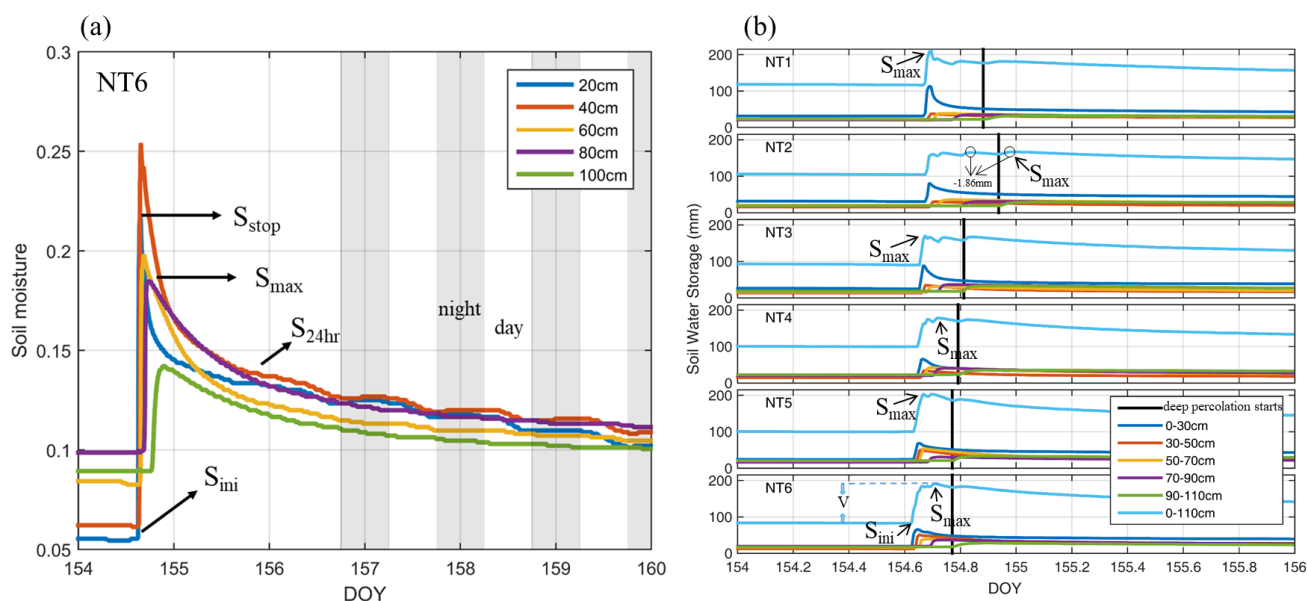

185 **Figure 2. (a)** Example diagram of the volumetric soil water content at various depths of NT6 during and after the irrigation event of 107.1 mm on  
 186 DOY (day of year) 154-160 (2016).  $S_{stop}$ : irrigation event ends, and moisture of uppermost soil layer starts to decrease;  $S_{max}$ : maximum water  
 187 storage, **and the real water storage in root-zone soil was assumed to be equal to  $S_{max}$** ;  $S_{24hr}$ : deep percolation ends one day later; after this point,  
 188 ET dominates the water-loss processes;  $S_{24hr}$  would tend to approach  $S_{max}$  if more soil moisture sensors were installed in the soil profile;  $S_{ini}$ : pre-  
 189 irrigation, soil moisture minimum. The gray stripes between 156-160 DOY represent nights, i.e., 6:00 pm to 6:00 am of the next day. **(b)** Verification  
 190 of the assumption of equation 2, i.e., that  $S_{max}$  appeared before deep percolation began, during the irrigation event on DOY 154-156 (2016). The  
 191 black solid line represents the time that deep percolation began in each plot (NT1-6).  
 192

## 193 2) Drainage and evapotranspiration

195 Following irrigation water applications, the drainage behavior of the soils consisted of two stages: 1) rapid drainage and 2) slow  
 196 drainage. During irrigation, the root zone became effectively saturated, and rapid drainage followed, leading to deep percolation.  
 197 Then, as the water content in the soil fell, the hydraulic conductivity decreased sharply, as did the rate of drainage. The second phase,  
 198 slow drainage, may continue for several days or months, depending on the soil texture (Bethune et al., 2008). We assumed that rapid  
 199 drying or drainage ceased 24 hours after an irrigation event, and thus rapid drainage ( $Q_1$ ) could be estimated through the variances  
 200 of water storage and actual ET during the period (Eq. 3). The actual ET during the period was assumed to be equal to the potential  
 201 ET, because ET occurs unhindered under non-water-stress conditions.

$$Q_1 = S_{max} - S_{24hr} - ET_p \quad (3)$$

202 where  $S_{24hr}$  is the soil moisture storage 24 hours after irrigation;  $S_{max}$  is the maximum water storage after irrigation; and  $ET_p$   
 203 is the potential ET calculated with the Penman-Monteith combination equation during that day.

205 Slow drainage is especially important for sandy soils (Bethune et al., 2008), as along with ET, it **dominates** the water loss processes

during the second drying stage before the next irrigation event. Following Zuo et al. (2002) and Guderle and Hildebrandt (2015), an inverse method was employed to estimate the slow drainages and the average root water uptakes by solving the mixed theta-head formulation of the 1-D Richards Equation (Eq. 4) and iteratively searching for the sink term profile that produces the best fit between the numerical solution and the measured values of soil moisture content. ET is then obtained by summing rainfall and the sink term ( $S_p$ ), and the drainage for this period is estimated as the water flux across the lower boundary of the soil profile. The above-mentioned 1-D Richards Equation is written as:

$$C(h) \frac{\partial h}{\partial t} = \frac{\partial}{\partial t} \left[ K(h) \left( \frac{\partial h}{\partial z} - 1 \right) \right] - S_p(z, t); \quad (4)$$

$$h(z, 0) = h_0(z) \quad 0 \leq z \leq L; \quad (5)$$

$$\left[ -K(h) \left( \frac{\partial h}{\partial z} - 1 \right) \right]_{z=0} = -E(t) \quad t > 0; \quad (6)$$

$$h(L, t) = h_l(t) \quad t > 0 \quad (7)$$

where  $h$  is the soil matric potential (cm);  $C(h)$  the soil water capacity ( $\text{cm}^{-1}$ );  $K(h)$  the soil hydraulic conductivity ( $\text{cm d}^{-1}$ );  $h_0(z)$  the initial soil matric potential in the profile (cm);  $E(t)$  the soil surface evaporation rate (cm);  $h_l(t)$  the matric potential at the lower boundary (cm);  $L$  the simulation depth (cm); and  $z$  the vertical coordinate originating from the soil surface and moving positively downward (cm). The iterative procedure runs the numerical model over a given time step ( $\Delta t$ ) in order to estimate the soil water content profile  $\bar{\theta}_i^{v=0}$  at the end of the time step, assuming that the sink term  $\bar{S}_{p_{im,i}}^{(v=0)}$  is zero over the entire profile at the beginning, where  $\sim$  depicts the estimated values at the respective soil layer  $i$ , and  $v$  indicates the iteration step. Next, the sink term profile  $\bar{S}_{p_{im,i}}^{(v=1)}$  is set equal to the difference between the previous approximation  $\bar{\theta}_i^{v=0}$  and the measurements  $\theta_i$ , while accounting for soil layer thickness and the length of the time step for units. In the following iterations,  $\bar{S}_{p_{im,i}}^{(v)}$  was used with the Richards equation to calculate the new soil water content  $\bar{\theta}_i^v$ . The new average sink term  $\bar{S}_{p_{im,i}}^{(v+1)}$  was then determined with Eq. (8):

$$\bar{S}_{p_{im,i}}^{(v+1)} = \bar{S}_{p_{im,i}}^{(v)} + \frac{\bar{\theta}_i^v - \theta_i}{\Delta t} \cdot d_{z,i}; \quad (8)$$

A backward Euler with a modified Picard iteration finite differencing solution scheme was adopted to inversely obtain the solution, and this implementation follows exactly the algorithm outlined by Celia et al. (1990). Three steps proposed by Guderle and Hildebrandt (2015) were taken to determine when the iteration process could be terminated in this calculation:

- a. Evaluate the difference between the estimated and measured soil water contents ( $e_i^{(v)}$ , Eq. 9) and test the change between this difference to the difference from the previous iteration ( $\epsilon_{GH,i}^{(v)}$ , Eq. 10):

$$e_i^{(v)} = |\theta_i - \bar{\theta}_i^v| \quad (9)$$

$$\epsilon_{GH,i}^{(v)} = |e_i^{(v-1)} - e_i^{(v)}| \quad (10)$$


- b. In soil layers where  $\epsilon_{GH}^{(v)} < 0$ , set the root water uptake rate back to the value of the previous iteration  $\bar{S}_{p_{im,i}}^{(v+1)} = \bar{S}_{p_{im,i}}^{(v-1)}$ . Only if  $\epsilon_{GH}^{(v)} \geq 0$ , go to the next step.
- c. If  $e_i^{(v)} > 1 \times 10^{-4}$ , calculate  $\bar{S}_{p_{im,i}}^{(v+1)}$  according Eq. (8); otherwise the current iteration sink term ( $\bar{S}_{p_{im,i}}^{(v+1)} = \bar{S}_{p_{im,i}}^{(v)}$ ) is retained, as it results in a good fit between estimated and measured soil water content. More detailed procedures can be found in Guderle and Hildebrandt (2015).

### 3) Boundary setting and data collection

To reduce computational complexity, uniform soil profiles were assumed because there were no significant stratification differences within the sandy soils (Table 2) (Liu et al., 2015). The upper boundary of the calculation was set as the atmospheric boundary condition, and the calculation involved actual precipitation, irrigation, and potential evapotranspiration rates determined through Penman-Monteith combination equations driven by hourly environmental data during the growing season of 2016 (Fig. 3). The meteorological measurements were monitored at the nearby weather station (150 m away from our study plots, Fig. 1), which had the same underlying surface as the experimental plots (Fig. 1b), and were used to compute the upper boundary condition. The film mulching effects on the upper boundary condition were modeled as proportionally damped  $ET_{p,a} = \beta \times ET_p$ , where  $\beta$  is the area percentage without plastic film mulching in each experimental plot (i.e., 60%), and  $ET_p$  is the potential ET. For coding convenience, the bare soil evaporation ( $E_a$ ) was determined through a simplified method proposed by Porporato et al. (2002): i.e., the evaporation was assumed to linearly increase with soil moisture ( $\theta$ ) from 0 at the hygroscopic point ( $\theta_h$ ), to  $E_{p,a}$  at the field capacity ( $\theta_{fc}$ ). For

249 values exceeding the field capacity, evapotranspiration was decoupled from soil moisture and remained constant at  $E_{p,a}$ . However,  
 250 we did not set specific upper boundaries for inter-cropping treatments, because the difference in surface soil evaporation between  
 251 mono- and inter-cropping treatments was relatively small when compared with the transpiration over a growing season. The surface  
 252 fluxes were incorporated by using the average hourly rates, distributed uniformly over each hour. The lower boundary was set as a  
 253 **free-drainage boundary condition** because the groundwater table depth (deeper than 3.5 m) was far below the crop effective root  
 254 depth during the growing season, and any capillary rise from groundwater could be ignored in this study. The drainage rate  $q(n)$   
 255 assigned to the bottom node  $n$  was determined by **programming in MATLAB environment** as  $q(n) = -K(h)$ , where  $h$  is the local  
 256 value of the pressure head and  $K(h)$  is the hydraulic conductivity corresponding to this pressure head (Odofoin et al., 2012).

257 We used soil moisture dynamics measured in the soil profiles as inputs to inversely solve for sink term profiles at each plot for each  
 258 hour (Lv, 2014). The soil moisture measurements for 10-minute intervals during the period were hourly averaged to numerically  
 259 filter out the noise associated with highly resolved data. This had the effect of slightly reducing the infiltration and ET estimates,  
 260 but this effect in the overall results is negligible, according to Guderle and Hildebrandt (2015). The actual amount of water delivered  
 261 for irrigation ( $Q_0$ ) was determined from the power consumption of water pumping ( $P_0$ ), through a relationship established between  
 262 the two:  $Q_0 = P_0 \times \eta$ , where  $\eta$  is the ratio of the power consumption per unit water pumped and is likely to be different for  
 263 different pumping heads. The coefficient was experimentally determined to be  $8.5 \text{ m}^3 \text{ kW}^{-1} \text{ h}^{-1}$  for a head corresponding to 0.95  
 264  $\text{kg/cm}^2$  of delivery pressure, in this study.

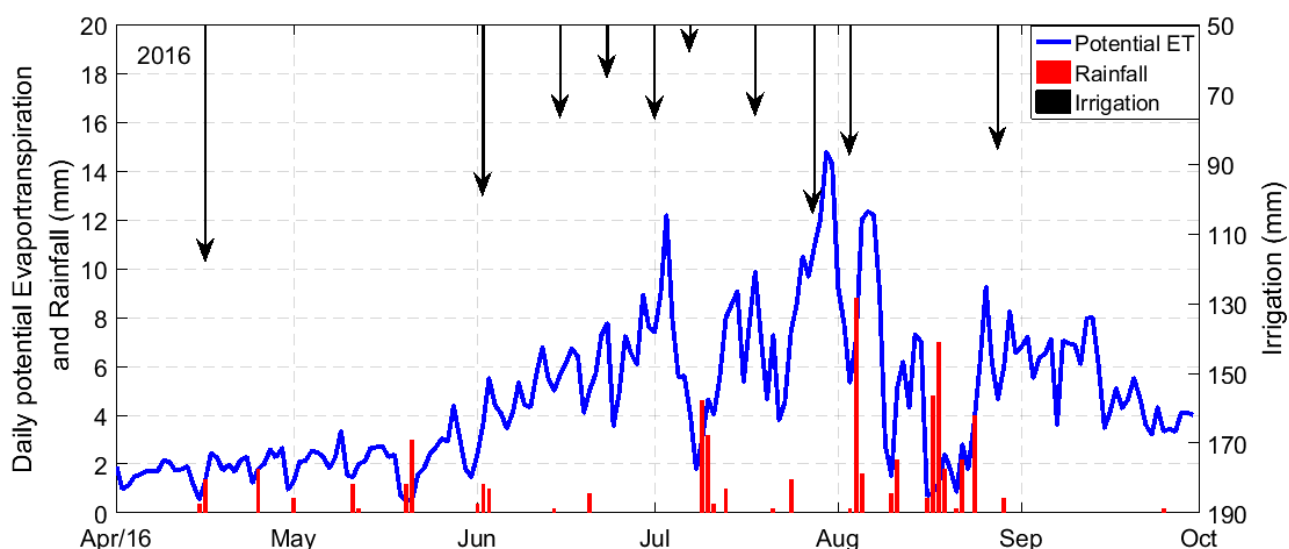

265 **Figure 3.** Measured daily rainfall and potential ET estimated with the Penman-Monteith method during the growing season of 2016 at Linze  
 266 Station. The cumulative rainfall during the growing season was 69.2mm in 2016, and the black down arrows represent irrigation events and  
 267 average depths of water applied to the six plots in the events.  
 268  
 269

270 **Table 1.** List of symbols and their description

$V$	irrigation amount for one irrigation event (mm)	$K(h)$	soil hydraulic conductivity ( $\text{cm d}^{-1}$ )
$S$	soil water storage (mm)	$h_0(z)$	initial soil matric potential in the profile (cm)
$S_{\text{stop}}$	soil moisture storage when irrigation was stopped (mm)	$E(t)$	soil surface evaporation rate (cm)
$S_{\text{ini}}$	soil moisture storage before irrigation start (mm)	$h_l(t)$	matric potential at the lower boundary (cm)
$S_{24\text{hr}}$	soil moisture storage 24 hours after irrigation (mm)	$L$	simulation depth (cm)
$S_{\text{max}}$	maximum soil water storage during irrigation event (mm)	$z$	vertical coordinate originating from the soil surface and moving positively downward (cm)
$\theta_i$	volumetric soil water content of layer $i$	$\tilde{\theta}_i^{v=0}$	soil water content profile of soil layer $i$ at the beginning of each calculation
$\theta_0$	theoretical volumetric water content calculated by the ratio of soil volume to water volume	$\tilde{S}p_{\text{tm},i}^{(v=0)}$	sink term of soil layer $i$ at the beginning of irrigation, assuming it is zero
$\eta$	ratio of the power consumption per unit water pumped	$d_{z,i}$	thickness of soil layer $i$
$t$	time	$\sim$	estimated values at soil layer $i$
$Q$	steady-state drainage (mm)	$v$	iteration step
$ET_p$	potential ET during irrigation day (mm)	$\tilde{\theta}_i^v$	soil water content of step $v$
$Z'_i$	detection range of TDR, i.e., 20 cm	$\tilde{S}p_{\text{tm},i}^{(v)}$	average sink term of step $v$
$S_p$	sink term, i.e., water extraction by roots, evaporation, etc. (cm)	$\Delta t$	given time step
$h$	soil matric potential (cm)	$\epsilon_{GH,i}^{(v)}$	difference between $e_i^{(v-1)}$ and $e_i^{(v)}$
$C(h)$	soil water capacity ( $\text{cm}^{-1}$ )	$e_i^{(v)}$	difference between estimated and measured soil water content
$Q_0$	real amount of water delivered for irrigation ( $\text{m}^3$ )	$P_0$	power consumption (kW/h)



$D_{seas}$	theoretical drainage volume over entire growing season in 2016 (mm)	$R_{seas}$	cumulative rain fall during entire growing season in 2016 (mm)
$V_{seas}$	theoretical irrigation volume over entire growing season in 2016 (mm)	$ET_{seas}$	theoretical ET volume during entire growing season in 2016 (mm)
$\Delta S$	difference in soil water storage before and after the growing season (mm)	$\rho_b$	soil bulk density ( $g/cm^3$ )
$K_s$	saturated water conductivity (cm/day)	$\theta_s$	saturated water content
$\theta_{fc}$	field capacity	$\theta^*$	water stress point
$\theta_w$	wilting point	$\Psi$	soil water (matric) potential
$\theta_h$	hygroscopic point	$\beta$	the area percentage without plastic film mulching
$E_a$	bare soil evaporation	$E_{p,a}$	bare soil evaporation when soil moisture at field capacity

## 3. Results

### 3.1 Soil hydrophysical characteristics

An accurate measurement of soil hydraulic parameters is crucial for this inverse method and is helpful in explaining the movement of soil water flow. A summary of the most important soil hydrophysical characteristics of the soils at 0–100-cm depth (NT1 to NT6, and two other representative fields) in relation to their capacity for water storage is listed in Table 2. The textures were largely loamy sandy in the plots NT1-NT6, in contrast to the sandy loam soil in an old oasis field with a long tillage history (~100 years) and sandy soil in the desert with no tillage history. Their bulk densities were generally between 1.4 and 1.5  $g/cm^3$ —slightly higher than that in the local desert land, but still lower than that in maize fields of the old oasis.  $\theta_s$ ,  $\theta_{fc}$  and  $\theta_w$  of the plots showed the same tendency of increasing soil hydrophysical properties (toward better water retention) as the bulk densities (Table 2). However, those parameters of the soil profiles are very similar to each other, especially between the same soil depths (horizontal) of the plots, suggesting that the different planting systems had similar influences on the soil hydrophysical properties, at least at the scale of 10 years. The effects of different cropping systems on soil moisture release characteristics are shown in Fig. 4. As expected, the relationship between soil water potential and volumetric water content across all data and treatment combinations followed a curvilinear pattern, where the water potential increased exponentially as soil water content increased.


The large and varying values of saturated drainage velocity ( $K_s$ ) showed a great drainage potential in the coarse-textured soil and an obvious heterogeneity in both horizontal and vertical profiles across the six plots (Table 2). Soil moisture characteristic curves (SMC) in the six profiles are shown in Fig. 4, which indicates almost the same soil water content for all the plots, NT1-NT6, under the same suction head; i.e., all the soil profiles were nearly saturated when the water potential reached the -0.01 bar and little was available after the soil water potential dropped to the -15 bar. Two obvious inflection points were observed, at  $\theta \cong 0.08$  and 0.3,  $\psi \cong -0.32$  and -15.2 bar in each of the soil moisture characteristic curves from NT1-NT6. The slopes of the soil water potential-moisture, especially the parts between the inflection points of the six plots, were very close to each other, and also similar to that of the desert soil, suggesting similarly poor water capacities of the sandy soils (Sławiński et al., 2002). A very significant difference in water capacities was observed when comparing the SMC of NT1-NT6 with that of the old oasis field, indicating that a considerably long period of time is still needed, for high soil water capacity to evolve, for these experimental sites.

**Table 2.** Soil physical characteristics in the six experimental plots and two other selected plots around the study site

	NT1					NT2					NT3					NT4				
	$K_s$	$\rho_b$	$\theta_s$	$\theta_{fc}$	$\theta_w$	$K_s$	$\rho_b$	$\theta_s$	$\theta_{fc}$	$\theta_w$	$K_s$	$\rho_b$	$\theta_s$	$\theta_{fc}$	$\theta_w$	$K_s$	$\rho_b$	$\theta_s$	$\theta_{fc}$	$\theta_w$
20 cm	47.2	1.38	0.36	0.25	0.09	183	1.46	0.34	0.19	0.08	44.3	1.40	0.36	0.21	0.09	54.1	1.39	0.38	0.21	0.08
40 cm	46.8	1.55	0.33	0.21	0.06	82.1	1.55	0.32	0.15	0.05	259	1.54	0.34	0.18	0.06	266	1.50	0.36	0.17	0.06
60 cm	166	1.48	0.35	0.20	0.06	118	1.53	0.34	0.20	0.05	73.8	1.53	0.35	0.19	0.05	355	1.47	0.36	0.16	0.06
80 cm	61.0	1.45	0.33	0.17	0.05	164	1.48	0.35	0.18	0.05	1007	1.46	0.35	0.18	0.05	192	1.47	0.35	0.20	0.06
100 cm	273	1.46	0.34	0.18	0.05	99.7	1.49	0.34	0.15	0.05	46.1	1.44	0.35	0.16	0.05	80.0	1.40	0.37	0.23	0.06
$\bar{x}$	119	1.46	0.34	0.20	0.06	129	1.50	0.34	0.17	0.06	286	1.47	0.35	0.18	0.06	189	1.45	0.36	0.19	0.06
$SD$	99.6	0.06	0.01	0.03	0.02	42.8	0.04	0.01	0.02	0.01	413	0.06	0.01	0.02	0.02	126	0.05	0.01	0.03	0.01
	NT5					NT6					Maize field in old oasis					Local desert land				
	$K_s$	$\rho_b$	$\theta_s$	$\theta_{fc}$	$\theta_w$	$K_s$	$\rho_b$	$\theta_s$	$\theta_{fc}$	$\theta_w$	$K_s$	$\rho_b$	$\theta_s$	$\theta_{fc}$	$\theta_w$	$K_s$	$\rho_b$	$\theta_s$	$\theta_{fc}$	$\theta_w$
20 cm	121	1.42	0.37	0.24	0.09	89.6	1.50	0.32	0.25	0.09	28.8	1.61	0.38	0.29	0.11	42.5	1.46	0.36	0.16	0.05
40 cm	168	1.46	0.34	0.19	0.07	575	1.53	0.33	0.20	0.06	20.2	1.61	0.37	0.28	0.12	48.1	1.46	0.35	0.17	0.05
60 cm	41.3	1.39	0.40	0.29	0.09	66.5	1.45	0.37	0.18	0.05	37.4	1.56	0.38	0.28	0.10	30.9	1.44	0.39	0.20	0.07
80 cm	38.3	1.49	0.37	0.21	0.05	331	1.50	0.34	0.18	0.04	76.3	1.59	0.37	0.24	0.09	33.3	1.45	0.33	0.18	0.05
100 cm	671	1.47	0.34	0.19	0.06	18.6	1.47	0.35	0.14	0.04	47.5	1.58	0.40	0.29	0.12	26.9	1.43	0.28	0.17	0.03
$\bar{x}$	208	1.45	0.36	0.22	0.07	216	1.49	0.34	0.19	0.06	42	1.59	0.38	0.28	0.11	36	1.45	0.34	0.17	0.05
$SD$	265	0.04	0.02	0.04	0.02	234	0.03	0.02	0.04	0.02	22	0.02	0.01	0.02	0.01	9	0.01	0.04	0.02	0.01

$K_s$ : saturated water conductivity (cm/day);  $\rho_b$ : bulk density ( $g/cm^3$ );  $\theta_s$ : saturated water content (100%);  $\theta_{fc}$ : field capacity (100%) and  $\theta_w$ :

wilting point (100 %);  $\bar{X}$ : mean value of the five soil layers;  $SD$ : standard deviation of the five soil layers.

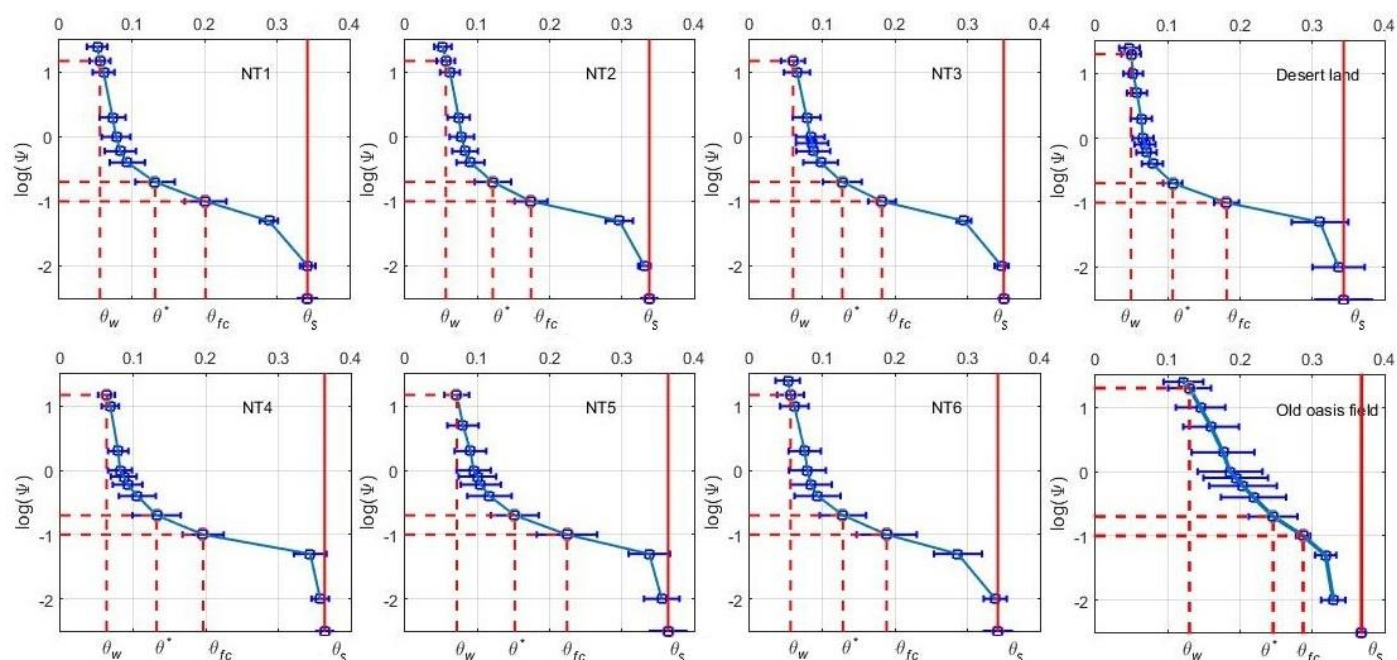

300

301 **Figure 4.** Soil moisture characteristic curve (SMC) of uniform soil profiles of the six experimental plots and two other representative fields. Soil  
 302 field capacity ( $\theta_{fc}$ ), wilting point ( $\theta_w$ ), and water stress point, i.e., point of incipient stomatal closure ( $\theta^*$ ) are empirically related to the  
 303 corresponding soil matric potentials (-0.1 bar for  $S_{fc}$ , -0.2 bar for  $\theta^*$  and -15 bar for  $S_w$ ); the blue horizontal line represents the error bar, and  
 304 the solid red line represents saturated water content ( $\theta_s$ ), which was obtained via the traditional soil drying method with 3 repetitions in each  
 305 layer; for soil water (matric) potential ( $\Psi$ ) take the absolute value, for example, -0.01 bar is equal to -2 on the Y axis.


### 306 3.3 Soil moisture dynamics (SMDs)

307 Checking the soil water dynamic of the entire growing season can help us verify the boundary setting and affirm the assumption  
 308 about the irrigation estimation used. Fig. 2a shows an example of the soil water content responses at various depths of NT6 during  
 309 and after the irrigation event of 107.1 mm on DOY 154 (in 2016). TDR measurements exhibited a sharp increase when irrigation  
 310 began and then decreased rapidly as it was turned off, due to the poor water-holding capacity of the sandy soil. The increase in water  
 311 content occurred layer by layer from the upper horizons, suggesting limited influence from potential preferential flow (Liu and Lin,  
 312 2015), while the rapid moistening of the deep horizons could imply the existence of water loss by drainage. The greatest rate decrease  
 313 in water content was observed in the top 20 cm of soil. During the 12 h after irrigation, the water content at the top sensor decreased  
 314 from 21.9% to 14.2%. For the same interval of time, the water contents in the 40-, 60-, 80- and 100-cm depths of soil decreased  
 315 from 25.4%, 19.8%, 18.5%, 14.2% to 15.7%, 14.3%, 15.4%, 12.8%, respectively. After irrigation ended, water continued to move  
 316 down the soil profile; and thus, the top part of the profile was continuously losing water to the soil below it. The lower soil horizons  
 317 were leaching water into the horizon below but at the same time were receiving water that had drained from the horizon immediately  
 318 above, resulting in lower rates of decrease in water content for these layers than for those at the top horizon (20 cm) (Fares and Alva,  
 319 2000). Very similar patterns of changes in water content were observed through the six different soil profiles.

320 The average field capacity value ( $\theta_{fc}$ ) of NT1-6 determined from laboratory measurement of soil water release curves was 19.2%  
 321 (i.e., 20%, 17%, 18%, 19%, 22% and 19% for NT1-6 respectively). Twenty-four hours after the end of irrigation (June 3, 2016), the  
 322 soil moisture values for the all the measured horizons (20-100 cm depth) of NT1-6 ranged between 8.9% and 16.9% (13.7-15.7%,  
 323 13.7-15.1%, 8.9-14.5%, 9.6-16.9%, 11.7-15.3% and 12.3-14.2% for NT1-6 respectively), lower than the field capacity (Figs. 2 and  
 324 5), suggesting that the rapid drainage of water away from the root zone soil (0-100 cm) was terminated during the period, as expected.  
 325 In the mornings of the subsequent days, the decrease in soil moisture again sped up as the evaporative demand of the atmosphere  
 326 gradually increased. In the absence of any irrigation during the subsequent nights, a slow-down in the decrease or even a very light  
 327 increase, in the soil moisture content was observed in the top soil layer (Fig 2). According to the data, there was also no obvious  
 328 response of soil moisture regimes to precipitation, indicating a very limited contribution of rainfall to the soil water storage compared  
 329 with irrigation. In fact, more than 90% of the rainfall events in this region are less than 5 mm (Fig. 3), and canopy interception

330 (about 2-5 mm) may have hampered any effective infiltration from those insufficient precipitation events.

331

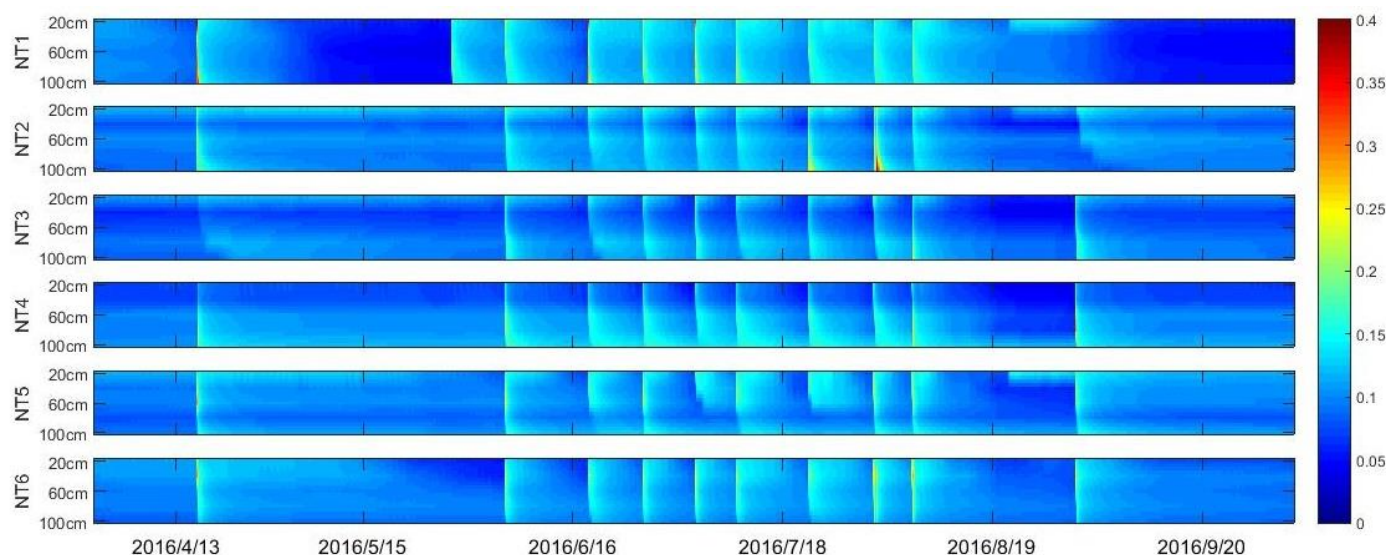

332

333 **Figure 5.** Spatial and temporal variations of soil water content with a time resolution of ten minutes. The color bar on the right side represents  
 334 volumetric soil water content. Time period was from Apr. 1 to Oct. 1, 2016. Irrigation events for NT2-6 occurred on 4/16, 6/2, 6/15, 6/23, 7/1, 7/7,  
 335 7/18, 7/28, 8/3, and 8/28. NT1 had one more irrigation event on 5/25 and one less on 8/28.

### 336 3.3 Soil water budget components (SWBCs)

337 The estimated soil water budget components, including total irrigation, **evapotranspiration** and deep percolation, at the six different  
 338 plots during the growing season of 2016 are summarized in Table 3, Fig. 6 and Fig. 7. **Irrigation applications began in mid-April**  
 339 **and continued until late September, every 5 to 25 days, depending upon moisture content and crop growth (Fig. 3). A total of 10**  
 340 **irrigation events were sequentially applied through furrow irrigation for the plot during the entire growing season. Based on the in-**  
 341 **situ observations of irrigation—i.e., the power consumption of the pumping irrigation well—the estimated irrigation volumes of the**  
 342 **six plots were averaged and tested against the observations at field scale. The estimated average cumulative irrigation volume of the**  
 343 **six plots during the entire growing season was 831.6 mm (i.e., 1187, 760, 652, 840, 683, and 867 mm for NT1-6, respectively),**  
 344 **which compares well with the actual average irrigation volume (868.8 mm) determined through power consumption, suggesting**  
 345 **that the calculated irrigation agrees closely with the real values from the farm fields when accurate irrigation and rainfall data are**  
 346 **available. A difference of 4.5% in the irrigation amount was observed between the real values and the estimated values over the**  
 347 **entire growing season of 2016, indicating a high reliability of the water balance method used in the SWBCs estimation.**

348 Evapotranspiration and deep percolation dominated the **outflows of the field** soil water budgets during the study period. A clear  
 349 trend in seasonal variation of the water budget components can be observed at the site (Fig. 7). The corresponding ET values were  
 350 very similar for all the plots. Three different stages of ET could be discriminated throughout the 2016 growing season: ET rate was  
 351 very low at the initial stage (i.e., the first 50 days of the growing season), and increased gradually as vegetation coverage became  
 352 greater with crop development, before reaching maximal values at the mid-season stage. After that, ET decreased gradually until  
 353 harvest time. The estimated daily ET values ranged largely between 0.2 and 12 mm d<sup>-1</sup>, with an average of 3 mm d<sup>-1</sup>. No significant  
 354 differences were detected in the daily ET when Duncan's multiple range test was applied at the 5% level to compare among the six  
 355 experimental plots ( $P > 0.75$ ). **A relatively large difference was observed in irrigation applied to the selected plots in this study, i.e.,**  
 356 **significantly higher cumulative irrigation volume was found at NT1.** The excess of water in the soil produced an important deep  
 357 percolation, which became greater with the increase in the irrigation quota. Among the plots, 45-79% of the input irrigation water  
 358 was consumed by way of ET (i.e. for plant growth), while the change in soil water storage before and after the growing season was  
 359 quite small. It is clear that although there was a high correlation between the volume of irrigation and that of drained water, the  
 360 superfluous irrigation amount had limited influence on the accumulated ET during the growing season.


361

362 **Table 3.** Estimated evapotranspiration and other major soil water budget components during the growing season of 2016


Cumulative SWBCs	NT1	NT2	NT3	NT4	NT5	NT6
------------------	-----	-----	-----	-----	-----	-----

Irrigation	1186.5	760.1	652.2	840.4	683.2	867.3
Drainage	651.8	288.3	170.7	340.1	212.4	364.7
Evapotranspiration	534.6	489.1	508.8	561.9	539.2	538.1
Storage diff.*	-52.7	0.17	3.6	2.2	5.44	-11.64

\* Storage differences represent the difference in soil water storage before and after the growing season.

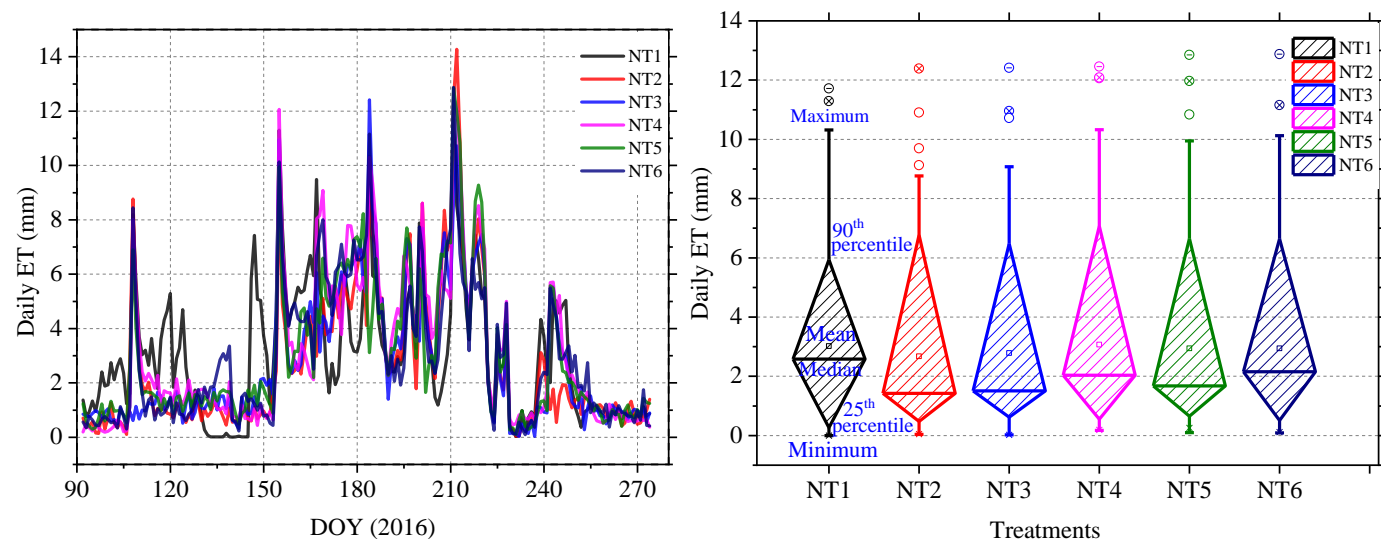

**Figure 6.** Daily ET during the growing season of 2016 as determined from the inverse Richards method: a) time series of estimated daily ET; b) box-and-whisker diagrams showing the minimum, median, 25th percentile, 75th percentile, and maximum daily ET. No significant differences were detected when Duncan's multiple range test was applied at the 5% level to compare values among the plots. *Note: DOY means day of year.*

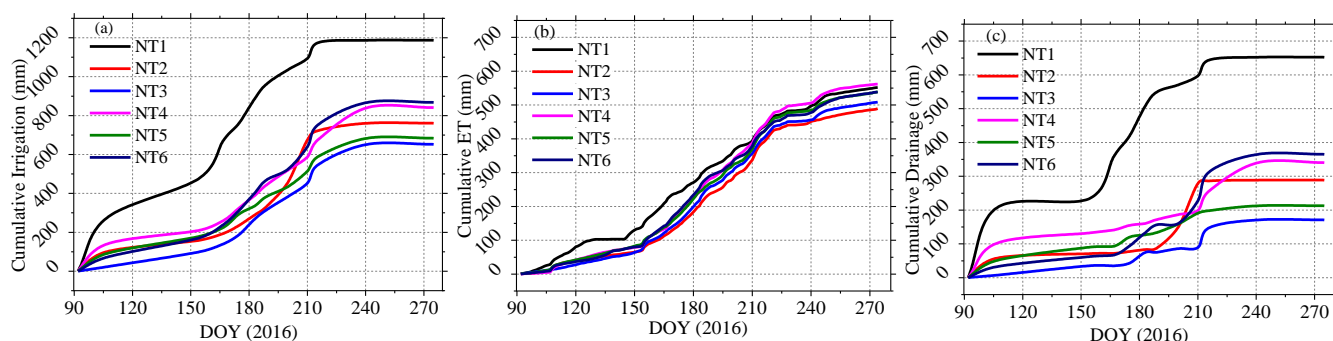

**Figure 7.** Estimated water components of the plots during the growing season of 2016: a) cumulative irrigation, b) cumulative ET, c) cumulative drainage. *Note: DOY means day of year.*

## 4. Discussion

### 4.1 Accuracy of the estimated ET

Cumulative ET values calculated from inverse Richards method ranged between 489.1 and 561.9 mm for the different treatments in 2016. The values of ET obtained from the current study are well within the range of published ET values at the nearby sites (406-778 mm), and are consistent with the averages from other studies (~585.5mm) also done in this region, including Zhao and Ji (2010); Rong (2012); Yang et al. (2015); You et al. (2015); Zhao et al. (2015), etc. for maize fields similar to the ones present at the study site (Table 4). Compared with the methods used in the literatures listed in Table 4, the soil-moisture data-based method used in this study is more reliable because it produced a better fit between the numerical solution (soil water profile calculated by the inverse Richards method) and the measured values of soil moisture content (soil water profile measured by TDR), even with vertical flow accounted for (Guderle and Hildebrandt, 2015). The narrow range of cumulative ET (489.1-561.9 mm) observed in 2016 can be attributed to the similar sandy soil texture and mesic moisture regimes caused by frequent irrigation (Figs. 4 and 5), which in turn suggested that for the unmulched alfalfa and mulched maize, both cropping systems and agronomic manipulation had limited influence on the accumulated ET during the growing season (Srivastava et al., 2017). This result is well supported by the evidence reported by early investigators, that the ET differences in different cropping systems are quite small for coarse-textured soils compared with the large differences in the amount of irrigation water (Jalota and Arora, 2002; Ji et al., 2007), and that ET is strictly a function of ambient atmospheric conditions under normal or wet conditions (Rahgozar et al., 2012).

The observed seasonal trend of ET corresponded well to the irrigation frequency and crop water consumption characteristics of the growth stage (Fig. 7), and similar patterns in the ET processes have also been reported by many other researches conducted in this region (Zhao et al., 2015; Zhao et al., 2010). Although we also noticed that the cumulative ET of NT1 was relatively higher than those of the other plots at the beginning of the growing season, this phenomenon can be largely attributed to the plastic film mulching at the other five plots. In the early growing season (seeding to emergence), soil evaporation (E) is the major part of ET (Zhao et al., 2015), and the plastic film mulching applied to NT2 to NT6 was able to significantly retain the soil moisture and thus decrease soil evaporation (Jia et al., 2006). However, the differences in the cumulative ET, between NT1 and the other plots, were quite small after the mid-growing season, most likely because with the plant canopy development, crop transpiration became the major portion of ET, and the influence of plastic film on ET diminished (Zhang et al., 2017; Qin et al., 2014; Jia et al., 2006). Another influence that may have decreased the evapotranspiration at NT1 after the mid-growing season is cutting. Cutting alfalfa lowers the leaf area index and drastically changes the effective diffusive resistance, consequently lowering the daily ET rate of alfalfa at NT1, although for a short time after cutting, evaporation from the soil surface may compensate for the decrease in transpiration (Dong et al., 2003; Su et al., 2010).

**Table 4.** Reported ET of oasis maize field in the middle Heihe River Basin (HRB)

ET (mm)	Growing period	Year	Soil type	Irrigation	Rainfall	Methods	Paper
651.6	Apr.11-Sep.18	2001	---	690	84.4	Water balance methods	(Peixi et al., 2002)
513.2	Apr.16-Sep.22	2005	Light loam	360	153.5	Bowen ratio method	(Jinkui et al., 2007)
486.2	Apr.16-Sep.22	2005	Light loam	360	153.5	Reference ET-crop coefficient method	(Jinkui et al., 2007)
777.75	Apr.21-Sep.15	2007	Sandy loam	1194	102.1	Bowen ratio method	(Zhao et al., 2010)
693.13	Apr.21-Sep.15	2007	Sandy loam	1194	102.1	Penman	(Zhao et al., 2010)
618.34	Apr.21-Sep.15	2007	Sandy loam	1194	102.1	Penman-Monteith	(Zhao et al., 2010)
615.67	Apr.21-Sep.15	2007	Sandy loam	1194	102.1	Water balance method	(Zhao et al., 2010)
560.31	Apr.21-Sep.15	2007	Sandy loam	1194	102.1	Priestley-Taylor	(Zhao et al., 2010)
552.07	Apr.21-Sep.15	2007	Sandy loam	1194	102.1	Hargreaves method	(Zhao et al., 2010)
671.2	Apr.10-Sep.20	2009	Sandy loam	797	97.7	FAO-56-PM and dual crop coefficient method	(Zhao and Ji, 2010)
640	Apr.10-Sep.20	2009	---	797	97.7	Shuttleworth-Wallace dual-source model	(Zhao et al., 2015)
570—607	Apr.22-Sep.23	2010	Loamy sand	990-1103	75	Field experiments	(Rong, 2012)
405.5	Apr.20-Sep.22	2012	Clay loam	553	95.9	Water balance and isotope methods	(Yang et al., 2015)
450.7	Apr.20-Sep.22	2012	---	430	104.9	Eddy covariance system	(You et al., 2015)
554.0	Apr.20-Sep.22	2012	---	430	104.9	Penman	(You et al., 2015)
489-562	Apr.10-Sep.20	2016	Sandy soil	652-867	60.2	Inverse method	This paper

## 4.2 Accuracy of the other estimated SWBCs

The irrigation volume of maize (NT2 to NT6) within our plots ranged between 652.2 and 867.3 mm, with an average value of 760.6 mm, which is well comparable to the range of average maize field irrigation volume in this region, i.e., a range between 604.8 and 811.4 mm reported in the Statistical Yearbook of Zhangye City for the period of 1995 to 2017 (see <http://www.zhangye.gov.cn>). When compared to the other treatments of plastic film mulching, significantly higher amounts of the applied irrigation (1186.5 mm) were found in NT1, which could be attributed to the larger percentage of infiltrating surface area and the relatively longer irrigation duration caused by rougher surface of the ground without plastic film mulching. According to Yang et al. (2018a), plastic film mulch has been widely used to increase the productivity of crops in arid or semiarid regions of China. The logic behind this approach is that plastic film mulch improves the soil physical properties, such as the soil water content and temperature in the top soil layers, and thus leads to increased plant growth and yield (Mbah et al., 2010). Our results suggested that plastic film mulching can equally reduce irrigation duration and applied water depth by lowering surface roughness and thus the friction coefficient of the ground. Similar results were also reported by earlier investigators (Zhang et al., 2017; Jia et al., 2006; Qin et al., 2014).

A less extreme but still significant difference can be found in the irrigation volumes (~652.2 to 867.3 mm) over the other five plots with plastic film mulching (NT2-6). This may be associated with the inconsistent durations caused by uneven irrigation applications, randomly rough soil surfaces, and mutation of the infiltration rate (i.e.,  $K_s$ ) across the plots (Table 2). Uneven irrigation may be further attributed to the uneven fields and ditches, which may lead to the application of much more water than required for evapotranspiration, in some places (Babcock and Blackmer, 1992). Soil surface texture has a direct effect on soil water and complex interactions with other environmental factors (Yong et al., 2014). The hydraulic behavior and the rate of traditional surface irrigation is eventually influenced by the inflow and duration of each irrigation (Ascough and Kiker, 2002). Although only slight differences exist among the retention curves (Fig. 4), the differences in saturation water conductivity ( $K_s$ ) can be substantial (varying between

119 cm/day at NT1 and 286 cm/day at NT3), indicating that a slight difference in hydrophysical properties of soil profiles could be amplified to generate wildly varying infiltration behavior, especially during saturated or near-saturated stages under actual irrigation conditions (Ojha et al., 2017).

In desert oasis farmland, the water cycle is primarily driven by evapotranspiration demand under the influence of irrigation, and soil water percolation may occur when too much water is applied to the root zone. Estimated deep drainage rates were observed, ranging from 170.7 mm (NT3) to 651.8 mm (NT1), amounting to about 26.2% and 54.9% of the total irrigation of the two plots, respectively. Drainage within the mulched maize fields ranged from 170.7 mm to 364.7 mm, which are in good agreement with other results from the same region, i.e., 255 mm through isotopes obtained by Yang et al. (2015), and 339.5 mm through the Hydrus-1D model by Dong-Sheng et al. (2015). Compared with the theoretical deep drainage determined by water balance techniques (Rice et al., 1986), an error of -2.6 to 43.1 mm, or 0.2 % to 17.6%, was obtained for the cumulative deep drainage (Table 3), indicating the reliability of the method used to estimate deep drainage in this study. The data expressed in Fig. 2 also explains how easily an excess of water, and therefore deep drainage, can occur in these soils. Indeed, the deep drainage was directly proportional to the amount of irrigation applied during any particular period (Fig. 7, Table 3). This phenomenon is easy to understand because for a given amount of irrigation, the likelihood of a drainage event and its average size both increased naturally with the irrigation amount, **due to the fact that coarse-textured soils in desert-oasis environments contain more sand particles that have large pores, and those soils are highly permeable, which allow the water to move rapidly through the pore system** (Fig. 7) (Keller, 2005). It is obvious that drainage should be an essential part of irrigation design and management. According to our results (Fig. 6, Table 3), an average of 40.6% of input water was consumed by deep leakage across the six plots; this is unproductive and could even cause nutrient loss and groundwater pollution at field scales (Fares and Alva, 2000), suggesting there is a huge potential for increasing irrigation water-use efficiencies and reducing irrigation water requirements in this region, **especially the areas that are mostly dominated by coarse textured sandy soils**.

### 4.3 Effects of different cropping systems and tillage history on soil hydrophysical properties

In this desert oasis with constant expansion, most of the fields belong to smallholder farmers, who usually **follow different cropping patterns and tillage methods**, resulting in a heterogeneity of soil hydrophysical properties (Salem et al., 2015; Ács, 2005; Abu and Abubakar, 2013). For the soil-moisture data-based method proposed in this paper, the spatial heterogeneity of the soil hydrophysical properties—which can be characterized by hydrophysical functions (soil water retention curve and soil water conductivity) and/or hydrophysical parameters ( $\rho_b$ ,  $\theta_s$ ,  $\theta_{fc}$  and  $\theta_w$ ) (Ács, 2005)—may restrict its applicability to a large agricultural area. Therefore, evaluating to what extent the different cropping systems and agronomic manipulations affect the soil hydrophysical properties is important, in order to reduce unnecessary repetitive measurements of soil hydrophysical information at both spatial and temporal scales, and thus improve the application efficiency of our method. Long-term cropping can increase annual water productivity by improving soil hydrophysical properties and reducing unproductive water losses (Caviglia et al., 2013). Crop root systems, for example, may create heterogeneity in soil properties through mechanical actions and the active release of chemicals (Hirobe et al., 2001; Read et al., 2003); and, along with similar feedbacks between long-term planted crops and the soil environment, may change water flow and soil hydraulic characteristics, and thus affect local water balances (Baldochi et al., 2004; Séré et al., 2012). Although it is difficult to quantify the consequences of plant-soil feedbacks on the hydrologic cycle of farmland, because of the lack of an accurate simulation model (Jalota and Arora, 2002), our results indicated that the tillage and planting of past decades have significantly increased the soil's water-holding ability (i.e., higher values of  $\rho_b$ ,  $\theta_s$ ,  $\theta_{fc}$  and  $\theta_w$  compared with the sandier land). The magnitude of increase in most of the parameters, except  $K_s$  in soil vertical profiles, was independent of the treatments applied across the six selected plots, which also suggests that different cropping systems and agronomic manipulation have limited effects on differing soil physical characteristics in sandy soil, at least at a decade scale, and this agrees well with the reports from Katsvairo et al. (2002). However, we argue that significant differences in soil hydrophysical properties among the plots may occur if the treatments are conducted over longer periods of time, i.e., ~100 years or more. In summary, the relatively slow process of soil evolution with tillage operations, and the limited influence of different cropping systems on soil hydrophysical properties at a 10-year scale, indicate a good stability and representativeness of the measured soil hydrophysical data and thus a good application prospect for applying the soil-moisture data-based method in practice.

#### 4.4 Potential for *SWBC* estimation by using soil moisture measurements

The best estimates of *SWBCs* should be based on models of soil water, because in most cases direct measurements are not available (Campbell and Diaz, 1988). Many studies including modeling work have been conducted in this region during the past decades (Table 4). However, most of these were rough approximations based on meteorological methods and water balance equations (Rong, 2012; Jiang et al., 2016; Yang et al., 2015; Wu et al., 2015; Ji et al., 2007), because there has been a lack of accurate parameters to assess the heterogeneity and complexity involved in modeling (Allen et al., 2011; Suleiman and Hoogenboom, 2007; Wang and Dickinson, 2012; Ibrom et al., 2007). Soil-moisture data-based methods have been considered one of the most promising ways to directly determine ET and other *SWBCs* (Guderle and Hildebrandt, 2015; Li et al., 2002), and many possible options, including single- or multi-step, and single- or multi-layer water balance methods, have been proposed and tested with synthetic time series of water content (Guderle and Hildebrandt, 2015). Our results suggest that a combination of a soil water balance method and the inverse method could be a good candidate for *SWBC* estimation in this region. It can provide a reliable solution, especially in regards to estimating ET, root water uptake, and water vertical flow. The method does not require any prior information of root distribution parameters, and thus can be applicable under both wet and dry weather conditions (Guderle and Hildebrandt, 2015).

Information on *SWBCs* is crucial for irrigation planning at both the field and regional scale (Jalota and Arora, 2002). Early researches suggested that decreasing the irrigation amount and increasing the irrigation frequency is the best choice for saving water and improving water use efficiency in the middle HRB (Rong, 2012; Jiang et al., 2016; Yang et al., 2015; Wu et al., 2015; Ji et al., 2007). This scenario can be achieved not only by adopting proper modern irrigation systems but also by integrating new technologies into the effective planning of irrigation schedules, so that plants can be supplied with optimal water volume and minimum water loss. Soil water budget models help in translating irrigation amounts in different time periods to evapotranspiration (ET), which has significance from the standpoint of crop yield (Jalota and Arora, 2002). Our results show that superfluous irrigation has no effect on increasing ET, because of the poor water-holding capacity of the sandy soil in this region, and thus irrigation application should not exceed a specific threshold (i.e., root zone depletion, ~527 mm for maize) to avoid deep percolation (Zotarelli et al., 2016). However, water deficits in crops and the resulting water stress on plants also influences crop evapotranspiration and crop yield (Kallitsari et al., 2011). Thus, a soil moisture measurement method based on *SWBCs* estimation makes it possible to quantify water budget components for different time periods, and has great potential for identifying appropriate irrigation amounts and frequencies. As the price of commercial TDR systems has become affordable (Quinones and Ruelle, 2001), it is more and more frequently used for soil water content measurements in desert oases, and thus a soil-moisture data-based method has great potential in irrigation management optimization and in moving toward sustainable water resources management, even under traditional surface irrigation conditions.

#### 4.5 Uncertainty analysis

Uncertainty is inevitable, in any soil water budget components estimate. As summarized by Zuo et al. (2002) and (Guderle and Hildebrandt, 2015), the accuracy and convergence of estimated evapotranspiration and slow drainage using this inverse approach are dependent on several factors, including the accuracy of soil hydraulic parameters and input soil moisture data, the time intervals of soil water content measurements, the spatial interval of the measured data along the depth, the setting of simulation depth and the boundary conditions. For a soil-moisture data-based method, the estimated results are only as good as their input data, i.e., the accuracy, the precision and the resolution (Guderle and Hildebrandt, 2013; Guderle and Hildebrandt, 2015). In this study, every effort was made to eliminate the uncertainty caused by the quality of the input data: for example, all the sensors and cables were carefully buried according the operator's manual instructions; the soil-specific calibration of TDR was conducted in a well-designed laboratory calibration experiment, which results a good accuracy ( $\pm 2\%$ ) for TDR measurement in coarse-textured soil; and the high-resolution moisture data (taken at 10-minute intervals) were hourly averaged to numerically filter out the noise and improve the calculation speed of the inverse model. Meanwhile, the simulation depth (0-110cm) is consistent with the root depth, and it can be well represented by 5 TDR probes with a spatial interval of 20 cm in sandy soil (Zhao et al., 2016). The boundary condition is also important for this inverse model (Liao et al., 2016); as mentioned in Section 2.3, we set the upper and lower boundaries as close as possible to natural conditions. However, we did not set specific upper boundaries for inter-cropping treatments, i.e., no bare soil evaporation was considered in the inter-cropping maize-pea field, which may have slightly underestimated the ET of NT6, but within an acceptable range, because the soil evaporation of NT6 was relatively small when compared with the total transpiration over a growing season. Moreover, the high amount of irrigation may have reduced the temperature of the soil profile, because

518 irrigation is often accompanied by an increase in latent heat flux, and thus by an increase in evapotranspiration (Chen et al.,  
519 2018;Haddeland et al., 2006;Zou et al., 2017). Theoretically, a decrease in soil temperature may slightly increase the soil suction  
520 under the same moisture conditions (Bachmann et al., 2002), and hence variations in the soil temperature profile under different  
521 irrigation scenarios may have affected the accuracy of the inverse model by changing the soil water retention curves. However,  
522 irrigation-affected variations of soil profile temperature in this study were small (within 2°C), which is smaller than the daily  
523 variation of soil temperature (2 to 3°C), and thus its effect on soil water retention curves can be ignored for eco-hydrological  
524 researches (Bachmann et al., 2002;Gao and Shao, 2015). Even so, it is still an interesting and important research field deserving  
525 further investigation.

526 Aside from the uncertainties in estimating evapotranspiration and slow drainages, more limitations may exist in the estimation of  
527 irrigation amounts and rapid drainages following irrigation events. All these limitations were strongly dependent on the assumptions  
528 of Equation (2) and (3), specifically, the estimation of  $S_{max}$ . We checked all the irrigation events of NT1-NT6 during the entire  
529 2016 growing season, and results showed an acceptable accuracy of the estimation of  $S_{max}$  (only two irrigation events in NT2  
530 slightly underestimated the  $S_{max}$ : 1.86 and 10.3 mm, which accounted for 1.1% and 4.1% of total soil water storage, respectively).  
531 This phenomenon—deep percolation that began before irrigation ceased—may have been caused by long irrigation duration time  
532 and high  $K_s$  of surface soil at NT2, which is the major limitation when applying our method to other regions. Calculating the  
533 previously occurring leakage volume, for example, using the unsaturated hydraulic conductivity empirical equation, is one of the  
534 possible solutions that needs to be tested in future work. Installing TDR under the film-mulched ridges may also cause an  
535 underestimation of the soil moisture content during an irrigation event. We investigated the difference caused by the location of  
536 TDR by comparing the soil water dynamics of an unmulched flat plot (NT1, which was independent of TDR location) and film-  
537 mulched ridge plots (NT2-6, which were affected by TDR location) after irrigation, and found that the underestimation caused by  
538 the location of TDR was mainly significant in the top 30 cm of the soil layer. For example, during the 24 hours after the irrigation  
539 on June 2 (DOY 154-155, Fig. 2), in the top 30 cm of the soil layer, the maximum soil moisture value of NT1 was 0.378 while the  
540 maximum soil moisture value of other plots (NT2-6) ranged between 0.219 and 0.299; in other layers, the maximum soil moisture  
541 value of NT1 was well within the maximum soil moisture values of other plots at the same layer. The minimum soil moisture values  
542 were very close between NT1 and the other plots at the same layer (<0.04). Meanwhile, the variances between NT1 and the other  
543 plots were 0.006 to 0.009 in the top 30 cm of the soil layer, and generally range from 0.001 to 0.004 for the other layers, which  
544 showed a good consistency of soil dynamics in the 30- to 110-cm soil layers compared with the top 30 cm of the soil layers. These  
545 consistencies may be because by 1) the height of ridge shoulders in the experimental plots was relatively low (<3cm), and substantial  
546 infiltration could occur through the film holes made for maize growth; 2) lateral water transfers could be substantially enhanced  
547 during the period of irrigation because of the soil water potential differences between ridges and furrows. This judgment also can  
548 be supported by some research conducted in similar environments, e.g., Zhang et al. (2016). Therefore, we argue here that the  
549 uncertainty that TDR location brings to the *SWBC* estimations in this study is acceptable. For now, given that the effect of plastic  
550 mulched furrow irrigation on soil water distribution remains elusive (Zhang et al., 2016;Abbasi et al., 2004), installing TDR in both  
551 the ridge and the furrow may be a better choice in future studies. Besides, both the heterogeneity of soil hydrophysical properties in  
552 sandy soils and the rough artificial irrigation process can bring uncertainties in the irrigation amount of any oasis cropland. However,  
553 the maximum irrigation rate of flood or furrow irrigation is mainly dependent on the  $K_s$  of the top soil layer, which is nearly  
554 homogeneous in such small experimental plots (6m×9m) because they have the same cropping systems and agronomic history  
555 (Table 2), and thus there is no significant infiltration difference within one small plot, and the installed soil moisture probes can well  
556 monitor the irrigation process of the entire plot.

557 Overall, we are confident about the estimation accuracy of ET, which is the most important parameter among all the *SWBCs*, and  
558 the one the related researchers are most interested in, because of its direct relevance to crop yield, and because maximizing crop  
559 yield is the major objective of agricultural irrigation strategies (Liu et al., 2002;Zhang et al., 2004;Kang et al., 2002). The ET  
560 estimation model in this study not only has great advantages in theory (for example, it does not require any root distribution  
561 information) (Schneider et al., 2010;Guderle and Hildebrandt, 2015), but at the same time it also considers the hysteresis effect,  
562 unlike other common models (Li et al., 2002;Guderle and Hildebrandt, 2015), while also providing a reliable and high-resolution  
563 solution because its results are well within the range of published ET values at nearby sites. Other *SWBC* estimations such as  
564 irrigation, also had an acceptable accuracy, even though they were estimated by a relatively simple method, because the results show



565 a good consistency with the observations (actual irrigation calculated from the power consumption) at the field scale and with the  
566 average irrigation amounts in other maize fields in the same region at close to the same time.

## 567 **5. Conclusions**

568 A database of soil moisture measurements taken in 2016 from six experimental fields (which were originally designed to test the  
569 accumulative impacts of different cropping systems and agronomic manipulations on soil-property evolution in the ecotone of desert  
570 and oasis) in the middle Heihe River Basin of China, was used to test the potential of a soil-moisture time series for estimating the  
571 *SWBCs*. We compared the hydrophysical properties of the soils in the plots, and then determined evapotranspiration and other  
572 *SWBCs* through a soil-moisture data-based method that combined both the soil water balance method and the inverse Richards  
573 equation, and the uncertainties of the employed methods were analyzed at the end of the experiment. **Significant variances were**  
574 **observed among the film-mulched plots in both the cumulative irrigation volumes (652.1~ 867.3 mm) and deep drainages**  
575 **(170.7~364.7 mm). We found unmulched plot had remarkably higher values in both cumulative irrigation volumes (1186.5 mm)**  
576 **and deep drainages (651.8 mm) compared with the mulched plots. We noticed that although obvious correlation existed between the**  
577 **volume of irrigation and that of drained water, the ET demands for all the plots behaved pretty much the same, with the cumulative**  
578 **ET values ranging between 489.1 and 561.9 mm for the different treatments in 2016. Our results confirmed that (1) relatively**  
579 **reasonable estimations of the *SWBCs* in a desert oasis environment can be derived by using soil moisture measurements. Although**  
580 **uncertainties exist, our method, which balanced simplicity and accuracy, can provide a reliable solution, especially in regards to**  
581 **estimating ET, for coarse-textured sandy soils; (2) although the tillage and planting of the past decade have significantly increased**  
582 **the soil water-holding ability, the magnitude of increase in most of the soil hydrophysical parameters was independent of the different**  
583 **treatments applied across the plots during a 10-year period, resulting in a good prospect for applying our method among different**  
584 **fields; (3) the estimated results of the *SWBCs* will provide a valuable reference for optimizing irrigation strategies at the field scale,**  
585 **but it is still a long way from use on large areas of agricultural land, because of the soil heterogeneity at the regional scale and the**  
586 **small volume that a TDR probe can monitor.**

### 587 **Code/Data availability**

588 **The code and data used in this study are available from the authors on request.**

### 590 **Author contributions.**

591 **ZL and HL are the co-first authors and contributed equally to this work. HL provided insights, performed the coding and analysis,**  
592 **and drafted the paper with ZL with contribution from all co-authors. QY, ZL, and RY ran the experiments and collected the data.**  
593 **WZ and JL contributed to analysis of the results, the discussion and manuscript editing.**

### 594 **Competing interests.**

595 **The authors declare that they have no conflict of interest.**

### 596 **Acknowledgements**

597 **We would like to thank Dr. Yang Yu for his constructive suggestions on completing this work. Special thanks also go to editor**  
598 **Fuqiang Tian, Dr. Michael W. I. Schmidt, Dr. Jun Niu, Dr. Yanjun Shen, Dr. Luca Brocca, Basil Frefel, Michèle Bösiger, and the**  
599 **other four anonymous reviewers, whose perceptive criticisms, comments and suggestions helped us improve the quality of the**  
600 **manuscript.**

### 601 **Financial support.**

602 **This research was jointly supported by the National Natural Science Foundation of China (No. 41630861), the West Light**

607 Foundation of Chinese Academy of Sciences (No. 29Y929621), and the Youth Innovation Promotion Association of Chinese  
608 Academy of Sciences.

609

## 610 **References**

- 611 Abbasi, F., Feyen, J., and Genuchten, M. T. V.: Two-dimensional simulation of water flow and solute transport below furrows: model calibration  
612 and validation, *Journal of Hydrology*, 290, 63-79, <https://doi.org/10.1016/j.jhydrol.2003.11.028>, 2004.
- 613 Abu, S. T., and Abubakar, I. U.: Evaluating the effects of tillage techniques on soil hydro-physical properties in Guinea Savanna of Nigeria, *Soil  
614 and Tillage Research*, 126, 159-168, <https://doi.org/10.1016/j.still.2012.09.003>, 2013.
- 615 Ács, F.: On Transpiration and Soil Moisture Content Sensitivity to Soil Hydrophysical Data, *Boundary-Layer Meteorology*, 115, 473-497,  
616 <https://doi.org/10.1007/s10546-004-5937-8>, 2005.
- 617 Allen, R., Irmak, A., Trezza, R., Hendrickx, J. M. H., Bastiaanssen, W., and Kjaersgaard, J.: Satellite-based ET estimation in agriculture using  
618 SEBAL and METRIC, *Hydrological Processes*, 25, 4011-4027, <https://doi.org/10.1002/hyp.8408>, 2011.
- 619 Ascough, G. W., and Kiker, G. A.: The effect of irrigation uniformity on irrigation water requirements, *Water SA*, 28, 235-241,  
620 <https://doi.org/10.4314/wsa.v28i2.4890>, 2002.
- 621 Babcock, B. A., and Blackmer, A. M.: The Value of Reducing Temporal Input Nonuniformities, *Journal of Agricultural and Resource Economics*,  
622 17, 335-347, 1992.
- 623 Bachmann, J., Horton, R., Grant, S. A., and Van der Ploeg, R.: Temperature dependence of water retention curves for wettable and water-repellent  
624 soils, *Soil Science Society of America Journal*, 66, 44-52, <https://doi.org/10.2136/sssaj2002.4400>, 2002.
- 625 Baldocchi, D. D., Xu, L., and Kiang, N.: How plant functional-type, weather, seasonal drought, and soil physical properties alter water and energy  
626 fluxes of an oak-grass savanna and an annual grassland, *Agricultural and Forest Meteorology*, 123, 13-39,  
627 <https://doi.org/10.1016/j.agrformet.2003.11.006>, 2004.
- 628 Bautista, E., and Wallender, W. W.: Reliability of Optimized Furrow-Infiltration Parameters, *Journal of Irrigation and Drainage Engineering*, 119,  
629 784-800, [https://doi.org/10.1061/\(ASCE\)0733-9437\(1993\)119:5\(784\)](https://doi.org/10.1061/(ASCE)0733-9437(1993)119:5(784)) 1993.
- 630 Bethune, M. G., Selle, B., and Wang, Q. J.: Understanding and predicting deep percolation under surface irrigation, *Water Resources Research*,  
631 44, 681-687, <https://doi.org/10.1029/2007WR006380>, 2008.
- 632 Bourazanis, G., Rizos, S., and Kerkides, P.: Soil water balance in the presence of a shallow water table, in: *Proceedings of 9th World Congress*,  
633 *Istanbul, Turkey, June 2015*, 119-142, 2015.
- 634 Campbell, G. S., and Diaz, R. (Eds.): *Simplified soil-water balance models to predict crop transpiration*, in: *Drought Research Priorities for the*  
635 *Dryland Tropics*, edited by: Bidinger, F.R., and Johansen, C., ICRISAT (International Crops Research Institute for the Semi-Arid Tropics),  
636 Patancheru, India, 15-26, 1988.
- 637 Caviglia, O. P., Sadras, V. O., and Andrade, F. H.: Modelling long-term effects of cropping intensification reveals increased water and radiation  
638 productivity in the South-eastern Pampas, *Field Crops Research*, 149, 300-311, <https://doi.org/10.1016/j.fcr.2013.05.003>, 2013.
- 639 Celia, M. A., Bouloutas, E. T., and Zarba, R. L.: A general mass-conservative numerical solution for the unsaturated flow equation, *Water Resources  
640 Research*, 26, 1483-1496, <https://doi.org/10.1029/WR026i007p01483>, 1990.
- 641 Chen, R., Kang, E., Ji, X., Yang, J., and Wang, J.: An hourly solar radiation model under actual weather and terrain conditions: A case study in  
642 Heihe river basin, *Energy*, 32, 1148-1157, <https://doi.org/10.1016/j.energy.2006.07.006>, 2007.
- 643 Chen, Y., Niu, J., Kang, S., and Zhang, X.: Effects of irrigation on water and energy balances in the Heihe River basin using VIC model under  
644 different irrigation scenarios, *Science of The Total Environment*, 645, 1183-1193, <https://doi.org/10.1016/j.scitotenv.2018.07.254>, 2018.
- 645 Costa-Cabral, M. C., Richey, J. E., Goteti, G., Lettenmaier, D. P., Feldkötter, C., and Snidvongs, A.: Landscape structure and use, climate, and  
646 water movement in the Mekong River basin, *Hydrological Processes* 22, 1731-1746, <https://doi.org/10.1002/hyp.6740>, 2008.
- 647 Dejen, Z. A.: *Hydraulic and operational performance of irrigation schemes in view of water saving and sustainability: sugar estates and community  
648 managed schemes In Ethiopia*, CRC Press/Balkema, Leiden, The Netherlands, 2015.
- 649 Deng, X. P., Shan, L., Zhang, H., and Turner, N. C.: Improving agricultural water use efficiency in arid and semiarid areas of China, *Agricultural  
650 Water Management*, 80, 23-40, <https://doi.org/10.1016/j.agwat.2005.07.021>, 2006.
- 651 Dolman, A., and De Jeu, R.: Evaporation in focus, *Nature Geoscience*, 3, 296-296, <https://doi.org/10.1038/ngeo849>, 2010.
- 652 Dong-Sheng, L. I., Xi-Bin, J. I., and Zhao, L. W.: Simulation of Seed Corn Farmland Soil Moisture Migration Regularity in the Midstream of the  
653 Heihe River Basin, *Arid Zone Research*, 3, 467-475, <https://doi.org/10.13866/j.azr.2015.03.08>, 2015.

654 Dong, X., Hong, X. U., and Ji-Cun, P. U.: Extraction of Remote Sensing Information of Spring Crops Under Support of GPS and GIS in Yunnan  
655 Province, *Agricultural Meteorology*, 24, 35-37, <https://doi.org/10.3969/j.issn.1000-6362.2003.04.011>, 2003.

656 Fares, A., and Alva, A. K.: Evaluation of capacitance probes for optimal irrigation of citrus through soil moisture monitoring in an entisol profile,  
657 *Irrigation Science*, 19, 57-64, <https://doi.org/10.1007/s002710050001>, 2000.

658 Folhes, M. T., Rennó, C. D., and Soares, J. V.: Remote sensing for irrigation water management in the semi-arid Northeast of Brazil, *Agricultural*  
659 *Water Management*, 96, 1398-1408, <https://doi.org/10.1016/j.agwat.2009.04.021>, 2009.

660 Fu, B., Li, S., Yu, X., Ping, Y., Yu, G., Feng, R., and Zhuang, X.: Chinese ecosystem research network: Progress and perspectives, *Ecological*  
661 *Complexity*, 7, 225-233, <https://doi.org/10.1016/j.ecocom.2010.02.007>, 2010.

662 Gao, H., and Shao, M.: Effects of temperature changes on soil hydraulic properties, *Soil and Tillage Research*, 153, 145-154,  
663 <https://doi.org/10.1016/j.still.2015.05.003>, 2015.

664 Gardner, W., and Mayhugh, M.: Solutions and Tests of the Diffusion Equation for the Movement of Water in Soil, *Soil Science Society of America*  
665 *Journal*, 22, 197-201, <https://doi.org/10.2136/sssaj1958.03615995002200030003x>, 1958.

666 Grayson, R. B., Blöschl, G., Willgoose, G. R., and McMahon, T. A.: Observed spatial organization of soil moisture and its relation to terrain indices,  
667 *Water Resources Research*, 35, 797-810, <https://doi.org/10.1029/1998wr900065>, 1999.

668 Guderle, M., and Hildebrandt, A.: Using measured soil water contents to extract information on summer evapotranspiration and root water uptake  
669 patterns, in: EGU General Assembly Conference, Vienna, Austria, 7 April 2013, 15, 2013

670 Guderle, M., and Hildebrandt, A.: Using measured soil water contents to estimate evapotranspiration and root water uptake profiles – a comparative  
671 study, *Hydrology and Earth System Sciences*, 19, 409-425, 10.5194/hess-19-409-2015, 2015.

672 Haddeland, I., Lettenmaier, D. P., and Skaugen, T.: Effects of irrigation on the water and energy balances of the Colorado and Mekong river basins,  
673 *Journal of Hydrology*, 324, 210-223, <https://doi.org/10.1016/j.jhydrol.2005.09.028>, 2006.

674 Hamblin, A. P.: The influence of soil structure on water movement, crop root growth, and water uptake, *Advances in Agronomy*, 38, 95-158,  
675 [https://doi.org/10.1016/S0065-2113\(08\)60674-4](https://doi.org/10.1016/S0065-2113(08)60674-4), 1985.

676 Hanks, R. J., and Bowers, S. A.: Numerical Solution of the Moisture Flow Equation for Infiltration into Layered Soils<sup>1</sup>, *Soil Science Society of*  
677 *America Journal*, 26, 530, <https://doi.org/10.2136/sssaj1962.03615995002600060007x>, 1962.

678 Hirobe, M., Ohte, N., Karasawa, N., Zhang, G. S., Wang, L. H., and Yoshikawa, K.: Plant species effect on the spatial patterns of soil properties  
679 in the Mu-us desert ecosystem, Inner Mongolia, China, *Plant and Soil*, 234, 195-205, <https://doi.org/10.1023/A:1017943030924>, 2001.

680 Hu, K., Li, B., Chen, D., Zhang, Y., and Edis, R.: Simulation of nitrate leaching under irrigated maize on sandy soil in desert oasis in Inner  
681 Mongolia, China, *Agricultural Water Management*, 95, 1180-1188, <https://doi.org/10.1016/j.agwat.2008.05.001>, 2008.

682 Ibrom, A., Dellwik, E., Flyvbjerg, H., Jensen, N. O., and Pilegaard, K.: Strong low-pass filtering effects on water vapour flux measurements with  
683 closed-path eddy correlation systems, *Agricultural and Forest Meteorology*, 147, 140-156, <https://doi.org/10.1016/j.agrformet.2007.07.007>,  
684 2007.

685 Jalota, S. K., and Arora, V. K.: Model-based assessment of water balance components under different cropping systems in north-west India,  
686 *Agricultural Water Management*, 57, 75-87, [https://doi.org/10.1016/S0378-3774\(02\)00049-5](https://doi.org/10.1016/S0378-3774(02)00049-5), 2002.

687 Ji, X. B., Kang, E. S., Chen, R. S., Zhao, W. Z., Zhang, Z. H., and Jin, B. W.: A mathematical model for simulating water balances in cropped  
688 sandy soil with conventional flood irrigation applied, *Agricultural Water Management*, 87, 337-346,  
689 <https://doi.org/10.1016/j.agwat.2006.08.011>, 2007.

690 Jia, Y., Li, F.-M., Wang, X.-L., and Yang, S.-M.: Soil water and alfalfa yields as affected by alternating ridges and furrows in rainfall harvest in a  
691 semiarid environment, *Field Crops Research*, 97, 167-175, <https://doi.org/10.1016/j.fcr.2005.09.009>, 2006.

692 Jiang, Y., Zhang, L., Zhang, B., He, C., Jin, X., and Bai, X.: Modeling irrigation management for water conservation by DSSAT-maize model in  
693 arid northwestern China, *Agricultural Water Management*, 177, 37-45, <https://doi.org/10.1016/j.agwat.2016.06.014> 2016.

694 Jinkui, W. U., Yongjian, D., Genxu, W., Yusuke, Y., and Jumpei, K.: Evapotranspiration of Seed Maize Field in Arid Region, *Journal of Irrigation*  
695 *and Drainage*, 26, 14-17, <https://doi.org/10.3969/j.issn.1672-3317.2007.01.004>, 2007.

696 Kallitsari, C., Georgiou, P. E., and Babajimopoulos, C.: Evaluation of Crop Water-Production Functions under Limited Soil Water Availability  
697 with SWBACROS model, in: Proceedings of the "European Federation for Information Technology in Agriculture, Food and the Environment  
698 World Congress on Computers in Agriculture", Prague, July 2011, 585-596, 2011.

699 Kang, S., Zhang, L., Liang, Y., Hu, X., Cai, H., and Gu, B.: Effects of limited irrigation on yield and water use efficiency of winter wheat in the  
700 Loess Plateau of China, *Agricultural Water Management*, 55, 203-216, [https://doi.org/10.1016/S0378-3774\(01\)00180-9](https://doi.org/10.1016/S0378-3774(01)00180-9), 2002.

701 Katsvairo, T., Cox, W. J., and Van Es, H.: Tillage and Rotation Effects on Soil Physical Characteristics, *Agronomy Journal*, 94, 299-304,  
702 <https://doi.org/10.2134/agronj2002.0299>, 2002.

703 Keller, A.: Evapotranspiration and Crop Water Productivity: Making Sense of the Yield-ET Relationship, in: *World Water and Environmental*  
704 *Resources Congress*, Anchorage, Alaska, United States, 15 May 2005, 1-11, 2005.

705 Kirnak, H., and Akpinar, Y.: Performance evaluation of TDR soil moisture sensor, *Agronomy Research*, 14, 428-433, 2016.

706 Li, X., Tong, L., Niu, J., Kang, S., Du, T., Li, S., and Ding, R.: Spatio-temporal distribution of irrigation water productivity and its driving factors  
707 for cereal crops in Hexi Corridor, Northwest China, *Agricultural Water Management*, 179, 55-63, <https://doi.org/10.1016/j.agwat.2016.07.010>,  
708 2017.

709 Li, Y., Fuchs, M., Cohen, S., Cohen, Y., and Wallach, R.: Water uptake profile response of corn to soil moisture depletion, *Plant Cell and*  
710 *Environment*, 25, 491-500, <https://doi.org/10.1046/j.1365-3040.2002.00825.x>, 2002.

711 Liao, R., Yang, P., Wu, W., and Ren, S.: An Inverse Method to Estimate the Root Water Uptake Source-Sink Term in Soil Water Transport Equation  
712 under the Effect of Superabsorbent Polymer, *Plos One*, 11, <https://doi.org/10.1371/journal.pone.0159936>, 2016.

713 Liu, H., and Lin, H.: Frequency and Control of Subsurface Preferential Flow: From Pedon to Catchment Scales, *Soil Science Society of America*  
714 *Journal*, 79, 362, <https://doi.org/10.2136/sssaj2014.08.0330>, 2015.

715 Liu, H., Zhao, W., He, Z., and Liu, J.: Soil moisture dynamics across landscape types in an arid inland river basin of Northwest China, *Hydrological*  
716 *Processes*, 29, 3328-3341, <https://doi.org/10.1002/hyp.10444>, 2015.

717 Liu, W. Z., Hunsaker, D. J., Li, Y. S., Xie, X. Q., and Wall, G. W.: Interrelations of yield, evapotranspiration, and water use efficiency from marginal  
718 analysis of water production functions, *Agricultural Water Management*, 56, 143-151, [http://doi.org/10.1016/S0378-3774\(02\)00011-2](http://doi.org/10.1016/S0378-3774(02)00011-2), 2002.

719 Lv, L.: Linking montane soil moisture measurements to evapotranspiration using inverse numerical modeling. Ph.D. dissertation, All Graduate  
720 Theses and Dissertations, Utah State University, USA, 3323, 2014.

721 Muñoz-Carpena, R.: Field Devices For Monitoring Soil Water Content, EDIS, University of Florida Cooperative Extension Service, Institute of  
722 Food and Agricultural Sciences, USA, Open File Rep. 343, 1-24, 2004.

723 Musters, P. A. D., and Bouten, W.: Optimum strategies of measuring soil water contents for calibrating a root water uptake model, *Journal of*  
724 *Hydrology*, 227, 273-286, [https://doi.org/10.1016/S0022-1694\(99\)00187-0](https://doi.org/10.1016/S0022-1694(99)00187-0), 2000.

725 N. Mbah, C., Nwite, J., Njoku, C., Ibeh, L., and S. Igwe, T.: Physical Properties of an Ultisol under Plastic Film and No-Mulches and Their Effect  
726 on the Yield of Maize, *World Journal of Agricultural Sciences*, 6, 160-165, 2010.

727 Naranjo, J. B., Weiler, M., and Stahl, K.: Sensitivity of a data-driven soil water balance model to estimate summer evapotranspiration along a  
728 forest chronosequence, *Hydrology and Earth System Sciences*, 15, 3461, <https://doi.org/10.5194/hess-15-3461-2011>, 2011.

729 Odofin, A. J., Egharevba, N. A., Babakutigi, A. N., and Eze, P. C.: Drainage beyond maize root zone in an Alfisol subjected to three land  
730 management systems at Minna, Nigeria, *Journal of Soil Science and Environmental Management*, 3, 216-223,  
731 <https://doi.org/10.5897/JSSEM11.143>, 2012.

732 Ojha, R., Corradini, C., Morbidelli, R., and Rao, G.: Effective Saturated Hydraulic Conductivity for Representing Field-Scale Infiltration and  
733 Surface Soil Moisture in Heterogeneous Unsaturated Soils Subjected to Rainfall Events, *Water*, 9, 134-151, <https://doi.org/10.3390/w9020134>  
734 2017.

735 Peixi, S., Du, M., Zhao, A., and Zhang, X.: Study on water requirement law of some crops and different planting mode in oasis, *Agricultural*  
736 *Research in the Arid Areas*, 20, 79-85, <https://doi.org/10.3321/j.issn:1000-7601.2002.02.019>, 2002.

737 Porporato, A., D'Odorico, P., Laio, F., Ridolfi, L., and Rodriguez-Iturbe, I.: Ecohydrology of water-controlled ecosystems, *Advances in Water*  
738 *Resources*, 25, 1335-1348, [https://doi.org/10.1016/S0309-1708\(02\)00058-1](https://doi.org/10.1016/S0309-1708(02)00058-1), 2002.

739 Qin, S., Zhang, J., Dai, H., Wang, D., and Li, D.: Effect of ridge-furrow and plastic-mulching planting patterns on yield formation and water  
740 movement of potato in a semi-arid area, *Agricultural Water Management*, 131, 87-94, <https://doi.org/10.1016/j.agwat.2013.09.015>, 2014.

741 Quinones, H., and Ruelle, P.: Operative Calibration Methodology of a TDR Sensor for Soil Moisture Monitoring under Irrigated Crops, *Subsurface*  
742 *Sensing Technologies and Applications*, 2, 31-45, <https://doi.org/10.1023/a:1010114109498>, 2001.

743 Rahgozar, M., Shah, N., and Ross, M. A.: Estimation of Evapotranspiration and Water Budget Components Using Concurrent Soil Moisture and  
744 Water Table Monitoring, *International Scholarly Research Notices*, 2012, 1-15, <https://doi.org/10.5402/2012/726806>, 2012.

745 Read, D. B., Bengough, A. G., Gregory, P. J., Crawford, J. W., Robinson, D., Scrimgeour, C. M., Young, I. M., Zhang, K., and Zhang, X.: Plant  
746 roots release phospholipid surfactants that modify the physical and chemical properties of soil, *New Phytologist*, 157, 315-326,  
747 <https://doi.org/10.1046/j.1469-8137.2003.00665.x>, 2003.

748 Rice, R. C., Bowman, R. S., and Jaynes, D. B.: Percolation of Water Below an Irrigated Field, *Soil Science Society of America Journal*, 50, 855-  
749 859, <https://doi.org/10.2136/sssaj1986.03615995005000040005x>, 1986.

750 Rong, Y.: Estimation of maize evapotranspiration and yield under different deficit irrigation on a sandy farmland in Northwest China, *African*  
751 *Journal of Agricultural Research*, 7, 4698-4707, <https://doi.org/10.5897/AJAR11.1213>, 2012.

752 Séré, G., Ouyvard, S., Magnenet, V., Pey, B., Morel, J. L., and Schwartz, C.: Predictability of the Evolution of the Soil Structure using Water Flow  
753 Modeling for a Constructed Technosol, *Vadose Zone J.*, 11, 59-75, <https://doi.org/10.2136/vzj2011.0069> 2012.

754 Salazar, O., Wesström, I., and Joel, A.: Evaluation of DRAINMOD using saturated hydraulic conductivity estimated by a pedotransfer function  
755 model, *Agricultural Water Management*, 95, 1135-1143, <https://doi.org/10.1016/j.agwat.2008.04.011>, 2008.

756 Salem, H. M., Valero, C., Muñoz, M. Á., Rodríguez, M. G., and Silva, L. L.: Short-term effects of four tillage practices on soil physical properties,  
757 soil water potential, and maize yield, *Geoderma*, 237, 60-70, <https://doi.org/10.1016/j.geoderma.2014.08.014>, 2015.

758 Schelde, K., Ringgaard, R., Herbst, M., Thomsen, A., Friberg, T., and Søgaard, H.: Comparing Evapotranspiration Rates Estimated from  
759 Atmospheric Flux and TDR Soil Moisture Measurements, *Vadose Zone J.*, 10, 78, <https://doi.org/10.2136/vzj2010.0060>, 2011.

760 Schneider, C. L., Attinger, S., Delfs, J. O., and Hildebrandt, A.: Implementing small scale processes at the soil-plant interface - the role of root  
761 architectures for calculating root water uptake profiles, *Hydrology and Earth System Sciences*, 14, 279-289, <https://doi.org/10.5194/hess-14-279-2010>, 2010.

762

763 Selle, B., Minasny, B., Bethune, M., Thayalakumaran, T., and Chandra, S.: Applicability of Richards' equation models to predict deep percolation  
764 under surface irrigation, *Geoderma*, 160, 569-578, <https://doi.org/10.1016/j.geoderma.2010.11.005>, 2011.

765 Shah, N., Ross, M., and Trout, K.: Using Soil Moisture Data to Estimate Evapotranspiration and Development of a Physically Based Root Water  
766 Uptake Model, *Evapotranspiration-Remote Sensing and Modeling*, Dr. Ayse Irmak (Ed.), IntechOpen, <https://doi.org/10.5772/18040>, 2012.

767 Sharma, H., Shukla, M. K., Bosland, P. W., and Steiner, R.: Soil moisture sensor calibration, actual evapotranspiration, and crop coefficients for  
768 drip irrigated greenhouse chile peppers, *Agricultural Water Management*, 179, 81-91, <https://doi.org/10.1016/j.agwat.2016.07.001>, 2017.

769 Sławiński, Sobczuk, H., Stoffregen, H., Walczak, R., and Wessolek, G.: Effect of data resolution on soil hydraulic conductivity prediction, *Journal*  
770 *of Plant Nutrition and Soil Science*, 165, 45-49, [https://doi.org/10.1002/1522-2624\(200202\)165:1<45::AID-JPLN45>3.0.CO;2-I](https://doi.org/10.1002/1522-2624(200202)165:1<45::AID-JPLN45>3.0.CO;2-I), 2002.

771 Sr, H. J. C., Grimm, N. B., Gosz, J. R., and Seastedt, T. R.: The US Long Term Ecological Research Program, *Bioscience*, 53, 21-32,  
772 [https://doi.org/10.1641/0006-3568\(2003\)053\[0021:TULTER\]2.0.CO;2](https://doi.org/10.1641/0006-3568(2003)053[0021:TULTER]2.0.CO;2), 2003.

773 Srivastava, R. K., Panda, R. K., and Halder, D.: Effective crop evapotranspiration measurement using time-domain reflectometry technique in a  
774 sub-humid region, *Theoretical and Applied Climatology*, 129, 1211-1225, <https://doi.org/10.1007/s00704-016-1841-7>, 2017.

775 Su, P. X., Xie, T. T., and Ding, S. S.: Water requirement regularity in Linze jujube (*Ziziphus jujuba* Mill. var. *inermis* Rehd. cv. *Linze jujube*) and  
776 jujube/crop complex systems in Linze oasis, *Chinese Journal of Eco-Agriculture*, 18, 334-341, <https://doi.org/10.3724/SP.J.1011.2010.00334>,  
777 2010.

778 Su, Y., Yang, X., and Yang, R.: Effect of Soil Texture in Unsaturated Zone on Soil Nitrate Accumulation and Groundwater Nitrate Contamination  
779 in a Marginal Oasis in the Middle of Heihe River Basin, *Environmental Science*, 35, 3683-3691, <https://doi.org/10.13227/j.hjxk.2014.10.007>,  
780 2014.

781 Suleiman, A. A., and Hoogenboom, G.: Comparison of Priestley-Taylor and FAO-56 Penman-Monteith for daily reference evapotranspiration  
782 estimation in Georgia, *Journal of Irrigation and Drainage Engineering*, 133, 175-182, [https://doi.org/10.1061/\(asce\)0733-9437\(2007\)133:2\(175\)](https://doi.org/10.1061/(asce)0733-9437(2007)133:2(175)), 2007.

783

784 Sun, H. R., Rui-Xin, W. U., Pin-Hong, L. I., Shao, S., Lin-Lu, Q. I., and Han, J. G.: Rooting Depth of Alfalfa, *Acta Agrestia Sinica*, 16, 307-312,  
785 <https://doi.org/10.11733/j.issn.1007-0435.2008.03.019>, 2008.

786 Topp, G. C., Davis, J., and Annan, A. P.: Electromagnetic determination of soil water content: Measurements in coaxial transmission lines, *Water*  
787 *resources research*, 16, 574-582, <https://doi.org/10.1029/WR016i003p00574>, 1980.

788 Wang, K., and Dickinson, R. E.: A review of global terrestrial evapotranspiration: Observation, modeling, climatology, and climatic variability,  
789 *Reviews of Geophysics*, 50.2, <https://doi.org/10.1029/2011RG000373>, 2012.

790 Wang, P., Yu, J., Pozdniakov, S. P., Grinevsky, S. O., and Liu, C.: Shallow groundwater dynamics and its driving forces in extremely arid areas: a  
791 case study of the lower Heihe River in northwestern China, *Hydrological Processes*, 28, 1539-1553, <https://doi.org/10.1002/hyp.9682>, 2014.

792 Wu, X., Zhou, J., Wang, H., Li, Y., and Zhong, B.: Evaluation of irrigation water use efficiency using remote sensing in the middle reach of the  
793 Heihe river, in the semi-arid Northwestern China, *Hydrological Processes*, 29, 2243-2257, <https://doi.org/10.1002/hyp.10365>, 2015.

794 Yang, B., Wen, X., and Sun, X.: Irrigation depth far exceeds water uptake depth in an oasis cropland in the middle reaches of Heihe River Basin,

795 Scientific Reports, 5, 15206, <https://doi.org/10.1038/srep15206>, 2015.

796 Yang, J., Mao, X., Wang, K., and Yang, W.: The coupled impact of plastic film mulching and deficit irrigation on soil water/heat transfer and water  
797 use efficiency of spring wheat in Northwest China, *Agricultural Water Management*, 201, 232-245,  
798 <https://doi.org/10.1016/j.agwat.2017.12.030>, 2018a.

799 Yang, X., Yu, Y., and Li, M.: Estimating soil moisture content using laboratory spectral data, *Journal of Forestry Research*, 1-8,  
800 <https://doi.org/10.1007/s11676-018-0633-6>, 2018b.

801 Yong, H., Hou, L., Hong, W., Hu, K., and Mcconkey, B.: A modelling approach to evaluate the long-term effect of soil texture on spring wheat  
802 productivity under a rain-fed condition, *Scientific Reports*, 4, 5736, <https://doi.org/10.1038/srep05736>, 2014.

803 You, D. B., Wang, J. L., Ming-Qiang, L., and Hua, Q. I.: Evapotranspiration of Maize Field in Irrigation Area in Heihe Middle Reaches Using the  
804 Penman-Monteith Method, *Acta Agriculturae Boreali-Sinica*, 139-145, <https://doi.org/10.7668/hbxb.2015.S1.025>, 2015.

805 Young, M. H., Wierenga, P. J., and Mancino, C. F.: Monitoring Near-Surface Soil Water Storage in Turfgrass using Time Domain Reflectometry  
806 and Weighing Lysimetry, *Soil Science Society of America Journal*, 61, 1138-1146,  
807 <https://doi.org/10.2136/sssaj1997.03615995006100040021x>, 1997.

808 Yu, Y., Wei, W., Chen, L., Feng, T., and Daryanto, S.: Quantifying the effects of precipitation, vegetation, and land preparation techniques on runoff  
809 and soil erosion in a Loess watershed of China, *Science of The Total Environment*, 652, 755-764,  
810 <https://doi.org/10.1016/j.scitotenv.2018.10.255>, 2019.

811 Zhang, Y. L., Wang, F. X., Shock, C. C., Yang, K. J., Kang, S. Z., Qin, J. T., and Li, S. E.: Influence of different plastic film mulches and wetted  
812 soil percentages on potato grown under drip irrigation, *Agricultural Water Management*, 180, 160-171,  
813 <https://doi.org/10.1016/j.agwat.2016.11.018>, 2017.

814 Zhang, Y., Kendy, E., Qiang, Y., Changming, L., Yanjun, S., and Hongyong, S.: Effect of soil water deficit on evapotranspiration, crop yield, and  
815 water use efficiency in the North China Plain, *Agricultural Water Management*, 64, 107-122, [https://doi.org/10.1016/s0378-3774\(03\)00201-](https://doi.org/10.1016/s0378-3774(03)00201-4)  
816 4, 2004.

817 Zhang, Y. Y., Wu, P. T., Zhao, X. N., and Zhao, W. Z.: Measuring and modeling two-dimensional irrigation infiltration under film-mulched furrows,  
818 *Sciences in Cold and Arid Regions*, 8, 419-431, <https://doi.org/10.3724/SP.J.1226.2016.00419>, 2016.

819 Zhao, L., and Ji, X.: Quantification of Transpiration and Evaporation over Agricultural Field Using the FAO-56 Dual Crop Coefficient Approach-  
820 A case study of the maize field in an oasis in the middle stream of the Heihe River Basin in Northwest China, *Scientia Agricultura Sinica*, 43,  
821 4016-4026, <https://doi.org/10.3864/j.issn.0578-1752.2010.19.014>, 2010.

822 Zhao, L., and Zhao, W.: Water balance and migration for maize in an oasis farmland of northwest China, *Chinese Science Bulletin*, 59, 4829-4837,  
823 <https://doi.org/10.1007/s11434-014-0482-4>, 2014.

824 Zhao, L., Zhao, W., and Ji, X.: Division between transpiration and evaporation, and crop water consumption over farmland within oases of the  
825 middlestream of Heihe River basin, Northwest China, *Acta Ecologica Sinica*, 35, 1114-1123, <https://doi.org/10.5846/stxb201304220778>,  
826 2015.

827 Zhao, L., He, Z., Zhao, W., and Yang, Q.: Extensive investigation of the sap flow of maize plants in an oasis farmland in the middle reach of the  
828 Heihe River, Northwest China, *Journal of Plant Research*, 129, 841-851, <https://doi.org/10.1007/s10265-016-0835-y>, 2016.

829 Zhao, W., Liu, B., and Zhang, Z.: Water requirements of maize in the middle Heihe River basin, China, *Agricultural Water Management*, 97, 215-  
830 223, <https://doi.org/10.1016/j.agwat.2009.09.011>, 2010.

831 Zhao, W., and Chang, X.: The effect of hydrologic process changes on NDVI in the desert-oasis ecotone of the Hexi Corridor, *Science China-Earth  
832 Sciences*, 57, 3107-3117, <https://doi.org/10.1007/s11430-014-4927-z>, 2014.

833 Zhou, H., Zhao, W., and Zhang, G.: Varying water utilization of Haloxylon ammodendron plantations in a desert-oasis ecotone, *Hydrological  
834 Processes*, 31, 825-835, <https://doi.org/10.1002/hyp.11060>, 2017.

835 Zotarelli, L., Dukes, M. D., Morgan, and T., K.: Interpretation of Soil Moisture Content to Determine Soil Field Capacity and Avoid Over-Irrigating  
836 Sandy Soils Using Soil Moisture Sensors, *Agricultural and Biological Engineering*, 2016.

837 Zou, M., Niu, J., Kang, S., Li, X., and Lu, H.: The contribution of human agricultural activities to increasing evapotranspiration is significantly  
838 greater than climate change effect over Heihe agricultural region, *Scientific Reports*, 7, 8805, <https://doi.org/10.1038/s41598-017-08952-5>,  
839 2017.

840 Zuo, Qiang, Zhang, and Renduo: Estimating root-water-uptake using an inverse method *Soil Science*, 167, 561-571,  
841 <https://doi.org/10.1097/00010694-200209000-00001>, 2002.