

Dear Editor,

Thank you for your response to our revision proposals. We appreciate your constructive comments on the manuscript and believe they will help improving the quality and understandability of the proposed article. You will find in this letter:

- I) a detailed reply to your report, with explanations on how we have updated our manuscript;
- II) the responses to reviewers comments, including the associated changes to the manuscript;
- III) the revised manuscript with revision marks displayed.

We made our best for providing modifications that fulfill the core comments and expectations of the review process, and hope that you will find this new version acceptable for publication.

Martin Le Mesnil, on behalf the co-authors

NB: In the present document, line numbers refer to the revised manuscript with all revision marks displayed, as attached at the end of this file.

I) Response to Editor

Comment 1)

Comments to the Author:

The reviewers are generally favourable to the paper and have made some useful comments that will improve the manuscript, however they each note the need for major corrections. The core matter, and I agree, is a lack of more detailed analyses as to the components of the fluxes and the different assumptions that are made in that quantification to gain, for example IGF values.

We agree that some more detailed analyses are required to improve the manuscript, notably on the question of IGF values and the relative processes that control it. Therefore, we added to section 5.3 the following figure and discussion that tackles the question of differentiated IGF impacts on the quick- and slow-flow components.

→ *Performed change in manuscript (Discussion section Line 570 to Line 581 in the revised version of the manuscript and new Figure 11):*

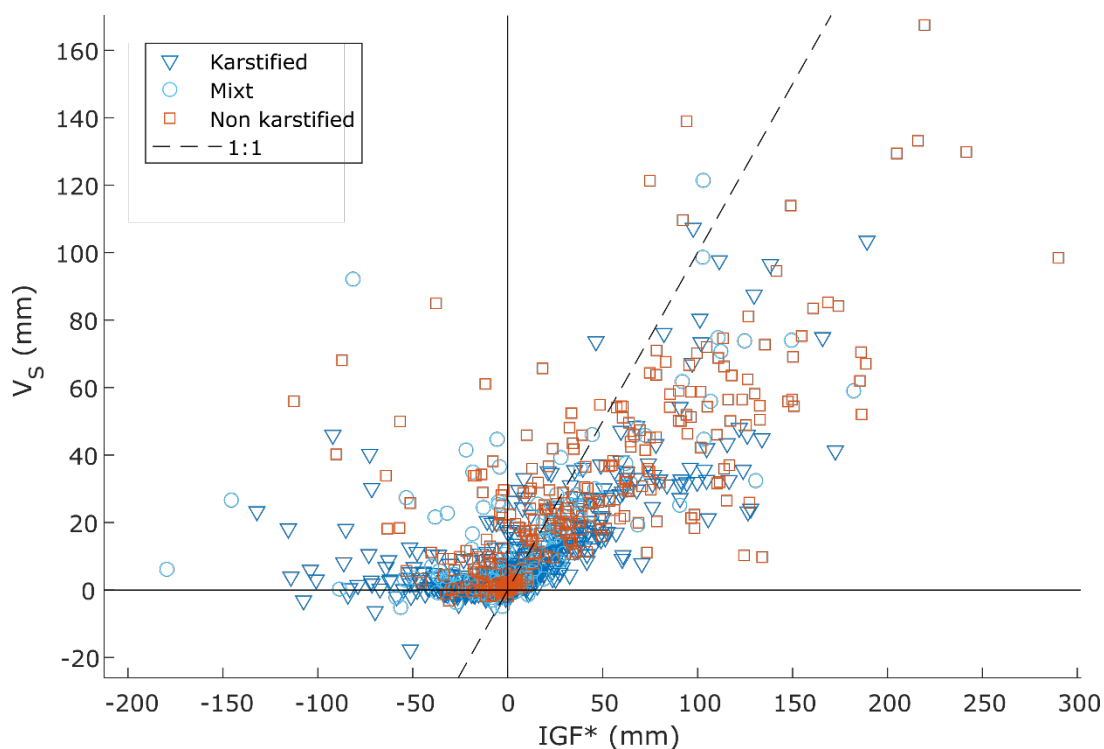


Figure 11 : VS depths versus IGF* depths for all events and reaches, with differentiation of geology types

“Figure 11 represents V_S versus IGF* (both expressed in depth) for all events and reaches, with different symbols according to geology type. V_S being equal to $V_{S,0} - V_{S,b}$, the V_S versus IGF* relationship provides an insight into the relative proportions of total IGF* depth and quick-flow component variation. First, while IGF* values vary from -200 to 300 mm, V_S values are mostly

positive, ranging from -20 to 150 mm. This indicates that for most events, when outgoing IGFs (negative IGF values) occur, the quick-flow component still increases. This is particularly true on NK catchments, whereas some events with negative IGF* on K catchments show negative (or low positive) V_s values. In that case, a likely hypothesis is the presence of losses in karst riverbeds via sinkholes, which are not present in non-karst reaches (see such example in Charlier et al., 2019). Regarding events with positive IGF*, V_s depths are mainly inferior to IGF* ones, with values around half of the total IGF* ones. This shows that incoming IGFs during storm-events feed the slow-flow component of the total streamflow in similar proportions than the quick-flow component. This is linked to the different IGF processes occurring at the catchment scale: slow-flow component corresponding to aquifer drainage by the river (e.g. Bailly-Comte et al., 2012) and quick-flow component corresponding to karst spring activation (Bonacci and Bojanic, 1991; Maréchal et al., 2008), for example.”*

Comment 2)

I fully appreciate what the authors have written in their response in terms of clarifying the choices made in additional text (i.e. both reviewers commented on the need for more transparency and critical analyses on the use of a topographic catchment basin).

Thank you.

Comment 3)

Whilst I appreciate the authors current responses and suggested changes I don't think yet they fully tackle the issues of being more transparent on how the flow components come together per reach. What that looks like more clearly in the results for each reach and if those numbers seem physically plausible given the assumptions that need to be made. We have to remember here the core analyses are conducted on event behaviour and there are some challenging questions in karstic landscapes how lags, and pre-event events may indeed impact on the expected current storm event contributions, as well as seasonal variations that might well be likely for different 'general' aquifer states. I encourage and expect therefore the authors to try to tease out these issues more (i.e. the need for improve critical analyses and new results) to make the results and how they come together are more transparent, and a little more of a critical analyses and assumptions required to be identified.

As you mention, other factors control catchments flood response, such as seasonal parameters. We added the following figure and discussion to section 5.1, that analyses the seasonal effect and investigated possible causes of this variability.

→ Performed change in manuscript (Discussion section Line 479 to Line 492 in the revised version of the manuscript and new Figure 8):

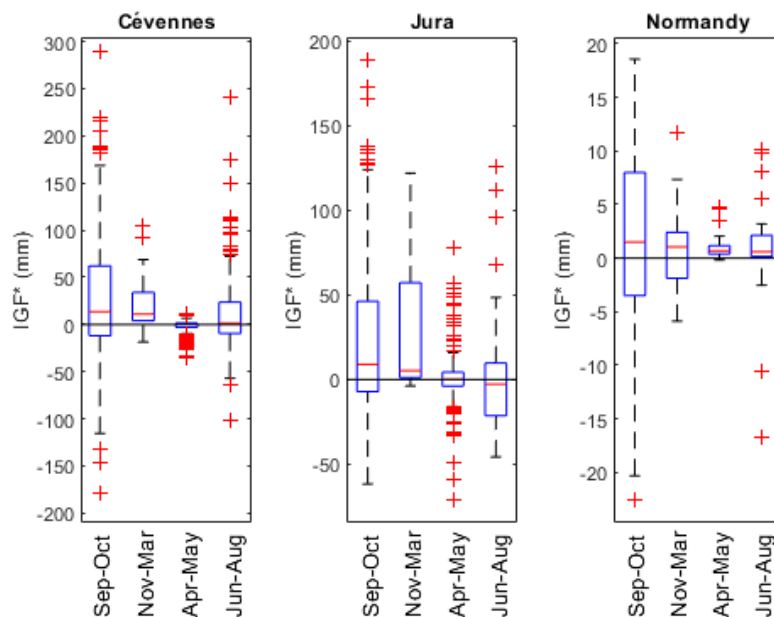


Figure 8 : IGF* depths distribution for the three studied sites, according to seasons

“Hydrological processes have been shown to be influenced by physiographic parameters such as karst occurrence. Nevertheless, other drivers can control catchments hydrological response to storm events. As an example, figure 8 shows IGF* depths distribution for the three studied sites, according to seasons. Seasons have been selected in order to reflect the main periods of the hydrological year, and to be suitable for the three sites. Throughout the hydrological year (from September to August), median IGF* depth is continuously decreasing, for all sites towards zero. This is probably linked to the hydrological conditions of catchments, in particular the saturation state of aquifers. Indeed, low water table periods (Apr to Aug) are more likely to limit IGFs. In the case of Jura catchments, a majority of events show IGF gains during high-flow periods (fall and winter), whereas a majority of events promote IGF losses during low-flow periods. This reversal of IGF direction, in the particular case of karst catchments, can also be favoured by the complex organization of the underground conduit networks. In fact, connection or disconnection of the main networks could temporally modify the hydrogeological catchment boundaries with threshold effects (Charlier et al., 2012; Bonacci, 2015). For those reasons, spatial and temporal variability of karst catchments behaviour are still challenging to characterize and predict. A comprehensive understanding of flood processes would thus imply accurate and continuous monitoring of climatic, hydrological and hydrogeological variables, on multiple catchments covering various physiographical settings.”

Comment 4)

Plus also other ways to help the reader better interpret the data provided. i.e. if the IGF is in mm, then what fraction of the catchment would be increased or lost to effectively result in that mm gain for the hydrogeologically active component (for example) - I think this would be really interesting to look at to see if the differences are plausible under a certain set of assumptions. Or indeed what fraction of the storm flow is IGF? Even examples of the flow components for some reaches, perhaps even reported in Supplementary pages?

Thank you for these remarks. As mentioned in Comment 1, we propose to analyse which part of quick- and slow-flow components is affected by IGF. Moreover, we agree that the estimation of the catchment fraction to be added or removed to result in the IGF gain or loss, is a good way to make the results more interpretable and visual. Therefore, we added the following figure and discussion to section 5.2. It allows analysing the differences between topographic and “hydrogeologically active” catchment areas, and discuss their consistency.

→ *Performed change in manuscript (Discussion section Line 523 to Line 539 in the revised version of the manuscript and new Figure 9):*

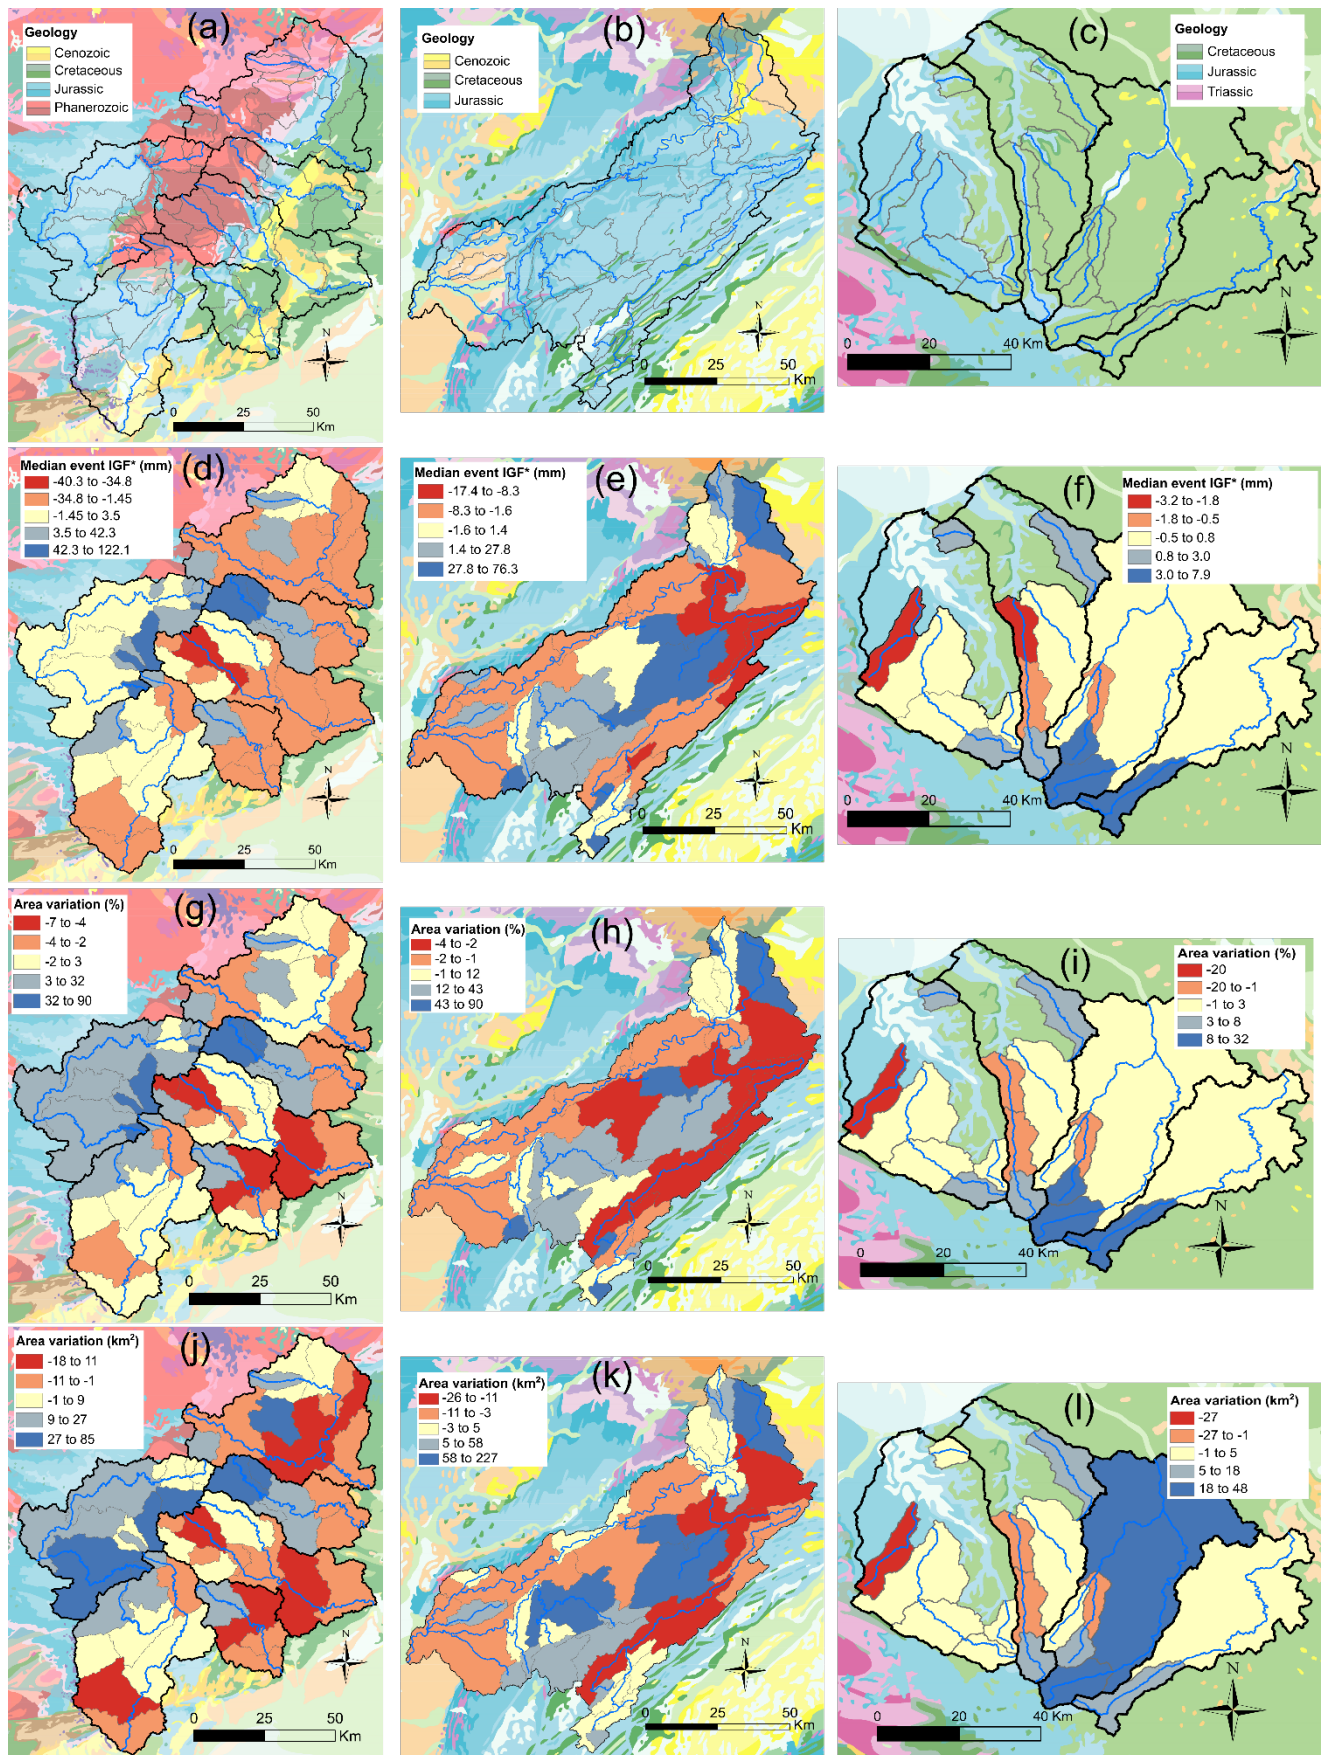


Figure 9 : Main geological features in the three studied areas (a, b, c), median storm event IGF* values (including potential aquifer storage variation) (d, e, f), and area variation from actual topographic to virtual hydrogeologically active (in %) (g, h, i) and in km² (j, k, l).

“Figures 9g to 9i show the percentage of area variation of the elementary catchments, from the topographic catchment area to the fictive area of the hydrogeologically active catchment (i.e. without excess or deficit in water balance). The area of such catchments is calculated from the IGF and V_p depths. Assuming a spatially homogeneous rainfall intensity, the area variation corresponds to the surface to be added or withdrawn, in regards to the topographic elementary catchment, to obtain the median IGF* value. These variations reflect the incoming or outgoing IGF processes, respectively. For Cévennes and Jura catchments, the values of area variation are of similar magnitudes, ranging from approximately -7 % to +90 %. Regarding Normandy catchments, area variations are slightly lower, with values ranging from -20 % to +32 %. This shows that IGF can be an important term of the water balance during storm events, and has to be considered as such, in order to better understand flow processes during floods.*

Figures 9j to 9l show the same elementary catchments area variation, expressed in km². These values are correlated to the size of topographic catchments. They allow a concrete representation of the recharge areas located outside of the surface catchments. As this study is based on storm-events only, and considering that the studied catchments extend further downstream, the sum of fictive active catchments (which is a first approximation of the hydrogeological catchment) do not match with the topographic catchment area. Nevertheless, a previous study by Le Mesnil et al. (2020) showed that, along the Doubs river, annual IGF take a part in the water balance that progressively decreases from spring to outlet and tends towards zero.”

So I'd like to see a bit more in the changes to the paper than what has been specified by the authors in their response to this point and I believe it will make it a better paper...., I shall then conduct an editorial review of the changes, but if need be I will send this back for further review if I don't think the spirit of what the reviewers have noted is being further developed by the authors, best wishes, Jim

Thank you for your decision, we hope that our modifications will meet your expectations.

II) Response to reviewers

Response to Anonymous Referee #1

We are very grateful for the constructive comments of anonymous referee #1 on the manuscript. We believe that they will help increasing substantially the scientific quality of the manuscript. We agree with most recommendations and we give in this note our responses to all remarks.

Comment 1a)

The study analyzed stream flow observations at 108 gages in three regions with varying karst area, focusing on event-scale hydrologic response to 20 large storm events. Using 15 descriptors on catchment water balance, hydrograph shape, and difference between an upstream and downstream gage, the study compared the catchment response in karst (K), middle (M) and non-karst (NK) catchments. It is concluded that (1) karst promotes high infiltration but (2) slows down flood response (both rising and falling limb), and the latter behavior is attributed to inter-basin groundwater flow (IGF).

I find the study valuable in that it selected a wide range of catchments under different climatic and geologic conditions, and that it focused on event time-scale response of catchment runoff underlain by karst geology. However, the manuscript can benefit significantly from a clearer and sounder conceptual model, better framing of the questions (what we know and don't know) and the hypotheses to be tested with this particular dataset, how the results speak for or against the hypotheses posed, and a better overall presentation, as expanded below.

We modified the manuscript according to remarks of referee #1 as detailed below. This review will allow several improvements such as a better justification of our choice to work with topographic catchments as a spatial reference, a more complete literature review, and a clearer definition of what is the lateral flow Q_L in comparison to IGF.

Comment 1b)

First, there are some conceptually ambiguities.

(a) My understanding is that groundwater flow, particularly trans-catchment groundwater flow, or inter-basin flow (IBF), does not follow surface drainage structure in karst terrain as depicted in Figure 1. We cannot delineate groundwater basins based on surface topography, a well-known problem in karst terrain. Figure 1 depicts the IBF as completely defined by, and in parallel with the surface drainage gradient. While this may be fine for unconsolidated materials without strong geologic structure, it is hardly the case for karst terrain, where the extensive underground conduit networks do not follow the topography. The authors' finding

that the strongest lateral inflow is in inter-mediate catchments in NK, that is, there is more IBF in non-karst areas, is counterintuitive and confusing, and points to this conceptual flaw. The reason may well be that in NK areas the surface and subsurface drainage system are more aligned, and such an assumption is more valid, allowing the detection of IBG inflow. The authors need to clarify and justify this assumption, because it also underlies the methodology used in the study, with the analyses entirely based on streamflow.

First, the term IGF was kept in the manuscript (instead of IBF) as it is a term dedicated to the study of Interbasin Groundwater Flow.

Figure 1 represents all identified inputs and outputs at the scale of an elementary catchment (drained area between two gauging stations). They are composed of three main flows: input streamflow Q_i , output streamflow Q_o and lateral flow Q_L . Q_L is composed of several flows corresponding to different processes, which are numbered represented on Figure 1. Interbasin Groundwater Flow (IGF) is represented by incoming and outgoing arrows of two types. Straight arrows represent IGF in parallel with the surface drainage gradient, while curved arrows represent IGF from/towards other directions (outside upstream or downstream elementary catchments).

→ **Performed change in manuscript (Figure 1):** Modification of IGF arrows to make clearer the fact that IGF can be in different directions than the main surface drainage direction, and to differentiate them from other Q_L flows.

We fully agree on the comment stated that groundwater basins cannot be delineated based on surface topography, especially in karst areas. However, our spatial reference is the stream catchment for which the topographic catchment is the relevant spatial reference, even when accounting for groundwater flows in addition to surface flows. We added the following paragraph to our introduction for a better understanding of our strategy.

→ **Performed change in manuscript (Introduction section Line 72 to Line 88 in the revised version of the manuscript):** “Regional spatial analyses need to be based on reliable data at the highest resolution available. For this purpose, the scale of the elementary catchment - i.e. subdivision of a basin following available gauging stations – appears to be the best resolution for long-term monitoring. Elementary catchment can be either the drained area of a headwater catchment controlled by a gauging station, or the drained area between two gauging stations (intermediate catchment). When considering surface and groundwater components, the delineation method of elementary catchments is questionable (topographic vs. hydrogeological boundaries). Despite the importance of groundwater processes in karst areas, topographic catchment delineation remains a more robust reference, for several methodological reasons. First, IGF can be defined as groundwater flow crossing topographic divides, as this concept emerged with the evidence of certain groundwater systems extending beyond the limits of valleys (Eakin, 1966). A perfectly delineated groundwater basin would then show IGF equal to zero. For this reason, studies related to IGF use the topographic catchment spatial reference (Genereux et al., 2005; Schaller and Fan, 2009; Bouaziz et al., 2018; Nguyen et al., 2020; see also a synthesis in Fan, 2019). Second, although in karst catchments groundwater contributes to flood flow, surface runoff has to be considered obviously as an important component of flood flow. Consideration of hydrogeological catchments could thus lead to wrong surface contribution assessment depending on their surface drainage network. Third, as some groundwater flows are aligned with the main surface drainage axis,

hydrogeological catchments would encompass the whole river, making it impossible to study the spatial variability of parameters along the river, at the elementary catchment scale. Finally, topographic delineation is reliable and easily reproducible, while groundwater delineation is characterized by a strong uncertainty and variability in karst areas.”

Comment 1c)

(b) The methodology infers IBF into and out of a catchment by comparing the inflow Q_I and outflow Q_O of a stream reach (Fig 1). The authors need to clarify to what extent one can infer IGFs from streamflow alone.

Considering the topographic elementary catchment as our reference for all water balance calculations, IGF is inferred from inflow Q_I , outflow Q_O and effective rainfall P_{eff} (obtained by subtracting the estimated evapotranspiration to measured rainfall, see Appendix C of the submitted manuscript). Knowing that this term also accounts for potential aquifer level variations, it is noted IGF*.

The difference reflects inflow from local precipitation falling on its topographic catchment and subsequent infiltration and surface and subsurface runoff (local source), the inflow from upstream catchments via IBF (remote source), minus the loss to local aquifers (local sink, recharging local aquifers, increasing groundwater storage) which may or may not leave the catchment via IBF (remote sink). But without an explicit aquifer water balance to track all the terms during the events, it is difficult to separate these terms. To arrive at quantitative results, the authors need to explicitly quantify these terms, incorporating aquifer water level observations, spring discharges.

As explained in lines 162 to 166 and visible in Figure 1, lateral exchanges may be a combination of (supposed decreasing importance):

- Effective rainfall (precipitation minus evapotranspiration) over the elementary catchment,
- IGF,
- Aquifer storage variation,
- Overbank phenomena.

We consider overbank flow to be negligible, assuming that the overflow water returns to the river after a relatively short time during the recession. We propose an assessment of evapotranspiration (explained in Appendix C) which allows estimating the effective rainfall on the elementary catchments. Thus, combined to inlet streamflow Q_I and outlet streamflow Q_O data, our methodology allows calculating the remaining term of the water balance, noted IGF*, which includes IGF and the potential aquifer storage variation during the considered event (noted δ). δ can either be positive, corresponding to an aquifer recharge, or negative, corresponding to an aquifer draining. Aquifer draining is unlikely during storm events, as important rainfalls generally occur. In case of an aquifer recharge, and as our analysis is performed on the whole storm-event period (including the entire recession), a substantial part

of the infiltrated water should be released. For these reasons, δ is assumed to be a minor component on the IGF* term compared to IGF. This is discussed in lines 182 to 195, and calculation of IGF* is presented in equation 8.

→ **Performed change in manuscript (Methodology section Line 192 in the revised version of the manuscript):** introduction of equation 6: " $Q_L = IGF + Pe_{eff} + \delta$ "

The diffusive wave model for surface water propagation appears to be an over-kill in comparison to a complete lack of first-order water balance in the subsurface.

We precise that the diffusive wave model is used to analyse the flow dynamics during floods through the simulation of lateral hydrographs. It is not used in the lateral flow estimation for water balance calculations (see our response above).

Comment 1d)

Second, the authors should provide a more thorough literature review, discuss what we know and do not know in terms of event-scale catchment runoff generation in karst terrain, and pose a set of testable hypotheses. For example, it is expected that in karst area, infiltration is high, and storm flow is flashy due to the open conduits in the subsurface, but after a threshold when the groundwater builds up to the spring overflow point. Then as the results are opposite (slow hydrograph response), one can reason why this hypothesis must be rejected. For another example, one can hypothesize that in karst catchments, streamflow can be lower or higher than expected from calculations based on infiltration over the surface catchment area alone (local source), or there is mass imbalance, and thus IGF must be invoked. Then the analyses can be targeted to test these hypotheses, and the results discussed with clarity surrounding these hypotheses.

We developed the literature review (see also our response to referee #2 regarding this aspect), and especially discussed in a larger extent what are the main findings on karst impacts on flood processes and runoff generation. We included the following paragraph to the introduction. This more detailed analysis was also used to better interpret and discuss our results.

→ **Performed change in manuscript (Introduction section Line 36 to Line 44 in the revised version of the manuscript):** "Karst impacts on flood processes are mostly documented through case studies. As an example, Zanon et al. (2010) showed that during a flash flood in 2007 in Slovenia, karst area reduced flooding, which was more important in a non-karst neighbouring zone, receiving less precipitation. Likewise, Delrieu et al. (2005) observed, for an exceptional storm event in 2002, lower runoff coefficient values for the karstic catchment compared to the hard-rock catchment in the eastern zone of the Cévennes Mountains. De Waele et al. (2010) and Charlier et al. (2015, 2019) determined that, depending on the location on the river profile, karst areas could result in streamflow losses or gains due to the high spatial variability of the hydrogeological karst features. Other frequently described processes are groundwater rising leading to reduced infiltration and important surface runoff (Lopez-Chicano et al., 2002; Bonacci et al., 2006), and backflooding/sinkhole flooding due to conduit constriction (Maréchal et al., 2008; Bailly-Comte et al., 2009)."

Comment 1e)

Third, in addition to the above, a few other things can be done to reduce the length, enhance focus, clarify terminology and make it easier for readers to follow the central theme and take-home messages.

(a) Move “Section 3 The Study Area” to before “Section 2 Methodology”

We prefer to keep the methodology section before the study site one in order to put more emphasis in the genericity of our methodology, which could be applied elsewhere.

(b) List all variables in a table with definitions. It is hard to remember the 10s of mathematical symbols mentioned later – one has to go back and find their definitions.

A list of all variables, their symbols and definition is proposed in Appendix D.

(c) In presenting results, please use plain English of the meaning of the variable, rather than the ratio of 2 variables defined earlier, so the reader can grasp the meaning of the results.

→ **Performed change in manuscript:** We replaced the ratios by plain English in the manuscript. We also reminded the meaning of variables more frequently in the text.

(d) Is the lateral hydrograph, Q_L , the same as IGF? Both appeared in the text frequently, and it appeared that they are used in the same context. If so, please unify the terminology. If not, please make it more clear by using a conceptual model diagram.

The lateral hydrograph Q_L is the association of all lateral flows occurring at the elementary catchment scale ($P_{eff} + IGF + \delta$, see our response to Comment 1c).

Expressing the water balance gives: $Q_I + Q_L = Q_O$ (a)

Replacing Q_L in (a) gives: $Q_I + P_{eff} + IGF + \delta = Q_O$ (b)

As δ is not measured, it cannot be differentiated from IGF: $IGF + \delta = IGF^* = Q_O - Q_I - P_{eff}$ (c)

A definition of Q_L is given when this term is first cited, lines 187 to 188. It is also reminded in the legend of Figure 1.

→ **Performed change in manuscript (Methodology section Line 192 in the revised version of the manuscript):** We made the distinction between IGF and Q_L clearer by introducing an explicit equation (6): “ $Q_L = IGF + P_{eff} + \delta$ ”

(e) The authors talk about losing reach vs gaining reach, in the context of losing water to other catchments via IGF. The terms “losing streams” or “gaining stream” have been understood as stream and local groundwater exchange, regardless of the source/sink is local or remote (IGF). Perhaps use “losing catchment” vs “gaining catchment” because here the authors refer to IGF?

We agree with this remark that has been implemented to the manuscript.

(f) in Fig 1, catchments include headwater, intermediate, but is it intermediate between a headwater and a tailwater catchment? Is there another catchment below the intermediate?

Our spatial scale of work is the elementary catchment, defined as the drained area between two gauging stations. In case of a headwater catchment, the elementary catchment corresponds to the whole topographic catchment, as there is no gauging station to delineate the upstream divide. In other cases, the elementary catchments are intermediate catchments (with upstream and downstream gauging stations), knowing that a basin could have a succession of intermediate catchment if there are several stations on the river.

In Figure 1, there is another intermediate catchment below the presented one. We do not use the term tailwater catchment, as there are other gauging stations downstream of our study zones.

→ **Performed change in manuscript (Introduction & Figure 1):** We made Figure 1 clearer by adding an “intermediate catchment” label to the third catchment, and an “elementary catchment” label for all three catchments. See also suggestions when defining elementary catchments in the Introduction section (response to comment 1b)

Line 296. Is this stream loss, or simply that the infiltration over the surface catchment drained elsewhere, to neighboring catchments? IBF is not just a result of stream flow loss; infiltrated water may not go to the streams at all in its own catchment but may enter streams in other catchments.

We agree on the fact that IGF can be the result of both streamflow losses and surface infiltration. Nevertheless, the terms cited in line 296 [here line 368] (V_S and V_U) only regard streamflow losses. Indeed, they are obtained by difference of inlet and outlet streamflow, regardless of precipitations. On the opposite side, the parameter IGF* can be interpreted by local streamflow losses or diffuse infiltration.

Response to Anonymous Referee #2

We are very grateful for the constructive comments of anonymous referee #2 on the manuscript. We believe that they will help increasing substantially the scientific quality of the manuscript. We agree with most recommendations and we give in this note our responses to all remarks.

Comment 2a)

The authors present an interesting study about karst characteristics of catchments at storm-event timescale. The merit of the study is the treatment of multiple sites and the storm-event time-scale, where the case study region in France provides a good example and good data.

Thank you.

The overall article is well written and of scientific interest, but the scientific argumentation should be improved. The literature study is very short and lacking some other approaches, the research question is not clearly stated, the concept is not sufficiently brought into the context of other methods, and the benefits and shortcomings of the developed method against other methods should be better elaborated in the theoretical part, and later on discussed based on the results.

We modified the manuscript according to remarks of referee #2 as detailed below. This review will allow several improvements such as a more complete literature review making more understandable the originalities of the study, and a better justification of our choice to work with topographic catchments as a spatial reference.

Comment 2b)

In the literature study, other concepts for describing the hydrological characteristics of larger scale karst systems should be mentioned. Gárfias-Soliz et al. (2010) found system memory, response time and mean delay between input and output as indicators for karstification but emphasized that the physically founded regionalization needs to account for structural complexity, heterogeneity of the lithology and the degree of karstification. Hartmann et al. (2013) described the responsive behavior of large-scale karst systems by system signatures derived from hydrodynamic and hydrochemical observations based on data from five different karst systems. Basha (2020) presented six recession curves for the classification of karst aquifers, describing the dichotomy of the dual flow characteristics between the fissured matrix and the conduit system. How do the descriptors found in this study relate to the indicators and signatures found by other authors? Is there a clear difference between daily and storm-event resolution at the size of catchment under consideration?

Our literature study mostly highlights lacks of research on karst hydrology when the studied object is the stream (rather than the spring). We agree that it can be improved by including some references to existing works related to the developed methodology, such as some relevant articles proposed. To this end, we reshaped the introduction and included the following paragraphs (see also our response to referee #1 for other literature review improvements).

→ **Performed change in manuscript (Introduction section Line 45 to Line 71 in the revised version of the manuscript):** *“The diversity of observed processes during storm event in karst catchments does not allow drawing a straightforward analysis on the control of karst in flood runoff generation. In the purpose of understanding the mechanisms involved in this control, there is a need for regionalized studies, covering a large-scale analysis of karst impact over short time periods when the catchment reacts after storm events. It is reasonable to think that karst can alternately increase or decrease storm impacts, depending on its capacity to infiltrate precipitation or to release stored water, i.e. depending on the direction of IGF it promotes. Despite the early conceptualization of IGF (Eakin, 1966), its major role in karst hydrological processes is tackled by very few studies (Le Moine et al., 2007; Lebecherel et al., 2013). Some authors tried to improve model capacities to reproduce karst-based IGF, such as Nguyen et al. (2020) with SWAT, Le Moine et al. (2008) with GR4J or Scanlon et al. (2003) comparing a distributed and a lumped model. Nevertheless, those studies dedicated to the improvement of model performance are not devoted to describe and understand all flood components in karst catchments.*

On one hand, most studies including karst system descriptors are based on a purely hydrogeological point of view, and are very integrative, as they tend to characterize karst aquifer as a whole, by analysing daily spring discharge. Gárfias-Soliz et al. (2010) found that system memory, response time and mean input-output delay are relevant indicators for karstification, in addition to a necessary consideration of the structural complexity and heterogeneity of the lithology. Hartmann et al. (2013), using 10 system signatures, performed a model parameters sensitivity analysis to investigate their links with hydrological processes on five Europe and Middle East karst sites. Basha et al. (2020) proposed six recession curve equations for the classification of karst aquifers, depending on their flow characteristics. On the other hand, some studies accounting for a spatialization of catchments focus on low-flow issues and surface-water/groundwater interaction (e.g., Covino et al., 2011, Mallard et al., 2014). Moreover, most regionalization works tend to spatialize annual indices (Sivapalan et al., 2011) or model parameters (Parajka et al., 2005; Oudin et al., 2008), and usually exclude catchments with identified IGF (Merz and Blöschl, 2004) or karst areas (e.g., Laaha and Blöschl, 2006).”

Comment 2c)

“Despite some studies describing significant IGF in karst areas (Le Moine et al., 2007; Lebecherel et al., 2013), the specific issue of IGF in karst has not been addressed as such.” There have been studies dealing with IGF, in particular the modelling of IGF at catchment scale or adding IGF to hydrological catchment models. Even if karst-based IGF is often neglected, it found attention among hydrological modelers, introducing or enhancing karst capabilities of e.g. SWAT (e.g., Nguyen et al., 2020). Apart from modelling and data analyses, geochemical methods based on analysis of chlorides and stable isotopes has been used to characterize karst systems.

We included a discussion on model improvements accounting for karst-based IGFs, such as the already cited work of Le Moine et al. (2008) and the study of Nguyen et al. (2020). It is also of interest the works of Scanlon et al. (2003) which modelled IGF in a karst aquifer using an equivalent porous media.

→ *Performed change in manuscript (Introduction & discussion sections Line 51 to Line 54 in the revised version of the manuscript):* Please refer to our response to comment 2b.

Comment 2d)

The authors correctly mention that many hydrological studies neglect the characteristics of karst regions, but their own catchment delineation follows the “classical” orographic approach using surface water divides instead of trying to derive subsurface catchments based on hydrogeological data/maps. This is a major shortcoming of the method. In particular, the water balance descriptors could be more meaningful if the overall contributing area including the subsurface catchment would be regarded. Whenever catchment sizes and rainfall amounts are related with stream flow, there would be a mismatch in karst regions and it is unclear for me how the authors have regarded that aspect. A detailed discussion is missing. In particular, for the description of storm peak flow, I would expect water balance descriptors, which include the areas connected by IGF. For arid basins, Wolaver et al. (2008) developed a method to delineate karstic aquifers based on data. Applying such delineation beyond the usage of surface catchments might help to improve the results of the characterization of the flow response to storm events. Here, one could think that the method is inconsistent and I ask the authors to explain why they did not try to delineate the karstic aquifers and include them into the water balance considerations.

We fully agree on the fact that the hydrogeological catchment should be considered in groundwater studies. Yet, we draw attention on the fact that our spatial reference scale is not the aquifer, but the river reach (at a gauging station or at a reach delimited by two stations). For this reason, and as our study accounts for IGF, the topographic catchment appears to be the right reference, even in the case of karst catchments. This comment 2d) is very similar to the comment 1b) of Referee #1, thus we invite readers to see our response to this last comment. We added the following paragraph to our introduction for a better understanding of our strategy.

→ *Performed change in manuscript (Introduction section Line 72 to Line 88 in the revised version of the manuscript):* “Regional spatial analyses need to be based on reliable data at the highest resolution available. For this purpose, the scale of the elementary catchment - i.e. subdivision of a basin following available gauging stations – appears to be the best resolution for long-term monitoring. Elementary catchment can be either the drained area of a headwater catchment controlled by a gauging station, or the drained area between two gauging stations (intermediate catchment). When considering surface and groundwater components, the delineation method of elementary catchments is questionable (topographic vs. hydrogeological boundaries). Despite the importance of groundwater processes in karst areas, topographic catchment delineation remains a more robust reference, for several methodological reasons. First, IGF can be defined as groundwater flow crossing topographic divides, as this concept emerged with the evidence of certain groundwater systems extending beyond the limits of

valleys (Eakin, 1966). A perfectly delineated groundwater basin would then show IGF equal to zero. For this reason, studies related to IGF use the topographic catchment spatial reference (Genereux et al., 2005; Schaller and Fan, 2009; Bouaziz et al., 2018; Nguyen et al., 2020; see also a synthesis in Fan, 2019). Second, although in karst catchments groundwater contributes to flood flow, surface runoff has to be considered obviously as an important component of flood flow. Consideration of hydrogeological catchments could thus lead to wrong surface contribution assessment depending on their surface drainage network. Third, as some groundwater flows are aligned with the main surface drainage axis, hydrogeological catchments would encompass the whole river, making it impossible to study the spatial variability of parameters along the river, at the elementary catchment scale. Finally, topographic delineation is reliable and easily reproducible, while groundwater delineation is characterized by a strong uncertainty and variability in karst areas.”

Comment 2e)

The conclusions seem to ignore the efforts done in karst research over the last decades: “Existence of karst hydrological specificities has been known for decades, but is poorly quantified and documented.”. Here, I disagree. The authors should explicitly say, where their method provided methodological innovation and which characteristics of karst regions could be now better described.

This statement refers to large scale works focusing on hydrological processes at the stream scale. Our purpose was not to ignore numerous works carried out in karst hydrogeology. However, the stream/river scale is not as much documented as the spring one. We agree that the text can be improved, especially in the light of the added references to advances in karst hydrology. We therefore replaced the cited sentence by a brief summary of what are the innovations of our study compared to existing works (storm-event time scale, spatialized quantification of karst impact on river reaches, effects on flood processes).

→ **Performed change in manuscript (Conclusion section Line 593 to Line 598 in the new version of the manuscript):** “Existence of karst hydrological specificities has been known for decades, but is not quantified in a large extent, especially regarding its impacts on flood processes at the scale of the river reach. Though some research had been done on this topic, it leads to hindered modelling performance in many cases. We have quantified several important parameters for a large set of catchments, for the first time in a spatialized study based on event-scale processes, contributing to build a common understanding at regional scale of karst behaviour during storm events, thus improving modelling and forecasting capabilities in such terrains.”

III) Revised manuscript

Impact of karst areas on runoff generation, lateral flow and interbasin groundwater flow at the storm-event timescale

Martin Le Mesnil^{1,2}, Roger Moussa¹, Jean-Baptiste Charlier², Yvan Caballero²

¹LISAH, Univ. Montpellier, INRAE, IRD, Montpellier SupAgro, Montpellier, France

5 ²BRGM, Univ. Montpellier, Montpellier, France

Correspondence to: Martin Le Mesnil (martin.le-mesnil@inrae.fr)

Abstract. Karst development influences the hydrological response of catchments. However, such impact is poorly documented and even less quantified, especially over short space and time scales. The aim of this article is thus to define karst influence on the different hydrological processes driving runoff generation, including interbasin groundwater flow (IGF) for elementary catchments at the storm-event time scale. IGF are estimated at the scale of the river reach, by comparing inlet and outlet flows, as well as the effective rainfall from the topographic elementary catchment. Three types of storm-event descriptors (characterising water balance, hydrograph shape and lateral exchanges) were calculated for the 20 most important storm events of 108 stations in three French regions (Cévennes Mountains, Jura Mountains and Normandy), representative of different karst settings. These descriptors were compared and analysed according to catchment geology (karst, non-karst, or mixed) and seasonality in order to explore the specific impact of karst areas on water balance, hydrograph shape, ~~and~~ lateral exchanges and hydrogeological basin area. A statistical approach showed that, despite the variations with study areas, karst promotes: i) Higher water infiltration from rivers during storm events; ii) Increased characteristic flood times and peak-flow attenuation; and iii) Lateral outflow. These influences are interpreted as mainly due to IGF loss that can be significant at the storm-event scale, representing around 50% of discharge and 20% of rainfall in the intermediate catchment. The spatial variability of such effects is also linked to contrasting lithology and ~~karstification degree~~ karst occurrence. Our work thus provides a generic framework for assessing karst impact on the hydrological response of catchments to storm events; moreover, it can analyse flood-event characteristics in various hydro-climatic settings, and can help testing the influence of other physiographic parameters on runoff generation.

25 1 Introduction

Understanding runoff generation requires a good knowledge of the different processes involved in catchment response to rainfall events, i.e. how precipitation is converted into underground, subsurface or surface flow. These processes are affected by several factors, such as the ~~presence-thickness~~ and nature of soil, land use, ~~hydrological initial catchment~~ conditions, or geology. While most of these can be documented or measured, it may be difficult to define the role of geology in a comprehensive way, especially when underground drainage networks are involved, as in karst areas. Karstification, the result of carbonate-rock dissolution, promotes infiltration and groundwater flow through enlarged fissures and voids (Bakalowicz, 2005), locally dramatically reducing drainage density on the surface and thus affecting the hydrological response of a catchment. These groundwater flows, if they do not return to surface within the considered catchment, can be considered as interbasin groundwater flows (IGF). IGF amplitude and sign can be linked to the area of the hydrogeological basin, which can be different from the area of the topographic one.

Karst impacts on flood processes are mostly documented through case studies. As an example, Zanon et al. (2010) showed that during a flash flood in 2007 in Slovenia, karst area reduced flooding, which was more important in a non-karst neighbouring zone, receiving less precipitation. Likewise, Delrieu et al. (2005) observed, for an exceptional storm event in 2002, lower runoff coefficient values for the karstic catchment compared to the hard-rock catchment in the eastern zone of the Cévennes Mountains. De Waele et al. (2010) and Charlier et al. (2015, 2019) determined that, depending on the location on

the river profile, karst areas could result in streamflow losses or gains due to the high spatial variability of the hydrogeological karst features. Other frequently described processes are groundwater rising leading to reduced infiltration and important surface runoff (Lopez-Chicano et al., 2002; Bonacci et al., 2006), and backflooding/sinkhole flooding due to conduit constriction (Maréchal et al., 2008; Bailly-Comte et al., 2009).

45 The diversity of observed processes during storm event in karst catchments does not allow drawing a straightforward analysis on the control of karst in flood runoff generation. In the purpose of understanding the mechanisms involved in this control, there is a need for regionalized studies, covering a large-scale analysis of karst impact over short time periods when the catchment reacts after storm events. It is reasonable to think that karst can alternately increase or decrease storm impacts, depending on its capacity to infiltrate precipitation or to release stored water, i.e. depending on the direction of IGF it promotes.
50 Despite the early conceptualization of IGF (Eakin, 1966), its major role in karst hydrological processes is tackled by very few studies (Le Moine et al., 2007; Lebecherel et al., 2013). Some authors tried to improve model capacities to reproduce karst-based IGF, such as Nguyen et al. (2020) with SWAT, Le Moine et al. (2008) with GR4J or Scanlon et al. (2003) comparing a distributed and a lumped model. Nevertheless, those studies dedicated to the improvement of model performance are not devoted to describe and understand all flood components in karst catchments. Despite the impact of karst on flow regimes, the
55 literature commonly lacks detailed information on the hydrology of karst catchments. For instance, karst areas are regularly discarded in regionalization studies (e.g., Laaha and Blöschl, 2006), because of their non linear behaviour and their strong typological variability, including binary karst, covered karst areas, karst plateaus, etc. Despite the many storm event time scale case studies found in the literature (e.g., Lopez-Chicano et al., 2002; Bonacci et al., 2006; Maréchal et al., 2008; Bailly-Comte et al., 2009; Charlier et al., 2015, 2019), no multi-site description and study of the impact of karst systems on flood generation
60 seems to exist.

On one hand, most studies including karst system descriptors are based on a purely hydrogeological point of view, and are very integrative, as they tend to characterize karst aquifer as a whole, by analysing daily spring discharge. Gárfias-Soliz et al. (2010) found that system memory, response time and mean input-output delay are relevant indicators for karstification, in addition to a necessary consideration of the structural complexity and heterogeneity of the lithology. Hartmann et al. (2013),
65 using 10 system signatures, performed a model parameters sensitivity analysis to investigate their links with hydrological processes on five Europe and Middle East karst sites. Basha et al. (2020) proposed six recession curve equations for the classification of karst aquifers, depending on their flow characteristics. On the other hand, some studies accounting for a spatialization of catchments focus on low-flow issues and surface-water/groundwater interaction (e.g., Covino et al., 2011, Mallard et al., 2014). Moreover, most regionalization works tend to spatialize annual indices (Sivapalan et al., 2011) or model
70 parameters (Parajka et al., 2005; Oudin et al., 2008), and usually exclude catchments with identified IGF (Merz and Blöschl, 2004) or karst areas (e.g., Laaha and Blöschl, 2006).

Regional spatial analyses need to be based on reliable data at the highest resolution available. For this purpose, the scale of the elementary catchment - i.e. subdivision of a basin following available gauging stations – appears to be the best resolution for long-term monitoring. Elementary catchment can be either the drained area of a headwater catchment controlled by a gauging
75 station, or the drained area between two gauging stations (intermediate catchment). When considering surface and groundwater components, the delineation method of elementary catchments is questionable (topographic vs. hydrogeological boundaries). Despite the importance of groundwater processes in karst areas, topographic catchment delineation remains a more robust reference, for several methodological reasons. First, IGF can be defined as groundwater flow crossing topographic divides, as this concept emerged with the evidence of certain groundwater systems extending beyond the limits of valleys (Eakin, 1966).
80 A perfectly delineated groundwater basin would then show IGF equal to zero. For this reason, studies related to IGF use the topographic catchment spatial reference (Genereux et al., 2005; Schaller and Fan, 2009; Bouaziz et al., 2018; Nguyen et al., 2020; see also a synthesis in Fan, 2019). Second, although in karst catchments groundwater contributes to flood flow, surface runoff has to be considered obviously as an important component of flood flow. Consideration of hydrogeological catchments

could thus lead to wrong surface contribution assessment depending on their surface drainage network. Third, as some
85 groundwater flows are aligned with the main surface drainage axis, hydrogeological catchments would encompass the whole
river, making it impossible to study the spatial variability of parameters along the river, at the elementary catchment scale.
Finally, topographic delineation is reliable and easily reproducible, while groundwater delineation is characterized by a strong
uncertainty and variability in karst areas. Recently, Le Mesnil et al. (2020) described the role of karst areas, using annual water-
budget indicators at the elementary catchment scale (headwater catchment controlled by a gauging station; or intermediate
90 catchment: drained area between two gauging stations). There is thus a need for a regionalized study, covering a large scale
analysis of karst impact over short timespans when the catchment responds to storm events. To our knowledge, no prior studies
investigated this topic at such a short time scale, as elementary catchment studies mostly focus on low flow issues and surface-
water/groundwater interaction (e.g., Covino et al., 2011, Mallard et al., 2014). Moreover, most regionalization studies tend to
spatialize annual indices (Sivapalan et al., 2011) or model parameters (Parajka et al., 2005; Oudin et al., 2008), and usually
95 exclude catchments with identified interbasin groundwater flow (IGF) (Merz and Blöeschl, 2004). However, the IGF concept
came up early (Eakin, 1966) and is increasingly investigated (see a synthesis in Fan, 2019). Despite some studies describing
significant IGF in karst areas (Le Moine et al., 2007; Lebecherel et al., 2013), the specific issue of IGF in karst has not been
addressed as such.

This article aims at providing a new methodology to characterize the spatial variability of karst influence on hydrological
100 processes affecting runoff generation, including IGF, at the storm-event time scale. IGF are estimated at the scale of the river
reach, by comparing inlet and outlet flows, as well as the effective rainfall from the topographic elementary catchment. The
present study complements the previous work by Le Mesnil et al. (2020), which described the role of karst areas using annual
water-budget indicators at the elementary catchment scale. Here, descriptors are calculated for major storm events at 108
stations in three areas in France (Cévennes Mountains, Jura Mountains and Normandy) with different karst settings. The
105 descriptors are of three types: water balance, hydrograph shape and lateral exchange. Water-balance descriptors are obtained
from discharge and precipitation depths, analysing the respective importance of the different flows during storm events. They
help understanding how catchments transform precipitation into surface- and underground flow. Such descriptors are of a great
interest to assess the spatial variability of catchment hydrological response (Sivapalan et al., 2011). Hydrograph-shape
descriptors are derived from catchment hydrographs recorded at inlet and outlet stations during storm events. They describe
110 hydrological processes (Raghunath, 2006) and, when analysed on successive stations, help characterizing flood wave routing.
Lateral-exchange descriptors are based on lateral hydrographs, simulated with the diffusive wave equation (DWE, Moussa,
1996) applied between two gauging stations (for intermediate catchments only). They provide information on lateral inflow
and outflow at the elementary catchment scale. Lateral flow is mainly the result of IGF, effective rainfall, variations in aquifer
storage and overbank phenomena. A particular analysis is performed on IGF, which are expressed in depth as well as in fictive
115 catchment area variation, and of which seasonal influence is discussed. Our aim was to characterize karst influence on the
different hydrological processes affecting runoff generation, including IGF, at the storm event time scale and at the spatial
scale of an elementary catchment. For that, descriptors were calculated for major storm events at 108 stations in three areas in
France (Cévennes Mountains, Jura Mountains and Normandy) with different karst settings. The descriptors are of three types:
water balance, hydrograph shape and lateral exchange. Water balance descriptors are obtained from discharge and precipitation
120 depths, analysing the respective importance of the different flows during storm events. They help understanding how
catchments transform precipitation into surface and underground flow. Such descriptors are of a great interest to assess the
spatial variability of catchment hydrological response (Sivapalan et al., 2011). Hydrograph shape descriptors are derived from
catchment hydrographs recorded at inlet and outlet stations during storm events. They describe hydrological processes
(Raghunath, 2006) and, when analysed on successive stations, help characterizing flood wave routing. Lateral exchange
125 descriptors are based on lateral hydrographs, simulated with the diffusive wave equation (DWE, Moussa, 1996) applied
between two gauging stations (for intermediate catchments only). They provide information on lateral inflow and outflow at

~~the elementary catchment scale. Lateral flow is mainly the result of effective rainfall, IGF, variations in aquifer storage and overbank phenomena.~~

The three types of descriptors are compared and analysed according to the catchment geology type (classified as ‘karst’, ‘non-karst’, or ‘mixed’), in order to explore its impact on runoff generation processes. The paper thus provides a framework for assessing the impact of a given physiographic parameter on the hydrological response of catchments to storm events.

2 Methodology

2.1 General methodology

We calculated 15 descriptors (five for each of the three types) of catchment response to storm events and assessed their variability as a function of karst occurrence. To this end, we grouped elementary catchments into three different geology types, based on relative areas of their main geological formations. Catchments underlain by only karstified rock are in the karst group (K), whereas catchments containing only non-karstified rock are in the non-karst group (NK). Any catchment with a combination of both karstified (>10%) and non-karstified rocks is in the mixed group (M). The karstifiable nature of rocks was assessed with the BDLISA database (Sect. 3.1.2). Descriptors were calculated for the 20 strongest storm events for all catchments (Sect. 2.2). The values obtained for each group (K, M, NK) were compared with each other to assess karst influence on them. Then, for K catchments only, the three study areas (Cévennes, C; Jura, J; Normandy, N, see Sect. 3.2 for area descriptions) were compared to assess the area-specific nature of karst influence. Our framework was kept as generic as possible, to propose an approach that would be easily adaptable to another investigation field. Consequently, the karst-catchment classification can be replaced by any other physiographical typology.

Descriptors are complementary but not necessarily independent from each other. They are of three types, and were chosen to provide relevant information on different processes:

- Water-balance descriptors show the respective importance of the different flows occurring during storm events and allow understanding how catchments transform rainfall into surface- and underground flow. Such descriptors are volumes (expressed as depth [mm]), or volume ratios. They can be calculated at headwater-catchment or intermediate-catchment outlets, the latter involving subtracting inlet flow from outlet flow. This was applied to the 108 elementary catchments.
- Hydrograph-shape descriptors describe the dynamics of storm events and flood-wave routing. They combine peakflow variation, characteristic times and flood-wave celerity. Characteristic times can be obtained from any measured hydrograph, whereas peakflow variation and celerity are evaluated between inlet and outlet hydrographs (for intermediate catchments only), considering catchments with only one inlet station; some intermediate catchments having several inlets when covering the confluence of streams. This was applied to all 108 elementary catchments for characteristic times and to the 36 intermediate catchments with only one inlet regarding peakflow variation and celerity.
- Lateral-exchange descriptors provide information on the dynamics of lateral inflow and outflow affecting an elementary catchment reach, as well as on the respective contributions of channel diffusivity and lateral exchanges to peakflow variations. This analysis is based on lateral hydrographs, simulated with the DWE (Appendix B), applied to intermediate catchments with one inlet. Lateral exchanges may be a combination of effective rainfall (P_{eff}) over the elementary catchment, IGF, aquifer storage variation and overbank phenomena. Overbank flow is considered as a minor process assuming that the overflow water returns to the river after a relatively short time during the recession. Thus, a water balance including P_{eff} allows discussing the importance

of IGF, along with aquifer storage variation. This was applied to the 36 intermediate catchments with only one inlet for lateral exchange dynamics, and to all 108 elementary catchments for IGF assessment.

2.2 Flow assessment at the elementary catchment scale

The 15 descriptors were calculated on elementary catchments for 20 selected strongest storm events. For the sake of representativeness, this selection was based on both rainfall and streamflow records. From the available data time series spanning several decades (see 3.1 for more details), the ten strongest precipitation and ten strongest streamflow events were extracted. Care was taken not to select the same events via the two extraction methods.

Streamflow is measured at several gauging stations along a given river, defining elementary catchments. For the most upstream station of a river, the elementary catchment corresponds to the ordinary topographic catchment. Otherwise, the elementary catchment is an intermediate one, covering the portion of the basin drained between two gauging stations (Fig. 1). In the case of intermediate catchments, streamflow is calculated following Eq. (1) as the difference between outlet flow (Q_O) and inlet flow (Q_I). A hydrograph decomposition is operated for separating the quick (stormflow Q_S) and slow (underground flow Q_U) flow components, as shown in Eq. (2) and (3) (see Appendix A for more details). The Q_S and Q_U components of the intermediate catchment are also obtained from the difference between inlet and outlet flow components as shown in Eq. (4) and (5). For these intermediate catchments, the Q , Q_S and Q_U values can thus be negative; note also that the associated uncertainties are twice higher than those of measured flows (Q_O and Q_I).

$$Q = Q_O - Q_I \quad (1)$$

$$Q_I = Q_{I,U} + Q_{I,S} \quad (2)$$

$$Q_O = Q_{O,U} + Q_{O,S} \quad (3)$$

$$185 \quad Q_S = Q_{O,S} - Q_{I,S} \quad (4)$$

$$Q_U = Q_{O,U} - Q_{I,U} \quad (5)$$

In addition to inlet and outlet flows, a lateral flow (Q_L) is calculated. This flow is mainly a combination of IGF, effective rainfall (P_{eff}) over the elementary catchment, ~~IGF~~, aquifer storage variation and overbank phenomena (Eq. 6). Overbank phenomena is (neglected here; (see Sect. 2.1). The Q_L hydrograph is simulated using an inverse model, solving the DWE accounting for lateral flow between inlet and outlet stations, assuming a uniform lateral distribution of exchanges along the river reach (Appendix B).

$$190 \quad \underline{Q_L = IGF + P_{eff} + \delta} \quad (6)$$

Finally, after an estimation of P_{eff} , (Appendix C), all measurable inflow (Q_I and P_{eff}) and outflow (Q_O) are known. Hence, IGF (groundwater flowing inside or outside the elementary catchments delimited by topographic boundaries) can be calculated for each storm event, along with the aquifer storage (noted δ). Figure 1 shows all considered flows and their corresponding hydrographs, at the spatial scale of an elementary catchment and the time scale of a storm event.

2.3 Descriptors

2.3.1 Water balance descriptors

For each storm event, volumes of the different flows in an elementary catchment are calculated (Fig. 1). Total discharge volume noted V_Q , is calculated as:

$$200 \quad V_Q = V_O - V_I = (V_{O,S} + V_{O,U}) - (V_{I,S} + V_{I,U}) \quad (7)$$

with V_I , V_O being the volumes of total streamflow (expressed as water depths in mm) and $V_{I,S}$, $V_{I,U}$, $V_{O,S}$, $V_{O,U}$ those of the quick- and slow-flow components of inlet Q_I and outlet Q_O , respectively. V_P is the volume of precipitation falling on the elementary catchment during the storm event. The values being dependent on the catchment surface, they are normalized by

205 the topographic area (A) of the considered catchment and expressed in water depth [mm]. From these volumes, five water-balance descriptors are calculated (see Appendix D for equations):

- V_S : event stormflow [mm];
- V_U : event baseflow [mm];
- R_C : event runoff coefficient [dimensionless], calculated as total event streamflow divided by event rainfall;
- 210 • $R_{C,S}$: event storm runoff coefficient [dimensionless], calculated as event stormflow divided by event rainfall;
- S_C : event stormflow coefficient [dimensionless], calculated as event stormflow divided by total event streamflow.

2.3.2 Hydrograph-shape descriptors

For each storm event, five more descriptors were calculated, characterizing hydrograph morphology and storm-event
215 dynamics. Characteristic times are of a great interest in storm hydrology and constitute a widely used framework, allowing convenient catchment and event comparisons (Bell and Om Kar, 1969). Here, we use three of them. The time constant of the rising limb T_{Ri} corresponds to the time duration needed for streamflow to increase from half-peakflow ($0.5 Q_{O,X}$) to peakflow ($Q_{O,X}$). T_{08} is the time duration for $Q_O(t) > 0.8 Q_{O,X}$, important in terms of operational flood management. T_{Re} is the characteristic recession time, obtained from the linearization method of Maillet (1905), which approximates the recession
220 curve by an exponential function as shown in Eq. (87).

$$Q_{Maillet}(t) = q \cdot e^{-\beta t} = q \cdot e^{-t/T_{Re}} \quad (87)$$

with β the recession coefficient and q the discharge at the beginning of the recession phase. The T_{Re} time constant is the duration needed for streamflow to decrease by a factor $e \approx 2.7$ during recession.

In the case of intermediate catchments, the peakflow variation (Δ) is calculated as the difference between outlet station
225 peakflow ($Q_{O,X}$) and inlet station peakflow ($Q_{I,X}$), normalized by rainfall. A parameter C_G is also calculated, used as the celerity for applying the DWE (Appendix B). C_G is equal to the river reach length (l) divided by the elapsed time (T_G) between Q_I and Q_O gravity centres (G_I and G_O). The five hydrograph-shape descriptors (see Appendix D for formulae) are:

- Δ/V_P , peakflow variation normalized by rainfall [s^{-1}];
- T_{Ri} , event time duration of rise [h];
- 230 • T_{08} , event time duration to 80% of peakflow [h];
- T_{Re} , event characteristic recession time as per Maillet (1905) approximation [h];
- C_G , celerity based on elapsed time between hydrograph gravity centres [$m \cdot s^{-1}$].

2.3.3 Lateral-exchange descriptors

For catchments with one inlet station, a lateral-flow hydrograph is simulated, using the solution of the inverse problem of the
235 DWE assuming that the lateral flow is uniformly distributed along the channel (Moussa, 1996; see Appendix B). The DWE equation has two free parameters, the celerity C ($m \cdot s^{-1}$) and the diffusivity D ($m^2 \cdot s^{-1}$) of the flood wave. First, Q_I is routed using the DWE without lateral flow for given values of C and D , simulating a theoretical outflow without lateral exchange, noted $Q_{I,R}$ on Fig. 3. The inverse problem supposes known Q_I , Q_O , C and D values, simulating the lateral flow Q_L . Sensitivity analysis of the DWE to the two parameters is largely available in the literature, showing that the DWE is more sensitive to parameter
240 C than D (Moussa and Bocquillon, 1996; Cholet et al., 2017; Charlier et al., 2019). Here, C was assumed to be equal to C_G and we used a fixed value for $D = 10,000 \text{ m}^2/\text{s}$ (for medium size catchments of 100 to 500 km^2 ; Moussa and Bocquillon, 1996; Todini, 1996) in a matter of parsimony, which is acceptable as the model is much more sensitive to C than to D . The DWE

solution was validated experimentally under controlled conditions (Moussa and Majdalani, 2019), and has also been implemented on natural karst catchments (Charlier et al., 2015, 2019; Cholet et al., 2017).

245 From the simulated lateral hydrograph, five descriptors were calculated. First, the peakflow-variation descriptor Δ was decomposed into two components Δ_D and Δ_L , the respective contributions of channel diffusivity and lateral exchanges (Charlier et al., 2019). Δ_D and Δ_L are also normalized by V_P . In the case of a reach without lateral exchanges, Δ is negative and only due to channel diffusivity (equal to Δ_D , Fig. 3(a)). In the case of a gaining reachcatchment, Δ can be positive or negative, with compensating contributions of channel diffusivity and lateral inflow (Fig. 3(b)). In the case of a losing reachcatchment, Δ is negative, with cumulated contributions of channel diffusivity and lateral outflow (Fig. 3(c)). Second, volumes of lateral inflow and outflow (V_{L+} and V_{L-}) were calculated from the lateral hydrograph and normalized by event rainfall. Note that Q_L can be successively positive and negative within a single storm event (Fig. 1).

As simulated lateral hydrographs are based on the difference between discharge volumes at the inlet and outlet of catchments, they also integrate precipitation on the elementary catchment during storm events. In order to focus on groundwater exchanges and suppress the influence of effective rainfall (P_{eff}), this latter has to be estimated. It was done using three different modelling approaches, providing a range for this component characterized by major uncertainties. The three approaches, respectively based on the methods of Thornthwaite (1948), Dingman (2002), and the GR model (Edijatno et al., 1999), are described in Appendix C. The final value is the mean of those obtained from the three methods.

260 The remaining lateral-exchange term combines IGF and potential aquifer storage variation (δ). δ can either be positive, corresponding to an aquifer recharge, or negative, corresponding to an aquifer draining. Aquifer draining is less likely during storm events, as important rainfalls generally occur. In case of an aquifer recharge, and as our analysis is performed on the whole storm-event period (including the entire recession), a substantial part of the infiltrated water should be released, either inside the considered elementary catchment or outside of it. In the first case, the considered amount of water is accounted for in the V_O term and will not influence the lateral-exchange term. In the second case, the released water actually constitutes an IGF. For these reasons, we use the term IGF* for the obtained water-balance term. For each storm event, IGF*, combining IGF and potential aquifer storage variation (δ), is calculated as in Eq. (98):

$$IGF^* = IGF + \delta = V_Q - V_{Peff} = V_O - V_I - V_{Peff} \quad (98)$$

The five lateral exchange descriptors (see Appendix D for formulae) are:

- Δ_D/V_P , part of peakflow variation due to channel diffusivity, normalized by rainfall [s^{-1}];
- Δ_L/V_P , part of peakflow variation due to lateral exchanges, normalized by rainfall [s^{-1}];
- V_{L+}/V_P , event lateral inflow, normalized by rainfall [dimensionless];
- V_{L-}/V_P , event lateral outflow, normalized by rainfall [dimensionless];
- IGF^*/V_P , event interbasin groundwater flow including potential aquifer storage variation (δ), normalized by rainfall [dimensionless].

275 2.4 Statistical approach

Once all descriptors have been calculated, a statistical analysis is performed for comparative purposes. For each descriptor, the obtained values are grouped in different samples, by i) geology type (K, M, NK), and ii) study area (C, J, N) for karst catchments only (K geology type). This allows characterizing the impact of karst areas on the hydrological response and provides additional information on regional specifics of this impact.

280 The results are presented as boxplots, to discuss how the distribution of the descriptors varies for all samples. Then, statistical tests assess the significance of the results. Twin-sample t-tests are performed successively on K vs. NK, M vs. NK and M vs. K catchments, and—only for K catchments—on C vs. J, C vs. N and J vs. N. Since it is not assumed that the two data samples are from populations with equal variances, the test statistics under the null hypothesis have an approximate Student's 't'

distribution with a number of degrees of freedom given by Satterthwaite's approximation (Satterthwaite, 1946). This test provides a decision for the null hypothesis that the data in paired tested samples come from independent random samples from normal distributions with equal means, and equal but unknown variances. The result is 1 if the test rejects the null hypothesis at the 5% significance level, and 0 otherwise.

3 Data sets and study areas

3.1 Data sets

3.1.1 Temporal data

Temporal data used in this paper are:

- Hourly streamflow data from the French public streamflow database 'Banque Hydro' (<http://www.hydro.eaufrance.fr/>), managed by the French Regional Environment Directions (Direction Régionale de l'Environnement, de l'Aménagement et du Logement, DREAL). These data are produced by interpolation of water-depth measurements at a variable infra-hourly time step and converted into streamflow values.
- Hourly rainfall data are from Comephore (Tabary, 2007; Tabary et al., 2007) covering 1997 to 2005 and Antilope (Champeaux et al., 2011) from 2006 to 2018. Both datasets are measurement reanalyses edited by the French public meteorological service Météo France (<http://www.meteofrance.fr/>). They have a 1-km² spatial resolution and consist in radar rainfall measurements, calibrated to fit the data from surface precipitation gauges.
- Daily potential evapotranspiration depths are from "Safran" (Système d'Analyse Fournissant des Renseignements Atmosphériques à la Neige; Vidal et al., 2010), edited by the French meteorological service (Météo France). They are used for estimating effective rainfall (Appendix C).

Hourly rainfall data are available from 1997 onward, and hourly streamflow data periods vary depending on the catchments. Table 1 shows periods of availability of both data sets for 11 hydrographic catchments in three areas of France, covering a total area of almost 25,000 km². Attention was paid to use only validated streamflow data from gauging stations with a hydrological significance, i.e. not influenced by human activities such as damming or pumping. Nevertheless, a 10% uncertainty is associated with streamflow data, which can be higher during extreme storm events due to uncertain rating equations or measuring ranges.

3.1.2 Spatial data

Spatial data used in this paper are:

- Boundaries of topographic catchments, from the French National Watershed Database (*Base Nationale des Bassins Versants*, BNBV). It was edited by the French Central Service for Hydrometeorology and Support on Flood Forecasting (*Service Central d'Hydrométéorologie et d'Appui à la Prévision des Inondations*, SCHAPI) and the French Research Institute in for Agriculture, Food supply and the Environment (*Institut National de Recherche en Agriculture, Alimentation et Environnement* INRAE).
- BDLISA database (<https://bdlisa.eaufrance.fr/>), which describes the properties of hydrogeological entities and aquifers in France, edited by the French Geological Survey (*Bureau de Recherches Géologiques et Minières*, BRGM).

- Map of available soil-water capacity from INRAE (Le Bas, 2018), used for estimating effective rainfall (Appendix C).

3.2 Study areas

3.2.1 General settings

325 The previously described methodology was applied to three areas in France, including 11 hydrographic basins and representing a total area of 25,000 km². The three areas are totally or partially karstified, with different geological and hydrometeorological settings. From south to north, they belong to the regions of Cévennes Mountains, the Jura Mountains and Normandy. Figure 4 shows the locations of the 11 hydrographic basins, on the map of French karst aquifers (4A), and the gauging-station networks with geology type of the elementary catchments on maps 4B, C and D.

330 In the Cévennes Mountains (Fig. 4(b)), six hydrographic basins were studied, including 51 gauging stations. They are mostly so-called binary karst basins, with head catchments on hard rock receiving around 1500 mm/year precipitation, and median and downstream parts underlain by limestone plateaus, with around 1000 mm/year rainfall.

The Jura Mountains region corresponds to the Doubs River basin, a few kilometres upstream from its confluence with the Saône River, which includes 39 gauging stations. Outcrops mostly consist of extensively karstified Jurassic limestone and marl, except in the extreme northern and western parts of the region. Precipitation follows a strong elevation gradient, with annual values ranging from 1700 mm on upstream catchments at heights of 1400 m (a.s.l), to 1200 mm at the outlet at an elevation of around 200 m (a.s.l).

335 In Normandy, four hydrographic basins covered 18 gauging stations. The two eastern basins are tributaries of the Seine, the other two being coastal basins. The climate is maritime and annual rainfall ranges from 700 to 1000 mm. Rivers in the eastern part of the area drain chalky limestone with karst covered by clay. The mid-western zone is underlain by Jurassic limestone, corresponding to the western border of the Paris Basin.

3.2.2 Hydrometeorology and physiography of study areas

The surface area of elementary catchments depends upon the location of gauging stations. They have similar ranges for each geology type and study areas (Fig. 5(a)), and the potential bias induced by scale effect is limited. Figure 5(b) shows the strong variability of reach mean slope with geology type. This can be explained by the morphology of karst plateaus that are prone to intense erosion, forming canyons with low slopes controlled by the base level. Moreover, higher-elevation ground is mostly underlain by hard-rock (i.e. non-karst) terrains. Contrasting slopes should thus not be seen as a bias, but as the result of an intrinsic characteristic of limestone areas, coinciding with ~~karstification~~karst occurrence. Reach mean slope on karst catchments has similar values for the three study areas, with a maximum variation in median slope of 5‰ from Normandy to the Cévennes.

345 Figures 5(c) and 5(d) present the distribution of precipitation and discharge depth for the 20 strongest storm events (see Sect. 2.1) in the 108 elementary catchments, grouped by geology type (K: karst, M: mixed, NK: non-karst), and by study area (C: Cévennes, J: Jura, N: Normandy) for K catchments. A major contrast in precipitation depth is highlighted, with a median value of 100 mm per event for the Cévennes catchments, which is higher than the maximum recorded value for the Normandy catchments (80 mm). Jura Mountains catchments have an intermediate position, with a median rainfall-event depth of around 50 mm. A similar variation is observed for geology types, median-event rainfall depth increasing from 45 mm on K catchments to 105 mm on NK catchments. This is partly due to the Cévennes upstream catchments of non-karst hard rock receiving intense rainfall. Nevertheless, this has no major influence on the descriptor values since they are normalized by rainfall. The same

trend is seen for flow depths, with median values of 20, 10 and 2 mm and 50, 15 and 5 mm for C, J, N and NK, M, K catchments, respectively.

4 Results

4.1 Water balance descriptors

The distribution of water-balance descriptors is presented on Fig. 6 (top row) i) by geology type (K: karst, M: mixed, NK: non-karst), and ii) by location for karst catchments only (C: Cévennes, J: Jura, N: Normandy). Stormflow and baseflow depth (V_S and V_U) are influenced by geology type, both decreasing by a factor 10 from NK to K reaches. V_P may have an influence on these results, but cannot explain all of this correlation since it only varies by a factor 2. V_S and V_U being calculated from differences between inlet and outlet runoff (see Appendix D), show that karstified catchments generally produce less streamflow than other ones, regarding both quick- and slow-flow components. K and M catchments have their first V_S and V_U quartiles close to zero, highlighting the major streamflow losses along their reaches. V_S and V_U values also vary with location, V_S marking the typical rainfall intensity of each climatic region (Cévennes, Jura and Normandy in descending order; Fig. 5(a)), whereas V_U seems to be more influenced by baseflow index information that is lower in Cévennes, probably due to a higher number of NK catchments.

Runoff coefficients are also significantly influenced by geology type, R_C values dropping from 0.42 on NK to 0.14 and 0.19 on K and M, respectively. This trend is observed in a comparable way in the three areas, all showing R_C values between 0.1 and 0.2 for their K reaches. Storm-runoff coefficients show a similar behaviour, with even more contrasting values between K and NK reaches ($R_{C,S}$ being five-fold higher in NK, against three-fold for R_C). Stormflow coefficient S_C corresponds to the part of streamflow due to quick runoff. It decreases from 0.45 to 0.3 in K reaches and also has a geographic pattern, with Cévennes K catchments having 50% of quick-flow components, against 25% for Jura and Normandy K catchments. This correlates with lower V_U values in the Cévennes K catchments, even with higher rainfall depths.

Water-balance descriptors globally show that karst areas promote more infiltration (lower R_C), the infiltrated water not being released through streamflow at the storm-event timescale (lower S_C).

4.2 Hydrograph-shape descriptors

Distributions of hydrograph-shape descriptors are shown on Fig. 6 (middle row) i) by geology type, and ii) by study area for karst catchments only. Median values of peakflow variation normalized by rainfall (Δ/V_P) values vary from $4.6 \text{ E}10^{-6} \text{ s}^{-1}$ for NK catchments to $1.9 \text{ E}10^{-6}$ and $0.5 \text{ E}10^{-6} \text{ m}^3 \cdot \text{s}^{-1} \cdot \text{km}^{-2}$ for M and K catchments, respectively. It shows that the larger the karst outcrops, the smaller is peakflow amplification. This trend was noted in all study areas, even though Cévennes K catchments show more peakflow amplification than others (and especially a large Δ variability).

Karst catchments have a median rise duration T_{Ri} of 11 hours, whereas M and NK rises take 6 and 4 hours, respectively. Streamflow increase is thus considerably slower in karst reaches. Median durations at 80% of peakflow T_{08} were also correlated with geology type, with values of 11, 6 and 3 hours for K, M and NK catchments respectively, showing that the slower discharge increase is associated with a buffered peakflow. The median value of the recession time constant (T_{Re}) is 44 hours for K catchments, and 28 hours for M and NK ones. Typical recessions in karst reaches are thus 50% slower than in others. The characteristic times T_{Ri} , T_{08} and T_{Re} are influenced by karst in different ways depending on study area. For each of them, Cévennes catchments show shorter durations, followed by Normandy with durations close to the median values of the whole K-catchments sample, and by the Jura.

The flood-wave celerity (C_G), obtained by comparing inlet and outlet hydrograph gravity centres, is constant around $1.3 \text{ m} \cdot \text{s}^{-1}$, regardless of geology type. This means that, in karst catchments, storm events tend to have longer T_{Ri} , T_{08} and T_{Re} values,

without slowing down of flood-wave routing, corresponding to an increase in the diffusivity of the flood wave at constant celerity. However, celerity shows a regional pattern, consistent with mean regional reach slopes (Fig. 5), with values increasing from 0.8 m.s⁻¹ in Normandy to 1.6 m.s⁻¹ in the Cévennes, Jura catchments showing intermediate values.

Figure 7 shows the peakflow evolution towards catchments with karst. K catchments globally align on the first bisector, showing in most cases low peakflow amplification. NK catchments mostly lie above the equation line of $y = 1.5x$, showing an increase of at least 50% in specific peakflow, meaning that lateral inflow is higher in those catchments. M catchments have an intermediate hydrologic response.

To summarize, hydrograph-shape descriptors globally show that during the strongest storm events, karst areas tend to decrease peakflow amplification and increase characteristic flood times, without impacting flood-wave celerity. It should be noted that this general pattern is associated to a large variability of hydrological response in K catchments with locally contrasting behaviour.

4.3 Lateral-exchange descriptors

The distribution of lateral-exchange descriptors is shown on Fig. 6 (bottom row). The component of peakflow variation due to channel diffusivity (Δ_D/V_P) is quite stable with geology type, with values around $-4 \text{ E}10^{-7} \text{ s}^{-1}$. The component of peakflow variation due to channel lateral exchanges (Δ_L/V_P) correlation with geology type is more significant, with median values increasing from $1 \text{ E}10^{-6} \text{ s}^{-1}$ to $2.5 \text{ E}10^{-6}$ and $5 \text{ E}10^{-6} \text{ s}^{-1}$ for K, M and NK reaches, respectively. This shows that the strongest lateral inflow in intermediate catchments occurs in NK areas, as expected from the V_P and V_Q variability (Fig. 5), as well as following $-Q_{o,x}$ vs. $Q_{l,x}$ (Fig. 7). It also highlights the compensation of diffusivity peakflow attenuation by lateral inflow, which is stronger in NK catchments. Lateral exchanges are negative for the first quartile of events on K reaches, against very few events for NK reaches. Karst influence on Δ_D/V_P and Δ_L/V_P is similar in Jura and Normandy catchments, whereas Cévennes catchments show higher peakflow variations in both components, leading to a strong variability in Δ values (Fig. 6). This trend is confirmed by the volume of lateral inflows (V_{L+}/V_P) values that decrease with karst occurrence. Volume of lateral outflows (V_{L-}/V_P) distribution also varies with geology type, lateral outflow being reduced in NK catchments. Finally, both descriptors undergo similar karst influence in the three study areas, with only Cévennes K catchments having higher lateral outflow.

Analysis of the simulated lateral hydrographs shows that the weak peakflow amplification of karst reaches is mostly due to a low exchange component Δ_L , associated with a peakflow attenuation caused by diffusivity Δ_D . This is confirmed by lateral V_{L+}/V_P inflow that is three times lower in K catchments than in NK catchments.

Figure 6 also shows the distribution of IGF^*/V_P ($\text{IGF}^* = \text{IGF} + \delta$), which indicates that storm events over NK catchments are mostly characterized by incoming IGFs (>75% of all events). K and M catchments are subject to more balanced incoming and outgoing IGFs, with a median IGF^*/V_P value of 0.06 against 0.2 for NK. Absolute IGF^* depths for K and M catchments are mostly <50 mm per storm event, against 100 mm or more in NK catchments (results not shown).

IGF^*/V_P distribution highlights some differences for K catchments in each study area. Storm events in Jura K catchments mostly show streamflow excess (>75% of all events), with a mean IGF^*/V_P value of 0.1. Cévennes and Normandy K catchments have a more balanced behaviour, with median IGF^*/V_P values close to zero and storm events resulting in streamflow excess or -deficit in comparable proportions.

4.4 Statistical tests

Table 2 shows for each descriptor the results of 't' tests for all combinations of paired samples (Sect. 2.5). The quick- and slow-flow components V_S and V_U both show statistically significant variations with geology type (increasing from K to NK) and with study area (Fig. 6). Despite visible trends in R_C , $R_{C,S}$ and S_C variation with geology type (Fig. 6), this correlation has

a low statistical significance, with only $R_{C,S}$ being discriminant between K and NK catchments. R_C and $R_{C,S}$ on K catchments show significant variation with study area, which was not verified for S_C .

440 Storm-hydrograph shape is strongly related to geology type, with peakflow amplification reduced and locally attenuated. The longer characteristic times for karst catchments (Fig. 6) have a statistical significance regarding characteristic times. Only flood-wave celerity is not affected by geology type. Karst influence is area-specific for T_{Ri} and T_{08} characteristic times (increasing order of characteristic times is C to N to J).

Lateral-exchange descriptors show that peakflow amplification in karst reaches is limited, mostly due to its exchange component Δ_L being reduced (Fig. 6). This is confirmed by the volumes of lateral exchange, V_{L-}/V_P showing that K and M catchments are more prone to lateral outflow than NK catchments, and V_{L+}/V_P showing that NK catchments are more prone to lateral inflow than K and M catchments. IGF^*/V_P also seems related to geology type. Table 2 shows that the statistical significance of these relationships is not systematic, M catchments being generally different from NK ones. Only the IGF^*/V_P descriptor does not show a statistical distinction between all samples.

450 5 Discussion

5.1 Factors driving flood processes

The analysis of descriptor distribution (Fig. 6) and its statistical significance (Table 2) shows that several factors affect flood processes at the elementary catchment scale. Water-balance descriptors show that quick- and slow-flow depths V_S and V_U vary with geology type in a statistically significant way. This is partly explained by the role of karst in how catchments transform precipitation to runoff (R_C and $R_{C,S}$), and on the relative proportions of quick- and slow-flow (S_C). Nevertheless, only the $R_{C,S}$ test is statistically significant according to geology type. This highlights the role of climatic influence, as V_S and V_U also depend on rainfall depth V_P that varies with study area, but their range is clearly higher than that of V_P .

In addition, hydrograph descriptors show a reduction in peakflow amplification on K catchments in all study areas, associated with an increase of characteristic times. This trend is consistent with previous work showing peakflow attenuation in karst areas (De Waele et al., 2010; Charlier et al., 2019). The influence on characteristic times is area-specific, Jura catchments having greater inertia than Cévennes ones. This area-dependent nature of characteristic flood times may be partly explained by different karst settings and ~~karstification degrees~~ occurrence, but is also linked with rainfall patterns. Cévennes catchments have a Mediterranean climate, with typical intense and short storm events triggering flash floods (Marty et al., 2013). The inertial events of Jura catchments can be explained by their great length compared to other areas: Cévennes and Normandy rivers hardly reach 150 km before reaching the sea or the Rhône, but the downstream Jura station is 400 km from the source along the Doubs river.

Finally, lateral-exchange descriptors show contrasting exchanges between different geology types, with more lateral inflow in NK catchments and more lateral outflow in K catchments. This agrees with previous studies on storm events in karst catchments highlighting river losses in karst reaches (Delrieu et al., 2005; Perrin and Tournoud, 2009; Bailly-Comte et al., 2012; Charlier et al., 2019). This trend accompanies a study-area variation, where the main aspect is a higher variability of exchanges for Cévennes catchments, and a lower one for Normandy. This is probably related to the need of harmonizing space scales between gain/loss processes and gauging networks. In fact, earlier work (Toth, 1963; Schaller and Fan, 2009; Bouaziz et al., 2018; Fan, 2019) shows that the size of the investigated catchment affects the IGF importance, greater areas being more likely to be self-contained. In the case of our study areas, as the median gauged areas are similar for each of them (Table 1), it might be explained by the generally thick soil and epikarst in Normandy, which is very reduced in the mountainous and Causes areas of Cévennes. Indeed, soil and epikarst are more likely to promote subsurface flow with closer zones of gains and losses,

whereas exposed karst drains, as in the Cévennes, enlarge the space scale of IGF processes by connecting river losses to trans-catchment karst aquifers.

Hydrological processes have been shown to be influenced by physiographic parameters such as karst occurrence. Nevertheless, other drivers can control catchments hydrological response to storm events. As an example, figure 8 shows IGF* depths distribution for the three studied sites, according to seasons. Seasons have been selected in order to reflect the main periods of the hydrological year, and to be suitable for the three sites. Throughout the hydrological year (from September to August), median IGF* depth is continuously decreasing, for all sites towards zero. This is probably linked to the hydrological conditions of catchments, in particular the saturation state of aquifers. Indeed, low water table periods (Apr to Aug) are more likely to limit IGFs. In the case of Jura catchments, a majority of events show IGF gains during high-flow periods (fall and winter), whereas a majority of events promote IGF losses during low-flow periods. This reversal of IGF direction, in the particular case of karst catchments, can also be favoured by the complex organization of the underground conduit networks. In fact, connection or disconnection of the main networks could temporally modify the hydrogeological catchment boundaries with threshold effects (Charlier et al., 2012; Bonacci, 2015). For those reasons, spatial and temporal variability of karst catchments behaviour are still challenging to characterize and predict. A comprehensive understanding of flood processes would thus imply accurate and continuous monitoring of climatic, hydrological and hydrogeological variables, on multiple catchments covering various physiographical settings.

5.2 Regional patterns and typology

Figure 6 shows that storm events in K catchments in the Cévennes are mostly associated with losing IGF*s (that can include storage variation), whereas Jura events are mostly associated with gaining IGF*s. This can be linked to the typology of karst settings. The Cévennes region is characterized by binary karst systems, with large upstream NK (hard-rock) terrains and downstream limestone plateaus where karst influence occurs. In such a geological setting, karst areas mostly play a role of flood attenuation as they lie downstream of reliefs with intense rainfall events and high runoff coefficients (see the example of the Tarn river in Charlier et al., 2015). The Jura Mountains region is regionally much more homogeneous, with widespread karst formation affecting the limestone plateaus, and few areas covered with Quaternary deposits. In this setting, karst can alternately promote streamflow capture (attenuation) and generation (amplification), depending on the location of river losses and the interaction between surface-water and groundwater (Le Mesnil et al., 2020).

To discuss the spatial variability of IGFs, the median storm-event IGF* value [mm] is shown for each elementary catchment of the three studied areas on Fig. 9d to 9f, along with the geological maps (Fig 9a to 9c)~~8~~. In the Cévennes (Fig. ~~98(a) and 8(b), left row~~), downstream karstified parts can be divided into two zones defined by a different lithology. The eastern part is mostly underlain by Cretaceous limestone and Cenozoic formations, whereas the western part is mostly composed of (older) Jurassic limestone. Despite IGF* accounting for the potential storage variation ($IGF^* = IGF + \delta$), all eastern Cretaceous catchments have negative median IGF* values, meaning that almost certainly groundwater flows out through karst aquifers during storm events, without being recovered in the investigated area during the considered event. The western Jurassic catchments have a less significant negative IGF*, with most values comprised between -1.45 and 3.5 mm. Through the lithology, this highlights the local role of karst ification degree occurrence, which is superimposed on the regional role of general karst settings.

In the Jura Mountains along the main Doubs river (Fig. ~~98(e) and 8(d), second row~~), almost all elementary catchments have negative IGF* during storm events, contrary to the tributary catchments that mostly have positive IGF*. This is coherent with the well-known Doubs river capture, at least for the south-eastern catchments. The tributaries being upstream and higher above

the base-level, river loss into karst aquifers is less important or (partly) recovered within a short distance. Storm-event IGF mapping highlights the already well documented zone of Doubs losses feeding the Loue catchment (e.g. Charlier et al., 2014). Normandy catchments (Fig. 98(e) and 8(f), third row) show less important IGF* depths, most catchments having values close to zero. This is the result of a too widespread gauging network compared to the spatial scale of IGF processes here. River-capture phenomena are well known in some of the catchments (e.g. Charlier et al., 2019), but the gaining and losing zones mostly seem to fall in the same catchment due to gauging station locations (Sect. 5.1).

Figures 9g to 9i show the percentage of area variation of the elementary catchments, from the topographic catchment area to the fictive area of the hydrogeologically active catchment (i.e. without excess or deficit in water balance). The area of such catchments is calculated from the IGF* and V_P depths. Assuming a spatially homogeneous rainfall intensity, the area variation corresponds to the surface to be added or withdrawn, in regards to the topographic elementary catchment, to obtain the median IGF* value. These variations reflect the incoming or outgoing IGF processes, respectively. For Cévennes and Jura catchments, the values of area variation are of similar magnitudes, ranging from approximately -7 % to +90 %. Regarding Normandy catchments, area variations are slightly lower, with values ranging from -20 % to +32 %. This shows that IGF can be an important term of the water balance during storm events, and has to be considered as such, in order to better understand flow processes during floods.

Figures 9j to 9l show the same elementary catchments area variation, expressed in km². These values are correlated to the size of topographic catchments. They allow a concrete representation of the recharge areas located outside of the surface catchments. As this study is based on storm-events only, and considering that the studied catchments extend further downstream, the sum of fictive active catchments (which is a first approximation of the hydrogeological catchment) do not match with the topographic catchment area. Nevertheless, a previous study by Le Mesnil et al. (2020) showed that, along the Doubs river, annual IGF take a part in the water balance that progressively decreases from spring to outlet and tends towards zero.

5.3 **Annual-IGF: annual vs event scale, impacts on quick- and slow-flow components vs storm-event IGF***

In this section, we compare a major missing term of the water budget, alternately estimated by two approaches. First, at the annual scale: the multi-annual IGF (noted IGF_A) calculated by Le Mesnil et al. (2020), under the assumption of nil annual stock variation in the aquifer ($\delta = 0$), which is often verified when using several years long data time series. Second, at the event scale: $IGF^* = IGF + \delta$ calculated here as defined in Sect. 2.3.3.

Le Mesnil et al. (2020) assessed multi-annual values of IGF_A depth for the catchment of the present work. This IGF_A value, calculated by adapting the two-stage precipitation partitioning theory of L'Vovich (1979), is associated with a parameter ' α ', estimating the relative impact of IGF on the rapid- and slow-flow components at an annual scale. The α values between 0 and 0.5 correspond to an annual IGF_A mostly affecting the slow-flow component, whereas α values between 0.5 and 1 correspond to an annual IGF_A mostly affecting the rapid-flow component; α values below 0 and over 1 indicate compensating IGF_A flow, such as surface loss combined with groundwater gain. To discuss the link between IGF estimates at both annual and storm event time scales, Fig. 109 presents the storm-event IGF* depths calculated for the present work, as a function of the annual IGF_A depth obtained in the precedent paper for the 108 elementary catchments. Annual IGF_A values were normalized by event duration for consistent comparisons.

Figure 109(a) shows some points with opposed annual IGF_A and event IGF* signs (e.g., a losing annual water-balance-derived IGF_A associated with a gaining event-derived IGF*). The point cloud does not show significant axial organization, leading to a low determination coefficient value for the linear regression. Figures 109(b) and 109(c) present the same relationships for catchments with α values between 0.5 and 1, i.e. annual IGF_A mostly affecting the quick-flow component (Le Mesnil et al.,

2020). The R^2 value of the linear regression has increased but is still low (0.222, not shown). Nevertheless, most catchments show consistent annual storm-event IGF* signs, falling into the upper-right or lower-left quadrants. This means that the annual estimation is good for assessing the relative impact of IGF on quick- and slow-flow components. Moreover, IGF* maps (figure 9) are in accordance with IGF_A results of Le Mesnil et al. (2020). For example, the well-known phenomenon of Doubs river losses feeding Loue catchment is visible at the event scale.

R^2 values on Fig. 109(b) and 109(c) show that correlations are more reliable when operating regression on groups (by geology type and study area) of K and M catchments. The two groups with a reliable relationship between annual and event-derived IGF depths are the karst catchments K and the Jura catchments J, with respective R^2 values of 0.664 and 0.663. The stronger relationship in K catchments can be explained by the occurrence of IGF during both recession and flood periods, whereas IGF occurred mostly during flood periods in NK catchments. This agrees with the high positive IGF* values (>50 mm per event) associated with low annual IGF_A values for NK. This may also explain the higher R^2 value of Jura catchments, as they are mostly K catchments, while the Cévennes also have NK catchments resulting in a lower R^2 value.

Figure 11 represents V_S versus IGF* (both expressed in depth) for all events and reaches, with different symbols according to geology type. V_S being equal to $V_{S,O} - V_{S,I}$, the V_S versus IGF* relationship provides an insight into the relative proportions of total IGF* depth and quick-flow component variation. First, while IGF* values vary from -200 to 300 mm, V_S values are mostly positive, ranging from -20 to 150 mm. This indicates that for most events, when outgoing IGFs (negative IGF* values) occur, the quick-flow component still increases. This is particularly true on NK catchments, whereas some events with negative IGF* on K catchments show negative (or low positive) V_S values. In that case, a likely hypothesis is the presence of losses in karst riverbeds via sinkholes, which are not present in non-karst reaches (see such example in Charlier et al., 2019). Regarding events with positive IGF*, V_S depths are mainly inferior to IGF* ones, with values around half of the total IGF* ones. This shows that incoming IGFs during storm-events feed the slow-flow component of the total streamflow in similar proportions than the quick-flow component. This is linked to the different IGF processes occurring at the catchment scale: slow-flow component corresponding to aquifer drainage by the river (e.g. Bailly-Comte et al., 2012) and quick-flow component corresponding to karst spring activation (Bonacci and Bojanic, 1991; Maréchal et al., 2008), for example.

Conclusions

We carried out a spatialized analysis of 15 easily calculable descriptors characterizing water balance, hydrograph shape and lateral exchanges, for a set of 20 storm-event data at the elementary catchment scale for each of the 108 gauging stations, controlling karst and non karst regions. The results show that karst promotes higher water infiltration, this water being mostly retained during storm events. Karst increases characteristic flood times and limits peakflow amplification, without much affecting flood-wave celerity. This is interpreted to be due to an interbasin groundwater flow (IGF) loss that can be high at the storm-event scale, representing around 50% of the discharge at a catchment outlet, and 20% of rainfall. A spatial variability of those effects is linked to differences in karst regions: binary karst catchments mostly attenuate floods whereas extended karst plateaus undergo alternated losses and gains. Secondary factors include climatic influence (regional variability of rainfall-event intensity), and the spatial-scale match between gain/loss processes and spacing of the gauging network. A seasonal effect has also to be considered regarding IGF magnitude and direction.

Existence of karst hydrological specificities has been known for decades, but is ~~poorly quantified and documented~~ not quantified in a large extent, especially regarding its impacts on flood processes at the scale of the river reach. Though some research had been done on this topic, it leads to hindered modelling performance in many cases. We ~~now~~ have quantified several important parameters for a large set of catchments, for the first time in a spatialized study based on event-scale processes, contributing to build a common understanding at regional scale of karst behaviour during storm events, thus improving modelling and forecasting capabilities in such terrains. Though our approach is based on karst areas it stays generic,

and we hope future work will investigate other relationships between the hydrological response and physiographic characteristics of catchments, such as soil types, land use, climate, etc.

Author contribution

RM and JBC were involved in conceptualization, funding acquisition and supervision. MLM gathered the data and designed the methodology with the help of JBC, RM and YC. MLM prepared the manuscript with the help of all co-authors.

Acknowledgements

The work was funded by the French Governmental Administration for Risk Prevention (DGPR), the Service Central d'Hydrométéorologie et d'Appui à la Prévision des Inondations (SCHAPI), and the French Geological Survey (BRGM). Hourly streamflow data were gathered from the “Banque hydro” database using a script available at <http://doi.org/10.5281/zenodo.3744183>.

References

- Bailly-Comte, V., Borrell-Estupina, V., Jourde, H., Pistre, S., 2012. [A conceptual semidistributed model of the Coulazou River as a tool for assessing surface water-karst groundwater interactions during flood in Mediterranean ephemeral rivers: KARST CONTRIBUTION TO SURFACE FLOW](https://doi.org/10.1029/2010WR010072). *Water Resources Research* 48. <https://doi.org/10.1029/2010WR010072>
- Bailly-Comte, V., Jourde, H., Pistre, S., 2009. [Conceptualization and classification of groundwater–surface water hydrodynamic interactions in karst watersheds: Case of the karst watershed of the Coulazou River \(Southern France\)](https://doi.org/10.1016/j.jhydrol.2009.07.053). *Journal of Hydrology* 376, 456–462. <https://doi.org/10.1016/j.jhydrol.2009.07.053>
- Bakalowicz, M., 2005. [Karst groundwater: a challenge for new resources](https://doi.org/10.1007/s10040-004-0402-9). *Hydrogeology Journal* 13, 148–160. <https://doi.org/10.1007/s10040-004-0402-9>
- Basha, H.A., 2020. [Flow Recession Equations for Karst Systems](https://doi.org/10.1029/2020WR027384). *Water Resources Research* 56. <https://doi.org/10.1029/2020WR027384>
- Bell, F.C., Om Kar, S., 1969. [Characteristic response times in design flood estimation](https://doi.org/10.1016/0022-1694(69)90120-6). *Journal of Hydrology* 8, 173–196. [https://doi.org/10.1016/0022-1694\(69\)90120-6](https://doi.org/10.1016/0022-1694(69)90120-6)
- Bonacci, O., 2015. [Karst hydrogeology/hydrology of dinaric chain and isles](https://doi.org/10.1007/s12665-014-3677-8). *Environmental Earth Sciences* 74, 37–55. <https://doi.org/10.1007/s12665-014-3677-8>
- Bonacci, O., Bojanić, D., 1991. [Rhythmic karst springs](https://doi.org/10.1080/02626669109492483). *Hydrological Sciences Journal* 36, 35–47. <https://doi.org/10.1080/02626669109492483>
- Bonacci, O., Ljubenković, I., Roje-Bonacci, T., 2006. [Karst flash floods: an example from the Dinaric karst \(Croatia\)](https://doi.org/10.1007/s10040-006-0001-0). *Natural Hazards and Earth System Science* 6, 195–203. <https://doi.org/10.1007/s10040-006-0001-0>
- Bouaziz, L., Weerts, A., Schellekens, J., Sprokkereef, E., Stam, J., Savenije, H., Hrachowitz, M., 2018. [Redressing the balance: quantifying net intercatchment groundwater flows](https://doi.org/10.5194/hess-22-6415-2018). *Hydrology and Earth System Sciences* 22, 6415–6434. <https://doi.org/10.5194/hess-22-6415-2018>
- Champeaux, J.-L., Laurantin, O., Mercier, B., Mounier, F., Lassegues, P., Tabary, P., 2011. [Quantitative precipitation estimations using rain gauges and radar networks: inventory and prospects at Meteo-France 11](https://doi.org/10.1002/hyp.1111). *Hydrological Processes* 25, 1111–1124. <https://doi.org/10.1002/hyp.1111>
- Charlier, J., Moussa, R., David, P., Desprats, J., 2019. [Quantifying peakflow attenuation/amplification in a karst river using the diffusive wave model with lateral flow](https://doi.org/10.1002/hyp.13472). *Hydrological Processes*. <https://doi.org/10.1002/hyp.13472>

- 635 [Charlier, J.-B., Bertrand, C., Mudry, J., 2012. Conceptual hydrogeological model of flow and transport of dissolved organic carbon in a small Jura karst system. *Journal of Hydrology* 460–461, 52–64. <https://doi.org/10.1016/j.jhydrol.2012.06.043>](#)
- [Charlier, J.-B., Moussa, R., Bailly-Comte, V., Danneville, L., Desprats, J.-F., Ladouche, B., Marchandise, A., 2015. Use of a flood-routing model to assess lateral flows in a karstic stream: implications to the hydrogeological functioning of the Grands Causses area \(Tarn River, Southern France\). *Environmental Earth Sciences* 74, 7605–7616. <https://doi.org/10.1007/s12665-015-4704-0>](#)
- 640 [Chen, Z., Auler, A.S., Bakalowicz, M., Drew, D., Griger, F., Hartmann, J., Jiang, G., Moosdorf, N., Richts, A., Stevanovic, Z., Veni, G., Goldscheider, N., 2017. The World Karst Aquifer Mapping project: concept, mapping procedure and map of Europe. *Hydrogeology Journal* 25, 771–785. <https://doi.org/10.1007/s10040-016-1519-3>](#)
- [Cholet, C., Charlier, J.-B., Moussa, R., Steinmann, M., Denimal, S., 2017. Assessing lateral flows and solute transport during floods in a conduit-flow-dominated karst system using the inverse problem for the advection–diffusion equation. *Hydrology and Earth System Sciences* 21, 3635–3653. <https://doi.org/10.5194/hess-21-3635-2017>](#)
- 645 [Covino, T., McGlynn, B., Mallard, J., 2011. Stream-groundwater exchange and hydrologic turnover at the network scale: HYDROLOGIC TURNOVER AT THE NETWORK SCALE. *Water Resources Research* 47. <https://doi.org/10.1029/2011WR010942>](#)
- 650 [De Waele, J., Martina, M.L.V., Sanna, L., Cabras, S., Cossu, Q.A., 2010. Flash flood hydrology in karstic terrain: Flumineddu Canyon, central-east Sardinia. *Geomorphology* 120, 162–173. <https://doi.org/10.1016/j.geomorph.2010.03.021>](#)
- [Delrieu, G., Nicol, J., Yates, E., Kirstetter, P.-E., Creutin, J.-D., Anquetin, S., Obled, C., Saulnier, G.-M., Ducrocq, V., Gaume, E., 2005. The catastrophic flash-flood event of 8–9 September 2002 in the Gard Region, France: a first case study for the Cévennes–Vivarais Mediterranean Hydrometeorological Observatory. *Journal of Hydrometeorology* 6, 34–52.](#)
- 655 [Dingman, S.L., 2015. *Physical Hydrology: Third Edition*. Waveland Press.](#)
- [Eakin, T.E., 1966. A regional interbasin groundwater system in the White River Area, southeastern Nevada. *Water Resources Research* 2, 251–271. <https://doi.org/10.1029/WR002i002p00251>](#)
- [Eckhardt, K., 2005. How to construct recursive digital filters for baseflow separation. *Hydrological Processes* 19, 507–515. <https://doi.org/10.1002/hyp.5675>](#)
- 660 [Edijatno, De Oliveira Nascimento, N., Yang, X., Makhlof, Z., Michel, C., 1999. GR3J: a daily watershed model with three free parameters. *Hydrological Sciences Journal* 44, 263–277. <https://doi.org/10.1080/02626669909492221>](#)
- [Fan, Y., 2019. Are catchments leaky? *Wiley Interdisciplinary Reviews: Water* 6. <https://doi.org/10.1002/wat2.1386>](#)
- [Gárfias-Soliz, J., Llanos-Acebo, H., Martel, R., 2009. Time series and stochastic analyses to study the hydrodynamic characteristics of karstic aquifers. *Hydrological Processes* n/a-n/a. <https://doi.org/10.1002/hyp.7487>](#)
- 665 [Genereux, D.P., Jordan, M.T., Carbonell, D., 2005. A paired-watershed budget study to quantify interbasin groundwater flow in a lowland rain forest, Costa Rica: RAINFOREST WATERSHED BUDGETS. *Water Resources Research* 41. <https://doi.org/10.1029/2004WR003635>](#)
- [Gustard, A., Bullock, A., Dixon, J.M., 1992. Low flow estimation in the United Kingdom, Report / Institute of Hydrology. Institute of Hydrology, Wallingford.](#)
- 670 [Hartmann, A., Weiler, M., Wagener, T., Lange, J., Kralik, M., Humer, F., Mizyed, N., Rimmer, A., Barberá, J.A., Andreo, B., Butscher, C., Huggenberger, P., 2013. Process-based karst modelling to relate hydrodynamic and hydrochemical characteristics to system properties. *Hydrology and Earth System Sciences* 17, 3305–3321. <https://doi.org/10.5194/hess-17-3305-2013>](#)
- [Laaha, G., Blöschl, G., 2006. Seasonality indices for regionalizing low flows. *Hydrological Processes* 20, 3851–3878. <https://doi.org/10.1002/hyp.6161>](#)
- 675 [Le Bas, C., 2018. Carte de la Réserve Utile en eau issue de la Base de Données Géographique des Sols de France. <https://doi.org/10.15454/JPB9RB>](#)


- 680 Le Mesnil, M., Charlier, J.-B., Moussa, R., Caballero, Y., Dörfliker, N., 2020. Interbasin groundwater flow: Characterization, role of karst areas, impact on annual water balance and flood processes. Journal of Hydrology 585, 124583. <https://doi.org/10.1016/j.jhydrol.2020.124583>
- Le Moine, N., Andréassian, V., Mathevet, T., 2008. Confronting surface- and groundwater balances on the La Rochefoucauld-Touvre karstic system (Charente, France): CLOSING THE CATCHMENT-SCALE WATER BALANCE-A CASE STUDY. Water Resources Research 44. <https://doi.org/10.1029/2007WR005984>
- 685 Le Moine, N., Andréassian, V., Perrin, C., Michel, C., 2007. How can rainfall-runoff models handle intercatchment groundwater flows? Theoretical study based on 1040 French catchments: DEALING WITH IGF IN RAINFALL-RUNOFF MODE. Water Resources Research 43. <https://doi.org/10.1029/2006WR005608>
- Lebecherel, L., Andréassian, V., Perrin, C., 2013. On regionalizing the Turc-Mezentsev water balance formula: TURC-MEZENTSEV WATER BALANCE FORMULA. Water Resources Research 49, 7508–7517. <https://doi.org/10.1002/2013WR013575>
- 690 López-Chicano, M., Calvache, M.L., Martín-Rosales, W., Gisbert, J., 2002. Conditioning factors in flooding of karstic poljes—the case of the Zafarraya polje (South Spain). CATENA 49, 331–352. [https://doi.org/10.1016/S0341-8162\(02\)00053-X](https://doi.org/10.1016/S0341-8162(02)00053-X)
- Lvovich, M.I., 1979. World water resources, present and future. GeoJournal 3, 423–433. <https://doi.org/10.1007/BF00455981>
- Maillet, E.T., 1905. Essais d'hydraulique souterraine & fluviale.. A. Hermann, Paris.
- 695 Mallard, J., McGlynn, B., Covino, T., 2014. Lateral inflows, stream-groundwater exchange, and network geometry influence stream water composition. Water Resources Research 50, 4603–4623. <https://doi.org/10.1002/2013WR014944>
- Maréchal, J.C., Ladouche, B., Dörfliker, N., 2008. Karst flash flooding in a Mediterranean karst, the example of Fontaine de Nîmes. Engineering Geology 99, 138–146. <https://doi.org/10.1016/j.enggeo.2007.11.013>
- 700 Marty, R., Zin, I., Obled, Ch., 2013. Sensitivity of hydrological ensemble forecasts to different sources and temporal resolutions of probabilistic quantitative precipitation forecasts: flash flood case studies in the Cévennes-Vivarais region (Southern France): SENSITIVITY OF HYDROLOGICAL ENSEMBLE FORECASTS TO POPF. Hydrological Processes 27, 33–44. <https://doi.org/10.1002/hyp.9543>
- Merz, R., Blöschl, G., 2004. Regionalisation of catchment model parameters. Journal of Hydrology 287, 95–123. <https://doi.org/10.1016/j.jhydrol.2003.09.028>
- 705 Moussa, R., 1996. ANALYTICAL HAYAMI SOLUTION FOR THE DIFFUSIVE WAVE FLOOD ROUTING PROBLEM WITH LATERAL INFLOW. Hydrological Processes 10, 1209–1227. [https://doi.org/10.1002/\(SICI\)1099-1085\(199609\)10:9<1209::AID-HYP380>3.0.CO;2-2](https://doi.org/10.1002/(SICI)1099-1085(199609)10:9<1209::AID-HYP380>3.0.CO;2-2)
- Moussa, R., Bocquillon, C., 1996. Criteria for the choice of flood-routing methods in natural channels. Journal of Hydrology 186, 1–30. [https://doi.org/10.1016/S0022-1694\(96\)03045-4](https://doi.org/10.1016/S0022-1694(96)03045-4)
- 710 Moussa, R., Majdalani, S., 2019. Evaluating lateral flow in an experimental channel using the diffusive wave inverse problem. Advances in Water Resources 127, 120–133. <https://doi.org/10.1016/j.advwatres.2019.03.009>
- Nathan, R.J., McMahon, T.A., 1990. Evaluation of automated techniques for base flow and recession analyses. Water Resources Research 26, 1465–1473. <https://doi.org/10.1029/WR026i007p01465>
- 715 Nguyen, V.T., Dietrich, J., Uniyal, B., 2020. Modeling interbasin groundwater flow in karst areas: Model development, application, and calibration strategy. Environmental Modelling & Software 124, 104606. <https://doi.org/10.1016/j.envsoft.2019.104606>
- Oudin, L., Andréassian, V., Perrin, C., Michel, C., Le Moine, N., 2008. Spatial proximity, physical similarity, regression and ungaged catchments: A comparison of regionalization approaches based on 913 French catchments: A COMPARISON OF REGIONALIZATION APPROACHES ON 913 CATCHMENTS. Water Resources Research 44. <https://doi.org/10.1029/2007WR006240>

- 720 [Parajka, J., Merz, R., Blöschl, G., 2005. A comparison of regionalisation methods for catchment model parameters. *Hydrology and Earth System Sciences* 16.](#)
- [Perrin, J.-L., Tournoud, M.-G., 2009. Hydrological processes controlling flow generation in a small Mediterranean catchment under karstic influence. *Hydrological Sciences Journal* 54, 1125–1140. <https://doi.org/10.1623/hysj.54.6.1125>](#)
- 725 [Piggott, A.R., Moin, S., Southam, C., 2005. A revised approach to the UKIH method for the calculation of baseflow / Une approche améliorée de la méthode de l'UKIH pour le calcul de l'écoulement de base. *Hydrological Sciences Journal* 50. <https://doi.org/10.1623/hysj.2005.50.5.911>](#)
- [Raghunath, H.M., 2006. *Hydrology: Principles, Analysis And Design*. New Age International.](#)
- [Rutledge, A.T., 1998. Computer programs for describing the recession of ground-water discharge and for estimating mean ground-water recharge and discharge from streamflow records-update. <https://doi.org/10.3133/wri984148>](#)
- 730 [Satterthwaite, F.E., 1946. An Approximate Distribution of Estimates of Variance Components. *Biometrics Bulletin* 2, 110–114. <https://doi.org/10.2307/3002019>](#)
- [Scanlon, B.R., Mace, R.E., Barrett, M.E., Smith, B., 2003. Can we simulate regional groundwater flow in a karst system using equivalent porous media models? Case study, Barton Springs Edwards aquifer, USA. *Journal of Hydrology* 276, 137–158. \[https://doi.org/10.1016/S0022-1694\\(03\\)00064-7\]\(https://doi.org/10.1016/S0022-1694\(03\)00064-7\)](#)
- 735 [Schaller, M.F., Fan, Y., 2009. River basins as groundwater exporters and importers: Implications for water cycle and climate modeling. *Journal of Geophysical Research* 114. <https://doi.org/10.1029/2008JD010636>](#)
- [Sivapalan, M., Yaeger, M.A., Harman, C.J., Xu, X., Troch, P.A., 2011. Functional model of water balance variability at the catchment scale: 1. Evidence of hydrologic similarity and space-time symmetry: SPACE-TIME SYMMETRY OF WATER VARIABILITY. *Water Resources Research* 47. <https://doi.org/10.1029/2010WR009568>](#)
- 740 [Sloto, R.A., Crouse, M.Y., 1996. HYSEP: A Computer Program for Streamflow Hydrograph Separation and Analysis. <https://doi.org/10.3133/wri964040>](#)
- [Tabary, P., 2007. The New French Operational Radar Rainfall Product. Part I: Methodology. *Wea. Forecasting* 22, 393–408. <https://doi.org/10.1175/WAF1004.1>](#)
- [Tang, W., Carey, S.K., 2017. HydRun: A MATLAB toolbox for rainfall-runoff analysis. *Hydrological Processes* 31, 2670–2682. <https://doi.org/10.1002/hyp.11185>](#)
- 745 [Thorntwaite, C.W., 1948. An Approach toward a Rational Classification of Climate. *Geographical Review* 38, 55–94. <https://doi.org/10.2307/210739>](#)
- [Todini, E., 1996. The ARNO rainfall—runoff model. *Journal of Hydrology* 175, 339–382. \[https://doi.org/10.1016/S0022-1694\\(96\\)80016-3\]\(https://doi.org/10.1016/S0022-1694\(96\)80016-3\)](#)
- 750 [Tóth, J., 1963. A theoretical analysis of groundwater flow in small drainage basins. *Journal of Geophysical Research* 68, 4795–4812. <https://doi.org/10.1029/JZ068i016p04795>](#)
- [Vidal, J.-P., Martin, E., Franchistéguy, L., Baillon, M., Soubeyroux, J.-M., 2010. A 50-year high-resolution atmospheric reanalysis over France with the Safran system. *International Journal of Climatology* 30, 1627–1644. <https://doi.org/10.1002/joc.2003>](#)
- 755 [Zanon, F., Borga, M., Zoccatelli, D., Marchi, L., Gaume, E., Bonnifait, L., Delrieu, G., 2010. Hydrological analysis of a flash flood across a climatic and geologic gradient: The September 18, 2007 event in Western Slovenia. *Journal of Hydrology* 394, 182–197. <https://doi.org/10.1016/j.jhydrol.2010.08.020>](#)
- [Bailly-Comte, V., Borrell Estupina, V., Jourde, H., Pistre, S., 2012. A conceptual semidistributed model of the Coulazou River as a tool for assessing surface water karst groundwater interactions during flood in Mediterranean ephemeral rivers: Karst contribution to surface flow. *Water Resources Research* 48. <https://doi.org/10.1029/2010WR010072>](#)
- 760

- Bailly-Comte, V., Jourde, H., Pistre, S., 2009. Conceptualization and classification of groundwater surface water hydrodynamic interactions in karst watersheds: Case of the karst watershed of the Coulazou River (Southern France). *Journal of Hydrology* 376, 456–462. <https://doi.org/10.1016/j.jhydrol.2009.07.053>
- 765 Bakalowicz, M., 2005. Karst groundwater: a challenge for new resources. *Hydrogeology Journal* 13, 148–160. <https://doi.org/10.1007/s10040-004-0402-9>
- Bell, F.C., Om Kar, S., 1969. Characteristic response times in design flood estimation. *Journal of Hydrology* 8, 173–196. [https://doi.org/10.1016/0022-1694\(69\)90120-6](https://doi.org/10.1016/0022-1694(69)90120-6)
- Bonacci, O., Ljubenkovic, I., Roje-Bonacci, T., 2006. Karst flash floods: an example from the Dinaric karst (Croatia). *Natural Hazards and Earth System Science* 6, 195–203.
- 770 Bouaziz, L., Weerts, A., Schellekens, J., Sprokkereef, E., Stam, J., Savenije, H., Hrachowitz, M., 2018. Redressing the balance: quantifying net intercatchment groundwater flows. *Hydrology and Earth System Sciences* 22, 6415–6434. <https://doi.org/10.5194/hess-22-6415-2018>
- Champeaux, J.L., Laurantin, O., Mercier, B., Mounier, F., Lassegues, P., Tabary, P., 2011. Quantitative precipitation estimations using rain gauges and radar networks: Inventory and prospects at Météo France 11.
- 775 Charlier, J.B., Desprats, J.F., Ladouche, B. (2014). Appui au SCHAPI 2014—Module 1—Rôle et contribution des eaux souterraines d'origine karstique dans les crues de la Loue à Chenecey-Buillon, BRGM/RP-63844-FR report, 109 p. <http://infoterre.brgm.fr/rapports/RP-63844-FR.pdf> (accessed April 2018).
- Charlier, J.B., Moussa, R., David, P., Desprats, J.F., 2019. Quantifying peakflow attenuation/amplification in a karst river using the diffusive wave model with lateral flow. *Hydrological Processes*. <https://doi.org/10.1002/hyp.13472>
- 780 Charlier, J.B., Moussa, R., Bailly-Comte, V., Danneville, L., Desprats, J.F., Ladouche, B., Marchandise, A., 2015. Use of a flood routing model to assess lateral flows in a karstic stream: implications to the hydrogeological functioning of the Grands Causses area (Tarn River, Southern France). *Environmental Earth Sciences* 74, 7605–7616. <https://doi.org/10.1007/s12665-015-4704-0>
- Chen, Z., Auler, A.S., Bakalowicz, M., Drew, D., Griger, F., Hartmann, J., Jiang, G., Moosdorf, N., Richts, A., Stevanovic, Z., Veni, G., Goldscheider, N., 2017. The World Karst Aquifer Mapping project: concept, mapping procedure and map of Europe. *Hydrogeology Journal* 25, 771–785. <https://doi.org/10.1007/s10040-016-1519-3>
- 785 Cholet, C., Charlier, J.B., Moussa, R., Steinmann, M., Denimal, S., 2017. Assessing lateral flows and solute transport during floods in a conduit flow dominated karst system using the inverse problem for the advection–diffusion equation. *Hydrology and Earth System Sciences* 21, 3635–3653. <https://doi.org/10.5194/hess-21-3635-2017>
- 790 Covino, T., McGlynn, B., Mallard, J., 2011. Stream groundwater exchange and hydrologic turnover at the network scale: Hydrologic turnover at the network scale. *Water Resources Research* 47. <https://doi.org/10.1029/2011WR010942>
- De Waele, J., Martina, M.L.V., Sanna, L., Cabras, S., Cossu, Q.A., 2010. Flash flood hydrology in karstic terrain: Flumineddu canyon, central east Sardinia. *Geomorphology* 120, 162–173. <https://doi.org/10.1016/j.geomorph.2010.03.021>
- 795 Delrieu, G., Nicol, J., Yates, E., Kirstetter, P.E., Creutin, J.D., Anquetin, S., Obléd, C., Saulnier, G.M., Dueroq, V., Gaume, E., 2005. The catastrophic flash flood event of 8–9 September 2002 in the Gard Region, France: a first case study for the Cévennes–Vivarais Mediterranean Hydrometeorological Observatory. *Journal of Hydrometeorology* 6, 34–52.
- Dingman, S.L., 2015. *Physical Hydrology: Third Edition*. Waveland Press.
- Eakin, T.E., 1966. A regional interbasin groundwater system in the White River Area, southeastern Nevada. *Water Resources Research* 2, 251–271. <https://doi.org/10.1029/WR002i002p00251>
- 800 Eekhardt, K., 2005. How to construct recursive digital filters for baseflow separation. *Hydrological Processes* 19, 507–515. <https://doi.org/10.1002/hyp.5675>
- Edijatno, De Oliveira Nascimento, N., Yang, X., Makhlof, Z., Michel, C., 1999. GR3J: a daily watershed model with three free parameters. *Hydrological Sciences Journal* 44, 263–277. <https://doi.org/10.1080/02626669909492221>


- Fan, Y., 2019. Are Catchments Leaky? *Wiley Interdisciplinary Reviews: Water* 6. <https://doi.org/10.1002/wat2.1386>
- 805 Gustard, A., Bullock, A., Dixon, J.M., 1992. *Low flow estimation in the United Kingdom, Report / Institute of Hydrology, Wallingford.*
- Laaha, G., Blöschl, G., 2006. Seasonality indices for regionalizing low flows. *Hydrological Processes* 20, 3851–3878. <https://doi.org/10.1002/hyp.6161>
- Le Bas, C., 2018. *Carte de la Réserve Utile en eau issue de la Base de Données Géographique des Sols de France.*
- 810 <https://doi.org/10.15454/IPB9RB>
- Le Mesnil, M., Charlier, J.B., Moussa, R., Caballero, Y., Dörfliger, N., 2020. Interbasin groundwater flow: Characterization, role of karst areas, impact on annual water balance and flood processes. *Journal of Hydrology* 585, 124583. <https://doi.org/10.1016/j.jhydrol.2020.124583>
- Le Moine, N., Andréassian, V., Perrin, C., Michel, C., 2007. How can rainfall runoff models handle intercatchment groundwater flows? Theoretical study based on 1040 French catchments: Dealing with IGF in rainfall runoff mode. *Water Resources Research* 43. <https://doi.org/10.1029/2006WR005608>
- 815 Lebecherel, L., Andréassian, V., Perrin, C., 2013. On regionalizing the Turc-Mezentsev water balance formula. *Water Resources Research* 49, 7508–7517. <https://doi.org/10.1002/2013WR013575>
- López-Chicano, M., Calvache, M.L., Martín-Rosales, W., Gisbert, J., 2002. Conditioning factors in flooding of karstic poljes — the case of the Zafarraya polje (South Spain). *CATENA* 49, 331–352. [https://doi.org/10.1016/S0341-8162\(02\)00053-X](https://doi.org/10.1016/S0341-8162(02)00053-X)
- 820 Lvovich, M.I., 1979. World water resources, present and future. *GeoJournal* 3, 423–433. <https://doi.org/10.1007/BF00455981>
- Lyne, V., & Hollick, M., 1979. Stochastic time-variable rainfall-runoff modelling. In *Institute of Engineers Australia National Conference (Vol. 79, No. 10, pp. 89–93)*. Barton, Australia: Institute of Engineers Australia.
- Maillet, E.T., 1905. *Essais d'Hydraulique Souterraine & Fluviale.*. A. Hermann, Paris.
- 825 Mallard, J., McGlynn, B., Covino, T., 2014. Lateral inflows, stream-groundwater exchange, and network geometry influence stream water composition. *Water Resources Research* 50, 4603–4623. <https://doi.org/10.1002/2013WR014944>
- Maréchal, J.C., Ladouche, B., Dörfliger, N., 2008. Karst flash flooding in a Mediterranean karst, the example of Fontaine de Nîmes. *Engineering Geology* 99, 138–146. <https://doi.org/10.1016/j.enggeo.2007.11.013>
- Marty, R., Zin, I., Obled, Ch., 2013. Sensitivity of hydrological ensemble forecasts to different sources and temporal resolutions of probabilistic quantitative precipitation forecasts: flash flood case studies in the Cévennes-Vivarais region (Southern France) *Hydrological Processes* 27, 33–44. <https://doi.org/10.1002/hyp.9543>
- 830 Merz, R., Blöschl, G., 2004. Regionalisation of catchment model parameters. *Journal of Hydrology* 287, 95–123. <https://doi.org/10.1016/j.jhydrol.2003.09.028>
- Moussa, R., 1996. Analytical Hayami solution for the diffusive wave flood-routing problem with lateral inflow. *Hydrological Processes* 10, 1209–1227. [https://doi.org/10.1002/\(SICI\)1099-1085\(199609\)10:9<1209::AID-HYP380>3.0.CO;2-2](https://doi.org/10.1002/(SICI)1099-1085(199609)10:9<1209::AID-HYP380>3.0.CO;2-2)
- 835 Moussa, R., Bocquillon, C., 1996. Criteria for the choice of flood routing methods in natural channels. *Journal of Hydrology* 186, 1–30. [https://doi.org/10.1016/S0022-1694\(96\)03045-4](https://doi.org/10.1016/S0022-1694(96)03045-4)
- Moussa, R., Majdalani, S., 2019. Evaluating lateral flow in an experimental channel using the diffusive wave inverse problem. *Advances in Water Resources* 127, 120–133. <https://doi.org/10.1016/j.advwatres.2019.03.009>
- 840 Nathan, R.J., McMahon, T.A., 1990. Evaluation of automated techniques for base flow and recession analyses. *Water Resources Research* 26, 1465–1473. <https://doi.org/10.1029/WR026i007p01465>
- Oudin, L., Andréassian, V., Perrin, C., Michel, C., Le Moine, N., 2008. Spatial proximity, physical similarity, regression and ungauged catchments: A comparison of regionalization approaches based on 913 French catchments. *Water Resources Research* 44. <https://doi.org/10.1029/2007WR006240>
- 845 Parajka, J., Merz, R., Blöschl, G., 2005. A comparison of regionalisation methods for catchment model parameters. *Hydrology and Earth System Sciences* 16.

- Perrin, J.L., Tournoud, M.G., 2009. Hydrological processes controlling flow generation in a small Mediterranean catchment under karstic influence. *Hydrological Sciences Journal* 54, 1125–1140. <https://doi.org/10.1623/hysj.54.6.1125>
- 850 Piggott, A.R., Moin, S., Southam, C., 2005. A revised approach to the UKIH method for the calculation of baseflow. *Hydrological Sciences Journal* 50. <https://doi.org/10.1623/hysj.2005.50.5.911>
- Raghunath, H. M., 2006. *Hydrology: principles, analysis and design*. New Age International.
- Rutledge, A.T., 1998. Computer programs for describing the recession of ground water discharge and for estimating mean ground water recharge and discharge from streamflow records update. <https://doi.org/10.3133/wri984148>
- 855 Satterthwaite, F.E., 1946. An Approximate Distribution of Estimates of Variance Components. *Biometrics Bulletin* 2, 110–114. <https://doi.org/10.2307/3002019>
- Schaller, M.F., Fan, Y., 2009. River basins as groundwater exporters and importers: Implications for water cycle and climate modeling. *Journal of Geophysical Research* 114. <https://doi.org/10.1029/2008JD010636>
- Sivapalan, M., Yaeger, M.A., Harman, C.J., Xu, X., Troch, P.A., 2011. Functional model of water balance variability at the catchment scale: 1. Evidence of hydrologic similarity and space-time symmetry. *Water Resources Research* 47. <https://doi.org/10.1029/2010WR009568>
- 860 Sloto, R.A., Crouse, M.Y., 1996. HYSEP: A Computer Program for Streamflow Hydrograph Separation and Analysis. <https://doi.org/10.3133/wri964040>
- Tabary, P., 2007. The new French operational radar rainfall product. Part I: Methodology. *Weather Forecasting* 22, 393–408. <https://doi.org/10.1175/WAF1004.1>
- 865 Tang, W., Carey, S.K., 2017. HydRun: A MATLAB toolbox for rainfall-runoff analysis. *Hydrological Processes* 31, 2670–2682. <https://doi.org/10.1002/hyp.11185>
- Thiéry D., 2014. — Logiciel GARDÉNIA, version 8.2. Guide d'utilisation. BRGM/RP 62797 FR, 126p
- Thorntwaite, C.W., 1948. An approach toward a rational classification of climate. *Geographical Review* 38, 55–94. <https://doi.org/10.2307/210739>
- 870 Todini, E., 1996. The ARNO rainfall-runoff model. *Journal of Hydrology* 175, 339–382. [https://doi.org/10.1016/S0022-1694\(96\)80016-3](https://doi.org/10.1016/S0022-1694(96)80016-3)
- Tóth, J., 1963. A theoretical analysis of groundwater flow in small drainage basins. *Journal of Geophysical Research* 68, 4795–4812. <https://doi.org/10.1029/JZ068i016p04795>
- 875 Vidal, J.P., Martin, E., Franchistéguy, L., Baillon, M., Soubeyroux, J.M., 2010. A 50 year high-resolution atmospheric reanalysis over France with the Safran system. *International Journal of Climatology* 30, 1627–1644. <https://doi.org/10.1002/joc.2003>

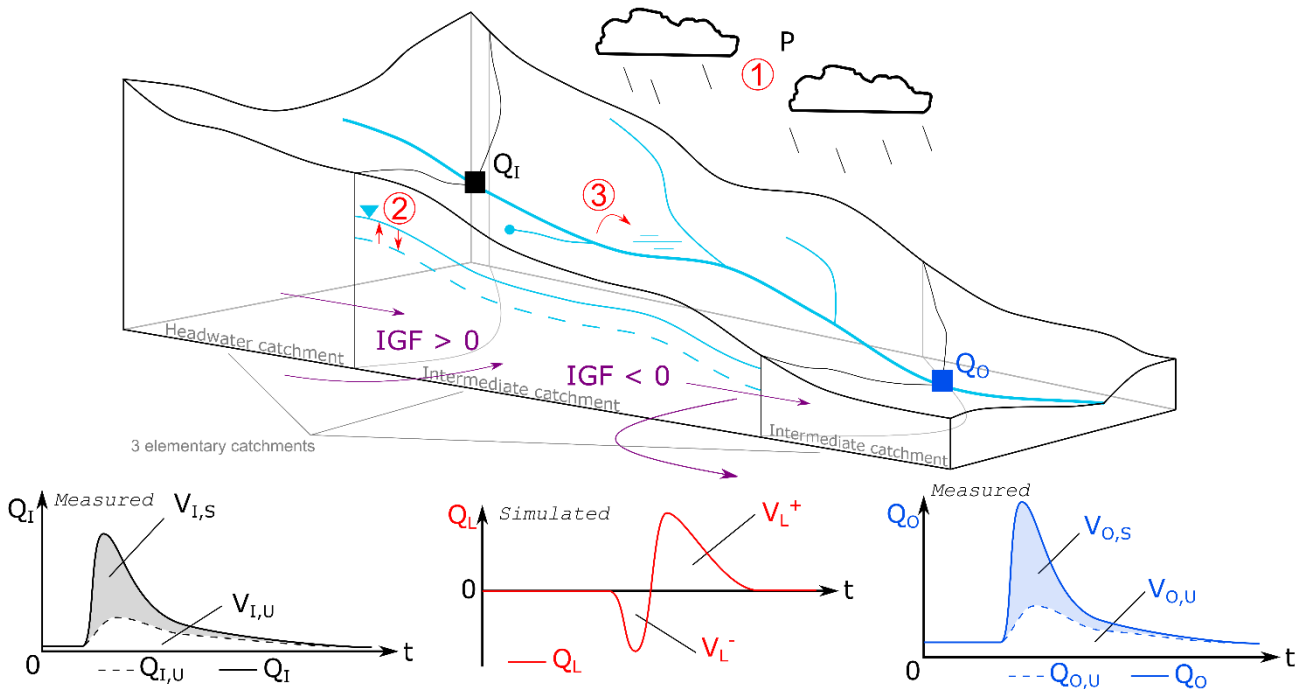


880

Figure 1 : Main hydrological flow types at the elementary catchment and storm-event scales, with corresponding measured and simulated hydrographs. Flow definitions are given in Eq. (1) to (5). The corresponding volumes, integrated for the storm event, are noted V with the same indices (see Appendix D for symbols). Lateral flow Q_L is a combination of IGF, effective rainfall (1), **gaining and losing IGFs** (2), aquifer storage variation (23) and overbank phenomena (34, neglected here).

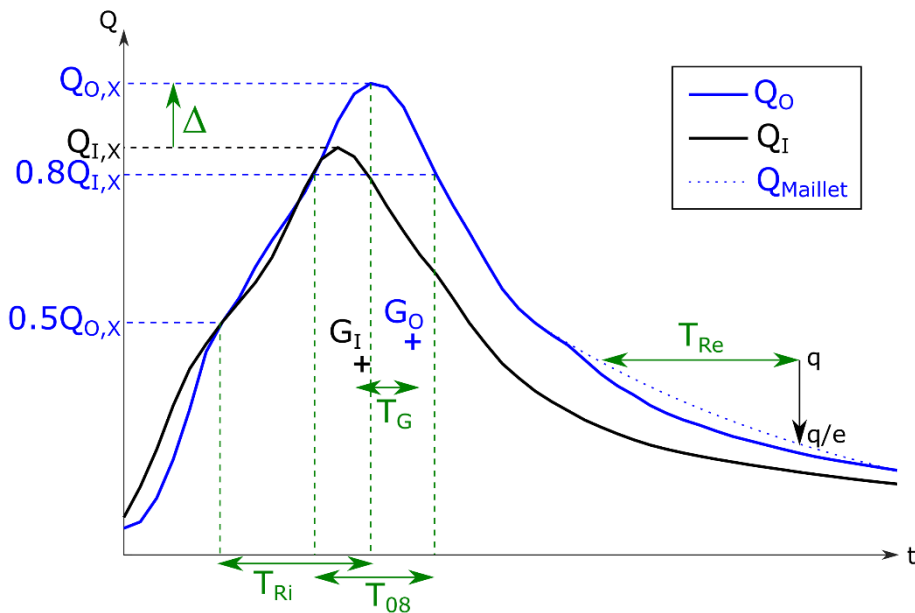


885


Figure 2: Storm hydrograph with characteristic times and discharge values. $Q_{O,X}$ and $Q_{I,X}$ are peakflows of outlet and inlet station hydrographs Q_O and Q_I , respectively. T_G is the elapsed time between the corresponding gravity centres G_O and G_I .

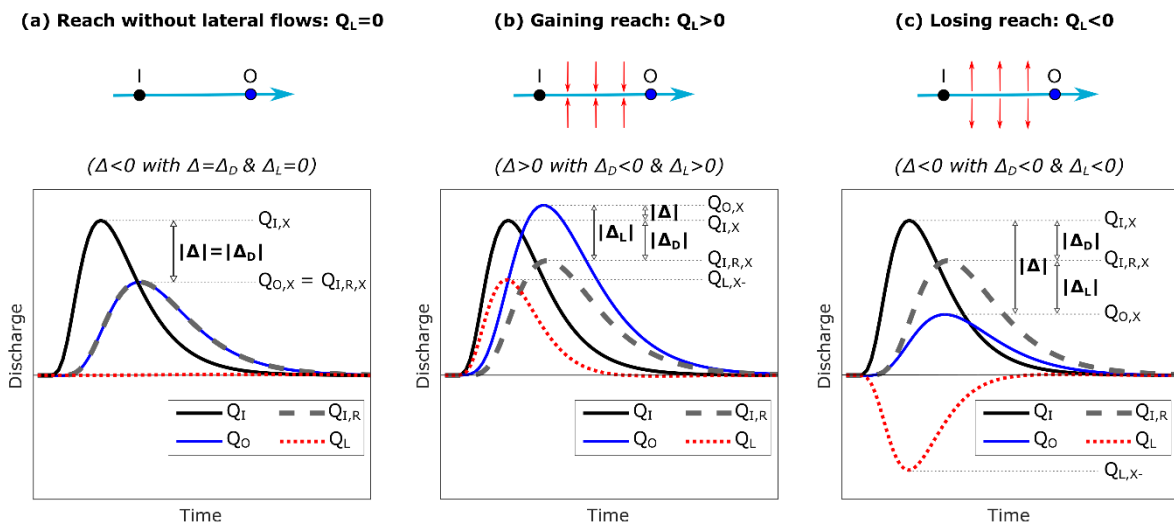


890 **Figure 3:** Theoretical examples of simulated lateral hydrographs Q_L , with corresponding values of peakflow variation Δ and its two components Δ_D and Δ_L . Modified from Charlier et al., 2019. $Q_{O,X}$ and $Q_{I,X}$ are peakflows of the outlet and inlet station hydrographs Q_O and Q_I , respectively. $Q_{I,R}$ is the theoretical outlet flow without lateral exchange (routed inflow by DWE, with C and D parameters).

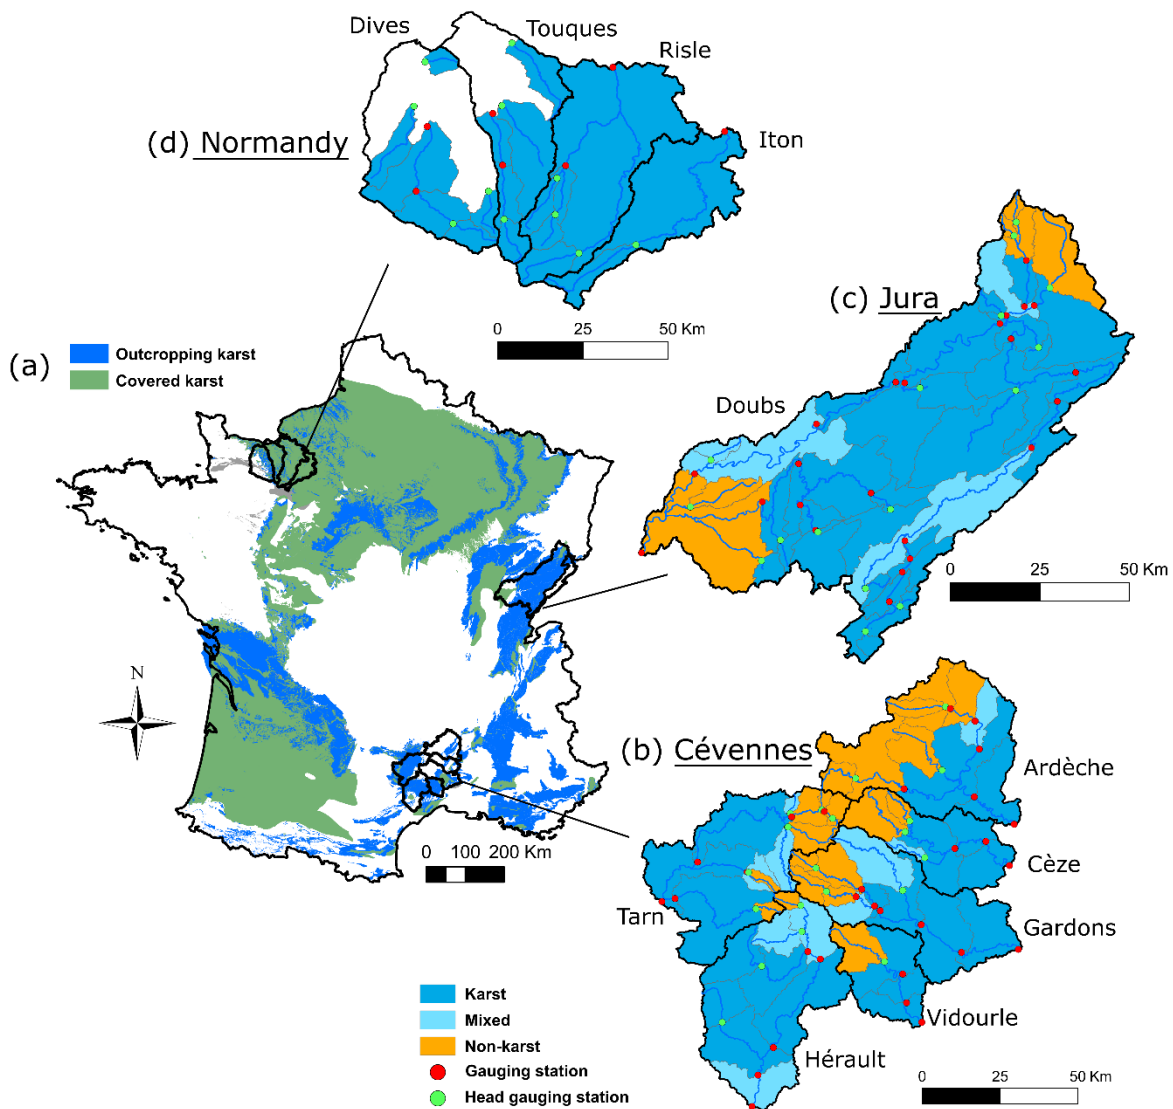

895 **Figure 4:** (a): Location of the studied areas with karst regions in France (from BDLISA database). (b), (c), (d): Distribution of gauging stations and geology type of elementary catchments. Red circles indicate gauging stations in intermediate catchments; green circles indicate gauging stations in headwater catchments.

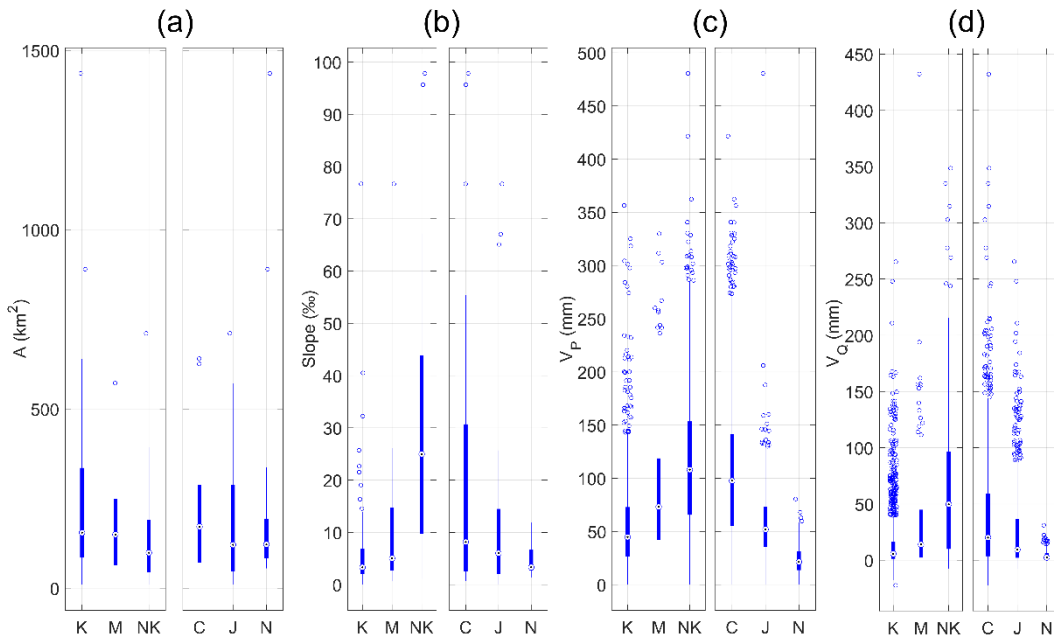

900 **Figure 5: Elementary catchment area (a); reach mean slope (b) distribution of the 108 gauging stations, grouped by geology type (K: karst, M: mixed, NK: non-karst) and by study area (C: Cévennes, J: Jura, N: Normandy) for K catchments. Precipitation (c) and runoff (d) depth distribution for the 20 selected storm events on the 108 gauging stations, grouped by geology type and study area for K catchments. Values beyond dashed lines are represented on the lines.**

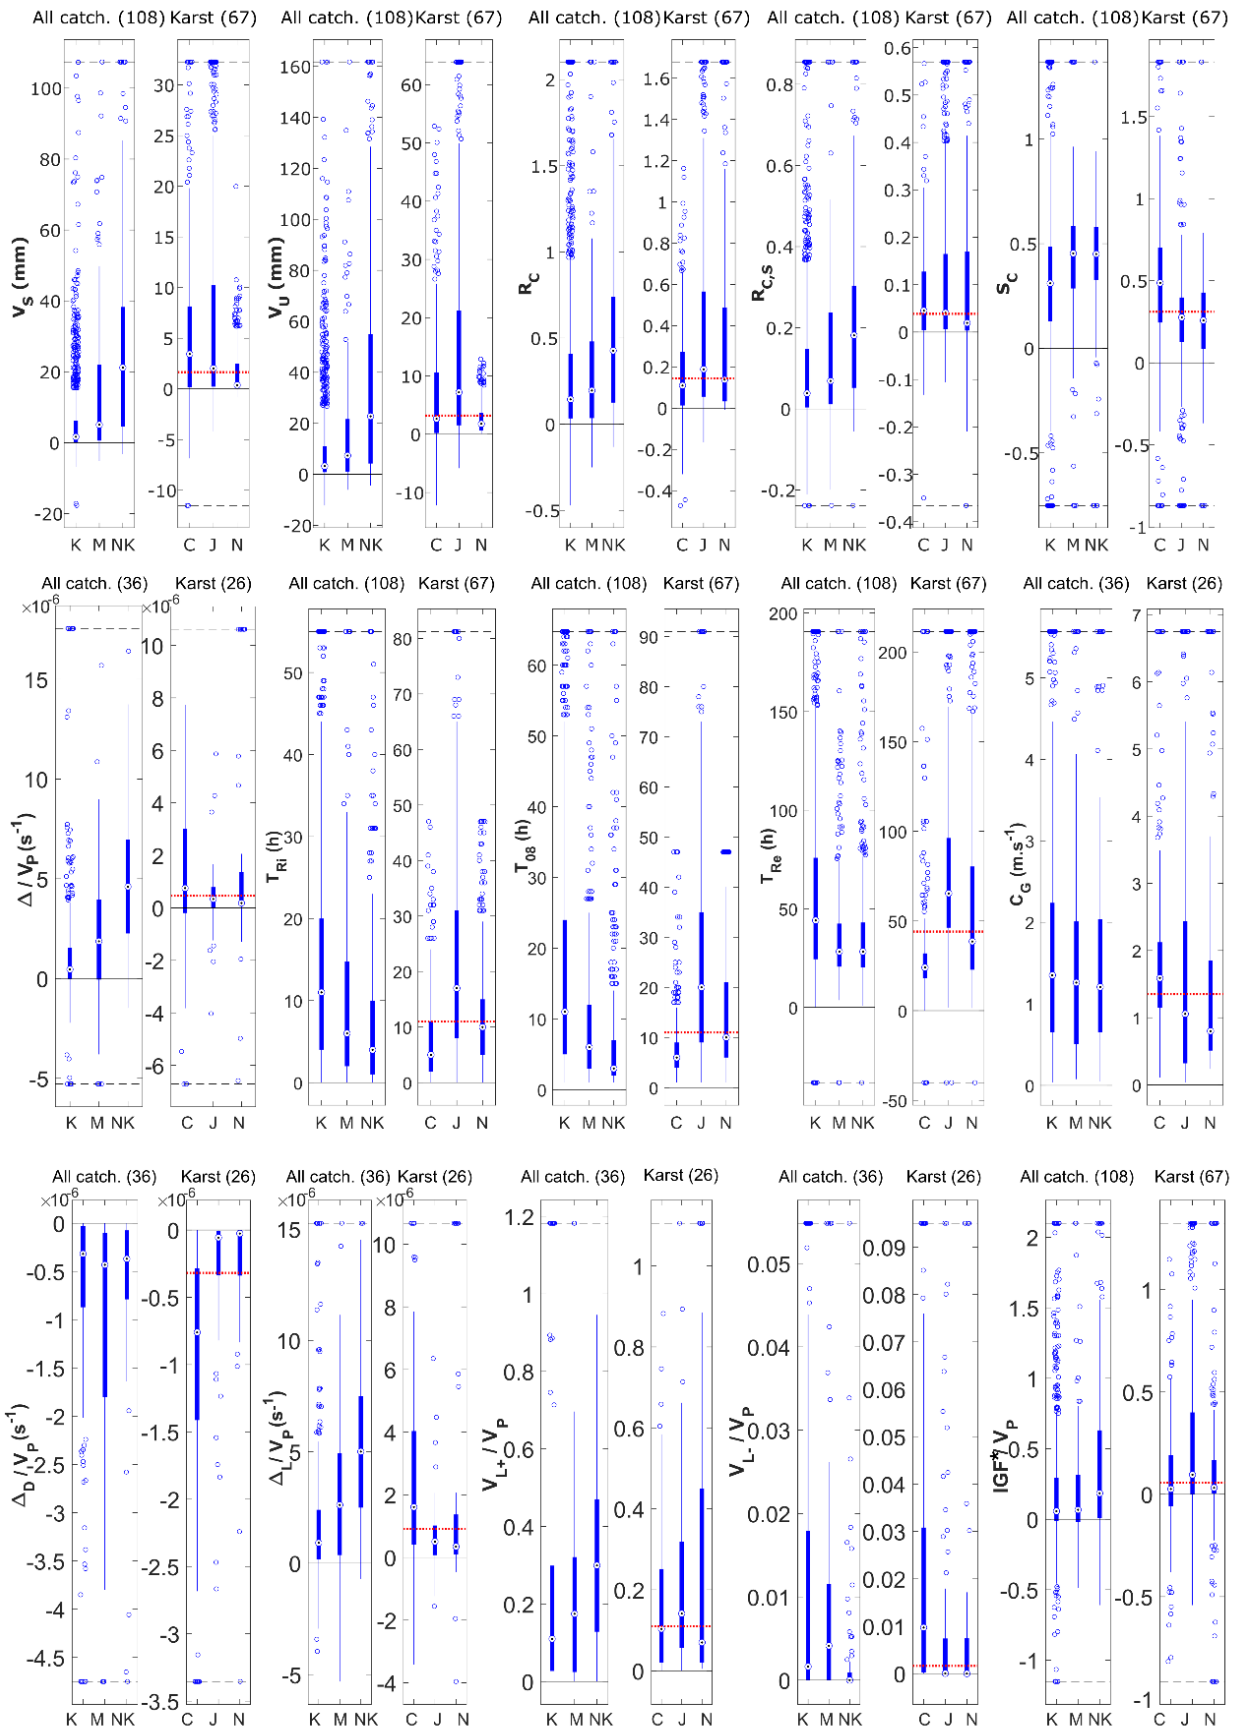

905

Figure 6: Distribution of hydrological descriptors, grouped by geology type (K: karst, M: mixed, NK: non-karst) and by location for karst catchments (C: Cévennes, J: Jura, N: Normandy). First row: water-balance descriptors; second row: hydrograph-shape descriptors; third row: lateral-exchange descriptors. Red dotted lines show the median value of karst catchments for the whole sample. Values beyond black dashed lines are represented on the lines.

910


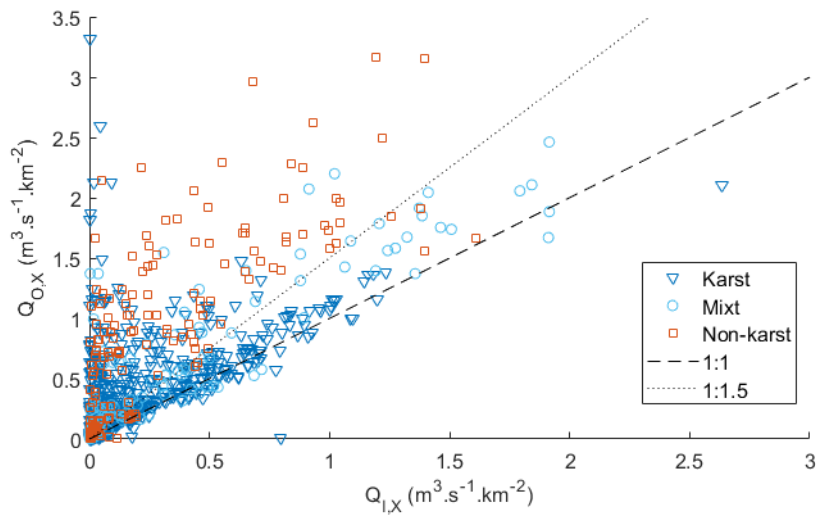


Figure 7: Variation of peakflow (Q_x , see Appendix D) from inlet to outlet stations, with representation of geology type.

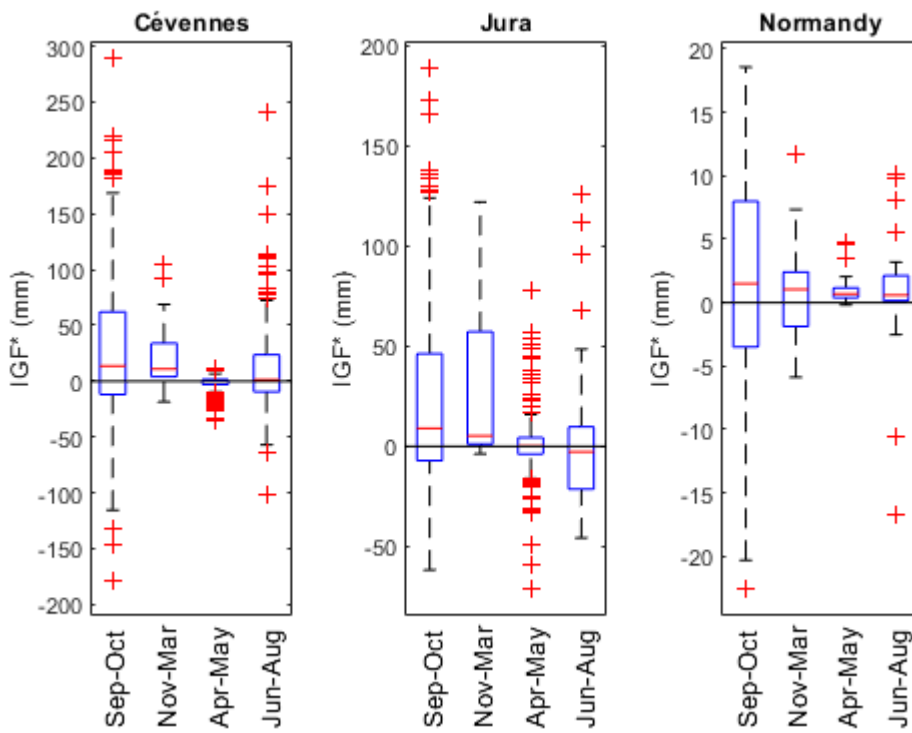

915 **Figure 8: IGF* depths distribution for the three studied sites, according to seasons**



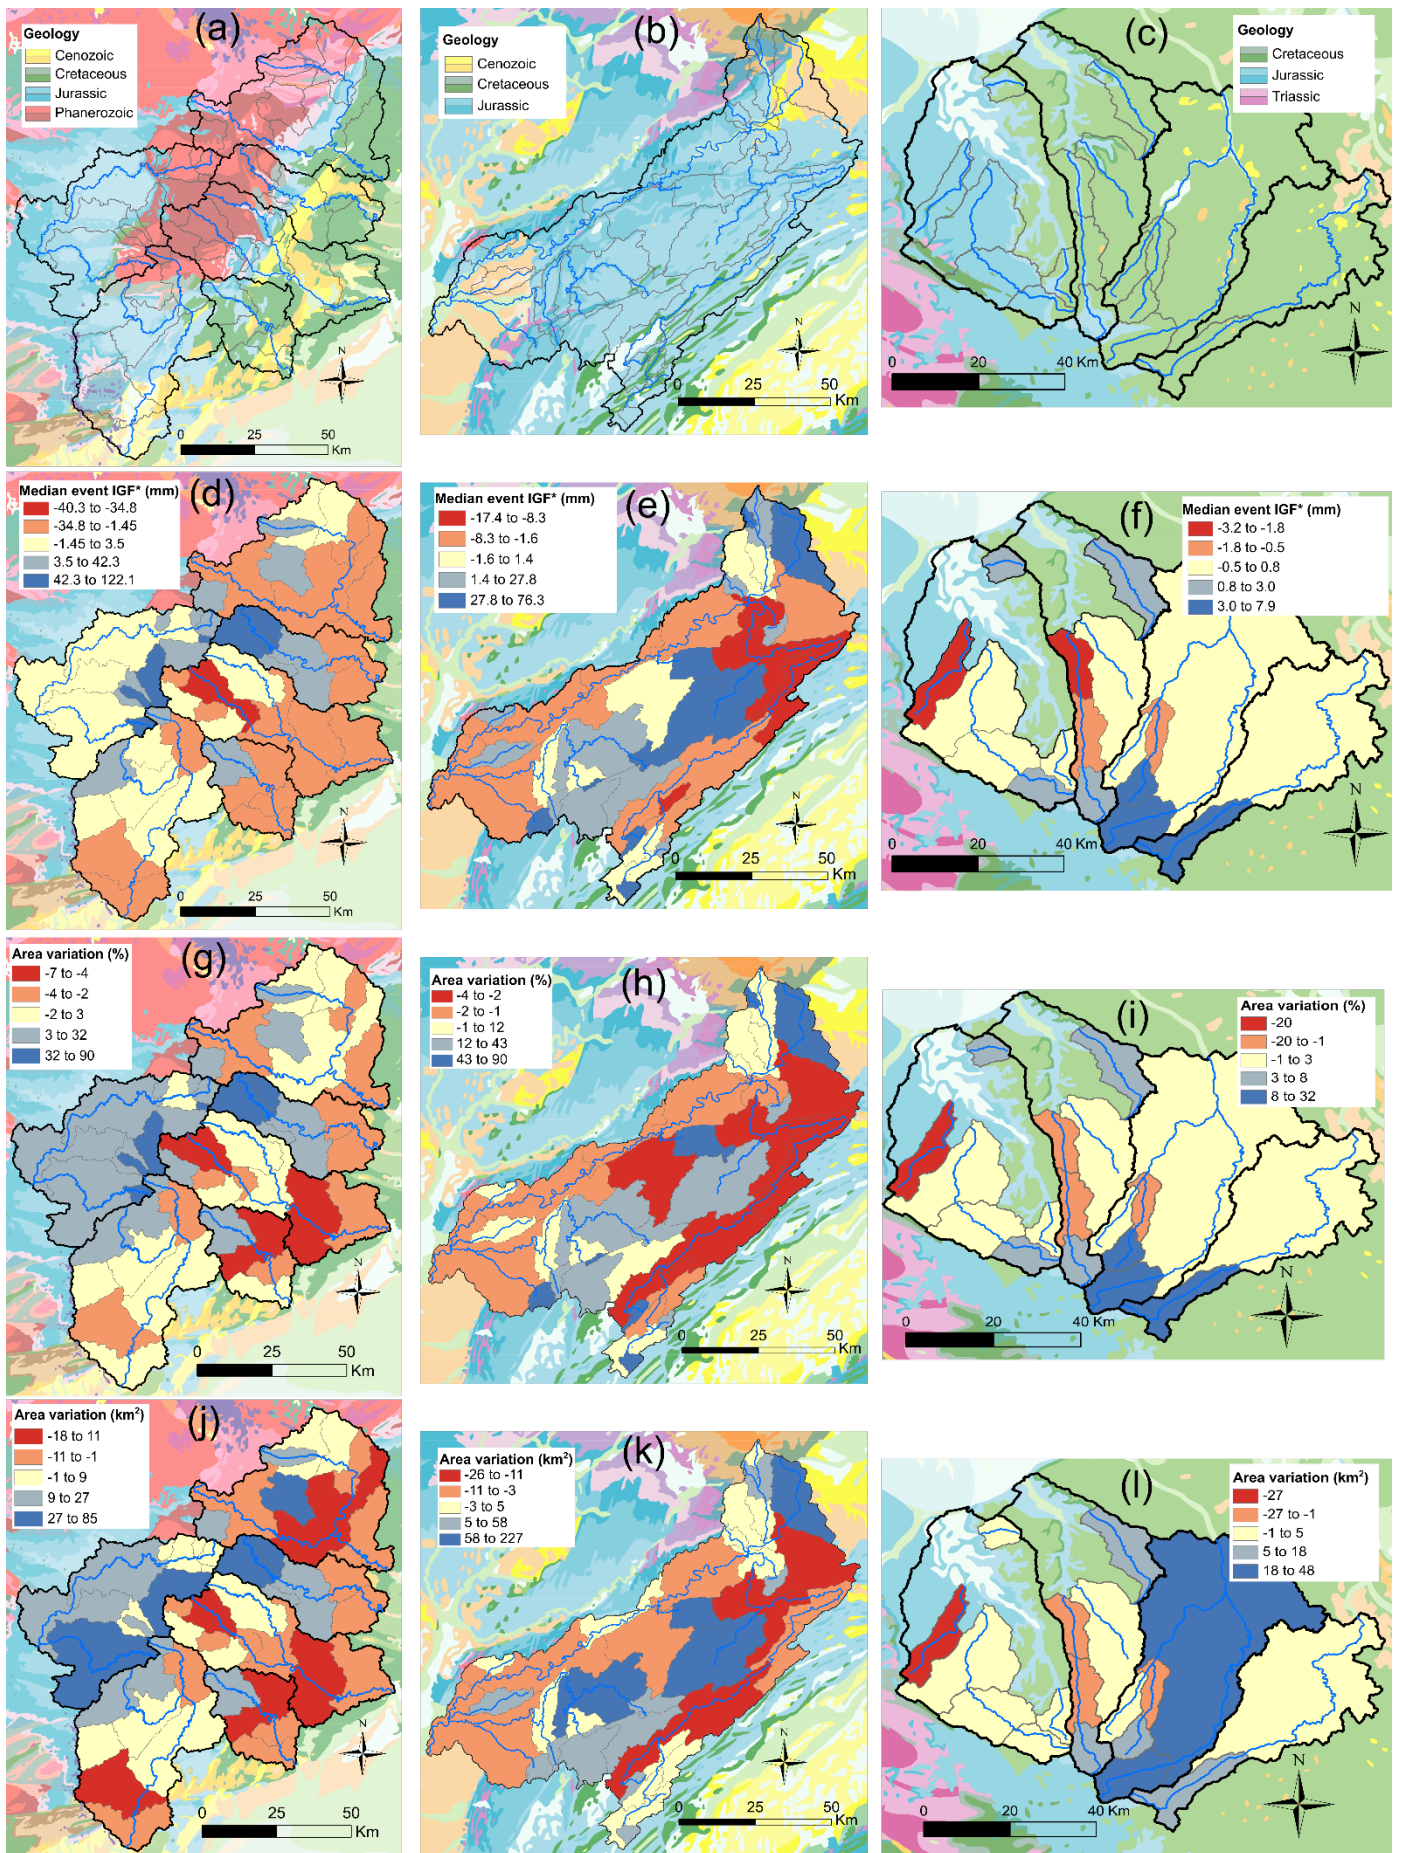


Figure 9: Main geological features in the three studied areas (a, b, c), median storm event IGF* values (including potential aquifer storage variation) (d, e, f), and area variation from actual topographic to virtual hydrogeologically active (in %) (g, h, i) and in km² (j, k, l). Median storm event IGF* values (including potential aquifer storage variation) in the three studied areas, and main geological features. (a), (b): Cévennes Mountains; (c), (d): Jura Mountains; (e), (f): Normandy

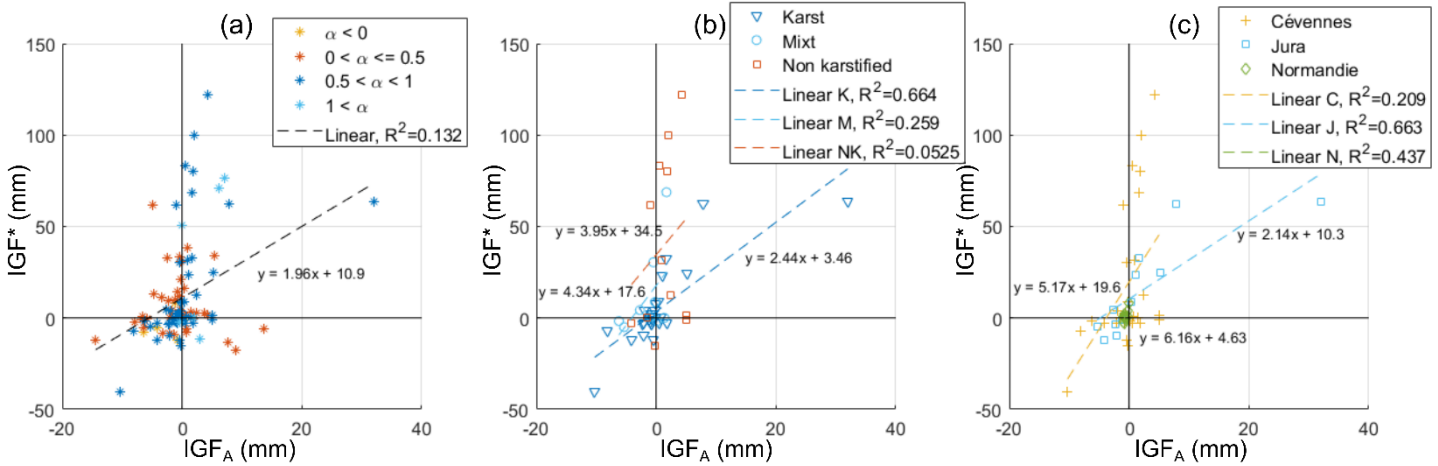

925

Figure 10: Relationships between multi-annual water-balance derived IGF_A and storm-event derived IGF^* (including potential aquifer storage variation) depths. IGF_A depth is normalized by event duration for consistent comparisons. First, all 108 elementary catchments were plotted (a), then catchments were filtered to retain only α values between 0.5 and 1; these were plotted grouped by geology type (b) and study area (c).

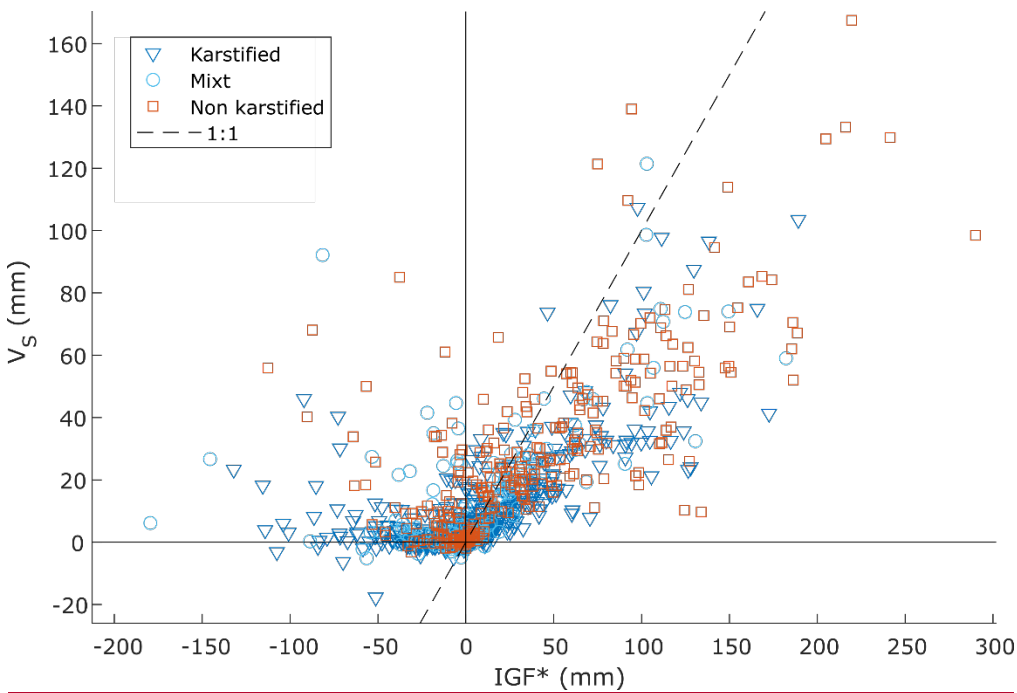

930

Figure 11: V_s depths versus IGF^* depths for all events and reaches, with differentiation of geology types

Table 1: Studied catchments and associated available data

	Study zone area (km ²)	Gauging stations	Median gauged area (km ²)	Time series length
Ardèche	2,257	9	193	1996 – 2018
Cèze	1,048	6	192	2002 – 2018
Gardons	1,853	10	137	2008 – 2018
Vidourle	772	4	182	2009 – 2018
Hérault	2,203	9	223	2007 – 2018
Tarn	2,145	13	64	1984 – 2018
Total Cévennes	10,300	51	172	13 years (median)

Doubs	7,400	39	121	1998 – 2018
Total Jura	7,400	39	121	21 years
Iton	1,048	2	524	1999 – 2018
Risle	1,803	5	84	2001 – 2018
Touques	800	5	106	2010 – 2018
Dives	879	6	113	2009 – 2018
Total Normandy	6,800	30	127	13 years (median)
Total all basins	24,500	120	145	15 years (median)

935 **Table 2: Synthesis of t test decisions for the null hypothesis that data in paired tested samples come from independent random samples from normal distributions with equal means and equal but unknown variances. The result is ‘1’ if the test rejects the null hypothesis at the 5% significance level, and ‘0’ otherwise; p-values are indicated with letters (a = $p < 0.001$, b = $0.001 < p < 0.01$, c = $0.01 < p < 0.05$). The test is performed i) in the three study areas for all combinations of paired samples by geology type (K: karst, M: mixed, NK: non-karst), and ii) for all combinations of karst-catchment paired samples by study area (C: Cévennes, J: Jura, N: Normandy).**

940

Descriptor	K-NK	M-NK	M-K	C-J	C-N	J-N
Water-balance descriptors						
V_S	1 ^a	1 ^a	1 ^a	1 ^c	1 ^a	1 ^a
V_U	1 ^a	1 ^a	1 ^a	1 ^a	1 ^a	1 ^a
R_C	0	0	0	1 ^a	1 ^b	1 ^b
$R_{C,S}$	1 ^c	0	0	1 ^a	1 ^b	1 ^b
S_C	0	0	0	0	0	0
Hydrograph-shape descriptors						
Δ/V_P	0	1 ^a	0	1 ^b	1 ^c	0
T_{Ri}	1 ^a	1 ^b	1 ^a	1 ^a	1 ^a	1 ^a
T_{08}	1 ^a	1 ^a	1 ^a	1 ^a	1 ^a	1 ^a
T_{Re}	1 ^b	0	1 ^c	0	0	0
C_G	0	0	0	0	1 ^c	0
Lateral-exchange descriptors						
Δ_D/V_P	0	1 ^c	1 ^c	1 ^a	1 ^b	0
Δ_L/V_P	0	1 ^b	0	1 ^a	1 ^c	0
V_{L+}/V_P	0	1 ^c	0	0	1 ^b	1 ^c
V_{L-}/V_P	0	1 ^b	0	1 ^b	0	0
IGF^*/V_P	0	0	0	1 ^a	0	0

Appendix A: Hydrograph decomposition

At each gauging station, discharge values were filtered in order to separate the quick (stormflow, Q_S) and slow (underground flow, Q_U) flow components. The quick is traditionally interpreted as the surface component, and the slow one as baseflow, which is that part of streamflow corresponding to aquifer drainage. However, in the case of karst catchments, aquifer drainage can also produce a quick-flow signal because of short transfer times through conduits. Several baseflow-separation methods exist, most being based on graphical analysis, like the fixed-interval, sliding-interval, local-minimum, or Wallingford methods (Gustard et al., 1992; Sloto and Crouse, 1996; Rutledge, 1998; Piggott et al., 2005). Numerical approaches have also been developed (e.g. Lyne and Hollick, 1979; Eckhardt, 2005). In this study, we used an automation of the one-parameter recursive

945

digital filter proposed by Lyne and Hollick (1979), implemented in the HydRun package (Tang and Carey, 2017). The filter equation is defined as:

$$Q_S(t) = \beta Q_S(t-1) + \frac{1+\beta}{2} [Q(t) - Q(t-1)] \quad (A1)$$

with $Q_S(t)$ and $Q(t)$ the filtered quick-flow component and total streamflow at time t , respectively, and β the filter parameter. We chose this method as it provides consistent results, like those obtained with graphical approaches (results not shown). It can easily be automated and has only one β parameter, fixed at 0.91 after a trial-and-error analysis on the studied catchments, and considering the results of Nathan and McMahon (1990) for 186 catchments.

Appendix B: Lateral flow simulation using the diffusive wave equation

Diffusive wave equation

An inverse modelling approach is adopted for simulating lateral flow between two gauging stations. This approach simulates the lateral flow Q_L , based on measurements from two gauging stations Q_I and Q_O .

The diffusive wave equation (DWE), accounting for lateral flow, is an approximation of the St-Venant equation that can be written as:

$$\frac{\partial Q}{\partial t} + C(Q) \left[\frac{\partial Q}{\partial x} - q \right] - D(Q) \left[\frac{\partial^2 Q}{\partial x^2} - \frac{\partial q}{\partial x} \right] = 0 \quad (A2)$$

where x [L] is the length along the channel, t [T] is the time, and celerity $C(Q)$ [$L T^{-1}$] and diffusivity $D(Q)$ [$L^2 T^{-1}$] are functions of the discharge Q [$L^3 T^{-1}$]. The term $q(x,t)$ [$L^2 T^{-1}$] represents the lateral flow distribution. The lateral hydrograph $Q_L(t)$ is given by:

$$Q_L(t) = \int_0^l q(x,t) dx \quad (A3)$$

with l [L] the channel length.

Moussa (1996) extended the solution of the DWE under Hayami's hypotheses (semi-infinite channel, $C(Q)$ and $D(Q)$ constant) to the case where lateral flow is uniformly distributed along the channel. Let $I(t)$ and $O(t)$ be the inlet flow minus baseflow and the outlet flow minus baseflow, respectively:

$$O(t) = \varphi(t) + [I(t) - \varphi(t)] * K(t) \quad (A4)$$

with $K(t)$ the Hayami Kernel function defined as:

$$K(t) = \frac{l}{2(\pi D)^{1/2}} \frac{e^{\left[\frac{Cl}{4D} \left(2 - \frac{l}{Ct} - \frac{Ct}{l} \right) \right]}}{t^{3/2}} \quad (A5)$$

and

$$\varphi(t) = \frac{c}{l} \int_0^t [Q_L(\theta) - Q_L(0)] d\theta \quad (A6)$$

The inverse problem

Under Hayami's conditions and assuming that lateral flow is uniformly distributed along the channel, Moussa (1996) proposed a solution of the inverse problem; this enables evaluation of the temporal distribution of lateral flow $Q_L(t)$ over the channel reach by knowing $I(t)$ and $O(t)$. Knowing C , D and l , the lateral flow can be calculated using the following procedure:

$$L(t) = O(t) - I(t) * K(t) \quad (A7)$$

$$K^i(t) = K * K * \dots * K \quad (i \text{ times}) \quad (A8)$$

$$\varphi(t) = L(t) + L(t) \sum_{i=1}^{\infty} K^i(t) \quad (A9)$$

and finally the lateral flow $Q_{L,C}(t)$

$$Q_{L,C}(t) = Q_L(0) + \frac{l}{c} \frac{d\varphi}{dt} \quad (A10)$$

Effective rainfall P_{eff} is estimated using three different approaches, in order to provide a range for this component characterized by major uncertainties. The three approaches are based on the water-budget methods proposed by Thornthwaite (1948) and Dingman (2002), and on the GR lumped model (Edijatno et al., 1999). All three consider soil as a reservoir, used for separating the input (precipitation) into evapotranspiration and effective rainfall. The capacity of the soil reservoir C_{max} is estimated with the map of available soil-water capacity from INRAE (Le Bas, 2018).

In the **Thornthwaite method**, water in the soil reservoir is directly available for evapotranspiration, and precipitation produces effective rainfall (P_{eff}) only after soil saturation. The following algorithm summarizes the method:

- If $P < E0$, the difference $E0 - P$ is subtracted from the soil-water stock B until it is empty:
 - $B_t = \max(0; B_{t-1} + P_t - E0_t)$
 - $E_t = \min(E0_t; B_{t-1} + P_t)$
 - $P_{efft} = 0$
- If $P > E0$, the difference $P - E0$ first feeds the soil-water stock B and then produces efficient rainfall:
 - $B_t = \min(B_{max}; B_{t-1} + P_t - E0_t)$
 - $E_t = E0_t$
 - $P_{efft} = \max(0; B_t + P_t - E0_t - B_{max})$

The **Dingman method** is similar to the previous one, with an exponential law governing water extraction for evapotranspiration from the soil reservoir:

- If $P < E0$, the difference $E0 - P$ is subtracted from the soil water stock B following an exponential law:
 - $B_t = B_{t-1} \cdot e^{\frac{-(E0_t - P_t)}{B_{max}}}$
 - $E_t = P_t + B_{t-1} - B_t$
 - $P_{efft} = 0$
- If $P > E0$, the difference $P - E0$ first feeds the soil-water stock B and then produces efficient rainfall (as in the Thornthwaite method):
 - $B_t = \min(B_{max}; B_{t-1} + P_t - E0_t)$
 - $E_t = E0_t$
 - $P_{efft} = \max(0; B_t + P_t - E0_t - B_{max})$

The **GR method** is derived from the GR hydrological models (Edijatno et al., 1999) and involves a quadratic law for the water-level variation in the soil reservoir. The algorithm, summarized below, then was adapted to the BRGM 'Gardenia' model (Thiéry, 2014), which has been used here.

- If $P < E0$, the difference $E_n = E0 - P$ is subtracted from the soil-water stock B , following a quadratic law:
 - $dB = ((B/B_{max})^2 - 2(B/B_{max})) \cdot dE_n$
 - $dE_t = -dB$
 - $P_{eff} = 0$
- If $P > E0$, the difference $P_n = P - E0$ is partitioned into effective rainfall and soil storage following a quadratic law:
 - $dB = (1 - (B/B_{max})^2) \cdot dP_n$
 - $E = E0$
 - $dP_{eff} = (B/B_{max})^2 \cdot dP_n$
- Integration of the differential variations provides expressions of B_t , E_t and P_{efft} as a function of B_{t-1} , B_{max} , and $\tanh(E_n/B_{max})$ or $\tanh(P_n/B_{max})$.

The final P_{eff} value corresponds to the mean of the three estimation method results.

Appendix D: List of symbols

Symbol	Unit	Formula	Description
Water-balance descriptors			
V_S	mm	$(V_{O,S}-V_{I,S}) / A$	Stormflow depth
V_U	mm	$(V_{O,U}-V_{I,U}) / A$	Baseflow depth
R_C	-	$(V_O-V_I) / V_P$	Runoff coefficient
$R_{C,S}$	-	V_S / V_P	Storm-runoff coefficient
S_C	-	V_S / V_Q	Stormflow coefficient
Hydrograph-shape descriptors			
Δ / V_P	s^{-1}	$(Q_{O,X}-Q_{I,X})/V_P$	Peakflow variation normalized by rainfall
T_{Ri}	h	-	Time duration of rise from $0.5Q_{O,X}$ to $Q_{O,X}$
T_{08}	h	-	Time duration at $Q_O > 0.8Q_{O,X}$
T_{Re}	h	Eq. (7)	Time constant of recession (exponential model)
C_G	$m.s^{-1}$	$l/(t(G_O)-t(G_I))$	Celerity (based on hydrograph gravity centres)
Lateral-exchange descriptors			
Δ_D / V_P	s^{-1}	$(Q_{I,R,X}-Q_{I,X})/ V_P$	Diffusivity peakflow variation normalized by rainfall
Δ_L / V_P	s^{-1}	$(Q_{O,X}-Q_{I,R,X})/ V_P$	Exchange peakflow variation normalized by rainfall
V_{L+} / V_P	-	V_{L+} / V_P	Lateral inflow normalized by rainfall
V_{L-} / V_P	-	V_{L-} / V_P	Lateral outflow normalized by rainfall
IGF^*/V_P	mm	$(V_Q-V_{Peff})/ V_P$	Interbasin Groundwater Flow normalized by rainfall
Other variables			
A	m^2	-	Catchment area
β	h^{-1}	-	Recession coefficient as per Maillet approximation
C	$m.s^{-1}$	-	Celerity, parameter of the DWE here taken as C_G
D	-	-	Diffusivity, parameter of the DWE
δ	mm	-	Aquifer-storage variation, expressed as catchment depth
E	mm	Appendix C	Actual evapotranspiration
$G_I; G_O$	-	-	Inlet and outlet hydrograph gravity centres
IGF^*	mm	$V_O-V_I - V_{Peff}$	IGF and aquifer variation = streamflow excess or deficit
IGF_A	mm	-	Multi-annual IGF calculated in Le Mesnil et al., 2020
l	m	-	River reach length
P; V_P	$mm.s^{-1}; mm$	-	Precipitation rate and depth on the elementary catchment
$P_{eff}; V_{Peff}$	$mm.s^{-1}; mm$	Appendix C	Effective rainfall rate and depth
q	$m^3.s^{-1}$	-	Streamflow at the beginning of recession limb
$Q_O; V_O$	$m^3.s^{-1}; mm$	-; -	Streamflow and water depth at catchment outlet
$Q_I; V_I$	$m^3.s^{-1}; mm$	-; -	Streamflow and water depth at catchment inlet
$Q; V_Q$	$m^3.s^{-1}; mm$	$Q_O-Q_I; V_O-V_I$	Streamflow and water depth at elementary catchment
$Q_{O,U}; V_{O,U}$	$m^3.s^{-1}; mm$	-; -	Slow streamflow and water depth at catchment outlet
$Q_{O,S}; V_{O,S}$	$m^3.s^{-1}; mm$	-; -	Quick-flow component and water depth at catchment outlet
$Q_{I,U}; V_{I,U}$	$m^3.s^{-1}; mm$	-; -	Slow-flow component and water depth at catchment inlet
$Q_{I,S}; V_{I,S}$	$m^3.s^{-1}; mm$	-; -	Quick-flow component and water depth at catchment inlet
Q_U	$m^3.s^{-1}$	$Q_{O,U}-Q_{I,U}$	Slow-flow component at elementary catchment

Q_s	$m^3.s^{-1}$	$Q_{O,S}-Q_{L,S}$	Quick-flow component at elementary catchment
$Q_{O,X}$	$m^3.s^{-1}.km^{-2}$	-	Peakflow at catchment outlet normalized by A
$Q_{L,X}$	$m^3.s^{-1}.km^{-2}$	-	Peakflow at catchment inlet normalized by A
Q_L	$m^3.s^{-1}$	Appendix B	Simulated lateral-exchange flow
$Q_{L,R}$	$m^3.s^{-1}$	Appendix B	Routed inlet streamflow
$Q_{L,R,X}$	$m^3.s^{-1}$	Appendix B	Routed inlet streamflow peakflow
$Q_{Maillet}$	$m^3.s^{-1}$	$q \cdot \exp(-\beta t)$	Maillet approximation of recession streamflow
T_G	h	-	Elapsed time between G_I and G_O