

Minor Changes made to the Paper at the Request of One Reviewer/Editor

Dear Editor,

The following minor changes have been made as requested:

- Table 3: It is not clear from the text how exposure values for which ranges are presented are handled in the analysis.

Response: we have added text to explain this – see page 8 of the manuscript with the text highlighted in yellow.

- L. 484-485: As discussed in the response to reviewers, you added that you will look for further funding after the initial project phase. In table S6 it is more or less clear that the costs are for a 5-year period. I think it would be good to repeat this in this sentence, so it is clear for the reader when the project will be evaluated and funding will be sought for continuation.

I think they just mean to add a sentence before Table S6 (because we already say this in the main text).

Response: we have added text to the Supplementary Material file – see page 9 of this file with the text highlighted in yellow.

Best wishes,

The authors

The Value of Citizen Science for Flood Risk Reduction: Cost-benefit Analysis of a Citizen Observatory in the Brenta-Bacchiglione Catchment

Michele Ferri¹, Uta Wehn², Linda See³, Martina Monego¹, Steffen Fritz³

5 ¹Alto-Adriatico Water Authority/Autorità di bacino distrettuale delle Alpi orientali (AAWA), Cannaregio 4314, 30121 Venice, Italy

²IHE Delft Institute for Water Education, Westvest 7, 2611 AX Delft, The Netherlands

³International Institute for Applied Systems Analysis (IIASA), Schlossplatz 1, 2361 Laxenburg, Austria

Correspondence to: Michele Ferri (michele.ferri@distrettoalpiorientali.it)

10 **Abstract.** Citizen observatories are a relatively recent form of citizen science. As part of the flood risk management strategy of the Brenta-Bacchiglione catchment, a citizen observatory for flood risk management has been proposed and is currently being implemented. Citizens are involved through monitoring water levels and obstructions and providing other relevant information through mobile apps, where the data are assimilated with other sensor data in a hydrological-hydraulic model used in early warning. A cost benefit analysis of the citizen observatory was undertaken to demonstrate the value of this approach in monetary terms. Although not yet fully operational, the citizen observatory is assumed to decrease the social vulnerability of the flood risk. By calculating the hazard, exposure and vulnerability of three flood scenarios (required for flood risk management planning by the EU Directive on Flood Risk Management) with and without the proposed citizen observatory, it is possible to evaluate the benefits in terms of the average annual avoided damage costs. Although currently a hypothetical exercise, the results showed a reduction in avoided damage of 45% compared to a business as usual scenario.

15

20 Thus, linking citizen science and citizen observatories with hydrological modelling to raise awareness of flood hazards and to facilitate two-way communication between citizens and local authorities has great potential in reducing future flood risk in the Brenta-Bacchiglione catchment. Moreover, such approaches are easily transferable to other catchments.

1 Introduction

In 2018, flooding affected the highest number of people of any natural disaster globally and caused major damage worldwide (CRED, 2019). With climate change, the frequency and magnitude of extreme events will increase, leading to a higher risk of flooding (Schiermeier, 2011). This risk will be further exacerbated by future economic and population growth (Tanoue et al., 2016). Thus, managing flood risk is critical for reducing future negative impacts. Flood risk assessments are undertaken by the insurance industry for determining properties at high risk (Hsu et al., 2011), but they are also a national requirement in the European Union as set out in the EU Flood Risk Management Directive, which requires that flood risk management plans are produced for each river basin (EU, 2007; Müller, 2013). The assessment of flood risk involves quantifying three main drivers (National Research Council, 2015): (a) flood hazard, which is the probability that a flood of a certain magnitude will occur in a certain period of time in a given area; (b) exposure, which is the economic value of the human lives and assets affected by the flood hazard; and (c) vulnerability, which is the degree to which different elements (i.e., people, buildings, infrastructure, economic activities, etc.) will suffer damage associated with the flood hazard. In addition, flood risk can be mitigated through hard engineering strategies such as implementation of structural flood protection schemes, soft engineering approaches comprising more natural methods of flood management (Levy and Hall, 2005), and community-based flood risk management (Smith et al., 2017). As part of requirements in the EU Flood Risk Management Directive, any mitigation actions must be accompanied by a cost-benefit analysis.

25

30

35

Flood hazard is generally determined through hydrological and hydraulic modelling. Hence accurate predictions are critical for effective flood risk management, particularly in densely populated urban areas (Mazzoleni et al., 2017). The input data required for modelling are often incomplete in terms of resolution and density (Lanfranchi et al., 2014), which translates into variable accuracy in flood predictions (Werner et al., 2005). New sources of data are becoming available to support flood risk management. For example, the rise of citizen science and crowdsourcing (Howe, 2006; Sheldon and Ashcroft, 2016), accelerated by the rapid diffusion of information and communication technologies, is providing additional, complementary sources of data for hydrological monitoring (Njue et al., 2019). Citizen science refers to the involvement of the public in any step of the scientific method (Shirk et al., 2012). However, one of the most common forms of participation is in data collection (Njue et al., 2019). Citizen observatories (CO) are a particular form of citizen science in so far as they constitute the means not just for new knowledge creation but also for its application, which is why they are typically set up with linkages to specific policy domains (Wehn et al., 2019). COs must, therefore, include a public authority (e.g., a local, regional or national body) to enable two-way communication between citizens and the authorities to create a new source of high quality, authoritative data for decision making and for the benefit of society. Moreover, COs involve citizens in environmental observations over an extended period of time of typically months and years (rather than one-off exercises such as data collection ‘Blitzes’), and hence contribute to improving the temporal resolution of the data, using dedicated apps, easy-to-use physical sensors and other monitoring technologies linked to a dedicated platform (Liu et al., 2014; Mazumdar et al., 2016). COs are increasingly being used in hydrology/water sciences and management and in various stages of the flood risk management cycle, as reviewed and reported by Assumpção (2018), Wehn and Evers (2015) and Wehn et al. (2015). Specifically, Wehn et al. (2015) found that the characteristic links of COs to authorities and policy do not automatically translate into higher levels of participation in flood risk management, nor that communication between stakeholders improves; rather, changes towards fundamentally more involved citizen roles with higher impact in flood risk management can take years to evolve.

The promising potential of the contribution of COs to improved flood risk management is paralleled by limited evidence of their actual impacts and added value. Efforts are ongoing such as the consolidation of evaluation methods and empirical evidence by the H2020 project WeObserve¹ Community of Practice on the value and impact of citizen science and COs, and the development and application of methods for measuring the impacts of citizen science by the H2020 project MICS². To date, the societal and science-related impacts have received the most attention, while the focus on economic impacts, costs and benefits has been both more limited and more recent (Wehn et al., 2020a). The studies that do focus on economic impacts related to citizen science (rather than citizen observatories) propose to consider the time invested by researchers in engaging and training citizens (Thornhill et al., 2016); to relate cost and participant performance for hydrometric observations in order to estimate the cost per observation (Davids et al., 2019); to estimate the costs as data-related costs, staff costs and other costs; and the benefits in terms of scientific benefits, public engagement benefits and the benefits of strengthened capacity of participants (Blaney et al., 2016); and to compare citizen science data and in-situ data (Goldstein et al., 2014; Hadj-Hammou et al., 2017). Wehn et al. (2020b) assessed the value of COs from a data perspective and a cost perspective, respectively, to qualify the degree of complementarity that the data collected by citizens offer to in-situ networks and to quantify the relation between the investments required to set up a CO and the actual amount of data collected. Based on a comparison of four COs, they suggest that setting up a CO for the sole purpose of data collection appears to be an expensive undertaking (for the public sector organization(s) benefitting from the respective CO) since, depending on the process of (co)designing the CO, it may not necessarily complement the existing in-situ monitoring network (with the likely exception of infrastructure-weak areas in developing countries).

¹ <https://www.weobserve.eu/>

² <https://mics.tools/>

Overall, there is a lack of available, appropriate and peer-reviewed evaluation methods and of evidence of the added value of COs, which is holding back the uptake and adoption of COs by policy makers and practitioners. In this paper, we take a different approach to previous studies by using a more conventional cost-benefit analysis framework to assess the implementation of a CO on flood risk management in the Brenta-Bacchiglione catchment in northern Italy. The purpose of a cost-benefit analysis is to compare the effectiveness of different alternative actions, where these actions can be public policies, projects or regulations that can be used to solve a specific problem. We treat the CO in the same way as any other flood mitigation action for which a cost-benefit analysis would be undertaken in this catchment. Although the CO is still being implemented, the assumptions for the cost-benefit analysis are based on primary empirical evidence from a CO pilot that was undertaken by the WeSenseIt project in the town of Vicenza, Italy, described in more detail in section 2.1 and now extended to the wider catchment (sections 2.2 and 2.3). In section 3 we present the flood risk and cost benefit methodology followed by the results in section 4. Conclusions, limitations of the methodology and case-specific insights are provided in section 5.

2 The Development of a Citizen Observatory for Flood Risk Management

2.1 The WeSenseIt Project

Through the WeSenseIt research project (www.wesenseit.eu), funded under the 7th framework program (FP7-ENV-2012 n° 308429), a CO for flood risk management was developed with the Alto Adriatic Basin Authority in northern Italy. The objective of this CO was to collect citizen observations from the field, and to obtain a broader and more rapid picture of developments before and during a flood event. The CO involved many stakeholders concerned with the management and use of the water resources, and with water-related hazards in the Bacchiglione River basin. The main actors included the local municipalities, the regional and local civil protection agencies, environment agencies and the irrigation authorities. The Alto Adriatico Water Authority (AAWA) facilitated access to a highly trained group of citizen observers, namely civil protection volunteers, who undertook the observations (i.e., using staff gauges with a QR code to measure the water level and reporting water way obstructions – see **Figure 1**) as part of their volunteer activities. Additional volunteers were also recruited during the project from the Italian Red Cross, the National Alpine Trooper Association, the Italian Army Police and other civil protection groups, with more than 200 volunteers taking part in the CO pilot. Training courses for the volunteers were organized to disseminate and explain the use of a smartphone application and an e-collaboration platform, which were developed as part of the WeSenseIt project. In addition to the low cost sensing equipment, the CO also used data from physical sensors, which are operated by AAWA in collaboration with the Regional Department for Soil Protection, the Environmental Agency, and the Civil Protection Agency including: 3 sonar sensors (river water level), 4 weather stations (wind velocity and direction, precipitation, air temperature and humidity) and 5 soil moisture sensors. The combined visualization of the sensors (including existing sensors from the Venice Environment Agency) was available in the online e-collaboration platform. During the WeSenseIt project, research into the value of crowdsourced data for hydrological modelling was investigated (Mazzoleni et al., 2017, 2018) and found to complement traditional sensor networks.

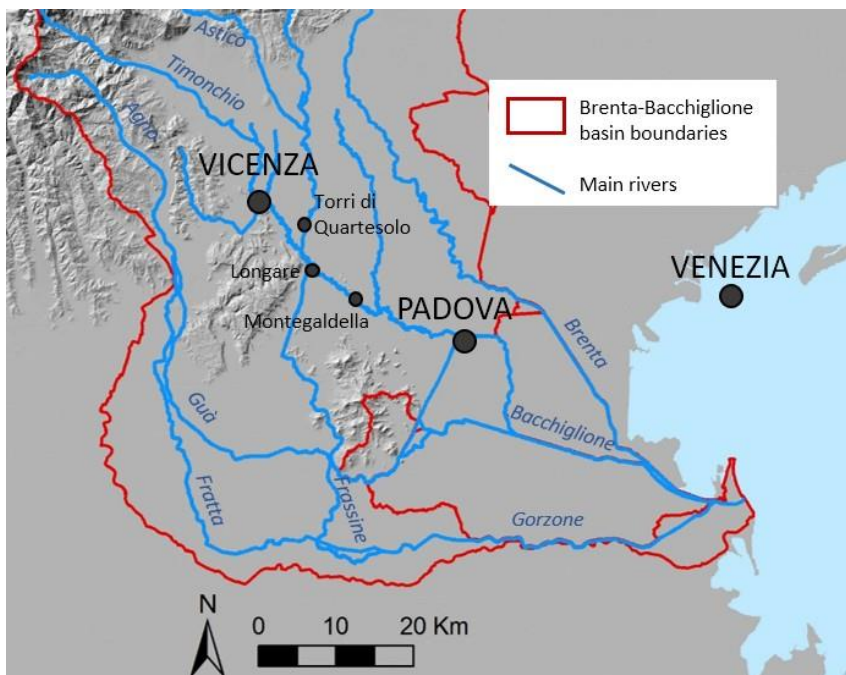


Figure 1: Photos showing staff gauges and QR codes used in the WeSenseIt project.

115 This pilot was later adopted by the European Community as a "good practice" example of the application of Directive 2007/60/EC. After the positive experience in WeSenseIt, funds were made available to develop a CO for flood risk management at the district scale, covering the larger Brenta-Bacchiglione catchment. At this stage, a cost-benefit analysis was undertaken, which is reported in this paper. The next section provides details of the Brenta-Bacchiglione catchment followed by ongoing developments in the CO for flood risk management.

120 2.2 The Brenta-Bacchiglione Catchment

The Brenta-Bacchiglione River catchment falls within the Trento-Alto-Adige and Veneto Regions in Northern Italy and includes the cities of Padua and Vicenza (**Figure 2**). The catchment is surrounded by the Beric hills in the south and the Prealpi in the northwest. In this mountainous area, rapid or flash floods occur regularly and are difficult to predict. Rapid floods generally affect the towns of Torri di Quartesolo, Longare and Montegaldella, although there is also widespread
125 flooding in the cities of Vicenza and Padua, which includes industrial areas and areas of cultural heritage. For example, in 2010, a major flood affected 130 communities and 20,000 individuals in the Veneto region. The city of Vicenza was one of the most affected municipalities, with 20% of the metropolitan area flooded.



130 **Figure 2: Location of the Brenta-Bacchiglione catchment and its urban communities.**

2.3 The Citizen Observatory for Flood Risk Management for the Brenta-Bacchiglione Catchment

The CO for flood risk management, which is currently being implemented, was included in the prevention measures of the Flood Risk Management Plan (PGRA) for the Brenta-Bacchiglione catchment. The purpose of the CO is to strengthen communication channels before and during flood events in accordance with the EU Flood Directive on Flood Risk Management, to increase the resilience of the local communities and to address residual risk. Building on the WeSenseIt experience, an IT platform to aid decision support during the emergency phases of a flood event is being implemented. This platform will integrate information from the hydrological model, which is equipped with a data assimilation module that integrates the crowdsourced data collected by citizens and trained experts with official sensor data. A mobile app for data collection based on the WeSenseIt project is under development. The platform and mobile technology will guarantee user traceability and facilitate two-way communication between the authorities, the citizens and the operators in the field, thereby significantly increasing the effectiveness of civil protection operations during all phases of an emergency. The fully operational CO will include 64 additional staff gauges equipped with a QR code (58 to measure water level and 6 for snow height), 12 sonar sensors and 8 weather stations.

To engage and maintain the involvement of “expert” CO participants (i.e., civil protection volunteers, technicians belonging to professional associations, members of environmental associations), a set of training courses will be run. The involvement of technicians (formalized in November 2018 through an agreement between the respective associations and AAWA) offers an important opportunity to use the specific knowledge and expertise of these technicians to better understand the dynamics of flood events and to acquire high quality data to feed the models and databases. When an extreme event (i.e., heavy rain) is forecast, AAWA will call upon any available technicians in providing data (with a reimbursement of 75 €/day (including insurance costs) and a minimum activity per day of 3 hours). There are currently 41 technicians involved in the CO, which includes civil/hydraulic/geotechnical engineers, agronomists and forestry graduates. Participants must attend two training sessions followed by a final examination. To give an example of the valuable information that the expert CO participants can provide, AAWA called upon technicians during two heavy rainfall events (November 2019; 5 days). These technicians collected relevant data on the status of the rivers including the vegetation, the water levels, and the status of bridges and levees, collecting 1660 images and completing 700 status reports.

To engage citizens, a different approach is being taken. Within the 120 municipalities currently in high flood risk zones, engagement of schools is currently ongoing, including the development of educational programs for teachers. The aim is to raise student awareness of existing flood risks in their own area, and to help students recognize the value of the CO (and the mobile technology) in protecting their families, e.g., using the app to send and share reports regarding the water level of a river at a section equipped with a hydrometric measuring rod and QR code, the level of the snowpack from a snow gauge equipped with a QR code, the presence of flooded areas including the water height, as well as simplified measurements of hydrological variables such as the amount of rain, weather conditions, etc. using photographs and other smart ways to identify the phenomenon. By providing important information about flooding, this will contribute to everyone's safety. In exchange, citizens can receive flood-related information (e.g., weather and river level forecasts, notifications from the authority concerning the declaration of a state of alert or its cessation, specific communications to citizens present in a specific area of interest/danger in a specific period of time, based on a geolocation function). This two-way communication can help to reduce flood risks. This component of the CO involves 348 primary schools and 340 middle and secondary schools. The three universities in the area will also be involved through conferences and webinars. Communication through the CO website, via social media campaigns, radio broadcasts and regional newspapers will be used to engage and maintain citizen involvement in the CO. This communication plan, which will continue over the next five years, has the ambitious goal of involving 75,000 people in the CO to download the app and contribute observations.

3 Methodology

The methodology consists of two steps: (i) mapping of the flood risk (section 3.1); and (ii) quantification of the flood damage costs (section 3.2), which consider the flood risk with and without the implementation of the CO on flood risk management.

3.1 Flood risk mapping

Figure 3 provides an overview of the flood risk methodology employed in the paper, which uses input data outlined in section 3.1.1. As mentioned in the introduction, risk is evaluated from three different components. The first is the flood hazard, which is calculated using a hydrological-hydraulic model to generate flood hazard maps and is described in section 3.1.2. The second is exposure, outlined in section 3.1.3, which is calculated for three macro-categories as set out in the EU 2007/60/CE Flood Directive (EU, 2007): the population affected (art.6-5.a); the types of economic activities affected (art.6-5.b); and the environmental and cultural-archaeological assets affected (art.6.5.c).

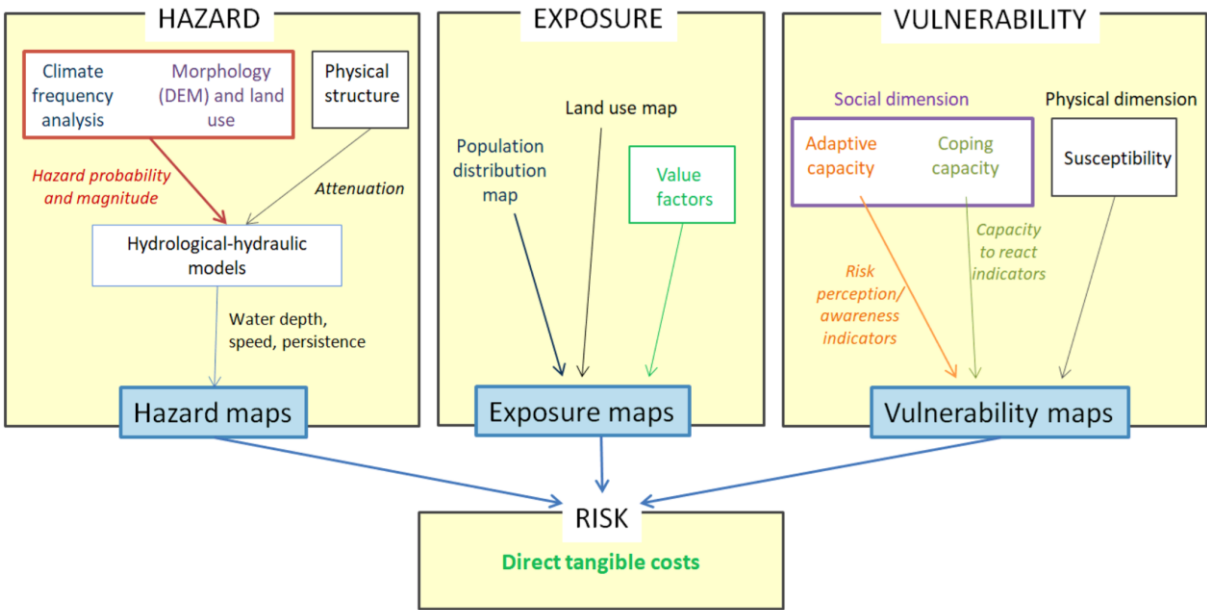


Figure 3: Flowchart outlining the determination of risk in a flood risk assessment context.

The final component is vulnerability, which has a physical and social dimension. Physical vulnerability is defined as the susceptibility of an exposed element such as people or buildings to flooding (Balbi et al., 2012) and is calculated using the same three macro-categories as that of exposure, i.e., the population affected, the economic activities affected, and the environmental and cultural-archaeological assets affected. Within the people affected category, we also consider social vulnerability. This refers to the perception or awareness that an adverse event may occur. Some studies have found that if citizens have directly experienced a flood, their perception of flood risk is higher (e.g., Thistlethwaite et al., 2018) although the factors that determine flood risk perception are varied. Moreover, the results from different studies can be ambiguous and/or contradictory (Lechowska, 2018). Social vulnerability can be divided into: (i) adaptive capacity, which is the capacity of an individual, community, society or organization to prepare for and respond to the consequences of a flood event (IPCC, 2012; Torresan et al., 2012); and (ii) coping capacity, which is the ability of an individual, community, society or organization to cope with adverse conditions resulting from a flood event using existing resources (IPCC, 2012; Torresan et al., 2012). The calculation of vulnerability is described in section 3.1.4. Risk is then calculated as the product of hazard, exposure and vulnerability as described in more detail in section 3.1.5, from which the direct tangible costs associated with

the flood risk can be calculated (outlined in section 3.2). The model assumptions and the sources of uncertainty are summarized in Table S1 in the Supplementary Material.

3.1.1 Input data

There are several data sets used as inputs to the assessment of flood risk as outlined in Table 1. For the evaluation of flood hazard, the water height, flow velocity and flooded areas are provided by AAWA using the methodology described in the Supplementary Materials. Several data sets are used to evaluate flood exposure and vulnerability, but a key data set is Corine Land Cover 2006 produced by the European Environment Agency (Steehans, 2008). Other data sets used to determine exposure include layers on population, infrastructure and buildings, areas of cultural heritage, protected areas and sources of pollution, where these data sets were obtained from different Italian ministries to complement the Corine Land Cover. Data from OpenStreetMap on infrastructure and buildings were also used.

Table 1: Input data used to calculate risk.

Component of risk	Data	Source
Flood Hazard (low, medium, high hazard scenarios)	Water height (m)	AAWA; see Supplementary Materials for model details
	Water velocity (m/s)	
	Flooded area (km ²)	
Flood Exposure	Population in residential areas	ISTAT, census data, 2001
	Infrastructure and buildings	Corine Land Cover 2006, OpenStreetMap
	Types of agriculture	Corine Land Cover 2006
	Natural and semi-natural systems	Corine Land Cover 2006
	Areas of cultural heritage	Corine Land Cover 2006, MiBACT-Italian Ministry for cultural heritage
	Protected areas	Corine Land Cover 2006, MATTM-Italian Ministry for Environment, Veneto Region
	Point and widespread sources of pollution (Directives 82/501/EC, 2008/1/EC)	ISTAT, https://prtr.eea.europa.eu
Flood Vulnerability (Susceptibility)	Vegetation cover	Corine Land Cover 2006
	Soil type	Corine Land Cover 2006
	Water height from simple gauges equipped with QR codes, which are read by technicians and citizens as well as photographs and other flood-relevant information collected via an app	Collected by AAWA

3.1.2 Flood Hazard Mapping

According to Article 6 of the 2007/60/CE Flood Directive (EU, 2007), when local authorities implement a Flood Risk Management Plan, three hazard scenarios must be considered:

1. A flood with a low probability, which is 300-year return period in the study area;
2. A flood with a medium probability, which is a 100-year return period in the study area; and
3. A flood with a high probability, which is a 30-year return period in the study area.

These have been calculated using a two-dimensional hydrological and hydraulic model to generate the water levels and the flow velocities at a spatial resolution of 10 m (Ferri et al., 2010). Details of the model can be found in the Supplementary Materials. The hazard associated with these scenarios was calculated in relative terms as a value between 0 and 1.

At present, the impact of the CO is not evaluated in the hazard component as the inputs from citizens are used in real-time rather than the baseline modelling that was done to establish the areas flooded, the height and the flow velocity under three different flood return periods. In the Brenta-Bacchiglione catchment, crowdsourced observations of water level are

assimilated into the hydrological model by means of rating curves assessed for the specific river location, and directly into the hydraulic model. In the past, Mazzoleni et al. (2017) assessed the improvement of the flood forecasting accuracy obtained by integrating physical and social sensors distributed within the Brenta-Bacchiglione basin, and Mazzoleni et al. (2018) demonstrated that the assimilation of crowdsourced observations located at upstream points of the Bacchiglione catchment ensure high model performance for high lead times, whereas observations at the outlet of the catchments provide good results for short lead times.

3.1.3 Flood Exposure Mapping

The 2006 Corine Land Cover map provides the underlying spatial information to calculate exposure; the land use classes used here are shown in Table S2 in the Supplementary Materials. As mentioned above, the first macro-category is the people affected by the flooding, or the exposure of the population (E_P), which is calculated as follows:

$$E_P = F_d * F_t \quad (2)$$

where F_d is a factor characterizing the density of the population in relation to the number of people present (Table 2), which uses gridded population from the census (Table 1), and F_t , which is the proportion of time spent in different locations (e.g., houses, schools, etc., using the land use classes listed in Table S2) over a 24 hour period (Provincia Autonoma di Trento, 2006). The four classes in Table 2 reflect a very slight decrease in exposure as population density decreases, and were defined by stakeholders in the AAWA based on guidance from ISPRA (2012). The relative values by land use class for E_P are provided in Table 3.

Table 2: A factor characterizing the density of people (F_d) in relation to the number of people present.

Number of people	F_d
1 – 50	0.90
51 – 100	0.95
101 – 500	0.98
> 500	1

The physical exposure or impact on economic activities (E_E), which is the second macro-category, is calculated from the restoration costs, and the costs resulting from losses in production and services. These various costs were obtained from the Provincia Autonoma di Trento (2006) and have been calculated for each of the land use classes in Table S2. Using these costs, the relative values of E_E were determined, which are listed in Table 3. Table S3 in the Supplementary Material provides a further explanation of the relation between the costs and how the relative values were derived. The final macro-category, i.e., the exposure of assets in the environmental and cultural heritage category (E_{ECH}), is calculated from estimates of potential damage caused by an adverse flood event. Similar to E_E , the costs were obtained from the Provincia Autonoma di Trento (2006) and calculated for each land use class in Table S2. The relative values of E_{ECH} were then determined (listed in Table 3), where the logic behind these values is provided in Table S4 in the Supplementary Material. Note that all the relative values in Table 3 have been derived by the Provincia Autonoma di Trento (2006) from decades of experience with understanding exposure related to flood risk. Moreover, they have been tested over time and shown to be valid within AAWA. When a range of values is listed in Table 3, this reflects different types within the same land use class. For example, the value for E_P ranges between 0.5-1 for industrial. This range reflects the distinction between a production cycle of 24 hours and greater, or one that is less than 24 hours. In another example, the values for E_E range between 0.3-1 for specialized agriculture to reflect the distinction between crops of very low value (e.g., maize) and others of high value (e.g., vineyards). Where it was not possible to disaggregate sub-types within a given land use class, the maximum value in the range was adopted as a cautious approach.

Table 3: The relative values of exposure for people, economic activities, and environmental/cultural assets by land use class.

ID	Description	E_P	E_E	E_{ECH}
1	Residential	1	1	1
2	Hospital facilities, health care, social assistance	1	1	1
3	Buildings for public services	1	1	1
4	Commercial and artisan	0.5 - 1	1	0.8
5	Industrial	0.5 - 1	1	0.3 - 1
6	Specialized agricultural	0.1 - 0.5	0.3 - 1	0.7
7	Woods, meadows, pastures, cemeteries, urban parks	0.1 - 0.5	0.3	0.7
8	Tourist recreation	0.4 - 0.5	0.5	0.1
9	Unproductive	0.1	0.1	0.3
10	Ski areas, Golf course, Horse riding	0.3 - 0.5	0.3 - 1	0.3
11	Campsites	1	0.5	0.1
12	Roads of primary importance	0.5	1	0.2
13	Roads of secondary importance	0.5	0.5 - 1	0.1
14	Railway area	0.7 - 1	1	0.7
15	Area for tourist facilities, Zone for collective equipment (supra-municipal, subsoil)	1	0.3	0.3
16	Technological and service networks	0.3 - 0.5	1	0.1
17	Facilities supporting communication and transportation networks (airports, ports, service areas, parking lots)	0.7 - 1	1	1
18	Area for energy production	0.4	1	1
19	Landfill, Waste treatment plants, Mining areas, Purifiers	0.3	0.5	1
20	Areas on which plants are installed as per Annex I of Legislative Decree 18 February 2005, n. 59	0.9	1	1
21	Areas of historical, cultural and archaeological importance	0.5 - 1	1	1
22	Environmental goods	0.5 - 1	1	1
23	Military zone	0.1 - 1	0.1 - 1	0.1 - 1

3.1.4 Flood Vulnerability Mapping

Vulnerability is also quantified for each of the three macro-categories (i.e., people, economic activities and environmental/cultural-archaeological assets affected) as outlined below but we additionally differentiate between physical and social vulnerability as described in Section 3.1.

(i) Physical vulnerability of people affected by flooding

The physical vulnerability associated with people considers the values of flow velocity (v) and water height (h) that produce “instability” with respect to remaining in an upright position. Many authors have dealt with the instability of people in flowing water (see e.g., Chanson and Brown, 2018), and critical values have been derived from the product of h and v . For example, Ramsbottom et al. (2004) and Penning-Rowsell et al. (2005) have proposed a semi-quantitative equation that links a flood hazard index, referred to as the Flood Hazard Rating (FHR), to h , v and a factor related to the amount of transported debris, i.e., the Debris Factor (DF), as follows:

$$FHR = h * (v + 0.5) + DF \quad (3)$$

275


The values of the DF related to different ranges of h , v and land use are reported in Table 4, which were taken from a study by the UK Department for Environment, Food and Rural Affairs (DEFRA) and the UK Environment Agency (2006) as reported in ISPRA (2012).

280

Table 4: The Debris Factor (DF) for different water heights (h), flow velocities (v) and land uses. Source: ISPRA (2012), with reference to DEFRA and UK Environment Agency (2006)

Values of h and v	Grazing/Agricultural land	Forest	Urban
$0 \text{ m} < h \leq 0.25 \text{ m}$	0	0	0
$0.25 \text{ m} < h \leq 0.75 \text{ m}$	0	0.5	1
$h > 0.75 \text{ OR } v > 2 \text{ m/s}$	0.5	1	1

Using the FHR, the physical vulnerability of the population can be calculated, which is summarized in Figure 4. These three values of V_p were proposed in the ISPRA (2012) guidelines.

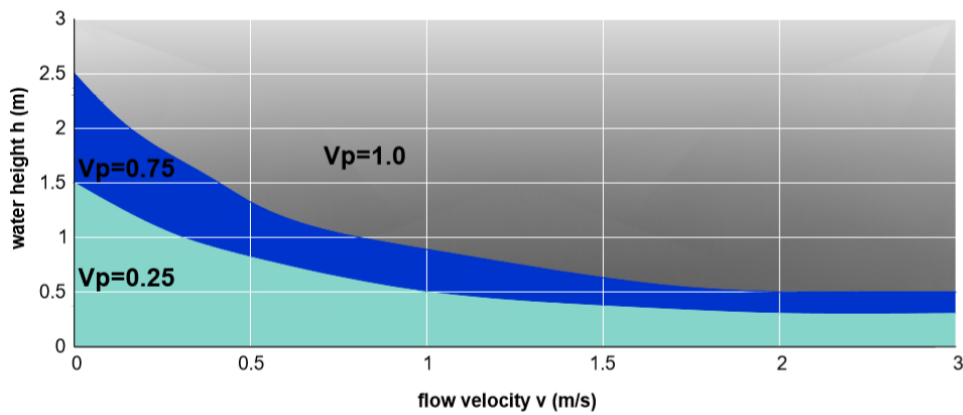

285

Figure 4: Physical vulnerability (V_p) values for the population as a function of water height (h) and flow velocity (v).

(ii) Social vulnerability of people affected by flooding

Figure 5 shows the components of social vulnerability, i.e., the adaptive and coping capacity and their respective indicators, along with the weights associated with each of them.

290

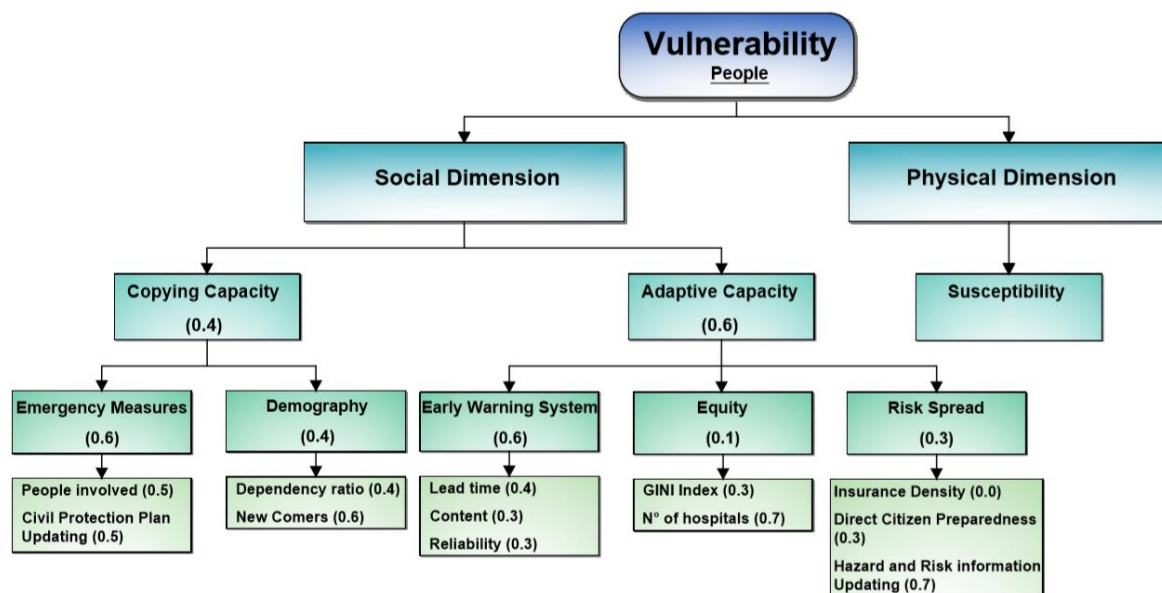


Figure 5: Hierarchical combination of indicators and relative weights (in brackets) to calculate the vulnerability of the population.

The weights and values assigned to each of these indicators have been determined through an expert consultation process carried out by AAWA. Because the different indicators have varying units of measurement, they were first normalized so that they could be combined. Several normalization techniques exist in the literature (Biausque, 2012) but the ‘value function’ was chosen because it represents a mathematical expression of a human judgement that can be compared in a systematic and explicit way (Beinat, 1997; Mojtahed, et al., 2013). The principal aim of this consultation process was to assign a value between 0 and 1 to people’s vulnerability, considering the relative weight of each indicator. The stakeholders engaged were the members of the Technical Committee of the water basin authority made up of technical representatives of the regional and provincial administrations belonging to the Eastern Alps District, as well as experts from the professional and academic sectors (i.e., around 20 people). The process to identify the weights started with several discussions, the results of which were interpreted and translated into values/weights by AAWA, who then re-proposed these values to the experts, obtaining their consensus. Similarly to what was done to identify the weights, AAWA formulated an internal study for the definition of the value functions for the different indicators, which were then proposed and discussed with the members of the Technical Committee, obtaining their consensus.

The coping capacity is comprised of the following demographic and emergency measure indicators, where the corresponding value functions are shown in Figure S1:

- Dependency ratio: the number of citizens aged under 14 and over 65 as a percentage of the total population. A high value of this index implies a reduced ability to adapt to hazardous events.
- Foreigners: the number of foreigners as a percentage of the total population. Due to language barriers and other cultural reasons, areas with a high number of immigrants may not cope as well after a flood event and during emergency situations.
- Number of people involved in emergency management: the number of operators who have been trained to manage an emergency in the region, expressed qualitatively as low, medium and high.
- How frequently civil protection plans are updated: Updating is measured in months to years and indicates how often new hydraulic, urban and technological information is incorporated into civil protection plans.

The adaptive capacity is comprised of three components: the early warning system, equity and risk spread. Early warning systems are evaluated according to three criteria, where the value functions are shown in Figure S2:

- Lead time (or warning time): the number of hours before an event occurs that was predicted by the early warning system.

- Content: the amount of information provided by the early warning system, such as the time and the peak of the flooding at several points across the catchment.
- Reliability: this is linked to the uncertainty of the results from the meteorological forecasts and the hydrological models (Schroter et al., 2008). False alarms can cause inconvenience to people, hinder economic activities, and people may be less likely to take warnings seriously in the future; therefore, they should be minimized.

Finally, equity and spread (shown in Figure S3) are characterized by:

- Gini Index: a measure of the inequality of income distribution within the population. A value of 0 means perfect equality while 1 is complete inequality.
- Number of hospital beds: this is calculated per 1000 people.
- Insurance density: this is the ratio of total insurance premiums (in €) to the total population (Lenzi and Millo, 2005). Values with higher insurance density lead to increased adaptive capacity. However, the insurance density is set to zero because insurance companies in this part of Italy do not currently offer premiums to protect goods against flood damage.
- The frequency at which information on hazard and risk are updated: this is measured in months to years and indicates the ability of institutions to communicate the conditions of danger and risk to the population.
- Involvement of citizens: This is based on the number of students, associations such as farmers and professionals, and citizens that can be reached across large areas through social networks (WP7 WSI Team, 2013) to disseminate information. Figure S3d shows the maximum achievable value in the different categories of citizen involvement.

The value for social vulnerability is the sum of the coping and adaptive capacities while the final value for the vulnerability of people is calculated by multiplying the physical and the social vulnerability together.

(iii) Physical vulnerability of economic activities affected by flooding

The vulnerability associated with economic activities considers buildings, network infrastructure and agricultural areas. For buildings, the effects from flooding include collapse due to water pressure and/or undermining of the foundations. Moreover, solid materials, such as debris and wood, can be carried by a flood and can cause additional damage to structures. A damage function for brick and masonry buildings has been formulated by Clausen and Clark (1990). Laboratory results have shown that at a water height of 0.5m, the loss to indoor goods is around 50%, which is based on an evaluation made by Risk Frontiers, an independent research center sponsored by the insurance industry. The structural vulnerability of buildings and losses of associated indoor goods is shown in Figure S4 as a function of the height of the water and flow velocity, which are applied to land use types containing buildings (Table S2). For the camping land use type 11 (Table S2), the values have been modified based on results from Majala (2001).

Vulnerability of the road network is evaluated for land use types 12 and 13 in Table S2, which occurs when it is not possible to use the road due to flooding. This is based on an estimation of the water height and the critical velocity at which vehicles become unstable during a flood, which are derived from direct observation in laboratory experiments and from a report on the literature in this area (Reiter, 2000; Shand et al., 2011); the vulnerability function for the road network is presented in Figure S5. Regarding technological and service networks (land use type 16, Table S2), we assume a vulnerability value equal to 1 if the water height and flow velocity are greater than 2 m and 2 m/s, respectively, otherwise 0.

To assess the vulnerability in agricultural areas (land use types 6 and 7 in Table S2), we assume that the damage is related to harvest loss, and when considering higher flow velocities and water heights, to agricultural buildings and internal goods. Citeau (2003) provides relationships that take water height and flow velocity into account, e.g., the maximum height is 1 m for orchards and 0.5 m for vineyards, and the maximum velocity varies from 0.25 m/s for vegetables and 0.5 m/s for orchards. Concerning cultivation in greenhouses, the maximum damage occurs at a height of 1 m. Finally, high velocities can cause direct damage to cultivated areas but can also lead to soil degradation due to erosion. The vulnerability values for

four different types of land as a function of water height and flow velocity are shown in Figure S6. In the case of
 365 unproductive land (land use type 9 in Table 1), the vulnerability is assumed to be 0.25, regardless of the h and v values.

(iv) Physical vulnerability of environmental and cultural heritage assets affected by flooding

Environmental flood susceptibility is described using contamination/pollution and erosion as indicators. Contamination is
 caused by industry, animal/human waste and stagnant flooded waters. Erosion can produce disturbance to the land surface
 and to vegetation but can also damage infrastructure. The approach taken here was to identify protected areas that could
 370 potentially be damaged by a flood. For areas susceptible to nutrients, including those identified as vulnerable in Directive
 91/676/CEE (Nitrate), and for those defined as susceptible in Directive 91/271/CEE (Urban Waste), we assume a value of 1
 for vulnerability (land use type 20 in Table S2). Similarly, in areas identified for habitat and species protection, i.e., sites
 belonging to the Natura 2000 network established in accordance with the Habitat Directive 92/43/CEE and Birds Directive
 79/409/CEE (land use types 8 and 22 in Table S2), the presence of relevant pollution sources was identified (Tables 1 and
 375 S1) and assigned a vulnerability of 1. In the absence of pollution sources, the vulnerability was calculated as 0.25 if the flood
 velocity was less than or equal to 0.5 m/s and the water height was less than or equal to 1 m; otherwise it was 0.5. Regarding
 cultural heritage (land use type 21 in Table S2), we assigned a vulnerability of 1 to these areas.

3.1.5 Mapping flood risk before and after implementation of a CO on flood risk management

Once the hazard, exposure and vulnerability are mapped, the flood risk, R , for the three flood hazard scenarios, i , can be
 380 mapped as follows:

$$R = \sum_{i=1}^3 R_i = \frac{w_P (H_i \cdot E_P \cdot V_P) + w_E (H_i \cdot E_E \cdot V_E) + w_{ECH} (H_i \cdot E_{ECH} \cdot V_{ECH})}{w_P + w_E + w_{ECH}} \quad (4)$$

where H , E and V are the hazard, exposure and vulnerability associated with the three macro-categories P , E and ECH are
 the people, economic activities and environmental/cultural-archaeological assets affected, and w_P , w_E and w_{ECH} are weights
 applied to each macro-category, with values of 10, 1 and 1, respectively, which were defined based on stakeholder
 385 interviews undertaken by AAWA. To establish the level of risk, four risk classes were defined (Table 5).

Table 5: Definition of risk classes.

Range of R	Description	Risk Category
$0.1 < R \leq 0.2$	Low risk where social, economic and environmental damage are negligible or zero	R1
$0.2 < R \leq 0.5$	Medium risk for which minor damage to buildings, infrastructure and environmental/cultural heritage is possible, which does not affect the safety of people, the usability of buildings or economic activities	R2
$0.5 < R \leq 0.9$	High risk in terms of safety of people, damage to buildings and infrastructure (and/or unavailability of infrastructure), interruption of socio-economic activities and damage related to environmental/cultural heritage	R3
$0.9 < R \leq 1$	Very high risk including loss of human life and serious injuries to people, serious damage to buildings, infrastructure and environmental/cultural heritage, and total disruption of socio-economic activities	R4

These risk classes were then mapped with and without the implementation of the CO for flood risk management. The main
 390 change in the calculation of risk is in the social dimension of vulnerability. Before the CO was implemented, this component
 had a value of 0.9. Based on the experience gained in the WeSenseIt project and the goals of the CO, the changes in social
 vulnerability with the implementation of the CO are shown in Table 6, which decreases the social vulnerability to a value of
 0.63. For example, in the coping capacity, the number of people employed in emergency management does not change but as

a result of the CO, they will work in a much more efficient manner due to the technology that allows for better emergency management. In terms of content of the Early Warning System, with the CO, very detailed information will be obtained, further enriched by citizen reports (including reports from waterways that were not previously equipped with measuring instruments) and by a monitoring network that will be equipped with a further eight thermo-pluviometric stations, 12 hydrometric stations (equipped with a double transmission system), and 58 hydrometric and six snow measuring rods. The forecasted water level is available at every section of the Brenta-Bacchiglione River system. Hence, the content will be enhanced through the implementation of the CO. The reliability of the Early Warning System increases to very high due to the involvement of trained citizens who provide information and sensor readings that are used to validate and feed the hydrological/hydraulic model (i.e., the data assimilation module). The assumption was made based on the results obtained in Mazzoleni et al. (2017, 2018) and by considering a hypothetical situation in which a widely distributed crowdsourcing data acquisition process is in place due to the expected high level of citizen engagement. These tools will also lead to more frequent updating of civil protection plans as well as hazard and risk information updates. In addition, the early warning system will improve in terms of lead time, content and reliability through the greater involvement of trained volunteers and citizens.

Table 6: Changes in the indicators of social vulnerability with and without implementation of the CO on flood risk management.

Social vulnerability	Indicator	Value without CO	Value with CO
Adaptive capacity	Number of people involved in emergency management	Medium	High
	Frequency of civil protection plan updating	> 5 years	> 2 years
Coping capacity	Lead time of Early Warning System	< 6 hours	24-72 hours
	Content of Early Warning System	Little information	Very detailed information
	Reliability of Early Warning System	None	High
	Citizen involvement	None	Citizens of large area
	Hazard and risk information updating	> 5 years	1-2 years

3.2 Financial quantification of the direct damage due to flooding with and without implementation of a flood risk management CO

To estimate the direct tangible costs due to damage resulting from a flood event, we use the maximum damage functions related to the 44 land use classes in the Corine Land Cover developed by Huizinga (2007) for the 27 EU member states, which are based on replacement and productivity costs and their gross national products. The replacement costs for damage to buildings, soil and infrastructure assume complete rebuilding or restoration. Productivity costs are calculated based on the costs associated with an interruption in production activities inside the flooded area. The maximum flood damage values for the EU-27 and various EU countries are provided in Table S5. The direct economic impact of the flood is calculated by multiplying the maximum damage values per square meter (in each land use category) by the corresponding areas affected by the floods, i.e., the flood hazard (Section 3.1.2), weighted by the vulnerability value associated with each grid cell. Since the land use map used in this study does not distinguish between industrial and commercial areas, the average of the respective costs per square meter (475.5 €/m²) has been applied. Moreover, in discontinuous urban areas, 50% of the value of the damage related to continuous urban areas (i.e., 309 €/m²) was applied, due to the lower density of buildings in these areas.

The average annual expected damage (*EAD*) can be calculated as follows, where *D* is the damage as a function of the probability of exceeding *P* for a return time *i* (Meyer et al., 2007):

$$EAD = \sum_{i=1}^k \frac{D(P_{i-1}) + D(P_i)}{2} \cdot |P_i - P_{i-1}| \quad (5)$$

$$D(P_i) = \sum_j \frac{\sum_j A_{Dj}^i \cdot w_{Dj}}{\sum_j w_{Dj}} \cdot D^i \quad (6)$$

where w_{Dj} is the weight of the damage class, j is the damage category and D is the damage value shown in Table S5. The EAD is calculated before and after implementing the CO for flood risk management. The monetary benefits are the "avoided" damage costs (to people, buildings, economic activities, protected areas, etc.) if the CO for flood risk management is implemented.

4 Results

4.1 Hazard and flood risk estimates before and after implementation of a flood risk management CO

The results of the numerical simulations from the hydraulic model, which were carried out based on the methodology described in the Supplementary Materials, have shown that in some sections of the Bacchiglione River, the flow capacity will exceed that of the river channel. This will result in flooding, which will affect the towns of Torri di Quartesolo, Longare and Montegaldella. There will also be widespread flooding in the cities of Vicenza and Padua, including some industrial areas and others rich in cultural heritage. For a 30-year flood event, the potential flooding could extend to around 40,000 ha, where 25% of the area contains important urban areas with significant architectural assets. In the case of a 100-year flood event, the areas affected by the flood waters increase further, with more than 50,000 ha flooded, additionally affecting agricultural areas. The results of the simulations are summarized in Tables 7 and 8 in terms of the areas affected in the catchment for different degrees of hazard and risk for 30-, 100- and 300-year flood events.

Table 7: The hazard classes for each return period in terms of area flooded.

Hazard class	30 year return period	100 year return period	300 year return period
	Area (km ²)		
Low	185.12	294.77	370.07
Medium	118.87	161.82	225.67
High	54.18	74.55	104.61
Total	358.17	531.14	700.35

Table 8: The risk classes for each return period in terms of area flooded (km²) before and after implementation of the CO.

Risk Class	Before implementation of the CO			After implementation of the CO		
	30 year return period	100 year return period	300 year return period	30 year return period	100 year return period	300 year return period
Low (R1)	160.29	254.29	318.80	170.96	268.68	337.78
Medium (R2)	137.26	191.89	262.03	168.99	235.18	322.41
High (R3)	56.70	79.23	110.29	18.19	27.19	40.04
Very High (R4)	3.92	5.73	9.23	0.03	0.09	0.12
Total	358.17	531.14	700.35	358.17	531.14	700.35

Figure 6 shows the areas at risk in the territory of Padua for a 100-year flood event before implementation of a CO on flood risk management. Risk classes R1 (low risk) and R2 (medium risk) have the highest areas for all flood event frequencies. Although areas in R3 (high risk) and R4 (very high risk) may comprise a relatively smaller area when compared to the total area at risk, these also coincide with areas of high concentrations of inhabitants in Vicenza and Padua.


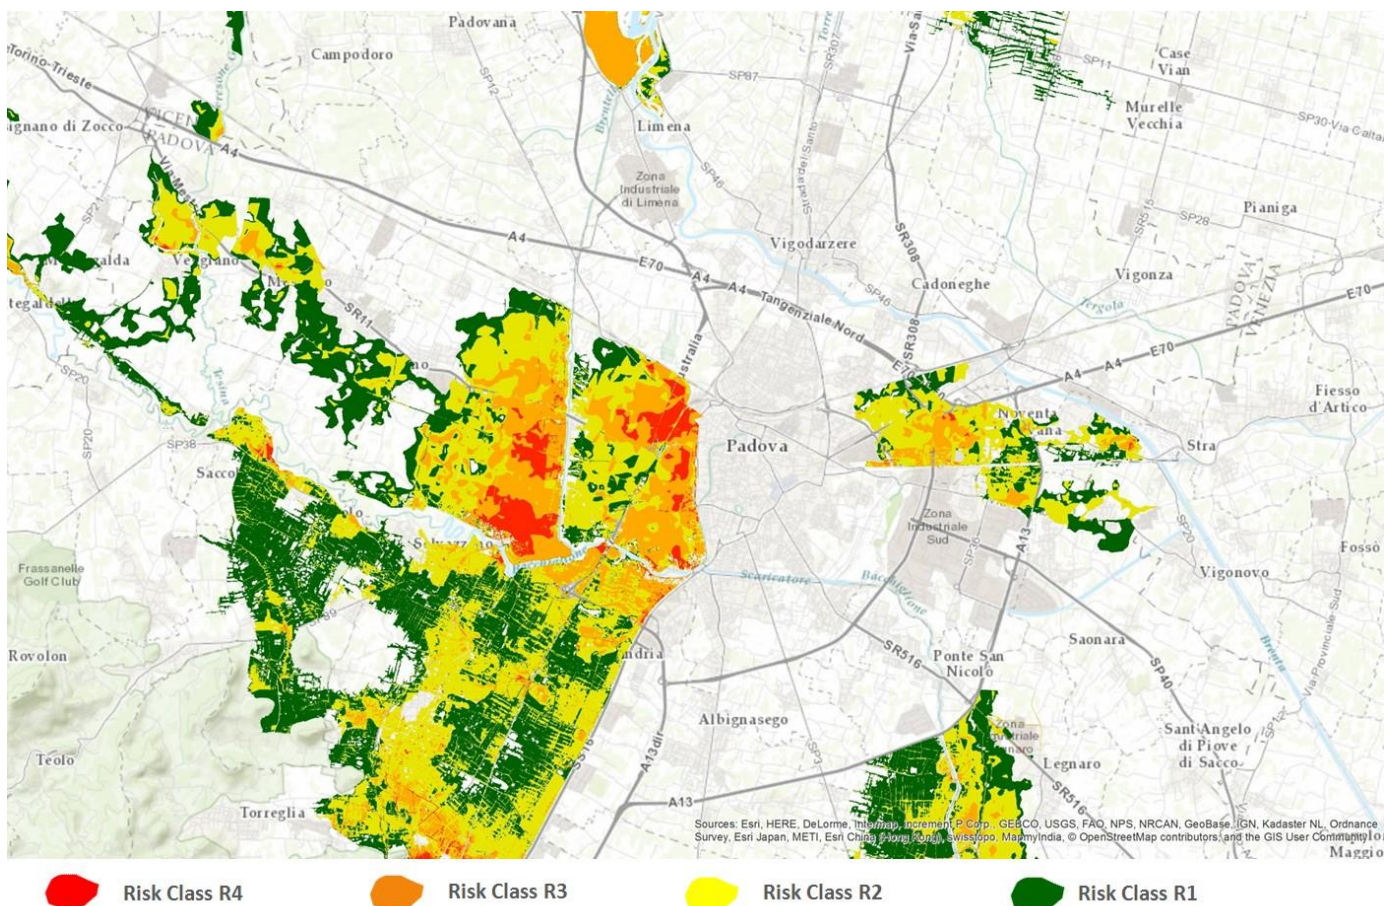


Figure 6: Risk map for the metropolitan area of Padua for a 100-year flood event before implementation of a CO on flood risk management. Sources: Esri, HERE, DeLorme, Intermap, Increment P. Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China HongKong, swisstopo, MapmyIndia, © OpenStreetMap contributors 2020. Distributed under a Creative Commons BY-SA License, and the GIS User Community

After implementation of a CO for flood risk management, the flood risk is reduced (Table 8) due to the reductions in vulnerability outlined in section 3.1.5. The areas affected in the high (R3) and very high classes (R4) are significantly reduced (R4 to almost zero) but the areas in the lower risk classes increase. This occurs because the total area affected by the flood hazard is the same before and after implementation of a CO. What changes is the distribution between risk classes, i.e., R3 and R4 are reduced, which means that the areas at risk in classes R1 and R2 will increase. The risk map for a 100-year flood event for the territory of Padua is shown in Figure 7, where the reduction in areas at high and very high risk are clearly visible compared to the situation before implementation of the CO (Figure 6).

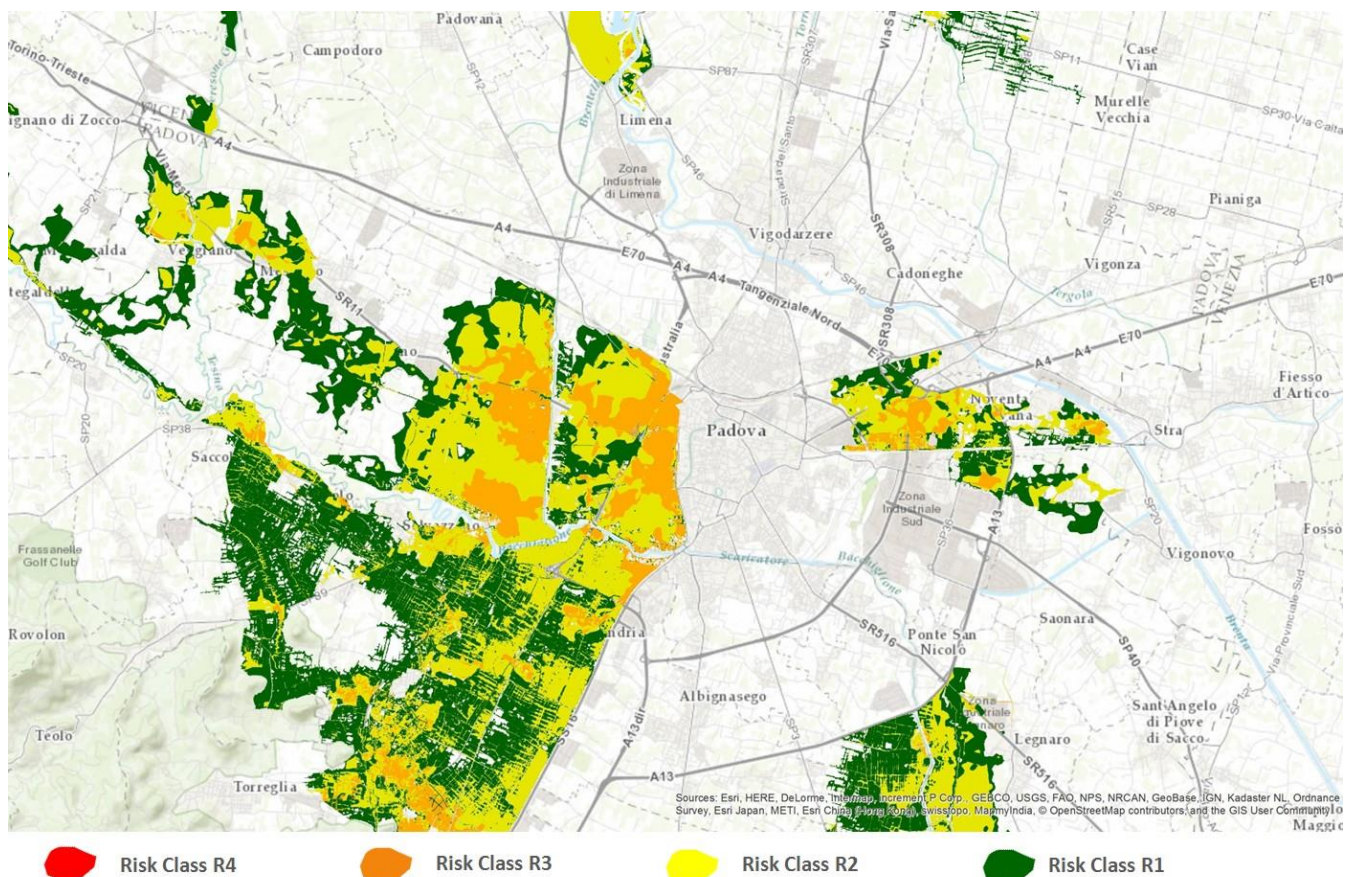

470 **Figure 7: Risk map for the metropolitan area of Padua for a 100-year flood event after implementation of a CO on flood risk management. Sources: Esri, HERE, DeLorme, Intermap, Increment P. Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China HongKong, swisstopo, MapmyIndia, © OpenStreetMap contributors 2020. Distributed under a Creative Commons BY-SA License, and the GIS User Community**

4.2 Expected damage with and without implementation of a flood risk management CO

475 The direct damage was calculated for the three flood scenarios: high chance of occurrence (every 30 years), medium (every 100 years) or low (every 300 years), which is summarized in Table 9. In the event of very frequent flood events, urban areas will be damaged. Furthermore, moving from an event with a high probability of occurrence to one with a medium probability results in a significant increase in the area flooded (i.e., a 48% increase as shown in Table 8) but with a smaller increase in damage (i.e., around 20%). This is explained by the fact that the flooded areas in a 100-year flood event (but not present in a 30-year flood event) are under agricultural use. Similar patterns can be observed when comparing floods with a low and high probability of occurrence. Substituting the values in Table 9 into equation (5), we obtain an expected average annual damage (EAD) of 248.5 million Euros. The residual damage was then calculated for the three flood scenarios after implementation of the CO on flood risk reduction, which is shown in Table 9. Substituting these residual damage values into equation (5), we obtain an EAD of 111.3 million Euros, which is a 45% reduction in the damage compared to results without implementation of the CO.

485 The CO for flood risk management has an estimated cost of around 5 million Euros (as detailed in Table S6 in the Supplementary Materials), after which it will be evaluated and further funding sought. Taking the EAD with and without implementation of the CO, the annual benefit in terms of avoided damage is approximately 137.2 million Euros. Hence the benefits considerably outweigh the costs. The same methodology was applied to the construction of a retention basin in the municipalities of Sandrigo and Breganze (in an independent exercise) to improve the hydraulic safety of the Bacchiglione River. Against an expected cost of 70.7 million Euros, which is much higher than the estimated cost for implementing the CO, a significant reduction in flooded areas would be obtained although high risk would still be evident in the city of Padua.

In terms of damage reduction with the construction of the retention basin, we would obtain an EAD of 140.7 million Euros so the cost to benefit ratio would be much lower.

495

Table 9: Comparison of the direct (without CO) and residual damage (with CO) for three flood scenarios and the cost difference.

Scenarios (chance of flood occurrence)	Return period	Direct damage (million €)	Residual damage (million €)	Difference in costs (million €)
High	30 years	7,053	1,573	-5,480
Medium	100 years	8,670	5,440	-3,230
Low	300 years	10,853	3,420	-7,433

5 Discussion and Conclusions

There is currently a lack of available, appropriate and peer-reviewed evaluation methods and evidence on the added value of citizen observatories, which is required before they will be more widely adopted by policy makers and practitioners. This paper has aimed to fill this gap by demonstrating how a traditional cost-benefit analysis can be used to capture the value of a CO for flood risk management. Although the CO is still being implemented, the proposed methodology was applied using primary empirical evidence from a CO pilot that was undertaken by the WeSenseIt project in the smaller Bacchiglione catchment to guide changes in the values associated with social vulnerability once the CO is implemented. This allowed the risk and flood damages to be calculated with and without implementation of the CO, which showed that implementation of a CO in the Brenta-Bacchiglione catchment is able to reduce the damage, and consequently the risk, for the inhabited areas from an expected average annual damage (EAD) of €248.5 to €111.3 million euros, i.e., a reduction of 45%. Hence, the implementation of the CO could significantly reduce the damage and consequently the risk for the inhabited areas of Vicenza, Padua, Torri di Quartesolo, Longare and Montegaldella. The nature of the methodology also means that it can be applied to other catchments in any part of Italy or other parts of the world that are considering the implementation of a CO for flood risk management purposes.

The main impact of the CO on flood risk management has been to lower the social vulnerability of risk, both in terms of adaptive as well as coping capacity. This finding is consistent with other studies of citizen science that aim to capture the impacts on social vulnerability. Bremer et al. (2019) in their case study in Bangladesh found that citizen science has had a high impact on adaptive capacity in terms of individual awareness and understanding of local rainfall, learning that they applied in adaptive practices at work and at home, as well as local leadership. Improvements in social capital (trust, sharing experience and formal/informal interactions) were also measurable. This provides support for the argument that CO impacts, especially capacity-related ones, do not necessarily (have to) materialise (only) via formal policy mechanisms. Both coping and adaptive capacity have individual, community as well as policy dimensions, not all of which are impacted in parallel nor to the same degree; moreover, adaptive capacities are context specific.

Regarding the impact on estimating other flood risk drivers, at present, the impact of citizens is not evaluated in the hazard component as the inputs from citizens would be used in real-time rather than the baseline modelling that was done to establish the areas flooded, the height and the flow velocity under three different flood return periods. Instead, the contribution of citizens is incorporated into the Early Warning System component of social vulnerability through improvements in the reliability, lead time and information content of the system (Figure S2 in the Supplementary Information) as well as components of Adaptive Capacity (Hazard and risk information updating and Citizen involvement - Figure S3 in the Supplementary Information). Similarly, there is currently no impact of citizens/experts on exposure or physical vulnerability as this analysis is based on land use categories rather than individual buildings, where in the latter it might be possible to capture small changes done at the household, building or feature level. However, this is not part of the current methodology. A second aspect is increased awareness/participation in combination with data provisioning, i.e., the app provides information about flood risk to citizens while at the same time asking for inputs/participation that can be used

to feed the model and/or, in real-time, to provide information to help emergency response. The concept of a CO is built on the idea of two-way communication between the citizens/experts and the local authorities.

We do acknowledge that this methodology is built on many assumptions, i.e., the numerous coefficients, value functions and weights used to estimate the exposure and vulnerability. We have summarized these assumptions in Table S1 of the Supplementary Material. Many of these values have been derived through expert consultation and experience, and they have been validated internally within AAWA or by other Italian agencies. Value functions, in particular, are a way of capturing human judgement in way that can be quantified in situations of high uncertainty. We would argue that the expert consultations have not been undertaken lightly and have often resulted in conservative estimates in the values. We have tried to reflect this in Table S1. Other values have been derived from the literature, all of which will have some uncertainties associated with their derivation. The primary objective of the paper was never to do a fully-fledged uncertainty analysis but to present a methodology that could be shared with experts, and local and national authorities, to evaluate the potential of a CO solution in monetary terms with regards to reducing the vulnerability of flood risk. The weights adopted and the assumptions made, which depend on the policies and the local context of the study area, do not affect the value of the method presented, which can be applied to other river basins with the adoption of different weights. That said, this cost-benefit analysis is hypothetical because the CO for flood risk management is still being implemented. Hence the real benefits will only be realized once the CO is fully operational. Our goal will then be to verify the assumptions and the empirical weight factors adopted, via a more detailed quantitative analysis.

Another limitation of the analysis presented here is that we did not consider indirect costs, such as those incurred after the event takes place, or in places other than those where the flooding occurred (Merz et al., 2010). In accordance with other authors (e.g., van der Veen et al., 2003), all expenses related to disaster response (e.g., costs for sandbagging, evacuation) are classified as indirect damage. However, the presence of the CO in this catchment does reduce the costs related to emergency services, securing infrastructure, sandbagging and evacuation, all of which can be substantial during a flood event. Although the people involved in the emergency services are the same, they are employed in a much more efficient way as a result of the technology developed with the CO, which allows for better management of the teams responding to the event and the efficient assignment of tasks based on an operator's location. Therefore, an analysis that takes indirect costs into account could help to further convince policy makers of the feasibility of a CO solution. Similarly, intangible costs were not considered, i.e., the values lost due to an adverse natural event where monetary valuation is difficult because the impacts do not have a corresponding market value (e.g., health effects). Furthermore, the vulnerability assessment of economic activities considers only water depth and flow velocity but not additional factors such as the dynamics of contamination propagation in surface waters during the flood or the duration of the flood event, all of which could be taken into account in estimating the structural damage and monetary losses in the residential, commercial and agricultural sectors.

Despite these various limitations, this analysis has highlighted the feasibility of a non-structural flood mitigation choice such as a CO for flood risk management compared to the implementation of much more expensive structural measures (e.g., retention areas) in terms of the construction costs and the cost of maintenance over time. The evidence on the costs and benefits of COs for flood risk management generated by this case study can provide insights that policy makers, authorities and emergency managers can use to make informed choices about the adoption of COs for improving their respective flood risk management practices. In Italy, in general, citizen participation in flood risk management has been relatively limited. By involving citizens in a two-way communication with local authorities through a CO, flood forecasting models can be improved, increased awareness of flood hazard and flood preparedness can be achieved, and community resilience to flood risk can be bolstered. The previous strategy in the Brenta-Bacchiglione catchment has focused on structural flood mitigation measures, dealing with emergencies and optimizing resources for rapid response. The inclusion of a CO on flood risk management has been a true innovation in the flood risk management strategies of this region, which can also be transferred to other catchments. There are plans to extend the CO to other basins in the Eastern Alps, which are similar in size and

hydrological characteristics. These are complex hydrographic basins with very variable regimes, from rapid
575 response/torrential rainfall events of the alpine territories to the alluvial plain, which is composed of mountain and lowland
river networks, artificial networks of reclamation and natural and/or artificial reservoirs. In general, this methodology can be
applied to catchments larger than 100 km² where model forecasts would be most useful.

Future research will focus on validating the results once the CO is operational as well as application of the methodology
in other catchments and to other fields of disaster management beyond floods. Such applications will serve to generate a
580 broader evidence base for using these types of cost-benefit methodologies to justify the implementation of COs.

Acknowledgements

This research was supported by the EU's FP7 WeSenseIt project (No. 308429) and received funding from the EU's 2020
research and innovation programme under the WeObserve (No. 776740) and LandSense (No. 689812) projects.

References

- 585 Assumpção, T. H., Popescu, I., Jonoski, A. and Solomatine, D. P.: Citizen observations contributing to flood modelling:
Opportunities and challenges, *Hydrology and Earth System Sciences*, 22(2), 1473–1489, doi:10.5194/hess-22-1473-
2018, 2018.
- Balbi, S., Giupponi, C., Gain, A., Mojtahed, V., Gallina, V., Torresan, S. and Marcomini, A.: The KULTURisk Framework
(KR-FWK): A conceptual framework for comprehensive assessment of risk prevention measures. Deliverable 1.6.
590 KULTURisk Project 265280., 2012.
- Beinat, E.: *Value Functions for Environmental Management*., Kluwer Academic Publishers, The Netherlands., 1997.
- Biausque, V.: *The Value of Statistical Life: A Meta-Analysis*. ENV/EPOC/WPNEP(2010)9/FINAL. Working Party on
National Environmental Policies. OECD, Paris., 2012.
- Blaney, R. J. P., Philippe, A. C. V., Pocock, M. J. O. and Jones, G. D.: *Citizen Science and Environmental Monitoring*:
595 *Towards a Methodology for Evaluating Opportunities, Costs and Benefits*. UK Environmental Observation
Framework. Available at: <http://www.ukeof.org.uk/resources/citizen-science-resources/Costbenefitcitizenscience.pdf>,
2016.
- Bremer, S., Haque, M. M., Aziz, S. B. and Kvamme, S.: 'My new routine': Assessing the impact of citizen science on
climate adaptation in Bangladesh, *Environmental Science & Policy*, 94, 245–257, doi:10.1016/j.envsci.2018.12.029,
600 2019.
- Chanson, H. and Brown, R.: Stability of individuals during urban inundations: What should we learn from field
observations?, *Geosciences*, 8(9), 341, doi:10.3390/geosciences8090341, 2018.
- Citeau, J.-M.: *A New Control Concept in the Oise Catchment Area. Definition and Assessment of Flood Compatible
Agricultural Activities*, FIG working week, Paris, France., 2003.
- 605 Clausen, L. and Clark, P. B.: The development of criteria for predicting dambreak flood damages using modelling of
historical dam failures, in *Proceedings of the International Conference on River Flood Hydraulics*. 17-20 September
1990., edited by W. R. White, pp. 369–380, John Wiley & Sons Ltd. and Hydraulics Research Limited., 1990.
- CRED: *Natural Disasters 2018*. Available at: <https://reliefweb.int/report/world/natural-disasters-2018>, 2019.
- 610 Davids, J. C., Devkota, N., Pandey, A., Prajapati, R., Ertis, B. A., Rutten, M. M., Lyon, S. W., Bogaard, T. A. and van de
Giesen, N.: Soda Bottle Science—Citizen Science Monsoon Precipitation Monitoring in Nepal, *Front. Earth Sci.*, 7, 46,
doi:10.3389/feart.2019.00046, 2019.
- DEFRA and UK Environment Agency: *Flood and Coastal Defence R&D Program: Flood Risk to People, Phase 2*,
FD2321/TR2 Guidance Document., 2006.

- EU: Directive 2007/60/EC of the European Parliament and of the Council of 23 October 2007 on the assessment and management of flood risks. Available at: <https://eur-lex.europa.eu/legal-content/EN/TXT/?uri=CELEX:32007L0060>, 2007.
- Ferri, M., Norbiato, D., Monego, M., Galli, A., Gualdi, S., Bucchignani, E. and Baruffi, F.: Impact of climate change on hydrological regimes and water resources in TRUST (Life+ 2007) project, in Proceedings of Hydropredict 2010, Prague, Czech Republic., 2010.
- Goldstein, E. A., Lawton, C., Sheehy, E. and Butler, F.: Locating species range frontiers: a cost and efficiency comparison of citizen science and hair-tube survey methods for use in tracking an invasive squirrel, *Wildl. Res.*, 41(1), 64, doi:10.1071/WR13197, 2014.
- Hadj-Hammou, J., Loisele, S., Ophof, D. and Thornhill, I.: Getting the full picture: Assessing the complementarity of citizen science and agency monitoring data, edited by J.-F. Humbert, *PLoS ONE*, 12(12), e0188507, doi:10.1371/journal.pone.0188507, 2017.
- Howe, J.: The rise of crowdsourcing, *Wired Magazine*, 14(6), 1–4, 2006.
- Hsu, W.-K., Huang, P.-C., Chang, C.-C., Chen, C.-W., Hung, D.-M. and Chiang, W.-L.: An integrated flood risk assessment model for property insurance industry in Taiwan, *Nat Hazards*, 58(3), 1295–1309, doi:10.1007/s11069-011-9732-9, 2011.
- Huizinga, H. J.: Flood damage functions for EU member states. Technical Report, HKV Consultants. Implemented in the framework of the contract #382441-F1SC awarded by the European Commission - Joint Research Centre, 2007.
- IPCC: Managing the Risks of Extreme Events and Disasters to Advance Climate Change Adaptation. Field, C.B., V. Barros, T.F. Stocker, D. Qin, D.J. Dokken, K.L. Ebi, M.D. Mastrandrea, K.J. Mach, G.-K. Plattner, S.K. Allen, M. Tignor, and P.M. Midgley (eds.), Cambridge University Press, Cambridge, UK., 2012.
- ISPRA: Proposta metodologica per l'aggiornamento delle mappe di pericolosità e di rischio. Attuazione della Direttiva 2007/60/CE/ relative alla valutazione e alla gestione dei rischi da alluvioni (Decreto Legislativo n.49/2010). Istituto Superiore per la Protezione e la Ricerca Ambientale (ISPRA), Roma., 2012.
- Lanfranchi, V., Wrigley, S., Ireson, N., Ciravegna, F. and Wehn, U.: Citizens' observatories for situation awareness in flooding., in Proceedings of the 11th International ISCRAM Conference (Information Systems for Crisis and Response Management), 18–21 May 2014. University Park, Pennsylvania, USA, edited by S. R. Hiltz, M. S. Pfaff, L. Plotnick, and P. C. Shih, pp. 145–154., 2014.
- Lechowska, E.: What determines flood risk perception? A review of factors of flood risk perception and relations between its basic elements, *Nat Hazards*, 94(3), 1341–1366, doi:10.1007/s11069-018-3480-z, 2018.
- Lenzi, A. and Millo, G.: Regional Heterogeneity and Spatial Spillovers in the Italian Insurance Market. WP1/05. Assicurazioni Generali, Trieste, Italy, 2005.
- Levy, J. K. and Hall, J.: Advances in flood risk management under uncertainty, *Stoch Environ Res Ris Assess*, 19(6), 375–377, doi:10.1007/s00477-005-0005-6, 2005.
- Liu, H.-Y., Kobernus, M., Broday, D. and Bartonova, A.: A conceptual approach to a citizens' observatory – supporting community-based environmental governance, *Environmental Health*, 13(1), doi:10.1186/1476-069X-13-107, 2014.
- Maijala, T.: Rescdam: Development of rescue actions based on dam-break flood analysis. Final Report, Grant agreement no. Subv 99/52623 Community Action Programme in the field of civil protection, Helsinki: Finnish Environment Institute., 2001.
- Mazumdar, S., Lanfranchi, V., Ireson, N., Wrigley, S., Bagnasco, C., Wehn, U., McDonagh, R., Ferri, M., McCarthy, S., Huwald, H. and Ciravegna, F.: Citizens observatories for effective Earth observations: the WeSenseIt approach, *Environmental Scientist*, 25(2), 56–61, 2016.

- Mazzoleni, M., Verlaan, M., Alfonso, L., Monego, M., Norbiato, D., Ferri, M. and Solomatine, D. P.: Can assimilation of crowdsourced data in hydrological modelling improve flood prediction?, *Hydrol. Earth Syst. Sci.*, 21(2), 839–861, doi:10.5194/hess-21-839-2017, 2017.
- 660 Mazzoleni, M., Cortes Arevalo, V. J., Wehn, U., Alfonso, L., Norbiato, D., Monego, M., Ferri, M. and Solomatine, D. P.: Exploring the influence of citizen involvement on the assimilation of crowdsourced observations: a modelling study based on the 2013 flood event in the Bacchiglione catchment (Italy), *Hydrol. Earth Syst. Sci.*, 22(1), 391–416, doi:10.5194/hess-22-391-2018, 2018.
- Merz, B., Hall, J., Disse, M. and Schumann, A.: Fluvial flood risk management in a changing world, *Natural Hazards and Earth System Science*, 10(3), 509–527, doi:10.5194/nhess-10-509-2010, 2010.
- 665 Meyer, V., Haase, D. and Scheuer, S.: GIS-based multicriteria analysis as decision support in flood risk management, UFZ Discussion Paper, No. 6/2007, Helmholtz-Zentrum für Umweltforschung (UFZ), Leipzig. Available at: <https://www.econstor.eu/bitstream/10419/45237/1/548359628.pdf>, 2007.
- Mojtahed, V., Giupponi, C., Biscaro, C., Gain, A. K. and Balbi, S.: Integrated Assessment of natural Hazards and Climate Change Adaptation: The SERRA Methodology. Università Cà Foscari di Venice, Dept of Economics Research Paper Series No. 07/WP/2013, 2013.
- 670 Müller, U.: Implementation of the flood risk management directive in selected European countries, *Int J Disaster Risk Sci*, 4(3), 115–125, doi:10.1007/s13753-013-0013-y, 2013.
- National Research Council: Tying Flood Insurance to Flood Risk for Low-Lying Structures in the Floodplain, National Academies Press, Washington, D.C., 2015.
- 675 Njue, N., Stenfort Kroese, J., Gräf, J., Jacobs, S. R., Weeser, B., Breuer, L. and Rufino, M. C.: Citizen science in hydrological monitoring and ecosystem services management: State of the art and future prospects, *Science of The Total Environment*, 693, 133531, doi:10.1016/j.scitotenv.2019.07.337, 2019.
- Penning-Rowsell, E., Floyd, P., Ramsbottom, D. and Surendran, S.: Estimating Injury and Loss of Life in Floods: A Deterministic Framework, *Natural Hazards*, 36(1–2), 43–64, doi:10.1007/s11069-004-4538-7, 2005.
- 680 Provincia Autonoma di Trento: Piano Generale di Utilizzazione delle Acque Pubbliche, Parte IV, DPR 15/02/2006., 2006.
- Ramsbottom, D. S., Wade, S., Bain, V., Hassan, M., Penning-Rowsell, E., Wilson, T., Fernandez, A., House, M. and Floyd, P.: R&D Outputs: Flood Risks to People. Phase 2. FD2321 /IR2. Department for the Environment, Food and Rural Affairs/Environment Agency, London, United Kingdom., 2004.
- Reiter, P.: International methods of Risk Analysis, Damage evaluation and social impact studies concerning Dam-Break accidents. EU-Project RESCDAM. Helsinki PR Water Consulting., 2000.
- 685 Schiermeier, Q.: Increased flood risk linked to global warming, *Nature*, 470(7334), 316–316, doi:10.1038/470316a, 2011.
- Schroter, K., Velasco, C., Nachtnebel, H. P., Kahl, B., Beyene, M., Rubin, C. and Gocht, M.: Effectiveness and Efficiency of Early Warning System for flash floods, CRUE Research Report No1-5, 2008.
- Shand, T. D., Cox, R. J., Blacka, M. J. and Smith, G. P.: Australian Rainfall and Runoff Project 10: Appropriate Safety Criteria for Vehicles – Literature Review. Commonwealth of Australia (Geoscience Australia)., Stage 2 Report., 2011.
- 690 Sheldon, D. and Ashcroft, R.: Citizen Science – where has it come from?, *Environmental Scientist*, 25(3), 4–11, 2016.
- Shirk, J. L., Ballard, H. L., Wilderman, C. C., Phillips, T., Wiggins, A., Jordan, R., McCallie, E., Minarchek, M., Lewenstein, B. V., Krasny, M. E. and Bonney, R.: Public participation in scientific research: A framework for deliberate design, *Ecology and Society*, 17(2), 29, doi:10.5751/ES-04705-170229, 2012.
- 695 Smith, P. J., Brown, S. and Dugar, S.: Community-based early warning systems for flood risk mitigation in Nepal, *Nat. Hazards Earth Syst. Sci.*, 17(3), 423–437, doi:10.5194/nhess-17-423-2017, 2017.
- Stee mans, C.: Coordination of Information on the Environment (CORINE), in *Encyclopedia of Geographic Information Science*, edited by K. Kemp, pp. 49–50, Sage Publications Inc., Thousand Oaks, CA., 2008.

Tanoue, M., Hirabayashi, Y. and Ikeuchi, H.: Global-scale river flood vulnerability in the last 50 years, *Sci Rep*, 6(1), 36021, doi:10.1038/srep36021, 2016.

Thistlethwaite, J., Henstra, D., Brown, C. and Scott, D.: How Flood Experience and Risk Perception Influences Protective Actions and Behaviours among Canadian Homeowners, *Environmental Management*, 61(2), 197–208, doi:10.1007/s00267-017-0969-2, 2018.

Thornhill, I., Loiselle, S., Lind, K. and Ophof, D.: The Citizen Science Opportunity for Researchers and Agencies, *BioScience*, 66(9), 720–721, doi:10.1093/biosci/biw089, 2016.

Torresan, S., Gallina, V., Critto, A., Zabeo, A., Semenzin, E. and Marcomini, A.: D.1.7. Part A. Development of a risk assessment methodology to estimate risk levels, KULTURisk Project 265280., 2012.

van der Veen, A., Steenge, A. E., Bockarjova, M. and Logtmeijer, C.: Structural economic effects of large scale inundation: A simulation of the Krimpen dike breakage, in *The Role of Flood Impact Assessment in Flood Defence Policies*, edited by A. Vrouwenvelder, pp. 1–50, Delft Cluster, TUD, Delft, The Netherlands., 2003.

Wehn, U. and Evers, J.: The social innovation potential of ICT-enabled citizen observatories to increase eParticipation in local flood risk management, *Technology in Society*, 42, 187–198, doi:10.1016/j.techsoc.2015.05.002, 2015.

Wehn, U., McCarthy, S., Lanfranchi, V. and Tapsell, S. M.: Citizen observatories as facilitators of change in water governance? Experiences from three European cases., *Environmental Engineering and Management Journal*, 14(9), 2073–2086, 2015.

Wehn, U., Gharesifard, M., Anema, K., Alfonso, L. and Mazzoleni, M.: Initial validation and socio-economic impacts report, Ground Truth 2.0 project deliverable D1.11. Delft, the Netherlands, September 2019, 2019.

Wehn, U., Gharesifard, M. and Bilbao, A.: Report on IA methods adapted to CS. MICS project deliverable D2.2. Delft, the Netherlands, 2020a.

Wehn, U., Pfeiffer, E., Gharesifard, M., Alfonso, L. and Anema, K.: Updated validation and socio-economic impacts report. Ground Truth 2.0 project deliverable D1.12. Delft, the Netherlands, February 2020, 2020b.

Werner, M., Reggiani, P., Roo, A. D., Bates, P. and Sprokkereef, E.: Flood Forecasting and Warning at the River Basin and at the European Scale, *Natural Hazards*, 36(1–2), 25–42, doi:10.1007/s11069-004-4537-8, 2005.

WP7 WSI Team: Case studies methodology and Design. Deliverable 7.10. WeSenseit Project FP7/2007-2013-308429, 2013.

Supplementary Material: The Value of Citizen Science for Flood Risk Reduction: Cost-benefit Analysis of a Citizen Observatory in the Brenta-Bacchiglione Catchment

Michele Ferri¹, Uta Wehn², Linda See³, Martina Monego¹ and Steffen Fritz³

¹Alto-Adriatico Water Authority/Autorità di bacino distrettuale delle Alpi orientali (AAWA), Cannaregio 4314, 30121 Venice, Italy

²IHE Delft Institute for Water Education, Westvest 7, 2611 AX Delft, The Netherlands

³International Institute for Applied Systems Analysis (IIASA), Schlossplatz 1, 2361 Laxenburg, Austria

Correspondence to: Michele Ferri (michele.ferri@distrettoalpiorientali.it)

Hydrological and Hydraulic Modelling

The flood forecasting system developed for the Brenta-Bacchiglione River basin ingests meteorological forecasts and couples this with a hydrological-hydraulic model to predict flood events (i.e., water levels in the river, depth of flooding in flooded areas). The hydrological model can run in a continuous mode, fed by meteorological data based on different weather forecasting models (i.e., COSMO, ECMWF, MOLOCH, HIRLAM) or using real-time data. It is also coupled with a snow melt module (UEB - Utah Energy Balance Model (Tarboton and Luce, 1996)) and a data assimilation module to assimilate measured data, including observations sent by the citizen observers (i.e., water levels of the river) (Mazzoleni et al., 2017, 2018).

The hydraulic model uses the HEC-RAS software (a numerical model developed by the US Army Corps of Engineers Hydrologic Engineering Center) and can perform one and two-dimensional hydraulic calculations for a full network of natural and constructed channels. The hydrological model provides the initial boundary conditions to the hydraulic model. The hydraulic model uses geometry acquired from LIDAR data.

The outputs of the model consist of a time series of water levels evaluated at all river cross-sections across all river branches. For each of these river cross-sections, a set of three thresholds has been defined by the Civil Protection authorities. The third threshold refers to the situation when the river will overtop the bank and thus lead to flooding. The system has been used to run rainfall-runoff and hydrodynamic simulations and to provide short-term predictions (2-3 days in advance) to the authorities.

The hydrological model used in this study is part of the early warning system implemented and used by Alto-Adriatico Water Authority (AAWA). A description of the model is provided here but the reader is referred to Ferri et al. (2012) and Mazzoleni et al. (2017) for more detailed descriptions. The hydrological response of the catchment is estimated using a hydrological model that contains routines for runoff generation and a routing procedure. The processes related to runoff generation (i.e., surface, sub-surface, and deep flow) are modelled mathematically by applying the water balance to a control volume representative of the active soil at the sub-catchment scale. The water content, S , in the soil is updated at each calculation step, dt , using the following balance equation:

$$S(t+dt) = S(t) + P(t) - R(t) - R_{sub}(t) - L(t) - E_T(t) \quad (1)$$

where P and E_T are the components of precipitation and evapotranspiration, respectively, while R , R_{sub} , and L are the surface runoff, subsurface runoff, and deep percolation model states, respectively. The surface runoff, R , is based on specifying the critical threshold beyond which the mechanism of Dunnian flow (i.e., the saturation excess mechanism) prevails:

$$R(t) = \begin{cases} C \left(\frac{S(t)}{S_{max}} \right) P(t) \Rightarrow P(t) \leq f = \frac{S_{max}(S_{max} - S(t))}{(S_{max} - CS(t))} \\ P(t) - (S_{max} - S(t)) \Rightarrow P(t) > f \end{cases} \quad (2)$$

where C is a coefficient of soil saturation obtained by calibration, and S_{max} is the content of water at saturation point, which depends on the nature and use of the soil.

The subsurface flow is considered proportional to the difference between the water content, S , at time, t , and that at soil capacity, S_c :

$$R_{sub}(t) = c(S(t) - S_c) \quad (3)$$

while the estimated deep flow is evaluated according to the expression proposed by Laio et al. (2001):

$$L(t) = \frac{K_s}{e^{\beta\left(1-\frac{S_c}{S_{\max}}\right)} - 1} \left(e^{\beta\left(\frac{S(t)-S_c}{S_{\max}}\right)} - 1 \right) \quad (4)$$

where K_s is the hydraulic conductivity of the soil in saturated conditions and the dimensionless exponent is characteristic of the size and distribution of the pores in the soil. The evapotranspiration is assumed to be a function of the water content in the soil and potential evapotranspiration, calculated using the formulation of Hargreaves and Samani (1982).

Knowing the values of R , R_{sub} , and L , it is possible to model the surface, Q_{sur} , sub-surface, Q_{sub} , and deep flow, Q_g , routed contributions based on the conceptual framework of the linear reservoir at the closing section of a single sub-catchment. In the case of Q_{sur} , the value of the parameter k , which is a function of the residence time on the catchment slope, is estimated by relating the velocity to the average slope length. However, one of the challenges is to properly estimate the velocity, which should be calculated for each flood event (Rinaldo and Rodríguez-Iturbe, 1996). This velocity is a function of the effective rainfall intensity and the event duration (Rodríguez-Iturbe et al., 1982). In each sub-catchment, the runoff propagation is carried out based on the geomorphological theory of hydrologic response. The overall catchment travel time distributions are considered as nested convolutions of statistically independent travel time distributions along sequentially connected, objectively identified, smaller sub-catchments. Regarding Q_{sub} and Q_g , the value of k was calibrated, comparing the observed and simulated streamflow at Vicenza. Calibration of the hydrological model parameters was performed by AAWA, and is described in Ferri et al. (2012), which uses the time series of precipitation from 2000 to 2010 to minimize the root mean square error between observed and simulated values of water levels at the ARPAV (Veneto Region Environmental Protection Agency) gauged stations located along the river network (i.e., Bolzano Vicentino, Longare, Lugo di Vicenza, Montegalda, Ponte Marchese, S. Agostino and Vicenza).

Based on requirements in Article 6 of the 2007/60/CE Flood Directive (EU, 2007), the hydrological and hydraulic models described above were used to run three hazard scenarios as part of the Flood Risk Management Plan of the Eastern Alps Hydrographic District:

1. A flood with a low probability, which is 300-year return period in this area;
2. A flood with a medium probability, which is a 100-year return period in this area; and
3. A flood with a high probability, which is a 30-year return period in this area.

As a compromise between computational burden and result validity, the following modeling hypotheses were assumed for evaluating the hydrographs of the three return periods:

1. The return period refers to the rainfall volume at a certain time step. This simplification was applied to avoid having to consider the cumulative probability of multiple variables, such as temperature, snow water equivalent, soil moisture conditions and status of the levees during the weather event;
2. The hydrological model did not run in continuous mode but on an event basis;
3. Snow accumulation/melting and evapotranspiration processes were not simulated;
4. The initial conditions of the variables, which affected the estimation of effective rainfall, were determined by calibration, considering the heaviest rainfall event ever recorded in the catchment under investigation as the reference scenario. This approach allows for the potential underestimation due to the simplifications assumed in point 3 to be taken into account.

To estimate the Intensity-Duration-Frequency (IDF) curves associated with different return periods, a Gumbel distribution was applied to the rain gauge data covering a sufficiently long time period (i.e., at least 20 years) to guarantee the statistical significance of the outputs. The hyetograph shapes were determined by considering the trends of past extreme weather events that occurred in the territory. They were generated by assuming the following shapes: uniform; monotone increasing; triangular isosceles; and double peak; and were the result of a random binomial multiplicative process (Gupta and Waymire, 1993). Based on the results of simulations with different flood events, the reference hydrograph for an assigned return time was chosen based on maximum values at the peak while maintaining an adequate volume.

Table S1: Model assumptions and sources of uncertainties

Component		Assumptions/Sources of uncertainty	Source of data or assumptions	Explanations and implications												
Flood hazard	Area and depth flooded, flow velocity	<p>The model is applied to all areas that could be affected by river flooding and/or a failure of the levees during a flooding event of a certain probability. Concerning the possible failure of the levees, water infiltration (i.e., siphoning) is not considered; a failure was simulated in the situation where the difference between the water level in the river and the embankment level was less than 20 cm (as a precaution in relation to the unknown geotechnical characteristics and the possible uncertainty related to the elevation profile).</p> <p>The values h of the maximum water depth and v of the maximum flow velocity that occur during an overflow event are well-known at each point; the hazard is correlated to the intensity of the phenomenon, which is a function of the depth and velocity. For the risk assessment, hazard is represented in relative terms in the interval between 0 and 1 so three classes are defined (the function described below is generally formulated by taking the safety of people, as a vulnerable element, into account): Low Hazard (H_l), medium Hazard (H_m), and high Hazard (H_h).</p> <table><tr><th>Description</th><th>Hazard classes</th><th>Hazard values</th></tr><tr><td>Flooded areas with low water depth: $h \leq 1$ m if $v \leq 0.5$ m/s $h v \leq 0.5$ m²/s if $v > 0.5$ m/s</td><td>H_l</td><td>0.4</td></tr><tr><td>Flooded areas with significant water depth and/or relevant flow velocity: $1 < h \leq 2$ m if $v \leq 0.5$ m/s $0.5 < h v \leq 1$ m²/s if $v > 0.5$ m/s</td><td>H_m</td><td>0.8</td></tr><tr><td>Flooded areas with deep water and/or high flow velocity: $h > 2$ m if $v \leq 0.5$ m/s $h v > 1$ m²/s if $v > 0.5$ m/s</td><td>H_h</td><td>1.0</td></tr></table>	Description	Hazard classes	Hazard values	Flooded areas with low water depth: $h \leq 1$ m if $v \leq 0.5$ m/s $h v \leq 0.5$ m ² /s if $v > 0.5$ m/s	H_l	0.4	Flooded areas with significant water depth and/or relevant flow velocity: $1 < h \leq 2$ m if $v \leq 0.5$ m/s $0.5 < h v \leq 1$ m ² /s if $v > 0.5$ m/s	H_m	0.8	Flooded areas with deep water and/or high flow velocity: $h > 2$ m if $v \leq 0.5$ m/s $h v > 1$ m ² /s if $v > 0.5$ m/s	H_h	1.0	<p>Hydrological-hydraulic modelling (HEC-RAS)</p> <p>Hazard classes are defined on the basis of a strictly qualitative evaluation, from an assessment made by the Provincia Autonoma di Trento (2006)</p>	<p>The levee breakpoints were identified by the hydraulic model based on the reference hydrograph (for the 3 different return times) and assessed, taking the height of the levees as well as the possible presence of banks or floodplains into account. The number of levee failure scenarios that were simulated along a critical section was based on the length of the river section and on historical evidence. The purpose of the investigation was not so much to analyze levee breaches from a geotechnical point of view, but to determine the effects in terms of the "propensity to flood" the area. In the situation of overlapping breaches, the maximum values for the variables h and v were assumed.</p> <p>Hazard values do not change with the implementation of the citizen observatory and hence remain constant in the analysis.</p>
Description	Hazard classes	Hazard values														
Flooded areas with low water depth: $h \leq 1$ m if $v \leq 0.5$ m/s $h v \leq 0.5$ m ² /s if $v > 0.5$ m/s	H_l	0.4														
Flooded areas with significant water depth and/or relevant flow velocity: $1 < h \leq 2$ m if $v \leq 0.5$ m/s $0.5 < h v \leq 1$ m ² /s if $v > 0.5$ m/s	H_m	0.8														
Flooded areas with deep water and/or high flow velocity: $h > 2$ m if $v \leq 0.5$ m/s $h v > 1$ m ² /s if $v > 0.5$ m/s	H_h	1.0														

Component		Assumptions/Sources of uncertainty	Source of data or assumptions	Explanations and implications
Flood exposure	People affected	Relative values of exposure range from 0.9 to 1, increasing as the population density increases	ISPRA (2012)	Rather than assuming exposure is 1 if any people are present, this assumption decreases the exposure as the population density decreases, thereby decreasing the overall risk. Moreover, these exposure values do not change with the implementation of a citizen observatory and hence remain constant in the analysis.
	Economic activities affected	Relative values of exposure by land use type were based on restoration costs resulting from losses in production and services	Costs provided by the Provincia Autonoma di Trento (2006) and values derived through expert consultation	These relative values are based on decades of experience with understanding exposure related to flood risk and hence are conservative estimates. These exposure values remain constant in the analysis.
	Environmental and cultural assets affected	Relative values of exposure by land use type were based on restoration costs resulting from potential damage		
Flood vulnerability	People affected – physical vulnerability	Relative vulnerability is based on instability of people in flowing water, derived from a flood hazard rating and debris factor from laboratory experiments.	DEFRA and UK Environment Agency (2006) ISPRA (2012)	Relative vulnerability is generally low (0.25) except under conditions when the combination of water height and flow velocity are appreciable. These values remain constant in the analysis.
	People affected – social vulnerability	The carrying capacity (weighted 0.4) and the adaptive capacity (weighted 0.6) are comprised of 10 individual weighted components. These components are expressed by value functions.	Value functions, values and weights derived through expert consultation	Values are conservative estimates based on expert consultation and local context. They will affect the final result, but they can only be validated/modified once the citizen observatory becomes operational.
	Economic activities affected	Functions for relative vulnerability of buildings, roads, vineyards, orchards and olive trees, vegetables, natural and semi-natural environments were derived based on laboratory experiments.	Clausen and Clark (1990) Lab experiments by Risk Frontiers Citeau (2003)	Relative vulnerability is generally low (0.25) except under conditions when the combination of water height and flow velocity are appreciable except for agricultural areas where relative vulnerability starts at the higher level of 0.5. These values remain constant in the analysis.
	Environmental and cultural assets affected	Vulnerability is 1 if protected areas are susceptible to nitrate pollution (land use 20) or there is presence of a pollution source (land use type 8 and 22). When no pollution source present, vulnerability is 0.25 if the flow velocity is ≤ 0.5 m/s and water height is \leq to 1 m; otherwise 0.5.	AAWA with expert consultation	In the absence of specific studies, it was assumed that the indirect environmental vulnerability, i.e. that resulting from the consequent loss of functionality due to flooding, is equal to 0.25. Hence, relative vulnerability is generally low (0.25) except under conditions when the combination of water height and flow velocity are appreciable. It affects only a few land-use types, and these values remain constant in the analysis.
		Vulnerability is 1 if an area contains assets related to cultural heritage (land use 21).	ISPRA (2012)	It affects only land use type 21 and remains constant in the analysis.
Risk		The macro-category ‘people affected’ is weighted 10 times greater than the other two (i.e., economic activities affected and environment and cultural assets affected).	Stakeholder interviews undertaken by AAWA	This weighting reflects the importance of the safety of people in the risk calculation.

Component	Assumptions/Sources of uncertainty	Source of data or assumptions	Explanations and implications
Costs of flood damage	Damage estimates by damage category were estimated for each country in the EU including Italy (Table S3).	Huizinga (2007)	These figures come from a study by Huizinga (2007) from the Joint Research Center (JRC) in Italy. In 2017, Huizinga et al. (2017) published a report on global flood depth damage functions, comparing the results in 2017 with those in 2007. The overall patterns matched the 2017 values but showed overestimates in Europe, which were corrected by assuming a 40% inalterable portion for European buildings. The numbers then matched well. Hence some uncertainty analysis has been performed by the original authors of the figures. We would also assume they are conservative, having been published in 2007.

Table S2: The land use classes used in the calculations of flood exposure and vulnerability

ID	Description
1	Residential
2	Hospital facilities, health care, social assistance
3	Buildings for public services
4	Commercial and artisan
5	Industrial
6	Specialized agricultural
7	Woods, meadows, pastures, cemeteries, urban parks, hobby agriculture
8	Tourist-Recreation
9	Unproductive
10	Ski areas, Golf course, Horse riding
11	Campsites
12	Communication and transportation networks: roads of primary importance
13	Communication and transportation networks: roads of secondary importance
14	Railway area
15	Area for tourist facilities, Zone for collective equipment (supra-municipal, subsoil)
16	Technological and service networks
17	Facilities supporting communication/transportation networks (airports, ports, service areas, parking lots)
18	Area for energy production
19	Landfills, Waste treatment plants, Mining areas, Purifiers
20	Areas on which plants are installed as per Annex I of Legislative Decree 18 February 2005, n. 59
21	Areas of historical, cultural and archaeological importance; cultural heritage
22	Environmental goods
23	Military zone

Table S3: The logic used to assign relative values to the categories of E_E

Category	E_E	Description
Residential	1	The costs of restoring the buildings, those of the assets kept in them, and those relating to the accommodation of people during the restoration period are high.
Industrial	1	The costs of restoring buildings, those of the equipment present, and those of non-production during the period of inactivity are high.
Specialized agricultural	0.3 - 1	Average costs for the restoration of crops and the average costs for the lack of harvest. Not being able to differentiate between different types of crops, it was still necessary to differentiate between crops of very low value (e.g., corn: the harvest has a very low value and recovery times are short) and others of high value (e.g., vineyards: the harvest can be very valuable and recovery times can be very long).
Woods, meadows, pastures, cemeteries, urban parks	0.3	Low restoration costs and low costs related to the lack of timber production
Unproductive	0.1	Very low economic value
Ski areas	0.3	The costs of restoring the infrastructure and those related to the failure to use the service during the restoration period are low
Roads of primary importance	1	The costs of restoring the infrastructure and costs related to the failure to use the service during the restoration period are high
Landfill, Waste treatment plants, Mining areas, Purifiers	0.5	Average costs for the restoration of the various types of works and low costs regarding failure to carry out the service (e.g., in the event of a disaster, the wastewater ends up in the river and the waste is disposed of elsewhere)
Areas of historical, cultural and archaeological importance	1	High costs associated with the restoration of buildings

Table S4: The logic used to assign relative values to the categories of *E_{ECH}*

Category	<i>E_{ECH}</i>	Description
Residential	1	High historical, cultural and environmental value
Industrial	0.3 - 1	Medium-high environmental value since the presence of industry is negative for the environment and therefore its disappearance would improve the environmental quality, but its damage could be negative as it could generate pollution.
Specialized agricultural	0.7	Medium environmental and cultural value
Woods, meadows, pastures, cemeteries, urban parks	0.7	Medium environmental and cultural value
Unproductive	0.3	If the unproductive land is affected by a hydrogeological event, the quality of the environment does not change as the environment is not substantially changed
Ski areas	0.3	Medium environmental value since the presence of the ski area is, in itself, negative for the environment and therefore its disappearance would improve the environmental quality, but it is instead positive from a recreational point of view
Roads of primary importance	0.2	The presence of primary roads is in itself very negative from a landscape point of view and therefore its disappearance would improve the environmental quality
Landfill, Waste treatment plants, Mining areas, Purifiers	1	High environmental value due to the pollution that would be generated in the event of service interruption and therefore a serious deterioration in environmental quality
Areas on which plants are installed as per Annex I of Legislative Decree 18 February 2005, n. 59	1	High environmental value since the damage could be negative as it could generate pollution
Areas of historical, cultural and archaeological importance	1	High historical, cultural and environmental value
Environmental goods	1	High historical, cultural and environmental value

Table S5: Maximum flood damage values (€ / m²) per damage category (Huizinga, 2007)

Region/country	Residential building	Commerce	Industry	Road	Agriculture
EU27	575	476	409	18	0.59
Italy	618	511	440	20	0.63
Luxembourg	1443	1195	1028	46	1.28
Germany	666	551	474	21	0.68
Netherlands	747	619	532	24	0.77
France	646	535	460	21	0.66
Bulgaria	191	158	136	6	0.20

The Citizen Observatory (CO) for Flood Risk Management has an estimated cost of around 5 million Euros for a five-year period. After the five years, the CO will be evaluated, and further funding will be sought for the maintenance of the environmental monitoring network and IT platform and for the continuation of education and training campaigns. Table S6 provides a breakdown of these costs.

Table S6: The costs of the components of the Citizen Observatory (CO) for Flood Risk Management

Component of the CO	Cost (€)
Purchase and installation of sensors for environmental monitoring (including 5-year maintenance)	1 000 000
Implementation of a forecasting system coupled with a data assimilation module (including 5-year maintenance, hardware, software licences)	750 000
Implementation of a decision support IT platform for sensor data storage, alarm setting, communication services (including 5-year maintenance)	600 000
Implementation of information and communication campaigns aimed at the participants of the CO (citizens, students) for maintaining their involvement and improving their flood risk awareness and preparedness (5-year program)	860 000
Expert involvement of technicians in the environmental monitoring of floods (5-year duration)	400 000
Total cost including administrative costs, incentives and VAT (22%)	4 900 000

Figure S1: Value functions for the vulnerability indicators to evaluate the Coping Capacity (De Luca, 2013)

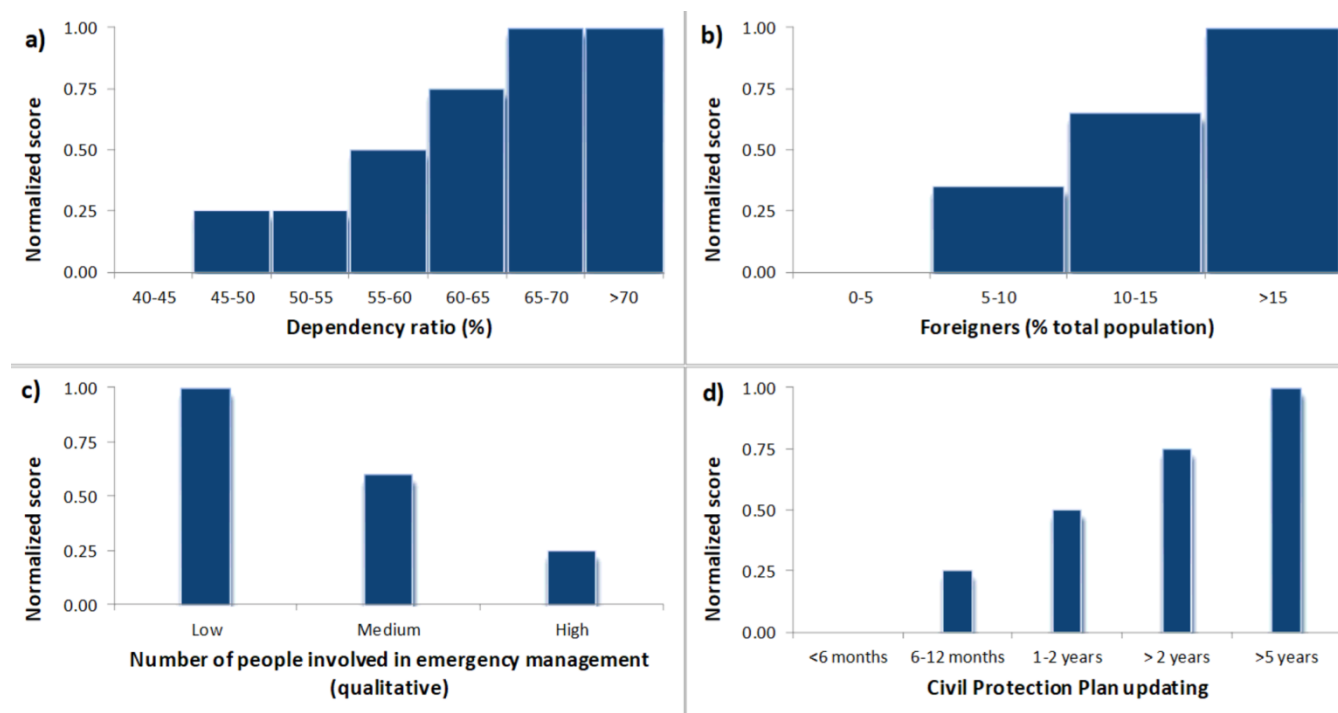


Figure S2: Value functions for the vulnerability indicators related to the Early Warning System (EWS) and Adaptive Capacity: a) reliability, b) lead time, and c) information content (De Luca, 2013)

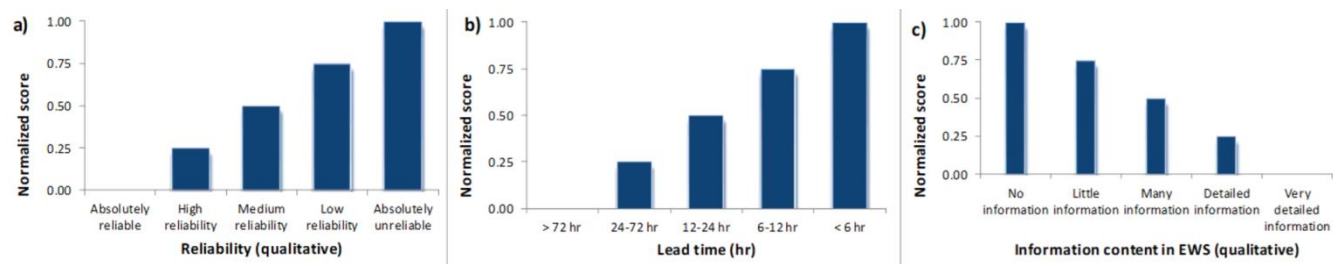


Figure S3: Value functions for the vulnerability indicators that are part of evaluating the Adaptive Capacity (De Luca, 2013)

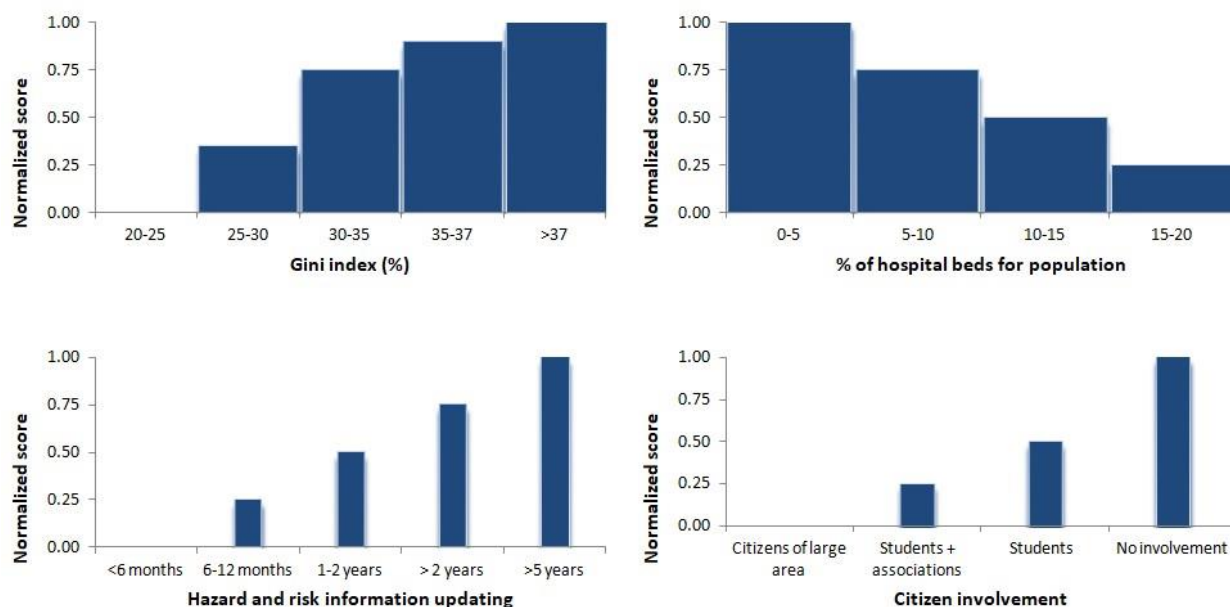


Figure S4: Vulnerability values of buildings as a function of water height (h) and flow velocity (v) as proposed in the ISPRA 2012) guidelines

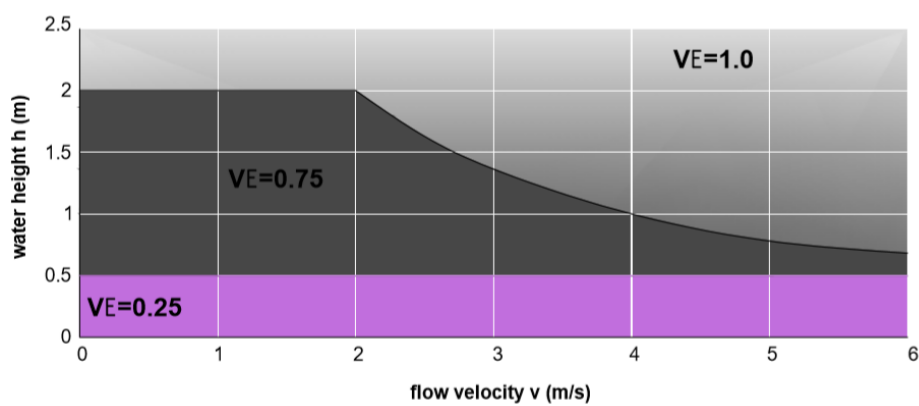


Figure S5: Vulnerability values of the road infrastructure as a function of water height (h) and flow velocity (v) as proposed in the ISPRA 2012) guidelines


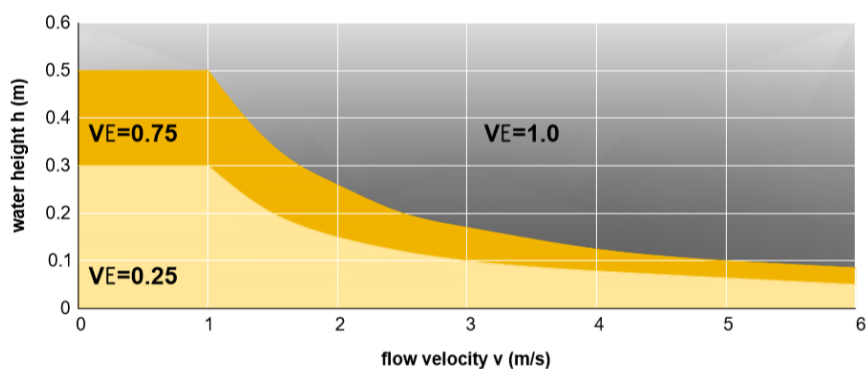


Figure S6: Vulnerability values as a function of the water height (h) and the flow velocity (v) for: (a) vineyards, (b) orchard and olive trees, (c) vegetables, and (d) natural and semi-natural environments, derived from laboratory experiments (Citeau, 2003) and as proposed by the ISPRA (2012) guidelines

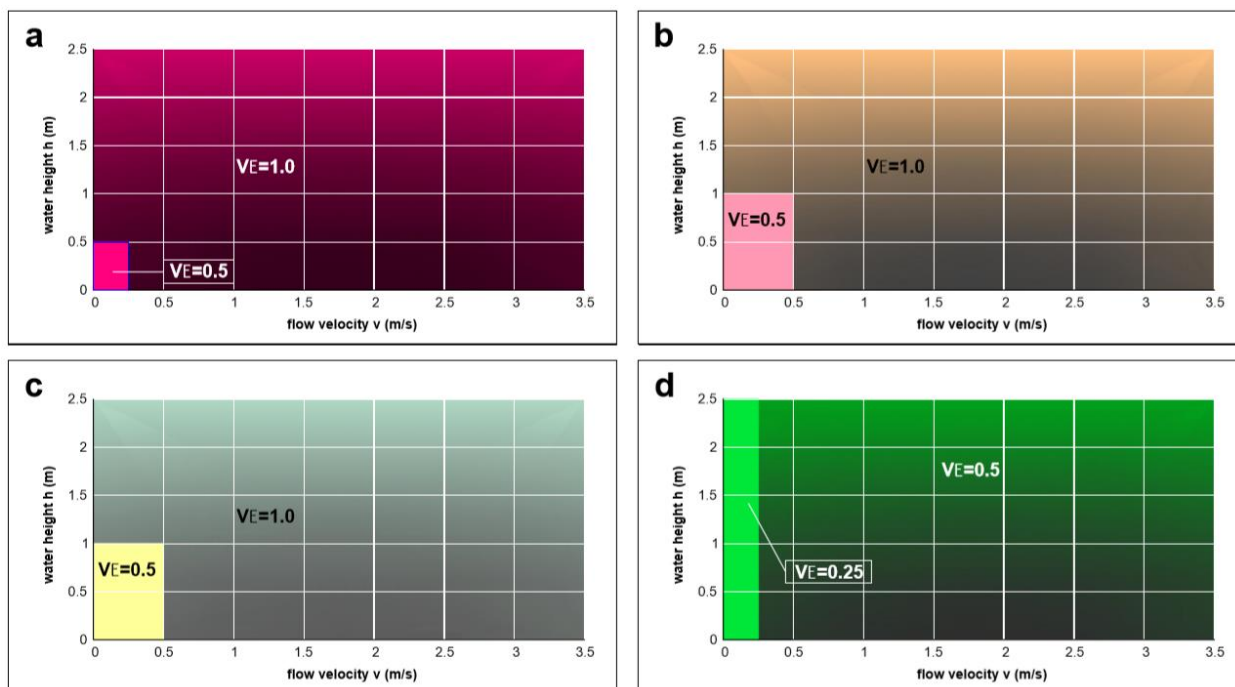

References

- Citeau, J.-M.: A New Control Concept in the Oise Catchment Area. Definition and Assessment of Flood Compatible Agricultural Activities, FIG working week, Paris, France., 2003.
- Clausen, L. and Clark, P. B.: The development of criteria for predicting dambreak flood damages using modelling of historical dam failures, in *Proceedings of the International Conference on River Flood Hydraulics*. 17-20 September 1990., edited by W. R. White, pp. 369–380, John Wiley & Sons Ltd. and Hydraulics Research Limited., 1990.
- De Luca, C.: Integrated Environmental and Socio-economic Assessment of Flood Risk in GIS Context in the Vipacco Basin, Tesi Magistrale, Università di Ca Foscari, Anno Accademico 2012/2013, 2013.
- DEFRA and UK Environment Agency: Flood and Coastal Defence R&D Program: Flood Risk to People, Phase 2, FD2321/TR2 Guidance Document., 2006.
- EU: Directive 2007/60/EC of the European Parliament and of the Council of 23 October 2007 on the assessment and management of flood risks. Available at: <https://eur-lex.europa.eu/legal-content/EN/TXT/?uri=CELEX:32007L0060>, 2007.
- Ferri, M., Monego, M., Norbiato, D., Baruffi, F., Toffolon, C. and Casarin, R.: La piattaforma previsionale per i bacini idrografici del Nord Est Adriatico (I), in *Proceedings of XXXIII Conference on Hydraulics and Hydraulic Engineering*, Brescia, Italy., 2012.
- Gupta, V. K. and Waymire, E. C.: A statistical analysis of mesoscale rainfall as a random cascade, *J. Appl. Meteor.*, 32(2), 251–267, doi:10.1175/1520-0450(1993)032<0251:ASAOMR>2.0.CO;2, 1993.
- Hargreaves, G. H. and Samani, Z. A.: Estimating potential evapotranspiration, *Journal of the Irrigation and Drainage Division*, 108(3), 225–230, 1982.
- Huizinga, H. J.: Flood damage functions for EU member states. Technical Report, HKV Consultants. Implemented in the framework of the contract #382441-F1SC awarded by the European Commission - Joint Research Centre, 2007.
- Huizinga, H. J., Moel, H. de and Szewczyk, W.: Global flood depth-damage functions. Methodology and the database with guidelines. EUR 28552 EN. doi: 10.2760/16510, 2017.
- ISPRA: Proposta metodologica per l'aggiornamento delle mappe di pericolosità e di rischio. Attuazione della Direttiva 2007/60/CE/ relative alla valutazione e alla gestione dei rischi da alluvioni (Decreto Legislativo n.49/2010). Istituto Superiore per la Protezione e la Ricerca Ambientale (ISPRA), Roma., 2012.
- Laio, F., Porporato, A., Ridolfi, L. and Rodriguez-Iturbe, I.: Plants in water-controlled ecosystems: active role in hydrologic processes and response to water stress, *Advances in Water Resources*, 24(7), 707–723, doi:10.1016/S0309-1708(01)00005-7, 2001.
- Mazzoleni, M., Verlaan, M., Alfonso, L., Monego, M., Norbiato, D., Ferri, M. and Solomatine, D. P.: Can assimilation of crowdsourced data in hydrological modelling improve flood prediction?, *Hydrol. Earth Syst. Sci.*, 21(2), 839–861, doi:10.5194/hess-21-839-2017, 2017.
- Mazzoleni, M., Cortes Arevalo, V. J., Wehn, U., Alfonso, L., Norbiato, D., Monego, M., Ferri, M. and Solomatine, D. P.: Exploring the influence of citizen involvement on the assimilation of crowdsourced observations: a modelling study based on the 2013 flood event in the Bacchiglione catchment (Italy), *Hydrol. Earth Syst. Sci.*, 22(1), 391–416, doi:10.5194/hess-22-391-2018, 2018.
- Provincia Autonoma di Trento: Piano Generale di Utilizzazione delle Acque Pubbliche, Parte IV, DPR 15/02/2006., 2006.
- Rinaldo, A. and Rodríguez-Iturbe, I.: Geomorphological theory of the hydrological response, *Hydrological Processes*, 10(6), 803–829, doi:10.1002/(SICI)1099-1085(199606)10:6<803::AID-HYP373>3.0.CO;2-N, 1996.
- Rodríguez-Iturbe, I., González-Sanabria, M. and Bras, R. L.: A geomorphoclimatic theory of the instantaneous unit hydrograph, *Water Resour. Res.*, 18(4), 877–886, doi:10.1029/WR018i004p00877, 1982.
- Tarboton, D. G. and Luce, C. H.: Utah energy balance snow accumulation and melt model (UEB), computer model technical description and users guide, Utah Water Research Laboratory, Utah State University and USDA Forest Service, Intermountain Research Station., 1996.