

# 1 Hydraulic Shortcuts Increase the Connectivity of Arable Land Areas to 2 Surface Waters

3  
4 Urs Schönenberger<sup>1</sup> and Christian Stamm<sup>1</sup>

5  
6 <sup>1</sup>Eawag, Swiss Federal Institute of Aquatic Science and Technology, 8600 Dübendorf, Switzerland.

7  
8 **Abstract.** Surface runoff represents a major pathway for pesticide transport from agricultural areas to surface  
9 waters. The influence of man-made structures (e.g. roads, hedges, ditches) on surface runoff connectivity has  
10 been shown in various studies. In Switzerland, so-called hydraulic shortcuts (e.g. inlets and maintenance  
11 manholes of road or field storm drainage systems) have been shown to influence surface runoff connectivity and  
12 related pesticide transport. Their occurrence, and their influence on surface runoff and pesticide connectivity  
13 have however not been studied systematically.

14 To address that deficit, we randomly selected 20 study areas (average size = 3.5 km<sup>2</sup>) throughout the Swiss  
15 plateau, representing arable cropping systems. We assessed shortcut occurrence in these study areas using three  
16 mapping methods: field mapping, drainage plans, and high-resolution aerial images. Surface runoff connectivity  
17 in the study areas was analysed using a 2x2 m digital elevation model and a multiple-flow algorithm. Parameter  
18 uncertainty affecting this analysis was addressed by a Monte Carlo simulation. With our approach, agricultural  
19 areas were divided into areas that are either directly connected to surface waters, indirectly (i.e. via hydraulic  
20 shortcuts), or not connected at all. Finally, the results of this connectivity analysis were scaled up to the national  
21 level using a regression model based on topographic descriptors and were then compared to an existing national  
22 connectivity model.

23 Inlets of the road storm drainage system were identified as the main shortcuts. On average, we found 0.84 inlets  
24 and a total of 2.0 manholes per hectare of agricultural land. In the study catchments between 43 and 74 % of the  
25 agricultural area is connected to surface waters via hydraulic shortcuts. On the national level, this fraction is  
26 similar and lies between 47 and 60 %. Considering our empirical observations led to shifts in estimated fractions  
27 of connected areas compared to the previous connectivity model. The differences were most pronounced in flat  
28 areas of river valleys.

29 These numbers suggest that transport through hydraulic shortcuts is an important pesticide flow path in a  
30 landscape where many engineered structures exist to drain excess water from fields and roads. However, this  
31 transport process is currently not considered in Swiss pesticide legislation and authorisation. Therefore, current  
32 regulations may fall short to address the full extent of the pesticide problem. However, independent  
33 measurements of water flow and pesticide transport to quantify the contribution of shortcuts and validating the  
34 model results are lacking. Overall, the findings highlight the relevance of better understanding the connectivity  
35 between fields and receiving waters and the underlying factors and physical structures in the landscape.

36

## 37 **1. Introduction**

38 Agriculture has been shown to be a major source for pesticide contamination of surface waters (Stehle and  
39 Schulz, 2015;Loague et al., 1998). Pesticides are known to pose a risk to aquatic organisms and to cause  
40 biodiversity losses in aquatic ecosystems (Malaj et al., 2014;Beketov et al., 2013). For implementing effective  
41 measures to protect surface waters from pesticide contamination, the relevant transport processes have to be  
42 understood.

43 Pesticides are lost to surface waters through various pathways from either point sources or diffuse sources. In  
44 current research, surface runoff (Holvoet et al., 2007;Larsbo et al., 2016;Lefrancq et al., 2017), preferential flow  
45 through macropores into the tile drainage system (Accinelli et al., 2002;Leu et al., 2004a;Reichenberger et al.,  
46 2007;Sandin et al., 2018), and spray drift (Carlsen et al., 2006;Schulz, 2001;Vischetti et al., 2008) are considered  
47 of major importance. Other diffuse pathways like leaching into groundwater and exfiltration into surface waters,  
48 atmospheric deposition or aeolian deposition are usually less important.

49 Past research showed that different catchment parts can largely differ in their contribution to the overall pollution  
50 of surface waters (Pionke et al., 1995;Leu et al., 2004b;Gomides Freitas et al., 2008). This is the case for soil  
51 erosion or phosphorus, but also for pesticides. Areas largely contributing to the overall pollution load are called  
52 critical source areas (CSAs). Models delineating such CSAs assume that those areas fulfill three conditions  
53 (Doppler et al., 2012): i) They represent a substance source (e.g. pesticides, soil, phosphorus), ii) they are  
54 connected to surface waters, and iii) they are hydrologically active (e.g. formation of surface runoff).

55 Linear landscape structures, such as hedges, ditches, tile drains, or roads have been shown to be important  
56 features for the connectivity within a catchment (Fiener et al., 2011;Rübel, 1999). Undrained roads were reported  
57 to intercept flow paths, to concentrate and accelerate runoff, and therefore also to influence pesticide  
58 connectivity within a catchment (Carluer and De Marsily, 2004;Dehotin et al., 2015;Heathwaite et al.,  
59 2005;Payraudeau et al., 2009). Additionally, Lefrancq et al. (2013) showed that undrained roads act as  
60 interceptor of spray drift, possibly leading to significant pesticide transport during subsequent rainfall events  
61 when intercepted pesticides are washed off the roads.

62 However, such linear structures and the related connectivity effects exhibit substantial regional differences due  
63 to natural conditions or various aspects of the farming systems. In contrast to other countries, many roads in  
64 agricultural areas in Switzerland are drained by stormwater drainage systems (Alder et al., 2015). Inlets of  
65 stormwater drainage systems are also found directly in fields (Doppler et al., 2012;Prasuhn and Grünig, 2001).

66 Since those stormwater drainage systems were reported to shortcut surface runoff to surface waters, those  
67 structures were called *hydraulic shortcuts* or short-circuits. Doppler et al. (2012) showed in a small Swiss  
68 agricultural catchment that hydraulic shortcuts were creating connectivity of remote areas to surface waters and  
69 had a strong influence on pesticide transport. Only 4.4 % of the catchment area was connected directly to surface  
70 waters, while 23 % was connected indirectly (i.e. via hydraulic shortcuts). For the same catchment, Ammann et  
71 al. (2020) showed that the uncertainty of a pesticide transport model could be reduced by 30 % by including  
72 catchment-specific knowledge about hydraulic shortcuts and tile drainages.

73 The occurrence of hydraulic shortcuts and their influence on catchment connectivity has only been studied for a  
74 few other catchments in Switzerland. Prasuhn and Grünig (2001) found that only 3.2 % of the arable land in five  
75 small catchments were connected directly to surface waters, while 62 % were connected indirectly.  
76 Consequently, 90 % of the sediment lost to surface waters was transported through shortcuts.

77 To our knowledge, these two studies are the only ones systematically assessing the occurrence of hydraulic  
78 shortcuts and their influence on (sediment) connectivity. However, since these studies only covered a small total  
79 area in specific regions, it remains unknown if these findings are generally valid for Swiss agricultural areas.

80 Two other studies in Switzerland addressed connectivity on a larger scale using a modelling approach. Both  
81 indicated that more areas were connected through shortcuts than directly. Bug and Mosimann (2011) estimated  
82 12.5 % of the arable land in the canton of Basel-Landschaft to be connected directly to surface waters, and 35 %  
83 to be connected indirectly. Later, Alder et al. (2015) created a national connectivity map of erosion risk areas.  
84 They estimated that 21 % of the agricultural area is connected directly to surface waters and 34 % indirectly.  
85 Since only for small areas the occurrence of hydraulic shortcuts was effectively known, generalizing  
86 assumptions on the occurrence of hydraulic shortcuts were made in both studies (e.g. classification of roads as  
87 drained by shortcuts or as undrained, based on their size). As also stated by Alder et al. (2015), these  
88 assumptions are a major source of uncertainty. Their influence on the estimated connectivity fractions remains  
89 unclear.

90 In summary, previous studies on hydraulic shortcuts were either restricted to small study areas in a specific  
91 region, or were based on generalizing assumptions, lacking a spatially explicit consideration of hydraulic  
92 shortcuts. This study aims for a systematic, spatially distributed, and representative assessment of hydraulic  
93 shortcut occurrence on Swiss agricultural areas. Based on this assessment we aim on quantifying the influence of  
94 hydraulic shortcuts on surface runoff connectivity and pesticide transport. Additionally, we aim on estimating

95 how additional data on the occurrence of shortcuts influence the connectivity fractions reported by the existing  
96 national connectivity map. We focused our study on arable land, since this is the largest type of agricultural land  
97 with common pesticide application in Switzerland.

98 Our research questions therefore are:

- 99 1) How widespread do hydraulic shortcuts occur in Swiss arable land areas?
- 100 2) What is the contribution of hydraulic shortcuts to surface runoff connectivity and what are potential  
101 implications for surface-runoff related pesticide transport?
- 102 3) How are additional data on the occurrence of shortcuts influencing the connectivity predictions at the  
103 national scale?

104

105 **2. Material and Methods**

106 **2.1. Selection of study areas**


107 We selected 20 study areas (Table 1) representing arable land in the Swiss plateau and the Jura mountains  
 108 (Figure 1). This selection was performed randomly on a nationwide small-scale topographical catchment dataset  
 109 (BAFU, 2012). The probability of selection was proportional to the total area of arable land in the catchment as  
 110 defined by the Swiss land use statistics (BFS, 2014). Random selection was performed using the pseudo-random  
 111 number generator Mersenne Twister (Matsumoto and Nishimura, 1998).

112 On average, the study areas have a size of 3.5 km<sup>2</sup> and are covered by 59 % agricultural land. The agricultural  
 113 land mainly consists of arable land (74 %) and meadows/pastures (21 %). The mean slope on agricultural land is  
 114 4.9 degrees and the mean annual precipitation amounts to 1159 mm yr<sup>-1</sup>. A comparison of important catchment  
 115 properties of the study areas to the corresponding distribution of all Swiss catchments with arable land  
 116 demonstrated that the study areas represent the national conditions well (see Figure S 1).

117 **Table 1: Catchment properties of the 20 study areas. Fractions of agricultural area and of arable land were**  
 118 **determined from BFS (2014). Mean slope of agricultural areas was determined from BFS (2014) and Swisstopo**  
 119 **(2018). Mean annual precipitation was determined from Kirchhofer and Sevruck (1992).**

ID	Location	Can- ton	Receiving water	Area (km <sup>2</sup> )	Fraction of agricultural area	Fraction of arable land	Mean slope of agricultural areas in the catchment (deg)	Mean annual precipitation (mm/yr)
1	Böttstein	AG	Bruggbach	3.3	52 %	30 %	8.5	1187
2	Ueken	AG	Staffeleggbach	2.0	42 %	39 %	7.6	1164
3	Rüti b. R.	BE	Biberze	2.2	29 %	11 %	11.2	1403
4	Romont	FR	Glaney	3.4	78 %	48 %	4.0	1344
5	Meyrin	GE	Nant d'Avril	10.0	49 %	31 %	3.2	1133
6	Boncourt	JU	Saivu	5.9	44 %	23 %	5.5	1093
7	Courroux	JU	Canal de Bellevie	2.8	82 %	75 %	2.9	1082
8	Hochdorf	LU	Stägbach	2.4	84 %	59 %	4.1	1213
9	Müswangen	LU	Dorfbach	3.0	79 %	61 %	4.0	1482
10	Fleurier	NE	Buttes	1.0	24 %	11 %	9.6	1538
11	Lommiswil	SO	Bellacher Weiher	3.8	50 %	40 %	6.8	1388
12	Illighausen	TG	Tobelbach	1.9	54 %	30 %	1.8	1122
13	Oberneunforn	TG	Brüelbach	3.3	69 %	52 %	4.2	968
14	Clarmont	VD	Morges	2.4	75 %	70 %	5.3	1163
15	Molondin	VD	Flonzel	4.2	74 %	65 %	5.9	1064
16	Suchy	VD	Ruiss. des Combes	3.3	72 %	63 %	5.6	1026
17	Vufflens	VD	Venoge	2.8	39 %	30 %	5.7	1006
18	Buchs	ZH	Furtbach	3.9	57 %	48 %	4.9	1182
19	Nürensdorf	ZH	Altbach	2.3	59 %	44 %	3.6	1225
20	Truttikon	ZH	Niederwisensbach	5.1	66 %	49 %	4.6	960
<b>Mean</b>				<b>3.5</b>	<b>59 %</b>	<b>44 %</b>	<b>4.9</b>	<b>1159</b>

120

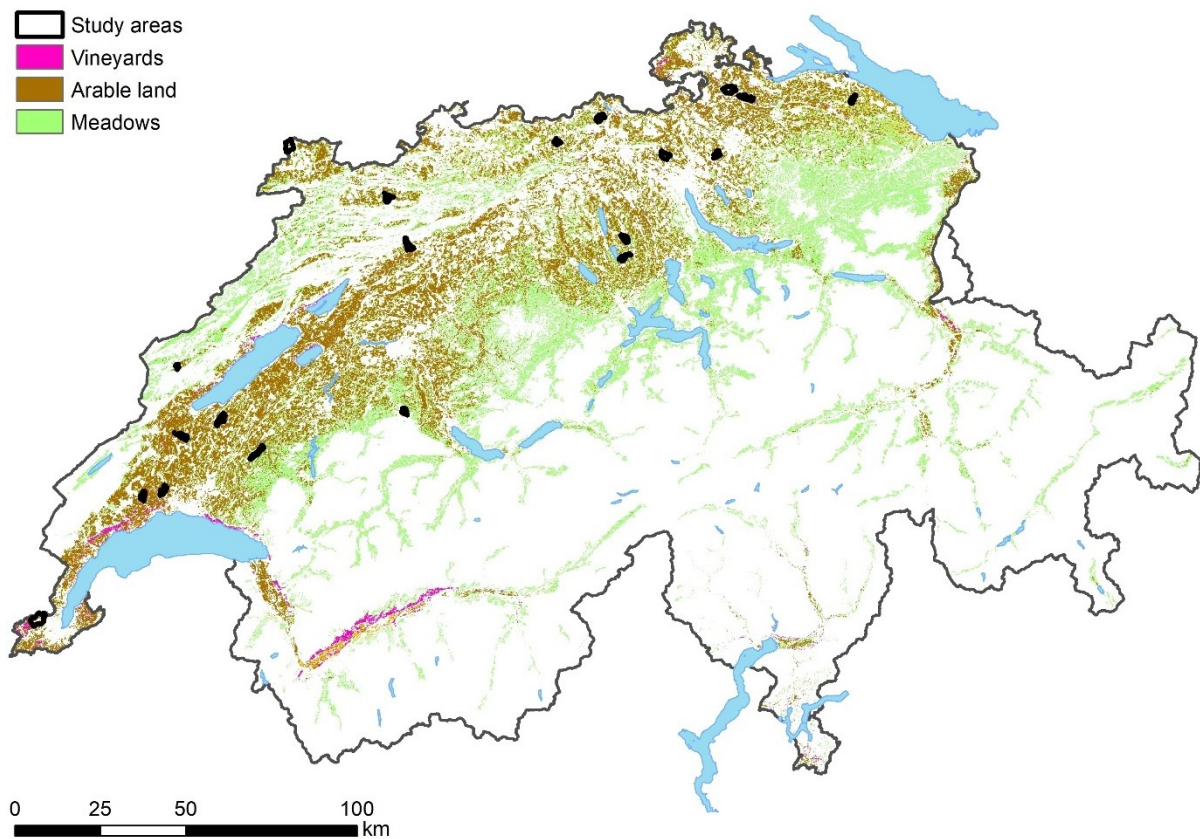

121

122 **Figure 1: Study areas (black) and distribution of arable land (brown), vineyards (pink), and meadows/pastures**  
 123 **(green) across Switzerland. Source: Swisstopo (2010);BFS (2014)**

124

125 **2.2. Assessment of hydraulic shortcuts**

126 **Shortcut definition**

127 We define a hydraulic shortcut as *a man-made structure increasing and/or accelerating the process of surface*  
 128 *runoff reaching surface waters (i.e. rivers, streams, lakes) or making this process possible in the first place.* In  
 129 this study, we focused on the following structures (example photos can be found in Figure S 2 to Figure S 13):

- 130 A) Storm drainage inlets on roads, farm tracks and crop areas
- 131 B) Maintenance manholes of storm drainage systems or tile drainage system on roads, farm tracks and crop  
 132 areas
- 133 C) Channel drains and ditches on roads, farm tracks and crop areas

134 If one of these structures is present, we defined this as a *potential shortcut*. If surface runoff can enter the  
 135 structure and if the structure is drained to surface waters or to a wastewater treatment plant, this is defined as a  
 136 *real shortcut*. Other processes that are sometimes referred to as hydraulic shortcuts (e.g. tile drains) are not

137 considered in this study. Tile drains have already received considerable attention in pesticide research and the  
138 transport to tile drains includes flow through natural soil structures.

### 139 **Shortcut location and type**

140 We mapped the location and types of potential shortcuts in each study area by combining three different  
141 methods.

#### 142 **i) *Field survey*: Field surveys were performed between August 2017 and May 2018 (details see**

143 Table S 5). In a subpart of each study area, we walked along roads and paths and mapped all the potential  
144 shortcut structures. The starting point was selected randomly, and we mapped as much as we could within one  
145 day. Consequently, the field survey data only cover a part of the catchment. For each of the potential shortcuts  
146 we recorded its location, as well as a set of properties using a smartphone and the app “Google My Maps”. This  
147 included a specification of the type of the shortcut (e.g. inlet, inspection chamber, ditches, channel drains), its lid  
148 type (e.g. grid, sealed lid, lid with small openings), and its lid height relative to the ground surface. A list of all  
149 possible types can be found in the supporting information (Table S 2 to Table S 4).

150 **ii) *Drainage plans***: For all municipalities covering more than 5 % of a study area we asked the responsible  
151 authorities to provide us with their plans of the road storm drainage systems and the agricultural drainage  
152 systems. For 38 and 26 of the 46 municipalities concerned we received road storm drainage system plans and tile  
153 drainage system plans, respectively. Reasons for missing data are either that the responsible authorities did not  
154 respond or that data on the drainage systems were not available. From the plans, we extracted the locations of  
155 shortcuts and, if available, the same properties were specified as in the field survey.

#### 156 **iii) *Aerial images*: Between August 2017 and August 2018 (details see**

157 Table S 5) we acquired aerial images of the study areas with a ground resolution of 2.5 to 5 cm. We used a fixed-  
158 wing UAV (eBee, Sensefly, Cheseaux-sur-Lausanne) in combination with a visible light camera (Sony DSC-  
159 WX220, RGB). The study areas were fully covered by the UAV imagery, with the exception of larger settlement  
160 areas, forests, and lakes, and of no-fly zones for drones (e.g. airports). The UAV images were processed to one  
161 georeferenced aerial image per study area using the software Pix4Dmapper 4.2. In the no-fly zones of the study  
162 areas Meyrin (Geneva), Buchs (Zürich), and Nürensdorf (Zürich) we used aerial images provided by the cantons  
163 of Geneva (Etat de Genève, 2016) and Zürich (Kanton Zürich, 2015). Ground resolutions were 5 cm, and 10 cm  
164 respectively. Using ArcGIS 10.7, we gridded the aerial images, scanned by eye through each of the grid cells,



165 and marked all potential shortcut structures manually. If observable from the aerial image, the same properties as  
166 for the field survey were specified for each potential shortcut structure.

167 We combined the three datasets originating from the three methods to a single dataset. If a potential shortcut  
168 structure was only found by one of the mapping methods, its location and type were used for the combined  
169 dataset. If it was found by more than one of the mapping methods, we used the location and type of the mapping  
170 method that we expected to be the most accurate. For the location information, this is UAV imagery, before field  
171 survey, and maps. For the type specification, this is field survey, before UAV imagery, and maps.

### 172 **Assigning shortcuts to different landscape elements**

173 In order to better understand where hydraulic shortcuts occur the most, we assigned them to different landscape  
174 elements. Using the topographic landscape model of Switzerland “swissTLM3D” (Swisstopo, 2010) we defined  
175 five landscape elements: Paved roads, unpaved roads, fields, settlements, and other areas (e.g. railways, other  
176 traffic areas, forests, water bodies, wetlands, single buildings). For all landscape elements except roads and  
177 railways, shortcuts were assigned to their landscape elements by a simple intersection. However, shortcuts  
178 belonging to road or railway drainage systems are in many cases not placed on the road or railway directly, but  
179 on the adjacent agricultural land or settlement. Therefore, shortcuts were assigned to the landscape elements road  
180 or railway if they were within a 5 m buffer.

181 In addition, we correlated the density of shortcuts per study area to different study area properties. We selected  
182 study area properties that we expected to have explanatory power: density (length per area) of paved roads,  
183 density of unpaved roads, density of surface rivers, density of subsurface rivers, mean annual precipitation, and  
184 mean slope on agricultural areas.

### 185 **Drainage of shortcuts**

186 A potential shortcut only turns into a real one if it is drained to surface waters by pipes or other connecting  
187 structures, such as ditches. Therefore, using the plans provided by the municipalities, we investigated where  
188 potential shortcuts drain to. They were allocated to one of the following categories of recipient areas: surface  
189 waters, wastewater treatment plants/combined sewer overflow, infiltration areas (e.g. forest, infiltration ponds,  
190 fields, grassland), or unknown.

191


192 **2.3. Surface runoff connectivity model**

193 To assess how hydraulic shortcuts contribute to surface runoff connectivity, we created a surface runoff  
194 connectivity model.

195 The model is based on the concept of critical source areas (CSAs, see introduction). It mainly focuses on the first  
196 two elements of the CSA concept (pesticide application and connectivity to surface waters). In contrast, the  
197 question whether an area is hydrologically active is only addressed partially because many relevant information  
198 such as soil properties are not available at the national scale.

199 The model (see Figure 2) distinguishes *source areas* on which surface runoff is produced, and *recipient areas* on  
200 which surface runoff ends up. A *connectivity model* connects those areas by routing surface runoff through the  
201 landscape. These model parts are conceptually described in more detail in the section “model structure”. In the  
202 section “model parametrization”, we describe how we parametrized the model and how we assessed the  
203 uncertainty of model output given the parameter uncertainty. In the last section “hydrological activity”, we  
204 explain the testing for systematic differences in the hydrological activity between areas with direct or indirect  
205 connectivity.

206 **Model structure**

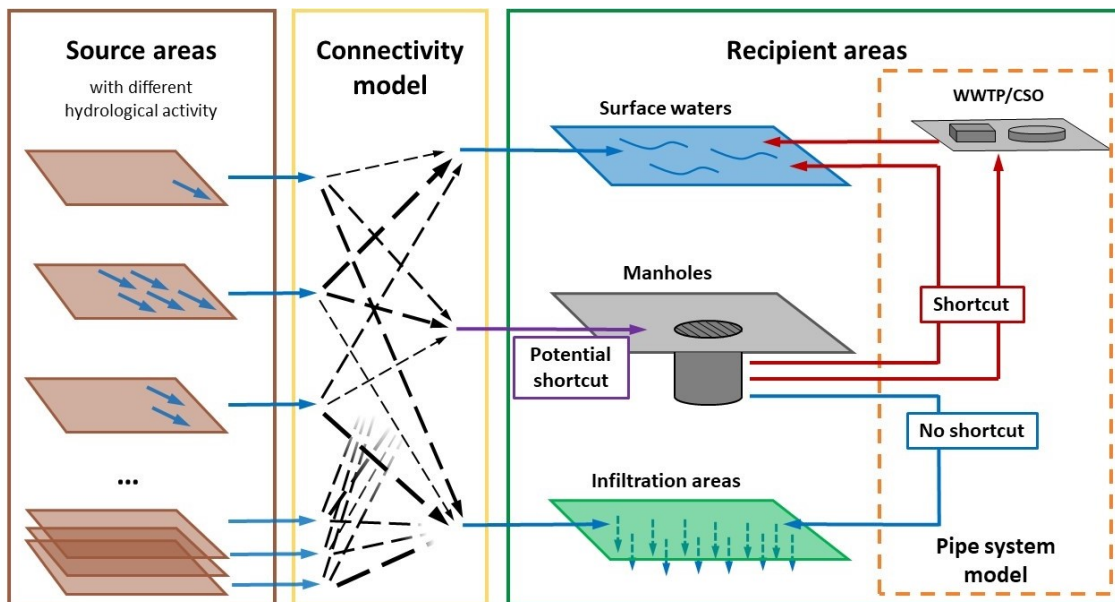

208 **Figure 2: Structure of the surface runoff connectivity model. WWTP: Waste water treatment plants, CSO: Combined**  
209 **sewer overflow**

210 **Source areas.** All crop areas on which pesticides are applied should in theory be considered as source areas.  
211 However, a highly resolved spatial dataset of land in a crop rotation for our study areas is lacking. Therefore, we  
212 considered the total extent of agricultural areas (i.e. arable land, meadows/pastures, vineyards, orchards, and

213 gardening) as source areas, since those areas could be derived in high resolution. The extent of agricultural areas  
214 was defined by subtracting all non-agricultural areas from the extent of the study area. For this, we used non-  
215 agricultural areas (forests, water bodies, urban areas, traffic areas, and other non-agricultural areas) as defined by  
216 the national topographical landscape model SwissTLM3D (Swisstopo, 2010). According to the Swiss proof of  
217 ecological performance (PEP), pesticide usage within a distance of 6 m from a river, and within 3 m from hedges  
218 and forests is prohibited. The extent of agricultural areas was reduced accordingly except along forests  
219 (parameters *river spray buffer*, *hedge spray buffer*).

220 **Recipient areas.** Surface runoff generated on a source area and routed through the landscape can end up in three  
221 different types of landscape elements, referred to as recipient areas: Surface waters, infiltration areas (i.e. forests,  
222 hedges, internal sinks), and shortcuts. The extent of surface waters (rivers that have their course above the  
223 surface, lakes, and wetlands), was defined by the SwissTLM3D model as was the extent of forests and hedges.  
224 Since forests and hedges are known to infiltrate surface runoff (Sweeney and Newbold, 2014;Schultz et al.,  
225 2004;Bunzel et al., 2014;Dosskey et al., 2005) we assumed that forests with a certain width (parameter  
226 *infiltration width*) act as an infiltration area. Hedges were assumed either to act as infiltrations areas, or to have  
227 no effect on surface runoff. Accordingly, the parameter *hedge infiltration*, was varied between yes (hedges act as  
228 infiltration areas) and no (hedges don't act as an infiltration areas).

229 Internal sinks in the landscape were defined using the 2x2m digital elevation model (Swisstopo, 2018). All sinks  
230 larger than two raster cells and deeper than a certain depth (parameter *sink depth*) were defined as internal sinks.  
231 All other sinks were filled completely.

232 Shortcuts were defined in two different ways (parameter *shortcut definition*): In definition A, all inlets, ditches,  
233 and channel drains were considered as potential shortcuts. In definition B, manholes lying in internal sinks were  
234 additionally considered as potential shortcuts. Potential shortcuts were defined to act as real shortcuts if they are  
235 known to discharge to surface waters or wastewater treatment plants. From the drainage plans of the  
236 municipalities, we know that most of the inlets discharge into either a surface water body or a wastewater  
237 treatment plant. Therefore, also potential shortcuts with unknown drainage location were assumed to act as real  
238 shortcuts. Potential shortcuts discharging into forests or infiltration structures were assumed not to act as  
239 shortcuts and were not used in the model. Shortcut recipient areas were defined as the raster cells of the digital  
240 elevation model on which the shortcut is located and all the cells directly surrounding it (see Figure S 14 in the  
241 SI).

242 **Connectivity model.** For modelling connectivity we used the TauDEM model (Tarboton, 1997) which is based  
243 on a D-infinity flow direction approach. As an input we used a 2x2m digital elevation model (DEM) (Swisstopo,  
244 2018). This DEM was modified as follows: We assumed that only those internal sinks that were defined as sink  
245 recipient areas (see above) effectively act as sinks. Therefore, firstly, all sinks were filled, and sink recipient  
246 areas were carved 10 m into the DEM. Secondly, all other recipient areas (shortcuts, forests, hedges, surface  
247 waters) were carved between 10 and 50 m into the DEM. Carving the recipient areas into the DEM ensured that  
248 surface runoff reaching a recipient area was not routed further on to another recipient area. Thirdly, to account  
249 for the effect of roads accumulating surface runoff (Heathwaite et al., 2005), roads were carved into the DEM by  
250 a given depth defined by the parameter *road carving depth*.

251 The modified DEM, the source areas, and the recipient areas were used as an input into the TauDEM tool “D-  
252 Infinity upslope dependence”. Like this, each raster cell belonging to a source area was assigned with a  
253 probability to be drained into one of the three types of recipient areas.

254 The connectivity of a source area may depend on the flow distance to surface waters. For longer flow distances,  
255 water has a higher probability to infiltrate before it reaches a surface water. Therefore, for each source area raster  
256 cell, we calculated the flow distance to its recipient area using the tool “D-infinity distance down”.

### 257 **Model parametrization and sensitivity analyses**

258 The model parameters mentioned in the section above vary in space and time. Since this variability could not be  
259 addressed with the selection of a single parameter value, we performed a Monte Carlo simulation with  
260 100 realizations. The probability distributions of the parameters are provided in Table 2. The bounds or  
261 categories of these distributions were based on our prior knowledge about the hydrological processes involved,  
262 about structural aspects (e.g. depths of sinks), and on our experience from field mapping. The parameters *river*  
263 *spray buffer* and *hedge spray buffer* were assumed constant according to the guidelines of the Swiss proof of  
264 ecological performance (PEP).

265 To assess the influence of single parameters on our modelling results, we performed a local sensitivity analysis  
266 against a benchmark model (one realization of the model with a specific parameter set, see Table 2). When  
267 selecting the benchmark model parameter set, we kept the changes in the digital elevation model small (i.e. *road*  
268 *carving depth* = 0 cm, *sink depth* = 10 cm). For the other model parameters, we selected the values that we  
269 assumed to be the most probable in reality. For the local sensitivity analysis, each of the model parameters was  
270 varied individually within the same boundaries as for the Monte Carlo analysis.

271 **Table 2: Summary of parameter distributions used for the Monte Carlo analysis and parameter values used as a**  
 272 **benchmark for the sensitivity analysis. PEP: Swiss proof of ecological performance.**

Parameter	Handling of parameter uncertainty	Distribution	Bounds / Categories	Benchmark model
Sink depth	Monte Carlo & sensitivity analysis	Uniform distribution	$5 \text{ cm} \leq x \leq 100 \text{ cm}$	10 cm
Infiltration width	Monte Carlo & sensitivity analysis	Uniform distribution	$6 \text{ m} \leq x \leq 100 \text{ m}$	20 m
Road carving depth	Monte Carlo & sensitivity analysis	Uniform distribution	$0 \text{ cm} \leq x \leq 100 \text{ cm}$	0 cm
Shortcut definition	Monte Carlo & sensitivity analysis	Bernoulli distribution	[Definition A; Definition B]	Definition A
Hedge infiltration	Monte Carlo & sensitivity analysis	Bernoulli distribution	[yes; no]	Yes
River spray buffer	Assumed as certain, based PEP guidelines	Constant	6 m	6 m
Hedge spray buffer	Assumed as certain, based PEP guidelines	Constant	3 m	3 m

273

#### 274 **Hydrological activity**

275 As mentioned earlier, a critical source area has to be hydrologically active, i.e. surface runoff has to be generated  
 276 on that area. Runoff generation depends on many variables (e.g. crop types, soil types, soil moisture, rain  
 277 intensity) for which no data are available in most of our study areas and which are strongly variable over time.  
 278 Since we are interested in the general relevance of shortcuts, we focused on the question whether there is a  
 279 systematic difference in the hydrological activity between areas directly or indirectly connected to streams.

280 For soil moisture, we tested for such differences by calculating the distribution of the topographic wetness index  
 281 (TWI) (Beven and Kirkby, 1979) for the source areas of the benchmark model. We calculated the TWI as  
 282 follows, using the “Topographic Wetness Index” tool of the TauDEM model:

$$283 \quad \text{TWI} = \frac{\ln(a)}{\tan(\beta)}$$

284 The local upslope area  $a$ , and the local slope  $\beta$  were calculated using the D-infinity flow direction algorithm that  
 285 was already used for the surface runoff connectivity model. As an input, we used the source areas and the  
 286 modified DEM as specified for the surface runoff connectivity model.

287 The formation of surface runoff on agricultural areas is also influenced by their slope. Therefore, we calculated  
 288 the distribution of slopes for source areas draining to different destinations. For this we used the slopes from the  
 289 Swiss digital elevation model (Swisstopo, 2018).

290 For other variables (e.g. crop type, rain intensity), there is no indication for such systematic differences.

291 Therefore, we assumed that they do not differ systematically between areas draining to different recipient areas.

292

## 293 2.4. Extrapolation to the national level

### 294 Extrapolation of the local connectivity model


295 In a last step, we developed a model for extrapolating the results from our study areas (local surface runoff  
296 connectivity model, LSCM) to the national scale. This extrapolation was then used to evaluate how the results of  
297 this study compare to a pre-existing connectivity model (Alder et al., 2015).

298 *Selection of explanatory variables:* We calculated a list of catchment statistics based on nationally available  
299 geodatasets that could serve as explanatory variables. As catchment boundaries, the polygons from the national  
300 catchment dataset (BAFU, 2012) were used. Details on the datasets used for calculating those catchment  
301 statistics can be found in Table S 1.

302 We created a linear regression between each of those catchment statistics to the median fractions of agricultural  
303 areas directly, indirectly, and not connected to surface waters, as reported by the LSCM ( $f_{LSCM,dir}$ ,  $f_{LSCM,indir}$ ,  
304  $f_{LSCM,nc}$ ). The strongest correlations were found for the fractions of agricultural areas directly, indirectly, and not  
305 connected to surface waters, as reported by the NECM ( $f_{NECM,dir}$ ,  $f_{NECM,indir}$ ,  $f_{NECM,nc}$ , see Table S 8). Therefore, we  
306 used them as explanatory variables for building an extrapolation model of our local results to the national scale.

307 The model predictions for each catchment have to fulfil specific boundary conditions: Firstly, the sum of areal  
308 fractions of the three types of recipient areas  $k$  per catchment  $c$  has to equal one ( $\sum_{k=1}^K f_{k,c} = 1$ ), and secondly,  
309 area fractions cannot be negative ( $f_{k,c} \geq 0$ ). To ensure these conditions, we performed the model fit after a unit  
310 simplex data transformation. To address the uncertainty introduced by the selection of our study catchments, we  
311 additionally bootstrapped the model one hundred times. The resulting modelling approach is shown in Figure 3.

312 Mathematical details are provided in the SI (chapter S1.5).

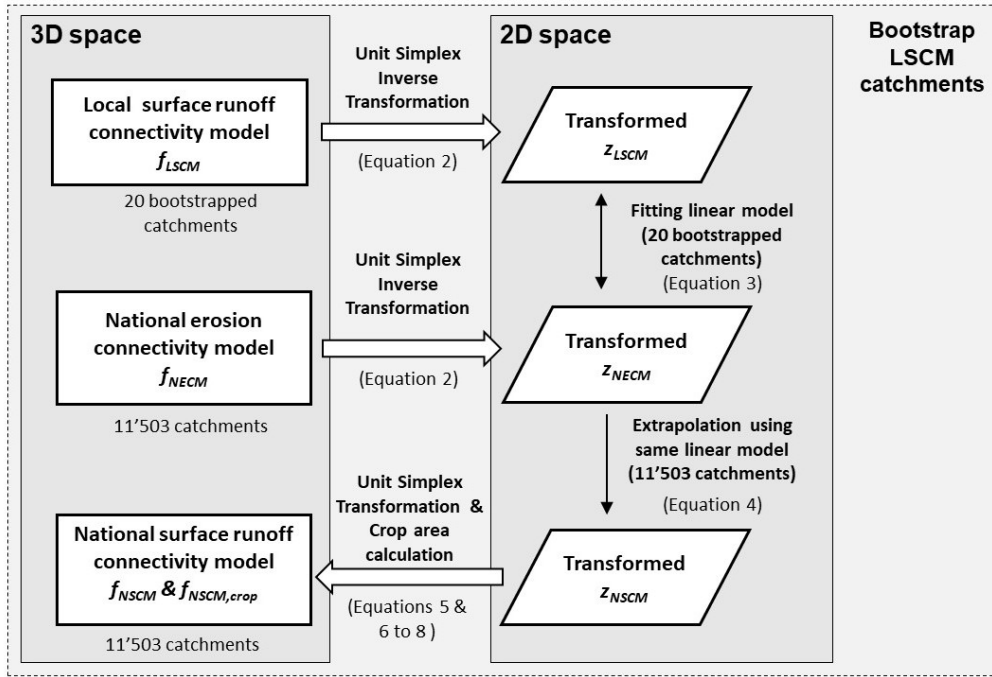

313

314 **Figure 3: Extrapolation of the local surface runoff connectivity model (LSCM) to the national scale (NSCM) using a**  
 315 **unit simplex transformation approach.**

316 As a result, we obtained a national surface runoff connectivity model (NSCM). The NSCM provides an estimate  
 317 for the fractions of agricultural areas directly, indirectly, and not connected to surface waters ( $f_{NSCM,dir}$ ,  $f_{NSCM,indir}$ ,  
 318  $f_{NSCM,nc}$ ) for the catchments of the national catchment dataset. Since in the NECM mountainous regions of higher  
 319 altitudes are excluded, those areas are also excluded in the NSCM.

### 320 **Connectivity of crop areas**

321 During the time of this study, high-resolution datasets of Swiss crop areas were not available in Switzerland.  
 322 Therefore, we considered the total extent of agricultural areas for building the local surface runoff connectivity  
 323 model and extrapolation to the national scale. This includes areas with rare pesticide application, such as  
 324 meadows and pastures.

325 The Swiss land use statistics dataset (BFS, 2014) is a raster dataset with a resolution of 100 m, dividing  
 326 agricultural areas into different categories (e.g. arable land, vineyards, meadows/pastures). On the national scale,  
 327 the usage of such a lower-resolution dataset is more reasonable. Hence, we used this dataset for calculating  
 328 fractions of connected crop areas.

329 The fractions of directly, indirectly, and not connected crop areas per total agricultural area per catchment  $c$   
 330 ( $f_{NSCM,crop,c}$ ) were calculated as follows:

$$331 \quad f_{NSCM,crop,c} = f_{NSCM,c} \cdot r_{crop,c} \quad (6)$$



332 With  $r_{crop}$  being the ratio of crop area to total agricultural area in a catchment:

$$333 \quad r_{crop,c} = \frac{A_{crop,c}}{A_{crop,c} + A_{mead,c}} \quad (7)$$

$$334 \quad A_{crop,c} = A_{arab,c} + A_{vin,c} + A_{orch,c} + A_{gard,c} \quad (8)$$

335 with:  $A_{crop,c}$  = Crop area in catchment c (ha)

336  $A_{mead,c}$  = Meadow and pasture areas in catchment c (ha)

337  $A_{arab,c}$  = Arable land area in catchment c (ha)

338  $A_{vin,c}$  = Vineyard area in catchment c (ha)

339  $A_{orch,c}$  = Orchard area in catchment c (ha)

340  $A_{gard,c}$  = Gardening area in catchment c (ha)

341

342 **3. Results**

343 **3.1. Occurrence of hydraulic shortcuts**

344 In the following section, we first show the results of the field mapping campaign for manholes (inlets,  
345 maintenance manholes) followed by the results for channel drains and ditches. Afterwards we present results on  
346 the accuracy of our mapping methods.

347 **Manholes**

348 In total, we found 8213 manholes, corresponding to an average manhole density of 2.0 ha<sup>-1</sup> (min.: 0.51 ha<sup>-1</sup>,  
349 max.: 4.4 ha<sup>-1</sup>; Table 3). Forty-two percent of the manholes mapped were inlets. A plot showing the density of  
350 manholes mapped per catchment and manhole type can be found in Figure S 15 in the supporting information.

351 For roughly half of the inlets and maintenance manholes we were able to identify a drainage location. Both  
352 manholes types discharge in almost all cases into surface waters, either directly (87 % of inlets, 63 % of  
353 maintenance manholes) or via wastewater treatment plants or combined sewer overflow (12 % of inlets, 37 % of  
354 maintenance manholes). Only 1.4 % of the inlets and no maintenance manhole at all, were found to drain to an  
355 infiltration area, such as forests or fields.

356 **Table 3: Number of manholes found on agricultural areas of the study areas per shortcut category and drainage**  
357 **location.**

Drainage location	Inlets		Maintenance manholes		Other manholes		Unknown type	
	Count	Fraction	Count	Fraction	Count	Fraction	Count	Fraction
Surface waters	1568	46 %	1205	29 %	0	0 %	0	0 %
WWTP/CSO	218	6 %	705	17 %	0	0 %	0	0 %
Infiltration areas	26	1 %	0	0 %	0	0 %	0	0 %
Unknown	1615	47 %	2227	54 %	31	100 %	618	100 %
<b>Total</b>	<b>3427</b>	<b>100 %</b>	<b>4137</b>	<b>100 %</b>	<b>31</b>	<b>100 %</b>	<b>618</b>	<b>100 %</b>

358  
359 Most of the inlets mapped (90 %) are located on paved or unpaved roads (see  
360 Table 4). Only very few inlets (2.8 %) are found directly on fields. In contrast, maintenance manholes are found  
361 much more often on fields and therefore less often on paved or unpaved roads. The fractions of inlets and  
362 maintenance manholes belonging to a certain landscape element for each study area can be found in Figure S 18  
363 in the supporting information.

364

365 **Table 4: Percentage of manholes found on a certain type of landscape element. The category “other areas” integrates**  
366 **several types of landscape elements: railways, other traffic areas, forests, water bodies, wetlands, and single buildings.**

	<b>Paved roads</b>	<b>Unpaved roads</b>	<b>Settle-ments</b>	<b>Fields</b>	<b>Other areas</b>
<b>Inlets</b>	79 %	10 %	5.5 %	2.8 %	2.2 %
<b>Maintenance manholes</b>	52 %	7.2 %	16 %	21 %	4.5 %

367

368 We correlated the densities of inlets and maintenance manholes per study area with possible explanatory  
369 variables. Only the density of paved roads was significantly correlated to the density of inlets ( $R^2 = 0.33$ ,  $p =$   
370  $0.008$ ) and maintenance manholes ( $R^2 = 0.37$ ,  $p = 0.005$ ) (see Table S 6 and Table S 7).

### 371 **Channel drains and ditches**

372 In addition to manholes, we also mapped channel drains and ditches. With the exception of the study areas  
373 Meyrin ( $4.2 \text{ m ha}^{-1}$ ) and Buchs ( $4.0 \text{ m ha}^{-1}$ ) these structures were rarely found ( $< 1.2 \text{ m ha}^{-1}$ ; see Figure S 16). In  
374 Meyrin and Buchs, most channel drains and ditches (98 % of the total length) drain to surface waters, and only  
375 few of them to infiltration areas (2 %).

### 376 **Mapping accuracy**

377 The results above were generated using three different mapping methods (*field survey*, *UAV images*, and  
378 *drainage plans*). These methods differ in their ability to identify and classify a potential shortcut structure  
379 correctly and in the study area they cover. We determined the accuracy of the mapping methods aerial images  
380 and drainage plans using the field survey method as a ground truth (see Table 5) for those parts of the study areas  
381 where all three methods were applied. Since channel drains and ditches were rare, this assessment was only  
382 performed for manholes.

383 The recall (i.e. the probability that a potential shortcut is found by a mapping method) was limited for the aerial  
384 images method (53 % for inlets, and 62 % for maintenance manholes), and even lower for the drainage plans  
385 method (32 % for inlets, and 21 % for maintenance manholes). However, identified shortcuts were in most of the  
386 cases classified correctly (accuracy: 93 % to 94 % for aerial images, 88 % to 89 % for drainage plans).


387 For the entire study areas, Figure 4 shows the number of potential shortcuts identified by the three mapping  
388 methods. Despite a low recall, aerial images identified the largest number of potential shortcuts. This is due to  
389 the large spatial coverage by the aerial images method. Since the overlap between the three methods is small  
390 (only 32 % of the inlets and 15 % of the maintenance manholes were found by more than one method), each of

391 the methods was important to determine the total number of potential shortcuts in the study areas. Because the  
 392 aerial images and drainage plans have a low recall, but cover large parts of the study areas that were not assessed  
 393 by the field survey, the numbers reported above are a lower boundary estimate.

394 **Table 5: Recall and classification accuracies of the mapping methods aerial images and drainage plans. The recall**  
 395 **corresponds to the probability that a potential shortcut is found by the mapping method. Percentages indicate the**  
 396 **recall of each individual mapping method. In brackets, the recall of the combination of both methods is given. The**  
 397 **accuracy corresponds to the sum of true positive fraction and true negative fraction.**

Mapping method	Manhole type	Identification	Classification				
		Recall	True positives	False positives	True negatives	False negatives	Accuracy
Aerial images	Inlets	53 % (60 %)	61 %	1.3 %	33 %	4.9 %	94 %
	Maintenance manholes	62 % (69 %)	32 %	5.3 %	61 %	1.3 %	93 %
Drainage plans	Inlets	32 % (60 %)	67 %	4.5 %	22 %	6.6 %	89 %
	Maintenance manholes	21 % (69 %)	20 %	7.1 %	68 %	5.3 %	88 %

398

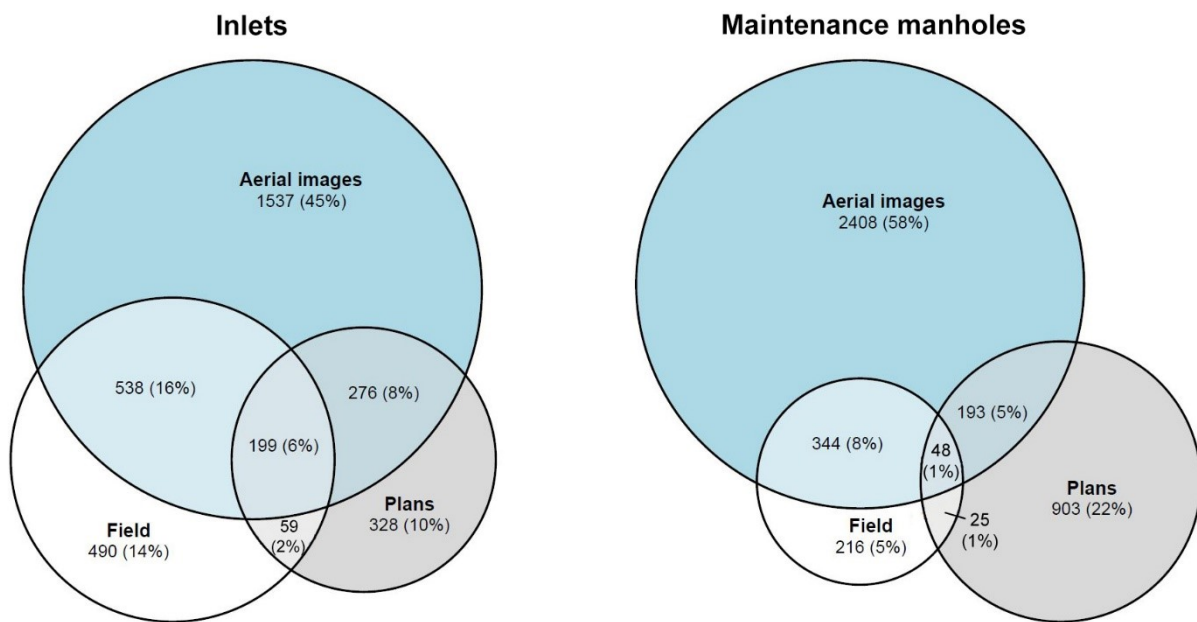

399

400 **Figure 4: Number of inlets (left) and maintenance manholes (right) identified by the different mapping methods.**


401

### 402 3.2. Surface runoff connectivity

#### 403 3.2.1. Study areas

404 From the Monte Carlo analysis of the surface runoff connectivity model, we obtained an estimate for the  
 405 fractions of agricultural areas that are connected directly, indirectly, or not at all to surface waters. To illustrate  
 406 the variability resulting from these Monte Carlo (MC) runs, Figure 5 shows the output of three MC simulations  
 407 (MC28, MC41, and MC40) for Molondin. These simulations correspond to the 5 %, 50 %, and 95 % quantile of


408 the median fraction of indirectly connected per total connected agricultural area over all study catchments. The  
 409 classification of certain catchment parts is changing depending on the model parametrisation (e.g. letters A to C).  
 410 However, for other parts, the results are consistent across the different MC simulations (e.g. letters D to F).  
 411 Overall, the results show that not only agricultural areas close to surface waters (e.g. letter D) are connected to  
 412 surface waters. Hydraulic shortcuts also create surface runoff connectivity for areas far away from surface waters  
 413 (e.g. letter E).

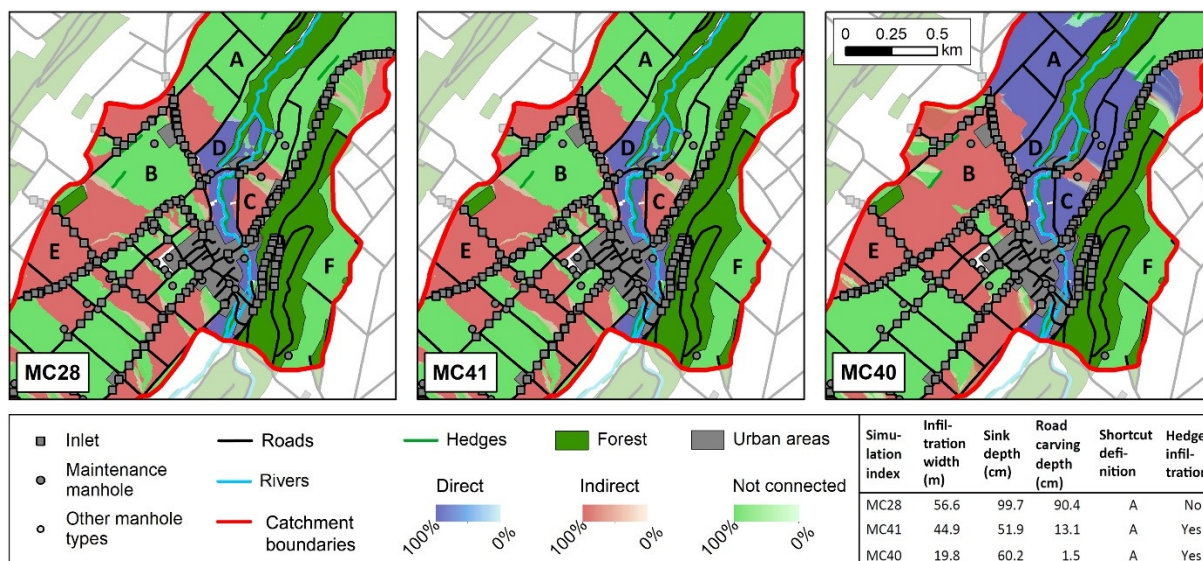

414 **Figure 5: Results of three example Monte Carlo (MC) simulations for a part of the study area Molondin. The color**  
 415 **ramps show the probability of agricultural areas to be directly connected (blue), indirectly connected (red) and**  
 416 **not connected (green). The simulations represent approximately the 5 % (MC28), 50 % (MC41), and 95 % (MC40)**  
 417 **quantiles with respect to the resulting median fractions of indirectly connected per total connected area over all study**  
 418 **catchments. The parameters of the example MC simulations are shown on the bottom right. Source of background**  
 419 **map: Swisstopo (2010)**  
 420

421 In order to assess the importance of hydraulic shortcuts, we calculated the fraction of indirectly connected area to  
 422 the total connected area. Across all Monte Carlo simulations, the median of this fraction over all study  
 423 catchments ranges between 43 % and 74 % (mean: 57 %, median: 58 %; Figure 5). Despite considerable  
 424 uncertainty, the results demonstrate that a large fraction of the surface runoff connectivity to surface waters is  
 425 established by hydraulic shortcuts.

426

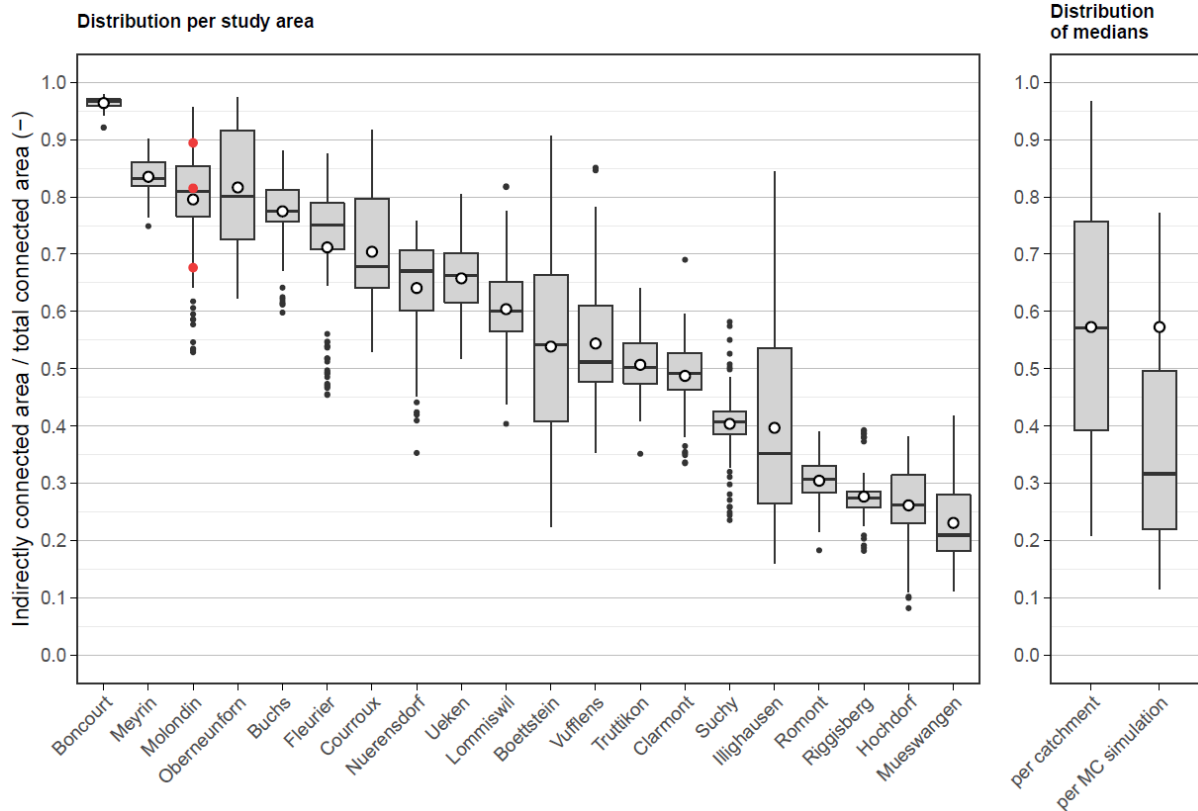

427

428 **Figure 6: Left: Fractions of indirectly connected areas per total connected areas as calculated by the Monte Carlo**  
 429 **analysis for each study area. White dots indicate the means of the distributions. The red dots indicate the results of the**  
 430 **example Monte Carlo simulations (MC28, MC41, and MC 40) shown in Figure 5. Right: Distribution of medians of**  
 431 **fractions of indirectly connected areas per total connected areas per study catchment and per Monte Carlo**  
 432 **simulation.**

433 For different flow distances, the fraction of indirectly connected area to the total connected area underlies only  
 434 minor variations (see Figure S 24). However, this fraction varies strongly between the study areas, with median  
 435 fractions ranging from 21 % in Mueswangen to 97 % in Boncourt. Although the occurrence of hydraulic shortcuts  
 436 is a prerequisite of indirect connectivity, high manholes densities are not necessarily leading to high fractions of  
 437 indirect connectivity in a catchment. The densities of inlets and maintenance manholes show only a weak  
 438 positive correlation to the catchment medians of the fraction of indirectly connected areas (inlets:  $R^2 = 0.11$ ,  $p =$   
 439  $0.15$ ; maintenance manholes:  $R^2 = 0.08$ ,  $p = 0.23$ ; see Table S 8). By contrast, the two study areas with high  
 440 channel drain and ditch densities (Meyrin and Buchs) show high fractions of indirect connectivity. Similarly, the  
 441 density of surface waters is strongly negatively correlated to the fraction of indirect connectivity ( $R^2 = 0.51$ ,  $p <$   
 442  $0.001$ ). This suggests that line elements like channel drains, ditches and surface waters usually have an influence  
 443 on connectivity if they occur in a catchment. By contrast, the influence of point elements seems to depend a lot  
 444 on the surrounding landscape structure.

445 As a further consequence of the structural differences between the study areas, not all of them reacted the same  
 446 way to changes in model parameters of the Monte Carlo analysis. For example, the fraction of indirectly to total

447 connected areas in the study area Boncourt was quite insensitive to changes in model parameters. Since Boncourt  
 448 has a very low water body density, only small areas are connected directly, independent of the model  
 449 parametrization. The study area Illighausen, on the other hand, reacted very sensitively (range of results = 68 %).  
 450 Since Illighausen is a very flat catchment, changes in the sink depth parameter had a large influence on the  
 451 estimated fractions of direct and indirect connectivity.

452 So far, we only reported on the fraction of indirectly connected per total connected area. In Table 6, we  
 453 additionally report the fractions of total agricultural area connected directly, indirectly, and not at all to surface  
 454 waters. On average, we estimate between 5.5 % and 38 % (mean: 28 %) of the agricultural area to be connected  
 455 directly, 13 % to 51 % (mean: 35 %) to be connected indirectly, and 12 % to 77 % (mean: 37 %) not to be  
 456 connected to surface waters. However, the variation between the catchments is much larger than the variation of  
 457 the Monte Carlo analysis.

458 **Table 6: Fractions of directly, indirectly, and not connected agricultural areas in our study catchments. The first row**  
 459 **represent the mean fraction over all catchments and Monte Carlo simulations. The second row represents the median**  
 460 **of the median over all catchments per MC simulation. The third row represents the median of the median over all MC**  
 461 **analyses per catchment. In brackets, the minimum and the maximum median are given.**

Statistic	Fraction of directly connected agricultural area $f_{dir}$	Fraction of indirectly connected agricultural area $f_{indir}$	Fraction of not connected agricultural area $f_{nc}$	Fraction of indirectly per total connected area $f_{fracindir}$
Mean	28 %	35 %	37 %	57 %
Median per MC simulation	25 % (5.5 %; 38 %)	38 % (13 %; 51 %)	32 % (12 %; 77 %)	58 % (43 %; 74 %)
Median per catchment	26 % (1.8 %; 70 %)	37 % (12 %; 60 %)	35 % (3.9 %; 53 %)	57 % (21 %; 97 %)

462

### 463 **Sensitivity analysis**

464 To analyse which model parameters have the largest influence on our model results, we tested the local model  
 465 parameter sensitivity on our benchmark model. The fraction of indirectly to total connected area reacts most  
 466 sensitive to changes in the road carving depth parameter. The difference between the minimal and maximal  
 467 fraction reported was 17 %. Results were also sensitive to the parameters shortcut definition (14 %) and sink  
 468 depth (13 %). Infiltration width (4.3 %) and hedge infiltration (2.5 %) had only a minor influence on the fraction  
 469 reported (see Figure S 22 and Figure S 23)..

### 470 **Hydrological activity**

471 Systematic differences in hydrological activity between directly and indirectly connected areas would have a  
 472 major influence on the interpretation of our connectivity analysis. We therefore tested for such differences by  
 473 calculating the distributions of slope and topographic wetness index on these areas.

474 The distributions of both, slope and topographic wetness index were very similar for directly, indirectly, and not  
475 connected areas (see Figure S 25 and Figure S 26). Only the slope of not connected areas was found to be  
476 slightly smaller than the slope of connected areas. Hence, we could not identify any systematic differences in the  
477 factors affecting hydrological activity between directly and indirectly connected areas.


478 Consequently, given the current knowledge, the proportions of direct and indirect surface runoff entering surface  
479 waters are expected to be equal to the proportions of directly and indirectly connected agricultural areas.

480 Analogously, if other boundary conditions of pesticide transport remain unchanged, directly and indirectly  
481 transported pesticide loads are expected to be proportional to directly and indirectly connected crop areas.

### 482 **3.2.2. Extrapolation to the national level**

483 We created a model for extrapolating the results of our study areas to the national level, using area fractions of  
484 the national erosion connectivity model (NECM) (Alder et al., 2015) aggregated to the catchment scale as  
485 explanatory variables. The area fractions of the NECM were transformed such that they fit the area fractions of  
486 the local surface runoff connectivity model (LSCM) resulting from the Monte Carlo analysis in our study areas.  
487 The resulting dataset is called the national surface runoff connectivity model (NSCM). The NSCM provides a  
488 separate model for each of the 100 Monte Carlo runs of the LSCM. It is aggregated to the catchment scale and  
489 covers all catchments of the valley zones, hill zones and lower elevation mountain zones. The differences  
490 between the fitted NSCM and the LSCM were strongly reduced compared to the original NECM (see Figure 7).  
491 The root-mean-square error (RSME) on average reduced from 17 % to 9.5 % for directly connected fractions,  
492 from 12 % to 7.6 % for indirectly connected fractions, and from 18 % to 7.6 % for not connected fractions.



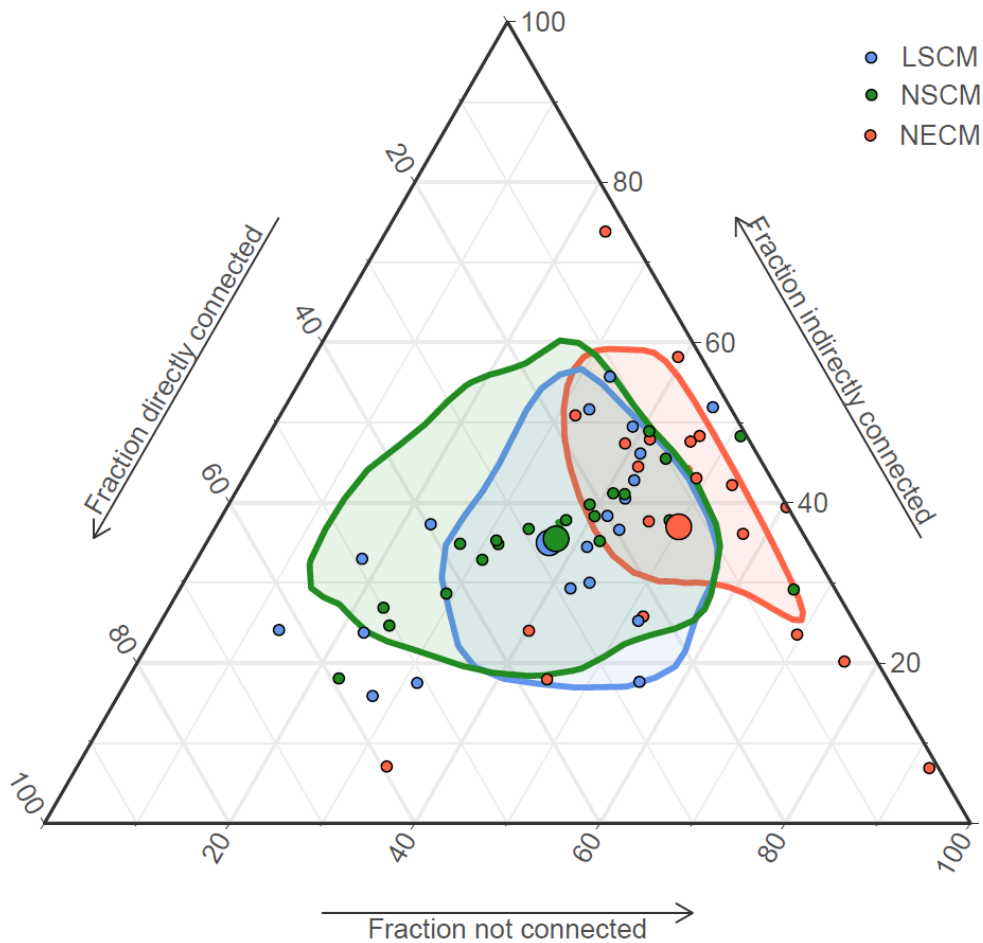

493

494 **Figure 7: Fractions of directly connected ( $f_{dir}$ ), indirectly connected ( $f_{indir}$ ), and not connected areas ( $f_{nc}$ ) per total**  
 495 **agricultural area for the local surface runoff connectivity model (LSCM, blue), national erosion connectivity model**  
 496 **(NECM, red), and national surface runoff connectivity model (NSCM, green) in the 20 study areas. Small blue circles**  
 497 **represent the catchment medians of all Monte Carlo simulations of the LSCM, small red circles represent the data**  
 498 **reported by the NECM, and small green circles represent the catchment medians of the NSCM. Large circles**  
 499 **represent the means of the LSCM (blue), NECM (red), and NSCM data (green). Shaded areas represent normal**  
 500 **Kernel density estimates of the LSCM, NECM, and NSCM data.**

501 By combining the NSCM with land use data, we came up with an estimate of connected crop areas on the  
 502 national scale. Half of the Swiss agricultural areas in the model region are crop areas (i.e. arable land, vineyards,  
 503 orchards, horticulture) and therefore potential pesticide source areas. On average, twenty six percent of crop  
 504 areas (13 % of total agricultural area) are connected directly, 34 % (17 % of total agricultural area) indirectly,  
 505 and 40 % (20 % of total agricultural area) not at all (details: Figure S 27; MC simulation quantiles: Table S 9;  
 506 spatial distribution: Figure S 30 to Figure S 36). From the total connected crop area, 54 % (between 47 and  
 507 60 %) are connected indirectly.

508 These results are similar to those obtained for the 20 study areas. Mean fractions of directly and indirectly  
 509 connected agricultural areas are a bit smaller in the national scale estimation than for the 20 study areas (-2.0 %,

510 and -1.9 %), while the fraction of not connected agricultural area is a bit larger (+3 %). The fraction of indirectly  
511 connected crop area per total connected crop area is slightly smaller (-2.6 %).


512 To assess if the national erosion connectivity model (NECM) is different from the national surface runoff  
513 connectivity model (NSCM), we determined the 5% and 95% quantiles of the NSCM predictions (see Table S  
514 9). If a fraction of the NECM is outside of this range, we considered this as a significantly different model  
515 prediction that is not expected, given our field data.

516 Compared to the NSCM, the NECM on average predicts lower fractions of directly connected crop areas  $f_{\text{crop,dir}}$   
517 (-6.4 %), which is below the 5 % quantile of the NSCM results. For indirectly connected areas  $f_{\text{crop,indir}}$  (-0.9 %),  
518 and not connected crop areas  $f_{\text{crop,nc}}$  (+7.2 %), the data reported by the NECM are within the 5 % and 95%  
519 quantile of the NSCM results. However, the fraction of indirectly connected crop area per total connected crop  
520 area  $f_{\text{fracindir}}$  reported by the NECM lies beyond the 95 % quantile of the NSCM (+11 %). In summary,  $f_{\text{crop,dir}}$  and  
521  $f_{\text{fracindir}}$  reported by the NECM are significantly different from what would be expected from the NSCM. For  
522  $f_{\text{crop,indir}}$  and  $f_{\text{crop,nc}}$ , the reported fractions are in a similar range for both models. The results of the bootstrap  
523 (Figure S 28) show that the differences between the two models are significantly larger than the uncertainty  
524 introduced by the selection of the study catchments.

525 The average difference in predicted connectivity fractions of *agricultural* areas between the two models ( $\Delta f =$   
526  $((f_{\text{NSCM,dir}} - f_{\text{NECM,dir}}) + (f_{\text{NSCM,indir}} - f_{\text{NECM,indir}}) + (f_{\text{NSCM,nc}} - f_{\text{NECM,nc}}))/3$ ) is strongly variable in space. Large  
527 differences are mainly found in large valleys (e.g. the Aare, Alpenrhein, and Rhone valleys, and the valleys of  
528 Ticino) and in the region of Lake Constance (see Figure S 40). However, when looking at the difference in  
529 average predicted connectivity fractions of *crop* areas ( $\Delta f_{\text{crop}} = ((f_{\text{NSCM,crop,dir}} - f_{\text{NECM,crop,dir}}) + (f_{\text{NSCM,crop,indir}} -$   
530  $f_{\text{NECM,crop,indir}}) + (f_{\text{NSCM,crop,nc}} - f_{\text{NECM,crop,nc}}))/3$ ), large differences almost exclusively are found in a band of  
531 catchments with high crop densities spreading through the Swiss midland (see Figure 8).

**Average differences in connectivity fractions (crop area per total agricultural area)**

- 0% - 5%
- 5% - 10%
- 10% - 15%
- 15% - 20%
- 20% - 25%

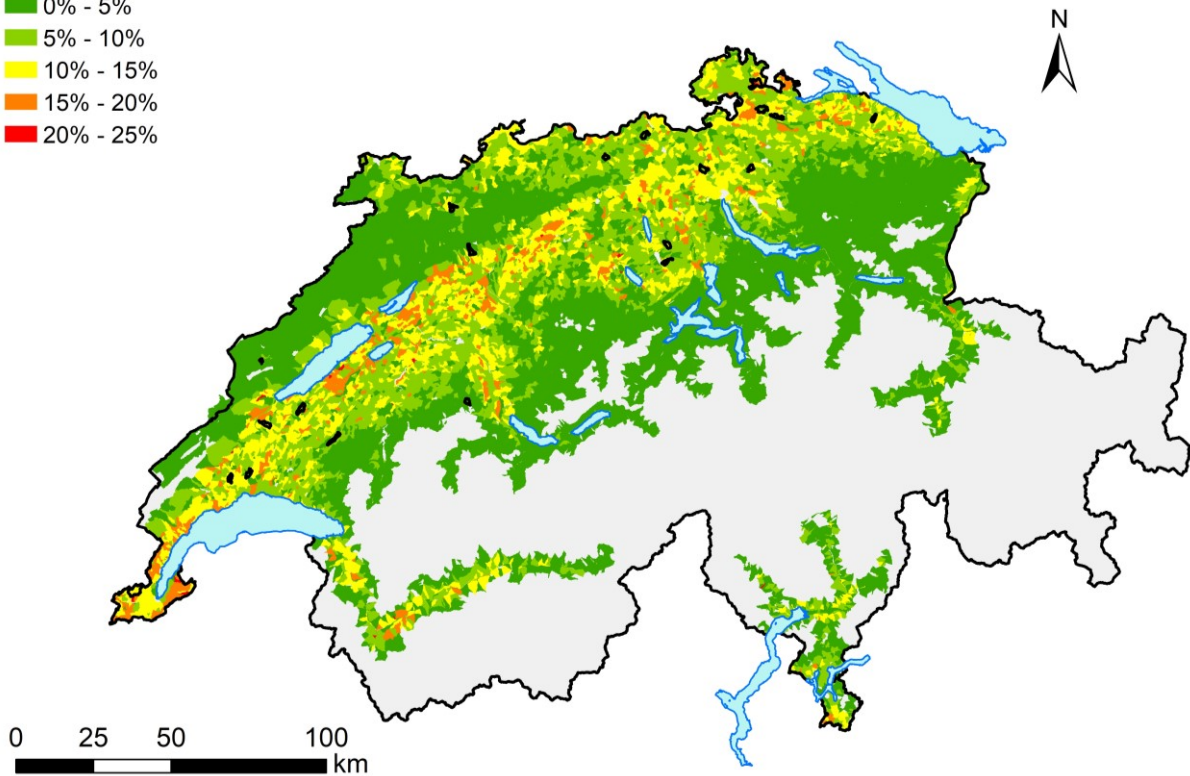

532

533

534

535

536

537

538

539

540

**Figure 8: Average differences in connectivity fractions of crop areas between the NSCM and the NECM:  $\Delta f_{\text{crop}} = ((f_{\text{NSCM,crop,dir}} - f_{\text{NECM,crop,dir}}) + (f_{\text{NSCM,crop,indir}} - f_{\text{NECM,crop,indir}}) + (f_{\text{NSCM,crop,nc}} - f_{\text{NECM,crop,nc}}))/3$ . The map shows data for all Swiss catchments in the valley zones, hill zones and lower elevation mountain zones. Grey areas represent higher elevation mountain zones that were excluded from the analysis. Study areas are marked with black lines. Details on directly, indirectly, and not connected agricultural areas and crop areas are given in Figure S 37 to Figure S 43. For comparison, a map of crop densities is given in Figure S 29. Source of background map: Swisstopo (2010)**

## 541 4. Discussion

### 542 Occurrence of hydraulic shortcuts

543 Our study shows that storm drainage inlets and maintenance manholes are common structures found in Swiss  
544 agricultural areas. While in neighbouring countries roads are often drained by ditches, Swiss roads are usually  
545 drained by storm drainage inlets (Alder et al., 2015). It is therefore not surprising that most of the inlets found in  
546 the study areas are located on roads. These findings are in accordance with the only other study in Switzerland  
547 reporting numbers on storm drainage inlets (Prasuhn and Grünig, 2001).

548 The vast majority of mapped storm drainage inlets were found to discharge to surface waters directly or via  
549 wastewater treatment plants (WWTPs). Thus, the occurrence of an inlet is in most cases directly related to a risk  
550 for pesticide transport to surface waters. The following three processes generate this risk: Firstly, pesticide  
551 loaded surface runoff produced on crop areas can enter the inlet. Secondly, spray drift deposited on roads can be  
552 washed off and enter the inlet. Thirdly, inlets can be oversprayed during pesticide application, which is mainly  
553 considered probable for inlets located in the fields.

554 Although maintenance manholes were also found to discharge to surface waters directly or via WWTPs, their  
555 occurrence does not directly translate into a risk for pesticide transport to surface waters. In contrast to storm  
556 drainage inlets, maintenance manholes are not designed to collect surface runoff. Their lids are usually closed or  
557 only have a small opening, significantly decreasing the risk of surface runoff entering the manhole or of  
558 overspraying. In addition, lids of maintenance manholes in fields are often elevated compared to the soil surface.  
559 Maintenance manholes on roads are (in contrast to inlets) usually positioned such that concentrated surface  
560 runoff is bypassing them. However, as also shown by Doppler et al. (2012), maintenance manholes can collect  
561 surface runoff from fields if they are located in a sink or a thalweg and water is ponding above them during rain  
562 events. During our field mapping campaign, we additionally found several damaged maintenance manholes that  
563 could easily act as a shortcut.

564 Channel drains and ditches discharging into surface waters were rare in most study areas with two exceptions. In  
565 Meyrin, the large length of these structures can be explained by the existence of a large vineyard. Additionally,  
566 the density of manholes in this vineyard was higher than on the surrounding arable land. This indicates that  
567 vineyards could generally have higher shortcut densities than arable land. In Buchs, around 60 % of the channel  
568 drain and ditch length consists of ditches that cannot be clearly distinguished from small streams. They are not  
569 appearing in the national topographic landscape model (Swisstopo, 2010) that was used for the definition of  
570 rivers and streams and did not appear to be streams during field mapping or when analysing aerial images.

571 The number of mapped shortcuts represents a lower boundary estimate of the shortcuts present (see results) and  
572 therefore leads to an underestimation of indirect connectivity. Probabilities for missing shortcuts during our  
573 mapping campaign depend on their location. While aerial images were at almost full coverage of the study areas,  
574 field mapping was performed mainly along roads. Drainage plans were available more often along roads than on  
575 fields. Therefore, we expect that detection probability of shortcuts is generally higher along roads than on fields.  
576 Besides coverage, various other factors influence the detection probabilities of the mapping methods. Field  
577 mapping and aerial image detection performance is reduced if shortcuts are covered. Along roads, this is mainly  
578 caused by leaves, soil, and for aerial images also by trees and vehicles. On the fields, this is mainly caused by  
579 soil or by crops. Detection performance of the aerial images method is additionally influenced by image quality  
580 and ground resolution. Image quality is mainly influenced by wind and light conditions during the UAV flights.  
581 In order to ensure high image quality, we planned UAV flights such that weather conditions were favourable  
582 (low wind, slightly overcast). However, differences in image quality between the study areas could not be  
583 completely avoided. Higher ground resolution could further improve the data produced. Although detection  
584 performance is not expected to be limited by the ground resolution used, higher resolution could improve the  
585 correct classification of shortcut types.

#### 586 **Surface runoff connectivity**

587 Our study suggests that around half of the surface runoff connectivity in our study areas, but also on the national  
588 scale, is generated by hydraulic shortcuts. Surface runoff is considered one of the most important processes for  
589 pesticide transport to surface waters. Consequently, a large amount of the pesticide loads found in surface waters  
590 during rain events is expected to be transported by hydraulic shortcuts. These findings are in accordance to the  
591 results of other studies investigating the influence of hydraulic shortcuts on surface runoff connectivity (Alder et al.  
592 et al., 2015;Prasuhn and Grünig, 2001;Bug and Mosimann, 2011) and on pesticide transport (Doppler et al., 2012).

593 The fraction of indirect connectivity was found to be very different between study areas. The variability  
594 introduced by the different properties of the study areas was larger than the variability introduced by the different  
595 model parameters of the Monte Carlo analysis, indicating that our results are robust against changes of our  
596 model parameters. Our model was most sensitive to changes of the parameters *road carving depth*, *shortcut*  
597 *definition*, and *sink depth*. These parameters are discussed in the following.

598 The parameter *road carving depth* accounts for the property of roads of collecting and concentrating surface  
599 runoff. This effect is strongly dependent on microtopography, extremely variable in space, and can therefore not  
600 be properly accounted for by a space-independent parameter. Usage of a higher resolved digital elevation model

601 could however reduce the uncertainty on the effect of roads on connectivity. Higher resolved digital elevation  
602 models could also help in capturing the influence of other microtopographical features better. For example, small  
603 ditches or small elevations on the ground can easily channel surface runoff. This can either direct surface runoff  
604 into a shortcut from areas not modelled to drain to a shortcut, or vice versa. In Switzerland, a new digital  
605 elevation model with a raster resolution of 0.5 m (Swisstopo, 2019) recently became available and could be used  
606 for this purpose. This elevation model was not used within this study, since the study already had progressed  
607 further by the time the dataset was published.

608 The model parameters *shortcut definition* (i.e. are maintenance manholes in a sink considered as a shortcut) and  
609 *sink depth* are both related to the fate of surface runoff ponding in a sink. This indicates that maintenance  
610 manholes in sinks could have an important influence on surface runoff connectivity of agricultural areas. During  
611 our field mapping campaign, only few maintenance manholes in sinks were investigated. It is therefore unclear if  
612 most maintenance manholes in sinks are capturing ponding surface runoff, if surface runoff is usually infiltrating  
613 into the soil, or if it continues to flow on the surface. Sensitivity of our model to the parameter *sink depth*  
614 additionally indicates that sinks might play an important role for connectivity. Therefore, they should not be  
615 filled completely during GIS analyses, as this is done by default by some flow routing algorithms.

616 Surface runoff is usually assumed to drain to the receiving water of its topographical catchment. However, in  
617 various cases, the pipes draining hydraulic shortcuts were found to cross topographical catchment boundaries.  
618 Consequently, surface runoff and related pesticide loads are transported to a different receiving water than  
619 expected by the topographical catchment. This may be important to consider when interpreting pesticide  
620 monitoring data from small catchments. Similar effects were already reported for karstic aquifers or the storm  
621 drainage systems of urban areas (Jankowfsky et al., 2013; Luo et al., 2016).

## 622 **Hydrological activity**

623 We did not find any indication on systematic differences between the factors controlling hydrological activities  
624 of directly and indirectly connected agricultural areas by analysing slope and topographic wetness index. Those  
625 variables are a proxy for surface runoff formation, soil moisture, groundwater level, but also physical properties  
626 of the soil (Sorensen et al., 2006; Ayele et al., 2020). However, the hydrological activity of an agricultural area  
627 also depends on other factors that were not quantitatively analysed, such as *rainfall intensities, crop types, soil*  
628 *management practices*, or the presence of *tile drainage systems*.

629 *Rainfall intensities*: Because of the small size of the study areas and the close proximity between directly and  
630 indirectly connected areas, systematic differences in rainfall intensities within a catchment can be excluded.

631 *Crop types and soil management* can have a strong impact on runoff formation. These practices are chosen by  
632 the farmers and there could be systematic differences of these variables. For example, farmers aware of the effect  
633 of surface runoff and erosion on the pollution of surface waters might use different cultivation methods or crops  
634 (e.g. conservation tillage) on fields close to surface waters than on fields far away. This would lead to a higher  
635 probability of surface runoff formation on indirectly connected areas compared to directly connected areas.  
636 However, different cultivation methods require different farm machinery. Therefore, cultivation methods are  
637 often constrained by the machinery available and farmers use the same cultivation method per crop for all of  
638 their fields. Consequently, systematic differences in crop types or soil management between directly and  
639 indirectly connected areas of a catchment are unlikely.

640 *Tile drainage systems*: Maintenance manholes and inlets found in the field often belong to a tile drainage system.  
641 Therefore, fields on which maintenance manholes or inlets are located, have a higher probability to be drained by  
642 tile drainage systems than other fields. This could lead to higher infiltration capacities and consequently to  
643 reduced surface runoff on indirectly connected areas compared to directly connected areas. However, since most  
644 of the inlets and manholes are located along roads (see results) such differences would only have a minor effect  
645 on the overall surface runoff connectivity.

646 Although rainfall intensities, crop types, or soil management practices, are not expected to differ systematically  
647 within a catchment, they do differ across catchments. As mentioned in the results, we therefore expect the  
648 proportion of directly connected areas to indirectly connected areas in a catchment to be a good indicator for the  
649 proportion of surface runoff formed on directly and indirectly connected areas in this catchment. However, due  
650 to differences in hydrological activity, two catchments with similar total connected areas may differ strongly in  
651 the total amount of surface runoff formed.

## 652 **Extrapolation to the national level**

653 A major source of uncertainty in the national erosion connectivity model (NECM) is the usage of generalising  
654 assumptions due to lack of empirical data. Our results show that some of the estimated connectivity fractions of  
655 crop areas change significantly, when the NECM is transformed based on additional empirical data from our  
656 field study. However, the results of both models still are in the same order of magnitude and lead to the same  
657 general conclusion: At the national level, more than half of the connected crop area is connected to surface

658 waters via hydraulic shortcuts, as we observed for the 20 study catchments. As shown in the results, large  
659 differences between the NECM and the NSCM in the predictions of crop area connectivity are almost  
660 exclusively found in one band of catchments with high cropping densities in the Swiss midland. Potential further  
661 empirical investigations or improvements of the NECM should therefore focus on a better representation of these  
662 catchments.

663 However, it is important to note, that within this study none of the models (NECM, LSCM, and NSCM) has been  
664 tested and validated empirically with independent data regarding their actual capacity to quantify the  
665 connectivity effects on surface runoff and related pesticide transport. These models provide predictions given the  
666 current availability of empirical observations. Suggestions for validating these models are given in the “further  
667 research” section.

668 From all tested variables, the NECM connectivity fractions showed the strongest correlations to the connectivity  
669 fractions reported by the local connectivity model (LSCM) in our study areas. This suggests that the NECM is a  
670 useful tool for assessing potential pesticide connectivity in relative terms (e.g. which catchments have high  
671 indirect connectivity compared to other catchments). Therefore, we recommend continuing to use the NECM in  
672 practice, e.g. as a starting point for identifying “hotspot” catchments of direct or indirect connectivity. Since the  
673 model results are not validated with independent data, they should always be combined with a verification in the  
674 field.

675 For creating the NSCM, all crop areas on which pesticides are commonly applied (arable land, vineyards,  
676 orchards, horticulture) were assumed to contribute by the same amount to the pesticide transport via surface  
677 runoff. However, these crop types are known to differ in the amounts of pesticide applied (De Baan et al., 2015),  
678 in the amounts of surface runoff produced, and also with respect to their connectivity to surface waters. This  
679 assumption could therefore be refined by considering pesticide application data and by investigating surface  
680 runoff connectivity in vineyards, orchards and horticulture in more detail.

### 681 **Relevance in a broader geographical context**

682 This study focussed on the relevance of hydraulic shortcuts in Switzerland. To our knowledge, no studies have  
683 systematically analysed the occurrence of hydraulic shortcuts in other countries. Nevertheless, the available  
684 literature suggests that in some regions such man-made structures like roads, pipes, or ditches are important for  
685 connecting fields with the stream network. For example, this was reported in the regions Alsace (FR) (Lefrancq  
686 et al., 2013), Lower Saxony (DE) (Bug and Mosimann, 2011), Baden-Wuerttemberg (DE) (Gassmann et al.,



687 2012), or Rhineland-Palatinate (DE) (Rübel, 1999). Based on our findings, we hypothesise that shortcuts are  
688 mainly important in areas with small field sizes. This increases the density of linear structures such as roads for  
689 access.

## 690 **Implications for practice**

691 In Swiss plant protection<sup>1</sup> legislation and authorisation, the effect of hydraulic shortcuts on pesticide transport is  
692 currently not considered. Pesticide application is prohibited within a buffer of 3 m along open water bodies and  
693 according to the Swiss proof of ecological performance (PEP) vegetated buffer strip have to at least 6 m wide. In  
694 contrast, along roads, a buffer of only 0.5 m is required. Hence, the current Swiss legislation is protecting surface  
695 waters against direct, but not against indirect transport. This contrasts with the results of this study, suggesting  
696 that approximately half of the surface runoff related pesticide transport is occurring indirectly. This implies that  
697 there is evidence of a systematic gap in understanding and regulating pesticide risk at the national scale. The  
698 same gap was already pointed out by Alder et al. (2015) for soil erosion. However, beyond anecdotal evidence  
699 (e.g. Doppler et al. (2012)), this gap has not yet been validated with independent measurements of surface runoff  
700 and pesticide transport in the field.

701 While there remain important scientific questions about the validation of the suggested gap, authorities may wish  
702 to decide on mitigation measures despite such uncertainties. We therefore elaborate on potential mitigation  
703 measures in the following.

704 The most evident measure based on the current legislation are vegetated buffer strips along drained roads and  
705 around hydraulic shortcuts, infiltrating surface runoff before it reaches a shortcut. Generally, measures  
706 increasing infiltration capacity on the field would reduce pesticide transport. Other measures could aim on the  
707 shortcut structures themselves (e.g. construction of shortcuts as small infiltration basins, removal of shortcuts, or  
708 treatment of water in shortcuts) or on the pipe outlets (e.g. drainage of shortcuts to infiltration basins, treatment  
709 of water at the pipe outlet).

710 Finally, pesticide transport via hydraulic shortcuts could be incorporated into the registration procedure and be  
711 considered for the mandatory mitigation measures that go with a registration. Models used in this context are

---

<sup>1</sup> In this study, we have been using the general term “pesticides” instead of “plant protection products” to make the text more readable. Since we only looked at substances used for plant protection in an agricultural context, the term “plant protection products” would have been more precise. The term “pesticides”, however, also includes “biocides” which are substances for control of plants or animals used in a non-agricultural context and were not subject of this study. The substances addressed in this study are regulated in the Swiss plant protection legislation and authorisation.

712 currently only considering transport via direct surface runoff, erosion, tile drainages, and spray drift (De Baan,  
713 2020).

#### 714 **Further research**

715 *Model validation.* The model estimations presented here can give insight on pesticide transport via hydraulic  
716 shortcuts on the catchment and the national scale. However, as pointed out above, these models lack a field  
717 validation with independent measurements on flow and pesticide transport. In the following, we suggest  
718 validation approaches to overcome this limitation.

719 In our opinion, a validation of the local surface runoff connectivity model is ideally performed by measuring  
720 runoff and pesticide transport in a set of different small catchments. This should be done along a gradient of  
721 ratios between indirectly to directly connected areas (see Figure 6). Ideally, the catchments should be similar  
722 with respect to their structure (e.g. size, stream length, slope, land use, climate, or soil properties). Signals  
723 measured at the catchment outlet are always a superposition of different flow pathways. Therefore, runoff and  
724 pesticide transport through hydraulic shortcuts cannot be directly measured at the catchment outlet. To  
725 disentangle transport through hydraulic shortcuts from other pathways we foresee two different approaches.

726 The first approach aims on observing flow and transport within a catchment at locations where an unambiguous  
727 differentiation between the flow paths is possible. For example, hydraulic shortcuts in a catchment could be  
728 equipped with a discharge measurement and a water sampler. Such a setup would allow to determine the  
729 proportion of total catchment runoff and pesticide load that is transported via hydraulic shortcuts. In addition,  
730 isotopic tracers and runoff separation techniques could be used to determine the total amount of surface runoff  
731 contributing to catchment runoff. If the model is valid, the ratio of measured direct to measured indirect surface  
732 runoff should be proportional to the ratio of directly to indirectly connected areas. Additionally, these  
733 measurements could be used to improve the parametrisation of the local connectivity model.

734 However, due to the large numbers of measurement locations needed, the above-mentioned validation approach  
735 would be very laborious. The second validation approach therefore aims on disentangling transport through  
736 hydraulic shortcuts while only measuring at the catchment outlet of a set of catchments. For the interpretation of  
737 the local connectivity model, we assumed that direct and indirect surface runoff are proportional to the directly  
738 and indirectly connected area. If this assumption is valid, more surface runoff should reach the stream in  
739 catchments with larger fractions of connected areas. Consequently, in such catchments, runoff coefficients  
740 should be higher during discharge events that are predominantly triggered by Hortonian overland flow such as

741 intensive thunderstorms. For these events, uncertainties introduced by different subsurface properties of the  
742 catchments play a minor role compared to other events. Furthermore, if a set of catchments has similar fractions  
743 of directly connected area, but different fractions of indirectly connected area, larger runoff coefficients should  
744 be measured in catchments with larger fractions of indirectly connected area.

745 If the local connectivity model proves valid on the catchment scale, the question would be how to improve on  
746 the spatial extrapolation to the national scale. Except for the occurrence of hydraulic shortcuts, all input data for  
747 the local connectivity model are available on this larger scale as well. Therefore, the local connectivity model  
748 can easily be extended to much larger scales if the occurrence of hydraulic shortcuts is known. However, the  
749 shortcut mapping procedure used in this study is time-consuming. Thus, to efficiently map shortcuts on larger  
750 scales, automated algorithms for inlet localization using remote sensing data could be used (e.g. Mattheuwsen  
751 and Vergauwen (2020), Moy de Vitry et al. (2018)). An application of the local connectivity model to larger  
752 scales could then replace the extrapolation approach used in this study, eliminating the associated uncertainty.

753 *Shortcuts in vineyards.* Our results (i.e. Meyrin and additional field observations) suggest that the presence of  
754 hydraulic shortcuts as well as the fraction of indirectly connected areas are higher in vineyards than on arable  
755 land. Since this study focused mainly on the latter, the sample size was too small for a quantitative analysis of  
756 vineyards. The fact that Swiss vineyards usually have high road densities points into the same direction. In Swiss  
757 vineyards, pesticides are applied more often and in larger amounts than on arable land (De Baan et al., 2015).  
758 Therefore, an assessment of hydraulic shortcut relevance in vineyards is needed.

759 *Spray drift on roads.* Hydraulic shortcuts are not only collecting surface runoff from target areas, but also from  
760 non-target areas such as roads. As shown by Lefrancq et al. (2013), large amounts of spray drift can be deposited  
761 on roads. These deposits are expected to be washed off during rain events and to be transported to surface waters  
762 via hydraulic shortcuts. Further research is needed to quantify the relevance of this process for pesticide  
763 pollution in streams.

764 *Hydrological activity.* In our discussion on the hydrological activity (see above), we explained that systematic  
765 differences in hydrological activity are unlikely within a catchment, but are expected across catchments. Further  
766 research should aim on quantifying the differences in hydrological activity across catchments and their influence  
767 on runoff formation. Some of the datasets that could serve such a comparison are available on the national scale  
768 (e.g. map of tile drainage potential (Koch and Prasuhn, 2020), or rainfall statistics (e.g. Frei et al. (2018)). Other

769 datasets are currently being developed (e.g. a national plot-specific crop type dataset) or have to be developed  
770 (e.g. national soil maps).

771 **5. Conclusions**

772 Our study shows that hydraulic shortcuts are common structures found in Swiss arable land areas of the Swiss  
773 plateau. Shortcuts are found mainly along roads, but also directly in the field. The analyses suggests that on  
774 average, around half of the surface runoff connectivity on Swiss arable land is caused by hydraulic shortcuts.  
775 Further analyses on hydrological activity and crop density suggest that the same proportion of surface runoff and  
776 related pesticide load is transported to surface waters through hydraulic shortcuts. This statement holds for both,  
777 the selected study catchments, and the whole country. However, in Swiss pesticide legislation and pesticide  
778 authorisation, hydraulic shortcuts are currently not considered. Therefore, current regulations may fall short to  
779 address the full extent of the problem.

780 The field data acquired in this study suggest that the national erosion connectivity model (NECM) is a useful  
781 tool for relatively comparing potential pesticide connectivity between catchments. However, the results also  
782 show that additional field data significantly changed the reported connectivity fractions and improved the model  
783 reliability.

784 Overall, the findings highlight the relevance of better understanding the connectivity between fields and the  
785 receiving water, as well as the underlying factors and physical structures in the landscape. The model results of  
786 this study lack a validation with field measurements on actual water flow and pesticide transport in hydraulic  
787 shortcuts. This should be addressed in further research. Propositions for such validations are presented in the  
788 discussion section.

789 This study focused on the contribution of hydraulic shortcuts to surface runoff connectivity and related pesticide  
790 transport on arable land. However, for other crop types, the contribution of shortcuts is expected to be different.  
791 Especially in vineyards, we expect a higher contribution due to their spatial structure (e.g. high road densities, or  
792 steep slopes) and due to higher pesticide use.

793 **6. Code availability**

794 If the manuscript is accepted, the following code will be made available via <https://opendata.eawag.ch/> (FAIR  
795 repository):

- 796 • Code for random selection of study areas
- 797 • Code for definition of agricultural areas

798 **7. Data availability**

799 If the manuscript is accepted, the following datasets will be made available via <https://opendata.eawag.ch/> (FAIR  
800 repository):

- 801 • Study areas (GIS dataset)
- 802 • Aerial images
- 803 • Shortcut locations (GIS dataset)
- 804 • Estimated fractions of directly and indirectly connected areas for all catchments in valley zones, hill  
805 zones and lower elevation mountain zones (results of the NSCM model)

806 **8. Team list**

807 Urs Schönenberger, Christian Stamm

808

809 **9. CRediT author contribution statement**

810 **Urs Schönenberger:** Conceptualization, Methodology, Investigation, Formal analysis, Software, Data  
811 curation, Writing - original draft, Visualization

812 **Christian Stamm:** Conceptualization, Methodology, Writing - review & editing, Funding acquisition

813

814 **10. Competing interests**

815 Author Christian Stamm is a member of the editorial board of the HESS journal.

816

817 **11. Acknowledgements**

818 The authors would like to thank Michael Döring, Diego Tonolla, and Matthew Moy de Vitry for the help  
819 regarding UAV operation. We would like to thank Volker Prasuhn for the feedback provided to our research  
820 approach, Andreas Scheidegger for his help regarding statistical modelling, and Max Maurer for reviewing this  
821 manuscript. Furthermore, we would like to thank all municipalities, cantons, cooperative associations, and  
822 engineering offices that provided drainage plans for this study. Finally, we want to thank the federal office of the  
823 environment for the funding of this work (contract 00.0445.PZ I P293-1032).

824 **References**

- 825 Accinelli, C., Vicari, A., Pisa, P. R., and Catizone, P.: Losses of atrazine, metolachlor, prosulfuron and  
826 triasulfuron in subsurface drain water. I. Field results, *Agronomie*, 22, 399-411, doi: 10.1051/agro:2002018,  
827 2002.
- 828 Alder, S., Prasuhn, V., Liniger, H., Herweg, K., Hurni, H., Candinas, A., and Gujer, H. U.: A high-resolution  
829 map of direct and indirect connectivity of erosion risk areas to surface waters in Switzerland-A risk assessment  
830 tool for planning and policy-making, *Land Use Policy*, 48, 236-249, doi: 10.1016/j.landusepol.2015.06.001,  
831 2015.
- 832 Ammann, L., Doppler, T., Stamm, C., Reichert, P., and Fenicia, F.: Characterizing fast herbicide transport in a  
833 small agricultural catchment with conceptual models, *J Hydrol*, 586, doi: 10.1016/j.jhydrol.2020.124812, 2020.
- 834 Ayele, G. T., Demissie, S. S., Jemberrie, M. A., Jeong, J., and Hamilton, D. P.: Terrain Effects on the Spatial  
835 Variability of Soil Physical and Chemical Properties, *Soil Syst*, 4, doi: 10.3390/soilsystems4010001, 2020.
- 836 BAFU: Topographical catchment areas of Swiss waterbodies 2 km<sup>2</sup>, Bundesamt für Umwelt, 2012.
- 837 Beketov, M. A., Kefford, B. J., Schafer, R. B., and Liess, M.: Pesticides reduce regional biodiversity of stream  
838 invertebrates, *P Natl Acad Sci USA*, 110, 11039-11043, doi: 10.1073/pnas.1305618110, 2013.
- 839 Beven, K. J., and Kirkby, M. J.: A physically based, variable contributing area model of basin hydrology,  
840 *Hydrological Sciences Bulletin*, 24, 43–69, doi: 10.1080/02626667909491834, 1979.
- 841 BFS: Swiss Land Use Statistics – Nomenclature 2004, Bundesamt für Statistik, 2014.
- 842 Bug, J., and Mosimann, T.: Modellierung des Gewässeranschlusses von erosionsaktiven Flächen, *Naturschutz  
843 und Landschaftsplanung*, 43, 77–84, 2011.
- 844 Bunzel, K., Liess, M., and Kattwinkel, M.: Landscape parameters driving aquatic pesticide exposure and effects,  
845 *Environ Pollut*, 186, 90-97, doi: 10.1016/j.envpol.2013.11.021, 2014.
- 846 Carlsen, S. C. K., Spliid, N. H., and Svensmark, B.: Drift of 10 herbicides after tractor spray application. 2.  
847 Primary drift (droplet drift), *Chemosphere*, 64, 778–786, doi: 10.1016/j.chemosphere.2005.10.060, 2006.
- 848 Carluer, N., and De Marsily, G.: Assessment and modelling of the influence of man-made networks on the  
849 hydrology of a small watershed: implications for fast flow components, water quality and landscape  
850 management, *J Hydrol*, 285, 76-95, doi: 10.1016/j.jhydrol.2003.08.008, 2004.
- 851 De Baan, L.: Sensitivity analysis of the aquatic pesticide fate models in SYNOPSIS and their parametrization for  
852 Switzerland, *Sci Total Environ*, 715, doi: 10.1016/j.scitotenv.2020.136881, 2020.
- 853 De Baan, L., Spycher, S., and Daniel, O.: Einsatz von Pflanzenschutzmitteln in der Schweiz von 2009 bis 2012,  
854 *Agrarforsch Schweiz+*, 6, 45-55, 2015.
- 855 Dehotin, J., Breil, P., Braud, I., de Lavenne, A., Lagouy, M., and Sarrazin, B.: Detecting surface runoff location  
856 in a small catchment using distributed and simple observation method, *J Hydrol*, 525, 113-129, doi:  
857 10.1016/j.jhydrol.2015.02.051, 2015.
- 858 Doppler, T., Camenzuli, L., Hirzel, G., Krauss, M., Lück, A., and Stamm, C.: Spatial variability of herbicide  
859 mobilisation and transport at catchment scale: insights from a field experiment, *Hydrol Earth Syst Sc*, 16, 1947-  
860 1967, doi: 10.5194/hess-16-1947-2012, 2012.
- 861 Dosskey, M. G., Eisenhauer, D. E., and Helmers, M. J.: Establishing conservation buffers using precision  
862 information, *J Soil Water Conserv*, 60, 349-354, 2005.
- 863 Etat de Genève: Orthophotos 2016 (5cm) hivers, Etat de Genève – Direction de l’information du territoire, 2016.
- 864 Fiener, P., Auerswald, K., and Van Oost, K.: Spatio-temporal patterns in land use and management affecting  
865 surface runoff response of agricultural catchments-A review, *Earth-Sci Rev*, 106, 92-104, doi:  
866 10.1016/j.earscirev.2011.01.004, 2011.
- 867 Switzerland, H. A. o.: Mean Precipitation 1981-2010, *Hydrological Atlas of Switzerland*, 2018.
- 868 Gassmann, M., Lange, J., and Schuetz, T.: Erosion modelling designed for water quality simulation,  
869 *Ecohydrology*, 5, 269-278, doi: 10.1002/eco.207, 2012.
- 870 Gomides Freitas, L., Singer, H., Müller, S. R., Schwarzenbach, R. P., and Stamm, C.: Source area effects on  
871 herbicide losses to surface waters - A case study in the Swiss Plateau, *Agriculture, Ecosystems and Environment*,  
872 128, 177-184, doi: 10.1016/j.agee.2008.06.014, 2008.



- 873 Heathwaite, A. L., Quinn, P. F., and Hewett, C. J. M.: Modelling and managing critical source areas of diffuse  
874 pollution from agricultural land using flow connectivity simulation, *J Hydrol*, 304, 446-461, doi:  
875 10.1016/j.jhydrol.2004.07.043, 2005.
- 876 Holvoet, K. M. A., Seuntjens, P., and Vanrolleghem, P. A.: Monitoring and modeling pesticide fate in surface  
877 waters at the catchment scale, *Ecol Model*, 207, 53-64, doi: 10.1016/j.ecolmodel.2007.07.030, 2007.
- 878 Jankowfsky, S., Branger, F., Braud, I., Gironas, J., and Rodriguez, F.: Comparison of catchment and network  
879 delineation approaches in complex suburban environments: application to the Chaudanne catchment, France,  
880 *Hydrol Process*, 27, 3747-3761, doi: 10.1002/hyp.9506, 2013.
- 881 Orthofoto des Kantons Zürich Sommer RGB 2014/15, Kanton Zürich, Amt für Raumentwicklung, 2015.
- 882 Bern, G. I. d. U.: Mean Annual Corrected Precipitation Depths 1951-1980, Bundesamt für Landestopographie,  
883 1992.
- 884 Koch, U., and Prasuhn, V.: Drainagekarte Schweiz : Erstellung einer Karte potentiell drainierter Flächen in der  
885 Schweiz mittels «Machine Learning». *Agroscope Science*, 104, 1–121, doi: 10.34776/as104g, 2020.
- 886 Larsbo, M., Sandin, M., Jarvis, N., Etana, A., and Kreuger, J.: Surface Runoff of Pesticides from a Clay Loam  
887 Field in Sweden, *J Environ Qual*, 45, 1367-1374, doi: 10.2134/jeq2015.10.0528, 2016.
- 888 Lefrancq, M., Imfeld, G., Payraudeau, S., and Millet, M.: Kresoxim methyl deposition, drift and runoff in a  
889 vineyard catchment, *Sci Total Environ*, 442, 503-508, doi: 10.1016/j.scitotenv.2012.09.082, 2013.
- 890 Lefrancq, M., Jadas-Hecart, A., La Jeunesse, I., Landry, D., and Payraudeau, S.: High frequency monitoring of  
891 pesticides in runoff water to improve understanding of their transport and environmental impacts, *Sci Total*  
892 *Environ*, 587, 75-86, doi: 10.1016/j.scitotenv.2017.02.022, 2017.
- 893 Leu, C., Singer, H., Stamm, C., Müller, S. R., and Schwarzenbach, R. P.: Simultaneous Assessment of Sources,  
894 Processes, and Factors Influencing Herbicide Losses to Surface Waters in a Small Agricultural Catchment,  
895 *Environ Sci Technol*, 38, 3827-3834, doi: 10.1021/es0499602, 2004a.
- 896 Leu, C., Singer, H., Stamm, C., Müller, S. R., and Schwarzenbach, R. P.: Variability of Herbicide Losses from  
897 13 Fields to Surface Water within a Small Catchment after a Controlled Herbicide Application, *Environ Sci*  
898 *Technol*, 38, 3835-3841, doi: 10.1021/es0499593, 2004b.
- 899 Loague, K., Corwin, D. L., and Ellsworth, A. T.: Feature: the challenge of predicting nonpoint source pollution,  
900 *Environ Sci Technol*, 32, 130A-133A, doi: 10.1021/es984037j, 1998.
- 901 Luo, G. J., Wang, S. J., Bai, X. Y., Liu, X. M., and Cheng, A. Y.: Delineating small karst watersheds based on  
902 digital elevation model and eco-hydrogeological principles, *Solid Earth*, 7, 457-468, doi: 10.5194/se-7-457-2016,  
903 2016.
- 904 Malaj, E., von der Ohe, P. C., Grote, M., Kuhne, R., Mondy, C. P., Usseglio-Polatera, P., Brack, W., and  
905 Schafer, R. B.: Organic chemicals jeopardize the health of freshwater ecosystems on the continental scale, *P Natl*  
906 *Acad Sci USA*, 111, 9549-9554, doi: 10.1073/pnas.1321082111, 2014.
- 907 Matsumoto, M., and Nishimura, T.: Mersenne Twister: A 623-Dimensionally Equidistributed Uniform Pseudo-  
908 Random Number Generator, *ACM T Model Comput S*, 8, 3-30, doi: 10.1145/272991.272995, 1998.
- 909 Mattheuwsen, L., and Vergauwen, M.: Manhole Cover Detection on Rasterized Mobile Mapping Point Cloud  
910 Data Using Transfer Learned Fully Convolutional Neural Networks, *Remote Sens-Basel*, 12, doi:  
911 10.3390/rs12223820, 2020.
- 912 Moy de Vitry, M., Schindler, K., Rieckermann, J., and Leitao, J. P.: Sewer Inlet Localization in UAV Image  
913 Clouds: Improving Performance with Multiview Detection, *Remote Sens-Basel*, 10, doi: 10.3390/rs10050706,  
914 2018.
- 915 Payraudeau, S., Junker, P., Imfeld, G., and Gregoire, C.: Characterizing hydrological connectivity to identify  
916 critical source areas for pesticides losses, 18th World Imacs Congress and Modsim09 International Congress on  
917 Modelling and Simulation, 1879-1885, 2009.
- 918 Pionke, H. B., Gburek, W. J., Sharpley, A. N., and Schnabel, R. R.: Flow and nutrient export patterns for an  
919 agricultural hill-land watershed, *Asae Publ*, 95, 167-170, doi: 10.1029/96WR00637, 1995.
- 920 Prasuhn, V., and Grünig, K.: Evaluation der Ökomassnahmen - Phosphorbelastung der Oberflächengewässer  
921 durch Bodenerosion, *Schriftenreihe der FAL*, 37, 1-152, 2001.

- 922 Reichenberger, S., Bach, M., Skitschak, A., and Frede, H. G.: Mitigation strategies to reduce pesticide inputs  
 923 into ground- and surface water and their effectiveness; A review, *Sci Total Environ*, 384, 1-35, doi:  
 924 10.1016/j.scitotenv.2007.04.046, 2007.
- 925 Rübél, A.: Eintrag von Pflanzenschutzmitteln in Oberflächengewässer durch den Weinbau in Steillagen, PhD,  
 926 Abteilung Hydrologie, Universität Trier, 176 pp., 1999.
- 927 Sandin, M., Piikki, K., Jarvis, N., Larsbo, M., Bishop, K., and Kreuger, J.: Spatial and temporal patterns of  
 928 pesticide concentrations in streamflow, drainage and runoff in a small Swedish agricultural catchment, *Sci Total*  
 929 *Environ*, 610, 623-634, doi: 10.1016/j.scitotenv.2017.08.068, 2018.
- 930 Schultz, R. C., Isenhardt, T. M., Simpkins, W. W., and Colletti, J. P.: Riparian forest buffers in agroecosystems -  
 931 lessons learned from the Bear Creek Watershed, central Iowa, USA, *Agroforest Syst*, 61, 35-50, doi:  
 932 10.1023/B:AGFO.0000028988.67721.4d, 2004.
- 933 Schulz, R.: Comparison of spray drift- and runoff-related input of azinphos-methyl and endosulfan from fruit  
 934 orchards into the Lourens River, South Africa, *Chemosphere*, 45, 543-551, 2001.
- 935 Sorensen, R., Zinko, U., and Seibert, J.: On the calculation of the topographic wetness index: evaluation of  
 936 different methods based on field observations, *Hydrol Earth Syst Sc*, 10, 101-112, doi: 10.5194/hess-10-101-  
 937 2006, 2006.
- 938 Stehle, S., and Schulz, R.: Agricultural insecticides threaten surface waters at the global scale, *P Natl Acad Sci*  
 939 *USA*, 112, 5750-5755, doi: 10.1073/pnas.1500232112, 2015.
- 940 Sweeney, B. W., and Newbold, J. D.: Streamside Forest Buffer Width Needed to Protect Stream Water Quality,  
 941 Habitat, and Organisms: A Literature Review, *J Am Water Resour As*, 50, 560-584, doi: 10.1111/jawr.12203,  
 942 2014.
- 943 Swisstopo: swissTLM3D – The Topographic Landscape Model, Federal Office of Topography, doi:  
 944 [10.5169/seals-236706](https://doi.org/10.5169/seals-236706), 2010.
- 945 Swisstopo: swissALTI3D – The high precision digital elevation model of Switzerland, Federal Office of  
 946 Topography, 2018.
- 947 Swisstopo: swissALTI3D – The high precision digital elevation model of Switzerland, Federal Office of  
 948 Topography, 2019.
- 949 Tarboton, D. G.: A new method for the determination of flow directions and upslope areas in grid digital  
 950 elevation models, *Water Resour Res*, 33, 309-319, doi: 10.1029/96wr03137, 1997.
- 951 Vischetti, C., Cardinali, A., Monaci, E., Nicelli, M., Ferrari, F., Trevisan, M., and Capri, E.: Measures to reduce  
 952 pesticide spray drift in a small aquatic ecosystem in vineyard estate, *Sci Total Environ*, 389, 497-502, doi:  
 953 10.1016/j.scitotenv.2007.09.019, 2008.

954