

Response to Referees (and additional comment in HESSD)

Note that Line Numbers refer to the version with Tracked Changes rather than the clean version.

Francesc Gallart (Referee)

francesc.gallart@idaea.csic.es

Received and published: 31 August 2020

First of all, I want to congratulate the authors and appreciate their keenness in writing this nice article. It is sensibly short and easy to read and, although I already knew part of this history, I learned or consolidated many aspects of it published in media not always easy to get. The manuscript includes not only most of the TOPMODEL developments but also several criticisms it received during this already long history, in a frank and friendly style.

I have some suggestions to include or enlarge comments on issues that arise from my experiences. I also include a list of typos to be corrected.

- Scale dependence of the topographic index. This issue is mentioned in line 375, but the writing used is not sufficiently explicit, so readers that do not know this effect might miss the message.

- Topographic index used with too large areas or mesh sizes. The topographic index is designed for hillslope hydrology, so when it is applied to an area large enough to include channels, it may take very high values that fall out of its intended physical sense (Quinn et al., 1995a). Likewise, when the index is calculated with a mesh size that is large enough to include channels, the physical sense is also lost. These issues seem to be indirectly mentioned after line 745, but I deem that they deserve a more explicit comment.

The discussion of this has now been expanded in a paragraph starting at L398.

- Negative values of deficit. During wet periods, local saturation deficits may take negative values in saturated areas and even the mean catchment deficit may become negative (Saulnier and Datin, 2004). Although this behaviour is not an issue for the application of the model, it compromises its physical soundness and therefore should deserve some comment in the paper.

Text has been added starting at L142ff.

- Value of TOPMODEL for teaching. While I understand that this is not the purpose of the paper, I wonder if some comment on TOPMODEL value for teaching could be included. I agree that its relative simplicity means that it can be riskily used as passe-partout conceptual scheme for areas that do not meet the key assumptions, as it happened with the models based on the precipitation excess process. But if this risk is bounded, according to my experience, one of the strengths of TOPMODEL for teaching is its usefulness to exemplify the model parameter compensation and equifinality issues, as well as the consequent principle that a good flow efficiency of a model does not mean that it works for the right reasons. The paragraph starting at line 525 is a superb example of these questions, how field observations can be used for their amendment and the lessons that not just KB but every one of us can learn.

A paragraph has been added at L329

Minor comments:

- Line 149: the abbreviation BK79 is used before it is defined in line 182. Done

- Line 298: "Rigelbach" should be Ringelbach. **Done**
- Line 649: "Staring" should be starting. **Done**
- Line 777: "Disretisation" should be discretisation. **Done**
- Line 816: "Frances" should be Francesc **Done**
- Line 817: "Kulusova, Jerome Latron, Pilar, Llorens" should be Kulasova, Jérôme Latron, Pilar Llorens. **Done**
- Line 1089: "Leibendgut" should be Leibundgut. **Done**
- Line 1324: "Bloschl" should be Blöschl **Done**

Dave Milledge (Referee)

david.milledge@newcastle.ac.uk

Received and published: 10 September 2020

I enjoyed reading this paper and found it both interesting and informative. It is different from the papers that I am used to reading because it reads more as a careful and balanced reflection on a model rather than a report of new findings. But I think it is valuable and will be a useful resource to those who use or are considering using Topmodel in the future as well as those who must make sense of its predictions. I have four major comments, none of which are critical to publication but all of which I feel would improve the paper. There are then many minor comments and suggestions most of which are either typos or suggested rewording.

Major comments

Assumption A1

The assumption that "that the storage for any given value of S_{bar} is configured *as if* it was at a steady state with a steady homogeneous recharge rate (L88)", and its implications comes up in three different places within the article. It is an important point because it relates to a central assumption and one of the primary perceived weaknesses of Topmodel. I found this discussion particularly helpful in my thinking on Topmodel but I also found it confusing in places.

On my first read through I felt the first discussion of A1 on L88 didn't give enough detail. In particular I was confused by the language around "configurations" and "configured as if". I didn't understand how S_{bar} could be configured as if it was at steady state (L88) nor how configurations are dependent on storage (L89) nor how the two ideas related to one another. Did this mean that S_{bar} is varying only slowly in time? How slowly does it need to be? What controls the sensitivity of S_{bar} to rainfall and what is the sensitivity of the saturated zones to S_{bar} ?

The later treatment of the assumption (L320) is more detailed and I understood this section better. It might be enough just to point to the later section at L89 for more detail. In this L320 paragraph

I still struggled to understand what you meant by configuration. I understood it to mean that: 'the two-dimensional phreatic surface over the flow strip is that which would result from steady recharge over that flow strip'. However I wasn't confident in my understanding so clarifying this would be helpful. The main outstanding question for me at the end of the paragraph was: how close to 'as if' is

near enough? You mention this with reference to Kirkby (1997) but a more complete restatement of his examination and findings would be useful here.

Wording changed to avoid configuration. More reference to the Kirkby paper has been added later in relation to alternative transmissivity functions (L115-130, L487).

Assumption A1 is revisited on L755, and I found this the clearest expression of the steady state assumption within the paper. It may be that the other sections had laid the groundwork but I think you should consider re-stating this expression earlier in the paper.

??? Not sure about this comment as this section only discusses relaxing A1 in Dynamic Topmodel

Assumption A2

Topmodel uses $\tan(\beta)$ to calculate lateral subsurface flux (L49 and equation 1). Others, usually modelling steep landscapes, have used $\sin(\beta)$ to make the same calculation (e.g. Montgomery and Dietrich, 1994; 2002; Borga et al., 2002; Chirico et al., 2003). In some cases they explicitly claim that there is a choice between “the original $\ln(A/\tan(\beta))$ or the more physically correct $\ln(A/\sin(\beta))$ ” (Montgomery and Dietrich, 2002, p2). It might be helpful to respond to this claim, perhaps explaining why the difference, whether you consider one more physically correct than the other and if so what the implications are for situations in which they can or should be applied.

A paragraph has been added to discuss this (L68ff)

Assumption A3

It would be useful to have a longer discussion of whether the exponential transmissivity function is an assumption introduced by the authors (as is suggested L91-2) or one that is required within the derivation (as Kirkby (1997) seems to suggest).

See expanded text (L115-130, 487)

There are clearly advantages to being able to use alternative transmissivity functions, so it would be useful to know more about any possible disadvantages. It would be particularly useful to comment on how this might impact the validity of other model assumptions (e.g. L413) and the sensitivity to these assumptions (e.g. L360-2)

You do touch on this at L413 “might also preclude...” however, you say might rather than would and I am not clear what you mean by “implicit redistribution of subsurface storage”. Do you mean that A1 would not be consistent with non-exponential transmissivity functions? Kirkby (1997) seems to argue that the choice of an exponential transmissivity function is required to satisfy the integration (though I could have misunderstood Kirkby here). Do the authors of this paper find that argument convincing? If so what does it mean for the alternative profiles (e.g. Ambrose et al., 1996)? If not then where do you differ from Kirkby (1997)?

Connectivity and Run-on

The argument that small channels may connect apparently disconnected saturated areas (L350) is not clear to me. In particular mention of small channels at the start of the sentence seems to contradict the end of the sentence. If I understand what you mean here, I think it might be clearer to talk about geomorphic / landscape evolution controls on where channels begin (e.g. Montgomery and Dietrich, 1988). The places where this will break down are those where some other landscape property gets in the way e.g. lithology and rock strength in parts of the Yorkshire Dales. If instead this is a suggestion that the majority of run-on passes from patch to patch and reaches the river as

overland flow, then I think more support for the argument is needed. I haven't seen anyone demonstrate this.

The discussion of connectivity and run-on has been extended (see L449ff)

Minor comments

L29: parsimonious which – word missing **Done**

L35: suggesting ... constant - has this observation now been more widely reproduced? A comment on this would be useful here. **Comment added**

L50: transmissivity - i.e. the depth integrated permeability? It might help to say this explicitly. **Done**

L50: represented ... units - This is not clear to me: I think that K is a profile averaged permeability. However, for the following equations to work I think that K must be independent of S and therefore independent of depth. I think this is worth saying here. **Made more explicit**

Eqn 2: S appears on both the RHS and the LHS. I think that is a typo. **Corrected**

L57: just saturated - just seems a strange word here. Do you mean at the onset of saturation (implying that the timing matters) or the position of the water table (i.e. fully saturated or saturated so that the water table is at the surface)? **Modified to indicate just saturated to the surface**

Eqn 3: If the soil is "just saturated" shouldn't $S=S_0$? Also, S_0 hasn't been defined. **Corrected**

Eqn 4: K_{bar} and A are not defined yet. I think that K_{bar} is catchment averaged permeability i.e. $1/A * \int(K, dA)$. If that is the case it seems strange to write it this way because K_{bar} in λ cancels the K_{bar} in the denominator of the equation for S_{bar} . **This is carried over from the original Kirkby presentation – but has now been modified to explain this form.**

L50: K is defined as a permeability but I think for the dimensions to work it should be hydraulic conductivity here and elsewhere. **Not exactly because of the per unit storage rather than per unit depth definition. This has now been made explicit on L50**

L68: these equations – this would be clearer as 'equations 3 and 4'. **Done**

L89: storage changes - comma needed after changes **Done**

L90: wet, ... moderate slopes - an indication of the range for these might be helpful if it were possible. **See expanded discussion L72**

L91: where soil permeabilities increase with saturation - do you mean transmissivities due to hydraulic conductivity decreasing with depth or that permeability (hydraulic conductivity) itself is changing? **Note definition of permeability earlier – changed to depth of saturation**

L100: just saturated – as for L57. **Modified as before**

L102: as – I suggest 'saturation now is:' or 'saturation as:' **Done**

L113: Q_b ... along the channel - It is not clear from this whether Q_b is a single value assumed to be distributed along the channel but without explicitly accounting for this distribution or whether it is spatially variable. **???? It is twice stated that this is the output integrated along the channel. Changed to all channel reaches.**

L114: see Beven - I think it is fine to point to this more detailed derivation, though it is probably worth adding a page reference (p214). **Done** The one difficulty I have there is in Equation B6.1.16 where upslope area per unit contour length is used but this cannot be true for anything other than the outlet cell. I think that a in B6.1.16 should instead be defined as the unique upslope area (that does not overlap with upslope area for any other channel length). This is very intuitive when a channel is viewed as a line (i.e. inputs from the banks of a river) but not as an area with an upslope boundary defined by a contour (when inputs from upstream as well as from the banks should be included). **These are in fact equivalent because the a values can be defined on a point by point basis along the channel reaches. Thus the integral of $|a_j|$ over all points does give the total area. It is true that this could have been expressed better in B6.1.16.**

L135: calculated outputs - Is there a reference associated with this? Fine if not but useful if so.

Reference to Beven et al 1995 added

L149: both showed changes over time - I'm not clear, do you mean that the components have changed over time or that the represented time variable processes? **Clarified**

L151: later these stores were integrated – this would benefit from a reference. **Added**

L163: later versions of Topmodel – this would benefit from a reference. **Done**

L217: The BK79 paper ... flashy catchment – this sentence doesn't make sense to me. **Added wets and dries**

L234: Whilst... - this sentence reads as a fragment. **Corrected**

L235: but were always clearly identified – I think this relates to the assumptions but it is not clear, perhaps there is a comma missing. **Deleted**

L256: including – should be included **Corrected**

L285: but t more – typo, remove t **Corrected**

L332-3: as the catchment wets and dries – An additional sentence explaining why would be helpful here **Modified**

L336-7: This should not be a surprise at Tarrawarra ... impermeable subsoil – this would benefit from a reference **Added**

L346: connectivity of both surface and subsurface flows - It seems as though there are two issues being discussed here, disconnection and response timescale. 1) Even if the signal can propagate rapidly in the presence of a water table configured as assumed by Topmodel it may not propagate if that assumed configuration breaks down resulting partial or total disconnection of some upslope area. 2) Even if the water table is configured as assumed in topmodel the signal propagation may not be sufficient to generate steady state like response to rainfall. I thought Barling's modification was largely focussed on the second problem. **That is correct - at that time the focus was on the response times – breakdown of subsurface connectivities came later. This has been made clearer**

L348: This paragraph, and particularly this sentence contains two ideas that might be more easily understood if separated: subsurface and overland flow connectivity. **This has been reordered and made clearer**

L348: always connectivity – do you mean of subsurface flow? **Added**

L353: can be represented in... - It has also been represented in the network index, a modification to the topographic index to identify areas of disconnected saturation within Topmodel, the runoff from which is then assumed to entirely infiltrate as run-on (Lane et al., 2004, 2009, Lane and Milledge, 2013). **References added**

L355: wetter vegetation patterns – perhaps a reference here? **Mostly personal observation but one reference added**

L361: particularly – this was not clear to me. Do you mean that Kirkby shows it for the particular case of exponential transmissivity or that it is particularly true for the exponential transmissivity profile case? I think it is the latter. If so, what are the implications for other assumed transmissivity profiles? **This paragraph has been deleted and incorporated in the more detailed discussion later**

L365: parallel to the surface - How much empirical support is there for assumption A2? You provide a statement on this for A1 and a similar statement here would be useful. **Wording changed. Also discussed more extensively later in the evaluation of predictions section**

L366: important - It might be helpful to say important to what. This may be tricky given the wide range of applications of Topmodel and its derivatives and I don't think an exhaustive list of 'important to...' is necessary here. However, an indication that both the scale over which the assumption is not valid and the question being addressed contribute to whether or not violation of A2 will be important. For example, I could imagine bedrock exfiltration being very important to local patterns of saturation deficit on the scale of metres to tens of metres (and therefore to pore pressure at scales associated with landslide triggering) but much less important over scales of hundreds to thousands of metres and therefore for runoff generation. **Text has been modified**

L370: (it might... values) – Has anyone done this? If not it might be worth flagging that more strongly. One of the valuable things about this paper is the opinions of the original authors on what has been done and what is yet to be done from their perspectives. **Yes, in the paper cited.**

L374: values tend to be high - Is that a commensurability issue associated with scale dependence in the measurement? If so it might be useful to comment on that here. **The following text already gives references to papers addressing this.**

L388: A further criticism... unsaturated zone – a reference is needed here. Also, this doesn't seem to get the detailed response that other criticisms received. Is the following sentence a general conclusion to the section or specific to this criticism? **Expanded**

L425: small – adding the catchment area would be useful here. **Added**

L429-30: This was ... number of storms – mixed tenses in this sentence **Corrected**

L431: would predict – should this be: would predict (i.e. it is possible) or predicted (i.e. this was the prediction)? **Clarified**

L463: predicted modelled – I think only one or the other of predicted or modelled is needed here. **Corrected**

L463: storage deficits to water tables - You don't give this much treatment. Can you point to a reference and give an indication of the magnitude of the issue, as written it appears a straightforward exercise. **This was already explained in L154ff but reference back added**

L466: represent different quantities - An example here might be helpful. E.g. modelled water table depth at 2 m resolution compared with observations from a single well within that 2 m cell. **That is a bit difficult to illustrate without going into considerable depth. We do refer to the Freer et al. which explains this in some detail.**

L467: this is a particular problem - Is it commensurability between predictions and observations that is a particular problem in this case or commensurability between the input parameter (spatially uniform T0) and the local conditions (heterogeneous hydraulic conductivity in 3-D)? **Clarified**

L470: would not expect the predictions to match... - Has anyone provided an indication of the likely magnitude of the commensurability errors? If so how do these compare to the misfit observed in these studies? **Several references already cited**

L505: do not explicitly consider convergence... - I disagree: the indices of Barling, Woods, explicitly consider convergence etc through upslope area as the topographic index does, that of Berne uses a hillslope width function and that of Hjerdt was conceived as a replacement for local slope which has subsequently been used within a modified $a/\tan B$ topographic index. **Modified**

L521: a rumour - this moves away from the authors' own experiences and is difficult to support. Consider rephrasing or removing the last two or three sentences since I think you can make your point without this statement. **Actually it was part of my experience at a Hydrocomp workshop with Crawford and Linsley in around 1974 and is part of the history. Wording has been modified.**

L528: that contributing – should be that the contributing **Modified**

L601-5: One of the... A second result... - A reference that you associate with each of these results would be helpful at the end of each sentence. **References added**

L605: longer time steps – could you quantify longer timesteps? **Changed to hourly**

L626: risk - Could you expand this to replace 'risk'? You haven't previously defined risk and it may mean different things to different people. **Changed to probability of exceedance**

L646: A further step - Should this be 'an alternative step'? Dynamic Topmodel predates the distributed version and does not adopt its surface flow treatment. **Now modified**

L696-7: some interest - references to this interest would be useful here, unless the following sentence is an example. **Modified**

L729: topographic index - this actually uses the network index, a modified version of the topographic index that accounts for downslope connectivity of saturation excess overland flow (see: Lane et al., 2004; 2009). **Corrected**

L761: some of the other assumptions – it would be useful to be explicit about which assumptions here. **Taken out since mostly routing and heterogeneity that are mentioned explicitly**

L762: hydrological important – should be: hydrologically important. **Corrected**

L767: cease to allow – I think there is a comma missing here. **Corrected**

L780: This approach ... much meaning – it is not clear to me what this comment means. **Wording changed**

References

Borga, M., Dalla Fontana, G. and Cazorzi, F., 2002. Analysis of topographic and climatic control on rainfall-triggered shallow landsliding using a quasi-dynamic wetness index. *Journal of Hydrology*, 268(1-4), pp.56-71.

Chirico, G.B., Grayson, R.B. and Western, A.W., 2003. On the computation of the quasi-dynamic wetness index with multiple-flow-direction algorithms. *Water resources research*, 39(5).

Lane, S.N., Brookes, C.J., Kirkby, M.J. and Holden, J., 2004. A network-index-based version of TOPMODEL for use with high-resolution digital topographic data. *Hydrological processes*, 18(1), pp.191-201.

Lane, S.N., Reaney, S.M. and Heathwaite, A.L., 2009. Representation of landscape hydrological connectivity using a topographically driven surface flow index. *Water Resources Research*, 45(8).

Lane, S.N. and Milledge, D.G., 2013. Impacts of upland open drains upon runoff generation: a numerical assessment of catchment-scale impacts. *Hydrological Processes*, 27(12), pp.1701-1726.

Montgomery, D.R. and Dietrich, W.E., 1988. Where do channels begin?. *Nature*, 336(6196), pp.232-234.

Montgomery, D.R. and Dietrich, W.E., 1994. A physically based model for the topographic control on shallow landsliding. *Water resources research*, 30(4), pp.1153-1171.

Montgomery, D.R. and Dietrich, W.E., 2002. Runoff generation in a steep, soil-mantled landscape. *Water Resources Research*, 38(9), pp.7-1.

Wouter Buytaert (Referee)

w.buytaert@imperial.ac.uk

Received and published: 20 October 2020

This is a very nice overview of the history of Topmodel and I think that it will serve as an extremely useful reference for anyone who may feel a bit lost in the numerous variations of model structures that have emerged over the year (which at least was the case with this reviewer).

I don't have much to add to the other reviews apart from a few specific comments (see below); however I would like to second Dave Milledge's comments on the lack of discussion on landscape connectivity in determining the contribution of surface runoff to river flow, as explored in publications such as Lane et al., (2004) and Lane et al., (2009). **The network index is now given more prominence (see L450)**

At least, looking back on my own applications of Topmodel, I identify our inability to account properly for varying surface contributing area as a result of dynamic surface hydrological connectivity as a major bottleneck for our model performance (in addition to errors in the input

data). Even though this process could clearly be observed in the field, there was no way to incorporate this in the model (apart from some simple and unsatisfactory conceptual approaches) because of the lack of topographic information of sufficient quality. However, recent advances in drone-based remote sensing, including the generation of cm-resolution digital elevation models, may open interesting new opportunities in this regard and I would be very interested in hearing the authors' views on this.

This has been discussed (in the context of the past) in the section on connectivity in the paragraph L437. High resolution topographic data is clearly more relevant to surface flow routing (see reference to sub-grid rills and small channels in that paragraph) than in determining flow pathways in the subsurface (also the discussion of Jim's work on bedrock topography L615. Such issues will be important in any model and certainly reflected in effective values of parameters however calibrated.

(On the other end of topographic-data-availability-spectrum, I seem to recall some successful implementations of Topmodel that bypassed the topographic index derivation altogether in favour of the use of a gamma distribution with calibrated parameters.) This results in more parameters to be estimated of course, but has now been incorporated into the text and into the timeline supplement

Specific comments

l55: there is an error in the formula (S on the right hand side should not be there) Corrected

l60: it may be useful to define S₀ here explicitly - also further in the document, not all symbols are always clearly defined Done

l237: ofa -> of Corrected

l249: attractive. -> attractive Corrected

l285: "but t more" Corrected

l452: "runoff." -> "runoff" Corrected

l730: Lane et al. (2009) is referenced here in relation to SCIMAP although the publication is not really about SCIMAP. Also now properly refers to network index.

References:

Lane, S. N., Brookes, C. J., Kirkby, M. J., & Holden, J. (2004). A network-index-based version of TOPMODEL for use with high-resolution digital topographic data. *Hydrological Processes*, 18, 191-201.

Lane, S. N., Reaney, S. M., & Heathwaite, A. L. (2009). Representation of landscape hydrological connectivity using a topographically driven surface flow index. *Water Resources Research*, 45, W08423.

Gilles Boulet

gilles.boulet@ird.fr

Received and published: 31 August 2020

Dear Authors, thanks for this review !

Also maybe of interest for the historical perspective:

- based on the analytical study of the "bias" mentioned in Saulnier and Datin 2004 we introduced in the TOPMODEL formulation, before coupling with a SVAT model over large basins, a critical deficit above which lateral flow is assumed to be negligible (cf. line 348, see Appendix 2 in Boulet, G., Kerr, Y., Chehbouni, A., and Kalma, J. D.: Deriving catchment-scale water and energy balance parameters using data assimilation based on extended Kalman filtering, Hydrological Sciences Journal-Journal Des Sciences Hydrologiques, 47, 449-467, 2002);

This paper really only mentions Topmodel in passing (and then uses a gamma distribution for the index)

- TOPMODEL is/was a good candidate for disaggregation strategies of low resolution soil moisture data from passive microwave remote sensing (e.g. Pellenq, J., Kalma, J., Boulet, G., Saulnier, G. M., Wooldridge, S., Kerr, Y., and Chehbouni, A.: A disaggregation scheme for soil moisture based on topography and soil depth, Journal of Hydrology, 276, 112-127, 10.1016/s0022-1694(03)00066-0, 2003);

This reference has been added to the Supplementary material.

A history of TOPMODEL

Keith J. Beven¹, Mike J. Kirkby², Jim E. Freer³, and Rob Lamb⁴

¹ Lancaster Environment Centre, Lancaster University, Lancaster UK

² School of Geography, University of Leeds, Leeds UK

³ University of Saskatchewan, Centre for Hydrology, Canmore, Canada and School of Geographical Sciences, University of Bristol, UK

⁴ JBA Trust, Broughton, UK and Lancaster Environment Centre, Lancaster University, Lancaster UK

Correspondence to: Keith Beven, k.beven@lancaster.ac.uk

Abstract. The theory that forms the basis of Topmodel was first outlined by Mike Kirkby some 45 years ago. This paper recalls some of the early developments; the rejection of the first journal paper; the early days of digital terrain analysis; model calibration and validation; the various criticisms of the simplifying assumptions; and the relaxation of those assumptions in the dynamic forms of Topmodel. A final section addresses the question of what might be done now in seeking a simple, parametrically parsimonious model of hillslope and small catchment processes if we were starting again.

1. Topmodel: the background

Topmodel is a rainfall-runoff model that has its origins in the recognition of the dynamic nature of runoff contributing areas in the 1960s and 1970s that had been revealed in the data analysis of partial area contributions of Betson (1964) in Tennessee, USA, and the field experience of Dunne and Black (1970) in Vermont, USA, and Weyman (1970, 1973) in the Mendips, UK. It was one of the very first models to make explicit use of topographic data in the model formulation, hence the name of the model (Beven and Kirkby, 1979, hereafter BK79). This was, however, well before digital terrain/elevation maps started to be made available¹. The theory of Topmodel aimed to reflect the way in which the topography of a catchment would shape the dynamic process responses and particularly runoff generation on a variable contributing area. It did so in a structurally,

¹ It was also before the term "top model" started to be used in the fashion industry, though Ezio Todini was quick to have some fun with the name at EGU when the first Italian issue of Topmodel magazine was published.

Deleted: Rob Lamb²,

Deleted: ³ and

Deleted: ⁴

Formatted: Superscript

Deleted: ² JBA Trust, Broughton, UK and Lancaster Environment Centre, Lancaster University, Lancaster UK⁴

Deleted: ³

Deleted: ⁴

Formatted: Superscript

Deleted: School of Geographical Sciences, University of Bristol, UK and University of Saskatchewan, Coldwater Laboratory, Canmore, Canada.

parametrically, and computationally parsimonious [model](#) which gave it advantages over the full implementation of the physically-based model blueprint set out by Freeze and Harlan (1969).

The story of Topmodel starts when Mike Kirkby (MK) was at the University of Bristol where he worked with his PhD student Darrel Weyman in the East Twin catchment in the Mendips. One critical observation from Darrel Weyman's work was the synchronicity of flows in a throughflow trough and in the main channel, suggesting the possibility that [subsurface](#) runoff per unit area might be approximately spatially constant; a key underlying assumption of Topmodel. [While this may not be a general expectation, the consequent](#) analysis of the response of the upper East Twin led to the concept of a topographic index (as $a/\tan\beta$, a as upslope contributing area per unit contour length and $\tan\beta$ as local slope).

The first theoretical statement of Topmodel was presented in Kirkby (1975). He wrote there: "*Any model with only a few parameters must necessarily simplify the spatial variation of moisture content over a drainage basin. For a given average moisture content, there is a wide range of possible spatial distributions, even if rainfall is always spatially uniform, as is assumed here. To predict the spatial consequences of an average moisture level some assumptions must be made about the duration of the rainfall inputs. The simplest, which is adopted here, is to assume a time-independent steady state of net rainfall input, τ* " (p.81).

Then, using the original nomenclature of Kirkby (1975), at any point, downslope flow per unit contour length, q , will be given by $a(\tau - q_o)$ where a is the upslope contributing area to that point, and q_o is a constant rate of leakage to the subsoil. Then making the further assumption that the local hydraulic gradient can be approximated by the slope angle, $\tan\beta$, and the local transmissivity can be represented as KS where K is a permeability [per unit of storage](#), and S is the local [saturated zone](#) storage in rainfall equivalent depth units, then

$$q = a(\tau - q_o) = KS \tan\beta \quad [1]$$

65 or

$$S = a(\tau - q_o)/K \tan\beta \quad [2]$$

[KS is then an effective transmissivity of the soil at a storage of S. Note that this assumes that the hydraulic gradient \$\tan\beta\$ is defined with respect to the plan distance, while infiltration and drainage rates are defined with respect to plan unit area. Others have suggested that the use of \$\sin\beta\$ is more correct, i.e. relative to distance along the hillslope, so that transmissivity is defined by the plane orthogonal to the slope, rather than horizontally \(e.g. Montgomery and Dietrich, 1994, 2002; Borga et al., 2002; Chirico et al., 2003\). Clearly this makes little difference for low to moderate slope angles, while for high slope angles it is unlikely that a water table would be parallel to the surface so that this assumption would break down. In addition, any](#)

Deleted: T

Deleted: is

difference in the definition of transmissivity is likely to be smaller than the uncertainty with which transmissivities can be estimated or calibrated.

Equation [2], allows the condition for the soil to be just saturated to the surface at a storage of S_o to be defined as

$$S = S_o, \text{ or } \frac{a}{K \tan \beta} = \frac{S_o}{\lambda(t-q_o)} \quad [3]$$

In terms of water balance accounting for the catchment as a whole, it is useful to integrate the expression for S to provide a catchment average value \bar{S} .

$$\bar{S} = \frac{\lambda(t-q_o)}{K} \quad [4]$$

where

$$\lambda = \frac{K}{A} \int \frac{a}{K \tan \beta} dA$$

Expressing the relationship for S in this way allows for the potential for local permeability to vary while the effective recharge rate is in ratio to the mean permeability K over the catchment area A . Combining equations [3] and [4] gives a condition for soil saturation in terms of the topographic index $a/\tan \beta$ at all points where

$$\frac{a}{\tan \beta} > \frac{\lambda K S_o}{\kappa S} \quad [5]$$

The topographic index can be mapped in a catchment area as a function of the topography and then gives an indication of where a saturated contributing area might occur, and then how it might spread as a function of storage (e.g. figure 1 for the upper East Twin). The expression is simplified further if the permeability can be considered spatially constant and λ simplifies to the mean value of the topographic index in the catchment. The topographic index was also used later to compare with the saturated areas at Tom Dunne's Sleepers River field site in Vermont in Kirkby (1978) (figure 2). Kirkby (1975) also provides relationships for the leakage term q_o and routing through a channel network based on the network width function.

Deleted: This

Deleted: >

Deleted: >

Deleted: these

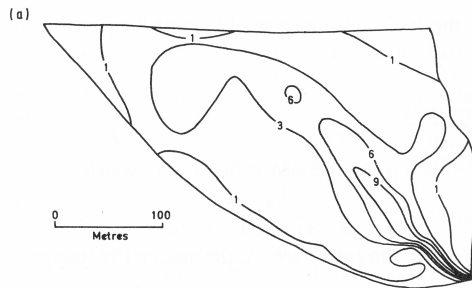


Figure 1. Distribution of the topographic index ($a/\tan\beta$) for the upper East Twin catchment, Mendips, UK (from Kirkby, 1975)

110

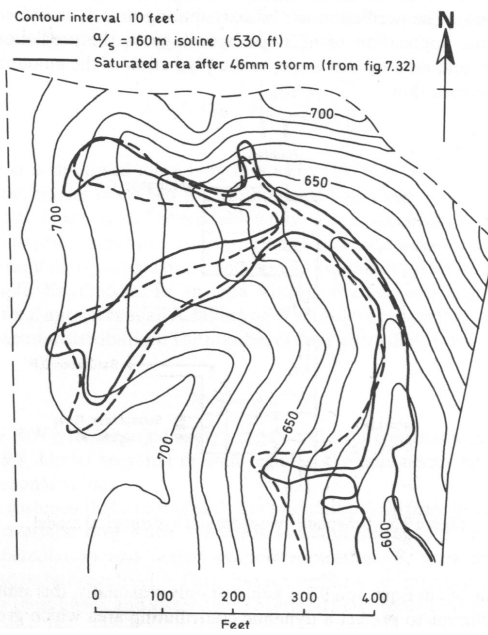


Figure 2. Comparison of the topographic index ($a/\tan\beta$) > 100 m²/m with observed saturated areas after spring snowmelt in the Sleepers River WC-4 catchment, Vermont, USA (from Kirkby, 1978)

115 In this form, Topmodel does not require a steady rainfall duration long enough to reach steady state, only that the storage for
any given value of S takes up a form as if it was at a steady state with a steady homogeneous recharge rate over the upslope
contributing area to any point in the catchment. This implies that as storage changes, the celerities in the saturated zone are
fast enough that the transition between configurations with changes in storage are relatively rapid. This will be more likely
in wet, relatively shallow soils on moderate slopes, and where soil permeabilities increase with depth of saturation. There will
120 be no expectation of a water table being parallel to the surface on deeper subsurface systems on low slope, or on very high
slopes where more localised saturation will occur at the base of the slope. However, where the soil profile is much shallower
than the length of the slope then any build-up of saturation at the base of profile under wet conditions must be fairly parallel
to the surface. This might break down under drier conditions or where there is a loss to deeper layers.

125 Kirkby (1975) introduced an additional assumption that downslope flow could be represented as an exponential function of
storage deficit below saturation, D in units of depth. This is consistent with an assumption of spatially homogeneous subsurface
runoff increments at all times up to steady state (Kirkby, 1997). It was also realised that by expressing the saturated storage
in the profile in terms of storage deficit rather than water table depth, one parameter could be eliminated. At that time, the
issue of designing models to facilitate the calibration problem and reduce the potential for overfitting was already the subject
130 of discussion in the literature (Ibbitt and O'Donnell, 1971, 1974; Kirkby 1975; Johnston and Pilgrim, 1976). Thus

$$q = T_o \tan\beta \exp(-D/m) \quad [6]$$

where T_o is the downslope transmissivity when the soil is just saturated to the surface, and m is a parameter also with units of
135 depth. Following the same derivation as above gives the condition for saturation as

$$\ln\left(\frac{a}{\tan\beta}\right) > \frac{\bar{D}}{m} - \lambda \quad [7]$$

where \bar{D} is the mean storage deficit and λ is now the areal integral of $\ln(a/\tan\beta)$ with T_o and m assumed spatially constant.
140 This is the expression used to determine the dynamics of the saturated contributing area in what might be called the classical
version of Topmodel (figure 3). Equation [7] implies that when \bar{D} is zero, all the points with a topographic index greater than
the mean value λ are predicted as saturated. Negative values of \bar{D} mean that more of the catchment is predicted as saturated.
Redistribution at each model time step will produce negative local D values on the saturated area. In the model accounting
this is treated as return flow from the saturated zone and is routed to the channel to properly maintain mass balance. Saulnier

Deleted: is configured

Deleted: (see Kirkby, 1997)

Deleted: then

Deleted: This can be integrated to give an expression for the catchment recession curve in terms of a mean storage deficit, D .

Deleted: now


and Datin (2002) suggested that this creates a bias in the prediction of the saturated areas and suggested a formulation that calculates a deficit only over the unsaturated area of the catchment.

Equation [6] can be integrated along the length of [all reaches in](#) the channel network to provide the integral discharge from the hillslopes in terms of the mean storage deficit \bar{D} as

$$Q_b = Q_o \exp(-\bar{D}/m) \quad [8]$$

where Q_b is the integrated output along the [all the reaches in the channel network](#), $Q_o = Ae^{-\lambda}$ (for the case of a homogeneous downslope transmissivity) and A is the catchment area (see Beven, 2012, [p.214](#), for a full derivation). To initialise the model this relationship [8] can then be inverted, given a value of catchment discharge to give the initial mean storage deficit. Note that [8] implies a first order hyperbolic shape for the recession limb of the hydrograph. This can be checked for a particular application by plotting the inverse of observed discharges against time. This should plot as a straight line if [8], and consequently [6] is valid (Ambrose et al., 1996a; Beven, 2012).

It is worth noting here that the deficit D here represents a storage deficit due to gravity drainage. Any additional deficits resulting from evapotranspiration losses are calculated separately from the various model stores. By the addition of an additional parameter of available storage for gravity drainage per unit depth of soil (which can be related to the concept of “field capacity”), the deficit D can be converted to a depth to the saturated zone. Thus the model can equally formulated in terms of water table depths and there are a variety of applications that have used the model in this way to compare against observed depths of saturation (e.g. Sivapalan et al., 1987; Lamb et al., 1997, 1998; [Seibert et al., 1997](#); Blazkova et al., 2002; Freer et al., 2004).

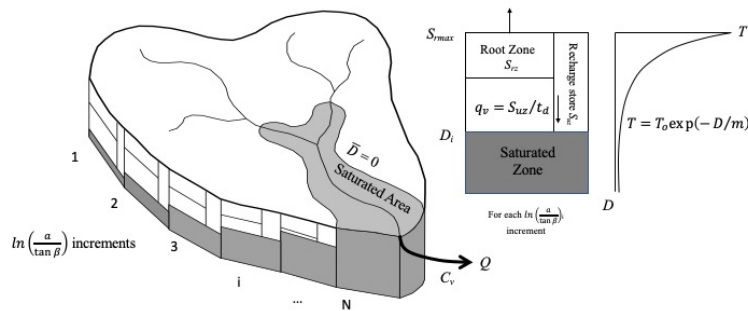

175 **Figure 3. Schematic of the classical version of Topmodel (see Table 1 for the definition of the parameters)**

The topographic index acts as an index of hydrological similarity (Beven et al. 1995; Beven, 2012) resulting from the assumption of homogeneous recharge to the saturated zone at any point in time. The elegance of the similarity approach means that it is not necessary to make calculations for every point in the catchment only for representative values of the index, which can then be weighted by the distribution function. This was particularly important when computer power was limited in the 70s and 80s but remains useful in applications to large catchments and when ensembles of runs are required for uncertainty estimation. Good resolution is required at the higher end of the distribution where the contributing area first starts to spread, but experience with the model suggested that about 30 representative values was generally sufficient for convergence of the calculated outputs (Beven et al., 1995). Since the pattern of the topographic index is known, one very important feature of the model is that, despite the computational efficiency, the results can be mapped back into space and consequently checked for realism.

We now know that this was not the first analysis of surface saturation of this type. Horton (1936) came very close to deriving a form of topographic index but restricted his analysis to a single steady state condition, with an input rate equal to the final infiltration capacity of the soil surface (as appears in the Horton infiltration equation). This, he proposed, suggested a maximum depth of saturation on a hillslope once a steady state at that input rate had been achieved, and could be used to see if the soil would saturate (see Beven, 2004; 2006). He made no attempt to estimate how long it might take such a steady state to be reached (but see Beven, 1982; Aryal et al., 2005). A very similar wetness index was also developed independently by Emmett O'Loughlin (1981, 1986), and was used in the hydrological model of Moore et al. (1988).

Deleted: a

Two further components are required to complete the model, to represent the unsaturated zone and routing surface runoff and channel flows. ~~These process representations changed over time with different versions of the model.~~ In the BK79 version of Topmodel there were separate interception and infiltration stores. Evapotranspiration depended on the storage in these stores, with recharge to the saturated zone represented as a constant drainage rate while storage was available. Later these stores were integrated into a single root zone store (to reduce the number of parameters required) and recharge was made more dynamic dependent on the local storage deficit D and storage in the unsaturated zone in excess of “field capacity” (e.g. Beven et al., 1995). This was controlled by a time delay per unit of deficit parameter, t_d .

Deleted: Both
Deleted: showed
Deleted: s

In respect of routing the surface and channel flows, there was one thing that KB got wrong in the original BK79 model formulation. This used a form of explicit nonlinear time delay routing for the overland flow and channel network that will produce kinematic shocks at times when the hydrograph is rising quickly. This was based on the field observations of mean channel velocities derived from a large number of salt dilution gauging experiments that were used to measure overland flow velocities and check the discharge ratings at the stream gauging sites. Later it was realised that the routing should be based on celerities rather than velocities and that it is possible to have a nonlinear velocity–discharge relationship that produces a constant celerity (e.g Beven, 1979) allowing the use of a stationary time delay histogram in routing the runoff. This, with the advantage of simplicity, was then used in later versions of Topmodel. The resulting set of parameters needed for a model run are defined in Table 1.

Table 1. Definitions of parameters in the “classical” version of Topmodel

Parameter	Definition
T_o	Downslope transmissivity when the soil is just saturated to the surface
m	Exponential scaling parameter for the decline of transmissivity with increase in storage deficit D
S_{rmax}	Maximum capacity of the root zone (available water capacity to plants)
S_{ro}	Initial storage in root zone at the start of a run
t_d	Time delay for recharge to the saturated zone per unit of deficit
C_v	Channel routing wave velocity (celerity)

In what follows, some of the history of Topmodel will be recalled. This history will be necessarily incomplete. Topmodel was always presented as more a set of simple modelling concepts for making use of topographic information in hydrological prediction than as a fixed model structure (see Beven, 1997, 2012). This has left plenty of scope for others to use those concepts in different ways or incorporate them into other models. The simplicity and open source distribution of the modelling

225 code has also resulted in applications, more or less successful in terms of hydrograph fits, many of which have been in areas
where the assumptions should not be expected to be valid. It is also impossible to summarise all those applications that use or
cite Topmodel but a list of the various main developments and uses of the model through time is also provided in the Electronic
Supplement. This history therefore reflects the particular viewpoint of the authors who were involved in the original
development of Topmodel, Distributed Topmodel and Dynamic Topmodel.

230

2. Topmodel: from rejection without being refereed to highly cited

The first Topmodel paper submitted to a journal was rejected without being refereed by the Journal of Hydrology by one of its
editors, Eamonn Nash in a short letter as “being of too local interest” before later being accepted by the IAHS Hydrological
235 Sciences Bulletin as Beven and Kirkby (1979). This rejection should not be as surprising as it might seem now, given that
this is one of the most highly cited papers in hydrology². In 1978, many computer programs and data were still stored on
cards; even “mainframe” computers had relatively small amounts of memory. Because there were no digital elevation models,
the analysis of catchment topography was a manual and very time-consuming process. The derivation of the topographic
index for the small Crimple Beck catchment where Topmodel was first applied involved the use of maps, aerial photographs
240 and field work, and took days of intensive work. For an engineer like Eamonn Nash, it was difficult to see how such an
approach could ever be of use to a practicing engineering hydrologist.

On moving to Leeds University, MK obtained a UK Natural Environment Research Council grant to develop the concept into
a computer model of catchment hydrology, with funds to employ a post-doctoral research assistant. The grant also allowed
245 for running a nested catchment experiment with multiple raingauges and stream gauging sites, together with saturated area
monitoring and other observations. KB was still finishing his PhD work at the University of East Anglia, on a finite element
model of hillslope hydrology, but was fortunate to be appointed to the Leeds post.

Crimple Beck, upstream of an existing River Authority gauging station, was chosen as the field site, and with the help of
250 technician Dick Iredale, a lot of time was spent instrumenting and maintaining a nested design of gauges (both raingauge and
water level recordings at that time were made on charts, and a suite of computer programs was also developed to digitise and
analyse the charts, see Beven and Callen, 1979). Methods were also developed for measuring infiltration rates and overland
flow velocities using a plot sprinkler system (an interesting experience on the windy moors in the headwaters of Crimple Beck,
even with a plastic sheeting wind break around the plots). Some of the results of the Crimple Beck process studies, highlighting
255 the differences in response between headwater and sideslope areas are reported in Beven (1978). As a result, the application
of the model to the 8 km² Crimple Beck in BK79 made use of different topographic index distributions in 23 headwater and

Deleted: , BK79 from hereon


Deleted: the

Deleted: 0

Deleted: April

² Google Scholar lists >7500 citations in November, 2020. Unfortunately, Hydrological Science Bulletin for 1979 and earlier
is not listed on Web of Science; only from when it changed to Hydrological Sciences Journal in 1980.

260 sideslope subcatchments, each with its own topographic index distribution (figure 4). Each subcatchment could also have a different precipitation input based on interpolation from the network of raingauges that had been installed. At this time, Topmodel went through numerous early versions, initially in hard copy as punched cards, then stored digitally that could be edited using a teletype terminal (a very slow process which required each edit being typed and printed on a roll of paper), and still later with editing on cathode ray tube (CRT) terminals.

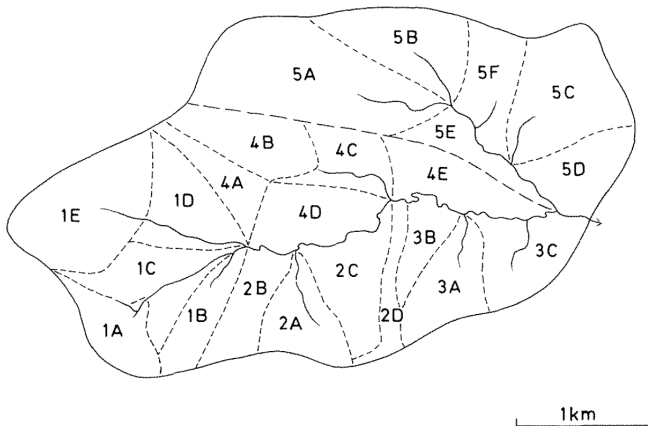

265 **Figure 4. Subdivision of the 8 km² Crimple Beck catchment, Yorkshire, UK into 23 headwater and sideslope subcatchments (from Beven and Kirkby, 1979).**

270 One of the aims of the original modelling project was, in fact, to produce a model structure that could be applied on the basis of field measurements alone. The BK79 paper demonstrated how model optimisation produced a parameter set that resulted in the subsurface storage being used effectively as an overland flow store in the wet flashy Lanshaw subcatchment (1A on Figure 4) which was dominated by fast runoff. Parameters derived from field observations, on the other hand, reproduced the observed saturated areas reasonably well (see BK79 and Section 7 below). This work was then extended in the paper of Beven et al. (1984) where, based on the fieldwork of Nick Schofield and Andy Tagg, it was shown that reasonable hydrograph predictions could be obtained using only field measured parameters. This work is still one of the few papers to demonstrate some success in using parameters derived from field observations, though it is worth noting that the characteristics of the exponential subsurface storage were derived from a recession curve analysis using a limited number of discharge

Deleted: effectively

Deleted: is

Deleted: ,

Deleted: with the exception of some sand lenses in the glacial deposits that covered the catchment

measurements at the site of interest. This could then be interpreted in the terms of the theory of the model (equation [8]), an approach more appropriate to the scale of application than profile measurements.

3. The attractions of Topmodel

The main attractions of Topmodel have always been its elegant simplicity that captures the dynamic and dominant hydrological spatial controls in a semi-distributed form; ease of setting up an initial catchment application; the resulting speed of computation; its ease of modification (it is more a set of concepts rather than a fixed model structure); and its direct link to topography as a control on the hydrological response of a catchment such that predicted storage deficits and saturated contributing areas can be mapped back into space. Whilst its simplicity has a firm theoretical basis, the simplicity comes at the cost of important limiting assumptions that mean that the model might not be applicable everywhere. Early in the days of digital elevation models (DEMs), topographic index values were calculated by Dave Wolock for the whole of the conterminous US (see more recently the global study of Marthews et al., 2015, using the HydroSHEDS database). The data were available to do so using a digital terrain analysis, but no hydrologist should expect that the basic Topmodel concepts would be suitable for the whole of the conterminous United States (nor for many other areas of the world that are flat, or with deep subsurface flow systems). It might be possible to calibrate a version of the Topmodel to give hydrograph predictions for such catchments, but that does not mean that the assumptions are valid, or that the mapping of storage deficits back into the space of the catchments will be meaningful.

Deleted: . However,

Deleted: but were always clearly identified

Deleted: a

This is indicative, however, of why Topmodel has proven so popular and highly cited over the years. Topography is in general important to the flow of water in hillslopes. As soon as digital elevation models started to become more widely available in the 1980s onwards, hydrological modellers have wanted to make use of them in some way. But given that information about topography, what to do with it? All the time that a time-consuming manual analysis was required, Eamonn Nash was right; other more conceptual modelling approaches were more attractive. But given the possibility of a DEM and a digital analysis, suddenly ways of using topography in modelling became much more attractive, especially given the available software for digital terrain analysis and other geographical information overlays. Effectively, once the topographic index distribution had been calculated, like many other conceptual hydrological models only input precipitation and potential evapotranspiration time series were needed to make a run (and the latter was even made available as an option within Topmodel as a simple parameterised sinusoidal function following the work of Calder et al., 1983, for use when other estimates were lacking).

Deleted:

Deleted: .

Various model structures can make use of either gridded or triangular irregular network topographic data, but of those available Topmodel provides the simplest and fastest approach. It has been included in a variety of general hydrological modelling packages including FUSE (Clark et al., 2008), SuperFLEX (Fenicia et al., 2011); and MARRMoT (Knoben et al., 2019), though none of these provide facilities to compute the topographic index, but rather allowed for the calibration of a statistical

Deleted: ing

325 [distribution function representing the topographic index \(the gamma distribution was first used in this way by Sivapalan et al., 1987\)](#). In the 1980s and 1990s, the storage and analysis of large DEMs was still a computationally significant problem. Topmodel required that an analysis could be carried out just once prior to running the hydrological model, after which only the distribution of the topographic index was required to run the model but, if required, the results could still be shown as maps because of the explicit link between location and the topographic index.

Deleted: statistical

330 [This facility to map the results back into space was also an important attraction in the use of Topmodel as a teaching tool. A teaching version of the software was written in Visual Basic by KB in 1995, complete with animations of the saturated areas, and distributed freely. A complementary program for the analysis of digital terrain data was also made available with a similar graphical interface. Other versions have also been widely used in teaching, notably the version in R developed by Buytaert \(2018\). Since the model has the potential for simulating near-surface subsurface stormflow, saturation excess overland flow, and \(in some versions\) infiltration excess overland flow, teaching exercises could be devised to demonstrate the different types of response, or calibrate parameter values using either manual calibration or Monte Carlo methods with GLUE uncertainty estimation. It could also be shown how it was not generally a suitable representation of catchments with deeper groundwater systems \(though see Quinn et al., 1991, for a suggestion as to how this could be achieved\).](#)

340 4. The Early Days of Digital Terrain Analysis

345 [Once digital terrain data were more widely available, there remained issues as to how to determine slope and upslope area, particularly for square gridded data, in the calculation of the topographic index.](#) It has already been noted that in the original application to Crimple Beck, this was an extremely time-consuming process. It involved working with maps and air photographs to determine the apparent flowlines and hillslope segments, then calculating slopes between contour lines and areas with a planimeter. This had some advantages in that features such as gullies and ditches that could be observed in the field or in air photographs could be taken into account. It involved some decisions about what to do with the small, often triangular, sections that were left where contours crossed a river (figure 5). An alternative approach was suggested by Beven and Wood (1983) of representing various hillslope elements making up the catchment as geometric forms of varying width and slope, from which the topographic index could be derived analytically.

Deleted: There remain, however, issues about how to process the DEM...

Deleted:

Deleted: The application of Topmodel requires an analysis of terrain data to define the pattern of the topographic index.

355 Later (around 1976), this process was partly computerised by noting the coordinates of intersections between flowlines and contours and typing them onto punched cards (on an IBM029 card punch) that could be input and processed by computer. Later still (around 1978), KB had moved to the Institute of Hydrology at Wallingford where early work on digital terrain analysis was being carried out, including the digitising of contour maps on a large digitiser. KB made use of this to speed up the process of inputting the data for processing. It was not until 1982, when KB returned to the Institute of Hydrology from working at the University of Virginia, that there was access to gridded digital elevation data.

365 In fact, KB already had some experience of working with digital elevation maps having carried out an undergraduate project
at the University of Bristol on determining flow networks on randomly generated triangular elevation grids with the aim of
looking at the variability in Horton's Laws (following Shreve, 1967). This is relatively simple on a triangular grid, but more
assumptions are needed for a square grid. This was the start of work on the multiple downslope direction flow algorithm (now
often called the MD8 algorithm) that was later published in the Topmodel application of Quinn et al. (1991, also Quinn et al.,
370 1995a) and independently by Freeman (1991). The Topmodel digital terrain analysis software for gridded data
(DTMAnalysis) was made freely available in the 1990s as a Visual Basic program, including sink filling, catchment
delineation, and topographic index derivations (e.g. figure 6). Other DEM routing algorithms have also been used, see for
example Wolock and McCabe (1995), Tarboton (1997) and Pan et al. (2004).

Deleted: t

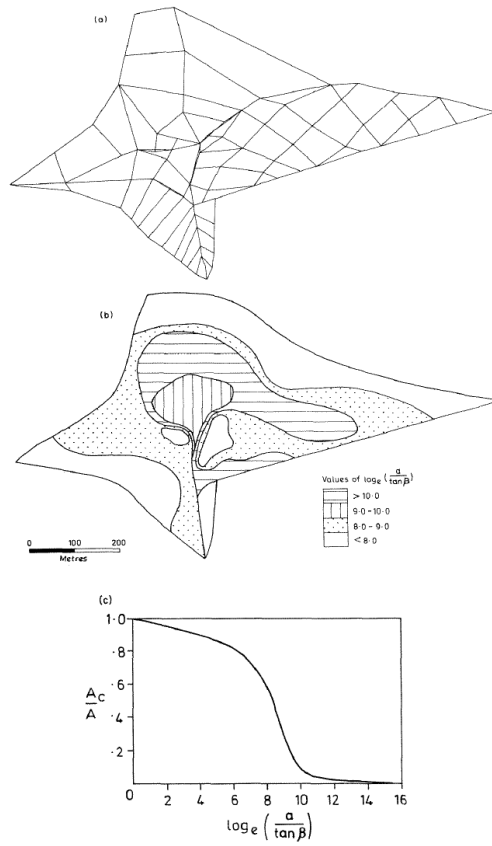


Figure 5. Manual topographic analysis of the Lanshaw subcatchment of Crimple Beck, showing the discretisation and pattern and distribution function of the topographic index (from Beven and Kirkby, 1979)

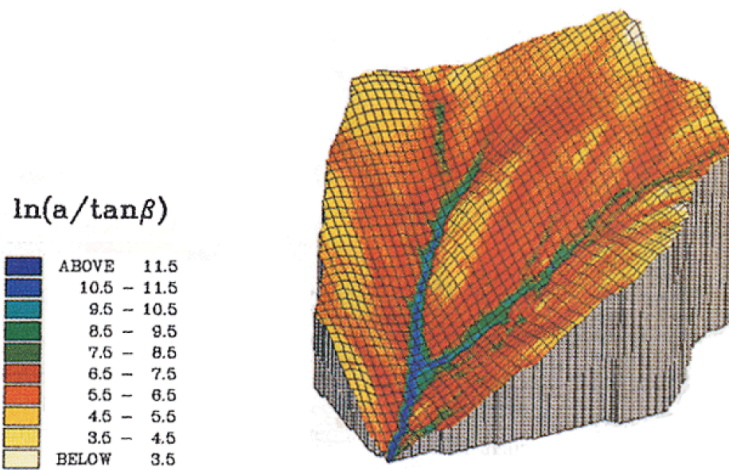


Figure 6. Pattern of topographic index for the Rinkelbach catchment, Vosges, France superimposed on a digital terrain model (after Ambroise et al., 1996b). The highest values in the valley bottom and convergent hollows will be predicted as saturating first. A small spring in the catchment on the right-hand hillslope, indicating subsurface convergence, is not reflected in the pattern of the index shown on this map since this is based on the topographic flow pathways alone.

There were also other aspects to the early days of digital terrain analysis, in particular that the early (relatively coarse) gridded data sets were not necessarily hydrologically consistent i.e. the mapped blue line river network did not always match the lowest points in the digital data. There were also many sinks without outlets, apparently discontinuous rivers, and depending on how the data were processed catchment areas that were incomplete with respect to the contours, or that had gained area from adjacent catchments. All of these issues required either manual intervention or assumptions about how to process the data (e.g. do you raise sinks until there is a downslope pixel or burrow through a barrier to a lower downslope pixel). The Institute of Hydrology was instrumental in developing a more hydrologically consistent 50m digital elevation map for the UK in the 1980s (see, for example, Morris and Heerdegen, 1988).

400 Grid size will also have an impact on the calculated distribution of the topographic index. This has been investigated, for example, by Quinn et al. (1995); Franchini et al., 1996; Saulnier et al., 1997a,b; and Sorenson and Seibert, 2007). Coarser grid sizes will have the effect of increasing the mean value of the topographic index (λ in equation [7]) and will consequently have an impact on calibrated values of the model parameters. Franchini et al. (1996) show how, as a result, calibrated values of the surface transmissivity values tend to be high, and linked to the grid scale used in the topographic analysis. This dependence was investigated further by Saulnier et al. (1997a,b), Ibbitt and Woods (2004); and Ducharme (2009) who suggested ways of correcting for it, and by Pradhan et al. (2006, 2008) who used fractal scaling arguments to adjust topographic index distributions from coarse to fine scales to stabilize parameter estimates.

405

Formatted: Font: Italic

Moved (insertion) [1]

5. Evaluating the Topmodel assumptions

The simplicity of Topmodel has also been criticised (not least by Beven, 1997, and Kirkby, 1997). In particular the three main simplifying assumptions on which the model is based all have been criticised. As stated in Beven (2012, p210) these are:

410

A1 There is a saturated zone that takes up a configuration as if it was in equilibrium with a steady recharge rate over an upslope contributing area a equivalent to the local subsurface discharge at that point.

415

A2 The water table is near to parallel to the surface such that the effective hydraulic gradient is equal to the local surface slope, s

A3 The transmissivity profile may be described by an exponential function of storage deficit, with a value of T_0 when the soil is just saturated to the surface (zero deficit).

420

Some support for assumption A1 has been given by Moore and Thompson (1996) for a catchment in British Columbia, though their sample of water tables were mostly near to the stream and measured infrequently and they suggest more work to assess the limits of validity of the assumption. The assumption has been criticized by Barling et al. (1994) and others who noted that the effective upslope contributing area (a in the topographic index) will, in many catchments, be variable as the catchment wets and dries; larger under wet conditions and much smaller under dry conditions. This was also demonstrated by Western et al. (1999) in the Tarrawarra catchment, where observations of topsoil water content showed that topography can be a control on soil water content in wet conditions but that the pattern will be much more random in dry conditions, reflecting evapotranspiration rather than topographic controls on the patterns of moisture. This should not be a surprise at Tarrawarra which has duplex soils with a shallow active layer underlain by an impermeable subsoil (Western et al., 1999). In dry conditions, evapotranspiration will dominate the pattern of soil moisture in the topsoil; Topmodel has a root zone storage to

425

430

deal with this quite separate from the treatment of downslope flows. It is clear, however, that the potential for a dynamic *a* will be an issue in many catchments, at least seasonally in the transitions from wet to dry conditions. Seibert et al. (2003) also showed that in the Svartberget catchment in Sweden, there was a high correlation between water table levels and distance to the nearest stream, even in upslope areas, but that the patterns over time suggested that assumption A1 was not valid there.

Modifications to Topmodel have been suggested to allow a dynamic recalculation of the topographic index distribution under wetting and drying either as a function of travel times or some representation of the breakdown of subsurface connectivity (Barling et al., 1994; Piñol et al., 1997; Saulnier and Datin, 2004; Loritz et al., 2018). There is an increasing appreciation that connectivity of both surface and subsurface flows on hillslopes is one reason for the nonlinearity of hydrograph responses and the threshold behavior of runoff generation in small catchments (see for example, Graham et al., 2010; McGlynn and Jensco, 2011). The A1 assumption implies that there is always connectivity of downslope flows in the saturated zone, while in the original TOPMODEL any overland flow generated on a topographic index increment is assumed to reach the stream. In some situations this will not be unreasonable in that if an area generates fast runoff frequently (on areas of low slope, or areas of high convergence) there will often be a rill or small channel that conveys that runoff downslope, even if that area might be some way from a channel. Such small rills and channels are often too small to be seen in even fine resolution DTMs, so might be missed in setting up a more detailed model. They can sometimes be clearly seen in the field or from aerial photographs as having different, wetter, vegetation patterns (e.g. Quinn et al., 1998). Elsewhere, there may be cases where predicted areas of saturation are not connected to the stream network and surface run-on effects will be important in increasing soil water content and saturation downslope. The network topographic index of Lane et al. (2004), later incorporated into Distributed Topmodel (see below), was designed to take this into account. Such connectivity can also be represented in Dynamic Topmodel (see below).

As noted earlier, assumption A2 can be expected to hold when there is a saturated zone in a soil profile that is much shallower than the slope length. A2 has, however, been criticized when there are deeper flow pathways. Groundwater analyses suggest that deeper water tables will not be parallel to the surface and may even involve upward fluxes and cross-divide fluxes between catchments. Where this is important in the perceptual model of the response of a catchment, then clearly the Topmodel assumptions will not be valid. This assumption can be relaxed, however. Quinn et al. (1991), for example, showed how the topographic index can be derived using a reference slope pattern for the water table rather than the surface slope. Use of Topmodel in this context then assumes that the water table is always parallel to the reference pattern (except where it intercepts the surface). This will also be an approximation but allows the Topmodel concepts to be applied to a wider range of situations (it might also require use of a non-exponential transmissivity profile, and to allow for the different depths of unsaturated zone that might lie above points with similar reference level topographic index values).

Deleted: and t

Deleted: In other areas, run-on effects will be important in increasing soil water content and saturation downslope. Where this is important it can be represented in the Distributed version of Topmodel, and Dynamic Topmodel (see below). However, those

Deleted: usually

Deleted: ¶
Another criticism of A1 has been that the water table on a hillslope is never in steady state. But as noted earlier that is not exactly what A1 actually says. The starting point is the saturated zone storage (determined by water balance accounting); A1 says only that the configuration of the water table will be as if that storage was in steady state given the discharge at that time step. Clearly this is an approximation but Kirkby (1997), for example, shows how the quasi-steady state assumption that underlies the topographic index can be justified by a kinematic wave analysis of celerities on a hillslope, particularly for the exponential transmissivity profile case. ¶

Deleted: also

Deleted: ,

Deleted: but t

Deleted: e

Beven (1982a, 1984) showed that the exponential assumption of A3 could be justified for at least some soils (see also Michel et al. 2003). Kirkby (1997) also showed that when the subsurface flow is treated as a kinematic wave equation, the exponential assumption is the one form that is fully consistent with the assumption of spatial uniformity of runoff production for all integration times, as well as at steady state. However, one criticism of A3 has that the recession limb of hydrographs is not
490 always of the first order hyperbolic function of time that an exponential transmissivity function implies. That is not too great a problem in that, as noted above, different types of transmissivity profile representing different shapes of recession can be assumed, but which imply a change in the definition of the associated topographic index (Ambroise et al., 1996a; Iorgulescu and Musy, 1997; Duan and Miller, 1997). Note, however, that these forms treat the problem as one of successive steady states for different effective recharge rates, and can only be an approximation for the more dynamic solution for the exponential
495 profile in Kirkby (1997). Other groups have taken a different approach by modifying the Topmodel concepts to allow for more complex process representations in different catchments. In particular, additional storage elements have been added to simulate shallow subsurface stormflows when the exponential store of the original Topmodel did not appear to hold (e.g. Scanlon et al., 2000; Walter et al., 2002; Huang et al., 2009).

500 A further criticism has been that A3 does not properly account for the transient downslope flows in the unsaturated zone. This led Ezio Todini to propose a form of topographic index that allowed for a downslope flow dependent on moisture storage in the unsaturated zone (Todini, 1995) that was later used in the Topkapi model (Ciriapica and Todini, 2002). It should be evident that in considering possible applications of Topmodel it is important to evaluate the assumptions that need to be made. In that these can be stated simply, however, they can readily be compared with the perceptual model of the characteristics and
505 processes in a catchment to decide which sets of assumptions might be more plausible (see, for example, Piñol et al., 1997; Gallart et al., 2007; Beven and Chappell, 2020).

6. Extensions to the classic Topmodel concepts

510 In addition to the extensions and relaxations to the original model formulation discussed in the previous section, Beven (1982b) proposed an extension to the theory to allow for heterogeneity in the soil profile characteristics in a catchment by use of a soil-topographic index $\ln(a/T_o \tan \beta)$ (see also Beven, 1986, 1987). If it is assumed that the soil is everywhere homogeneous then T_o will have no effect on the spatial and cumulative distribution of the index; but if there is evidence to allow it to vary within the catchment then the variability in T_o will change both the pattern and cumulative distribution of the saturated
515 contributing areas. If soil depths vary, this might also require allowing for different depths to the saturated zone for similar values of the index (Quinn et al., 1991; Saulnier et al., 1997c). The soil-topographic index was used in two studies in catchments where many piezometers were available to indicate patterns of saturation (Lamb et al. 1998; Blazkova et al., 2002), allowing local transmissivities to be defined. Interestingly, in both cases, this resulted in a steepening of the cumulative distribution of the index suggesting a later onset of a saturated contributing area but a more rapid spread once it was established.

Moved up [1]: Franchini et al. (1996) show how calibrated values of the surface transmissivity values tend to be high, and linked to the grid scale used in the topographic analysis. This dependence was investigated further by Saulnier et al. (1997a,b), Ibbitt and Woods (2004); and Ducharme (2009) who suggested ways of correcting for it, and by Pradhan et al. (2006, 2008) who used fractal scaling arguments to adjust topographic index distributions from coarse to fine scales to stabilize parameter estimates.

Deleted: , although


Deleted: imates. ↑

Deleted: O

Deleted: We can conclude that it is valuable to evaluate

Greater heterogeneity in soil permeability also means that there is a greater potential for infiltration excess overland flow and Beven (1984) provided a Green-Ampt type solution for infiltration capacity that was consistent with an exponential hydraulic conductivity assumption (see also Larsen et al., 1994). This was implemented in some versions of Topmodel assuming isotropy of vertical and downslope conductivities.

Further extensions were proposed for cases where the catchment recession is not consistent with the exponential storage/flow function of BK79. This was extended to other forms of storage-discharge relationship by Ambroise et al. (1996a) (Figure 7), Iorgulescu and Musy, (1997), and Duan and Miller (1997). These forms then imply the use of a different form of topographic index to $\ln(a/\tan\beta)$, and might also preclude the use of the implicit redistribution of subsurface storage (see Kirkby 1997). A generalised formulation for an arbitrary empirical recession curve was also proposed by Lamb and Beven (1997) and Lamb et al. (1998).

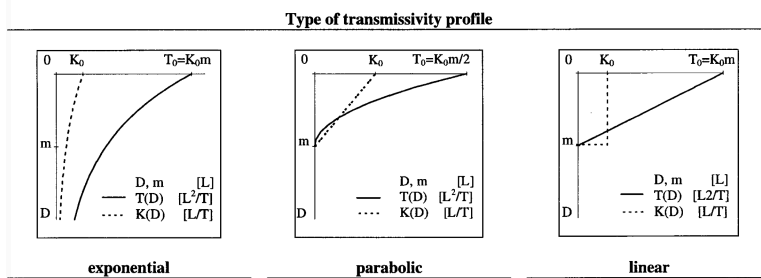

545 **Figure 7. The different types of transmissivity profile considered in Ambroise et al. (1996a).** Note that plotting recession discharges against time for the exponential profile $1/Q_b$ should plot linearly. For the parabolic profile $1/\sqrt{Q_b}$ should plot linearly (for generalisation to a power law function see Iorgulescu and Musy, 1997; Duan and Miller, 1997), and for the linear profile, $\ln Q_b$ should plot linearly (see Ambroise et al., 1996a).

550

7. Evaluating the spatial predictions of Topmodel

As noted earlier, one of the most important features of Topmodel is the possibility of assessing the spatial pattern of predictions of storage deficits, saturated areas, or water tables. The earliest evaluations of the spatial predictions of Topmodel were in Kirkby (1978, Figure 2) and in the original BK79 paper. This was based on field work in the small Lanshaw headwater subcatchment (~0.2 km², 1A in Figure 4) of the Crimple Beck evaluation where a network of over 100 overland flow detectors

560 was installed. These were simple T-tubes of plastic pipe, with holes in the top of the T at ground level such that water would
collect in the vertical tube if overland flow occurred. This is a very simple technique but, of course, only gives a binary
measure of occurrence and requires visiting the network (and being able to find all the tubes) after every storm. This was a
significant effort but allowed percentage saturation statistics to be built up over a number of storms. This showed that
saturation in this subcatchment was related to storm peak discharge but peaked at about 95%, whereas the model predicted up
to 100% saturated contributing area. Further investigation showed that this difference was due to two areas of more permeable
fluvioglacial sand in the catchment that were much less likely to saturate. Even this small catchment was not homogeneous in
565 its soil characteristics.

This is one of the issues in doing this type of comparison (and of setting up hydrological models anywhere since without such
local knowledge they cannot be right in detail). Two types of state observations are generally used in model calibration or
evaluation: percentages or maps of saturated areas at one or more time steps; and point measurements of water tables. Another
570 evaluation of mapped saturated areas at the scale of a small catchment was carried out by Franks et al. (1998) in the *bocage*
landscape of Brittany. They investigated the potential of airborne radar to detect valley bottom saturated areas. This turned
out to be limited by the difficulty of distinguishing saturated from near-saturated areas but, in that landscape, the wet areas
corresponded closely to areas traditionally walled off to keep the cattle out, something that could be used over wider areas in
model evaluation.

575 At a larger catchment scale (40 km²) Güntner et al. (1999) mapped out saturated areas by field surveys in the Brugga catchment
in Germany using pedological and vegetation characteristics, comparing the results with the Topmodel predictions (for a single
optimised parameter set). Their conclusions are an indication of the type of match that might be achieved at this scale: "*Their*
[saturated areas] mean simulated percentage on total catchment area was about 5.5% (Table III) which corresponded well to
580 *the mapped percentage of 6.2%. On the other hand, the simulated percentage of saturated areas was highly variable with time*
(Figure 5 and Table III). During high flow periods it reached nearly 20%. This was in contrast to the field observations, where
spatial variability of the extension of saturated areas was small. A percentage higher than 10% was not reasonable in the
study area, except for extreme situations, which did not occur during the study period. In the model, because of the large
percentage of simulated saturated areas during floods, overland flow rates and consequently total runoff, would be simulated
585 *too high. For compensation, parameter m had to be calibrated to a large value in order to better match observed peak flow at*
the expense of the performance of recession simulation. This is due to the function of this parameter to control the dynamics
of subsurface runoff, with lower m reducing the range of subsurface flow rates and, thus, diminishing peak flow but also
flattening out recessions. In summary, the poor correspondence of calibrated m to its value derived from the recession analysis
revealed that the calibration of m was influenced by inadequacies of the model structure for the study area, i.e. an
590 *overestimation of the dynamics of saturated areas.*" (pp 1616/1617)

Deleted: would

Deleted: .

595 A number of studies have compared Topmodel spatial predictions to observed patterns of water tables and mapped saturated
areas with more or less success (e.g. Ambroise et al., 1996b; Moore and Thompson, 1996; Seibert et al., 1997; Lamb et al.,
1997, 1998; Blazkova et al., 2002; Freer et al., 2004). Two issues arise in comparing observed and predicted water tables.
The first is converting predicted, (gravity drainage) storage deficits to water table depths which (as noted earlier) requires some
assumption about the nature of the relationship between water table depth and deficit due to fast gravity drainage. The second
600 issue is the commensurability issue of comparing the modelled variable, representing some average over a topographic index
increment to local point observed values. These may be given the same names by the hydrologist (soil moisture, water table
depth,...) but represent different quantities when they reflect different scales (see, for example, Freer et al., 2004 who allowed
for sub-grid uncertainty in the model evaluation). This is a particular problem when no information is available about the
spatial variability of transmissivity in the catchment, so that it is necessary to assume a homogeneous transmissivity in the
model. Thus, even if the Topmodel assumptions might be a reasonable simplification in modelling a heterogeneous catchment,
605 we would not then expect the predictions to match the observations exactly (Lamb et al., 1998; Blazkova et al. 2004). Defining
saturated areas relative to the grid scale of the topography and topographic index can also be an issue (Gallart et al., 2008). It
also means that the match can be improved by the back-calculation of a local transmissivity at each observation point or
mapped saturated area boundary to give better fits to stream discharges, though point observations did not prove to have the
effect of also reducing the uncertainty in predicted discharges (Ambroise et al., 1996b; Lamb et al. 1998; Blazkova et al.,
610 2002).

There is also the possibility that subsurface flow lines might not follow the surface topography producing concentrations of
saturation, for example, as the result of fracture systems in the bedrock. This has been found in the Ringelbach catchment
(Ambroise et al., 1996b) and the Slapton Wood catchment (Fisher and Beven, 1996) but of course is very difficult to
615 incorporate in any model without a detailed characterisation of the subsurface. Freer et al. (1997, 2002) found that at the
Maimai and Panola catchments better characterisation of the water tables was achieved using a topographic index based on
the bedrock topography (defined at great effort on a 2m grid with a knocking pole) rather than the surface topography. This
was related to collection of flow in hillslope trenches (although a significant amount of flow was also collected from discrete
macropores in the soil). Obtaining such information over larger areas is, however, much more difficult, even using geophysical
620 methods, and often there is not such a clearly defined transition to bedrock.

It is then interesting to consider how good the spatial predictions should be before the Topmodel assumptions are considered
invalid. If we look in enough detail, all model hypotheses have their limitations, but in making an evaluation it is also
necessary to consider the uncertainties in the forcing and evaluation data and the commensurability issues of comparing
625 observed and predicted variables (see the discussion of Beven, 2019a). Blazkova et al. (2002) considered whether the death
of Topmodel should be declared on the basis of evaluations of both hydrograph and water table predictions and suggested that,
at least for the catchment studied, such an announcement might still be premature. But, we repeat, the Topmodel assumptions

Deleted: modelled

Deleted: ; t

Deleted: i

Deleted: These issues mean that

will apply to only a subset of catchments, and perhaps to only a subset of catchments for which applications of Topmodel have previously been published. One of the reasons for the development of the Dynamic version of Topmodel (see below) was to relax some of the spatial homogeneity assumptions of the original model.

635

As noted previously, one of the features of the Topmodel formulation is that the topographic index on which it is based, both has a physical basis as an index of similarity and allows a computationally efficient code. It may not, however, be the best index of similarity in all catchments, and there have been a number attempts to formulate alternative forms. In particular, indexes based on height above the nearest river channel (Crave and Gascuel-Oudou, 1997; Rennó et al. 2008; Gharari et al., 2011), and an extension of this based on consideration of the dissipation of potential energy (Loritz et al., 2019) have been proposed and tested in discriminating different hydrological responses within catchment. Other approaches have included the travel time index of Barling et al. (1994), the variable recharge index of Woods et al. (1997); the downslope wetness index of Hjerdt et al., (2004), and the hillslope Pecllet number of Berne et al. (2005). Unlike the Kirkby index used in BK79 or the O'Loughlin wetness index, not all of these explicitly consider the effects of hillslope convergence or divergence on saturation and runoff processes. There may, however, be an implicit effect, in that areas of convergence near the base of hillslopes will have a greater area with little elevation difference to the nearest stream, relative to divergent slopes that are more convex in form.

640

645

Deleted: Interestingly, u

Deleted: most of these do not

8. Topmodel calibration and uncertainty estimation

650

One of the original aims of the development of Topmodel was to keep the model structure simple and as parametrically parsimonious as possible while still retaining the possibility of mapping the model predictions back into space and determining the model parameters by field measurement, as in Beven et al., (1984). Table 1 presents the parameters that need to be defined in the classic version of the model. The 1970s was a period when most model applications involved manual calibration, although there had been significant research on the application of automatic computer calibration methods to hydrological models. Automatic methods were still somewhat limited by the computer resources available, especially for models that had large numbers of parameters or were slow to run. Norman Crawford who, as the PhD student of Ray K. Linsley, developed the Stanford Watershed Model (that later developed into the HSPF package) argued that manual calibration was advantageous in that hydrological reasoning could be used in the calibration process. The Stanford model, however, had many more parameters than Topmodel and it was widely suggested at the time at the only person who could successfully calibrate the Stanford Model in this way was Norman Crawford (Crawford and Linsley later founded the Hydrocomp consultancy company to promote the Stanford Model, see Crawford and Burges, 2004).

655

660

Deleted: there was a rumour

In fact, the original BK79 Topmodel paper includes a comparison of field measured and optimised calibrations (as determined from response surface plots) to the Lanshaw subcatchment of the Crimple Beck. This proved to be interesting in that the

665

670 optimisation produced slightly better goodness-of-fit but took the model into a part of the parameter space that meant that [the](#)
contributing area component was entirely eliminated and the whole basin response was simple being represented by the
exponential store. This was not perhaps surprising in this relatively wet, rapidly responding catchment but the manual
calibration was able to ensure that the model functioned as intended (consistent with the perceptual model on which it was
based). KB was always very wary of optimisation methods for model calibration as a result of this experience.

675 This has not prevented the use of automatic optimisation by others, however. Topmodel was quick to run (once the
topographic index distribution had been determined) and so well suited to automatic methods. That also meant that it was
also well suited to the use of random parameter sampling or Monte Carlo methods. KB made the first Monte Carlo experiments
with Topmodel in 1980 when working at the University of Virginia (UVa) in Charlottesville with access to a fast (for its time)
CDC6600 “mainframe” computer. This work was inspired by the Regionalised or Generalised Sensitivity Analysis (GSA)
680 methods developed by George Hornberger (also at UVa), Bob Spear and Peter Young (see Hornberger and Spear, 1981). The
GSA approach differentiated between sets of “behavioural” model parameters and those considered “non-behavioural”. KB
extended this binary classification to express some of the uncertainty associated with the model predictions, by weighting the
outputs from each model run by an informal “likelihood” based on a goodness-of-fit measure. Non-behavioural sets of
parameters are given a likelihood of zero and do not contribute to the prediction uncertainty.

685 This was the origin of the Generalised Likelihood Uncertainty Estimation (GLUE) methodology that was first published more
than a decade later in Beven and Binley (1992). The use of informal likelihoods in GLUE proved to be rather controversial
relative to statistical methods (see Beven et al., 2008; Beven and Binley, 2014), but the methodology has been used extensively,
including in applications of Topmodel and Dynamic Topmodel (as well as with many other models). GLUE does not require
690 a formal statistical model of the residual errors which can be difficult to specify for dynamic models subject to epistemic
uncertainties (see Beven, 2016). The first published application of GLUE to Topmodel, appears to have been that of Beven
(1993), closely followed by Romanowicz et al. (1994) (which did use a formal statistical likelihood within the GLUE
framework with resulting overconditioning), and Freer et al. (1996), who showed how the distributions of model residuals
could be non-Gaussian and non-stationary, and how the likelihood weights could be updated as more data became available.

695 There have been many other applications of Topmodel and Dynamic Topmodel within the GLUE framework that have
included the use of internal state data in model evaluation as well as discharge observations (e.g. Ambrose et al., 1996b; Lamb
et al., 1998; Freer et al., 2004; Gallart et al., 2007) which, it would be hoped, would help judge whether a model is getting a
reasonable fit to the data for the right reasons (Klemeš, 1986; Beven, 1997; Kirchner, 2006). It has also been shown how,
700 even in a catchment where the Topmodel assumptions might be considered to be reasonable, some seasonal variation in
plausible parameter sets could be identified on the basis of non-overlapping distributions of behavioural parameter sets for
sub-annual periods. Freer et al. (2003) and Choi and Beven (2007) showed how such variation could be incorporated into

making predictions by defining classes of hydrologically similar periods; but in both studies this is also an indication of the limitations of the simple Topmodel structure which could, in this case, have been rejected. A similar period classification approach to calibration has been taken more recently by Lan et al. (2018)

Most recently, rather than using an informal likelihood, GLUE has been applied using limits of acceptability that are specified based on what is known about uncertainties in the input and evaluation data before making any runs of the model (Liu et al. 2009; Blazkova and Beven, 2009a; Coxon et al., 2014). This is similar to earlier applications of GLUE based on fuzzy measures and possibilities (e.g. Franks et al., 1998; Freer et al., 2004; Page et al., 2007; Pappenberger et al., 2007). This acts as a form of hypothesis test in conditioning the model space to those areas where plausible models are consistent with the limits of acceptability. It also allows that all the models tried might be rejected (e.g. Hollaway et al., 2018), although in doing so care must be taken to properly assess uncertainty in the available data (Beven, 2019a).

715

9. Topmodel and flood frequency estimation

One important type of application of Topmodel was to make use of its simplicity and computational efficiency to extend the prediction of hydrographs to flood frequency analysis. The first applications to frequency analysis were part of the PhD thesis of Murugesu Sivapalan at Princeton University. This built on the seminal derived distribution approach of Eagleson (1972), using a distribution of storm events to drive the model on a storm by storm basis to generate the distribution of flood peaks, including both infiltration excess and saturation excess runoff generation as a function of the topographic index and antecedent wetness. Sivapalan et al. (1987, 1990) showed how the flood frequency distribution could be expressed as a function of non-dimensionalised rainfall and Topmodel parameters. An important simplification in this work was the neglect of any redistribution of subsurface storage within each event; saturation would occur only by volume filling given the contributing area and deficit at the start of the event. Another aspect of this work was the introduction of the concept of the “Representative Elementary Area” where a similar version of Topmodel was used, with rainfalls assumed to be statistically homogeneous with a certain correlation length, to assess the scale at which *pattern* in hydrological heterogeneity became less important, although the nonlinearities arising from the *distribution* of that heterogeneity might still be important (Wood et al., 1988).

The need to generate antecedent conditions for each storm could be avoided by using the model in continuous simulation mode. This allows the antecedent conditions for each event to be consistent with the sequence of previous events. This became possible as more computer power became available, allowing very long runs with hourly time steps to assess the frequency statistics of rare events. This had been done before using of long observed rainfall sequences driving a variety of hydrological models (e.g. Thomas, 1982; Calver and Lamb, 1995), but Beven (1986, 1987) first combined stochastic rainfall

735

and evapotranspiration generation with Topmodel on an hourly time step as a way of producing sequences of flood peaks for the Plynlimon catchments in Wales. Other applications included catchments in the Czech Republic (Blazkova and Beven, 1997).

740

More computer power still, notably with the use of parallel PC clusters, allowed this approach to be applied with sets of behavioural model parameters determined by comparison with historical discharges at a site within the GLUE framework (e.g. Cameron et al., 1999, 2000a,b; Blazkova and Beven, 2002). One of the results of such calibrations was that the annual maximum frequency distribution could be matched quite well, but not necessarily with the same storms in each year of record, due to the uncertainty in both model predictions and observed discharges (Cameron et al., 1999; Lamb, 1999). A second result was that in doing the comparison it was important to compare like with like. Particularly in smaller catchments the instantaneous flood peak frequency distribution could have a quite different form to the distribution of peaks for hourly time steps, as predicted by the model (Cameron et al., 2000a). A third issue is that when the rainfall model or hydrological model are calibrated against a relatively short period of record, that period may not be representative of the longer-term frequency characteristics (e.g. Cameron et al., 2000c; Blazkova and Beven, 2009a).

745

750

Deleted: longer

Deleted: (

Deleted:

Deleted: 9

This work has included some very long runs of the model (multiple sequences of 100000 years) in order to assess the frequency of extreme events for dam safety assessment (e.g. Blazkova and Beven, 2004). In doing so there are issues about the stochastic generation of very extreme rainfall events. Where the underlying distributions in the stochastic input generator are assumed to have infinite tails some physically unrealistic storm volumes can be generated. This can be avoided either by using a modified distribution (e.g. Cameron et al., 2000c) or by limiting storms to a local estimate of probable maximum precipitation (Blazkova and Beven, 2004). The latter, of course, can also be controversial but is often used in dam safety assessments. One advantage of the continuous simulation approach to dam safety is that both the magnitude of the flood peak, and the total volume of runoff supplied can be assessed. The biggest threat will not necessarily come from the storm with the highest peak if that peak is of short duration (Blazkova and Beven, 2009b).

755

760

Another important question is how the frequency of floods might change with changes in climate. The continuous simulation approach using Topmodel has been applied in this context, including taking account of the uncertainty in reproducing past hydrograph data (e.g. Beven and Blazkova, 1999; Cameron et al., 2000b). Any such estimates can only represent potential scenarios because of the dependence on estimates of changes in precipitation and other weather variables provided by the climate models. They thus cannot be associated with any reliable estimates of probabilities such that there may be better ways of being precautionary about future changes (Beven, 2011). This work did produce one interesting insight, however. In general the change in the mean estimate of a rare event (say with 0.01 annual exceedance probability) was much less than the uncertainty of estimating that event under current conditions. However, the steepness of the cumulative distribution function

765

775 for such an event could imply a significant change in the [probability of exceedance for specific values of discharge \(such as that at which defences might be over-topped\)](#).

Deleted: risk

10. A Distributed Topmodel

780 It is not necessary, of course, to group pixels together into classes based on the topographic index. The model could equally be run as a fully distributed model. The obvious advantage of doing so is that the routing of surface runoff can be more explicitly linked to the topography, and more flexibility is possible in defining pixel characteristics. Gao et al. (2015) have followed this route, combining the implicit subsurface redistribution of storage based on assumptions A1 and A2 with a stochastic surface flow routing algorithm. This is based on a mean velocity linked to surface storage in a pixel, an exponential
785 distribution of velocities for surface runoff parcels of water that results in different travel distances for the parcels, and a probabilistic weighting of directions based on the local downslope topography. This results in more diffuse patterns of runoff in both space and time, but at the expense of significantly more computational expense. Gao et al. (2016, 2017) show how the flexibility of the distributed form of the model can be used to represent land management patterns and changes in upland peatland catchments in the UK in this way.

790

11. Developing Dynamic Topmodel

795 [A version of Topmodel called Dynamic Topmodel was developed to overcome some of the limitations of the classical version](#) by relaxing assumption A1 to create a more dynamic model both in the subsurface storage-discharge relationship and in the treatment of the effective upslope area. The obvious starting point, for the type of shallow, humid, sloping systems for which the classical Topmodel was intended is to formulate the model within the framework of a kinematic wave equation. Kirkby (1997) did this for a single hillslope segment, noting that a more dynamic subsurface routing would particularly be required for transmissivity functions other than the original exponential form. Beven and Freer (2001) later created Dynamic Topmodel
800 which uses kinematic wave routing for subsurface flows between classes of “hydrologically similar” points in a catchment, where the classification need not be based on a form of $(a/\tan\beta)$ index alone. This then requires a digital terrain analysis that keeps track of all the pathways between one similarity group and others, including discharges to the river network. If does, however, allow much more flexibility in allowing spatial patterns of catchment characteristics into account to reflect an appropriate perceptual model of catchment responses, in that different similarity classes can have different structures and parameters. However, this flexibility is at the cost of introducing more parameters to be defined or calibrated which is not
805 generally simple to do. The root zone and evapotranspiration components of Dynamic Topmodel were carried over from the original version, but also have been made more complex elsewhere (e.g. in the HYDROBLOCKS code of Chaney et al., 2016).

Deleted: A further step is then to make

Deleted: the subsurface routing also more dynamic

Dynamic Topmodel has been applied in a number of studies including the Panola (Peters et al., 2003), Plynlimon (Page et al., 2007), Maimai (Beven and Freer, 2001; Freer et al., 2004), Attert (Liu et al., 2009) and Brompton (Metcalf et al., 2017) catchments.

815 A somewhat similar approach, but applied on a gridded DEM as a fully distributed model, has been taken in the DVSHM
model of Wigmosta et al. (1994) and Adriance et al. (2018). Care then needs to be taken in the numerical implementation,
particularly in the gridded approach, as kinematic shocks can arise where there are changes of slope or asymmetric convergent
hollows. This can lead to numerical dispersion or instabilities, particularly in an explicit time stepping solution. Instabilities
can be avoided by applying a 4-point kinematic wave solution at a pixel level, where all upslope inputs have already been
820 solved and can be added so that only the downslope flow is unknown (Beven, 2012). The original Dynamic Topmodel code
was written in Fortran 77 and has been later modified into the DECIPHeR Fortran 2008 code of Coxon et al. (2019) which
involved a number of important changes to explore simulations over national scale domains, simulating hundreds of
catchments. A version in R was provided by Metcalfe et al. (2015) including tests of the effects of spatial and temporal
resolution. Metcalfe et al. showed that convergence of the hydrograph predictions require a discretisation of the catchment
825 into the hydrologically similar unit (HSU) classes that results in a cascade of 10-15 downslope HSUs. This version has since
been developed further at Lancaster University. The Regional Hydro-Ecological Simulation System (RHESsys) that had
originally combined the BIOME_BGC biogeochemical model with the original version of Topmodel (Band et al., 1993), also
later incorporated a similar gridded kinematic routing algorithm as an alternative, (Tague and Band, 2004).

Deleted: and used in Beven et al. (2020)

830 Another gridded kinematic wave model that was inspired by the original Topmodel is Topkapi (Todini, 1995; Ciarapica and
Todini, 2002). This was intended to relax the steady state assumption of Topmodel and include the downslope unsaturated
fluxes as a function of water content. It was also aimed at having model parameters that were effectively scale independent
by integrating the equations over the grid scale into a cascade of nonlinear reservoirs (Liu and Todini, 2005). The theory
underlying Topkapi also resulted in a form of soil-topographic index but most applications have been made using a gridded
835 discretisation of the catchment. Later work added deep percolation and groundwater components (Liu et al., 2005).

12. Wider applications of Topmodel

There have been a number of different areas where variants of Topmodel have been used as the hydrological basis for other
840 types of predictions.

The original evapotranspiration and root zone component of Topmodel was very simple. This was by design, so as to again
introduce only the minimum number of parameters to be calibrated (only one parameter is needed, the effective available water
capacity for actual evapotranspiration). This was supported by the study of Calder et al. (1983) who showed that very simple

evapotranspiration models could reproduce soil moisture deficits just as well as complex models as sites across the UK, even during the extreme drought year of 1976. Beven and Quinn (1994) later used a more complex root zone representation, including the possibility of capillary rise, in studies of variability in water balance (see also Tague and Band, 2004).

Deleted: Since then, however, there has been some interest in taking more explicit account of different vegetation covers within the Topmodel framework.

Deleted:

850 New forms were also driven by the aim of incorporating some effects of topographic and vegetation variability into the land surface parameterisations of atmospheric circulation models. The earliest attempt to do so was the Topmodel-based Land surface – Atmosphere Transfer Scheme (Toplats) formulation produced in the PhD of Jay Famiglietti at Princeton University (Famiglietti and Wood, 1994). This was later modified to add more energy budget components (Peters-Lidard et al., 1997; Pauwels and Wood, 1999), and is still being used (e.g. Fu et al., 2018). The potential for allowing for subgrid variability in
855 hydrological states in the TOPUP land surface parameterisation based on Topmodel was also explored by Quinn et al. (1995b) and Franks et al. (1997). A version of Topmodel was later included in the land surface parameterisations used by the UK MetOffice (MOSES2 then JULES, Essery et al., 2003; Best et al., 2011; Zulkafli et al., 2013), while MeteoFRANCE use ISBA-Topmodel as a land surface parameterisation (Habets and Saulnier, 2001; Vincendon et al., 2010). There has also been a form of land surface parameterisation based on Dynamic Topmodel called HYDROBLOCKS developed by Chaney et al.
860 (2016) designed to allow the representation of high-resolution local variability. We note, however, that simple use of the Topmodel concepts are very unlikely to be valid in many parts of the globe where these land surface parameterisations are likely to be used. It is to be hoped that they are used with care.

Another interesting extension of the use of Topmodel and Dynamic Topmodel has been in the prediction of solute
865 concentrations in small catchments. One of the features of being able to map the predictions back into space is that the pattern of storage deficits or water table levels along the stream network can be determined on a time step by time step basis. Robson et al. (1992) made use of this by assuming, on the basis of field observations that different soil horizons could be associated with different chemical signatures, with the resulting stream concentration being made up of water displaced from those horizons. Both stream chemistry and the hydrograph separation between near surface acidic and deeper more buffered waters
870 were simulated reasonably well in a small stream in upland Wales. Page et al. (2007) used Dynamic Topmodel to simulate chloride concentrations for two streams at Plynlimon, adding some exchanges with “immobile” storage to account for the differences in flow and tracer responses. Chloride was chosen as a relatively conservative tracer, but it was found that for the period under study the observations had a marked imbalance between inputs and outputs, possible due to dry deposition and occult deposition in this maritime site. It was therefore necessary to reconstruct the input signal. Additional mixing
875 assumptions and parameters were required for the model stores. It was shown that the model could reproduce the long term seasonal behaviour quite well, but it did not do so well on the short term storm dynamics.

The network topographic index has also been used as the basis for mapping of relative risk for solutes, sediments and faecal bacteria within the SCIMAP system (e.g. Milledge et al., 2012; Porter et al., 2016).

Deleted: Lane et al., 2009;

885

13. What would we do now?

A lot has happened since Topmodel was originally formulated in the 1970s especially in terms of the computer power available to modellers and information about catchments through mapping and satellite images. Some things, however, remain only rather poorly known; perhaps most importantly the subsurface structures and flow characteristics in catchments, including the potential for preferential flows (Beven and Germann, 1982; 2013) and changing connectivities on hillslopes (Hopp and McDonnell, 2009; Jensco and McGlynn, 2011; Tetzlaff et al., 2014; Bergstrom et al., 2016). Some important new understanding of catchment processes has been gained over that period, particularly the use of environmental isotopes to study the residence times and contributions of pre-event water to hydrographs. While it is not strictly necessary to take this into account in modelling catchment discharges (see the discussion of velocities and celerities in McDonnell and Beven, 2014, and Beven, 2020, for example), there have been increasing demands to link surface and subsurface predictions to solute transport, sediment mobilisation and transport, and biogeochemistry and many studies have used Topmodel as a basis for building more complex model structures and land surface parameterisations (e.g. HYDROBLOCKS, RHESys, JULES etc as noted above). It certainly seems that the simplicity of the topographic index approach is still attractive. Perhaps too attractive, in that it is clear that many applications of Topmodel have been to catchments where the assumptions are clearly not even approximately valid. Regardless of the validity of the assumptions it can still be calibrated to provide a nonlinear runoff generation function, but it might be hoped that applications would be made with a bit more hydrological thought.

It is, however, interesting to speculate about what we would do if we were starting over to develop a simple hydrological model that showed some physical basis to its process representations, including the effect of hillslope form on surface and subsurface runoff generation; that was fast to run so that the uncertainty associated with the predictions could be assessed and/or such models can be run for “everywhere”; and where the spatial predictions could be mapped back into space to give the potential for some evaluation and inference about processes in the catchment. This is already a demanding set of requirements, satisfied by Topmodel through the use of the topographic index as an index of hydrological similarity but few other models. The key assumption is then that the saturated zone takes up a configuration as if there was a uniform recharge flux everywhere on the hillslopes equivalent to the saturated zone discharge.

Increased computer power does mean that some complexity can be added, while still retaining the possibility of running the model many times. This is already reflected in the explicit downslope routing incorporated into Dynamic Topmodel, the Distributed Topmodel, and DECIPHeR and a more explicit account of spatial heterogeneities that are perceived as being hydrologically important. There is still some computational advantage of retaining a similarity idea (as in Dynamic Topmodel) as opposed to a fully distributed model which will normally require a coarser spatial resolution for similar run times.

Deleted: which has also allowed the relaxation of some of the other assumptions of the Original Topmodel

The process descriptions in Dynamic Topmodel have not, however, changed so very much. There is more flexibility in defining the subsurface transmissivity functions, and storage deficits at which downslope flows cease, to allow for dynamic conductivity effects, but the constant local hydraulic gradient, root zone, and recharge calculations have not changed significantly. In part this was always driven by a wish to reduce the number of parameters; including not separating
925 interception and root zone stores and allowing recharge only when the root zone reaches some “field capacity” threshold. Preferential flows are implicit in this excess for vertical flows and in the transmissivity function for downslope flows. Different options would be relatively simple to implement if driven by a different perceptual model of catchment response or different application requirements as in the different implementations of the original Topmodel, but again at the cost of requiring more parameter values to be defined.

930 It is possible to think about a different way of process representations in models of this type by drawing an analogy between these HSUs and the Representative Elementary Watershed (REW) concept (e.g. Reggiani and Rientjes, 2005). In the REW framework, the mass balance, energy balance and momentum balance conservation equations should hold at any discretisation scale. What is then necessary to apply those equations is to relate the boundary fluxes of each element to the internal states of
935 that element. This approach has the advantage of avoiding any reference to continuum differential equations, since differential gradients of hydrological variables, do not really have much meaning at scales of interest (see, for example, Beven, 2006, 2019b). It also implies that, given that there is a length scale for any discretisation, the process representation that links states and fluxes should be scale dependent (Beven, 2006). Here is an opportunity for real progress to be made in terms of model parameterisations, but the problem has not yet been solved. How, for example, does the hysteresis in the boundary fluxes
940 relative to states, due to differences between velocities and celerities, change with scale and wetness (e.g. Davies and Beven, 2015). And, if we are interested in predicting transport as well as flows, how do the residence times and transit time distributions in an element vary with that hysteresis. It would be a real advance to make progress with this type of representation in a simple parametrically parsimonious way. However, any evaluation of the results will continue to depend
945 on also making advances in observational methods (Beven, 2019a; Beven et al., 2020).

Another aspect of hydrological modelling that has become more possible with modern computing and databases is running models to represent “everywhere” (Beven, 2007; Beven and Alcock, 2012; Blair et al., 2019). This has the potential to change the way that modelling is done from trying to find generalised model structures to apply widely, to a learning process about places. Dynamic Topmodel, in its DECIPHeR form, has already been applied to the whole of Great Britain (Coxon et al.,
950 2019) making it very obvious where some of the model assumptions were not valid and local modifications would be necessary (notably in predicting catchments with large groundwater storages). Other catchments where the assumptions might be expected to hold better also showed rather variable modelling efficiencies but, again, this might be a matter of uncertainties in the hydrological data as much as a problem of model structure. What such results do encourage, is the investigation of why the predictions are not so good locally, and not only at the catchment level but also at very local levels where spatial predictions

Deleted:

Deleted: in systems where gradients of most variables at larger scale...

can be compared with useful hydrological information. This can include specific monitoring at sites of interest, organised field campaigns, and citizen science type of local information as part of the learning process. Learning from where the model predictions can be shown to be wrong is certainly going to be one way to advance modelling practice in future. The flexibility of the different ways of classifying the landscape and the possibility of modifying model structures and parameters in different classes in the different implementations of Dynamic Topmodel should prove useful in that respect.

965

Acknowledgements

KB would like to recognise the characteristic generosity of Mike Kirkby in allowing the original author order to be alphabetical, despite the fact that Topmodel was based on his original idea for the topographic index. Not only that but he even offered his new post-doc a room in his house while he house-hunted in Leeds, a stay that extended to 3 months! Many people have contributed to the development of the Topmodel concepts and associated fieldwork over the years. We would like to acknowledge particularly Bruno Ambroise, Daniela Balin, Kathy Bashford, Sarka Blazkova, Patricia Bruneau, Wouter Buytaert, Paul Campling, Flavie Cernesson, Pierre Chevalier, Hyung Tae Choi, Roger Clapp, Jack Cosby, Gemma Coxon, Patrick Durant, James Fisher, Stewart Franks, Francesc Gallart, Chantal Gascuel-Odoux, Anna Gobin, Hannah Green, George Hornberger, Ion Iorgulescu, Dick Iredale, Christophe Joerin, Alena Kulusova, Jérôme Latron, Pilar Llorens, Yanli Liu, Jeff McDonnell, Hilary McMillan, Philippe Merot, Norm Miller, Stefan Myrabo, Colin Neal, Charles Oblad, Bo Ostendorf, Trevor Page, Jake Peters, Pep Piñol, Olivier Planchon, N. Pradhan, Paul Quinn, Alice Robson, Renata Romanowicz, David Sappington, Georges-Marie Saulnier, Jan Seibert, Murugesu Sivapalan, Nick Schofield, Paul Smith, Andy Tagg, Jacques Wendling, Eric Wood, and Philip Younger. We would also like to dedicate the paper to the memory of Peter Metcalfe, who was applying a version of Dynamic Topmodel in R to natural flood management applications with great enthusiasm and effectiveness at the time of his death in a climbing accident in 2018. The Q-NFM project and the contribution of KB to this paper was funded by NERC Grant NE/R004722/1 led by Nick Chappell. [JF was partly funded by the Global Water Futures Program of the University of Saskatchewan.](#)

985

References

Adriance, A., Pantoja, M. and Lupo, C.: September. Acceleration of Hydrology Simulations Using DHSVM for Multi-thousand Runs and Uncertainty Assessment. In *Latin American High Performance Computing Conference* (pp. 179-193). Springer, Cham., 2018

990

Deleted: e

Deleted: o

Deleted: ,

- 995 Ambroise, B., K.J. Beven and J. Freer: Towards a generalisation of the TOPMODEL concepts: topographic indices of hydrological similarity, *Water Resources Research*, 32(7), 2135-2145, 1996a.
- Ambroise, B., J. Freer and K.J. Beven: Application of a generalised TOPMODEL to the small Ringelbach catchment, Vosges, France, *Water Resources Research*, 32(7), 2147-2159, 1996b.
- 1000 Aryal, S.K., O'Loughlin, E.M. and Mein, R.G.: A similarity approach to determine response times to steady-state saturation in landscapes. *Advances in Water Resources*, 28(2), 99-115, 2005.
- Band, L.E., Patterson, P., Nemani, R. and Running, S.W.: Forest ecosystem processes at the watershed scale: incorporating hillslope hydrology. *Agricultural and Forest Meteorology*, 63(1-2), 93-126, 1993.
- 1005 Barling, R. D., I. D. Moore, and R. B. Grayson: A quasi-dynamic wetness index for characterizing the spatial distribution of zones of surface saturation and soil water contents, *Water Resour. Res.*, 30, 1029– 1044, doi:10.1029/93WR03346, 1994.
- Bergstrom, A., K. Jencso, and B. McGlynn: Spatiotemporal processes that contribute to hydrologic exchange between hillslopes, valley bottoms, and streams, *Water Resour. Res.*, 52, 4628–4645, doi:10.1002/2015WR017972, 2016.
- Berne, A., Uijlenhoet, R., and Troch, P. A.: Similarity analysis of subsurface flow response of hillslopes with complex geometry, *Water Resour. Res.*, 41, 1–10, <https://doi.org/10.1029/2004WR003629>, 2005.
- 1015 Best, M.J., Pryor, M., Clark, D.B., Rooney, G.G., Essery, R.L.H., Ménard, C.B., Edwards, J.M., Hendry, M.A., Porson, A., Gedney, N. and Mercado, L.M.: The Joint UK Land Environment Simulator (JULES), model description–Part 1: energy and water fluxes. *Geoscientific Model Development*, 4(1), 677-699, 2011.
- 1020 Betson, R. P.: What is watershed runoff, *J. Geophys. Res.*, 69,1541-1551, 1964.
- Beven, K.J.: The hydrological response of headwater and sideslope areas. *Hydrological Sciences Bulletin*, 23(4), 419-437, 1978.
- 1025 Beven, K.J.: On the generalised kinematic routing method'. *Water Resources Research*, 15(5), 1238-1242, 1979.
- Beven, K.J.: On Subsurface Stormflow: an analysis of response times, *Hydrological Sciences Journal*, 27(4), 505-521, 1982a.

- 1030 Beven, K. J.: Introducing spatially variable conductivities into Topmodel, Unpublished Research Report, Department of Environmental Sciences, University of Virginia, Charlottesville, VA, 1982b.
- Beven, K.J.: Infiltration into a class of vertically non-uniform soils, *Hydrological Sciences Journal*, 29(4), 425-434, 1984.
- Beven, K.J.: Hillslope runoff processes and flood frequency characteristics. In: A. D. Abrahams (Editor), Hillslope Processes. Allen and Unwin, Boston, Mass., 187-202, 1986a.
- 1035 Beven K.J.: Runoff production and flood frequency in catchments of order n: an alternative approach. In: V.K. Gupta, I. Rodriguez-Iturbe and E.F. Wood (Editors), Scale Problems in Hydrology. Reidel, Dordrecht. 117-131, 1986b.
- 1040 Beven, K.J.: Towards the use of catchment geomorphology in flood frequency predictions. *Earth Surf. Process. Landf.* 12, 69-82., 1987.
- Beven, K.J.: Prophecy, reality and uncertainty in distributed hydrological modelling, *Adv. in Water Resour.*, 16, 41-51, 1993.
- 1045 Beven, K. J.: TOPMODEL: a critique, *Hydrol. Process.*, 11(9), 1069-1086, 1997.
- Beven, K. J.: Robert Horton and abrupt rises of groundwater, *Hydrological Processes*, 18, 3687-3696, 2004.
- Beven, K. J.: The Holy Grail of Scientific Hydrology: $Q_t = H(\underline{SR})A$ as closure, *Hydrology and Earth Systems Science*, 10, 609-618, 2006.
- 1050 Beven, K. J. Working towards integrated environmental models of everywhere: uncertainty, data, and modelling as a learning process. *Hydrology and Earth System Science*, 11(1), 460-467, 2007.
- Beven, K. J.: I believe in climate change but how precautionary do we need to be in planning for the future?, *Hydrological Processes*, 25, 1517-1520, DOI: 10.1002/hyp.7939, 2011.
- 1055 Beven, K. J.: *Rainfall-Runoff Modelling: The Primer*, 2nd edition, Wiley-Blackwell, Chichester, 2012
- Beven, K. J.: Towards a methodology for testing models as hypotheses in the inexact sciences, *Proceedings Royal Society A*, 475 (2224), doi: 10.1098/rspa.2018.0862, 2019a.
- 1060

Formatted: Font: (Default) +Body (Calibri)

[Beven, K. J. How to make advances in hydrological modelling, *Hydrology Research*, 50\(6\): 1481-1494 doi:10.2166/nh.2019.134.2019b](#)

Formatted: Font: (Default) +Body (Calibri), 10 pt

Formatted: Justified, Line spacing: 1.5 lines, No bullets or numbering

Formatted: Font: (Default) +Body (Calibri), 10 pt

Deleted: ¶

Formatted: Font: (Default) +Body (Calibri)

1065 Beven, K. J.: A history of the concept of time of concentration, *Hydrology and Earth System Sciences*, 24, 2655–2670, doi:10.5194/hess-24-2655-2020, 2020.

Beven, K. J. and Alcock, R.: Modelling everything everywhere: a new approach to decision making for water management under uncertainty, *Freshwater Biology*, 56, 124-132, doi:10.1111/j.1365-2427.2011.02592.x, 2012.

1070

Beven, K. J., Asadullah, A., Bates, P. D., Blyth, E., Chappell, N.A., Child, S., Cloke, H., Dadson, S., Everard, N., Fowler, H. J., Freer, J., Hannah, D.M., Heppell, C., Holden, J., Lamb, R., Lewis, H., Morgan, G., Parry, L., Wagener, T.: Developing observational methods to drive future hydrological science: can we make a start as a community?, *Hydrological Processes*, doi: 10.1002/hyp.13622, 2019.

1075

Beven, K.J. and A.M. Binley: The future of distributed models: model calibration and uncertainty prediction, *Hydrological Processes*, 6, 279-298, 1992.

Beven, K. J., and Binley, A. M.: GLUE, 20 years on. *Hydrol. Process.* 28(24):5897-5918, doi: 10.1002/hyp.10082, 2014.

1080

Beven, K J and Blazkova, S.: Estimating changes in flood frequency under climate change by continuous simulation (with uncertainty), in P. Balbanis, A. Bronstert, R. Casale and P. Samuels (Eds.) RIBAMOD, River Basin Modelling, Management and Flood Mitigation, EU Publication EUR 18287, 269-285, 1999.

1085 Beven, K.J., Callen, J.L.: HYDRODAT: A system of FORTRAN computer programs for the preparation and analysis of hydrological data from charts. British Geomorphological Research Group, *Technical Bulletin 23*, 1979.

Beven, K. J., and Chappell, N. A.: Perceptual perplexity and parameter parsimony, *WIRES Water*, submitted, 2020.

1090 Beven, K J and Freer, J.: A Dynamic TOPMODEL, *Hydrol. Process.*, 15(10), 1993-2011, 2001.

Beven, K.J., and Germann, P.F.: Macropores and water flow in soils, *Water Resources Research*, 18(5), 1311-1325, 1982.

1095 Beven, K. J. and Germann, P. F.: Macropores and water flow in soils revisited, *Water Resour. Res.*, 49(6), 3071-3092 DOI: 10.1002/wrcr.20156, 2013.

- Beven, K.J., Kirkby, M.J.: A physically-based variable contributing area model of basin hydrology. *Hydrological Sciences Bulletin*, 24(1), 43-69, 1979.
- 1100 Beven, K.J., Kirkby, M.J., Schofield, N., Tagg, A.: Testing a physically-based flood forecasting model (TOPMODEL) for three UK catchments, *J. Hydrology*, 69, 119-143, 1984.
- Beven, K.J., R. Lamb, P. Quinn, R. Romanowicz and J. Freer: TOPMODEL, in V.P. Singh (Ed.) *Computer Models of Watershed Hydrology*, Water Resource Publications, Colorado, pp. 627-668, 1995.
- 1105 Beven, K.J. and P.F. Quinn: Similarity and scale effects in the water balance of heterogeneous areas, in Keane, T. and Daly, E. (Eds.) *The balance of Water - present and future*, pp.69-86, AGMET, Dublin, 1994.
- 1110 Beven, K., and E. F. Wood: Catchment geomorphology and the dynamics of runoff contributing areas, *J. Hydrol.*, 65, 139-158, 1983.
- Blair, G.S., Beven, K.J., Lamb, R., Bassett, R., Cauwenberghs, K., Hankin, B., Dean, G., Hunter, N., Edwards, E., Nundloll, V., Samreen, F., Simm, W., Towe, R.: Models of Everywhere Revisited: A Technological Perspective, *Environmental Modelling and Software*, <https://doi.org/10.1016/j.envsoft.2019.104521>, 2019
- 1115 Blazkova, S. and K.J. Beven: Flood Frequency Prediction for data limited catchments in the Czech Republic using a stochastic rainfall model and TOPMODEL, *J. Hydrol.*, 195, 256-278, 1997.
- 1120 Blazkova, S, Beven, K, Tacheci, P and Kulasova, A.: Testing the distributed water table predictions of TOPMODEL (allowing for uncertainty in model calibration): the death of TOPMODEL?, *Water Resources Research*, 38(11), W01257, 10.1029/2001WR000912, 2002.
- Blazkova, S and Beven, K J.: Flood Frequency Estimation by Continuous Simulation for a Catchment treated as Ungauged (with Uncertainty), *Water Resources Research* 38(8), 10.1029/2001WR000500, 2002.
- 1125 Blazkova, S and Beven, K J.: Flood frequency estimation by continuous simulation of subcatchment rainfalls and discharges with the aim of improving dam safety assessment in a large basin in the Czech Republic, *J. Hydrology*, 292, 153-172, 2004.

1130 Blazkova, S., and Beven, K. J.: A limits of acceptability approach to model evaluation and uncertainty estimation in flood frequency estimation by continuous simulation: Skalka catchment, Czech Republic, *Water Resour. Res.*, 45, W00B16, doi:10.1029/2007WR006726, 2009a.

Blazkova, S and Beven, K J.: Uncertainty in Flood Estimation, *Structure and Infrastructure Engineering*, 5(4), 325:332, doi: 10.1080/15732470701189514, 2009b.

1135 [Borga, M., Dalla Fontana, G. and Cazorzi, F., Analysis of topographic and climatic control on rainfall-triggered shallow landsliding using a quasi-dynamic wetness index. *J. Hydrology*, 268\(1-4\), 56-71, 2002.](#)

1140 [Buytaert, W. topmodel: Implementation of the Hydrological Model TOPMODEL in R, <https://CRAN.R-project.org/package=topmodel>, Rpackage version 0.7.3, 2018.](#)

Formatted: Font: 10 pt

Formatted: Font: 10 pt

Formatted: Font: 10 pt

Formatted: Font: 10 pt

Calder, I. R., Harding, R. J. and Rosier, P.T.W.: An objective assessment of soil moisture deficit models, *J. Hydrology*, 185: 363-378, 1983.

1145 Calver, A. and Lamb, R.: Flood frequency estimation using continuous rainfall-runoff modelling. *Physics and Chemistry of the Earth*, 20(5-6), 479-483, 1995.

Cameron, D, Beven, K J, Tawn, J, Blazkova, S and Naden, P.: Flood frequency estimation by continuous simulation for a gauged upland catchment (with uncertainty), *J. Hydrology*, 219, 169-187, 1999.

Cameron, D, Beven, K J, Tawn, J, and Naden, P.: Flood frequency estimation by continuous simulation (with likelihood based uncertainty estimation), *Hydrology and Earth System Science*, 4(1), 23-34, 2000a.

1155 Cameron, D., Beven, K. and Naden, P.: Flood frequency estimation under climate change (with uncertainty). *Hydrology and Earth System Sciences*, 4(3), 393-405, 2000b

Cameron, D, Beven, K J, and Tawn, J.: An evaluation of three stochastic rainfall models, *J. Hydrology.*, 228, 130-149, 2000c.

1160 Chaney, N.W., Metcalfe, P. and Wood, E.F.: HydroBlocks: a field-scale resolving land surface model for application over continental extents. *Hydrological Processes*, 30(20), 3543-3559, 2016.

Deleted: ¶

165 [Chirico, G.B., Grayson, R.B. and Western, A.W. On the computation of the quasi-dynamic wetness index with multiple-flow-direction algorithms. *Water Resources Research*, 39\(5\), 1115, doi:10.1029/2002WR001754, 2003.](#)

Deleted: ¶

Formatted: Normal

Choi, H T and Beven, K J.: Multi-period and Multi-criteria Model Conditioning to Reduce Prediction Uncertainty in Distributed Rainfall-Runoff Modelling within GLUE framework, *J. Hydrology*, 332 (3-4): 316-336, 2007.

1170 Ciarapica L. and Todini E. TOPKAPI: A model for the representation of the rainfall-runoff process at different scales. *Hydrological Processes*, 16:207-229, 2002.

Clark, M. P., Slater, A. G., Rupp, D. E., Woods, R. A., Vrugt, J. A., Gupta, H. V., Wagener, T., and Hay, L. E.: Framework for Understanding Structural Errors (FUSE): A modular framework to diagnose differences between hydrological models, *Water Resour. Res.*, 44, W00B02, <https://doi.org/10.1029/2007WR006735>, 2008.

1175 Coxon, G., Freer, J., Wagener, T., Odoni, N.A. and Clark, M.: Diagnostic evaluation of multiple hypotheses of hydrological behaviour in a limits-of-acceptability framework for 24 UK catchments. *Hydrological Processes*, 28(25), 6135-6150, 2014.

Coxon, G., Freer, J., Lane, R., Dunne, T., Knoben, W.J., Howden, N.J., Quinn, N., Wagener, T. and Woods, R.: DECIPHER v1: Dynamic fluxEs and Connectivity for Predictions of Hydrology. *Geoscientific Model Development*, 12(6), 2019.

1180 Crave, A., and Gascuel-Oudou, C.: The Influence of topography on time and space distribution of soil surface water content, *Hydrol. Process.*, 11, 203-210, 1997.

Crawford, N.H. and Burges, S.J.: History of the Stanford watershed model. *Water Resour. Impact*, 6(2), 1-3, 2004.

1185 Davies, J and Beven, K J.: Hysteresis and scale in catchment storage, flow, and transport, *Hydrol. Process.* 29(16): 3604-3615, DOI: 10.1002/hyp.10511, 2015.

Duan, J. and Miller, N.L.: A generalized power function for the subsurface transmissivity profile in TOPMODEL. *Water Resources Research*, 33(11), pp.2559-2562, 1997.

1190

Ducharne, A.: Reducing scale dependence in TOPMODEL using a dimensionless topographic index, *Hydrol. Earth Syst. Sci.*, 13, 2399-2412, <https://doi.org/10.5194/hess-13-2399-2009>, 2009.

- Dunne, T. and Black, R.D.: Partial area contributions to storm runoff in a small New England watershed. *Water Resour Res.* 6, 1296-1311, 1970.
- Eagleson, P.S.: Dynamics of flood frequency. *Water Resour. Res.*, 8: 878-898, 1972.
- 1200 Essery, R.L.H., Best, M.J., Betts, R.A., Cox, P.M. and Taylor, C.M.: Explicit representation of subgrid heterogeneity in a GCM land surface scheme. *Journal of Hydrometeorology*, 4(3), 530-543, 2003.
- Famiglietti, J., and E. F. Wood: Multiscale modeling of spatially variable water and energy balance process. *Water Resour. Res.*, 30, 3061–3078, <https://doi.org/10.1029/94WR01498>, 1994.
- 1205 Fenicia, F., Kavetski, D., and Savenije, H. H. G.: Elements of a flexible approach for conceptual hydrological modeling: 1. Motivation and theoretical development, *Water Resour. Res.*, 47, W11510, 2011.
- Fisher, J.I. and K.J. Beven: Modelling of streamflow at Slapton Wood using TOPMODEL within an uncertainty estimation framework, *Field Studies Journal*, 8, 577-584, 1996.
- 1210 Franchini, M., J. Wendling, C. Obled, and E. Todini: Physical interpretation and sensitivity analysis of the TOPMODEL, *Journal of Hydrology*, 175(1-4), 293-338, 1996.
- Franks, S., K.J. Beven, P.F. Quinn and I. Weight: On the sensitivity of soil-vegetation-atmosphere transfer (SVAT) schemes: equifinality and the problem of robust calibration, *Agric. Forest Meteorol.*, 86, 63-75, 1997.
- 1215 Franks, S W, Gineste, Ph, Beven, K J and Merot, Ph.: On constraining the predictions of a distributed model: the incorporation of fuzzy estimates of saturated areas into the calibration process, *Water Resources Research*, 34, 787-797, 1998
- Freer, J., Beven, K. and Ambroise, B.: Bayesian estimation of uncertainty in runoff prediction and the value of data: An application of the GLUE approach. *Water Resources Research*, 32(7): 2161-2173, 1996.
- 1220 Freer, J, McDonnell, J, Beven, K J, Brammer, D, Burns, D, Hooper, R P and Kendal, C. Topographic controls on subsurface stormflow at the hillslope scale for two hydrologically distinct small catchments, *Hydrol. Process.*, 11(9), 1347-1352, 1997.
- 1225 Freer, J., J. McDonnell, K. J. Beven, N. E. Peters, D. Burns, R. P. Hooper, B. Aulenbach, and C. Kendal: The role of bedrock topography on subsurface stormflow. *Water Resources Research*, 38(12), W01269, 10.1029/2001WR000872, 2002.

- Freer, J. E., K. J. Beven, and N. E. Peters: Multivariate seasonal period model rejection within the generalised likelihood uncertainty estimation procedure. in *Calibration of Watershed Models*, edited by Q. Duan, H. Gupta, S. Sorooshian, A. N. Rousseau, and R. Turcotte, AGU Books, Washington, 69-87, 2003.
- 1230
- Freer, J., McMillan, H., McDonnell, J J and Beven, K J.: Constraining Dynamic TOPMODEL responses for imprecise water table information using fuzzy rule based performance measures, *J. Hydrology.*, 291, 254-277, 2004.
- Freeman, T.G.: Calculating catchment area with divergent flow based on a regular grid. *Computers & Geosciences*, 17(3), 413-422, 1991.
- 1235
- Freeze, R.A. and Harlan, R.L.: Blueprint for a physically-based, digitally-simulated hydrologic response model. *Journal of Hydrology*, 9(3), 237-258, 1969.
- 1240
- Fu, X., Luo, L., Pan, M., Yu, Z., Tang, Y. and Ding, Y.: Evaluation of TOPMODEL-based land surface-atmosphere transfer scheme (TOPLATS) through a soil moisture simulation. *Earth Interactions*, 22(15), 1-19, 2018.
- Gallart, F. J. Latron, P. Llorens, K.J. Beven: Using internal catchment information to reduce the uncertainty of discharge and baseflow predictions, *Adv. Water Resour.*, 30, 808-823, 2007
- 1245
- Gallart, F., Latron, J., Llorens, P. and Beven, K.J.: Upscaling discrete internal observations for obtaining catchment-averaged TOPMODEL parameters in a small Mediterranean mountain basin. *Physics and Chemistry of the Earth, Parts A/B/C*, 33(17-18), 1090-1094, 2008.
- 1250
- Gao, J., Holden, J. and Kirkby, M.: A distributed TOPMODEL for modelling impacts of landcover change on river flow in upland peatland catchments, *Hydrol. Process.* 29, 2867–2879, DOI: 10.1002/hyp.10408, 2015.
- Gao, J., J. Holden, and M. Kirkby: The impact of land-cover change on flood peaks in peatland basins, *Water Resour. Res.*, 52, 3477–3492, doi:10.1002/2015WR017667, 2016.
- 1255
- Gao, J., Holden, J. and Kirkby, M.: Modelling impacts of agricultural practice on flood peaks in upland catchments: An application of the distributed, TOPMODEL, *Hydrol. Process.* 31, 4206–4216, 2017.

1260 Gharari, S., Hrachowitz, M., Fenicia, F., and Savenije, H. H. G.: Hydrological landscape classification: investigating the performance of HAND based landscape classifications in a central European meso-scale catchment. *Hydrol. Earth Syst. Sci.*, 15, 3275–3291, <https://doi.org/10.5194/hess-15-3275-2011>, 2011.

Graham, C.B., Woods, R.A. and McDonnell, J.J.: Hillslope threshold response to rainfall. (1) A field based forensic approach. *Journal of Hydrology*, 393(1-2), 65-76, 2010.

1265 Güntner, A., Uhlenbrook, S., Seibert, J., and Leibundgut, C.: Multi-criterial validation of TOPMODEL in a mountainous catchment, *Hydrological Processes*, 13, 1603-1620, 1999.

Deleted: c

1270 Habets, F. and Saulnier, G.M.: Subgrid runoff parameterization. *Physics and Chemistry of the Earth, Part B: Hydrology, Oceans and Atmosphere*, 26(5-6), 455-459, 2001.

Hjerdt, K. N., McDonnell, J. J., Seibert, J., and Rodhe, A.: A new topographic index to quantify downslope controls on local drainage, *Water Resour. Res.*, 40, 1–6, <https://doi.org/10.1029/2004WR003130>, 2004.

1275 Hollaway, M.J., Beven, K.J., Benskin, C.McW.H., Collins, A.L., Evans, R., Falloon, P.D., Forber, K.J., Hiscock, K.M., Kahana, R., Macleod, C.J.A., Ockenden, M.C., Villamizar, M.L., Wearing, C., Withers, P.J.A., Zhou, J.G., Haygarth, P.M.: Evaluating a processed based water quality model on a UK headwater catchment: what can we learn from a ‘limits of acceptability’ uncertainty framework?, *J. Hydrology*. 558, 607-624. doi: 10.1016/j.jhydrol.2018.01.063, 2018.

1280 Hopp, L. and McDonnell, J.J.: Connectivity at the hillslope scale: Identifying interactions between storm size, bedrock permeability, slope angle and soil depth. *Journal of Hydrology*, 376(3-4), 378-391, 2009.

Hornberger, G. M. and Spear, R. C.: An approach to the preliminary analysis of environmental systems, *J. Environmental Management*, 12, 7-18., 1981.

Horton RE.: Maximum groundwater levels. *Transactions, American Geophysical Union* 17(2): 344–357, 1936b.

1290 Huang, J.C., Lee, T.Y. and Kao, S.J.: Simulating typhoon-induced storm hydrographs in subtropical mountainous watershed: an integrated 3-layer TOPMODEL. *Hydrology & Earth System Sciences*, 13(1), 27-40, 2009.

Ibbitt, R. P. and O'Donnell, T.: Fitting methods for conceptual catchment models, *J. Hydraul. Div. ASCE.*, 97: 1331-1342, 1971.

- 1295 Ibbitt, R. P. and O'Donnell, T.: Designing conceptual catchment models for automatic fitting methods, *IAHS Publication No. 101*, 461-475, IAHS, Wallingford, UK, 1974.
- Ibbitt, R. P. and Woods, R.: Re-scaling the topographic index to improve the representation of physical processes in catchment models. *Journal of Hydrology*, 293(1-4), 205-218, 2004.
- 1300 Jencso, K. G., and B. L. McGlynn: Hierarchical controls on runoff generation: Topographically driven hydrologic connectivity, geology, and vegetation, *Water Resour. Res.*, 47, W11527, doi:10.1029/2011WR010666, 2011.
- 1305 Iorgulescu, I. and Musy, A.: Generalization of TOPMODEL for a power law transmissivity profile. *Hydrological processes*, 11(9), 1353-1355, 1997.
- Johnston, P.R. and Pilgrim, D.H.: Parameter optimization for watershed models. *Water Resources Research*, 12(3): 477-486, 1976.
- 1310 Kirchner, J.W.: Getting the right answers for the right reasons: Linking measurements, analyses, and models to advance the science of hydrology. *Water Resources Research*, 42(3), W03S04, 2006.
- Kirkby, M.: Hydrograph modelling strategies, in *Processes in Human and Physical Geography*, edited by R. Peel, M. Chisholm, and P. Haggett: 69–90, Heinemann, London, 1975.
- 1315 Kirkby, M.: Implications for sediment transport in M. J. Kirkby (Ed.) *Hillslope Hydrology*, John Wiley and Sons: Chichester, 325-363, 1978.
- 1320 Kirkby, M.J.: A runoff simulation model based on hillslope topography. in *Scale problems in Hydrology: runoff generation and response*, ed V.K. Gupta et al, Reidel, Dordrecht, 39-56, 1986.
- Kirkby, M. J.: Topmodel: a personal view, *Hydrological Processes*, 11(9): 1087-1098, 1997
- 1325 Klemeš, V.: Dilettantism in hydrology: Transition or destiny?. *Water Resources Research*, 22(9S), 177S-188S, 1986.

Knoben, W. J. M., J. E. Freer, K. J. A. Fowler, M. C. Peel, and R. A. Woods: Modular Assessment of Rainfall-Runoff Models Toolbox (MARRMoT) v1.2: an open-source, extendable framework providing implementations of 46 conceptual hydrologic models as continuous state-space formulations, *Geoscientific Model Development*, 12(6), 2463-2480, 2019.

1330 [Lamb, R., Calibration of a conceptual rainfall-runoff model for flood frequency estimation by continuous simulation. *Water Resources Research*, 35\(10\), 3103-3114, 1999.](#)

Lamb, R., and Beven, K. J.: Using interactive recession curve analysis to specify a general catchment storage model, *Hydrology and Earth System Sciences*, 1, 101-113, 1997.

Lamb, R, Beven, K J and Myrabo, S.: Discharge and water table predictions using a generalised TOPMODEL formulation, *Hydrol. Process.*, 11(9), 1145-1168, 1997.

1340 Lamb, R., K.J. Beven and S. Myrabo, S.: Use of spatially distributed water table observations to constrain uncertainty in a rainfall-runoff model., *Advances in Water Resources*, 22(4), 305-317, 1998.

Lan, T., Lin, K. R., Liu, Z. Y., He, Y. H., Xu, C. Y., Zhang, H. B., & Chen, X. H.: A clustering preprocessing framework for the subannual calibration of a hydrological model considering climate-land surface variations. *Water Resources Research*, 54, 10,034–10,052. <https://doi.org/10.1029/2018WR023160>, 2018.

1345 [Lane, S.N., Brookes, C.J., Kirkby, M.J. and Holden, J., A network-index-based version of TOPMODEL for use with high-resolution digital topographic data. *Hydrological processes*, 18\(1\), 191-201, 2004.](#)

1350 [Lane, S.N. and Milledge, D.G., Impacts of upland open drains upon runoff generation: a numerical assessment of catchment-scale impacts. *Hydrological Processes*, 27\(12\), pp.1701-1726, 2013.](#)

Lane, S.N., Reaney, S.M. and Heathwaite, A.L.: Representation of landscape hydrological connectivity using a topographically driven surface flow index. *Water Resources Research*, 45(8), W08423, 2009.

1355 Larsen, J.E., Sivapalan, M., Coles, N.A. and Linnet, P.E.: Similarity analysis of runoff generation processes in real-world catchments. *Water Resources Research*, 30(6), 1641-1652, 1994.

Deleted: ¶

Formatted: Font: (Default) +Body (Calibri)

Deleted: ¶

Formatted: Justified, Line spacing: 1.5 lines

Formatted: Font: (Default) +Body (Calibri)

Deleted: ¶

Deleted: ¶

Formatted: Normal, Don't adjust space between Latin and Asian text, Don't adjust space between Asian text and numbers

1365 Liu, Y, Freer, JE, Beven, KJ and Matgen, P.: Towards a limits of acceptability approach to the calibration of hydrological models: extending observation error, *J. Hydrol.*, 367:93-103, doi:10.1016/j.jhydrol.2009.01.016, 2009.

Liu, Z. and Todini, E.: Assessing the TOPKAPI non-linear reservoir cascade approximation by means of a characteristic lines solution. *Hydrological Processes: An International Journal*, 19(10), 1983-2006, 2005.

1370 Liu Z., Martina M. L. V. and Todini E.: Flood forecasting using a fully distributed model: Application of the TOPKAPI model to the Upper Xixian catchment. *Hydrology and Earth System Sciences*, 9:347–364, 2005.

Loritz, R., Gupta, H., Jackisch, C., Westhoff, M., Kleidon, A., Ehret, U., and Zehe, E.: On the dynamic nature of hydrological similarity, *Hydrol. Earth Syst. Sci.*, 22, 3663–3684, <https://doi.org/10.5194/hess-22-3663-2018>, 2018.

1375 Marthews, T.R., Dadson, S.J., Lehner, B., Abele, S. and Gedney, N.: High-resolution global topographic index values for use in large-scale hydrological modelling. *Hydrology & Earth System Sciences*, 19(1), 19, 91–104., 2015.

McDonnell, J. J. and Beven, K. J.: Debates—The future of hydrological sciences: A (common) path forward? A call to action aimed at understanding velocities, celerities, and residence time distributions of the headwater hydrograph, *Water Resour. Res.*, 50, 5342-5350, doi:10.1002/2013WR015141, 2014.

1380 Metcalfe, P., K.J. Beven, and J. Freer: Dynamic Topmodel: a new implementation in R and its sensitivity to time and space steps, *Environmental Modelling and Software*, 72: 155-172, 2015.

1385 Metcalfe, P, Beven, K J, Hankin, B and Lamb, R.: A modelling framework for evaluation of the hydrological impacts of nature-based approaches to flood risk management, with application to in-channel interventions across a 29-km² scale catchment in the United Kingdom, *Hydrological Processes*, 31 (9): 1734-1748, DOI: 10.1002/hyp.11140, 2017.

1390 Milledge, D.G., Lane, S.N., Heathwaite, A.L. and Reaney, S.M.: A Monte Carlo approach to the inverse problem of diffuse pollution risk in agricultural catchments. *Science of the Total Environment*, 433, 434-449, 2012.

[Montgomery, D.R. and Dietrich, W.E. A physically based model for the topographic control on shallow landsliding. *Water Resources Research*, 30\(4\), 1153-1171, 1994.](#)

1395 [Montgomery, D.R. and Dietrich, W.E.. Runoff generation in a steep, soil-mantled landscape. *Water Resources Research*, 38\(9\), 7-17, 2002.](#)

Deleted: ¶

Deleted: ¶

Formatted: Normal, Don't adjust space between Latin and Asian text, Don't adjust space between Asian text and numbers

Formatted: Justified, Line spacing: 1.5 lines, Don't adjust space between Latin and Asian text, Don't adjust space between Asian text and numbers

Formatted: Font colour: Custom Colour (RGB(34,34,34)), Pattern: Clear (White)

1400 Moore, I.D., E. M. O'Loughlin, G. J. Burch: A contour-based topographic model for hydrological and ecological applications. *Earth Surface Processes and Landforms* 13:4, 305-320, 1988.

Moore, R. D., and J. C. Thompson: Are water table variations in a shallow forest soil consistent with the TOPMODEL concept?, *Water Resources Research*, 32(3), 663-669, 1996.

1405

Morris, D.G. and Heerdegen, R.G.: Automatically derived catchment boundaries and channel networks and their hydrological applications. *Geomorphology*, 1(2): 131-141, 1988.

O'Loughlin E. M. Saturation regions in catchments and their relation to soil and topographic properties. *Journal of Hydrology*, 53, 229–246, 1981.

1410

O'Loughlin, E. M. Prediction of surface saturation zones in natural catchments by topographic analysis. *Water Resources Research*, 22, 794–804, 1986.

1415 Page T., Beven K. J. and Freer J. Modelling the chloride signal at the Plynlimon catchments, Wales using a modified dynamic TOPMODEL. *Hydrological Processes*, 21, 292–307, 2007.

Pan, F., Peters-Lidard, C.D., Sale, M.J. and King, A.W.: A comparison of geographical information systems–based algorithms for computing the TOPMODEL topographic index. *Water Resources Research*, 40(6), W06303, 2004.

1420

Pappenberger, F., Frodsham, K., Beven, K J, Romanovicz, R. and Matgen, P.: Fuzzy set approach to calibrating distributed flood inundation models using remote sensing observations. *Hydrology and Earth System Sciences*, 11(2),739-752, 2007.

Pauwels, V. R. N., and E. F. Wood: A soil-vegetation-atmosphere transfer scheme for the modeling of water and energy balance process in high latitudes: 2. Application and validation. *J. Geophys. Res.*, 104, 27823–27839, <https://doi.org/10.1029/1999JD900004>, 1999.

1425

Peters N. E., Freer J. E. and Beven K. J.: Modelling hydrologic responses in a small forested catchment (Panola Mountain, Georgia, USA): A comparison of the original and a new dynamic TOPMODEL. *Hydrological Processes*, 17(2), 345–362,

1430

2003.

Peters-Lidard, C. D., M. S. Zion, and E. F. Wood: A soil-vegetation-atmosphere transfer scheme for modeling spatially variable water and energy balance process. *J. Geophys. Res.*, 102, 4303–4324, <https://doi.org/10.1029/96JD02948>, 1997.

1435 Piñol, J, Beven, K J and Freer, J.: Modelling the hydrological response of mediterranean catchments, Prades, Catalonia - the use of distributed models as aids to hypothesis formulation, *Hydrol. Process.*, 11(9), 1287-1306, 1997.

Porter, K.D., Reaney, S.M., Quilliam, R.S., Burgess, C. and Oliver, D.M.: Predicting diffuse microbial pollution risk across catchments: The performance of SCIMAP and recommendations for future development. *Science of the Total Environment*, 609, 456-465, 2017.

1440 Pradhan, N.R., Tachikawa, Y. and Takara, K.: A downscaling method of topographic index distribution for matching the scales of model application and parameter identification. *Hydrological Processes: An International Journal*, 20(6), 1385-1405, 2006.

Pradhan, N.R., Ogden, F.L., Tachikawa, Y. and Takara, K.: Scaling of slope, upslope area, and soil water deficit: Implications for transferability and regionalization in topographic index modeling. *Water Resources Research*, 44(12), W12421, 2008.

1445 Quinn, P.F., K.J. Beven, P. Chevallier and O. Planchon: The Prediction of Hillslope Flow paths for distributed hydrological modelling using digital terrain models, *Hydrological Processes*, 5, 59-79, 1991.

1450 Quinn, P., K.J. Beven and R. Lamb: The $\ln(a/\tan\beta)$ index: how to calculate it and how to use it within the TOPMODEL framework, *Hydrol.Process*, 9, 161-182, 1995a.

Quinn, P., K.J. Beven and A. Culf: The introduction of macroscale hydrological complexity into land surface-atmosphere transfer models and the effect of planetary boundary layer development, *J. Hydrology*, 166, 421-444, 1995b.

1455 Quinn, P., F., Ostendorf, B., Beven, K. J., and Tenhunen, J., Spatial and temporal predictions of soil moisture patterns and evaporative losses using TOPMODEL and the GAS-Flux model for an Alaskan catchment, *Hydrol. Earth System Sci.*, 2, 51-64, 1998.

1460 Reggiani, P. and Rientjes, T.H.M.: Flux parameterization in the representative elementary watershed approach: Application to a natural basin. *Water Resources Research*, 41(4). W04013, 2005.

- Formatted: Font: (Default) +Body (Calibri)
- Formatted: Font: (Default) +Body (Calibri), 10 pt
- Formatted: Font: (Default) +Body (Calibri), 10 pt
- Formatted: Font: (Default) +Body (Calibri), 10 pt
- Formatted: Font: (Default) +Body (Calibri), 10 pt
- Formatted: Font: (Default) +Body (Calibri), 10 pt
- Formatted: Font: (Default) +Body (Calibri), 10 pt
- Formatted: Font: (Default) +Body (Calibri), 10 pt
- Deleted: ¶
- Formatted: Font: (Default) +Body (Calibri), Font colour: Black

1465 Rennó, C. D., Nobre, A. D., Cuartas, L. A., Soares, J. V., Hodnett, M. G., Tomasella, J., and Waterloo, M. J.: HAND, a new
terrain descriptor using SRTM-DEM: Mapping terra-firme rainforest environments in Amazonia, *Remote Sens. Environ.*, 112,
3469–3481, <https://doi.org/10.1016/j.rse.2008.03.018>, 2008.

1470 Robson, A., K.J. Beven and C. Neal: Towards identifying sources of subsurface flow: a comparison of components identified
by a physically-based runoff model and those determined by chemical mixing techniques, *Hydrological Processes*, 6, 199-
214, 1992.

1475 Romanowicz, R., K.J. Beven and J. Tawn, Evaluation of predictive uncertainty in non-linear hydrological models using a
Bayesian approach, in V. Barnett and K.F. Turkman (Eds.) *Statistics for the Environment II . Water Related Issues*, Wiley,
297-317, 1994.

Saulnier, G.M., Obled, C. and Beven, K.: Analytical compensation between dtm grid resolution and effective values of
saturated hydraulic conductivity within the Topmodel framework. *Hydrological Processes*, 11(9), 1331-1346, 1997a.

1480 Saulnier, G.M., Beven, K. and Obled, C.: Digital elevation analysis for distributed hydrological modeling: Reducing scale
dependence in effective hydraulic conductivity values. *Water Resources Research*, 33(9), 2097-2101, 1997b.

Saulnier, G-M, Beven, K J and Obled, Ch.: Including spatially variable soil depths in TOPMODEL, *J. Hydrology*, 202, 158-
172, 1997.

1485 Saulnier, G.M. and Datin, R.: Analytical solution to a bias in the TOPMODEL framework balance. *Hydrological
Processes*, 18(7), 1195-1218, 2004.

Scanlon, T.M., Raffensperger, J.P., Hornberger, G.M. and Clapp, R.B.: Shallow subsurface storm flow in a forested headwater
catchment: Observations and modeling using a modified TOPMODEL. *Water Resources Research*, 36(9), 2575-2586, 2000.

1490 Seibert, J., Bishop, K., and Nyberg, L.: Testing TOPMODEL's ability to predict spatially distributed groundwater levels,
Hydrol. Process., 11, 1131-1144, 1997.

1495 Seibert, J., K. Bishop, A. Rodhe, and J. J. McDonnell: Groundwater dynamics along a hillslope: A test of the steady state
hypothesis, *Water Resour. Res.*, 39(1), 1014, doi:10.1029/2002WR001404, 2003.

Shreve, R. L.: Infinite topologically random channel networks, *J. Geology*, 75, 178-186, 1967

1500 Sivapalan, M., Beven, K.J. & Wood, E.F.: On Hydrologic Similarity 2: A scaled model of storm runoff production. *Water Resources Res.*, 23 (12): 2266-2278, 1987

Sivapalan, M., Wood, E.F., Beven, K.J.: On Hydrologic Similarity, 3. A dimensionless flood frequency distribution, *Water Resources Research*, 26, 43-58, 1990.

505 [Sorensen, R., and J. Seibert \(2007\), Effects of DEM resolution on the calculation of topographical indices: TWI and its components, *Journal of Hydrology*, 347\(1-2\), 79-89.](#)

1510 Tague, C.L. and Band, L.E.: RHESys: Regional Hydro-Ecologic Simulation System—An object-oriented approach to spatially distributed modeling of carbon, water, and nutrient cycling. *Earth Interactions*, 8(19), 1-42, 2004.

Tarboton, D.G.: A new method for the determination of flow directions and upslope areas in grid digital elevation models. *Water Resources Research*, 33(2): 309-319, 1997.

1515 Tetzlaff D, Birkel C, Dick J, Geris J, Soulsby C.: Storage dynamics in hydrogeological units control hillslope connectivity, runoff generation and the evolution of catchment transit time distributions. *Water Resources Research*. 50(2), 969-985. doi: 10.1002/2013WR014147, 2014.

Thomas Jr, W.O.: An evaluation of flood frequency estimates based on rainfall/runoff modelling. *JAWRA Journal of the American Water Resources Association*, 18(2), 221-229, 1982.

520 Todini E.: New trends in modelling soil processes from hillslope to GCM scales. In *The Role of Water and the Hydrological Cycle in Global Change*, Oliver HR, Oliver SA (eds). *Global Environmental Change*, NATO ASI Series, Series I; vol. 31. Springer-Verlag, 317 – 347, 1995.

1525 Vincendon B., Ducrocq V., Bouilloudd L., Saulnier G.-M., Chancibaulte K., Habets F. and Noilhan J. Benefit of coupling the ISBA land surface model with a TOPMODEL hydrological model version dedicated to Mediterranean flash floods. *Journal of Hydrology*, 394, 256–266, 2010.

Walter, M.T., Steenhuis, T.S., Mehta, V.K., Thongs, D., Zion, M. and Schneiderman, E.: Refined conceptualization of TOPMODEL for shallow subsurface flows. *Hydrological Processes*, 16(10), 2041-2046, 2002.

Formatted: Font: (Default) +Body (Calibri)

Formatted: Font: (Default) +Body (Calibri), 10 pt

Formatted: Justified, Space After: 0.3 pt, Line spacing: 1.5 lines, Tab stops: 6.35 cm, Left + 16.82 cm, Left

Formatted: Font: (Default) +Body (Calibri), 10 pt, Font colour: Black

Deleted: ¶

Formatted: Font: (Default) +Body (Calibri)

Deleted: ¶

Formatted: Normal

Weyman, D. R.: Throughflow on hillslopes and its relation to the stream hydrograph, *Hydrological Sciences Bulletin*, 15: 25-33, 1970.

1535 Weyman, D.R.: Measurements of the downslope flow of water in a soil. *Journal of Hydrology*, 20(3), 267-288, 1973.

Western, A. W., R. B. Grayson, G. Blöschl, G. R. Willgoose, and T. A. McMahon: Observed spatial organisation of soil moisture and its relation to terrain indices, *Water Resour. Res.*, 35, 797–810, doi:10.1029/1998WR900065, 1999.

Formatted: Underline

Deleted: ö

Formatted: Underline

1540 Wigmosta, M.S., L. W. Vail, and D. P. Lettenmaier. A distributed hydrology-vegetation model for complex terrain. *Water Resour. Res.*, 30(6), 1665–1679, 1994.

Wolock, D.M. and McCabe Jr, G.J.: Comparison of single and multiple flow direction algorithms for computing topographic parameters in TOPMODEL. *Water Resources Research*, 31(5), 1315-1324, 1995.

1545 Wood, E.F., Sivapalan, M., Beven, K.J. and Band, L.: Effects of spatial variability and scale with implications to hydrologic modelling. *J. Hydrology*, 102, 29-47, 1988.

Woods, R.A., Sivapalan, M. and Robinson, J.S.: Modeling the spatial variability of subsurface runoff using a topographic index. *Water Resources Research*, 33(5), 1061-1073, 1997.

1550 Zulkafli, Z., Buytaert, W., Onof, C., Lavado-Casimiro, W. and Guyot, J.L.: A critical assessment of the JULES land surface model hydrology for humid tropical environments, *Hydrology and Earth System Sciences*, 17(3), 1113-1132, 2013.

1555