

A history of TOPMODEL

Keith J. Beven¹, Mike J. Kirkby², Jim E. Freer³, and Rob Lamb⁴

5

¹ Lancaster Environment Centre, Lancaster University, Lancaster UK

² School of Geography, University of Leeds, Leeds UK

³ University of Saskatchewan, Centre for Hydrology, Canmore, Canada and School of Geographical Sciences, University of Bristol, UK.

10 ⁴ JBA Trust, Broughton, UK and Lancaster Environment Centre, Lancaster University, Lancaster UK

Correspondence to: Keith Beven, k.beven@lancaster.ac.uk

15 **Abstract.** The theory that forms the basis of Topmodel was first outlined by Mike Kirkby some 45 years ago. This paper recalls some of the early developments; the rejection of the first journal paper; the early days of digital terrain analysis; model calibration and validation; the various criticisms of the simplifying assumptions; and the relaxation of those assumptions in the dynamic forms of Topmodel. A final section addresses the question of what might be done now in seeking a simple, parametrically parsimonious model of hillslope and small catchment processes if we were starting again.

20

1. Topmodel: the background

Topmodel is a rainfall-runoff model that has its origins in the recognition of the dynamic nature of runoff contributing areas in the 1960s and 1970s that had been revealed in the data analysis of partial area contributions of Betson (1964) in Tennessee, USA, and the field experience of Dunne and Black (1970) in Vermont, USA, and Weyman (1970, 1973) in the Mendips, UK. It was one of the very first models to make explicit use of topographic data in the model formulation, hence the name of the model (Beven and Kirkby, 1979, hereafter BK79). This was, however, well before digital terrain/elevation maps started to be made available¹. The theory of Topmodel aimed to reflect the way in which the topography of a catchment would shape the dynamic process responses and particularly runoff generation on a variable contributing area. It did so in a structurally,

30

¹ It was also before the term “top model” started to be used in the fashion industry, though Ezio Todini was quick to have some fun with the name at EGU when the first Italian issue of Topmodel magazine was published.

parametrically, and computationally parsimonious model which gave it advantages over the full implementation of the physically-based model blueprint set out by Freeze and Harlan (1969).

35 The story of Topmodel starts when Mike Kirkby (MK) was at the University of Bristol where he worked with his PhD student Darrel Weyman in the East Twin catchment in the Mendips. One critical observation from Darrel Weyman's work was the synchronicity of flows in a throughflow trough and in the main channel, suggesting the possibility that subsurface runoff per unit area might be approximately spatially constant; a key underlying assumption of Topmodel. While this may not be a general expectation, the consequent analysis of the response of the upper East Twin led to the concept of a topographic index (as $a/\tan\beta$, a as upslope contributing area per unit contour length and $\tan\beta$ as local slope).

40

The first theoretical statement of Topmodel was presented in Kirkby (1975). He wrote there: "*Any model with only a few parameters must necessarily simplify the spatial variation of moisture content over a drainage basin. For a given average moisture content, there is a wide range of possible spatial distributions, even if rainfall is always spatially uniform, as is assumed here. To predict the spatial consequences of an average moisture level some assumptions must be made about the duration of the rainfall inputs. The simplest, which is adopted here, is to assume a time-independent steady state of net rainfall input, \bar{r}* " (p.81).

Then, using the original nomenclature of Kirkby (1975), at any point, downslope flow per unit contour length, q , will be given by $a(\bar{r} - q_o)$ where a is the upslope contributing area to that point, and q_o is a constant rate of leakage to the subsoil. Then making the further assumption that the local hydraulic gradient can be approximated by the slope angle, $\tan\beta$, and the local transmissivity can be represented as KS where K is a permeability per unit of storage, and S is the local saturated zone storage in rainfall equivalent depth units, then

$$q = a(\bar{r} - q_o) = KS \tan\beta \quad [1]$$

55 or

$$S = a(\bar{r} - q_o)/K \tan\beta \quad [2]$$

KS is then an effective transmissivity of the soil at a storage of S . Note that this assumes that the hydraulic gradient $\tan\beta$ is defined with respect to the plan distance, while infiltration and drainage rates are defined with respect to plan unit area. Others have suggested that the use of $\sin\beta$ is more correct, i.e. relative to distance along the hillslope, so that transmissivity is defined by the plane orthogonal to the slope, rather than horizontally (e.g. Montgomery and Dietrich, 1994, 2002; Borga et al., 2002; Chirico et al., 2003). Clearly this makes little difference for low to moderate slope angles, while for high slope angles it is unlikely that a water table would be parallel to the surface so that this assumption would break down. In addition, any

65 difference in the definition of transmissivity is likely to be smaller than the uncertainty with which transmissivities can be estimated or calibrated.

Equation [2] allows the condition for the soil to be just saturated to the surface at a storage of S_o to be defined as

$$S = S_o, \text{ or } \frac{a}{K \tan \beta} = \frac{S_o}{(\bar{i} - q_o)} \quad [3]$$

70

In terms of water balance accounting for the catchment as a whole, it is useful to integrate the expression for S to provide a catchment average value \bar{S} .

$$\bar{S} = \frac{\lambda(\bar{i} - q_o)}{\bar{K}} \quad [4]$$

75 where

$$\lambda = \frac{\bar{K}}{A} \int \frac{a}{K \tan \beta} dA$$

Expressing the relationship for S in this way allows for the potential for local permeability to vary while the effective recharge rate is in ratio to the mean permeability K over the catchment area A . Combining equations [3] and [4] gives a condition for soil saturation in terms of the topographic index $a/\tan \beta$ at all points where

80

$$\frac{a}{\tan \beta} > \frac{\lambda K S_o}{\bar{K} \bar{S}} \quad [5]$$

The topographic index can be mapped in a catchment area as a function of the topography and then gives an indication of where a saturated contributing area might occur, and then how it might spread as a function of storage (e.g. figure 1 for the upper East Twin). The expression is simplified further if the permeability can be considered spatially constant and λ simplifies to the mean value of the topographic index in the catchment. The topographic index was also used later to compare with the saturated areas at Tom Dunne's Sleepers River field site in Vermont in Kirkby (1978) (figure 2). Kirkby (1975) also provides relationships for the leakage term q_o and routing through a channel network based on the network width function.

90

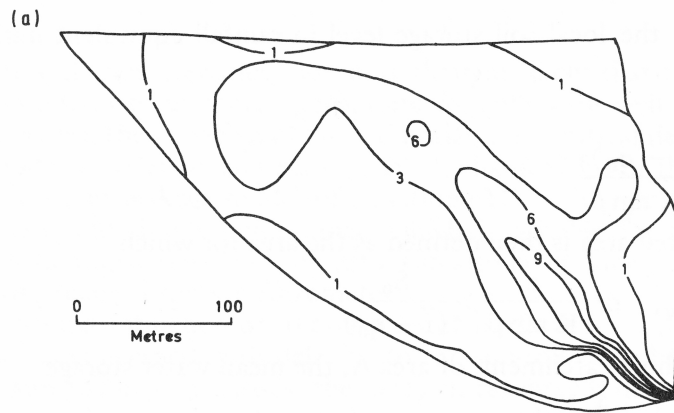


Figure 1. Distribution of the topographic index ($a/\tan \beta$) for the upper East Twin catchment, Mendips, UK (from Kirkby, 1975)

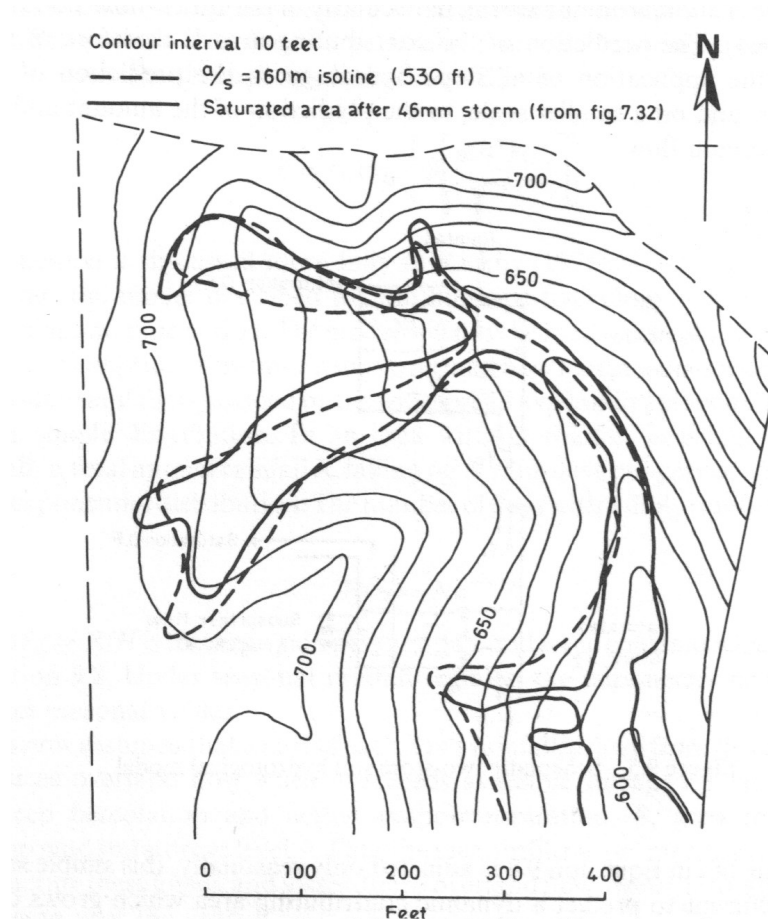


Figure 2. Comparison of the topographic index ($a/\tan\beta$) > 100 m²/m with observed saturated areas after spring snowmelt in the Sleepers River WC-4 catchment, Vermont, USA (from Kirkby, 1978)

In this form, Topmodel does not require a steady rainfall duration long enough to reach steady state, only that the storage for any given value of \bar{S} takes up a form *as if* it was at a steady state with a steady homogeneous recharge rate over the upslope contributing area to any point in the catchment. This implies that as storage changes, the celerities in the saturated zone are fast enough that the transition between configurations with changes in storage are relatively rapid. This will be more likely in wet, relatively shallow soils on moderate slopes, and where soil permeabilities increase with depth of saturation. There will be no expectation of a water table being parallel to the surface on deeper subsurface systems on low slope, or on very high slopes where more localised saturation will occur at the base of the slope. However, where the soil profile is much shallower than the length of the slope then any build-up of saturation at the base of profile under wet conditions must be fairly parallel to the surface. This might break down under drier conditions or where there is a loss to deeper layers.

Kirkby (1975) introduced an additional assumption that downslope flow could be represented as an exponential function of storage deficit below saturation, D in units of depth. This is consistent with an assumption of spatially homogeneous subsurface runoff increments at all times up to steady state (Kirkby, 1997). It was also realised that by expressing the saturated storage in the profile in terms of storage deficit rather than water table depth, one parameter could be eliminated. At that time, the issue of designing models to facilitate the calibration problem and reduce the potential for overfitting was already the subject of discussion in the literature (Ibbitt and O'Donnell, 1971, 1974; Kirkby 1975; Johnston and Pilgrim, 1976). Thus

115

$$q = T_o \tan\beta \exp(-D/m) \quad [6]$$

where T_o is the downslope transmissivity when the soil is just saturated to the surface, and m is a parameter also with units of depth. Following the same derivation as above gives the condition for saturation as

120

$$\ln\left(\frac{a}{\tan\beta}\right) > \frac{\bar{D}}{m} - \lambda \quad [7]$$

where \bar{D} is the mean storage deficit and λ is now the areal integral of $\ln(a/\tan\beta)$ with T_o and m assumed spatially constant. This is the expression used to determine the dynamics of the saturated contributing area in what might be called the classical version of Topmodel (figure 3). Equation [7] implies that when \bar{D} is zero, all the points with a topographic index greater than the mean value λ are predicted as saturated. Negative values of \bar{D} mean that more of the catchment is predicted as saturated. Redistribution at each model time step will produce negative local D values on the saturated area. In the model accounting this is treated as return flow from the saturated zone and is routed to the channel to properly maintain mass balance. Saulnier

and Datin (2002) suggested that this creates a bias in the prediction of the saturated areas and suggested a formulation that
130 calculates a deficit only over the unsaturated area of the catchment.

Equation [6] can be integrated along the length of all reaches in the channel network to provide the integral discharge from the
hillslopes in terms of the mean storage deficit \bar{D} as

$$135 \quad Q_b = Q_o \exp(-\bar{D}/m) \quad [8]$$

where Q_b is the integrated output along the all the reaches in the channel network, $Q_o = Ae^{-\lambda}$ (for the case of a homogeneous
downslope transmissivity) and A is the catchment area (see Beven, 2012, p.214, for a full derivation). To initialise the model
this relationship [8] can then be inverted, given a value of catchment discharge to give the initial mean storage deficit. Note
140 that [8] implies a first order hyperbolic shape for the recession limb of the hydrograph. This can be checked for a particular
application by plotting the inverse of observed discharges against time. This should plot as a straight line if [8], and
consequently [6] is valid (Ambroise et al., 1996a; Beven, 2012).

It is worth noting here that the deficit D here represents a storage deficit due to gravity drainage. Any additional deficits
145 resulting from evapotranspiration losses are calculated separately from the various model stores. By the addition of an
additional parameter of available storage for gravity drainage per unit depth of soil (which can be related to the concept of
“field capacity”), the deficit D can be converted to a depth to the saturated zone. Thus the model can equally formulated in
terms of water table depths and there are a variety of applications that have used the model in this way to compare against
observed depths of saturation (e.g. Sivapalan et al., 1987; Lamb et al., 1997, 1998; Seibert et al., 1997; Blazkova et al., 2002;
150 Freer et al., 2004).

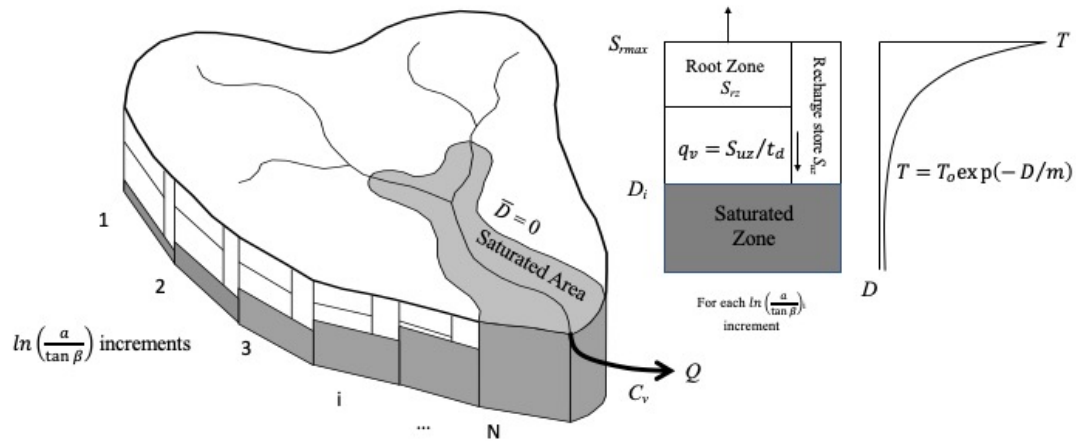


Figure 3. Schematic of the classical version of Topmodel (see Table 1 for the definition of the parameters)

155 The topographic index acts as an index of hydrological similarity (Beven et al. 1995; Beven, 2012) resulting from the
 assumption of homogeneous recharge to the saturated zone at any point in time. The elegance of the similarity approach means
 that it is not necessary to make calculations for every point in the catchment only for representative values of the index, which
 can then be weighted by the distribution function. This was particularly important when computer power was limited in the
 70s and 80s but remains useful in applications to large catchments and when ensembles of runs are required for uncertainty
 160 estimation. Good resolution is required at the higher end of the distribution where the contributing area first starts to spread,
 but experience with the model suggested that about 30 representative values was generally sufficient for convergence of the
 calculated outputs (Beven et al., 1995). Since the pattern of the topographic index is known, one very important feature of
 the model is that, despite the computational efficiency, the results can be mapped back into space and consequently checked
 for realism.

165

We now know that this was not the first analysis of surface saturation of this type. Horton (1936) came very close to deriving
 a form of topographic index but restricted his analysis to a single steady state condition, with an input rate equal to the final
 infiltration capacity of the soil surface (as appears in the Horton infiltration equation). This, he proposed, suggested a
 maximum depth of saturation on a hillslope once a steady state at that input rate had been achieved, and could be used to see
 170 if the soil would saturate (see Beven, 2004; 2006). He made no attempt to estimate how long it might take such a steady state
 to be reached (but see Beven, 1982; Aryal et al., 2005). A very similar wetness index was also developed independently by
 Emmett O’Loughlin (1981, 1986), and was used in the hydrological model of Moore et al. (1988).

Two further components are required to complete the model, to represent the unsaturated zone and routing surface runoff and channel flows. These process representations changed over time with different versions of the model. In the BK79 version of Topmodel there were separate interception and infiltration stores. Evapotranspiration depended on the storage in these stores, with recharge to the saturated zone represented as a constant drainage rate while storage was available. Later these stores were integrated into a single root zone store (to reduce the number of parameters required) and recharge was made more dynamic dependent on the local storage deficit D and storage in the unsaturated zone in excess of “field capacity” (e.g. Beven et al., 1995). This was controlled by a time delay per unit of deficit parameter, t_d .

In respect of routing the surface and channel flows, there was one thing that KB got wrong in the original BK79 model formulation. This used a form of explicit nonlinear time delay routing for the overland flow and channel network that will produce kinematic shocks at times when the hydrograph is rising quickly. This was based on the field observations of mean channel velocities derived from a large number of salt dilution gauging experiments that were used to measure overland flow velocities and check the discharge ratings at the stream gauging sites. Later it was realised that the routing should be based on celerities rather than velocities and that it is possible to have a nonlinear velocity–discharge relationship that produces a constant celerity (e.g Beven, 1979) allowing the use of a stationary time delay histogram in routing the runoff. This, with the advantage of simplicity, was then used in later versions of Topmodel. The resulting set of parameters needed for a model run are defined in Table 1.

Table 1. Definitions of parameters in the “classical” version of Topmodel

Parameter	Definition
T_o	Downslope transmissivity when the soil is just saturated to the surface
m	Exponential scaling parameter for the decline of transmissivity with increase in storage deficit D
S_{rmax}	Maximum capacity of the root zone (available water capacity to plants)
S_{ro}	Initial storage in root zone at the start of a run
t_d	Time delay for recharge to the saturated zone per unit of deficit
C_v	Channel routing wave velocity (celerity)

In what follows, some of the history of Topmodel will be recalled. This history will be necessarily incomplete. Topmodel was always presented as more a set of simple modelling concepts for making use of topographic information in hydrological prediction than as a fixed model structure (see Beven, 1997, 2012). This has left plenty of scope for others to use those concepts in different ways or incorporate them into other models. The simplicity and open source distribution of the modelling

code has also resulted in applications, more or less successful in terms of hydrograph fits, many of which have been in areas
200 where the assumptions should not be expected to be valid. It is also impossible to summarise all those applications that use or
cite Topmodel but a list of the various main developments and uses of the model through time is also provided in the Electronic
Supplement. This history therefore reflects the particular viewpoint of the authors who were involved in the original
development of Topmodel, Distributed Topmodel and Dynamic Topmodel.

205 **2. Topmodel: from rejection without being refereed to highly cited**

The first Topmodel paper submitted to a journal was rejected without being refereed by the Journal of Hydrology by one of its
editors, Eamonn Nash in a short letter as “being of too local interest” before later being accepted by the IAHS Hydrological
Sciences Bulletin as Beven and Kirkby (1979). This rejection should not be as surprising as it might seem now, given that
210 this is one of the most highly cited papers in hydrology². In 1978, many computer programs and data were still stored on
cards; even “mainframe” computers had relatively small amounts of memory. Because there were no digital elevation models,
the analysis of catchment topography was a manual and very time-consuming process. The derivation of the topographic
index for the small Crimple Beck catchment where Topmodel was first applied involved the use of maps, aerial photographs
and field work, and took days of intensive work. For an engineer like Eamonn Nash, it was difficult to see how such an
215 approach could ever be of use to a practicing engineering hydrologist.

On moving to Leeds University, MK obtained a UK Natural Environment Research Council grant to develop the concept into
a computer model of catchment hydrology, with funds to employ a post-doctoral research assistant. The grant also allowed
for running a nested catchment experiment with multiple raingauges and stream gauging sites, together with saturated area
220 monitoring and other observations. KB was still finishing his PhD work at the University of East Anglia, on a finite element
model of hillslope hydrology, but was fortunate to be appointed to the Leeds post.

Crimple Beck, upstream of an existing River Authority gauging station, was chosen as the field site, and with the help of
technician Dick Iredale, a lot of time was spent instrumenting and maintaining a nested design of gauges (both raingauge and
225 water level recordings at that time were made on charts, and a suite of computer programs was also developed to digitise and
analyse the charts, see Beven and Callen, 1979). Methods were also developed for measuring infiltration rates and overland
flow velocities using a plot sprinkler system (an interesting experience on the windy moors in the headwaters of Crimple Beck,
even with a plastic sheeting wind break around the plots). Some of the results of the Crimple Beck process studies, highlighting
the differences in response between headwater and sideslope areas are reported in Beven (1978). As a result, the application
230 of the model to the 8 km² Crimple Beck in BK79 made use of different topographic index distributions in 23 headwater and

² Google Scholar lists >7500 citations in November 2020. Unfortunately, Hydrological Science Bulletin for 1979 and earlier
is not listed on Web of Science; only from when it changed to Hydrological Sciences Journal in 1980.

sideslope subcatchments, each with its own topographic index distribution (figure 4). Each subcatchment could also have a different precipitation input based on interpolation from the network of raingauges that had been installed. At this time, Topmodel went through numerous early versions, initially in hard copy as punched cards, then stored digitally that could be edited using a teletype terminal (a very slow process which required each edit being typed and printed on a roll of paper), and still later with editing on cathode ray tube (CRT) terminals.

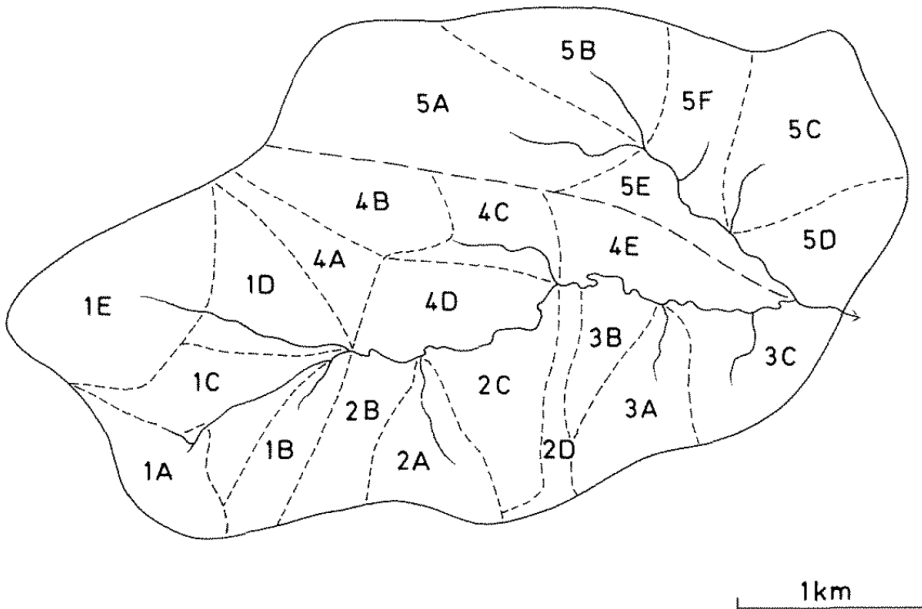


Figure 4. Subdivision of the 8 km² Crimble Beck catchment, Yorkshire, UK into 23 headwater and sideslope subcatchments (from Beven and Kirkby, 1979).

240

One of the aims of the original modelling project was, in fact, to produce a model structure that could be applied on the basis of field measurements alone. The BK79 paper demonstrated how model optimisation produced a parameter set that resulted in the subsurface storage being used effectively as an overland flow store in the wet flashy Lanshaw subcatchment (1A on Figure 4) which was dominated by fast runoff. Parameters derived from field observations, on the other hand, reproduced the observed saturated areas reasonably well (see BK79 and Section 7 below). This work was then extended in the paper of Beven et al. (1984) where, based on the fieldwork of Nick Schofield and Andy Tagg, it was shown that reasonable hydrograph predictions could be obtained using only field measured parameters. This work is still one of the few papers to demonstrate some success in using parameters derived from field observations, though it is worth noting that the characteristics of the exponential subsurface storage were derived from a recession curve analysis using a limited number of discharge

250

measurements at the site of interest. This could then be interpreted in the terms of the theory of the model (equation [8]), an approach more appropriate to the scale of application than profile measurements.

3. The attractions of Topmodel

255

The main attractions of Topmodel have always been its elegant simplicity that captures the dynamic and dominant hydrological spatial controls in a semi-distributed form; ease of setting up an initial catchment application; the resulting speed of computation; its ease of modification (it is more a set of concepts rather than a fixed model structure); and its direct link to topography as a control on the hydrological response of a catchment such that predicted storage deficits and saturated contributing areas can be mapped back into space. Whilst its simplicity has a firm theoretical basis, the simplicity comes at the cost of important limiting assumptions that mean that the model might not be applicable everywhere. Early in the days of digital elevation models (DEMs), topographic index values were calculated by Dave Wolock for the whole of the conterminous US (see more recently the global study of Marthews et al., 2015, using the HydroSHEDS database). The data were available to do so using a digital terrain analysis, but no hydrologist should expect that the basic Topmodel concepts would be suitable for the whole of the conterminous United States (nor for many other areas of the world that are flat, or with deep subsurface flow systems). It might be possible to calibrate a version of the Topmodel to give hydrograph predictions for such catchments, but that does not mean that the assumptions are valid, or that the mapping of storage deficits back into the space of the catchments will be meaningful.

260

265

270

275

This is indicative, however, of why Topmodel has proven so popular and highly cited over the years. Topography is in general important to the flow of water in hillslopes. As soon as digital elevation models started to become more widely available in the 1980s onwards, hydrological modellers have wanted to make use of them in some way. But given that information about topography, what to do with it? All the time that a time-consuming manual analysis was required, Eamonn Nash was right; other more conceptual modelling approaches were more attractive. But given the possibility of a DEM and a digital analysis, suddenly ways of using topography in modelling became much more attractive, especially given the available software for digital terrain analysis and other geographical information overlays. Effectively, once the topographic index distribution had been calculated, like many other conceptual hydrological models only input precipitation and potential evapotranspiration time series were needed to make a run (and the latter was even made available as an option within Topmodel as a simple parameterised sinusoidal function following the work of Calder et al., 1983, for use when other estimates were lacking).

280

Various model structures can make use of either gridded or triangular irregular network topographic data, but of those available Topmodel provides the simplest and fastest approach. It has been included in a variety of general hydrological modelling packages including FUSE (Clark et al., 2008), SuperFLEX (Fenicia et al., 2011); and MARRMoT (Knoben et al., 2019), though none of these provide facilities to compute the topographic index, but rather allowed for the calibration of a statistical

285 distribution function representing the topographic index (the gamma distribution was first used in this way by Sivapalan et al.,
1987). In the 1980s and 1990s, the storage and analysis of large DEMs was still a computationally significant problem.
Topmodel required that an analysis could be carried out just once prior to running the hydrological model, after which only
the distribution of the topographic index was required to run the model but, if required, the results could still be shown as maps
because of the explicit link between location and the topographic index.

290

This facility to map the results back into space was also an important attraction in the use of Topmodel as a teaching tool. A
teaching version of the software was written in Visual Basic by KB in 1995, complete with animations of the saturated areas,
and distributed freely. A complementary program for the analysis of digital terrain data was also made available with a similar
graphical interface. Other versions have also been widely used in teaching, notably the version in *R* developed by Buytaert
295 (2018). Since the model has the potential for simulating near-surface subsurface stormflow, saturation excess overland flow,
and (in some versions) infiltration excess overland flow, teaching exercises could be devised to demonstrate the different types
of response, or calibrate parameter values using either manual calibration or Monte Carlo methods with GLUE uncertainty
estimation. It could also be shown how it was not generally a suitable representation of catchments with deeper groundwater
systems (though see Quinn et al., 1991, for a suggestion as to how this could be achieved).


300

4. The Early Days of Digital Terrain Analysis

Once digital terrain data were more widely available, there remained issues as to how to determine slope and upslope area,
particularly for square gridded data, in the calculation of the topographic index. It has already been noted that in the original
305 application to Crimple Beck, this was an extremely time-consuming process. It involved working with maps and air
photographs to determine the apparent flowlines and hillslope segments, then calculating slopes between contour lines and
areas with a planimeter. This had some advantages in that features such as gullies and ditches that could be observed in the
field or in air photographs could be taken into account. It involved some decisions about what to do with the small, often
triangular, sections that were left where contours crossed a river (figure 5). An alternative approach was suggested by Beven
310 and Wood (1983) of representing various hillslope elements making up the catchment as geometric forms of varying width
and slope, from which the topographic index could be derived analytically.


Later (around 1976), this process was partly computerised by noting the coordinates of intersections between flowlines and
contours and typing them onto punched cards (on an IBM029 card punch) that could be input and processed by computer.
315 Later still (around 1978), KB had moved to the Institute of Hydrology at Wallingford where early work on digital terrain
analysis was being carried out, including the digitising of contour maps on a large digitiser. KB made use of this to speed up
the process of inputting the data for processing. It was not until 1982, when KB returned to the Institute of Hydrology from
working at the University of Virginia, that there was access to gridded digital elevation data.

320 In fact, KB already had some experience of working with digital elevation maps having carried out an undergraduate project
at the University of Bristol on determining flow networks on randomly generated triangular elevation grids with the aim of
looking at the variability in Horton's Laws (following Shreve, 1967). This is relatively simple on a triangular grid, but more
assumptions are needed for a square grid. This was the start of work on the multiple downslope direction flow algorithm (now
often called the MD8 algorithm) that was later published in the Topmodel application of Quinn et al. (1991, also Quinn et al.,
325 1995a) and independently by Freeman (1991). The Topmodel digital terrain analysis software for gridded data
(DTMAnalysis) was made freely available in the 1990s as a Visual Basic program, including sink filling, catchment
delineation, and topographic index derivations (e.g. figure 6). Other DEM routing algorithms have also been used, see for
example Wolock and McCabe (1995), Tarboton (1997) and Pan et al. (2004).

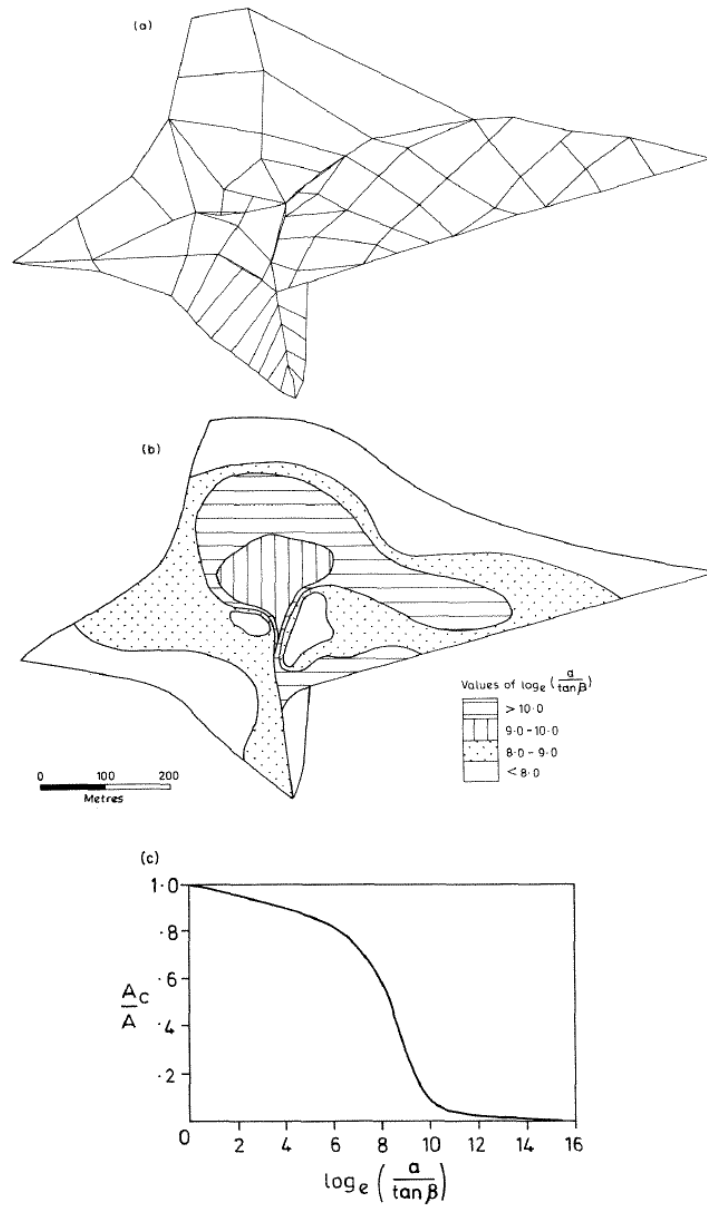

330

Figure 5. Manual topographic analysis of the Lanshaw subcatchment of Crimple Beck, showing the discretisation and pattern and distribution function of the topographic index (from Beven and Kirkby, 1979)

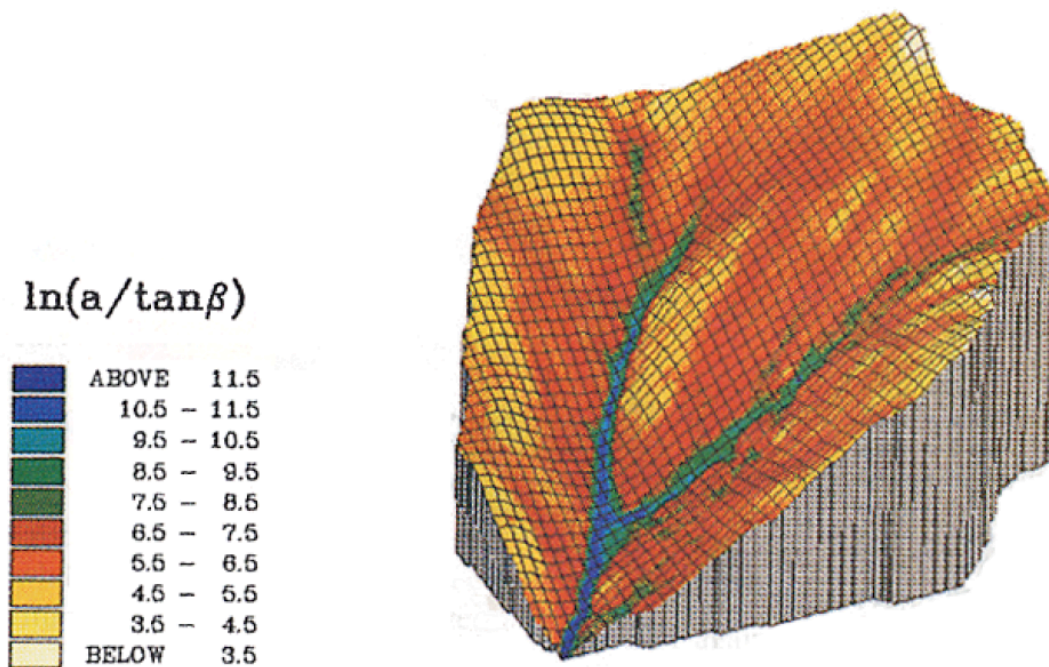

335 **Figure 6. Pattern of topographic index for the Ringelbach catchment, Vosges, France superimposed on a digital terrain model (after Ambroise et al., 1996b). The highest values in the valley bottom and convergent hollows will be predicted as saturating first. A small spring in the catchment on the right-hand hillslope, indicating subsurface convergence, is not reflected in the pattern of the index shown on this map since this is based on the topographic flow pathways alone.**

340

There were also other aspects to the early days of digital terrain analysis, in particular that the early (relatively coarse) gridded data sets were not necessarily hydrologically consistent i.e. the mapped blue line river network did not always match the lowest points in the digital data. There were also many sinks without outlets, apparently discontinuous rivers, and depending on how the data were processed catchment areas that were incomplete with respect to the contours, or that had gained area from adjacent catchments. All of these issues required either manual intervention or assumptions about how to process the data (e.g. do you raise sinks until there is a downslope pixel or burrow through a barrier to a lower downslope pixel). The Institute of Hydrology was instrumental in developing a more hydrologically consistent 50m digital elevation map for the UK in the 1980s (see, for example, Morris and Heerdegen, 1988).

350

Grid size will also have an impact on the calculated distribution of the topographic index. This has been investigated, for example, by Quinn et al. (1995); Franchini et al., 1996; Saulnier et al., 1997a,b; and Sorenson and Seibert, 2007). Coarser grid sizes will have the effect of increasing the mean value of the topographic index (λ in equation [7]) and will consequently have an impact on calibrated values of the model parameters. Franchini et al. (1996) show how, as a result, calibrated values of the surface transmissivity values tend to be high, and linked to the grid scale used in the topographic analysis. This dependence was investigated further by Saulnier et al. (1997a,b), Ibbitt and Woods (2004); and Ducharme (2009) who suggested ways of correcting for it, and by Pradhan et al. (2006, 2008) who used fractal scaling arguments to adjust topographic index distributions from coarse to fine scales to stabilize parameter estimates.

360 5. Evaluating the Topmodel assumptions

The simplicity of Topmodel has also been criticised (not least by Beven, 1997, and Kirkby, 1997). In particular the three main simplifying assumptions on which the model is based all have been criticised. As stated in Beven (2012, p210) these are:

365

A1 There is a saturated zone that takes up a configuration as if it was in equilibrium with a steady recharge rate over an upslope contributing area a equivalent to the local subsurface discharge at that point.

370

A2 The water table is near to parallel to the surface such that the effective hydraulic gradient is equal to the local surface slope, s

A3 The transmissivity profile may be described by an exponential function of storage deficit, with a value of T_0 when the soil is just saturated to the surface (zero deficit).

375 Some support for assumption A1 has been given by Moore and Thompson (1996) for a catchment in British Columbia, though their sample of water tables were mostly near to the stream and measured infrequently and they suggest more work to assess the limits of validity of the assumption. The assumption has been criticized by Barling et al. (1994) and others who noted that the effective upslope contributing area (a in the topographic index) will, in many catchments, be variable as the catchment wets and dries; larger under wet conditions and much smaller under dry conditions. This was also demonstrated by Western et al. (1999) in the Tarrawarra catchment, where observations of topsoil water content showed that topography can be a control on soil water content in wet conditions but that the pattern will be much more random in dry conditions, reflecting evapotranspiration rather than topographic controls on the patterns of moisture. This should not be a surprise at Tarrawarra which has duplex soils with a shallow active layer underlain by an impermeable subsoil (Western et al., 1999). In dry conditions, evapotranspiration will dominate the pattern of soil moisture in the topsoil; Topmodel has a root zone storage to

385 deal with this quite separate from the treatment of downslope flows. It is clear, however, that the potential for a dynamic a
will be an issue in many catchments, at least seasonally in the transitions from wet to dry conditions. Seibert et al. (2003) also
showed that in the Svartberget catchment in Sweden, there was a high correlation between water table levels and distance to
the nearest stream, even in upslope areas, but that the patterns over time suggested that assumption A1 was not valid there.

390 Modifications to Topmodel have been suggested to allow a dynamic recalculation of the topographic index distribution under
wetting and drying either as a function of travel times or some representation of the breakdown of subsurface connectivity
(Barling et al., 1994; Piñol et al., 1997; Saulnier and Datin, 2004; Loritz et al., 2018). There is an increasing appreciation that
connectivity of both surface and subsurface flows on hillslopes is one reason for the nonlinearity of hydrograph responses and
the threshold behavior of runoff generation in small catchments (see for example, Graham et al., 2010; McGlynn and Jensco,
395 2011). The A1 assumption implies that there is always connectivity of downslope flows in the saturated zone, while in the
original TOPMODEL any overland flow generated on a topographic index increment is assumed to reach the stream. In some
situations this will not be unreasonable in that if an area generates fast runoff frequently (on areas of low slope, or areas of
high convergence) there will often be a rill or small channel that conveys that runoff downslope, even if that area might be
some way from a channel. Such small rills and channels are often too small to be seen in even fine resolution DTMs, so might
400 be missed in setting up a more detailed model. They can sometimes be clearly seen in the field or from aerial photographs as
having different, wetter, vegetation patterns (e.g. Quinn et al., 1998). Elsewhere, there may be cases where predicted areas of
saturation are not connected to the stream network and surface run-on effects will be important in increasing soil water content
and saturation downslope. The network topographic index of Lane et al. (2004), later incorporated into Distributed Topmodel
(see below), was designed to take this into account. Such connectivity can also be represented in Dynamic Topmodel (see
405 below).

As noted earlier, assumption A2 can be expected to hold when there is a saturated zone in a soil profile that is much shallower
than the slope length. A2 has, however, been criticized when there are deeper flow pathways. Groundwater analyses suggest
that deeper water tables will not be parallel to the surface and may even involve upward fluxes and cross-divide fluxes between
410 catchments. Where this is important in the perceptual model of the response of a catchment, then clearly the Topmodel
assumptions will not be valid. This assumption can be relaxed, however. Quinn et al. (1991), for example, showed how the
topographic index can be derived using a reference slope pattern for the water table rather than the surface slope. Use of
Topmodel in this context then assumes that the water table is always parallel to the reference pattern (except where it intercepts
the surface). This will also be an approximation but allows the Topmodel concepts to be applied to a wider range of situations
415 (it might also require use of a non-exponential transmissivity profile, and to allow for the different depths of unsaturated zone
that might lie above points with similar reference level topographic index values).

Beven (1982a, 1984) showed that the exponential assumption of A3 could be justified for at least some soils (see also Michel et al. 2003). Kirkby (1997) also showed that when the subsurface flow is treated as a kinematic wave equation, the exponential assumption is the one form that is fully consistent with the assumption of spatial uniformity of runoff production for all integration times, as well as at steady state. However, one criticism of A3 has that the recession limb of hydrographs is not always of the first order hyperbolic function of time that an exponential transmissivity function implies. That is not too great a problem in that, as noted above, different types of transmissivity profile representing different shapes of recession can be assumed, but which imply a change in the definition of the associated topographic index (Ambroise et al., 1996a; Iorgulescu and Musy, 1997; Duan and Miller, 1997)). Note, however, that these forms treat the problem as one of successive steady states for different effective recharge rates, and can only be an approximation for the more dynamic solution for the exponential profile in Kirkby (1997). Other groups have taken a different approach by modifying the Topmodel concepts to allow for more complex process representations in different catchments. In particular, additional storage elements have been added to simulate shallow subsurface stormflows when the exponential store of the original Topmodel did not appear to hold (e.g. Scanlon et al., 2000; Walter et al., 2002; Huang et al., 2009).

A further criticism has been that A3 does not properly account for the transient downslope flows in the unsaturated zone. This led Ezio Todini to propose a form of topographic index that allowed for a downslope flow dependent on moisture storage in the unsaturated zone (Todini, 1995) that was later used in the Topkapi model (Ciriapica and Todini, 2002). It should be evident that in considering possible applications of Topmodel it is important to evaluate the assumptions that need to be made. In that these can be stated simply, however, they can readily be compared with the perceptual model of the characteristics and processes in a catchment to decide which sets of assumptions might be more plausible (see, for example, Piñol et al., 1997; Gallart et al., 2007; Beven and Chappell, 2020).

440 6. Extensions to the classic Topmodel concepts

In addition to the extensions and relaxations to the original model formulation discussed in the previous section, Beven (1982b) proposed an extension to the theory to allow for heterogeneity in the soil profile characteristics in a catchment by use of a soil-topographic index $\ln(a/T_o \tan \beta)$ (see also Beven, 1986, 1987). If it is assumed that the soil is everywhere homogeneous then T_o will have no effect on the spatial and cumulative distribution of the index; but if there is evidence to allow it to vary within the catchment then the variability in T_o will change both the pattern and cumulative distribution of the saturated contributing areas. If soil depths vary, this might also require allowing for different depths to the saturated zone for similar values of the index (Quinn et al., 1991; Saulnier et al., 1997c). The soil-topographic index was used in two studies in catchments where many piezometers were available to indicate patterns of saturation (Lamb et al. 1998; Blazkova et al., 2002), allowing local transmissivities to be defined. Interestingly, in both cases, this resulted in a steepening of the cumulative distribution of the index suggesting a later onset of a saturated contributing area but a more rapid spread once it was established.

Greater heterogeneity in soil permeability also means that there is a greater potential for infiltration excess overland flow and Beven (1984) provided a Green-Ampt type solution for infiltration capacity that was consistent with an exponential hydraulic conductivity assumption (see also Larsen et al., 1994). This was implemented in some versions of Topmodel assuming isotropy of vertical and downslope conductivities.

Further extensions were proposed for cases where the catchment recession is not consistent with the exponential storage/flow function of BK79. This was extended to other forms of storage-discharge relationship by Ambroise et al. (1996a) (Figure 7), Iorgulescu and Musy, (1997), and Duan and Miller (1997). These forms then imply the use of a different form of topographic index to $\ln(a/\tan \beta)$, and might also preclude the use of the implicit redistribution of subsurface storage (see Kirkby 1997). A generalised formulation for an arbitrary empirical recession curve was also proposed by Lamb and Beven (1997) and Lamb et al. (1998).

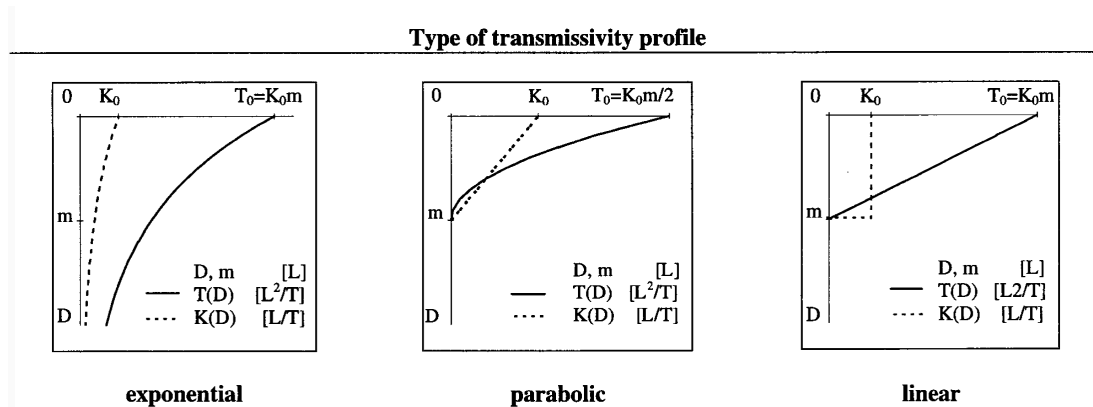


Figure 7. The different types of transmissivity profile considered in Ambroise et al. (1996a). Note that plotting recession discharges against time for the exponential profile $1/Q_b$ should plot linearly. For the parabolic profile $1/\sqrt{Q_b}$ should plot linearly (for generalisation to a power law function see Iorgulescu and Musy, 1997; Duan and Miller, 1997), and for the linear profile, $\ln Q_b$ should plot linearly (see Ambroise et al., 1996a).

470

7. Evaluating the spatial predictions of Topmodel

As noted earlier, one of the most important features of Topmodel is the possibility of assessing the spatial pattern of predictions of storage deficits, saturated areas, or water tables. The earliest evaluations of the spatial predictions of Topmodel were in Kirkby (1978, Figure 2) and in the original BK79 paper. This was based on field work in the small Lanshaw headwater subcatchment ($\sim 0.2 \text{ km}^2$, 1A in Figure 4) of the Crimple Beck evaluation where a network of over 100 overland flow detectors

was installed. These were simple T-tubes of plastic pipe, with holes in the top of the T at ground level such that water would collect in the vertical tube if overland flow occurred. This is a very simple technique but, of course, only gives a binary measure of occurrence and requires visiting the network (and being able to find all the tubes) after every storm. This was a significant effort but allowed percentage saturation statistics to be built up over a number of storms. This showed that saturation in this subcatchment was related to storm peak discharge but peaked at about 95%, whereas the model predicted up to 100% saturated contributing area. Further investigation showed that this difference was due to two areas of more permeable fluvioglacial sand in the catchment that were much less likely to saturate. Even this small catchment was not homogeneous in its soil characteristics.

485

This is one of the issues in doing this type of comparison (and of setting up hydrological models anywhere since without such local knowledge they cannot be right in detail). Two types of state observations are generally used in model calibration or evaluation: percentages or maps of saturated areas at one or more time steps; and point measurements of water tables. Another evaluation of mapped saturated areas at the scale of a small catchment was carried out by Franks et al. (1998) in the *bocage* landscape of Brittany. They investigated the potential of airborne radar to detect valley bottom saturated areas. This turned out to be limited by the difficulty of distinguishing saturated from near-saturated areas but, in that landscape, the wet areas corresponded closely to areas traditionally walled off to keep the cattle out, something that could be used over wider areas in model evaluation.

495 At a larger catchment scale (40 km²) Güntner et al. (1999) mapped out saturated areas by field surveys in the Brugga catchment in Germany using pedological and vegetation characteristics, comparing the results with the Topmodel predictions (for a single optimised parameter set). Their conclusions are an indication of the type of match that might be achieved at this scale: *“Their [saturated areas] mean simulated percentage on total catchment area was about 5.5% (Table III) which corresponded well to the mapped percentage of 6.2%. On the other hand, the simulated percentage of saturated areas was highly variable with time*
500 *(Figure 5 and Table III). During high flow periods it reached nearly 20%. This was in contrast to the field observations, where spatial variability of the extension of saturated areas was small. A percentage higher than 10% was not reasonable in the study area, except for extreme situations, which did not occur during the study period. In the model, because of the large percentage of simulated saturated areas during floods, overland flow rates and consequently total runoff would be simulated too high. For compensation, parameter m had to be calibrated to a large value in order to better match observed peak flow at*
505 *the expense of the performance of recession simulation. This is due to the function of this parameter to control the dynamics of subsurface runoff, with lower m reducing the range of subsurface flow rates and, thus, diminishing peak flow but also flattening out recessions. In summary, the poor correspondence of calibrated m to its value derived from the recession analysis revealed that the calibration of m was influenced by inadequacies of the model structure for the study area, i.e. an overestimation of the dynamics of saturated areas.”* (pp 1616/1617)

510

A number of studies have compared Topmodel spatial predictions to observed patterns of water tables and mapped saturated areas with more or less success (e.g. Ambroise et al., 1996b; Moore and Thompson, 1996; Seibert et al., 1997; Lamb et al., 1997, 1998; Blazkova et al., 2002; Freer et al., 2004). Two issues arise in comparing observed and predicted water tables. The first is converting predicted (gravity drainage) storage deficits to water table depths which (as noted earlier) requires some assumption about the nature of the relationship between water table depth and deficit due to fast gravity drainage. The second issue is the commensurability issue of comparing the modelled variable, representing some average over a topographic index increment to local point observed values. These may be given the same names by the hydrologist (soil moisture, water table depth,...) but represent different quantities when they reflect different scales (see, for example, Freer et al., 2004 who allowed for sub-grid uncertainty in the model evaluation). This is a particular problem when no information is available about the spatial variability of transmissivity in the catchment, so that it is necessary to assume a homogeneous transmissivity in the model. Thus, even if the Topmodel assumptions might be a reasonable simplification in modelling a heterogeneous catchment, we would not then expect the predictions to match the observations exactly (Lamb et al., 1998; Blazkova et al. 2004). Defining saturated areas relative to the grid scale of the topography and topographic index can also be an issue (Gallart et al., 2008). It also means that the match can be improved by the back-calculation of a local transmissivity at each observation point or mapped saturated area boundary to give better fits to stream discharges, though point observations did not prove to have the effect of also reducing the uncertainty in predicted discharges (Ambroise et al., 1996b; Lamb et al. 1998; Blazkova et al., 2002).

There is also the possibility that subsurface flow lines might not follow the surface topography producing concentrations of saturation, for example, as the result of fracture systems in the bedrock. This has been found in the Ringelbach catchment (Ambroise et al., 1996b) and the Slapton Wood catchment (Fisher and Beven, 1996) but of course is very difficult to incorporate in any model without a detailed characterisation of the subsurface. Freer et al. (1997, 2002) found that at the Maimai and Panola catchments better characterisation of the water tables was achieved using a topographic index based on the bedrock topography (defined at great effort on a 2m grid with a knocking pole) rather than the surface topography. This was related to collection of flow in hillslope trenches (although a significant amount of flow was also collected from discrete macropores in the soil). Obtaining such information over larger areas is, however, much more difficult, even using geophysical methods, and often there is not such a clearly defined transition to bedrock.

It is then interesting to consider how good the spatial predictions should be before the Topmodel assumptions are considered invalid. If we look in enough detail, all model hypotheses have their limitations, but in making an evaluation it is also necessary to consider the uncertainties in the forcing and evaluation data and the commensurability issues of comparing observed and predicted variables (see the discussion of Beven, 2019a). Blazkova et al. (2002) considered whether the death of Topmodel should be declared on the basis of evaluations of both hydrograph and water table predictions and suggested that, at least for the catchment studied, such an announcement might still be premature. But, we repeat, the Topmodel assumptions

545 will apply to only a subset of catchments, and perhaps to only a subset of catchments for which applications of Topmodel have
previously been published. One of the reasons for the development of the Dynamic version of Topmodel (see below) was to
relax some of the spatial homogeneity assumptions of the original model.

As noted previously, one of the features of the Topmodel formulation is that the topographic index on which it is based, both
550 has a physical basis as an index of similarity and allows a computationally efficient code. It may not, however, be the best
index of similarity in all catchments, and there have been a number attempts to formulate alternative forms. In particular,
indexes based on height above the nearest river channel (Crave and Gascuel-Oudou, 1997; Rennó et al. 2008; Gharari et al.,
2011), and an extension of this based on consideration of the dissipation of potential energy (Loritz et al., 2019) have been
proposed and tested in discriminating different hydrological responses within catchment. Other approaches have included the
555 travel time index of Barling et al. (1994), the variable recharge index of Woods et al. (1997); the downslope wetness index of
Hjerdt et al., (2004), and the hillslope Peclet number of Berne et al. (2005). Unlike the Kirkby index used in BK79 or the
O’Loughlin wetness index, not all of these explicitly consider the effects of hillslope convergence or divergence on saturation
and runoff processes. There may, however, be an implicit effect, in that areas of convergence near the base of hillslopes will
have a greater area with little elevation difference to the nearest stream, relative to divergent slopes that are more convex in
560 form.

8. Topmodel calibration and uncertainty estimation

One of the original aims of the development of Topmodel was to keep the model structure simple and as parametrically
565 parsimonious as possible while still retaining the possibility of mapping the model predictions back into space and determining
the model parameters by field measurement, as in Beven et al., (1984). Table 1 presents the parameters that need to be defined
in the classic version of the model. The 1970s was a period when most model applications involved manual calibration,
although there had been significant research on the application of automatic computer calibration methods to hydrological
models. Automatic methods were still somewhat limited by the computer resources available, especially for models that had
570 large numbers of parameters or were slow to run. Norman Crawford who, as the PhD student of Ray K. Linsley, developed
the Stanford Watershed Model (that later developed into the HSPF package) argued that manual calibration was advantageous
in that hydrological reasoning could be used in the calibration process. The Stanford model, however, had many more
parameters than Topmodel and it was widely suggested at the time at the only person who could successfully calibrate the
Stanford Model in this way was Norman Crawford (Crawford and Linsley later founded the Hydrocomp consultancy company
575 to promote the Stanford Model, see Crawford and Burges, 2004).

In fact, the original BK79 Topmodel paper includes a comparison of field measured and optimised calibrations (as determined
from response surface plots) to the Lanshaw subcatchment of the Crimple Beck. This proved to be interesting in that the

580 optimisation produced slightly better goodness-of-fit but took the model into a part of the parameter space that meant that the contributing area component was entirely eliminated and the whole basin response was simple being represented by the exponential store. This was not perhaps surprising in this relatively wet, rapidly responding catchment but the manual calibration was able to ensure that the model functioned as intended (consistent with the perceptual model on which it was based). KB was always very wary of optimisation methods for model calibration as a result of this experience.

585 This has not prevented the use of automatic optimisation by others, however. Topmodel was quick to run (once the topographic index distribution had been determined) and so well suited to automatic methods. That also meant that it was also well suited to the use of random parameter sampling or Monte Carlo methods. KB made the first Monte Carlo experiments with Topmodel in 1980 when working at the University of Virginia (UVa) in Charlottesville with access to a fast (for its time) CDC6600 “mainframe” computer. This work was inspired by the Regionalised or Generalised Sensitivity Analysis (GSA) methods developed by George Hornberger (also at UVa), Bob Spear and Peter Young (see Hornberger and Spear, 1981). The GSA approach differentiated between sets of “behavioural” model parameters and those considered “non-behavioural”. KB extended this binary classification to express some of the uncertainty associated with the model predictions, by weighting the outputs from each model run by an informal “likelihood” based on a goodness-of-fit measure. Non-behavioural sets of parameters are given a likelihood of zero and do not contribute to the prediction uncertainty.

595 This was the origin of the Generalised Likelihood Uncertainty Estimation (GLUE) methodology that was first published more than a decade later in Beven and Binley (1992). The use of informal likelihoods in GLUE proved to be rather controversial relative to statistical methods (see Beven et al., 2008; Beven and Binley, 2014), but the methodology has been used extensively, including in applications of Topmodel and Dynamic Topmodel (as well as with many other models). GLUE does not require a formal statistical model of the residual errors which can be difficult to specify for dynamic models subject to epistemic uncertainties (see Beven, 2016). The first published application of GLUE to Topmodel, appears to have been that of Beven (1993), closely followed by Romanowicz et al. (1994) (which did use a formal statistical likelihood within the GLUE framework with resulting overconditioning), and Freer et al. (1996), who showed how the distributions of model residuals could be non-Gaussian and non-stationary, and how the likelihood weights could be updated as more data became available.

605 There have been many other applications of Topmodel and Dynamic Topmodel within the GLUE framework that have included the use of internal state data in model evaluation as well as discharge observations (e.g. Ambroise et al., 1996b; Lamb et al., 1998; Freer et al., 2004; Gallart et al., 2007) which, it would be hoped, would help judge whether a model is getting a reasonable fit to the data for the right reasons (Klemeš, 1986; Beven, 1997; Kirchner, 2006). It has also been shown how, even in a catchment where the Topmodel assumptions might be considered to be reasonable, some seasonal variation in plausible parameter sets could be identified on the basis of non-overlapping distributions of behavioural parameter sets for sub-annual periods. Freer et al. (2003) and Choi and Beven (2007) showed how such variation could be incorporated into

making predictions by defining classes of hydrologically similar periods; but in both studies this is also an indication of the limitations of the simple Topmodel structure which could, in this case, have been rejected. A similar period classification approach to calibration has been taken more recently by Lan et al. (2018)

Most recently, rather than using an informal likelihood, GLUE has been applied using limits of acceptability that are specified based on what is known about uncertainties in the input and evaluation data before making any runs of the model (Liu et al. 2009; Blazkova and Beven, 2009a; Coxon et al., 2014). This is similar to earlier applications of GLUE based on fuzzy measures and possibilities (e.g. Franks et al., 1998; Freer et al., 2004; Page et al., 2007; Pappenberger et al., 2007). This acts as a form of hypothesis test in conditioning the model space to those areas where plausible models are consistent with the limits of acceptability. It also allows that all the models tried might be rejected (e.g. Hollaway et al., 2018), although in doing so care must be taken to properly assess uncertainty in the available data (Beven, 2019a).

625

9. Topmodel and flood frequency estimation

One important type of application of Topmodel was to make use of its simplicity and computational efficiency to extend the prediction of hydrographs to flood frequency analysis. The first applications to frequency analysis were part of the PhD thesis of Murugesu Sivapalan at Princeton University. This built on the seminal derived distribution approach of Eagleson (1972), using a distribution of storm events to drive the model on a storm by storm basis to generate the distribution of flood peaks, including both infiltration excess and saturation excess runoff generation as a function of the topographic index and antecedent wetness. Sivapalan et al. (1987, 1990) showed how the flood frequency distribution could be expressed as a function of non-dimensionalised rainfall and Topmodel parameters. An important simplification in this work was the neglect of any redistribution of subsurface storage within each event; saturation would occur only by volume filling given the contributing area and deficit at the start of the event. Another aspect of this work was the introduction of the concept of the “Representative Elementary Area” where a similar version of Topmodel was used, with rainfalls assumed to be statistically homogeneous with a certain correlation length, to assess the scale at which *pattern* in hydrological heterogeneity became less important, although the nonlinearities arising from the *distribution* of that heterogeneity might still be important (Wood et al., 1988).

The need to generate antecedent conditions for each storm could be avoided by using the model in continuous simulation mode. This allows the antecedent conditions for each event to be consistent with the sequence of previous events. This became possible as more computer power became available, allowing very long runs with hourly time steps to assess the frequency statistics of rare events. This had been done before using of long observed rainfall sequences driving a variety of hydrological models (e.g. Thomas, 1982; Calver and Lamb, 1995), but Beven (1986, 1987) first combined stochastic rainfall

and evapotranspiration generation with Topmodel on an hourly time step as a way of producing sequences of flood peaks for the Plynlimon catchments in Wales. Other applications included catchments in the Czech Republic (Blazkova and Beven, 1997).

650

More computer power still, notably with the use of parallel PC clusters, allowed this approach to be applied with sets of behavioural model parameters determined by comparison with historical discharges at a site within the GLUE framework (e.g. Cameron et al., 1999, 2000a,b; Blazkova and Beven, 2002). One of the results of such calibrations was that the annual maximum frequency distribution could be matched quite well, but not necessarily with the same storms in each year of record, due to the uncertainty in both model predictions and observed discharges (Cameron et al., 1999; Lamb, 1999). A second result was that in doing the comparison it was important to compare like with like. Particularly in smaller catchments the instantaneous flood peak frequency distribution could have a quite different form to the distribution of peaks for hourly time steps, as predicted by the model (Cameron et al., 2000a). A third issue is that when the rainfall model or hydrological model are calibrated against a relatively short period of record, that period may not be representative of the longer-term frequency characteristics (e.g. Cameron et al., 2000c; Blazkova and Beven, 2009a).

660

This work has included some very long runs of the model (multiple sequences of 100000 years) in order to assess the frequency of extreme events for dam safety assessment (e.g. Blazkova and Beven, 2004). In doing so there are issues about the stochastic generation of very extreme rainfall events. Where the underlying distributions in the stochastic input generator are assumed to have infinite tails some physically unrealistic storm volumes can be generated. This can be avoided either by using a modified distribution (e.g. Cameron et al., 2000c) or by limiting storms to a local estimate of probable maximum precipitation (Blazkova and Beven, 2004). The latter, of course, can also be controversial but is often used in dam safety assessments. One advantage of the continuous simulation approach to dam safety is that both the magnitude of the flood peak, and the total volume of runoff supplied can be assessed. The biggest threat will not necessarily come from the storm with the highest peak if that peak is of short duration (Blazkova and Beven, 2009b).

665

670

Another important question is how the frequency of floods might change with changes in climate. The continuous simulation approach using Topmodel has been applied in this context, including taking account of the uncertainty in reproducing past hydrograph data (e.g. Beven and Blazkova, 1999; Cameron et al., 2000b). Any such estimates can only represent potential scenarios because of the dependence on estimates of changes in precipitation and other weather variables provided by the climate models. They thus cannot be associated with any reliable estimates of probabilities such that there may be better ways of being precautionary about future changes (Beven, 2011). This work did produce one interesting insight, however. In general the change in the mean estimate of a rare event (say with 0.01 annual exceedance probability) was much less than the uncertainty of estimating that event under current conditions. However, the steepness of the cumulative distribution function

675

680 for such an event could imply a significant change in the probability of exceedance for specific values of discharge (such as
that at which defences might be over-topped).

10. A Distributed Topmodel

685

It is not necessary, of course, to group pixels together into classes based on the topographic index. The model could equally
be run as a fully distributed model. The obvious advantage of doing so is that the routing of surface runoff can be more
explicitly linked to the topography, and more flexibility is possible in defining pixel characteristics. Gao et al. (2015) have
followed this route, combining the implicit subsurface redistribution of storage based on assumptions A1 and A2 with a
690 stochastic surface flow routing algorithm. This is based on a mean velocity linked to surface storage in a pixel, an exponential
distribution of velocities for surface runoff parcels of water that results in different travel distances for the parcels, and a
probabilistic weighting of directions based on the local downslope topography. This results in more diffuse patterns of runoff
in both space and time, but at the expense of significantly more computational expense. Gao et al. (2016, 2017) show how
the flexibility of the distributed form of the model can be used to represent land management patterns and changes in upland
695 peatland catchments in the UK in this way.

11. Developing Dynamic Topmodel

700 A version of Topmodel called Dynamic Topmodel was developed to overcome some of the limitations of the classical version
by relaxing assumption A1 to create a more dynamic model both in the subsurface storage-discharge relationship and in the
treatment of the effective upslope area. The obvious starting point, for the type of shallow, humid, sloping systems for which
the classical Topmodel was intended is to formulate the model within the framework of a kinematic wave equation. Kirkby
(1997) did this for a single hillslope segment, noting that a more dynamic subsurface routing would particularly be required
705 for transmissivity functions other than the original exponential form. Beven and Freer (2001) later created Dynamic Topmodel
which uses kinematic wave routing for subsurface flows between classes of “hydrologically similar” points in a catchment,
where the classification need not be based on a form of $(a/\tan\beta)$ index alone. This then requires a digital terrain analysis that
keeps track of all the pathways between one similarity group and others, including discharges to the river network, If does,
however, allow much more flexibility in allowing spatial patterns of catchment characteristics into account to reflect an
710 appropriate perceptual model of catchment responses, in that different similarity classes can have different structures and
parameters. However, this flexibility is at the cost of introducing more parameters to be defined or calibrated which is not
generally simple to do. The root zone and evapotranspiration components of Dynamic Topmodel were carried over from the
original version, but also have been made more complex elsewhere (e.g. in the HYDROBLOCKS code of Chaney et al., 2016).

Dynamic Topmodel has been applied in a number of studies including the Panola (Peters et al., 2003), Plynlimon (Page et al., 2007), Maimai (Beven and Freer, 2001; Freer et al., 2004), Attert (Liu et al., 2009) and Brompton (Metcalf et al., 2017) catchments.

A somewhat similar approach, but applied on a gridded DEM as a fully distributed model, has been taken in the DVSHM model of Wigmosta et al. (1994) and Adriance et al. (2018). Care then needs to be taken in the numerical implementation, particularly in the gridded approach, as kinematic shocks can arise where there are changes of slope or asymmetric convergent hollows. This can lead to numerical dispersion or instabilities, particularly in an explicit time stepping solution. Instabilities can be avoided by applying a 4-point kinematic wave solution at a pixel level, where all upslope inputs have already been solved and can be added so that only the downslope flow is unknown (Beven, 2012). The original Dynamic Topmodel code was written in Fortran 77 and has been later modified into the DECIPHeR Fortran 2008 code of Coxon et al. (2019) which involved a number of important changes to explore simulations over national scale domains, simulating hundreds of catchments. A version in R was provided by Metcalf et al. (2015) including tests of the effects of spatial and temporal resolution. Metcalf et al. showed that convergence of the hydrograph predictions require a discretisation of the catchment into the hydrologically similar unit (HSU) classes that results in a cascade of 10-15 downslope HSUs. This version has since been developed further at Lancaster University. The Regional Hydro-Ecological Simulation System (RHESys) that had originally combined the BIOME_BGC biogeochemical model with the original version of Topmodel (Band et al., 1993), also later incorporated a similar gridded kinematic routing algorithm as an alternative, (Tague and Band, 2004).

Another gridded kinematic wave model that was inspired by the original Topmodel is Topkapi (Todini, 1995; Ciarapica and Todini, 2002). This was intended to relax the steady state assumption of Topmodel and include the downslope unsaturated fluxes as a function of water content. It was also aimed at having model parameters that were effectively scale independent by integrating the equations over the grid scale into a cascade of nonlinear reservoirs (Liu and Todini, 2005). The theory underlying Topkapi also resulted in a form of soil-topographic index but most applications have been made using a gridded discretisation of the catchment. Later work added deep percolation and groundwater components (Liu et al., 2005).

740 **12. Wider applications of Topmodel**

There have been a number of different areas where variants of Topmodel have been used as the hydrological basis for other types of predictions.

745 The original evapotranspiration and root zone component of Topmodel was very simple. This was by design, so as to again introduce only the minimum number of parameters to be calibrated (only one parameter is needed, the effective available water capacity for actual evapotranspiration). This was supported by the study of Calder et al. (1983) who showed that very simple

750 evapotranspiration models could reproduce soil moisture deficits just as well as complex models as sites across the UK, even during the extreme drought year of 1976. Beven and Quinn (1994) later used a more complex root zone representation, including the possibility of capillary rise, in studies of variability in water balance (see also Tague and Band, 2004).

755 New forms were also driven by the aim of incorporating some effects of topographic and vegetation variability into the land surface parameterisations of atmospheric circulation models. The earliest attempt to do so was the Topmodel-based Land surface – Atmosphere Transfer Scheme (Toplats) formulation produced in the PhD of Jay Famiglietti at Princeton University (Famiglietti and Wood, 1994). This was later modified to add more energy budget components (Peters-Lidard et al., 1997; Pauwels and Wood, 1999), and is still being used (e.g. Fu et al., 2018). The potential for allowing for subgrid variability in hydrological states in the TOPUP land surface parameterisation based on Topmodel was also explored by Quinn et al. (1995b) and Franks et al. (1997). A version of Topmodel was later included in the land surface parameterisations used by the UK MetOffice (MOSES2 then JULES, Essery et al., 2003; Best et al., 2011; Zulkafli et al., 2013), while MeteoFRANCE use 760 ISBA-Topmodel as a land surface parameterisation (Habets and Saulnier, 2001; Vincendon et al., 2010). There has also been a form of land surface parameterisation based on Dynamic Topmodel called HYDROBLOCKS developed by Chaney et al. (2016) designed to allow the representation of high-resolution local variability. We note, however, that simple use of the Topmodel concepts are very unlikely to be valid in many parts of the globe where these land surface parameterisations are likely to be used. It is to be hoped that they are used with care.

765

Another interesting extension of the use of Topmodel and Dynamic Topmodel has been in the prediction of solute concentrations in small catchments. One of the features of being able to map the predictions back into space is that the pattern of storage deficits or water table levels along the stream network can be determined on a time step by time step basis. Robson et al. (1992) made use of this by assuming, on the basis of field observations that different soil horizons could be associated 770 with different chemical signatures, with the resulting stream concentration being made up of water displaced from those horizons. Both stream chemistry and the hydrograph separation between near surface acidic and deeper more buffered waters were simulated reasonably well in a small stream in upland Wales. Page et al. (2007) used Dynamic Topmodel to simulate chloride concentrations for two streams at Plynlimon, adding some exchanges with “immobile” storage to account for the differences in flow and tracer responses. Chloride was chosen as a relatively conservative tracer, but it was found that for the 775 period under study the observations had a marked imbalance between inputs and outputs, possible due to dry deposition and occult deposition in this maritime site. It was therefore necessary to reconstruct the input signal. Additional mixing assumptions and parameters were required for the model stores. It was shown that the model could reproduce the long term seasonal behaviour quite well, but it did not do so well on the short term storm dynamics.

780 The network topographic index has also been used as the basis for mapping of relative risk for solutes, sediments and faecal bacteria within the SCIMAP system (e.g. Milledge et al., 2012; Porter et al., 2016).

13. What would we do now?

785 A lot has happened since Topmodel was originally formulated in the 1970s especially in terms of the computer power available
to modellers and information about catchments through mapping and satellite images. Some things, however, remain only
rather poorly known; perhaps most importantly the subsurface structures and flow characteristics in catchments, including the
potential for preferential flows (Beven and Germann, 1982; 2013) and changing connectivities on hillslopes (Hopp and
McDonnell, 2009; Jensco and McGlynn, 2011; Tetzlaff et al., 2014; Bergstrom et al., 2016). Some important new
790 understanding of catchment processes has been gained over that period, particularly the use of environmental isotopes to study
the residence times and contributions of pre-event water to hydrographs. While it is not strictly necessary to take this into
account in modelling catchment discharges (see the discussion of velocities and celerities in McDonnell and Beven, 2014,
and Beven, 2020, for example), there have been increasing demands to link surface and subsurface predictions to solute
transport, sediment mobilisation and transport, and biogeochemistry and many studies have used Topmodel as a basis for
795 building more complex model structures and land surface parameterisations (e.g. HYDROBLOCKS, RHESSys, JULES etc as
noted above). It certainly seems that the simplicity of the topographic index approach is still attractive. Perhaps too attractive,
in that it is clear that many applications of Topmodel have been to catchments where the assumptions are clearly not even
approximately valid. Regardless of the validity of the assumptions it can still be calibrated to provide a nonlinear runoff
generation function, but it might be hoped that applications would be made with a bit more hydrological thought.

800

It is, however, interesting to speculate about what we would do if we were starting over to develop a simple hydrological
model that showed some physical basis to its process representations, including the effect of hillslope form on surface and
subsurface runoff generation; that was fast to run so that the uncertainty associated with the predictions could be assessed
and/or such models can be run for “everywhere”; and where the spatial predictions could be mapped back into space to give
805 the potential for some evaluation and inference about processes in the catchment. This is already a demanding set of
requirements, satisfied by Topmodel through the use of the topographic index as an index of hydrological similarity but few
other models. The key assumption is then that the saturated zone takes up a configuration as if there was a uniform recharge
flux everywhere on the hillslopes equivalent to the saturated zone discharge.

810 Increased computer power does mean that some complexity can be added, while still retaining the possibility of running the
model many times. This is already reflected in the explicit downslope routing incorporated into Dynamic Topmodel, the
Distributed Topmodel, and DECIPHeR and a more explicit account of spatial heterogeneities that are perceived as being
hydrologically important. There is still some computational advantage of retaining a similarity idea (as in Dynamic Topmodel)
as opposed to a fully distributed model which will normally require a coarser spatial resolution for similar run times.

815

The process descriptions in Dynamic Topmodel have not, however, changed so very much. There is more flexibility in defining the subsurface transmissivity functions, and storage deficits at which downslope flows cease, to allow for dynamic conductivity effects, but the constant local hydraulic gradient, root zone, and recharge calculations have not changed significantly. In part this was always driven by a wish to reduce the number of parameters; including not separating
820 interception and root zone stores and allowing recharge only when the root zone reaches some “field capacity” threshold. Preferential flows are implicit in this excess for vertical flows and in the transmissivity function for downslope flows. Different options would be relatively simple to implement if driven by a different perceptual model of catchment response or different application requirements as in the different implementations of the original Topmodel, but again at the cost of requiring more parameter values to be defined.

825

It is possible to think about a different way of process representations in models of this type by drawing an analogy between these HSUs and the Representative Elementary Watershed (REW) concept (e.g. Reggiani and Rientjes, 2005). In the REW framework, the mass balance, energy balance and momentum balance conservation equations should hold at any discretisation scale. What is then necessary to apply those equations is to relate the boundary fluxes of each element to the internal states of
830 that element. This approach has the advantage of avoiding any reference to continuum differential equations, since differential gradients of hydrological variables do not really have much meaning at scales of interest (see, for example, Beven, 2006, 2019b). It also implies that, given that there is a length scale for any discretisation, the process representation that links states and fluxes should be scale dependent (Beven, 2006). Here is an opportunity for real progress to be made in terms of model parameterisations, but the problem has not yet been solved. How, for example, does the hysteresis in the boundary fluxes
835 relative to states, due to differences between velocities and celerities, change with scale and wetness (e.g. Davies and Beven, 2015). And, if we are interested in predicting transport as well as flows, how do the residence times and transit time distributions in an element vary with that hysteresis. It would be a real advance to make progress with this type of representation in a simple parametrically parsimonious way. However, any evaluation of the results will continue to depend on also making advances in observational methods (Beven, 2019a; Beven et al., 2020).

840

Another aspect of hydrological modelling that has become more possible with modern computing and databases is running models to represent “everywhere” (Beven, 2007; Beven and Alcock, 2012; Blair et al., 2019). This has the potential to change the way that modelling is done from trying to find generalised model structures to apply widely, to a learning process about places. Dynamic Topmodel, in its DECIPHeR form, has already been applied to the whole of Great Britain (Coxon et al.,
845 2019) making it very obvious where some of the model assumptions were not valid and local modifications would be necessary (notably in predicting catchments with large groundwater storages). Other catchments where the assumptions might be expected to hold better also showed rather variable modelling efficiencies but, again, this might be a matter of uncertainties in the hydrological data as much as a problem of model structure. What such results do encourage, is the investigation of why the predictions are not so good locally, and not only at the catchment level but also at very local levels where spatial predictions

850 can be compared with useful hydrological information. This can include specific monitoring at sites of interest, organised field campaigns, and citizen science type of local information as part of the learning process. Learning from where the model predictions can be shown to be wrong is certainly going to be one way to advance modelling practice in future. The flexibility of the different ways of classifying the landscape and the possibility of modifying model structures and parameters in different classes in the different implementations of Dynamic Topmodel should prove useful in that respect.

855

Acknowledgements

860 KB would like to recognise the characteristic generosity of Mike Kirkby in allowing the original author order to be alphabetical, despite the fact that Topmodel was based on his original idea for the topographic index. Not only that but he even offered his new post-doc a room in his house while he house-hunted in Leeds, a stay that extended to 3 months! Many people have contributed to the development of the Topmodel concepts and associated fieldwork over the years. We would like to acknowledge particularly Bruno Ambroise, Daniela Balin, Kathy Bashford, Sarka Blazkova, Patricia Bruneau, Wouter
865 Buytaert, Paul Campling, Flavie Cernesson, Pierre Chevalier, Hyung Tae Choi, Roger Clapp, Jack Cosby, Gemma Coxon, Patrick Durant, James Fisher, Stewart Franks, Francesc Gallart, Chantal Gascuel-Odoux, Anna Gobin, Hannah Green, George Hornberger, Ion Iorgulescu, Dick Iredale, Christophe Joerin, Alena Kulusova, Jérôme Latron, Pilar Llorens, Yanli Liu, Jeff McDonnell, Hilary McMillan, Philippe Merot, Norm Miller, Stefan Myrabø, Colin Neal, Charles Obled, Bo Ostendorf, Trevor Page, Jake Peters, Pep Piñol, Olivier Planchon, N. Pradhan, Paul Quinn, Alice Robson, Renata Romanowicz, David
870 Sappington, Georges-Marie Saulnier, Jan Seibert, Murugesu Sivapalan, Nick Schofield, Paul Smith, Andy Tagg, Jacques Wendling, Eric Wood, and Philip Younger. We would also like to dedicate the paper to the memory of Peter Metcalfe, who was applying a version of Dynamic Topmodel in R to natural flood management applications with great enthusiasm and effectiveness at the time of his death in a climbing accident in 2018. The Q-NFM project and the contribution of KB to this paper was funded by NERC Grant NE/R004722/1 led by Nick Chappell. JF was partly funded by the Global Water Futures
875 Program of the University of Saskatchewan. Thanks are due to Francesc Gallart, Dave Milledge and Wouter Buytaert whose comments greatly helped to improve the paper.

References

880

Adriance, A., Pantoja, M. and Lupo, C.: September. Acceleration of Hydrology Simulations Using DHSVM for Multi-thousand Runs and Uncertainty Assessment. In *Latin American High Performance Computing Conference* (pp. 179-193). Springer, Cham., 2018

- 885 Ambroise, B., K.J. Beven and J. Freer: Towards a generalisation of the TOPMODEL concepts: topographic indices of hydrological similarity, *Water Resources Research*, 32(7), 2135-2145, 1996a.
- Ambroise, B., J. Freer and K.J. Beven: Application of a generalised TOPMODEL to the small Ringelbach catchment, Vosges, France, *Water Resources Research*, 32(7), 2147-2159, 1996b.
- 890 Aryal, S.K., O'Loughlin, E.M. and Mein, R.G.: A similarity approach to determine response times to steady-state saturation in landscapes. *Advances in Water Resources*, 28(2), 99-115, 2005.
- Band, L.E., Patterson, P., Nemani, R. and Running, S.W.: Forest ecosystem processes at the watershed scale: incorporating hillslope hydrology. *Agricultural and Forest Meteorology*, 63(1-2), 93-126, 1993.
- 895 Barling, R. D., I. D. Moore, and R. B. Grayson: A quasi-dynamic wetness index for characterizing the spatial distribution of zones of surface saturation and soil water contents, *Water Resour. Res.*, 30, 1029– 1044, doi:10.1029/93WR03346, 1994.
- 900 Bergstrom, A., K. Jencso, and B. McGlynn: Spatiotemporal processes that contribute to hydrologic exchange between hillslopes, valley bottoms, and streams, *Water Resour. Res.*, 52, 4628–4645, doi:10.1002/2015WR017972, 2016.
- Berne, A., Uijlenhoet, R., and Troch, P. A.: Similarity analysis of subsurface flow response of hillslopes with complex geometry, *Water Resour. Res.*, 41, 1–10, <https://doi.org/10.1029/2004WR003629>, 2005.
- 905 Best, M.J., Pryor, M., Clark, D.B., Rooney, G.G., Essery, R.L.H., Ménard, C.B., Edwards, J.M., Hendry, M.A., Porson, A., Gedney, N. and Mercado, L.M.: The Joint UK Land Environment Simulator (JULES), model description–Part 1: energy and water fluxes. *Geoscientific Model Development*, 4(1), 677-699, 2011.
- 910 Betson, R. P.: What is watershed runoff, *J. Geophys. Res.*, 69,1541-1551, 1964.
- Beven, K.J.: The hydrological response of headwater and sideslope areas. *Hydrological Sciences Bulletin*, 23(4), 419-437, 1978.
- 915 Beven, K.J.: On the generalised kinematic routing method'. *Water Resources Research*, 15(5), 1238-1242, 1979.
- Beven, K.J.: On Subsurface Stormflow: an analysis of response times, *Hydrological Sciences Journal*, 27(4), 505-521, 1982a.

- 920 Beven, K. J.: Introducing spatially variable conductivities into Topmodel, Unpublished Research Report, Department of Environmental Sciences, University of Virginia, Charlottesville, VA, 1982b.
- Beven, K.J.: Infiltration into a class of vertically non-uniform soils, *Hydrological Sciences Journal*, 29(4), 425-434, 1984.
- 925 Beven, K.J.: Hillslope runoff processes and flood frequency characteristics. In: A. D. Abrahams (Editor), Hillslope Processes. Allen and Unwin, Boston, Mass., 187-202, 1986a.
- Beven K.J.: Runoff production and flood frequency in catchments of order n: an alternative approach. In: V.K. Gupta, I. Rodriguez-Iturbe and E.F. Wood (Editors), Scale Problems in Hydrology. Reidel, Dordrecht. 117-131, 1986b.
- 930 Beven, K.J.: Towards the use of catchment geomorphology in flood frequency predictions. *Earth Surf. Process. Landf.* 12, 69-82., 1987.
- Beven, K.J.: Prophecy, reality and uncertainty in distributed hydrological modelling, *Adv. in Water Resourc.*, 16, 41-51, 1993.
- 935 Beven, K. J.: TOPMODEL: a critique, *Hydrol. Process.*, 11(9), 1069-1086, 1997.
- Beven, K. J.: Robert Horton and abrupt rises of groundwater, *Hydrological Processes*, 18, 3687-3696, 2004.
- Beven, K. J.: The Holy Grail of Scientific Hydrology: $Q_t = H(\underline{SR})A$ as closure, *Hydrology and Earth Systems Science*, 10, 609-618, 2006.
- 940 Beven, K. J. Working towards integrated environmental models of everywhere: uncertainty, data, and modelling as a learning process. *Hydrology and Earth System Science*, 11(1), 460-467, 2007.
- 945 Beven, K. J.: I believe in climate change but how precautionary do we need to be in planning for the future?, *Hydrological Processes*, 25, 1517–1520, DOI: 10.1002/hyp.7939, 2011.
- Beven, K. J.: *Rainfall-Runoff Modelling: The Primer*, 2nd edition, Wiley-Blackwell, Chichester, 2012
- 950 Beven, K. J.: Towards a methodology for testing models as hypotheses in the inexact sciences, *Proceedings Royal Society A*, 475 (2224), doi: 10.1098/rspa.2018.0862, 2019a.

- Beven, K. J. How to make advances in hydrological modelling, *Hydrology Research*, 50(6): 1481-1494 doi: 10.2166/nh.2019.134, 2019b
- 955 Beven, K. J.: A history of the concept of time of concentration, *Hydrology and Earth System Sciences*, 24, 2655–2670, doi:10.5194/hess-24-2655-2020, 2020.
- Beven, K. J. and Alcock, R.: Modelling everything everywhere: a new approach to decision making for water management under uncertainty, *Freshwater Biology*, 56, 124-132, doi:10.1111/j.1365-2427.2011.02592.x, 2012.
- 960 Beven, K. J., Asadullah, A., Bates, P. D., Blyth, E., Chappell, N.A., Child, S., Cloke, H., Dadson, S., Everard, N., Fowler, H. J., Freer, J., Hannah, D.M., Heppell, C., Holden, J., Lamb, R., Lewis, H., Morgan, G., Parry, L., Wagener, T.: Developing observational methods to drive future hydrological science: can we make a start as a community?, *Hydrological Processes*, doi: 10.1002/hyp.13622, 2019.
- 965 Beven, K.J. and A.M. Binley: The future of distributed models: model calibration and uncertainty prediction, *Hydrological Processes*, 6, 279-298, 1992.
- Beven, K. J., and Binley, A. M.: GLUE, 20 years on. *Hydrol. Process.* 28(24):5897-5918, doi: 10.1002/hyp.10082, 2014.
- 970 Beven, K J and Blazkova, S.: Estimating changes in flood frequency under climate change by continuous simulation (with uncertainty), in P. Balbanis, A. Bronstert, R. Casale and P. Samuels (Eds.) RIBAMOD, River Basin Modelling, Management and Flood Mitigation, EU Publication EUR 18287, 269-285, 1999.
- 975 Beven, K.J., Callen, J.L.: HYDRODAT: A system of FORTRAN computer programs for the preparation and analysis of hydrological data from charts. British Geomorphological Research Group, *Technical Bulletin 23*, 1979.
- Beven, K. J., and Chappell, N. A.: Perceptual perplexity and parameter parsimony, *WIREs Water*, submitted, 2020.
- 980 Beven, K J and Freer, J.: A Dynamic TOPMODEL, *Hydrol. Process.*,15(10), 1993-2011, 2001.
- Beven, K.J., and Germann, P.F.: Macropores and water flow in soils, *Water Resources Research*, 18(5), 1311-1325, 1982.

- 985 Beven, K. J. and Germann, P. F.: Macropores and water flow in soils revisited, *Water Resour. Res.*, 49(6), 3071-3092 DOI: 10.1002/wrcr.20156, 2013.
- Beven, K.J., Kirkby, M.J.: A physically-based variable contributing area model of basin hydrology. *Hydrological Sciences Bulletin*, 24(1), 43-69, 1979.
- 990 Beven, K.J., Kirkby, M.J., Schofield, N., Tagg, A.: Testing a physically-based flood forecasting model (TOPMODEL) for three UK catchments, *J. Hydrology*, 69, 119-143, 1984.
- Beven, K.J., R. Lamb, P. Quinn, R. Romanowicz and J. Freer: TOPMODEL, in V.P. Singh (Ed.) *Computer Models of Watershed Hydrology*, Water Resource Publications, Colorado, pp. 627-668, 1995.
- 995 Beven, K.J. and P.F. Quinn: Similarity and scale effects in the water balance of heterogeneous areas, in Keane, T. and Daly, E. (Eds.) *The balance of Water - present and future*, pp.69-86, AGMET, Dublin, 1994.
- Beven, K., and E. F. Wood: Catchment geomorphology and the dynamics of runoff contributing areas, *J. Hydrol.*, 65, 139-1000 158, 1983.
- Blair, G.S., Beven, K.J., Lamb, R., Bassett, R., Cauwenberghs, K., Hankin, B., Dean, G., Hunter, N., Edwards, E., Nundloll, V., Samreen, F., Simm, W., Towe, R.: Models of Everywhere Revisited: A Technological Perspective, *Environmental Modelling and Software*, <https://doi.org/10.1016/j.envsoft.2019.104521>, 2019
- 1005 Blazkova, S. and K.J. Beven: Flood Frequency Prediction for data limited catchments in the Czech Republic using a stochastic rainfall model and TOPMODEL, *J. Hydrol.*, 195, 256-278, 1997.
- Blazkova, S, Beven, K, Tacheci, P and Kulasova, A.: Testing the distributed water table predictions of TOPMODEL (allowing 1010 for uncertainty in model calibration): the death of TOPMODEL?, *Water Resources Research*, 38(11), W01257, 10.1029/2001WR000912, 2002.
- Blazkova, S and Beven, K J.: Flood Frequency Estimation by Continuous Simulation for a Catchment treated as Ungauged (with Uncertainty), *Water Resources Research* 38(8), 10.1029/2001WR000500, 2002.
- 1015 Blazkova, S and Beven, K J.: Flood frequency estimation by continuous simulation of subcatchment rainfalls and discharges with the aim of improving dam safety assessment in a large basin in the Czech Republic, *J. Hydrology*, 292, 153-172, 2004.

- Blazkova, S., and Beven, K. J.: A limits of acceptability approach to model evaluation and uncertainty estimation in flood
1020 frequency estimation by continuous simulation: Skalka catchment, Czech Republic, *Water Resour. Res.*, 45, W00B16,
doi:10.1029/2007WR006726, 2009a.
- Blazkova, S and Beven, K J.: Uncertainty in Flood Estimation, *Structure and Infrastructure Engineering*, 5(4), 325:332, doi:
10.1080/15732470701189514, 2009b.
- 1025 Borga, M., Dalla Fontana, G. and Cazorzi, F., Analysis of topographic and climatic control on rainfall-triggered shallow
landsliding using a quasi-dynamic wetness index. *J. Hydrology*, 268(1-4), 56-71, 2002.
- Buytaert, W. topmodel: Implementation of the Hydrological Model TOPMODEL in R, [https://CRAN.R-](https://CRAN.R-project.org/package=topmodel)
1030 [project.org/package=topmodel](https://CRAN.R-project.org/package=topmodel), Rpackage version 0.7.3, 2018.
- Calder, I. R., Harding, R. J. and Rosier, P.T.W.: An objective assessment of soil moisture deficit models, *J. Hydrology*, 185:
363-378, 1983.
- 1035 Calver, A. and Lamb, R.: Flood frequency estimation using continuous rainfall-runoff modelling. *Physics and Chemistry of
the Earth*, 20(5-6), 479-483, 1995.
- Cameron, D, Beven, K J, Tawn, J, Blazkova, S and Naden, P.: Flood frequency estimation by continuous simulation for a
gauged upland catchment (with uncertainty), *J. Hydrology*, 219, 169-187, 1999.
- 1040 Cameron, D, Beven, K J, Tawn, J, and Naden, P.: Flood frequency estimation by continuous simulation (with likelihood based
uncertainty estimation), *Hydrology and Earth System Science*, 4(1), 23-34, 2000a.
- Cameron, D., Beven, K. and Naden, P.: Flood frequency estimation under climate change (with uncertainty). *Hydrology and
1045 Earth System Sciences*, 4(3), 393-405, 2000b
- Cameron, D, Beven, K J, and Tawn, J.: An evaluation of three stochastic rainfall models, *J. Hydrology.*, 228, 130-149, 2000c.
- Chaney, N.W., Metcalfe, P. and Wood, E.F.: HydroBlocks: a field-scale resolving land surface model for application over
1050 continental extents. *Hydrological Processes*, 30(20), 3543-3559, 2016.

- Chirico, G.B., Grayson, R.B. and Western, A.W. On the computation of the quasi-dynamic wetness index with multiple-flow-direction algorithms. *Water Resources Research*, 39(5), 1115, doi:10.1029/2002WR001754, 2003.
- 1055 Choi, H T and Beven, K J.: Multi-period and Multi-criteria Model Conditioning to Reduce Prediction Uncertainty in Distributed Rainfall-Runoff Modelling within GLUE framework, *J. Hydrology*, 332 (3-4): 316-336, 2007.
- Ciarapica L. and Todini E. TOPKAPI: A model for the representation of the rainfall–runoff process at different scales. *Hydrological Processes*, 16:207–229, 2002.
- 1060 Clark, M. P., Slater, A. G., Rupp, D. E., Woods, R. A., Vrugt, J. A., Gupta, H. V., Wagener, T., and Hay, L. E.: Framework for Understanding Structural Errors (FUSE): A modular framework to diagnose differences between hydrological models, *Water Resour. Res.*, 44, W00B02, <https://doi.org/10.1029/2007WR006735>, 2008.
- Coxon, G., Freer, J., Wagener, T., Odoni, N.A. and Clark, M.: Diagnostic evaluation of multiple hypotheses of hydrological behaviour in a limits-of-acceptability framework for 24 UK catchments. *Hydrological Processes*, 28(25), 6135-6150, 2014.
- 1065 Coxon, G., Freer, J., Lane, R., Dunne, T., Knoben, W.J., Howden, N.J., Quinn, N., Wagener, T. and Woods, R.: DECIPHER v1: Dynamic fluxEs and ConnectIvity for Predictions of HydRology. *Geoscientific Model Development*, 12(6), 2019.
- Crave, A., and Gascuel-Oudou, C.: The Influence of topography on time and space distribution of soil surface water content, *Hydrol. Process.*, 11, 203–210, 1997.
- 1070 Crawford, N.H. and Burges, S.J.: History of the Stanford watershed model. *Water Resour. Impact*, 6(2), 1-3, 2004.
- Davies, J and Beven, K J.: Hysteresis and scale in catchment storage, flow, and transport, *Hydrol. Process.* 29(16): 3604-3615, DOI: 10.1002/hyp.10511, 2015.
- 1075 Duan, J. and Miller, N.L.: A generalized power function for the subsurface transmissivity profile in TOPMODEL. *Water Resources Research*, 33(11), pp.2559-2562, 1997.
- 1080 Ducharme, A.: Reducing scale dependence in TOPMODEL using a dimensionless topographic index, *Hydrol. Earth Syst. Sci.*, 13, 2399–2412, <https://doi.org/10.5194/hess-13-2399-2009>, 2009.

- Dunne, T. and Black, R.D.: Partial area contributions to storm runoff in a small New England watershed. *Water Resour. Res.*, 6, 1296-1311, 1970.
- 1085
- Eagleson, P.S.: Dynamics of flood frequency. *Water Resour. Res.*, 8: 878-898, 1972.
- Essery, R.L.H., Best, M.J., Betts, R.A., Cox, P.M. and Taylor, C.M.: Explicit representation of subgrid heterogeneity in a GCM land surface scheme. *Journal of Hydrometeorology*, 4(3), 530-543, 2003.
- 1090 Famiglietti, J., and E. F. Wood: Multiscale modeling of spatially variable water and energy balance process. *Water Resour. Res.*, 30, 3061–3078, <https://doi.org/10.1029/94WR01498>, 1994.
- Fenicia, F., Kavetski, D., and Savenije, H. H. G.: Elements of a flexible approach for conceptual hydrological modeling: 1. Motivation and theoretical development, *Water Resour. Res.*, 47, W11510, 2011.
- Fisher, J.I. and K.J. Beven: Modelling of streamflow at Slapton Wood using TOPMODEL within an uncertainty estimation
1095 framework, *Field Studies Journal*, 8, 577-584, 1996.
- Franchini, M., J. Wendling, C. Obled, and E. Todini: Physical interpretation and sensitivity analysis of the TOPMODEL, *Journal of Hydrology*, 175(1-4), 293-338, 1996.
- 1100 Franks, S., K.J. Beven, P.F. Quinn and I. Weight: On the sensitivity of soil-vegetation-atmosphere transfer (SVAT) schemes: equifinality and the problem of robust calibration, *Agric. Forest Meteorol.*, 86, 63-75, 1997.
- Franks, S W, Gineste, Ph, Beven, K J and Merot, Ph.: On constraining the predictions of a distributed model: the incorporation of fuzzy estimates of saturated areas into the calibration process, *Water Resources Research*, 34, 787-797, 1998
1105
- Freer, J., Beven, K. and Ambrose, B.: Bayesian estimation of uncertainty in runoff prediction and the value of data: An application of the GLUE approach. *Water Resources Research*, 32(7): 2161-2173, 1996.
- Freer, J, McDonnell, J, Beven, K J, Brammer, D, Burns, D, Hooper, R P and Kendal, C. Topographic controls on subsurface
1110 stormflow at the hillslope scale for two hydrologically distinct small catchments, *Hydrol. Process.*, 11(9), 1347-1352, 1997.
- Freer, J., J. McDonnell, K. J. Beven, N. E. Peters, D. Burns, R. P. Hooper, B. Aulenbach, and C. Kendal: The role of bedrock topography on subsurface stormflow. *Water Resources Research*, 38(12), W01269, 10.1029/2001WR000872, 2002.

- 1115 Freer, J. E., K. J. Beven, and N. E. Peters: Multivariate seasonal period model rejection within the generalised likelihood uncertainty estimation procedure. in *Calibration of Watershed Models*, edited by Q. Duan, H. Gupta, S. Sorooshian, A. N. Rousseau, and R. Turcotte, AGU Books, Washington, 69-87, 2003.
- Freer, J, McMillan, H, McDonnell, J J and Beven, K J.: Constraining Dynamic TOPMODEL responses for imprecise water
120 table information using fuzzy rule based performance measures, *J. Hydrology.*, 291, 254-277, 2004.
- Freeman, T.G.: Calculating catchment area with divergent flow based on a regular grid. *Computers & Geosciences*, 17(3), 413-422, 1991.
- 125 Freeze, R.A. and Harlan, R.L.: Blueprint for a physically-based, digitally-simulated hydrologic response model. *Journal of Hydrology*, 9(3), 237-258, 1969.
- Fu, X., Luo, L., Pan, M., Yu, Z., Tang, Y. and Ding, Y.: Evaluation of TOPMODEL-based land surface-atmosphere transfer scheme (TOPLATS) through a soil moisture simulation. *Earth Interactions*, 22(15), 1-19, 2018.
- 130 Gallart, F. J. Latron, P. Llorens, K.J. Beven: Using internal catchment information to reduce the uncertainty of discharge and baseflow predictions, *Adv. Water Resour.*, 30, 808-823, 2007
- Gallart, F., Latron, J., Llorens, P. and Beven, K.J.: Upscaling discrete internal observations for obtaining catchment-averaged
135 TOPMODEL parameters in a small Mediterranean mountain basin. *Physics and Chemistry of the Earth, Parts A/B/C*, 33(17-18), 1090-1094, 2008.
- Gao, J., Holden, J. and Kirkby, M.: A distributed TOPMODEL for modelling impacts of landcover change on river flow in upland peatland catchments, *Hydrol. Process.* 29, 2867–2879, DOI: 10.1002/hyp.10408, 2015.
- 140 Gao, J., J. Holden, and M. Kirkby: The impact of land-cover change on flood peaks in peatland basins, *Water Resour. Res.*, 52, 3477–3492, doi:10.1002/2015WR017667, 2016.
- Gao, J., Holden, J. and Kirkby, M.: Modelling impacts of agricultural practice on flood peaks in upland catchments: An
145 application of the distributed, TOPMODEL, *Hydrol. Process.* 31, 4206–4216, 2017.

- Gharari, S., Hrachowitz, M., Fenicia, F., and Savenije, H. H. G.: Hydrological landscape classification: investigating the performance of HAND based landscape classifications in a central European meso-scale catchment. *Hydrol. Earth Syst. Sci.*, 15, 3275–3291, <https://doi.org/10.5194/hess-15-3275-2011>, 2011.
- 1150 Graham, C.B., Woods, R.A. and McDonnell, J.J.: Hillslope threshold response to rainfall. (1) A field based forensic approach. *Journal of Hydrology*, 393(1-2), 65-76, 2010.
- Güntner, A., Uhlenbrook, S., Seibert, J., and Leibundgut, C.: Multi-criterial validation of TOPMODEL in a mountainous
1155 catchment, *Hydrological Processes*, 13, 1603-1620, 1999.
- Habets, F. and Saulnier, G.M.: Subgrid runoff parameterization. *Physics and Chemistry of the Earth, Part B: Hydrology, Oceans and Atmosphere*, 26(5-6), 455-459, 2001.
- 1160 Hjerdt, K. N., McDonnell, J. J., Seibert, J., and Rodhe, A.: A new topographic index to quantify downslope controls on local drainage, *Water Resour. Res.*, 40, 1–6, <https://doi.org/10.1029/2004WR003130>, 2004.
- Hollaway, M.J., Beven, K.J., Benskin, C.McW.H., Collins, A.L., Evans, R., Falloon, P.D., Forber, K.J., Hiscock, K.M., Kahana, R., Macleod, C.J.A., Ockenden, M.C., Villamizar, M.L., Wearing, C., Withers, P.J.A., Zhou, J.G., Haygarth, P.M.:
1165 Evaluating a processed based water quality model on a UK headwater catchment: what can we learn from a ‘limits of acceptability’ uncertainty framework?, *J. Hydrology*. 558, 607-624. doi: 10.1016/j.jhydrol.2018.01.063, 2018.
- Hopp, L. and McDonnell, J.J.: Connectivity at the hillslope scale: Identifying interactions between storm size, bedrock permeability, slope angle and soil depth. *Journal of Hydrology*, 376(3-4), 378-391, 2009.
- 1170 Hornberger, G. M. and Spear, R. C.: An approach to the preliminary analysis of environmental systems, *J. Environmental Management*, 12, 7-18., 1981.
- Horton RE.: Maximum groundwater levels. *Transactions, American Geophysical Union* 17(2): 344–357, 1936b.
- 1175 Huang, J.C., Lee, T.Y. and Kao, S.J.: Simulating typhoon-induced storm hydrographs in subtropical mountainous watershed: an integrated 3-layer TOPMODEL. *Hydrology & Earth System Sciences*, 13(1), 27-40, 2009.
- Ibbitt, R. P. and O’Donnell, T.: Fitting methods for conceptual catchment models, *J. Hydraul. Div. ASCE.*, 97: 1331-1342,
1180 1971.

- Ibbitt, R. P. and O'Donnell, T.: Designing conceptual catchment models for automatic fitting methods, *IAHS Publication No. 101*, 461-475, IAHS, Wallingford, UK, 1974.
- 185 Ibbitt, R. P. and Woods, R.: Re-scaling the topographic index to improve the representation of physical processes in catchment models. *Journal of Hydrology*, 293(1-4), 205-218, 2004.
- Jencso, K. G., and B. L. McGlynn: Hierarchical controls on runoff generation: Topographically driven hydrologic connectivity, geology, and vegetation, *Water Resour. Res.*, 47, W11527, doi:10.1029/2011WR010666, 2011.
- 190 Iorgulescu, I. and Musy, A.: Generalization of TOPMODEL for a power law transmissivity profile. *Hydrological processes*, 11(9), 1353-1355, 1997.
- Johnston, P.R. and Pilgrim, D.H.: Parameter optimization for watershed models. *Water Resources Research*, 12(3): 477-486,
195 1976.
- Kirchner, J.W.: Getting the right answers for the right reasons: Linking measurements, analyses, and models to advance the science of hydrology. *Water Resources Research*, 42(3), W03S04, 2006.
- 200 Kirkby, M.: Hydrograph modelling strategies, in *Processes in Human and Physical Geography*, edited by R. Peel, M. Chisholm, and P. Haggett: 69– 90, Heinemann, London, 1975.
- Kirkby, M: Implications for sediment transport in M. J. Kirkby (Ed.) *Hillslope Hydrology*, John Wiley and Sons: Chichester, 325-363, 1978.
- 205 Kirkby, M.J.: A runoff simulation model based on hillslope topography. in *Scale problems in Hydrology: runoff generation and response*, ed V.K. Gupta et al, Reidel, Dordrecht, 39-56, 1986.
- Kirkby, M. J.: Topmodel: a personal view, *Hydrological Processes*, 11(9): 1087-1098, 1997
- 210 Klemeš, V.: Dilettantism in hydrology: Transition or destiny?. *Water Resources Research*, 22(9S), 177S-188S, 1986.

- Knoben, W. J. M., J. E. Freer, K. J. A. Fowler, M. C. Peel, and R. A. Woods: Modular Assessment of Rainfall-Runoff Models Toolbox (MARRMoT) v1.2: an open-source, extendable framework providing implementations of 46 conceptual hydrologic models as continuous state-space formulations, *Geoscientific Model Development*, 12(6), 2463-2480, 2019.
- 1215
- Lamb, R., Calibration of a conceptual rainfall-runoff model for flood frequency estimation by continuous simulation. *Water Resources Research*, 35(10), 3103-3114, 1999.
- 1220
- Lamb, R., and Beven, K. J.: Using interactive recession curve analysis to specify a general catchment storage model, *Hydrology and Earth System Sciences*, 1, 101-113, 1997.
- Lamb, R, Beven, K J and Myrabø, S.: Discharge and water table predictions using a generalised TOPMODEL formulation, *Hydrol. Process.*, 11(9), 1145-1168, 1997.
- 1225
- Lamb, R., K.J. Beven and S. Myrabø, S.: Use of spatially distributed water table observations to constrain uncertainty in a rainfall-runoff model., *Advances in Water Resources*, 22(4), 305-317, 1998.
- Lan, T., Lin, K. R., Liu, Z. Y., He, Y. H., Xu, C. Y., Zhang, H. B., & Chen, X. H.: A clustering preprocessing framework for the subannual calibration of a hydrological model considering climate-land surface variations. *Water Resources Research*, 54, 10,034–10,052. <https://doi.org/10.1029/2018WR023160>, 2018.
- 1230
- Lane, S.N., Brookes, C.J., Kirkby, M.J. and Holden, J., A network-index-based version of TOPMODEL for use with high-resolution digital topographic data. *Hydrological processes*, 18(1), 191-201, 2004.
- 1235
- Lane, S.N. and Milledge, D.G., Impacts of upland open drains upon runoff generation: a numerical assessment of catchment-scale impacts. *Hydrological Processes*, 27(12), pp.1701-1726, 2013.
- Lane, S.N., Reaney, S.M. and Heathwaite, A.L.: Representation of landscape hydrological connectivity using a topographically driven surface flow index. *Water Resources Research*, 45(8), W08423, 2009.
- 1240
- Larsen, J.E., Sivapalan, M., Coles, N.A. and Linnet, P.E.: Similarity analysis of runoff generation processes in real-world catchments. *Water Resources Research*, 30(6), 1641-1652, 1994.

- 1245 Liu, Y, Freer, JE, Beven, KJ and Matgen, P.: Towards a limits of acceptability approach to the calibration of hydrological models: extending observation error, *J. Hydrol.*, 367:93-103, doi:10.1016/j.jhydrol.2009.01.016, 2009.
- Liu, Z. and Todini, E.: Assessing the TOPKAPI non-linear reservoir cascade approximation by means of a characteristic lines solution. *Hydrological Processes: An International Journal*, 19(10), 1983-2006, 2005.
- 1250 Liu Z., Martina M. L. V. and Todini E.: Flood forecasting using a fully distributed model: Application of the TOPKAPI model to the Upper Xixian catchment. *Hydrology and Earth System Sciences*, 9:347–364, 2005.
- Loritz, R., Gupta, H., Jackisch, C., Westhoff, M., Kleidon, A., Ehret, U., and Zehe, E.: On the dynamic nature of hydrological similarity, *Hydrol. Earth Syst. Sci.*, 22, 3663–3684, <https://doi.org/10.5194/hess-22-3663-2018>, 2018.
- 1255 Marthews, T.R., Dadson, S.J., Lehner, B., Abele, S. and Gedney, N.: High-resolution global topographic index values for use in large-scale hydrological modelling. *Hydrology & Earth System Sciences*, 19(1), 19, 91–104., 2015.
- 1260 McDonnell, J. J. and Beven, K. J.: Debates—The future of hydrological sciences: A (common) path forward? A call to action aimed at understanding velocities, celerities, and residence time distributions of the headwater hydrograph, *Water Resour. Res.*, 50, 5342-5350, doi:10.1002/2013WR015141, 2014.
- 1265 Metcalfe, P., K.J. Beven, and J. Freer: Dynamic Topmodel: a new implementation in R and its sensitivity to time and space steps, *Environmental Modelling and Software*, 72: 155-172, 2015.
- Metcalfe, P, Beven, K J, Hankin, B and Lamb, R.: A modelling framework for evaluation of the hydrological impacts of nature-based approaches to flood risk management, with application to in-channel interventions across a 29-km² scale catchment in the United Kingdom, *Hydrological Processes*, 31 (9): 1734-1748, DOI: 10.1002/hyp.11140, 2017.
- 1270 Milledge, D.G., Lane, S.N., Heathwaite, A.L. and Reaney, S.M.: A Monte Carlo approach to the inverse problem of diffuse pollution risk in agricultural catchments. *Science of the Total Environment*, 433, 434-449, 2012.
- 1275 Montgomery, D.R. and Dietrich, W.E. A physically based model for the topographic control on shallow landsliding. *Water Resources Research*, 30(4), 1153-1171, 1994.
- Montgomery, D.R. and Dietrich, W.E., Runoff generation in a steep, soil-mantled landscape. *Water Resources Research*, 38(9), 7-17, 2002.

- 1280 Moore, I.D., E. M. O'Loughlin, G. J. Burch: A contour-based topographic model for hydrological and ecological applications. *Earth Surface Processes and Landforms* 13:4, 305-320, 1988.
- Moore, R. D., and J. C. Thompson: Are water table variations in a shallow forest soil consistent with the TOPMODEL concept?, *Water Resources Research*, 32(3), 663-669, 1996.
- 1285
- Morris, D.G. and Heerdegen, R.G.: Automatically derived catchment boundaries and channel networks and their hydrological applications. *Geomorphology*, 1(2): 131-141, 1988.
- O'Loughlin E. M. Saturation regions in catchments and their relation to soil and topographic properties. *Journal of Hydrology*,
1290 53, 229–246, 1981.
- O'Loughlin, E. M. Prediction of surface saturation zones in natural catchments by topographic analysis. *Water Resources Research*, 22, 794–804, 1986.
- 1295 Page T., Beven K. J. and Freer J. Modelling the chloride signal at the Plynlimon catchments, Wales using a modified dynamic TOPMODEL. *Hydrological Processes*, 21, 292–307, 2007.
- Pan, F., Peters-Lidard, C.D., Sale, M.J. and King, A.W.: A comparison of geographical information systems–based algorithms for computing the TOPMODEL topographic index. *Water Resources Research*, 40(6), W06303, 2004.
- 1300
- Pappenberger, F., Frodsham, K., Beven, K J, Romanovicz, R. and Matgen, P.: Fuzzy set approach to calibrating distributed flood inundation models using remote sensing observations. *Hydrology and Earth System Sciences*, 11(2),739-752, 2007.
- Pauwels, V. R. N., and E. F. Wood: A soil-vegetation-atmosphere transfer scheme for the modeling of water and energy
1305 balance process in high latitudes: 2. Application and validation. *J. Geophys. Res.*, 104, 27823–27839,
<https://doi.org/10.1029/1999JD900004>, 1999.
- Peters N. E., Freer J. E. and Beven K. J.: Modelling hydrologic responses in a small forested catchment (Panola Mountain, Georgia, USA): A comparison of the original and a new dynamic TOPMODEL. *Hydrological Processes*, 17(2), 345–362,
1310 2003.

- Peters-Lidard, C. D., M. S. Zion, and E. F. Wood: A soil-vegetation-atmosphere transfer scheme for modeling spatially variable water and energy balance process. *J. Geophys. Res.*, 102, 4303–4324, <https://doi.org/10.1029/96JD02948>, 1997.
- Piñol, J, Beven, K J and Freer, J.: Modelling the hydrological response of mediterranean catchments, Prades, Catalonia - the use of distributed models as aids to hypothesis formulation, *Hydrol. Process.*, 11(9), 1287-1306, 1997.
- 1315
- Porter, K.D., Reaney, S.M., Quilliam, R.S., Burgess, C. and Oliver, D.M.: Predicting diffuse microbial pollution risk across catchments: The performance of SCIMAP and recommendations for future development. *Science of the Total Environment*, 609, 456-465, 2017.
- 1320
- Pradhan, N.R., Tachikawa, Y. and Takara, K.: A downscaling method of topographic index distribution for matching the scales of model application and parameter identification. *Hydrological Processes: An International Journal*, 20(6), 1385-1405, 2006.
- Pradhan, N.R., Ogden, F.L., Tachikawa, Y. and Takara, K.: Scaling of slope, upslope area, and soil water deficit: Implications for transferability and regionalization in topographic index modeling. *Water Resources Research*, 44(12), W12421, 2008.
- 1325
- Quinn, P.F., K.J. Beven, P. Chevallier and O. Planchon: The Prediction of Hillslope Flow paths for distributed hydrological modelling using digital terrain models, *Hydrological Processes*, 5, 59-79, 1991.
- Quinn, P., K.J. Beven and R. Lamb: The $\ln(a/\tan\beta)$ index: how to calculate it and how to use it within the TOPMODEL
- 1330 framework, *Hydrol.Process*, 9, 161-182, 1995a.
- Quinn, P., K.J. Beven and A. Culf: The introduction of macroscale hydrological complexity into land surface-atmosphere transfer models and the effect of planetary boundary layer development, *J. Hydrology*, 166, 421-444, 1995b.
- 1335
- Quinn, P. F., Ostendorf, B., Beven, K. J. and Tenhunen, J., Spatial and temporal predictions of soil moisture patterns and evaporative losses using TOPMODEL and the GAS-Flux model for an Alaskan catchment, *Hydrol. Earth System Sci.*, 2, 51-64, 1998.
- 1340
- Reggiani, P. and Rientjes, T.H.M.: Flux parameterization in the representative elementary watershed approach: Application to a natural basin. *Water Resources Research*, 41(4). W04013, 2005.

- Rennó, C. D., Nobre, A. D., Cuartas, L. A., Soares, J. V., Hodnett, M. G., Tomasella, J., and Waterloo, M. J.: HAND, a new terrain descriptor using SRTM-DEM: Mapping terra-firme rainforest environments in Amazonia, *Remote Sens. Environ.*, 112, 3469–3481, <https://doi.org/10.1016/j.rse.2008.03.018>, 2008.
- 1345 Robson, A., K.J. Beven and C. Neal: Towards identifying sources of subsurface flow: a comparison of components identified by a physically-based runoff model and those determined by chemical mixing techniques, *Hydrological Processes*, 6, 199-214, 1992.
- 1350 Romanowicz, R., K.J. Beven and J. Tawn, Evaluation of predictive uncertainty in non-linear hydrological models using a Bayesian approach, in V. Barnett and K.F. Turkman (Eds.) *Statistics for the Environment II . Water Related Issues*, Wiley, 297-317, 1994.
- 1355 Saulnier, G.M., Obled, C. and Beven, K.: Analytical compensation between dtm grid resolution and effective values of saturated hydraulic conductivity within the Topmodel framework. *Hydrological Processes*, 11(9), 1331-1346, 1997a.
- Saulnier, G.M., Beven, K. and Obled, C.: Digital elevation analysis for distributed hydrological modeling: Reducing scale dependence in effective hydraulic conductivity values. *Water Resources Research*, 33(9), 2097-2101, 1997b.
- 1360 Saulnier, G-M, Beven, K J and Obled, Ch.: Including spatially variable soil depths in TOPMODEL, *J. Hydrology*, 202, 158-172, 1997.
- Saulnier, G.M. and Datin, R.: Analytical solution to a bias in the TOPMODEL framework balance. *Hydrological Processes*, 18(7), 1195-1218, 2004.
- 1365 Scanlon, T.M., Raffensperger, J.P., Hornberger, G.M. and Clapp, R.B.: Shallow subsurface storm flow in a forested headwater catchment: Observations and modeling using a modified TOPMODEL. *Water Resources Research*, 36(9), 2575-2586, 2000.
- 1370 Seibert, J., Bishop, K., and Nyberg, L.: Testing TOPMODEL's ability to predict spatially distributed groundwater levels, *Hydrol. Process.*, 11, 1131-1144, 1997.
- Seibert, J., K. Bishop, A. Rodhe, and J. J. McDonnell: Groundwater dynamics along a hillslope: A test of the steady state hypothesis, *Water Resour. Res.*, 39(1), 1014, doi:10.1029/2002WR001404, 2003.
- 1375 Shreve, R. L.: Infinite topologically random channel networks, *J. Geology*, 75, 178-186, 1967

- Sivapalan, M., Beven, K.J. & Wood, E.F.: On Hydrologic Similarity 2: A scaled model of storm runoff production. *Water Resources Res.* , 23 (12): 2266-2278, 1987
- 1380 Sivapalan, M., Wood, E.F., Beven, K.J.: On Hydrologic Similarity, 3. A dimensionless flood frequency distribution, *Water Resources Research*, 26, 43-58, 1990.
- Sorensen, R., and J. Seibert (2007), Effects of DEM resolution on the calculation of topographical indices: TWI and its components, *Journal of Hydrology*, 347(1-2), 79-89.
- 1385 Tague, C.L. and Band, L.E.: RHESSys: Regional Hydro-Ecologic Simulation System—An object-oriented approach to spatially distributed modeling of carbon, water, and nutrient cycling. *Earth Interactions*, 8(19), 1-42, 2004.
- Tarboton, D.G.: A new method for the determination of flow directions and upslope areas in grid digital elevation
1390 models. *Water Resources Research*, 33(2): 309-319, 1997.
- Tetzlaff D, Birkel C, Dick J, Geris J, Soulsby C.: Storage dynamics in hydrogeological units control hillslope connectivity, runoff generation and the evolution of catchment transit time distributions. *Water Resources Research*. 50(2), 969-985. doi: 10.1002/2013WR014147, 2014.
- 1395 Thomas Jr, W.O.: An evaluation of flood frequency estimates based on rainfall/runoff modelling. *JAWRA Journal of the American Water Resources Association*, 18(2), 221-229, 1982.
- Todini E.: New trends in modelling soil processes from hillslope to GCM scales. In *The Role of Water and the Hydrological Cycle in Global Change*, Oliver HR, Oliver SA (eds). *Global Environmental Change*, NATO ASI Series, Series I; vol. 31. Springer-Verlag, 317 – 347, 1995.
- 1400 Vincendon B., Ducrocq V., Bouilloudd L., Saulnier G.-M., Chancibaulte K., Habets F. and Noilhan J. Benefit of coupling the ISBA land surface model with a TOPMODEL hydrological model version dedicated to Mediterranean flash floods. *Journal of Hydrology*, 394, 256–266, 2010.
- 1405 Walter, M.T., Steenhuis, T.S., Mehta, V.K., Thongs, D., Zion, M. and Schneiderman, E.: Refined conceptualization of TOPMODEL for shallow subsurface flows. *Hydrological Processes*, 16(10), 2041-2046, 2002.

- Weyman, D. R.: Throughflow on hillslopes and its relation to the stream hydrograph, *Hydrological Sciences Bulletin*, 15: 25-33, 1970.
- 1410
- Weyman, D.R.: Measurements of the downslope flow of water in a soil. *Journal of Hydrology*, 20(3), 267-288, 1973.
- Western, A. W., R. B. Grayson, G. Blöschl, G. R. Willgoose, and T. A. McMahon: Observed spatial organisation of soil moisture and its relation to terrain indices, *Water Resour. Res.*, 35, 797–810, doi:10.1029/1998WR900065, 1999.
- 1415 Wigmosta, M.S., L. W. Vail, and D. P. Lettenmaier. A distributed hydrology-vegetation model for complex terrain. *Water Resour. Res.*, 30(6), 1665–1679, 1994.
- Wolock, D.M. and McCabe Jr, G.J.: Comparison of single and multiple flow direction algorithms for computing topographic parameters in TOPMODEL. *Water Resources Research*, 31(5), 1315-1324, 1995.
- 1420 Wood, E.F., Sivapalan, M., Beven, K.J. and Band, L.: Effects of spatial variability and scale with implications to hydrologic modelling. *J. Hydrology*, 102, 29-47, 1988.
- Woods, R.A., Sivapalan, M. and Robinson, J.S.: Modeling the spatial variability of subsurface runoff using a topographic index. *Water Resources Research*, 33(5), 1061-1073, 1997.
- 1425
- Zulkafli, Z., Buytaert, W., Onof, C., Lavado-Casimiro, W. and Guyot, J.L.: A critical assessment of the JULES land surface model hydrology for humid tropical environments, *Hydrology and Earth System Sciences*, 17(3), 1113-1132, 2013.

1430