

Unshielded Precipitation Gauge Collection Efficiency with Wind Speed and Hydrometeor Fall Velocity

Jeffery Hoover¹, Michael E. Earle¹, Paul I Joe¹, Pierre E. Sullivan²

¹Environment and Climate Change Canada, Toronto, ON, M3H 5T4, Canada

²Department of Mechanical and Industrial Engineering, University of Toronto, Toronto, ON, M5S 3G8, Canada

Correspondence to: Jeffery Hoover (jeffery.hoover@canada.ca)

Abstract. Collection efficiency transfer functions that compensate for wind-induced collection loss are presented and evaluated for unshielded precipitation gauges. Three novel transfer functions with wind speed and precipitation fall velocity dependence are developed, including a function from computational fluid dynamics modelling (CFD), an experimental fall

10 velocity threshold function (HE1), and an experimental linear fall velocity dependence function (HE2). These functions are evaluated alongside universal ($K_{\text{Universal}}$) and climate-specific (K_{CARE}) transfer functions with wind speed and temperature dependence. Transfer function performance is assessed using 30-minute precipitation event accumulations reported by unshielded and shielded Geonor T-200B3 precipitation gauges over two winter seasons. The latter gauge was installed in a Double Fence Automated Reference (DFAR) configuration. Estimates of fall velocity were provided by a Precipitation
15 Occurrence Sensor System (POSS). The CFD function reduced the RMSE (0.08 mm) relative to $K_{\text{Universal}}$ (0.20 mm), K_{CARE} (0.13 mm), and the unadjusted measurements (0.24 mm), with a bias error of 0.011 mm. The HE1 function provided a RMSE of 0.09 mm and bias error of 0.006 mm, capturing well the collection efficiency trends for rain and snow. The HE2 function better captured the overall collection efficiency, including mixed precipitation, resulting in a RMSE of 0.07 mm and bias error of 0.006 mm. These functions are assessed across solid and liquid hydrometeor types and for temperatures between -22 °C
20 and 19 °C. The results demonstrate that transfer functions incorporating hydrometeor fall velocity can dramatically reduce the uncertainty of adjusted precipitation measurements relative to functions based on temperature.

1 Introduction

25 Automated catchment-type precipitation gauge measurements are critical as references for, and input to, weather, climate, hydrology, transportation, and remote sensing applications. The systematic bias and uncertainty of gauge measurements due to wind-induced undercatch is a major challenge, particularly with respect to the measurement of mixed and solid precipitation (Rasmussen et al., 2012; Kochendorfer et al., 2018). For example, an unshielded weighing precipitation gauge can capture less than 50% of the actual amount of solid precipitation falling in air when the wind speed exceeds 5 m s^{-1} (Kochendorfer et al., 30 2017b). This measurement challenge has prompted: (1) modelling studies to better understand and visualize the undercatch of hydrometeors by precipitation gauges; and (2) the development of transfer functions to adjust measurements for undercatch effects. Previous work in each of these domains is outlined in Sections 1.1 and 1.2, respectively. The objectives of the present study, which implements numerical modelling and experimental analysis to develop transfer functions with wind speed and hydrometeor fall velocity dependence, are presented in Section 1.3.

35 1.1 Modelling studies

Computational fluid dynamics (CFD) studies have been used to simulate the airflow around precipitation gauges and the associated collection efficiencies for rain and solid precipitation (Nešpor and Sevruk, 1999; Constantinescu et al., 2007; Colli, 40 2014; Colli et al., 2014; Colli et al., 2015; Colli et al., 2016a; Colli et al., 2016b; Thériault et al., 2012; Thériault et al., 2015; Baghapour and Sullivan, 2017; Baghapour et al., 2017). These studies have demonstrated the influence of wind speed, turbulence, hydrometeor characteristics (size, density, drag, terminal velocity), and gauge and shield geometry on precipitation gauge undercatch. For rainfall, Nešpor and Sevruk (1999) showed increases in wind-induced error for smaller drop sizes with lower terminal velocities, with errors increasing for higher wind speeds. The conversion factor (inverse of integral collection efficiency) varied with the precipitation intensity and rainfall type, which influenced the distribution of hydrometeor sizes and terminal velocities. Thériault et al. (2012) demonstrated similar trends for snowfall, with collection efficiencies varying 45 significantly with the type of solid precipitation and size distribution. Simulated collection efficiencies for wet snow and dry snow hydrometeors captured the general upper and lower bounds of experimental observations, respectively, with the lower collection efficiency for dry snow hydrometeors attributed to their lower terminal velocity and interaction with the local airflow around the gauge.

For a Geonor gauge with single-Alter shield, Thériault et al. (2012) used a constant drag coefficient hydrometeor tracking 50 model to develop a series of transfer functions based on wind speed for different hydrometeor types. Colli et al. (2015) extended this work to show the influence of different hydrometeor drag models on collection efficiency results. Empirical drag model results (Khvorostyanov and Curry, 2005), based on the relative hydrometeor-to-air velocity over the hydrometeor trajectory, were shown to yield higher collection efficiencies compared with constant drag coefficient results that can overestimate drag values. Colli et al. (2015) developed transfer functions based on wind speed for unshielded and single-Alter-shielded gauges 55 for three specific hydrometeor size distributions. Further studies, using computationally intensive Large Eddy Simulation

models, better resolved the intensity and spatial extent of turbulence around the gauge orifice, which can lead to temporal variations in collection efficiency results (Colli et al., 2016a;Colli et al., 2016b;Baghapor and Sullivan, 2017;Baghapor et al., 2017). The degree of turbulence was found to vary depending on the specific shield configuration and wind speed (Baghapor et al., 2017).

60 1.2 Transfer functions

Intercomparisons of precipitation gauges have served as the primary mechanism for developing transfer functions. In the 1998 World Meteorological Organization (WMO) Solid Precipitation Measurement Intercomparison, transfer functions were determined experimentally by comparing measurements from different gauges (primarily manual) with those from a manual collector with a Tretyakov shield in the WMO Double Fence Intercomparison Reference (DFIR) configuration (Goodison et al., 1998). Precipitation events were monitored by observers, who reported the amount and type of snow, wind speed, and temperature statistics for each event. Events were defined based on the duration of continuous snowfall when the reference DFIR precipitation accumulation was greater than or equal to 3 mm. Adjustment functions for unshielded gauge collection efficiencies were recommended for snow, mixed precipitation, and rain, based on the wind speed at gauge height (Goodison, 1978;Goodison et al., 1998;Yang et al., 1998). While these adjustments could be applied to manual precipitation accumulation measurements, their application to automated measurements at shorter time scales, and where the precipitation type may not be well defined, presents a significant challenge (Colli, 2014;Colli et al., 2014;Colli et al., 2016a;Colli et al., 2016b;Thériault et al., 2015;Thériault et al., 2012)

The WMO commissioned another intercomparison, the Solid Precipitation Intercomparison Experiment (SPICE), to assess various automated technologies for the measurement of precipitation accumulation and snow depth, and to recommend automated field reference systems (Nitu et al., 2018). An automated precipitation gauge configured with a single-Alter shield within a DFIR fence was chosen as the field reference configuration for precipitation accumulation; this was referred to as the Double Fence Automated Reference (DFAR) configuration. Transfer functions for unshielded and shielded gauges were derived as an exponential function of wind speed following the approach of Goodison (1978) and using 30-minute precipitation events from the SPICE data set (Kochendorfer et al., 2017a). Separate functions were developed for solid precipitation and mixed precipitation, as defined by air temperature ranges: less than -2 °C for solid precipitation, and between -2 °C and 2 °C for mixed precipitation.

Using Bayesian analysis of Norwegian measurement data, Wolff et al. (2015) developed a precipitation phase-independent, continuous transfer function with respect to wind speed and air temperature for a single-Alter shielded Geonor precipitation gauge. A similar, but less complex, function was developed by Kochendorfer et al. (2017a;2018) using the SPICE data set, including results from eight measurement sites in Canada, Norway, Finland, Spain, Switzerland, and the USA. The application of this “universal” function to precipitation accumulation measurements from unshielded weighing gauges in SPICE was shown to reduce the overall bias relative to the DFAR; however, reductions in the root mean square error (RMSE) were less significant (Kochendorfer et al., 2017a;2017b;2018;Wolff et al., 2015).

When applying universal adjustments with wind speed and air temperature dependence, the errors can vary significantly by site, presumably driven by differences in climatology (Smith et al., 2020; Kochendorfer et al., 2017a). This has motivated further work on climate-specific transfer functions (Koltzow et al., 2020; Smith et al., 2020). Other studies have proposed the use of precipitation intensity for the improved adjustment of solid precipitation (Chubb et al., 2015; Colli et al., 2020). Another potential avenue for reducing errors in adjusted measurements is by improving the ability of transfer functions to distinguish among different precipitation types and their aerodynamic properties (Thériault et al., 2012; Wolff et al., 2015; Nešpor and Sevruk, 1999).

1.3 Objectives

In this work, adjustment functions incorporating hydrometeor fall velocity are developed to reduce the uncertainty (RMSE) in collection efficiency and precipitation accumulation estimates from unshielded Geonor T-200B3 precipitation gauges. The unshielded gauge configuration allows for the assessment of a broader range of collection efficiencies, as the degree of undercatch is generally more pronounced for unshielded gauges relative to shielded configurations. Further, by focussing on the unshielded configuration, no assumptions are required regarding the behaviour of the shield slats and their role in momentum reduction and turbulence generation around the gauge.

A combined modelling and experimental approach is used in this study. In the modelling component, computational fluid dynamics and Lagrangian analysis is used to characterize the gauge collection efficiency dependence explicitly in terms of wind speed and hydrometeor fall velocity, and to derive a corresponding transfer function. [Details of the modelling work are included in the supplement](#). In the experimental component, fall velocity and precipitation type estimates from a Precipitation Occurrence Sensor System (POSS) are used to investigate how the hydrometeor properties influence the relationships among measured catch efficiency, wind speed, and temperature. Two additional transfer functions are derived experimentally with wind speed and fall velocity dependence. These new transfer functions are assessed against transfer functions with dependence on wind speed and air temperature, including one of the universal functions developed by Kochendorfer et al. (2017a) and a climate-specific function derived herein using a similar methodology.

42 Experimental mMethod

2.1 Computational fluid dynamics CFD model

[A computational fluid dynamics model was used to characterize the collection efficiency dependence with wind speed and hydrometeor fall velocity. The model is detailed in the supplement \(Sect. S1.1\). Briefly, a high-resolution 3-dimensional computer aided design model of the Geonor T-200B3 600 mm capacity gauge \(hereafter Geonor gauge\) with 2 m gauge orifice height was developed for the analysis. Time-averaged Navier-Stokes equations and a \$k-\varepsilon\$ turbulence model with 5 % turbulence intensity at the inlet \(Kato and Launder, 1993\) were used to model the airflow around the gauge for horizontal wind speeds](#)

120 (U_w) from 0 to 10 m s⁻¹, applied in 1 m s⁻¹ increments. Separate simulations were conducted for each wind speed using monodispersed hydrometeors (Sect. S1.2) and size distributions for specified hydrometeor types (Sect. S1.3).

42.4.2 Instrumentation

Experimental measurements were performed in conjunction with SPICE over the 2013/14 and 2014/15 winter periods (November 1 to April 30) at the Centre for Atmospheric Research Experiments (CARE) site in Egbert, Ontario, Canada. Measurements of precipitation accumulation were performed using 600 mm capacity Geonor T-200B3 gauges in unshielded 125 and reference DFAR configurations. Both gauges were securely mounted on concrete foundations to limit wind-induced vibrations. The performance of these gauges was confirmed by full-scale field verifications at the start and end of testing, with annual maintenance to inspect, clean, level, and recharge each gauge. The gauges were charged with a mixture of antifreeze (60% methanol and 40% propylene glycol) and oil (Esso Bayol 35 in 2013/14, discontinued; Exxon Mobil Isopar M in 2014/15).

130 Measurements of precipitation occurrence were obtained using a Thies Laser Precipitation Monitor (LPM) installed inside the inner fence of the DFAR. Wind speed and direction measurements at 2 m gauge height were performed with a Vaisala WS425 ultrasonic wind sensor adjacent to the unshielded gauge. Temperature was measured with a Yellow Springs International model 44212 thermistor in an aspirated Stevenson screen. Further details are available in the SPICE final report (Nitu et al., 2018).

24.2.3 Data sampling, quality control, and precipitation event selection

135 The instruments were sampled using a Campbell Scientific CR3000 data logger. For each Geonor T-200B3 precipitation gauge, the frequency and precipitation accumulation for each of the three transducers was reported at 6-second intervals, the latter computed from the former using manufacturer-provided calibration coefficients. Minutely measurements of precipitation occurrence from the Thies LPM were recorded. The scalar average wind speed and vector average wind direction were recorded over 1-minute intervals. Based on SPICE procedures, these data were processed using a format check to replace 140 missing data with null values, a range check to identify and remove outliers outside the manufacturer-specified output thresholds, a jump filter to remove spikes exceeding maximum point-to-point variation thresholds, and a Gaussian filter to smooth out high frequency noise in Geonor precipitation accumulation measurements (Nitu et al., 2018). Periods of instrument maintenance and power outages were removed from the analysis. The Geonor accumulation data were aggregated to 1-minute intervals for subsequent analysis.

145 Precipitation events were identified during both measurement periods using the SPICE event selection procedure (Nitu et al. 2018). These events were defined as 30-minute periods with at least 0.25 mm of precipitation recorded by the reference DFAR precipitation gauge and at least 60% precipitation occurrence reported by the Thies LPM. The use of the LPM as a secondary confirmation of precipitation occurrence minimizes the likelihood of events with false precipitation due to dumps of snow or ice into the gauge, wind induced vibrations, or other factors. Following the approach of Kochendorfer (2018), a minimum 150 0.075 mm accumulation threshold was applied for the unshielded gauge to ensure that measurements exceeded the gauge

uncertainty and that derived collection efficiency values were reliable. The 30-minute event duration was chosen to be sufficiently long to reduce noise and ensure high confidence in measured parameters and sufficiently short to avoid the influence of diurnal temperature variations, while also providing a larger number of events for analysis relative to longer durations. Note that unless otherwise stated, all precipitation events referred to hereafter are 30-minute events derived using
155 the above approach.

24.3.4 POSS fall velocity and precipitation type

The POSS is a small upward-facing bistatic X band radar capable of measuring the precipitation fall velocity based on the Doppler frequency shift of the received signal (Canada, 1995;Sheppard, 1990, 2007;Sheppard et al., 1995;Sheppard and Joe, 1994, 2000, 2008). During periods of precipitation, the POSS outputs both the mean and mode received signal frequency
160 derived from the Doppler frequency spectrum over the previous minute. The mean precipitation fall velocity ($U_{f_{\text{mean}}}$) is estimated from the transmitted wavelength (λ) and the mean frequency (f_{mean}) of the measured Doppler power density spectrum for falling precipitation hydrometeors.

$$U_{f_{\text{mean}}} = \frac{f_{\text{mean}} \lambda}{2}, \quad (19a)$$

The mode precipitation fall velocity ($U_{f_{\text{mode}}}$) is described by a similar function, based on the mode frequency (f_{mode}) of the
165 measured Doppler power density spectrum.

$$U_{f_{\text{mode}}} = \frac{f_{\text{mode}} \lambda}{2}, \quad (19b)$$

For each 30-minute event, the mean and mode event fall velocity correspond to the average of all minutely mean and mode values, respectively. The transfer functions presented in this work were derived using both forms of event fall velocity and assessed in terms of the RMSE and bias error (BE) of adjusted measurements relative to the DFAR. The specific fall velocity
170 indicated for each transfer function corresponds to that which produced the lowest RMSE and BE. The POSS also provides a minutely precipitation type output corresponding to very light, light, moderate, and heavy precipitation for rain, snow, hail, and undefined precipitation. Each event is classified as ‘rain’ or ‘snow’, corresponding to a minimum 70 % occurrence of that precipitation type over the event period (i.e. at least 21 minutes of precipitation occurrence). ‘Mixed’ precipitation events correspond to the presence of both ‘rain’ and ‘snow’ for the remaining events not classified as rain or snow. ‘Undefined’
175 precipitation corresponds to events where the precipitation is not captured by the three other classifications.

24.4.5 Transfer functions with wind speed and temperature

Due to the systematic error associated with gauge undercatch, the unshielded gauge can capture less precipitation than the true amount falling in the air. The measured collection efficiency (CE_m) is defined as the ratio of the precipitation accumulation reported by the unshielded gauge (P_{un}) relative to that reported by the DFAR (P_{DFAR}) for each event, and is given by:

$$180 \quad CE_m = \frac{P_{un}}{P_{DFAR}}, \quad (24)$$

Assuming that the gauge measurement uncertainties are independent and random with equivalent accumulations (corresponding to a collection efficiency equal to 1) and uncertainties, the uncertainty in the collection efficiency (σ_{CE}) scales with the relative magnitude of the gauge uncertainty (σ_p) and the event accumulation value (P) by error propagation.

$$\sigma_{CE} = \frac{\sqrt{2}\sigma_p}{P}, \quad (24)$$

185 Collection efficiency transfer functions attempt to capture the performance of the unshielded gauge relative to the reference configuration based on wind speed, temperature, or other meteorological parameters. They can then be applied to adjust precipitation accumulations from an unshielded gauge in operational settings where reference measurements are not available.

$$P_{adj} = \frac{P_{un}}{CE}, \quad (24)$$

Kochendorfer et al. (2017a;2018) used SPICE measurement data from eight test sites to develop an exponential and 190 trigonometric transfer function based on wind speed (U_w) and air temperature (T). This is referred to as $K_{Universal}$ in this work (Eq. 23a5a). For wind speeds above a threshold value (U_{wt}) of 7.2 m s^{-1} , the wind speed is fixed at the threshold value (Eq. 23b5b) to avoid the potential for erroneous catch efficiency values at higher wind speeds that were not well represented in the SPICE measurement dataset. Based on a similar rationale, no adjustment is applied for temperatures above 5°C . Note that while Kochendorfer et al. (2017b) considered wind speeds at both gauge height and at 10 m, U_w will denote the gauge height 195 wind speed in this work.

$$CE_K(U_w \leq U_{wt}, T) = \exp \left[-b_1 U_w \left(1 - \tan^{-1} (b_2 T) + b_3 \right) \right], \quad (23a5a)$$

$$CE_K(U_w > U_{wt}, T) = \exp \left[-b_1 U_{wt} \left(1 - \tan^{-1} (b_2 T) + b_3 \right) \right], \quad (23b5b)$$

The coefficients for $K_{Universal}$ are provided in Table 61.

200

205 **Table 61.** Unshielded Geonor T-200B3 precipitation gauge collection efficiency transfer function coefficients for solid and mixed precipitation with 30-minute scalar mean wind speed U_w at gauge height for: $K_{\text{Universal}}$ function with wind speed and air temperature T dependence, with constant value above wind speed threshold with Kochendorfer et al. (2017a) coefficients; K_{CARE} function with wind speed and air temperature dependence, with constant value above wind speed threshold; present study CFD model with dependence on wind speed and mode hydrometeor fall velocity $U_{f_{\text{mode}}}$; HE1 model with dependence on wind speed and mean hydrometeor fall velocity $U_{f_{\text{mean}}}$ threshold; and HE2 model with wind speed and mode hydrometeor fall velocity dependence and mode hydrometeor fall velocity threshold.

Description	Eq.	Function	Coefficients				Threshold
			b_1	b_2	b_3	b_4	
$K_{\text{Universal}}$	<u>235</u>	$f(U_w, T)$	0.0785	0.729	0.407	-	$U_w = 7.2 \text{ m s}^{-1}, T \leq 5 \text{ }^{\circ}\text{C}$
K_{CARE}	<u>235</u>	$f(U_w, T)$	0.1651	0.186	-0.757	-	$U_w = 7.2 \text{ m s}^{-1}, T \leq 1.33 \text{ }^{\circ}\text{C}$
<u>CFD</u>	<u>6</u>	<u>$f(U_w, U_{f_{\text{mode}}})$</u>	<u>0.908</u>	<u>1.387</u>	<u>0.143</u>	<u>2.422</u>	<u>$U_w \leq 10 \text{ m s}^{-1}$</u>
HE1	<u>247</u>	$f(U_w, U_{f_{\text{mean}}})$	0.139	-	-	-	$U_{f_{\text{mean}}} \leq 1.93 \text{ m s}^{-1}, U_w \leq 5.75 \text{ m s}^{-1}$
HE2	<u>258</u>	$f(U_w, U_{f_{\text{mode}}})$	0.244	0.0869	-	-	$U_{f_{\text{mode}}} \leq 2.81 \text{ m s}^{-1}, U_w \leq 0.8/(b_1 - b_2 U_f)$

Using the same formulation, a site-specific transfer function based on wind speed and temperature was derived using the CARE dataset, for comparison with $K_{\text{Universal}}$. Best-fit regression coefficients were determined by varying the temperature threshold below 5 $^{\circ}\text{C}$ with the collection efficiency constrained to 1 above the threshold value. Solving Eq. 23a-5a for the temperature when the collection efficiency equals 1 provides additional constraint on the b_3 coefficient as a function of the b_2 coefficient and temperature threshold (T_t).

$$b_3 = \tan^{-1}(b_2 T_t) - 1, \quad (23e5c)$$

The coefficients for the CARE site-specific transfer function, referred to as K_{CARE} in this work, are provided in Table 61. The temperature threshold was varied over the measurement range in 0.01 $^{\circ}\text{C}$ increments to provide the lowest overall RMSE.

53 Experimental Results

53.1 Precipitation type


Using the minutely POSS precipitation type output, events were classified as ‘rain’, ‘snow’, ‘mixed’, or ‘undefined’ following the methodology in Section 4.32.4. The relative occurrence of different precipitation types as reported by the POSS for the event dataset is summarized in Table 72. The fall velocities in Table 7-2 were estimated by the POSS following the methodology in Section 4.32.4; the temperatures were estimated from a YSI44212 thermistor in an aspirated Stevenson screen as described in Section 4.42.2.

225 **Table 72.** Mean fall velocities and temperatures of precipitation events by type classification.

Precipitation phase	Fall velocities (m s ⁻¹)	Temperatures (°C)	Events (#)

Snow	0.93 to 2.32	< 0.5	233
Mixed	1.2 to 4.6	-7.0 to 2.1	45
Undefined	1.0 to 4.3	-5.4 to 6.6	40
Rain	1.4 to 6.4	-4.8 to 18.9	196

Based on the mean fall velocities and temperatures for each precipitation event (Fig. 91, Table 72), snow events occurred at temperatures below 0.5 °C and with fall velocities of 0.93 m s⁻¹ to 2.32 m s⁻¹. Mixed events were characterized by mean 230 temperatures between -7.0 °C and 2.1 °C and mean fall velocities between 1.2 m s⁻¹ and 4.6 m s⁻¹, while undefined precipitation events occurred at mean temperatures between -5.4 °C and 6.6 °C and fall velocities between 1.0 m s⁻¹ and 4.3 m s⁻¹. Rain events were characterized by mean temperatures between -4.8 °C and 18.9 °C and mean fall velocities between 1.4 m s⁻¹ and 235 6.4 m s⁻¹. Over the temperature range between -5 °C and 2 °C, rain, snow, mixed, and undefined precipitation types were all present, demonstrating the challenge of estimating precipitation type using temperature alone (e.g. as done for the K_{Universal} and K_{CARE} transfer functions). Within this temperature range, a wide variety of mean fall velocities, between 1 and 6 m s⁻¹, is also apparent.

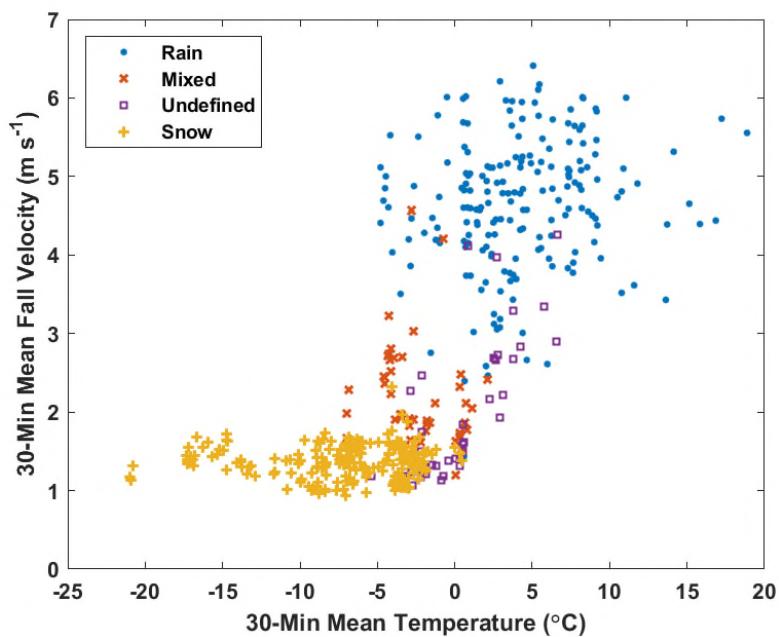


240 **Figure 91.** Mean air temperature and fall velocity for 30-minute events with rain, snow, mixed, and undefined precipitation (see Table 72 for summary).

53.2 Collection efficiency

3.2.1 CFD Model results

Simulations were run for wind speeds from 0 and 10 m s⁻¹ and monodispersed hydrometeors with fall velocities between 0.25 m s⁻¹ and 10 m s⁻¹. Details of the simulations are provided in Section S1.2. The numerical results for monodispersed hydrometeors demonstrate a clear dependence on the hydrometeor fall velocity (Fig. 2). Hydrometeors with higher fall velocities exhibit increased collection efficiency, and the collection efficiency tends to decrease with increasing wind speed. Rain, dry snow, and wet snow hydrometeors with 1.0 m s⁻¹ fall velocity exhibit a similar collection efficiency decrease with increasing wind speed, despite differences in diameter, density, and mass. For rain and ice pellet hydrometeors with 5.0 m s⁻¹ fall velocities, the results are close to 1 and nearly identical at all wind speeds, irrespective of differences in density. Here, the circles for rain overlap the squares for ice pellets in Fig. 2. Rain and wet snow with identical fall velocities between 1.0 m s⁻¹ and 2.5 m s⁻¹ also exhibit similar results for wind speeds under 5 m s⁻¹. Above 5 m s⁻¹ wind speed, the collection efficiency for rain is slightly elevated above that for wet snow. For dry snow hydrometeors with fall velocities between 0.5 m s⁻¹ and 1.0 m s⁻¹, there is good agreement with the corresponding rain hydrometeors for horizontal wind speeds up to about 3 m s⁻¹. Above this wind speed, the 0.5 m s⁻¹ dry snow hydrometeors exhibit good agreement with rain hydrometeors, while the collection efficiency for 1.0 m s⁻¹ dry snow hydrometeors decreases more rapidly with wind speed relative to rain hydrometeors with the same fall velocity. Collection efficiency differences across all hydrometeor types with identical fall velocities are within 0.18, with root mean square differences of 0.05, over all wind speeds and hydrometeor fall velocities studied.

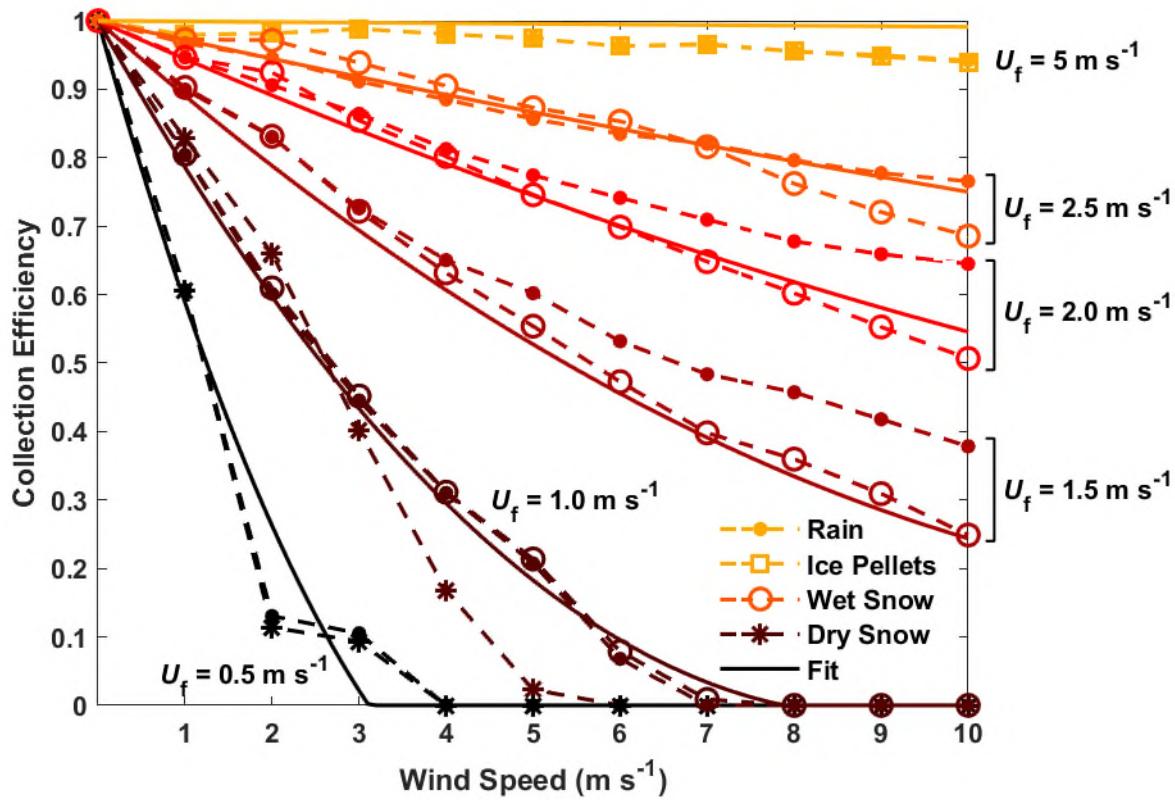


260 **Figure 2.** Flow simulation results for Geonor unshielded gauge collection efficiency based on wind speed and hydrometeor fall velocity for rain, ice pellets, wet snow, dry snow, and CFD transfer function.

3.2.2 Experimental results

265 The unshielded gauge collection efficiency results are shown as a function of the 30-minute DFAR event accumulations in Fig. 10a-3a and stratified by precipitation type classification. The collection efficiency for rain shows less scatter and less uncertainty for higher reference precipitation accumulations. The dashed lines in Fig. 10a-3a show the decrease in the collection efficiency uncertainty with increasing precipitation accumulation for a collection efficiency equal to 1 and a precipitation accumulation uncertainty of 0.1 mm ($k = 2$) given by Eq. 243. These lines appear to capture the overall trend observed for rain events. The snowfall events show a markedly different trend, however, with collection efficiencies as low as 0.3.

270 The collection efficiency for all events as a function of mean wind speed and precipitation type classification is shown in Fig. 10b-3b. For rain events, the collection efficiencies are close to 1. For snow, an approximately linear decrease in the collection efficiency with mean wind speed is apparent, with the collection efficiency decreasing to 0.3 at a wind speed of 5 m s^{-1} . Mixed precipitation collection efficiencies span a range of values between those of rain and snow. For undefined precipitation, some

275 events have collection efficiencies close to 1 at high wind speeds, similar to rain events, while others appear to decrease with increasing wind speed in a similar fashion to that observed for snow events.

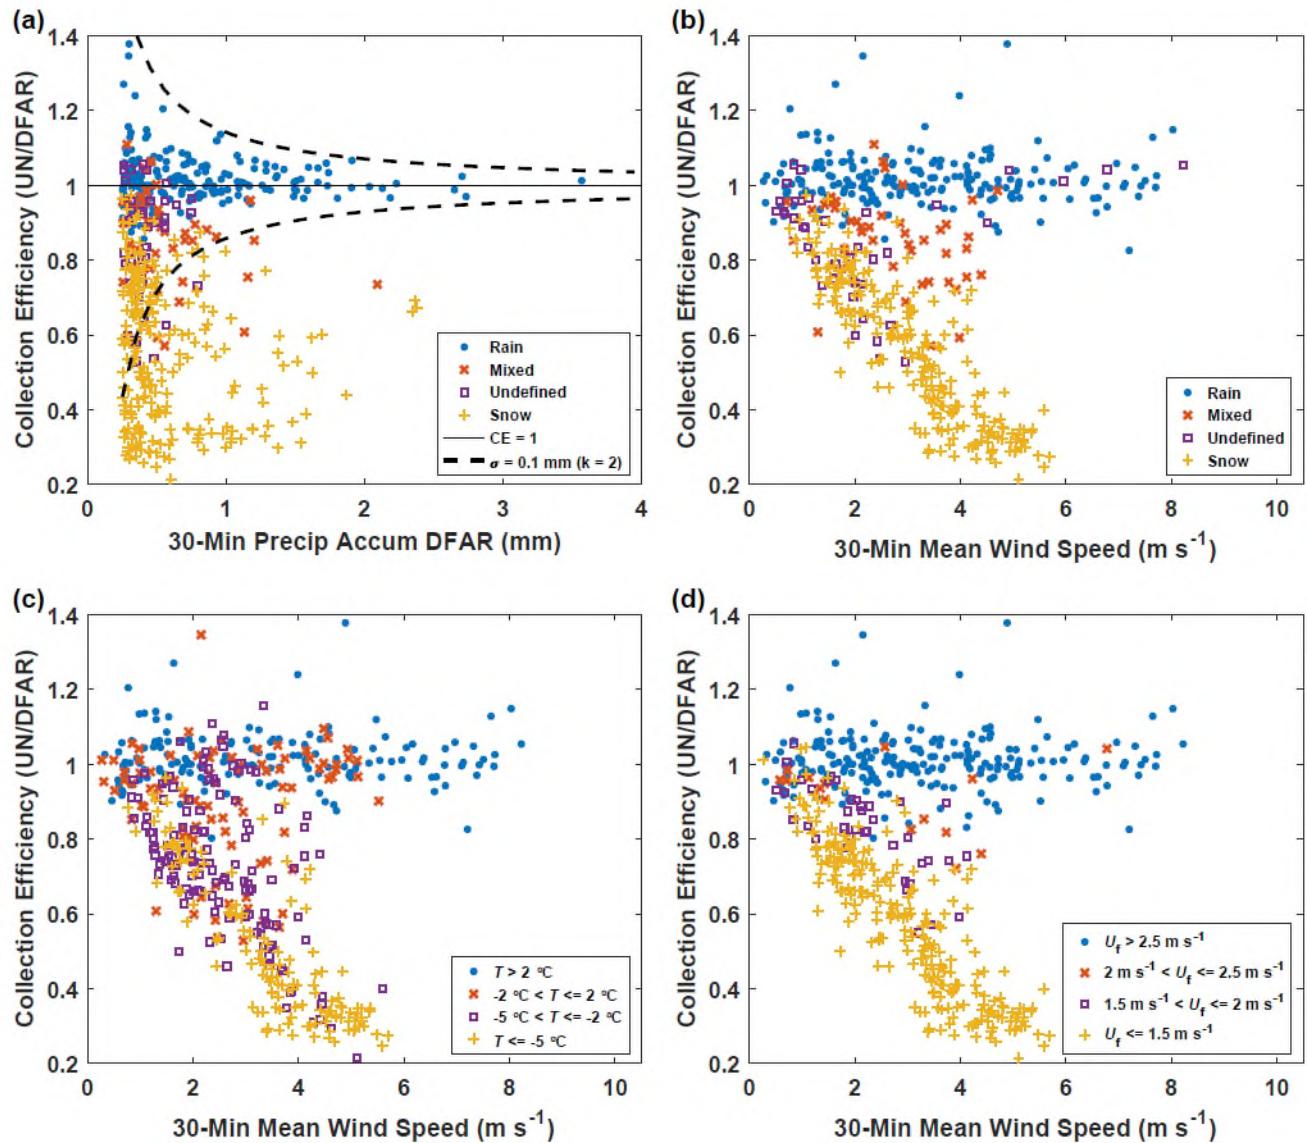

280 **Figure 103.** Collection efficiency of the unshielded gauge as a function of: (a) precipitation accumulation and event precipitation type (dashed lines illustrate accumulation uncertainty threshold); (b) wind speed and event precipitation type; (c) wind speed and mean air temperature T categories; and (d) wind speed and mode fall velocity U_{f_mode} categories.

The dependence of collection efficiencies on the mean wind speed over four separate mean temperature ranges is shown in
 285 Fig. 40e3c. For mean event temperatures above 2 °C, the collection efficiencies are generally close to 1, typical of rain. For temperatures between -5 °C and -2 °C and between -2 °C and 2 °C, a range of collection efficiency values are observed, from those typical of snow to those typical of rain. This variation is attributed to the wide range of fall velocities within this temperature range, which includes snow, rain, and mixed precipitation events (Fig. 40b3b). At colder temperatures, below -5 °C, collection efficiencies appear to decrease approximately linearly with wind speed, consistent with the trend observed for
 290 snow events in Fig. 40b3b.

Stratifying the collection efficiency results as a function of mean event wind speed by the mode fall velocity shows more distinct trends (Fig. 40d3d) relative to those observed when stratifying by temperature (Fig. 40e3c). Collection efficiencies are close to 1 for fall velocities greater than 2.5 m s⁻¹, generally corresponding to rain. Conversely, fall velocities below 1.5 m s⁻¹ show an approximately linear decrease in collection efficiency with increasing wind speed up to about 6 m s⁻¹. A number of
 295 the values with higher collection efficiencies in this low fall velocity range correspond to mixed precipitation, where both snow and rain may be present. Between 1.5 m s⁻¹ to 2.5 m s⁻¹ fall velocity, intermediate collection efficiency values are evident, with collection efficiencies transitioning from lower to higher values, despite a fewer number of observations in this range.

35.3 Derivation of fall velocity transfer functions from CE results

3.3.1 CFD mModel results

The simulation results in Section S2.23.2.1 demonstrate that the collection efficiency is dependent on the free-stream wind speed (U_w) and hydrometeor fall velocity (U_f). The CFD transfer function, CE_{CFD} , is presented based on a polynomial fit to wind speed and an exponential hydrometeor fall velocity dependence, with both velocities having units of m s⁻¹.

$$CE_{CFD} = 1 - b_1 U_w e^{-b_2 U_f} + b_3 U_w^2 e^{-b_4 U_f} \quad (S186)$$

This expression was selected due to its ability to capture the nonlinearity in the collection efficiency up to 10 m s⁻¹ wind speed, as well as the nonlinear fall velocity dependence with collection efficiencies approaching 1 for higher fall velocities. Table
 305 S51 shows the best-fit coefficients (RMSE of 0.03) from a combined nonlinear regression for dry snow (0.5 m s⁻¹ and 0.75 m s⁻¹ fall velocities), wet snow (1.0 m s⁻¹, 1.25 m s⁻¹, ..., 2.5 m s⁻¹ fall velocities), and rain (5 and 10 m s⁻¹ fall velocities). A single CFD curve was used for each fall velocity in the fit to ensure that the transfer function was unbiased over the entire
 310 range of fall velocities studied.

Table S5. Non linear regression fit parameters, standard errors (SE), and units for the Geonor unshielded gauge collection efficiency as a function of wind speed and hydrometeor fall velocity with RMSE = 0.0302 and R² = 0.989.

<u>Coefficient</u>	<u>Value</u>	<u>SE</u>	<u>Units</u>
<u>b_1</u>	<u>0.908</u>	<u>0.048</u>	<u>s m⁻¹</u>
<u>b_2</u>	<u>1.387</u>	<u>0.037</u>	<u>s m⁻¹</u>

$$\begin{array}{cccc}
 \frac{b_2}{b_4} & 0.143 & 0.031 & \frac{s^2 \cdot m^{-2}}{s \cdot m^{-1}} \\
 \underline{2.422} & \underline{0.167} & &
 \end{array}$$

315 Fig. shows the comparison of the CFD transfer function is compared with the CFD results in Fig. 3. For hydrometeor fall velocities above 5.0 m s^{-1} , the collection efficiency expression is within -0.13 and 0.10 of CFD results over all hydrometeor types. For fall velocities between 1.25 to 2.5 m s^{-1} , the fit is within ± 0.06 over all wind speeds. For fall velocities of 0.25 m s^{-1} to 1.0 m s^{-1} , the fit captures the rapid decrease in collection efficiency with wind speed well overall, with a maximum difference of 0.16 for dry snow at 5 m s^{-1} wind speed. The CFD transfer function captures well the collection efficiency trends for the different hydrometeor types, with RMSE values of 0.04 for rain, 0.02 for ice pellets, 0.02 for wet snow, and 0.05 for dry snow.

320 Fig. S4 shows the CFD transfer function dependence with fall velocity is shown in Fig. 4. For a given wind speed, the collection efficiency increases nonlinearly with hydrometeor fall velocity. For fall velocities above 3 m s^{-1} the collection efficiency is close to 1. The collection efficiency rapidly decreases as the fall velocity is reduced, particularly below 2.5 m s^{-1} fall velocity. Increasing the wind speed decreases the collection efficiency.


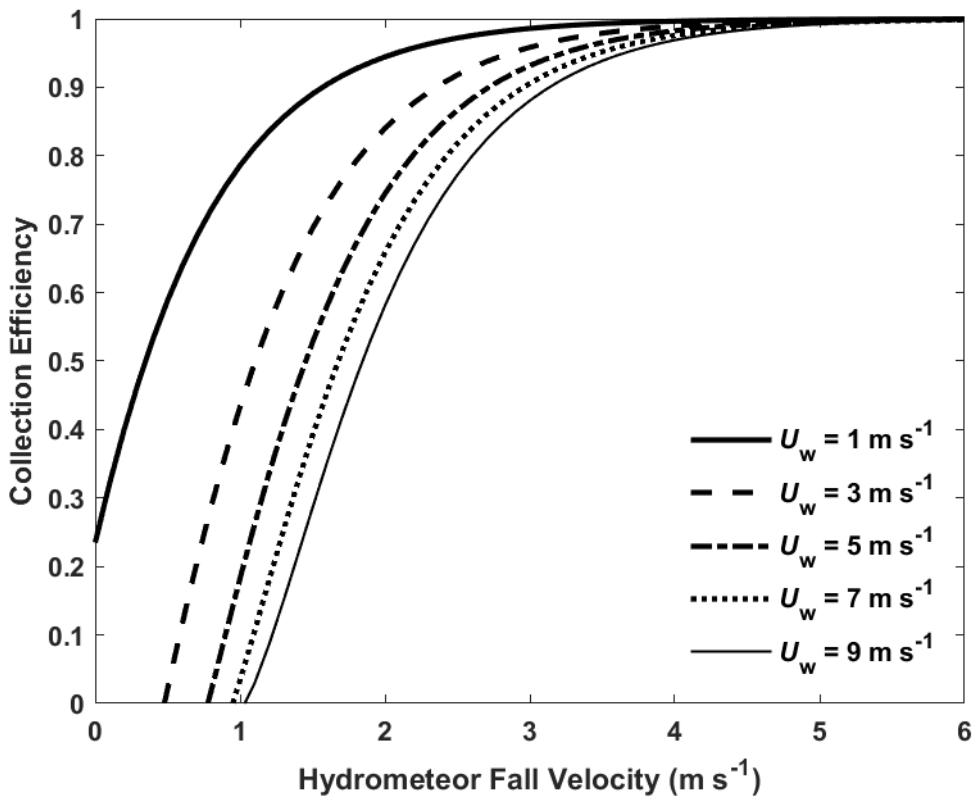


Figure S44. Geonor unshielded gauge collection efficiency for exponential fit model with hydrometeor fall velocity and wind speed.

To extend the approach from monodispersed to polydispersed hydrometeors, integral forms of the collection efficiency expression with wind speed and fall velocity dependence were defined for rain and snow, as detailed in Section S1.3. Using these expressions, collection efficiencies were derived for specified hydrometeor types and precipitation intensities over wind speeds from 0 to 10 m s⁻¹. Fig. 5 shows the integral collection efficiency as a function of hydrometeor fall velocity for precipitation type (thunderstorm rain, orographic rain, dendrites and aggregates of plates, rimed dendrites, and dendrites), precipitation intensity (0.1 to 20 mm h⁻¹ for rainfall and 0.5 to 2.5 mm h⁻¹ for snowfall), and wind speed (1 m s⁻¹, 3 m s⁻¹, and 6 m s⁻¹). Here, the fall velocity at the median volume diameter is used as an estimate for the fall velocity distribution. The results take a similar form to that of the CFD transfer function shown in Fig. 4, with collection efficiencies increasing nonlinearly with hydrometeor fall velocity for a given wind speed. Dendrites, with the lowest fall velocity, exhibit the lowest integral collection efficiency. Rimed dendrites and dendrites and aggregates of plates with higher fall velocity exhibit higher collection efficiency. In this fall velocity range below 1.5 m s⁻¹, the collection efficiency rapidly increases approximately linearly with fall velocity. For orographic rain and thunderstorm rain, with even higher fall velocity, the integral collection efficiency nonlinearly approaches 1. As wind speeds increase from 1 m s⁻¹ to 6 m s⁻¹, collection efficiencies for all precipitation types are shifted down at the lower end of the fall velocity spectrum below 2 m s⁻¹ and still converge to 1 at higher fall velocities, close to 5 m s⁻¹.

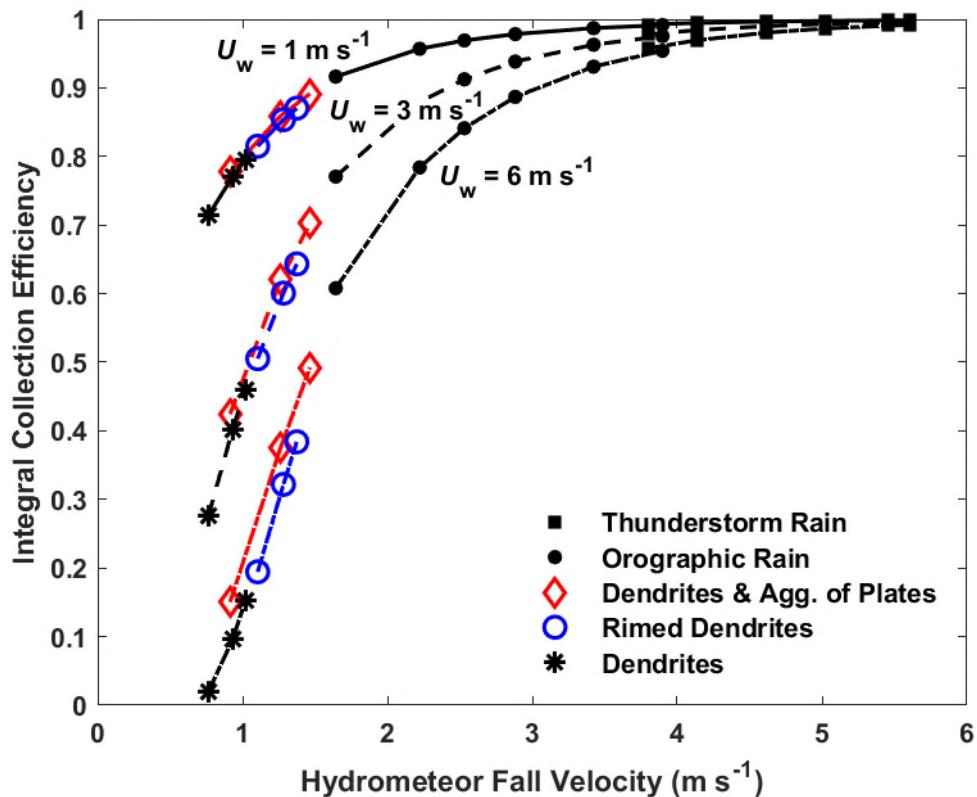

345 **Figure S85.** Integral Geonor unshielded gauge collection efficiency with hydrometeor fall velocity at median volume diameter for rainfall and snowfall types at 1 m s^{-1} , 3 m s^{-1} , and 6 m s^{-1} wind speeds.

350 For snowfall, the integral collection efficiency difference across dendrites, rimed dendrites, and dendrites and aggregates of plates is less than 0.06 for 0.5 mm h^{-1} , 1.5 mm h^{-1} , and 2.5 mm h^{-1} precipitation intensities at 6 m s^{-1} wind speed, and within 0.03 for the same precipitation intensities at 3 m s^{-1} wind speed. For rainfall, the integral collection efficiency difference is less than 0.01 at 3.8 m s^{-1} fall velocity, where orographic rain and thunderstorm rain overlap. Orographic rain exhibits median volume diameter fall velocities between 1.6 m s^{-1} to 3.9 m s^{-1} for precipitation intensities from 0.1 mm h^{-1} to 10 mm h^{-1} . Thunderstorm rain exhibits median volume diameter fall velocities between 3.8 m s^{-1} to 5.6 m s^{-1} for precipitation intensities from 1 mm h^{-1} to 20 mm h^{-1} .

355 **3.3.2 Experimental results**

Two additional transfer functions were formulated based on the apparent linear dependence of CE on wind speed for different hydrometeor fall velocity regimes observed in experimental results (Fig. 10d3d). These functions are applicable to all hydrometeor types, and have different fall velocity thresholds to describe the transition of precipitation phase from the lower fall velocities characteristic of snow to the higher fall velocities characteristic of rain and mixed precipitation.

360 The first transfer function, referred to as HE1, is based on the assumption of a linear decrease in collection efficiency (CE_{HE1}) with wind speed (U_w) for hydrometeors with mean fall velocity ($U_{f_{\text{mean}}}$) below 1.93 m s^{-1} , generally corresponding to snowfall. This linear decrease is extrapolated up to a 5.75 m s^{-1} wind speed threshold (Eq. 24a7a), above which the collection efficiency for snowfall is 0.2 (Eq. 24b7b), following the general approach of Kochendorfer et al. (2017a). For hydrometeors with mean fall velocity greater than 1.93 m s^{-1} , corresponding to mixed and liquid precipitation, the collection efficiency is 1 (Eq. 24e7c). The fall velocity threshold was varied over the measurement fall velocity range in 0.01 m s^{-1} increments, with the threshold of 1.93 m s^{-1} found to provide the lowest overall RMSE.

$$\text{CE}_{\text{HE1}}(U_w \leq 5.75 \text{ m s}^{-1}, U_{f_{\text{mean}}} \leq 1.93 \text{ m s}^{-1}) = 1 - b_l U_w, \quad (24a7a)$$

$$\text{CE}_{\text{HE1}}(U_w > 5.75 \text{ m s}^{-1}, U_{f_{\text{mean}}} \leq 1.93 \text{ m s}^{-1}) = 0.2, \quad (24b7b)$$

$$\text{CE}_{\text{HE1}}(U_{f_{\text{mean}}} > 1.93 \text{ m s}^{-1}) = 1, \quad (24e7c)$$

370 The second transfer function, referred to as HE2, adds another dimension to describe the slope of the linear decrease in CE with increasing wind speed: the hydrometeor fall velocity. For mode fall velocity ($U_{f_{\text{mode}}}$) below 2.81 m s^{-1} and wind speed U_w below the threshold value, which is also dependent on the fall velocity, the collection efficiency (CE_{HE2}) is assumed to decrease linearly with decreasing wind speed for a given hydrometeor fall velocity (Eq. 25a8a). For mode fall velocity below 2.81 m s^{-1} and wind speed above the threshold value, the collection efficiency is 0.2 (Eq. 25b8b). For mode fall velocity above

375 2.81 m s^{-1} , the collection efficiency is equal to 1 (Eq. 25e8c). The fall velocity threshold was varied over the measurement fall velocity range in 0.01 m s^{-1} increments with the threshold of 2.81 m s^{-1} found to provide the lowest overall RMSE.

$$CE_{\text{HE2}} \left(U_w \leq \frac{0.8}{b_1 - b_2 U_{\text{f_mode}}}, U_{\text{f_mode}} \leq 2.81 \text{ m s}^{-1} \right) = 1 - (b_1 - b_2 U_{\text{f_mode}}) U_w, \quad (25a8a)$$


$$CE_{\text{HE2}} \left(U_w > \frac{0.8}{b_1 - b_2 U_{\text{f_mode}}}, U_{\text{f_mode}} \leq 2.81 \text{ m s}^{-1} \right) = 0.2, \quad (25b8b)$$

$$CE_{\text{HE2}} \left(U_{\text{f_mode}} > 2.81 \text{ m s}^{-1} \right) = 1, \quad (25e8c)$$

380 **35.4 Assessment of transfer functions:**

3.4.1 Collection efficiency

Observed collection efficiencies were compared with adjusted values using both existing transfer functions from SPICE and those presented in this work. Results are presented in Fig. 446, with relevant transfer function parameters compiled in Tables 1-85 and 6, and resulting bias errors, root mean square errors, and correlation coefficients (r) presented in Table 83. To further contextualize the assessment of the different transfer functions, the RMSE results are presented for different precipitation classifications, temperature ranges, and fall velocity ranges in Table 94.

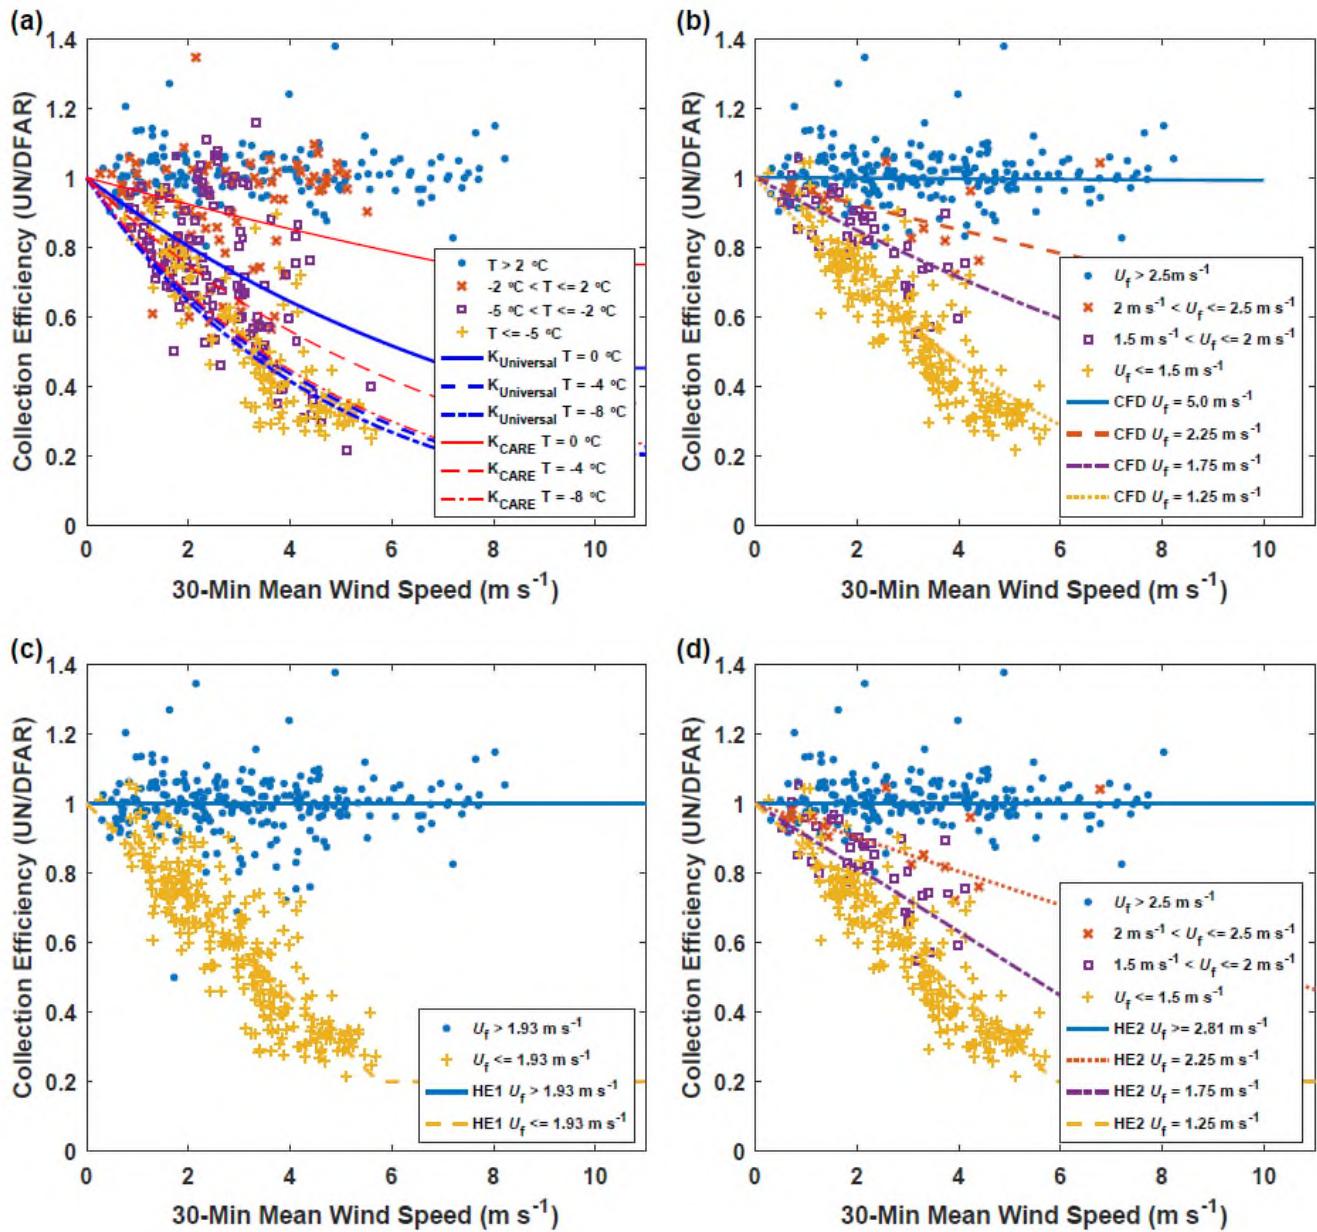

|390 **Figure 116.** Collection efficiency of unshielded gauge as a function of wind speed for: (a) mean air temperature T categories for the $K_{\text{Universal}}$ and K_{CARE} transfer functions; (b) mode fall velocity $U_{f,\text{mode}}$ categories with the CFD transfer function; (c) mean fall velocity $U_{f,\text{mean}}$ categories for the HE1 transfer function; and (d) mode fall velocity $U_{f,\text{mode}}$ categories with the HE2 transfer function.

Table 83. Unshielded gauge 30-minute event bias error (BE), root mean square error (RMSE), correlation coefficient (r), and number of events (N) for collection efficiency and precipitation accumulation between the unshielded and reference DFAR shielded Geonor T-200B3 gauge for: unadjusted comparison; $K_{\text{Universal}}$ transfer function with wind speed and air temperature dependence; K_{CARE} transfer function with wind speed and air temperature dependence; present study CFD transfer function with wind speed and mode fall velocity dependence; HE1 transfer function with wind speed and mean fall velocity dependence; and HE2 transfer function with wind speed and mode fall velocity dependence. Statistics are based on the comparison of experimental results from the CARE site between November 1 and April 30, 2013/14 and 2014/15.

Description	Collection efficiency			Precip accum (mm)			N
	BE	RMSE	r	BE	RMSE	r	
Unadjusted	-	-	-	-0.13	0.24	0.900	514
$K_{\text{Universal}}$	0.07	0.15	0.853	0.07	0.20	0.949	514
K_{CARE}	-0.005	0.12	0.878	0.002	0.13	0.963	514
CFD	-0.02	0.08	0.949	0.011	0.08	0.986	514
HE1	0.0004	0.10	0.928	0.006	0.09	0.983	514
HE2	-0.009	0.08	0.950	0.006	0.07	0.988	514

Table 94. Unshielded gauge 30-minute event collection efficiency RMSE results stratified by: (a) POSS precipitation type; (b) temperature; and (c) fall velocity. Results are shown for: $K_{\text{Universal}}$ transfer function with wind speed and air temperature dependence; K_{CARE} transfer function with wind speed and air temperature dependence; present study CFD transfer function with wind speed and mode fall velocity dependence; HE1 transfer function with wind speed and mean fall velocity dependence; and HE2 transfer function with wind speed and mode fall velocity dependence. Statistics are based on the comparison of experimental results from the CARE site between November 1 and April 30, 2013/14 and 2014/15.

RMSE				
(a)	Rain (N = 196)	Mixed (N = 45)	Undefined (N = 40)	Snow (N = 233)
$K_{\text{Universal}}$	0.17	0.27	0.09	0.09
K_{CARE}	0.12	0.20	0.13	0.11
CFD	0.08	0.09	0.09	0.09
HE1	0.07	0.16	0.08	0.10
HE2	0.08	0.10	0.09	0.08
(b)	$T > 2^{\circ}\text{C}$ (N = 150)	$-2^{\circ}\text{C} < T \leq 2^{\circ}\text{C}$ (N = 89)	$-5^{\circ}\text{C} < T \leq -2^{\circ}\text{C}$ (N = 134)	$T \leq -5^{\circ}\text{C}$ (N = 141)
$K_{\text{Universal}}$	0.08	0.19	0.21	0.11
K_{CARE}	0.07	0.13	0.17	0.10
CFD	0.09	0.08	0.08	0.09
HE1	0.07	0.10	0.11	0.10
HE2	0.09	0.08	0.07	0.08
(c)	$U_f > 2.5 \text{ m s}^{-1}$ (N = 212)	$2 \text{ m s}^{-1} < U_f \leq 2.5 \text{ m s}^{-1}$ (N = 15)	$1.5 \text{ m s}^{-1} < U_f \leq 2 \text{ m s}^{-1}$ (N = 40)	$U_f \leq 1.5 \text{ m s}^{-1}$ (N = 247)
$K_{\text{Universal}}$	0.19	0.23	0.16	0.09
K_{CARE}	0.13	0.17	0.12	0.11
CFD	0.08	0.10	0.08	0.09
HE1	0.08	0.13	0.15	0.10
HE2	0.08	0.12	0.08	0.08

Both $K_{\text{Universal}}$ and the climate-specific K_{CARE} transfer function have continuous temperature dependence and display similar profiles at -8°C , with the collection efficiency for the K_{CARE} transfer function decreasing more gradually with wind speed compared to the $K_{\text{Universal}}$ transfer function at -4°C and 0°C (Fig. 11a6a). Using the approach outlined in Section 4.4.2.5, a temperature threshold (T_c) of 1.33°C for the best-fit K_{CARE} transfer function was found to minimize the precipitation 415 accumulation RMSE. The overall collection efficiency root mean square error is reduced from 0.15 for the $K_{\text{Universal}}$ transfer function to 0.12 for the K_{CARE} transfer function (Table 83). The bias error is also reduced from 0.07 for the $K_{\text{Universal}}$ transfer function to -0.005 for the best-fit K_{CARE} transfer function. For $K_{\text{Universal}}$ and K_{CARE} , respectively, the RMSE is reduced from 420 0.17 to 0.12 for rain and from 0.27 to 0.20 for mixed precipitation, with slightly elevated RMSE from 0.09 to 0.13 for undefined precipitation and 0.09 to 0.11 for snow (Table 9a4a). For mean event temperatures between -2°C and 2°C , and between -5°C and -2°C , respectively, the RMSE values of 0.19 and 0.21 for the $K_{\text{Universal}}$ transfer function are relatively large compared 425 to the 0.13 and 0.17 values for the K_{CARE} transfer function (Table 9b4b). This results from the more gradual decrease in the K_{CARE} transfer function with wind speed over these temperature ranges (Fig. 11a6a).

A comparison of the CFD transfer function with observed CE is shown in Fig. 11b6b. Overall, the measured data have less scatter when stratified by fall velocity than when stratified by temperature (Table 83, Figs. 11a-6a and b). The CFD transfer 425 function provides a lower overall RMSE (0.08) and higher r (0.949) relative to the $K_{\text{Universal}}$ and K_{CARE} transfer functions based on temperature. Reductions in the collection efficiency RMSE using the CFD transfer function are most pronounced for rain and mixed precipitation (Table 9a4a) and for mean event temperatures between -2°C and 2°C and between -5°C and -2°C (Table 9b4b) compared with the $K_{\text{Universal}}$ and K_{CARE} functions. Collection efficiency RMSE values are between 0.08 and 0.10 over all fall velocity classes, despite fewer numbers of events with fall velocities between 1.5 m s^{-1} and 2.5 m s^{-1} (Table 9e4c). 430 The HE1 transfer function provides good agreement with observed data in the mean fall velocity regimes relevant to snow and rain (Fig. 11e6c), resulting in an overall RMSE of 0.10, BE of 0.0004, and r of 0.928 (Table 83). The RMSE for mixed precipitation is 0.16, which is lower than that of the K_{CARE} transfer function with temperature (0.20) but higher than that of the CFD model (0.09), which varies continuously with fall velocity (Table 9a4a).

The HE2 function better captures the observed collection efficiencies for mode fall velocities between the snow and rain 435 regimes (Fig. 11d6d), improving the overall RMSE to 0.08 and r to 0.95, while increasing slightly the BE (-0.009) relative to HE1 (Table 83). Note the distinction between mean fall velocity for HE1 and mode fall velocity for HE2 (and CFD). In general, the Doppler frequency spectrum tends to be skewed such that mode fall velocities are slightly lower than the mean fall 440 velocities, impacting the fits to observed data. The HE2 transfer function provides similar results to that of the CFD transfer function, with slightly higher RMSE values for mixed precipitation and slightly reduced RMSE values for snow (Table 9a4a) and temperatures below -2°C (Table 9b4b). For intermediate fall velocities between 2.0 m s^{-1} and 2.5 m s^{-1} , the HE2 transfer function, with a linear change in collection efficiency with fall velocity, has a higher RMSE (0.12) than that for the CFD function (0.10), which exhibits a nonlinear change in collection efficiency with fall velocity (Table 9e4c). Only 15 events were recorded in this intermediate fall velocity range with higher uncertainty relative to the CFD function. In contrast, 212 events

were recorded at fall velocities above 2.5 m s^{-1} and 247 events at fall velocities below 1.5 m s^{-1} , representing a greater

445 proportion of the events with lower RMSE relative to the CFD function.

35.5.4.2 Assessment of transfer functions: Pprecipitation accumulation

The unadjusted and adjusted accumulated precipitation values are compared with reference DFAR accumulation

measurements in Fig. 427. Bias, RMSE, and correlation coefficient results are shown in Table 83. Similar to the approach for

450 assessing transfer functions based on collection efficiency results in Section 5.43.4.1, the precipitation accumulation RMSE

451 results for each transfer function are assessed by precipitation classification, temperature range, and fall velocity range in Table

452 105.

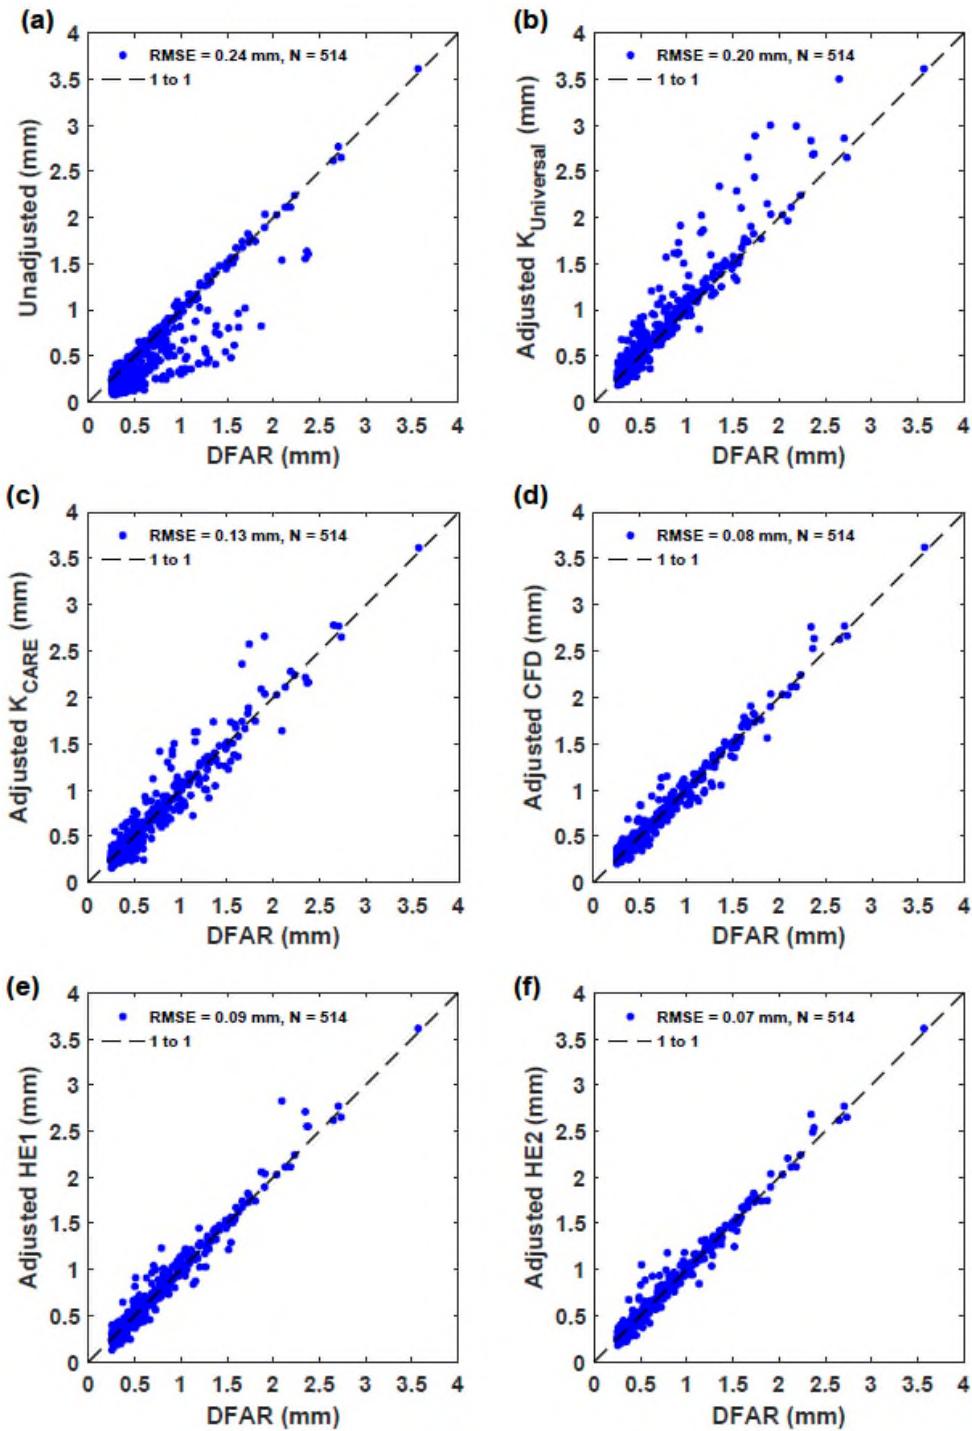


Figure 127. Unshielded and reference DFAR 30-minute event precipitation accumulation comparison for: (a) unadjusted precipitation accumulation; (b) $K_{\text{Universal}}$ continuous transfer function with wind speed and air temperature dependence; (c) K_{CARE} continuous transfer function with wind speed and air temperature dependence; (d) CFD transfer function with wind speed and fall velocity dependence; (e) HE1 transfer function with wind speed and fall velocity dependence; and (f) HE2 transfer function with wind speed and fall velocity dependence.

460 **Table 105.** Unshielded gauge 30-minute event RMSE (mm) results stratified by: (a) POSS precipitation type; (b) temperature; and (c) fall velocity. Results are shown for: unadjusted comparison; $K_{\text{Universal}}$ transfer function with wind speed and air temperature dependence; K_{CARE} transfer function with wind speed and air temperature dependence; present study CFD transfer function with wind speed and mode fall velocity dependence; HE1 transfer function with wind speed and mean fall velocity dependence; and HE2 transfer function with wind speed and mode fall velocity dependence. Statistics are based on the comparison of experimental results from the CARE site between November 1 and April 30, 2013/14 and 2014/15.

RMSE (mm)				
(a)	Rain (N = 196)	Mixed (N = 45)	Undefined (N = 40)	Snow (N = 233)
Unadjusted	0.04	0.15	0.09	0.35
$K_{\text{Universal}}$	0.25	0.33	0.05	0.10
K_{CARE}	0.14	0.22	0.06	0.11
CFD	0.04	0.07	0.04	0.11
HE1	0.04	0.17	0.04	0.10
HE2	0.04	0.09	0.04	0.09
(b)	$T > 2^{\circ}\text{C}$ (N = 150)	$-2^{\circ}\text{C} < T \leq 2^{\circ}\text{C}$ (N = 89)	$-5^{\circ}\text{C} < T \leq -2^{\circ}\text{C}$ (N = 134)	$T \leq -5^{\circ}\text{C}$ (N = 141)
Unadjusted	0.04	0.14	0.23	0.39
$K_{\text{Universal}}$	0.05	0.25	0.29	0.12
K_{CARE}	0.04	0.11	0.20	0.12
CFD	0.05	0.06	0.08	0.11
HE1	0.04	0.12	0.09	0.10
HE2	0.05	0.07	0.08	0.09
(c)	$U_f > 2.5 \text{ m s}^{-1}$ (N = 212)	$2 \text{ m s}^{-1} < U_f \leq 2.5 \text{ m s}^{-1}$ (N = 15)	$1.5 \text{ m s}^{-1} < U_f \leq 2 \text{ m s}^{-1}$ (N = 40)	$U_f \leq 1.5 \text{ m s}^{-1}$ (N = 247)
Unadjusted	0.04	0.06	0.16	0.34
$K_{\text{Universal}}$	0.26	0.22	0.22	0.10
K_{CARE}	0.15	0.14	0.15	0.11
CFD	0.04	0.05	0.06	0.10
HE1	0.04	0.06	0.16	0.10
HE2	0.04	0.06	0.07	0.09

465

In the comparison of unadjusted accumulation measurements with reference values (Fig. 12a7a), some values fall along the 1-to-1 line, while others are considerably lower. The values along the 1-to-1 line generally correspond to rain events with high precipitation fall velocity, or to events with low mean wind speeds. The RMSE for the unadjusted unshielded gauge measurements relative to the DFAR is 0.24 mm, with a bias error of -0.13 mm and correlation coefficient of 0.900 (Table 83).

470

Using the $K_{\text{Universal}}$ transfer function, with wind and temperature dependence, shifts the adjusted values up to and above the 1-to-1 line (Fig. 12b7b). This yields a positive bias error of 0.07 mm, reduced RMSE of 0.20 mm, and correlation coefficient of 0.949 (Table 83) relative to the unadjusted measurements (Fig. 12a7a). While the $K_{\text{Universal}}$ transfer function greatly reduces the RMSE for snow from 0.35 mm to 0.10 mm compared with unadjusted values, the RMSE is increased from 0.04 mm to 0.25 mm for rain, and from 0.15 mm to 0.33 mm for mixed precipitation (Table 10a5a). Compared with the unadjusted results,

475 RMSE increases for the $K_{\text{Universal}}$ function are also apparent for temperatures between -2 °C and 2 °C and between -5 °C and -2 °C (Table 40b5b), and for fall velocities greater than 1.5 m s⁻¹ (Table 40e5c).

480 Applying the site-specific K_{CARE} transfer function, based on the best-fit results to the CARE SPICE dataset, results in a reduced bias error of 0.002 mm, lower RMSE of 0.13 mm, and higher correlation coefficient of 0.963 (Table 83) relative to the $K_{\text{Universal}}$ results, with the scatter in adjusted accumulations more evenly balanced across the 1-to-1 line (Fig. 42e7c). The scatter in adjusted values using the K_{CARE} transfer function results primarily from mixed precipitation (Table 40a5a) at temperatures between -5 °C and -2 °C (Table 40b5b). Compared to the $K_{\text{Universal}}$ transfer function, the K_{CARE} transfer function has lower RMSE values for rain (0.14 mm) and mixed precipitation (0.22 mm), with 0.01 mm higher RMSE for undefined precipitation and snow (Table 40a5a). The more rapid increase in collection efficiency with temperature for K_{CARE} relative to $K_{\text{Universal}}$ reduces the overadjustment of some of the rain and mixed precipitation events at temperatures between -5 °C and -2 °C, at the expense of the underadjustment of some snow events in this temperature range. It is also worth noting that the adjusted precipitation accumulation RMSE for the K_{CARE} transfer function is larger than that for unadjusted results for rain and mixed precipitation, similar to the results for $K_{\text{Universal}}$. Both the $K_{\text{Universal}}$ and K_{CARE} transfer functions with temperature show signs of heteroscedasticity, with an increased spread of values with increasing magnitude of event precipitation accumulation.

490 Applying the CFD transfer function results in a greatly reduced spread of values about the 1-to-1 line (Fig. 42d7d). The spread does not appear to increase with increasing precipitation accumulation. The overall RMSE is reduced to 0.08 mm, 2.5 times lower than that for the $K_{\text{Universal}}$ transfer function, with a bias error of 0.011 mm and correlation coefficient of 0.986 (Table 83). The RMSE is reduced from 0.25 mm for the $K_{\text{Universal}}$ transfer function to 0.04 mm using the CFD transfer function for rain, and from 0.33 mm to 0.07 mm (4.7 times lower) for mixed precipitation, while RMSE results for undefined precipitation and snow are within 0.01 mm (Table 40a5a). Reductions in the RMSE using the CFD transfer function compared with the $K_{\text{Universal}}$ transfer function are most pronounced for mean event temperatures between -5 °C and 2 °C (Table 40b5b). Over this temperature range, rain, mixed precipitation, and snow may be present, corresponding to a wide range of fall velocities and collection efficiencies. The CFD transfer function is better able to distinguish among these precipitation types – and their respective collection efficiencies – based on its dependence on hydrometeor fall velocity. Across the fall velocity classifications in Table 40e5c, the RMSE using the CFD transfer function increases from 0.04 mm for fall velocities greater than 2.5 m s⁻¹ to 0.10 mm for fall velocities less than 1.5 m s⁻¹. As shown in Table 40e5c, the RMSE for the CFD transfer function matches the value for unadjusted measurements at fall velocities greater than 2.5 m s⁻¹, where collection efficiencies are close to 1. At lower fall velocities, where the bias due to gauge undercatch is more prevalent, the RMSE values for the CFD function are lower than those for the unadjusted measurements.

505 Using the HE1 transfer function results in similar overall improvement in the agreement between adjusted and DFAR accumulation values as observed for the CFD function (Fig. 42e7e). The adjusted values appear to be distributed symmetrically about the 1-to-1 line. Furthermore, there is close agreement over the full range of accumulation values; that is, the spread in values does not increase with the magnitude of precipitation accumulation. This results in a lower RMSE of 0.09 mm and a

higher correlation coefficient of 0.983 relative to the K_{CARE} transfer function results. While the RMSE for rain (0.04 mm) using the HE1 transfer function is improved compared with the K_{CARE} transfer function results, the RMSE for mixed precipitation is only marginally better (0.17 mm).

Applying the HE2 transfer function provides further improvement, with adjusted accumulation values more tightly clustered around the 1-to-1 line (Fig. 42f7f). The overall RMSE is 0.07 mm, which is 3.3 times lower than that for the unadjusted unshielded gauge measurements, and 1.8 times lower than the K_{CARE} transfer function based on mean event temperature and wind speed. The HE2 transfer function exhibits the lowest overall RMSE for snow (0.09 mm), with a RMSE of 0.09 mm for mixed precipitation, which is slightly higher than that for the CFD function (0.07 mm), but much lower than that for the K_{CARE} (0.22 mm) and HE1 (0.17 mm) transfer functions. Further, the correlation coefficient of 0.988 is the highest among the transfer functions assessed.

46 Discussion

4.1 CFD model

6.1 Modelling discussion

6.1.1 Fall velocity impacts on collection efficiency

The time averaged numerical model describes the three dimensional airflow around the unshielded Geonor gauge, including the updraft above the leading edge of the gauge orifice and downdraft at the back of the gauge orifice shown in previous studies (Thériault et al., 2012; Colli et al., 2016a; Baghapour et al., 2017). The updraft velocity increases sharply with height above the leading edge of the gauge orifice, which appears to play an important role in the horizontal spreading and capture of hydrometeors, particularly for lower fall velocity hydrometeors (Fig. 2). These velocities scale with the wind speed, as shown previously by Colli et al. (2016a), and the relative magnitudes of the wind speed and hydrometeor fall velocity influence the collection efficiency. The hydrometeor fall velocity influences both the free stream approach angle of hydrometeors before they encounter the local airflow around the gauge and the degree of coupling between the hydrometeor trajectories and the local airflow. Hydrometeors with fall velocities above 2 m s^{-1} fall more vertically, and their paths show less deviation with the updraft and local airflow around the gauge orifice (Fig. 2). Hydrometeors with lower fall velocities have a smaller approach angle and are more closely coupled to the local airflow around the gauge orifice.

The numerical results for this study are based on a 5 % inlet turbulence value that acts as a bulk turbulence in the atmosphere (Panofsky and Dutton, 1984) but may underestimate experimental results (Armitt and Counihan, 1968). A slip boundary condition was modelled at the surface following the approach of previous studies (Baghapour and Sullivan, 2017; Baghapour et al., 2017). Further study with a no-slip wall condition under different turbulence conditions could lead to further insights into the influence of turbulence intensity on precipitation gauge collection efficiency.

6.1.2 Collection efficiency based on wind speed and hydrometeor fall velocity

The numerical model results for monodispersed hydrometeors capture the three dimensional airflow and hydrometeor kinematics and illustrate the reductions in collection efficiency with increasing wind speed and decreasing hydrometeor fall velocity (Fig. 3). These results demonstrate that collection efficiencies are similar for different hydrometeor types with different sizes, densities, masses, and drag values (spherical drag model), but similar fall velocities. This enables the characterization of collection efficiency independent of hydrometeor characteristics other than fall velocity, allowing for the broad application of transfer functions with wind speed and fall velocity dependence to various hydrometeor types.

A slight nonlinearity in the collection efficiency relationship with wind speed is apparent in Fig. 3, with the collection efficiency decreasing more rapidly at lower wind speeds and more gradually at higher wind speeds. This wind speed dependence has been demonstrated in previous studies (Nešpor and Sevruk, 1999; Thériault et al., 2012; Colli et al., 2016a; Baghapour et al., 2017), and is generally attributed to the three dimensional velocity profile around the gauge influencing the trajectories and catchment of incoming hydrometeors. A strong nonlinear dependence on the hydrometeor fall velocity is apparent in Figs. 3 and 4. Hydrometeors with fall velocities above 5 m/s exhibit collection efficiencies close to 1, while lower hydrometeor fall velocities influence the rate of decrease of collection efficiency with wind speed. Collection efficiency decreases are most pronounced below 2.0 m/s hydrometeor fall velocity, where a wide range of collection efficiencies are possible. This demonstrates the challenge in adjusting liquid, solid, and mixed precipitation accumulations in situations where different hydrometeor types and sizes – and with very different fall velocities – can occur. These findings support the conclusions of Thériault et al. (2012), who demonstrated large collection efficiency differences across dry snow and wet snow hydrometeors with different terminal velocities. The present findings also support those of Nešpor and Sevruk (1999), who showed that the wind induced error increases rapidly for smaller raindrop sizes with lower terminal velocities. Elevated collection efficiencies for rain compared with wet snow above 4 m s^{-1} wind speed in Fig. 3 may be due to the higher density of rain relative to wet snow, with hydrometeor inertia playing a role at higher wind speeds. For dry snow with 1.0 m s^{-1} fall velocity, the collection efficiency decreases more rapidly relative to that for wet snow and rain hydrometeors with identical fall velocities above 3 m s^{-1} wind speed. A similar rapid decrease in collection efficiency for dry snow has been demonstrated by Colli (2016b). This decrease may be due to the limitations of the spherical hydrometeor model, which can overestimate hydrometeor volumes and buoyancies, particularly for non spherical hydrometeors. Further investigation with non spherical drag models is recommended as an area for future work.

565

6.1.3 Development of CFD transfer function

The CFD transfer function presented in Eq. 18 (coefficients in Table 5) is based on the computational fluid dynamics results for an unshielded Geonor T 200B3 600 mm capacity precipitation gauge for wind speeds up to 10 m s^{-1} . This transfer function provides a straightforward means of estimating the collection efficiency based on the wind speed and hydrometeor fall velocity.

570 In operational monitoring networks, the hydrometeor fall velocity can be provided by disdrometers (Löffler Mang and Joss, 2000; Sheppard and Joe, 2000; Bloemink and Lanzinger, 2005; Nitu et al., 2018), vertically pointing Doppler radars (Biral, 2019), or multi frequency radar techniques (Kneifel et al., 2015). Assessment of these techniques for the measurement of hydrometeor fall velocity is an area for future work.

575 The CFD transfer function captures well the nonlinear change in collection efficiency with wind speed and hydrometeor fall velocity observed in the numerical model results across rain, ice pellet, wet snow, and dry snow hydrometeor types (Fig. 3). This expression was derived from simulation results up to 10 m s^{-1} wind speed and should be used with caution at higher wind speeds. Further, this transfer function has not been assessed experimentally for snow above 6 m s^{-1} wind speed in the present 580 study for the CARE dataset. Adjusted precipitation accumulation estimates in this regime, where fall velocities are low and wind speeds are high, can be highly uncertain and should be treated with caution (Smith et al., 2020). Assessment of the transfer function at other sites under such conditions is an area for future work. Application to other gauge or shield combinations should also be investigated, as the flow dynamics around the gauge orifice are dependent on the specific gauge and shield geometry.

585 The fall velocity cutoff, shown in Fig. 4, corresponds to the fall velocity below which no hydrometeors are captured by the gauge for a given wind speed. In this case, the hydrometeors are unable to pass through the updraft region and local airflow around the gauge orifice to be captured by the gauge. As the wind speed increases, the fall velocity cutoff increases, and it becomes more difficult for hydrometeors to overcome the updraft velocity and local airflow and be captured. This has important consequences for the integral gauge collection efficiency, as hydrometeors below the fall velocity cutoff in the drop size distribution do not contribute to the total catchment. Previous studies have shown similar results with collection 590 efficiencies decreasing to zero below a given hydrometeor size for liquid (Nešpor and Sevruk, 1999) and solid hydrometeor types (Thériault et al., 2012; Colli et al., 2016).

The present formulation based on the fall velocity can be applied broadly across rain and snow types for the unshielded Geonor gauge configuration. These results are based on time averaged simulations, which provide an estimate of the mean velocities through the domain and have been shown to provide good overall agreement with experimental results (Baghapour et al., 2017). Further study using LES models, which can better resolve the eddy dynamics and temporal variations in the flow, and 595 under different boundary conditions and turbulence scales representing different site conditions is recommended to better understand the collection efficiency under conditions with high wind speeds and low hydrometeor fall velocities.

6.1.4 Application of CFD transfer function to hydrometeor size distributions

6.1.4.1 Wind speed dependence of integral collection efficiency

600 The integral collection efficiency decreases nonlinearly with wind speed depending on the hydrometeor type and fall velocity. Large differences in the integral collection efficiency dependence with wind speed are apparent across different hydrometeor types and intensities. Previous studies have shown similar differences across liquid (Nešpor and Sevruk, 1999; Jarraud, 2008)

and solid hydrometeor types (Colli et al., 2016b; Colli et al., 2020; Thériault et al., 2012). The fall velocities of snowflakes are generally smaller than those of raindrops; accordingly, the collection efficiency for snowfall at a given wind speed is lower than that for rainfall (Fig. 6). Similarly, dendrites have lower fall velocities than rimed dendrites and columns and plates, and lower collection efficiency.

The integral collection efficiency results decrease continuously with increasing wind speed as the magnitude of the updraft at the leading edge of the gauge increases, free stream hydrometeor trajectories decrease, and hydrometeors trajectories become more closely coupled with the local airflow around the gauge. For dendrites, the nonlinearity in the integral collection efficiency is more pronounced, as collection efficiencies decrease to small but finite values at higher wind speeds. This is due to the smaller number of hydrometeors with sufficient fall velocity to be captured by the gauge at higher wind speeds.

The differences in collection efficiency for different precipitation characteristics (type, habit, precipitation intensity) illustrate the large variability that can be expected when the characteristics or fall velocity are not considered. This variability presents a particular challenge for mixed precipitation conditions, in which the precipitation type may not be well defined and can change rapidly over time. The proposed expression for the collection efficiency as a function of the wind speed and hydrometeor fall velocity (Eq. 18) provides a means of estimating the collection efficiency over different hydrometeor types and intensities, even if the precipitation type is not well defined.

The integral collection efficiency results using the CFD transfer function developed in the present study show good overall agreement with the results of Colli et al. (2016b) for wet snow and dry snow, as shown in Fig. 6. Integral collection efficiency values in the present study are slightly higher than those of Colli et al. (2016b), attributed in part to the differences in the gauge geometry and hydrometeor drag model as discussed by Baghapour et al. (2017). The gauge geometry in the present study includes a refined orifice wall thickness and full length orifice extending down into the gauge housing (Fig. 1). The peak velocities above the gauge in the present study are similar to those observed by Baghapour et al. (2017), who also used a refined orifice wall thickness and observed reduced peak velocities compared to the results of Colli et al. (2016b). Increases in the velocity magnitude over the gauge would be expected to decrease the collection efficiency in a manner similar to that for increased wind speed; hence, the higher peak velocities above the gauge in the results of Colli et al. (2016b) provide one explanation for the lower collection efficiency values observed.

The use of a continuous collection efficiency expression with wind speed and fall velocity dependence enables the derivation of integral collection efficiencies over intermediate sizes and fall velocities in the hydrometeor size distribution. Collection efficiencies can be computed at intermediate wind speed values using this approach as well, providing the smooth integral collection efficiency curves shown in Fig. 6. Nešpor and Sevruk (1999) used a similar empirical approach for rain by developing an expression for the partial wind induced error based on free stream velocity and drop diameter applicable to Mk2, Hellman and ASTA gauges. The integral collection efficiency results of Colli et al. (2016b) were derived directly from numerical CE results for dry snow and wet snow at discrete sizes and wind speeds.

6.1.4.2 Precipitation intensity dependence of integral collection efficiency

635 Knowledge of the precipitation type, intensity, and wind speed can provide a means for adjusting gauge catchment totals. For rainfall, the precipitation intensity has been shown to be an important parameter for the estimation of integral collection efficiency (Nešpor and Sevruk, 1999; Jarraud, 2008). A gradual increase in integral collection efficiency with precipitation intensity is observed for intensity values above 1 mm h^{-1} in Fig. 7. Below this intensity, the integral collection efficiency decreases more rapidly, with the rate of decrease depending on the rainfall type and wind speed. This is in general agreement with the results of Nešpor and Sevruk as presented in Jarraud (2008), who showed a sharper increase in the conversion factor (inverse of integral collection efficiency) below 1 mm h^{-1} .

640 Integral collection efficiencies for snowfall also increase with precipitation intensity, as higher intensities correspond with larger numbers of hydrometeors with higher fall velocities and increased collection efficiencies, as shown by Colli et al. (2020). Integral collection efficiencies for snowfall can be much lower than for rain, depending on the wind speed. Differences are apparent across different snowfall crystal habits (e.g. dendrites vs. dendrites and aggregates of plates), with the magnitude of differences increasing with wind speed. This illustrates the difficulty of adjusting snowfall measurements if the crystal habit is not known. The range of possible integral collection efficiency values is even larger under conditions when solid, liquid, and mixed precipitation can all be present. An additional challenge is presented by the measurement of low precipitation intensities for snowfall, where accumulations can be small relative to gauge uncertainties due to environmental factors (e.g. 645 wind, temperature).

650

6.1.4.3 Hydrometeor fall velocity dependence of integral collection efficiency

655 Integral collection efficiency differences across precipitation types are much smaller when stratified by wind speed and hydrometeor fall velocity (Fig. 8) than when stratified by wind speed and precipitation intensity (Fig. 7) or by wind speed alone (Fig. 6). This results from the ability of the hydrometeor fall velocity to capture differences in the integral collection efficiency across different hydrometeor types and precipitation intensities. The small differences in collection efficiency across different hydrometeor types with the same fall velocity are attributed to the varying contribution from higher fall velocity hydrometeors, with collection efficiencies approaching 1, in the mass-weighted distribution of hydrometeor fall velocities. The results in Fig. 8 follow the general nonlinear profile of the CFD transfer function (Eq. 18, Fig. 4), with the hydrometeor fall velocity defining the integral collection efficiency magnitude for a given wind speed.

660 Measurements of fall velocity can be obtained using a number of methods (Sect. 6.1.3), and are increasingly available through the deployment of disdrometers in operational networks. These measurements provide an independent assessment of the hydrometeor fall velocity, and together with gauge height wind speed estimates, can enable the adjustment of gauge precipitation accumulation measurements using Eq. (18). Adjustments using this approach can be applied over a range of hydrometeor types and even when the hydrometeor type may be unknown or uncertain.

665 The numerical model results for monodispersed hydrometeors capture the three-dimensional airflow and hydrometeor kinematics and illustrate the reductions in collection efficiency with increasing wind speed and decreasing hydrometeor fall velocity (Fig. 2). These results demonstrate that collection efficiencies are similar for different hydrometeor types with different sizes, densities, masses, and drag values (spherical drag model), but similar fall velocities. This enables the characterization of collection efficiency independent of hydrometeor characteristics other than fall velocity, allowing for the
670 broad application of transfer functions with wind speed and fall velocity dependence to various hydrometeor types.

A slight nonlinearity in the collection efficiency relationship with wind speed is apparent in Fig. 2, with the collection efficiency decreasing more rapidly at lower wind speeds and more gradually at higher wind speeds. This wind speed dependence has been demonstrated in previous studies (Nešpor and Sevruk, 1999; Thériault et al., 2012; Colli et al., 2016a; Baghapour et al., 2017), and is generally attributed to the three-dimensional velocity profile around the gauge
675 influencing the trajectories and catchment of incoming hydrometeors. A strong nonlinear dependence on the hydrometeor fall velocity is apparent in Figs. 3 and 5. Hydrometeors with fall velocities above 5 m/s exhibit collection efficiencies close to 1, while lower hydrometeor fall velocities influence the rate of decrease of collection efficiency with wind speed. Collection efficiency decreases are most pronounced below 2.0 m/s hydrometeor fall velocity, where a wide range of collection efficiencies are possible. This demonstrates the challenge in adjusting liquid, solid, and mixed precipitation accumulations in
680 situations where different hydrometeor types and sizes – and with very different fall velocities – can occur. These findings support the conclusions of Thériault et al. (2012), who demonstrated large collection efficiency differences across dry snow and wet snow hydrometeors with different terminal velocities. The present findings also support those of Nešpor and Sevruk (1999), who showed that the wind-induced error increases rapidly for smaller raindrop sizes with lower terminal velocities.
Elevated collection efficiencies for rain compared with wet snow above 4 m s⁻¹ wind speed in Fig. may be due to the higher
685 density of rain relative to wet snow, with hydrometeor inertia playing a role at higher wind speeds. For dry snow with 1.0 m s⁻¹ fall velocity, the collection efficiency decreases more rapidly relative to that for wet snow and rain hydrometeors with identical fall velocities above 3 m s⁻¹ wind speed. A similar rapid decrease in collection efficiency for dry snow has been demonstrated by Colli (2016b). This decrease may be due to the limitations of the spherical hydrometeor model, which can overestimate hydrometeor volumes and buoyancies, particularly for non-spherical hydrometeors. Further investigation with
690 non-spherical drag models is recommended as an area for future work.

The CFD transfer function presented in Eq. 6 (coefficients in Table 1) is based on the computational fluid dynamics results for an unshielded Geonor T-200B3 600 mm capacity precipitation gauge for wind speeds up to 10 m s⁻¹. The CFD transfer function captures well the nonlinear change in collection efficiency with wind speed and hydrometeor fall velocity observed in the numerical model results across rain, ice pellet, wet snow, and dry snow hydrometeor types (Fig. 2). This expression was
695 derived from simulation results up to 10 m s⁻¹ wind speed and should be used with caution at higher wind speeds. Further, this transfer function has not been assessed experimentally for snow above 6 m s⁻¹ wind speed in the present study for the CARE dataset. Adjusted precipitation accumulation estimates in this regime, where fall velocities are low and wind speeds are high, can be highly uncertain and should be treated with caution (Smith et al., 2020). Assessment of the transfer function at other

700 sites under such conditions is an area for future work. Application to other gauge or shield combinations should also be investigated, as the flow dynamics around the gauge orifice are dependent on the specific gauge and shield geometry. The fall velocity cutoff, shown in Fig. , corresponds to the fall velocity below which no hydrometeors are captured by the gauge for a given wind speed. In this case, the hydrometeors are unable to pass through the updraft region and local airflow around the gauge orifice to be captured by the gauge. As the wind speed increases, the fall velocity cutoff increases, and it becomes more difficult for hydrometeors to overcome the updraft velocity and local airflow and be captured. This has important 705 consequences for the integral gauge collection efficiency, as hydrometeors below the fall velocity cutoff in the drop size distribution do not contribute to the total catchment. Previous studies have shown similar results with collection efficiencies decreasing to zero below a given hydrometeor size for liquid (Nešpor and Sevruk, 1999) and solid hydrometeor types (Thériault et al., 2012; Colli et al., 2016).

710 The present CFD transfer function formulation based on the fall velocity can be applied broadly across rain and snow types for the unshielded Geonor gauge configuration. These results are based on time-averaged simulations, which provide an estimate of the mean velocities through the domain and have been shown to provide good overall agreement with experimental results (Baghapour et al., 2017). Further study using LES models, which can better resolve the eddy dynamics and temporal variations in the flow, and under different boundary conditions and turbulence scales representing different site conditions is recommended to better understand the collection efficiency under conditions with high wind speeds and low hydrometeor fall 715 velocities.

720 Integral collection efficiency differences across precipitation types are small when stratified by wind speed and hydrometeor fall velocity (Fig. 5). This results from the ability of the hydrometeor fall velocity to capture differences in the integral collection efficiency across different hydrometeor types and precipitation intensities. The small differences in collection efficiency across different hydrometeor types with the same fall velocity are attributed to the varying contribution from higher fall velocity hydrometeors, with collection efficiencies approaching 1, in the mass-weighted distribution of hydrometeor fall 725 velocities. The results in Fig. 5 follow the general nonlinear profile of the CFD transfer function (Eq. 6, Fig. 4), with the hydrometeor fall velocity defining the integral collection efficiency magnitude for a given wind speed. Results for the same wind speed range and precipitation types that are stratified by wind speed and precipitation intensity, and by wind speed alone, are provided in Section S2.2 and discussed in Section S3.2; these results show much larger variability across hydrometeor types relative to those in Fig. 5.

6.2 Experimental discussion4.2. Assessment of transfer functions

730 Transfer functions were derived using accumulated precipitation amounts reported by automatic weighing precipitation gauges over 30 minute periods. This approach is consistent with that used in SPICE (Nitu et al., 2018) and the related derivation of transfer functions (Kochendorfer et al., 2017a). While automatic precipitation gauges can report at a temporal resolution of

one minute, or even higher, the extension of the transfer function derivation and evaluation to other temporal periods, or different accumulation thresholds, is beyond the scope of this work.

The Kochendorfer et al. (2017a) universal transfer function with wind speed and air temperature dependence, $K_{\text{Universal}}$, was derived from measurements at eight SPICE sites in the interest of making the transfer function broadly applicable across different climates. This broad applicability is furthered by the widespread availability of air temperature and wind speed measurements at meteorological stations. Recent studies have demonstrated that the performance of $K_{\text{Universal}}$ can vary substantially by site (Smith et al., 2020). Therefore, climate-specific K_{CARE} transfer function coefficients were also derived for comparison in the present study.

The K_{CARE} transfer function has a lower temperature threshold and exhibits larger increases in collection efficiency with increasing temperature relative to $K_{\text{Universal}}$ (Fig. 11a6a). These differences improved the overall RMSE for K_{CARE} by reducing the over-adjustment of some rain and mixed precipitation events; however, this improvement came at the expense of under-adjusting some snow events at warmer temperatures. The use of this approach warrants further study over longer periods to better understand the performance impacts of seasonal variability and assessment at other sites and climate regions with different precipitation characteristics and proportions.

Both the $K_{\text{Universal}}$ and K_{CARE} transfer functions performed well for snow, but were limited by their ability to distinguish among snow, rain, and mixed precipitation at temperatures between -5°C and 2°C . The largest uncertainties in collection efficiency and adjusted accumulation estimates were observed over this temperature range. Adjustments using wind speed and hydrometeor fall velocity, however, addressed this shortcoming and provided improved collection efficiency and adjusted accumulation estimates. The CFD transfer function, derived from time-averaged numerical simulation results over a wide range of wind speeds and hydrometeor fall velocities, resulted in low RMSE values overall and across rain, snow, mixed, and undefined precipitation types. These results reinforce the fundamental importance of both wind speed and hydrometeor fall velocity on gauge collection efficiency demonstrated by the CFD model results and results from earlier studies (Nešpor and Sevruk, 1999; Thériault et al., 2012).

The CFD transfer function exhibited the lowest RMSE of all transfer functions for mixed precipitation and for intermediate fall velocities between 1.5 m s^{-1} to 2.5 m s^{-1} (Table 9e4c), which is attributed to its nonlinear increase in collection efficiency with fall velocity. As this transfer function was derived theoretically, it is applicable across different sites and climate regimes with different types and relative proportions of hydrometeors. The present results also support the methodology for the CFD model, which can be extended to other shield and gauge combinations. For larger shields, it may be important to employ a more realistic vertical wind profile, with a zero-slip boundary condition at the earth's surface.

The HE1 transfer function showed good results for snow, supporting its use for the unshielded gauge. This approach is straightforward to implement based on its simplicity, and is less reliant on the accuracy of fall velocity estimates beyond the fall velocity threshold. The collection efficiency for the HE1 transfer function decreases to 0.2 at a wind speed of 5.75 m s^{-1} . This demonstrates the challenge of adjusting unshielded gauge snow measurements at windy sites, where the captured accumulations may be small relative to gauge uncertainties. This can lead to large uncertainty in adjusted measurements, as

765 demonstrated by other studies applying transfer functions to unshielded gauge measurements at windy sites (Smith et al., 2020). The CFD transfer function results suggest a gradual decrease in collection efficiency at higher wind speeds compared with the HE1 transfer function, as some hydrometeors with higher fall velocities are still able to be captured by the gauge; however, these accumulations remain small relative to gauge uncertainties, particularly in windy conditions, making them difficult to assess experimentally. Further testing at other sites is recommended to better understand the collection efficiency
770 for low fall velocity hydrometeors (light snow) under windy conditions above 6 m s^{-1} , which were not available in the CARE dataset.

A limitation of the HE1 transfer function is the minimal improvement in the RMSE for mixed precipitation and fall velocities between 1.5 m s^{-1} to 2.0 m s^{-1} relative to the K_{CARE} function. This is due to the over-adjustment of mixed precipitation events with fall velocities slightly below the cutoff value, and the under-adjustment of mixed precipitation events with fall velocities
775 slightly above the cutoff. While the RMSE for mixed precipitation is still lower than that for adjustments based on temperature and wind speed ($K_{\text{Universal}}$, K_{CARE}), further improvements are obtained by using transfer functions with continuous fall velocity dependence; specifically, the CFD and HE2 transfer functions.

The HE2 transfer function, with a linear increase in collection efficiency with fall velocity, yields a greater reduction in the RMSE for mixed precipitation relative to the HE1 transfer function. The HE2 transfer function results show a higher RMSE
780 for mixed precipitation than those for the CFD function, possibly due to the nonlinearity in the latter with fall velocity. The HE2 transfer function, however, yields the best RMSE results for snow, temperatures below $-5 \text{ }^{\circ}\text{C}$, and fall velocities below 1.5 m s^{-1} . Adjusted uncertainties for snow are approximately two times higher than those for rain, and show similar trends with increasing temperature and decreasing fall velocity. The former may be due to the lower event accumulations and greater
785 adjustments for snow relative to rain, with measured values in closer proximity to the gauge uncertainty. The present approach of estimating the fall velocity using the POSS appears to perform well, overall; however, further study to better characterize the fall velocity distribution and changes over 30-minute time periods could lead to further improvements in the model under specific conditions such as mixed precipitation. While this transfer function was derived using the CARE dataset, it is more universally applicable than adjustments based on temperature, for which the relative proportions of rain, snow, and mixed precipitation at warmer temperatures can influence fit results. Further testing at other sites is recommended to assess this in
790 different climate regions, with different hydrometeor types and associated fall velocities.

6.34.13 Application to operational networks

It is evident that the performance of catchment-type precipitation gauges is dependent on wind speed and the aerodynamic properties of both the gauge and incident hydrometeors (Nešpor and Sevruk, 1999; Thériault et al., 2012; Colli et al., 2016b). The modelling results of this study demonstrated this dependence from a theoretical perspective, resulting in a transfer function
795 that incorporates hydrometeor fall velocity. The experimental results validated this approach, which resulted in improved precipitation estimates from an unshielded gauge relative to those using surface temperature as a proxy for precipitation phase

or type. Indeed, the use of surface temperature in this manner can be instructive (Kienzle, 2008; Harder and Pomeroy, 2013), but does not capture the conditions defining hydrometeor initiation and growth aloft (Stewart et al., 2015).

In this study, the fall velocity of hydrometeors reported by the POSS provided direct measurement of a key parameter related to the aerodynamics of the catchment process. In Canada, the POSS was deployed operationally to report present weather as

800 part of an automatic weather station. In operational monitoring networks, the hydrometeor fall velocity can be provided by disdrometers (Löffler-Mang and Joss, 2000; Sheppard and Joe, 2000; Bloemink and Lanzinger, 2005; Nitu et al., 2018), vertically pointing Doppler radars (Biral, 2019), or multi-frequency radar techniques (Kneifel et al., 2015). Globally, other types of disdrometers (e.g. OTT Parsivel², Thies Laser Precipitation Monitor) have been deployed operationally and can also 805 provide hydrometeor fall velocities. The uncertainty in fall velocity estimates for different technologies, hydrometeor types, sizes, fall velocities, wind speeds, and wind directions remains to be assessed. These sensors can also be useful for reporting present weather and verifying the occurrence of precipitation based on their high sensitivity (Nitu et al., 2018; Sheppard and Joe, 2000).

The results from this study demonstrate that the combined use of accumulation reports from an unshielded weighing gauge 810 with fall velocities reported by a disdrometer, wind speed measurements, and an appropriate transfer function can greatly reduce the uncertainty of precipitation accumulation measurements. The extension of the approach in the present study to shielded precipitation gauges or gauge designs with higher sensitivity may provide a means of further reducing the measurement uncertainty for automatic gauges in windy environments. Application to light snow events and different event durations are other areas for future study.

815 **7-5 Conclusions**

Hydrometeors exhibit a wide variety of habits, sizes, shapes, and densities, influencing their aerodynamics and, in turn, their 820 ability to be captured by the gauge. Numerical modelling analysis for an unshielded Geonor T-200B3 600 mm precipitation gauge demonstrated that collection efficiencies are similar for different hydrometeor types with different sizes, densities, masses, and drag values, but similar fall velocities. The model results illustrated that wind speed influences the updraft magnitude and local airflow around the gauge orifice, while fall velocity affects the approach angle and degree of coupling between the hydrometeor trajectories and the local airflow. An empirical collection efficiency transfer function with wind speed and fall velocity dependence was developed from the model results. Two additional transfer functions with similar dependence were derived experimentally for unshielded Geonor T-200B3 precipitation gauges.

These three collection efficiency transfer functions with gauge height wind speed and precipitation fall velocity dependence 825 were assessed experimentally and compared to universal and climate-specific transfer functions with wind speed and temperature dependence. These functions employ different models to adjust precipitation accumulation measurements for wind-induced undercatch, including:

(1) The nonlinear CFD transfer function model [presented in Sect. 3S1](#), with collection efficiency decreasing nonlinearly with wind speed and increasing nonlinearly with precipitation fall velocity;

830 (2) The HE1 transfer function, with a linear decrease in collection efficiency down to 0.2 with wind speed for 30-minute mean fall velocity below 1.93 m s^{-1} , and a collection efficiency of 1 above this fall velocity threshold;

(3) The HE2 transfer function, with the linear wind speed dependence down to 0.2 collection efficiency, transitioning with increasing mode fall velocity to provide a collection efficiency of 1 when the mode fall velocity reaches 2.81 m s^{-1} .

These transfer functions were assessed using accumulation measurements from an unshielded precipitation gauge and DFAR gauge over 30-minute precipitation events during two winter seasons at the CARE test site in Egbert, ON, Canada. Estimates of fall velocity were provided by the POSS upward-facing Doppler radar.

The transfer functions with mean wind speed and fall velocity dependence improved the agreement between the 30-minute adjusted precipitation accumulation values and DFAR reference values relative to the $K_{\text{Universal}}$ and K_{CARE} transfer functions with mean wind speed and air temperature dependence. The CFD transfer function agreed well with experimental results over all observed fall velocities, supporting the use of the numerical modelling approach and providing the lowest RMSE for mixed precipitation. The HE1 transfer function captured the collection efficiency trends for rain and snow well, with the collection efficiency for rain close to 1 and the collection efficiency for snow decreasing with wind speed. The HE2 transfer function better captured the collection efficiency for mixed precipitation with fall velocities between 1.2 m s^{-1} to 4.6 m s^{-1} .

The results of this study reinforce the important role of fall velocity on collection efficiency shown in previous studies (Nešpor and Sevruk, 1999; Thériault et al., 2012). Adjustment approaches incorporating fall velocity show tremendous value and potential, particularly where DFAR measurements are not feasible, and can be applied where the precipitation type is complex (e.g. snow transitioning to rain), uncertain, or even unknown. These approaches warrant further investigation at different sites with different precipitation characteristics, fall velocities, and wind speeds. Further study to assess the collection efficiency relationships with wind speed and precipitation fall velocity for different shield configurations, as well as assessing the fall velocity using other means, including disdrometers or remote sensing, is also recommended.

Disclaimer. Many of the results presented in this work were obtained as part of the Solid Precipitation Intercomparison Experiment (SPICE) conducted on behalf of the World Meteorological Organization (WMO) Commission for Instruments and Methods of Observation (CIMO). The POSS was not included as part of the SPICE intercomparison. The analysis and views described herein are those of the authors, and do not represent the official outcome of WMO-SPICE. Mention of commercial companies or products is solely for the purposes of information and assessment within the scope of the present work, and does not constitute a commercial endorsement of any instrument or instrument manufacturer by the authors or the WMO.

Author contribution. J.H. was the lead author and was responsible for the CFD analysis, methodology, analysis, visualization, and manuscript preparation and editing. M.E.E. provided guidance for the methodology, analysis, visualization, and writing –

review and editing. P.I.J. provided guidance for the analysis, interpretation of results, visualization, and writing – review and editing. P.E.S. provided guidance for the analysis, interpretation of results, and writing – review and editing.

Acknowledgements. The authors would like to acknowledge the encouragement and support of Rodica Nitu for this field of study. Thank-you to Christine Best, Pierrette Blanchard, and Sorin Pinzariu for supporting this work and Brian Sheppard for helpful discussions regarding the POSS. Thank-you to Hagop Mouradian, Sorin Pinzariu, and Lillian Yao for the data logger programming, electrical wiring, site maintenance, data ingest, and quality control for the CARE test site. The authors would also like to thank the WMO-SPICE team for their contributions and for discussions inspiring many facets of this work. We also thank John Kochendorfer and the anonymous reviewers for providing thoughtful reviews of the original version of this manuscript, and greatly improving the quality of this paper.

Data availability. The unshielded and reference event accumulations, wind speed, temperature, mean and mode fall velocity, and precipitation type data used in this study will be made available in a suitable online repository. The flow simulation and collection efficiency results from this study shown in Figs. 1, 2, 3, 5, 7, S3, and S5 S3, S5, S6, S7, and S8 will be made available in a suitable online repository.

Competing interests. The authors declare that they have no conflict of interest.

References

Armitt, J., and Counihan, J.: The simulation of the atmospheric boundary layer in a wind tunnel, *Atmospheric Environment*, 2, 49-71, [https://doi.org/10.1016/0004-6981\(68\)90019-x](https://doi.org/10.1016/0004-6981(68)90019-x), 1968.

Baghapour, B., and Sullivan, P. E.: A CFD study of the influence of turbulence on undercatch of precipitation gauges, *Atmospheric Research*, 197, 265-276, <https://doi.org/10.1016/j.atmosres.2017.07.008>, 2017.

Baghapour, B., Wei, C., and Sullivan, P. E.: Numerical simulation of wind-induced turbulence over precipitation gauges, *Atmospheric Research*, 189, 82-98, <https://doi.org/10.1016/j.atmosres.2017.01.016>, 2017.

Biral micro rain radar: <https://www.biral.com/product/micro-rain-radar/>, access: June 25, 2019, 2019.

Bloemink, H. J. I., and Lanzinger, E.: Precipitation type from Thies disdrometers, Bucharest, Romania, 4-7, 2005.

Canada: Precipitation Occurrence Sensor System (POSS) Technical Manual, Environment Canada, 1995.

Chubb, T., Manton, M. J., Siems, S. T., Peace, A. D., and Bilish, S. P.: Estimation of wind-induced losses from a precipitation gauge network in the Australian Snowy Mountains, *Journal of Hydrometeorology*, 16, 2619-2638, <https://doi.org/10.1175/JHM-D-14-0216.1>, 2015.

Colli, M.: Assessing the accuracy of precipitation gauges: a CFD approach to model wind induced errors, PhD, Department of Civil, Chemical and Environmental Engineering, University of Genova, 2014.

Colli, M., Lanza, L. G., Rasmussen, R., and Thériault, J. M.: A CFD Evaluation of wind induced errors in solid precipitation measurements, TECO 2014, St. Petersburg, Russia, 2014.

Colli, M., Rasmussen, R., Thériault, J. M., L.G., L., Baker, B., and Kochendorfer, J.: An improved trajectory model to evaluate the collection performance of snow gauges, *J. App. Met. & Clim.*, 54, 1826-1836, <https://doi.org/10.1175/JAMC-D-15-0035.1>, 2015.

Colli, M., Lanza, L. G., Rasmussen, R., and Thériault, J. M.: The collection efficiency of shielded and unshielded precipitation gauges. Part I: CFD airflow modeling, *J. Hydromet.*, 17, 231-243, <https://doi.org/10.1175/JHM-D-15-0010.1>, 2016a.

Colli, M., Lanza, L. G., Rasmussen, R., and Thériault, J. M.: The collection efficiency of shielded and unshielded precipitation gauges. Part II: Modeling particle trajectories., *J. Hydromet.*, 17, 245-255, <https://doi.org/10.1175/JHM-D-15-0011.1>, 2016b.

900 Colli, M., Stagnaro, M., Lanza, L. G., Rasmussen, R., and Thériault, J. M.: Adjustments for Wind-Induced Undercatch in Snowfall Measurements Based on Precipitation Intensity, *Journal of Hydrometeorology*, 21, 1039-1050, <https://doi.org/10.1175/JHM-D-19-0222.1>, 2020.

Constantinescu, G. S., Krajewski, W. F., Ozdemir, C. E., and Tokyay, T.: Simulation of airflow around rain gauges: comparison of LES and RANS models, *Adv. Water Resour.*, 30, 43-58, <https://doi.org/10.1016/j.advwatres.2006.02.011>, 2007.

905 Goodison, B. E.: Accuracy of Canadian snow gauge measurements, *Journal of Applied Meteorology*, 17, 1542-1548, [https://doi.org/10.1175/1520-0450\(1978\)017<1542:AOCSGM>2.0.CO;2](https://doi.org/10.1175/1520-0450(1978)017<1542:AOCSGM>2.0.CO;2), 1978.

Goodison, B. E., Louie, P. Y. T., and Yang, D.: WMO solid precipitation measurement intercomparison WMO/TD 872, 1998.

Gunn, K. L. S., and Marshall, J. S.: The distribution with size of aggregate snowflakes, *Journal of Meteorology*, 15, 452-461, [https://doi.org/10.1175/1520-0469\(1958\)015<0452:TDWSOA>2.0.CO;2](https://doi.org/10.1175/1520-0469(1958)015<0452:TDWSOA>2.0.CO;2), 1957.

910 Harder, P., and Pomeroy, J.: Estimating precipitation phase using a psychrometric energy balance method, *Hydrological Processes*, 1901-1914, 10.1002/hyp.9799, 2013.

Henderson, C. B.: Drag coefficients of spheres in continuum and rarefied flows, *American Institute of Aeronautics & Astronautics Journal*, 14, 707-708, <https://doi.org/10.2514/3.61409>, 1976.

Jarraud, M.: Guide to meteorological instruments and methods of observation, World Meteorological Organization, Geneva, Switzerland, 915 2008.

Kato, M., and Launder, B.: The modelling of turbulent flow around stationary and vibrating square cylinders, *Ninth Symposium of Turbulent Shear Flows*, Kyoto, Japan, 1993.

Khvorostyanov, V. I., and Curry, J. A.: Fall velocities of hydrometeors in the atmosphere: refinements to a continuous analytical power law, *Journal of Atmospheric Sciences*, 62, 4343-4357, <https://doi.org/10.1175/JAS3622.1>, 2005.

920 Kienzle, S. W.: A new temperature based method to separate rain and snow, *Hydrological Processes*, 5067-5085, 10.1002/hyp.7131, 2008.

Kneifel, S., Von Lerber, A., Tiira, J., Moisseev, D., Kol-lias, P., and Leinonen, J.: Observed relations between snowfall microphysics and triple-frequency radar measurements, *J. Geophys. Res.-Atmos.*, 120, 6034-6055, <https://doi.org/10.1002/2015JD023156>, 2015.

925 Kochendorfer, J., Nitu, R., Wolff, M., Mekis, E., Rasmussen, R., Baker, B., Earle, M. E., Reverdin, A., Wong, K., Smith, C. D., Yang, D., Roulet, Y.-A., Buisan, S., Laine, T., Lee, G., Aceituno, J. L. C., Alatrue, J., Isaksen, K., Meyers, T., Brækkan, R., Landolt, S., Jachcik, A., and Poikonen, A.: Analysis of single-Alter-shielded and unshielded measurements of mixed and solid precipitation from WMO-SPICE, *Hydrol. Earth Syst. Sci.*, 21, 3525-3542, <https://doi.org/10.5194/hess-21-3525-2017>, 2017a.

Kochendorfer, J., Rasmussen, R., Wolff, M., Baker, B., Hall, M. E., Meyers, T., Landolt, S., Jachcik, A., Isaksen, K., Braekkan, R., and Leeper, R.: The quantification and correction of wind-induced precipitation measurement errors, *Hydrol. Earth Syst. Sci.*, 1793-1989, <https://doi.org/10.5194/hess-21-1973-2017>, 2017b.

930 Kochendorfer, J., Nitu, R., Wolff, M., Mekis, E., Rasmussen, R., Baker, B., M.E., E., Reverdin, A., Wong, K., Smith, C. D., Yang, D., Roulet, Y.-A., Meyers, T., Buisan, S., Isaksen, K., Braekkan, R., Landolt, S., and Jachcik, A.: Testing and development of transfer functions for weighing precipitation gauges in WMO-SPICE, *Hydrol. Earth Syst. Sci.*, 22, 1437-1452, <https://doi.org/10.5194/hess-22-1437-2018>, 2018.

Koltzow, M., Casati, B., Haiden, T., and Valkonen, T.: Verification of solid precipitation forecasts from numerical weather prediction models in Norway, *Weather and Forecasting*, <https://doi.org/10.1175/WAF-D-20-0060.1>, 2020.

935 Langleben, M. P.: The terminal velocity of snowflakes, *Quarterly Journal of the Royal Meteorological Society*, 80, 174-181, <https://doi.org/10.1002/qj.49708034404>, 1954.

Löffler-Mang, M., and Joss, J.: An optical distrometer for measuring size and velocity of hydrometeors, *JOAT*, 130-139, [https://doi.org/10.1175/1520-0426\(2000\)017<0130:AODFMS>2.0.CO;2](https://doi.org/10.1175/1520-0426(2000)017<0130:AODFMS>2.0.CO;2), 2000.

940 Nešpor, V., and Sevruk, B.: Estimation of wind-induced error of rainfall gauge measurements using a numerical simulation, *Journal of Atmospheric & Oceanic Technology*, 16, 450-464, [https://doi.org/10.1175/1520-0426\(1999\)016<0450:EOWIEO>2.0.CO;2](https://doi.org/10.1175/1520-0426(1999)016<0450:EOWIEO>2.0.CO;2), 1999.

Nitu, R., Roulet, Y.-A., Wolff, M., Earle, M., Reverdin, A., Smith, C., Kochendorfer, J., Morin, S., Rasmussen, R., Wong, K., Alastraue, J., Arnold, L., Baker, B., Buisán, S., Collado, J. L., Colli, M., Collins, B., Gaydos, A., Hannula, H.-R., Hoover, J., Joe, P., Kontu, A., Laine, T., Lanza, L., Lanzinger, E., Lee, G., Lejeune, Y., Leppänen, L., Mekis, E., Panel, J.-M., Poikonen, A., Ryu, S., Sabatini, F., Theriault, J., Yang, D., Genthon, C., Heuvel, F. v. d., Hirasawa, N., Konishi, H., Nishimura, K., and Senese, A.: WMO Solid Precipitation Intercomparison Experiment (SPICE), *World Meteorological Organization* 131, 2018.

Panofsky, H. A., and Dutton, J. A.: Atmospheric turbulence: models and methods for engineering applications, Wiley-Interscience, 1984.

950 Rasmussen, R., Baker, B., Kochendorfer, J., Meyers, T., Landolt, S., Fischer, A. P., Black, J., Theriault, J. M., Kucera, P., Gochis, D., Smith, C., Nitu, R., Hall, M., Ikeda, K., and Gutmann, E.: How well are we measuring snow: the NOAA/FEE/NCAR winter precipitation test bed, BAMS, <http://dx.doi.org/10.1175/BAMS-D-11-00052.1>, 2012.

Sheppard, B. E.: Measurement of raindrop size distributions using a small Doppler radar, *J. Atmos. Oceanic Technol.*, 7, 255-268, [https://doi.org/10.1175/1520-0426\(1990\)007<0255:MORSDU>2.0.CO;2](https://doi.org/10.1175/1520-0426(1990)007<0255:MORSDU>2.0.CO;2), 1990.

Sheppard, B. E., and Joe, P. I.: Comparison of raindrop size distribution measurements by a Joss-Waldvogel disdrometer, a PMS 2DG spectrometer, and a POSS dopler radar, *J. Atmos. Oceanic Technol.*, 11, 874-887, [https://doi.org/10.1175/1520-0426\(1994\)011<0874:CORSDM>2.0.CO;2](https://doi.org/10.1175/1520-0426(1994)011<0874:CORSDM>2.0.CO;2), 1994.

Sheppard, B. E., Joe, P., Oleskiw, M., and Kouwen, N.: Quantitative measurement of snow mass concentration using the POSS, Conf. on Observations and Instrumentation, Charlotte, NC, 1995.

Sheppard, B. E., and Joe, P. I.: Automated precipitation detection and typing in winter: a two-year study, *J. Atmos. Oceanic Technol.*, 17, 1493-1507, [https://doi.org/10.1175/1520-0426\(2000\)017<1493:APDATI>2.0.CO;2](https://doi.org/10.1175/1520-0426(2000)017<1493:APDATI>2.0.CO;2), 2000.

960 Sheppard, B. E.: Sampling errors in the measurement of rainfall parameters using the Precipitation Occurrence Sensor System (POSS), *J. Atmos. Oceanic Technol.*, 24, 125-140, <https://doi.org/10.1175/JTECH1956.1>, 2007.

Sheppard, B. E., and Joe, P. I.: Performance of the Precipitation Occurrence Sensor System as a Precipitation Gauge, *Journal of Atmospheric & Oceanic Technology*, 25, <https://doi.org/10.1175/2007JTECHA957.1>, 2008.

965 Smith, C. D., Ross, A., Kochendorfer, J., Earle, M. E., Wolff, M., Buisan, S., Roulet, Y.-A., and Laine, T.: Evaluation of the WMO Solid Precipitation Intercomparison Experiment (SPICE) transfer functions for adjusting the wind bias in solid precipitation measurements, *Hydrol. Earth Syst. Sci.*, 24, 4025-4043, <https://doi.org/10.5194/hess-24-4025-2020>, 2020.

SolidWorks: Enhanced turbulence modeling in SolidWorks flow simulation, USAMKTURBMODWPENG0313, 2013.

SolidWorks: SolidWorks Flow Simulation Technical Reference, 2019.

970 Stewart, R. E., Thériault, J. M., and Henson, W.: On the characteristics of and processes producing winter precipitation types near 0C, *Bull. Amer. Meteor. Soc.*, 96, 623-639, <https://doi.org/10.1175/BAMS-D-14-00032.1>, 2015.

Thériault, J. M., Rasmussen, R., Ikeda, K., and Landolt, S.: Dependence of Snow Gauge Collection Efficiency on Snowflake Characteristics, *Journal of Applied Meteorology & Climatology*, 51, <https://doi.org/10.1175/JAMC-D-11-0116.1>, 2012.

975 Thériault, J. M., Rasmussen, R., Petro, E., Trépanier, J.-Y., Colli, M., and Lanza, L. G.: Impact of wind direction, wind speed, and particle characteristics on the collection efficiency of the double fence intercomparison reference, *Journal of Applied Meteorology and Climatology*, 54, 1918-1930, <https://doi.org/10.1175/JAMC-D-15-0034.1>, 2015.

Ulbrich, C. W.: Natural variations in the analytical form of the raindrop size distribution, *Journal of Climate and Applied Meteorology*, 22, 1764-1775, [https://doi.org/10.1175/1520-0450\(1983\)022<1764:NVITAF>2.0.CO;2](https://doi.org/10.1175/1520-0450(1983)022<1764:NVITAF>2.0.CO;2), 1983.

980 Wolff, M. A., Isaksen, K., Petersen-Øverleir, A., Ødemark, K., Reitan, T., and Brækkan, R.: Derivation of a new continuous adjustment function for correcting wind-induced loss of solid precipitation: results of a Norwegian field study, *Hydrol. Earth Syst. Sci.*, 19, 951-967, <https://doi.org/10.5194/hess-19-951-2015>, 2015.

Yang, D., Goodison, B. E., Metcalfe, J. R., Golubev, V. S., Bates, R., Pangburn, T., and Hanson, C. L.: Accuracy of NWS 8" standard nonrecording precipitation gauge: results and application of WMO intercomparison, *Journal of Atmospheric & Oceanic Technology*, 15, 54-68, [https://doi.org/10.1175/1520-0426\(1998\)015<0054:AONSNP>2.0.CO;2](https://doi.org/10.1175/1520-0426(1998)015<0054:AONSNP>2.0.CO;2), 1998.