

Reviewer #1 comment:

This study presents a novel yet low-cost bottom-mounted float Mini Buoy that can be used to monitor tidal inundation characteristics and current velocities based on the single-axis equilibrium acceleration principle. As far as I know, the facility is particularly useful for deriving the key parameters such as submersion time and current velocities, which can further be used for hydrodynamics analysis and mangrove restoration planning. Generally, this is a good study and I read it with great interests.

Author reply: We would like to thank the reviewer for their time and valuable comments. We have addressed them individually below.

1) I would suggest the authors to reshape the paper structure in order to improve the readability. Specifically, the different subsections in the Introduction part can be integrated to highlight the studied topic, the existing problem and the solution etc.

Author's reply: In this manuscript we have tried to achieve a balance between introducing a new method and discussing two case studies which may have led to a less integrated structure in the introduction. We have addressed this by restructuring the introduction and adding a new section 1.2 more specifically on mangrove restoration and aquaculture ponds LL 46-58.

'1.2 Hydrological and hydrodynamic bottlenecks to mangrove restoration

Assessing the the local hydrology prior to mangrove restoration is needed to determine whether conditions are too harsh for seedlings to survive and need to be mitigated (Albers and Schmitt, 2015) or whether insufficient flooding may lead to hypersalinity or succession towards terrestrial plant communities (Lewis, 2005). One of the main reasons for mangrove deforestation in the past, and hence one of the major opportunities for mangrove restoration today, are aquaculture ponds (Dale et al., 2014; Primavera and Esteban, 2008). Breaching the embankments of such ponds, built within previous mangrove forests, is an effective way to restore mangrove forests. However, previous excavation of sediment and altered tidal channels and remaining weirs may have altered the hydrology. Hence spatially explicit monitoring of inundation durations are required prior to attempting mangrove restoration (Dale et al., 2014). Especially stagnant water and inhibited drainage can locally create restoration bottlenecks in abandoned tidal pond complexes. At hydrodynamically exposed sites, where current velocities are able to dislodge recently rooted mangrove propagules, inundation free periods of several days provide a Window of Opportunity (WoO) to surpass critical establishment thresholds (Balke et al., 2011, 2014). WoO are particularly important to assess in unassisted restoration projects to predict suitability for natural colonization by mangrove pioneer species.'

With regard to the Method part, I would suggest the authors to separate the 'Field sites', while the rest parts were used to detail the adopted facility and how the results were generated.

Author reply: We have now explicitly separated the Indonesian field sites into 'Short-term deployment sites' and 'Long-term deployment sites'.

Finally, the Discussion part is rather long, while the Conclusions part is missing.

Author reply: We have moved the final part of the discussion into a separate conclusions paragraph and further changed the text to provide more relevant closing statement as suggested by reviewer #2 LL 640-651.

'4 Conclusions

With this study we were able to show that low-cost monitoring of hydrological conditions in intertidal environments (inundation and current velocities) across multiple spring-neap tidal cycles is possible using single axis accelerometer technology and readily available materials for an underwater float (i.e. the Mini Buoy). Whereas this approach can be a useful tool in coastal research, we especially highlight the Mini Buoy as a stand-alone tool for easy-to-implement hydrological site suitability assessments prior to mangrove restoration. The Mini Buoy can be globally implemented as a standard for mangrove restoration site assessments as it is low cost, easy to transport across borders, difficult to spot on the tidal flat, not prone to storm damage as it is close to the ground and does not require specialist knowledge in coastal engineering or data analysis. Especially in the complex hydrological networks of abandoned aquaculture ponds in SE Asia, the Mini Buoy has the potential to efficiently assess site and pond specific conditions with only a few Mini Buoys rotated around the site. Learning from past mistakes in mangrove restoration, where a lack of hydrological site assessments has led to very low restoration success rates (Dale et al., 2014; Kodikara et al., 2017; Zaldivar-Jimenez et al., 2010), this new affordable and easy to implement technology will be able to assist urgently needed upscaling of future mangrove rehabilitation efforts (Worthington and Spalding, 2018).'

2) Subsections 2.3 and 2.4: it appears that the authors include some results in the method section. I would suggest the authors to move these parts to the Results section.

Author reply: We agree and have moved the description of the Rshiny application into the results section under 3.2.1. L463ff.

3) It is worth noting that the deployment period of the Mini Buoys in both field sites are less than a typical spring-neap cycle (approximately 15 days). What's the potential influence of deployment period on the calibration against the observed current velocities? In general, if one would like to use the Mini Buoys in their own studied sites, suitable calibration against observed velocities using ADCP is rather critical. The longer the measurements of current velocities, the better the calibration of the Mini Buoys, am I right?

Author reply: Successful calibration of the Mini Buoy against current velocities would benefit from 'as long as possible calibration' but does not necessarily require a full spring-neap cycle as current velocities vary between slack and flood/ebb tide even within a single tidal cycle to create a calibration curve against the dip of the Mini Buoy. We would recommend, however, to create a calibration data set that covers parts of the spring tide though as this will produce the highest ebb and flood currents in addition to the calibration nearer the slack tide. In our case we the maximum storage capacity of the current meter determined the maximum calibration duration.

4) The Bay of Fundy Mini Buoys were fitted with a temperature and light logger. What's the purpose? And Does these additional parameters help to set a scientific guidelines for mangrove restoration planning?

Author reply: Light availability under water may be important for mangrove seedlings that are flooded for long durations. This will depend on water depth and turbidity, but the effect is not well studied so far, for example compared to light requirements for seagrass. We tested this application mainly to highlight the potential for further research purposes in relation to water quality, sediment concentrations and light availability. Added L580' for example in water quality studies'

5) Appendices: some of the materials can be moved to the supplemental material. In addition, the arrangement of each figure can be improved to have a better readability. For instance, in Figure A1, the authors mixed the Figure and Table together.

Author reply: We agree and have extracted the Table from Figure A1 to Table A2 and moved the Mini Buoy app example screenshots (previously A4) to the supplementary material deposited at zenodo.

Some minor comments:

1) Line 53: Here you only need define the "Windows of Opportunity (WoO)" once, for the rest you could directly refer to "WoO" (such as Lines 363 and 412).

Author reply: We have removed this now after first mention.

2) Lines 280-285: the format of the equations should follow the journal's requirements. Such as the "Yacc^3" should be replaced by "Yacc3", the "R2adj." should be replaced by "R2adj." etc.

Author reply: Thank you, done.

3) Figure 3A: It is difficult to immediately understand the key points.

Author reply: We have changed parts of the caption to clarify: 'Linear Discriminant Analysis (LDA) with prediction of flooded and non-flooded time steps of L2-L5 (Bay of Fundy, left) and B9, B11, B12, B14 (North Sumatra, right) based on acceleration data and validated against measured water levels.'

4) Figure 4: legends can be added.

Author's reply: We have added the legend for flood and ebb tide.

5) Figure 6: It is better to separate the Table from the Figure. In the table, it is not necessary to show the numerical data of "Average high tide duration (min)" and the "Average flooding duration (min/d)" with too much accuracy (i.e., integral would be enough).

Author reply: Agreed and done.

Reviewer #2 comments:

General comments

The device that is presented in this paper is novel, and very relevant for the restoration of coastal wetlands. The paper is easy to read and well structured. I have a few minor comments that could easily be addressed. But otherwise, I think this paper is suitable for publication, and hopefully the mini-buoy will be implemented in restoration projects as soon as possible.

Author reply: We would like to thank the reviewer for their time and valuable comments. We have addressed them individually below.

Specific comments

Title: The initial thought that came to mind thinking of a mini-buoy, was a surface buoy. The deployment and functioning of the device is well explained. However, since the mini-buoy is meant for deployment in restoration projects in SE Asia where buoys and other visible devices are often stolen (as already pointed out by the authors), a more intuitive name such as mini-mooring might not scare managers off purely based on the name. Alternatively, add a short description of the device or that it is submerged to the title.

Author reply: Thanks, we agree that the term 'buoy' most commonly refers to surface buoys although this can sometimes also refer to underwater buoys. We have made it clearer at the start that this is indeed an underwater buoy and not a surface float but decided to keep the overall name.

L17: changed to 'underwater float'

L49: why specifically for SE Asian mangrove restoration? From the abstract I understand that the buoy has been deployed in an abandoned aquaculture pond system in Sumatra. But the specific application for SE Asian mangroves seems out of the blue here in the intro. I miss the link between the need for hydrology assessment and why this is specifically applicable to SE Asia in the intro. A general description of aquaculture hydrology, importance of aquaculture in terms of surface area and why abandoned aquaculture is interesting for mangrove restoration would be useful background information for a wider audience. In addition, I think that the mini-buoy could also be useful at many other target restoration sites like de-embanked polders and saltpans. Why the focus on aquaculture?

Author reply: Whereas the Mini Buoy can be applied on any tidal flat, we have customized the R shiny application to be used in SE Asian mangrove restoration which often includes restoration of disused aquaculture ponds. This context has been made more explicit in the introduction:

LL 46-58:

'1.2 Hydrological and hydrodynamic bottlenecks to mangrove restoration

Assessing the local hydrology prior to mangrove restoration is needed to determine whether conditions are too harsh for seedlings to survive and need to be mitigated (Albers and Schmitt, 2015) or whether insufficient flooding may lead to hypersalinity or succession towards terrestrial plant communities (Lewis, 2005). One of the main reasons for mangrove deforestation in the past, and

hence one of the major opportunities for mangrove restoration today, are aquaculture ponds (Dale et al., 2014; Primavera and Esteban, 2008). Breaching the embankments of such ponds, built within previous mangrove forests, is an effective way to restore mangrove forests. However, previous excavation of sediment and altered tidal channels and remaining weirs may have altered the hydrology. Hence spatially explicit monitoring of inundation durations are required prior to attempting mangrove restoration (Dale et al., 2014). Especially stagnant water and inhibited drainage can locally create restoration bottlenecks in abandoned tidal pond complexes. At hydrodynamically exposed sites, where current velocities are able to dislodge recently rooted mangrove propagules, inundation free periods of several days provide a Window of Opportunity (WoO) to surpass critical establishment thresholds (Balke et al., 2011, 2014). WoO are particularly important to assess in unassisted restoration projects to predict suitability for natural colonization by mangrove pioneer species.'

L159: 'for ecological mangrove restoration planning with reference to habitat requirements of SE Asian mangrove species.'

There are two main customizations of the app for this geographic context: i) The recorded flooding is compared against known flooding tolerance of SE Asian species in the output table for immediate interpretation by non-experts. ii) Disused aquaculture ponds often suffer from stagnant water and include a complex network of channels which maintain very shallow runoff during low tide but in which it is desirable to monitor currents during flood and ebb.

We have thus decided to only include flooding of >20cm depth by using logger tilt as start and end point of flooding, neglecting standing water on the surface of the sediment. For other applications, for example to study dispersal of propagules on very shallow tidal flats this could be customized to include shallow inundation events. The code is open access so can be easily customized for further applications.

We have further clarified this in

LL: 460-485 'An online app, using the R package shiny (Chang et al., 2020), was created as a quick and easy way to assess local hydrological site conditions prior to restoration of mangroves with reference to requirements of SE Asian mangrove species. Acceleration data acquisition can be reduced to 10-second intervals to allow for longer deployment periods across spring-neap tidal cycles and seasons. For calibration of low the frequency data, Mini Buoys B1, B11 and B12 were re-sampled at 10 second intervals. The same analyses for inundation predictions using the LDA and correlation against current velocities (as described above) were carried out over 15-minute time periods. Mini Buoys were considered submerged in the calibration time series when measured water levels were above the Mini Buoy for the entire 15-minute period. Instead of the LDA, a fixed acceleration threshold was applied to differentiate between flooded and non-flooded time steps. This threshold allows for the use of the Mini Buoy and the R shiny application without the need to load training datasets and was informed by the results of the LDA. The fixed threshold predictions were further cross validated against the LDA predictions for Mini Buoys B11 and B12.

The LDA using 10-second interval acceleration data for 15-minute time step predictions achieved an apparent error rate of 0.017 for Mini Buoys B11 and B12 (Fig. A3). A fixed threshold of -0.5g median y-axis acceleration to separate inundated and non-inundated events was applied to replace the LDA predictions. With a fixed threshold, inundation events were wrongly classified 2.49% of the time when compared with LDA predictions for buoys B11 and B12. Correlation between y acceleration measured by the Mini Buoys, and median current velocities measured by the Aquadopp current meter in 15-

minute intervals was best explained using linear regression ($V_{cur} = 1.173 + 1.059 * Y_{acc}$, $R_{adj} = 0.7724$, $P < 0.05$). This low-frequency calibration matches the calibration against 1Hz acceleration data for values within the calibration dataset (Fig. A3).

The R shiny application calculates inundation and current velocity statistics for the entire monitoring period: average high tide duration (min), average flooding duration (min/d), flooding frequency (d-1), maximum WoO duration (d) = longest inundation free period, median current velocity (m/s), 75 percentile current velocity (m/s), and difference of flood - ebb median velocity (m/s)....'

L565: ' This application can be easily customized to other regions with different species requirements and flooding characteristics.'

LL597-598: 'The Mini Buoy can be further customized to include detection of very shallow inundation events on tidal flats, for example to study propagule dispersal.'

L195: "The Mini Buoys were considered 'flooded' when fully submerged (i.e. bed elevation + 20 cm). " ! So sites without inundation detection in the app could in fact still be inundated, just with less than 20 cm of water, which might still be a significant amount of water for a seedling.

Author reply: As mentioned above, we have made this choice because of the possibility of stagnant water or very shallow runoff in channels leading to and from the disused ponds. We hope to build future applications for the Mini Buoy in an open source library where users can switch between different applications/customizations, such as the suggested shallow inundation detection.


LL597-598: 'The Mini Buoy can be further customized to include detection of very shallow inundation events on tidal flats, for example to study propagule dispersal.'

L219: "influence of outliers: (e.g. due to passing boats, waves or turbulence)." Passing boats would indeed create outliers. But at ocean facing sites I can imagine that waves have a large influence on the current velocities measured by the mini-buoy in a more regular manner. How was the effect of waves handled / are the current velocities by waves included in the net current velocity reported?

Author reply: Wave-induced orbital velocities are not included in the analysis, the current velocities measured by the Aquadopp are time-averaged and are averaged across a 75cm distance for each beam. This means smaller wave-induced velocities will not be detected. The calibration in Sumatra was carried out in a tidal channel away from any wave action.

The calibration at the Bay of Fundy did, however, include larger waves of up to 0.73m sign. wave height. Wind-waves in addition to tidal currents will create a swaying motion of the Mini Boy on top of the current velocity induced dip angle. Hence, waves will mainly influence the variability of the y-acceleration signal rather than the time averaged dip angle. We have calculated wave-induced orbital velocities from the pressure sensor data of the aquadopp and established that the standard deviation of the y-acceleration signal would need to exceed 0.1 before wave orbital velocities could be detected in the variability of the signal.

Plotting the calculated orbital velocities against the time-averaged y-acceleration for the Bay of Fundy calibration showed, that there is no systematic influence of wave orbital velocity near the bed on the average dip angle (i.e. y-axis acceleration) of the Mini Buoy on the tidal flat (see figure to the right).



L 415: The authors acknowledge that long term deployment of the buoy would capture more hydrological accuracy, though the average conditions could be estimated within a spring neap cycle. I think that it would be could to mention that the timing of that short measurement period matters, especially if ecological mangrove restoration is the target. Especially in the java sea, inundation free periods can vary greatly in length throughout the year. There can be a seasonal difference in average water level of 10 cm (see local tide stations for long term fluctuations <http://www.iocsealevelmonitoring.org/list.php>), driven by the monsoon winds. It is important to address that the hydrodynamic characteristics of an intended restoration site should especially be sufficient during the fruiting season of the targeted species.

Author reply: We agree very much with this comment and the timing aspect of biology and physical conditions are one of the main motivators for the design of this tool. We have included a short sentence on the aspect of fruiting season timing in relation to the monitoring period.

L 601: 'Seasonal variability of conditions, especially with respect to the fruiting season of the desired species, should be accounted for where possible.'

Figure 5: What is the explanation for the velocity minimum at L3, and subsequent increase in current velocities at higher elevations? Could that be an effect of lower accuracy when the water levels became lower, or is it an expected effect at this site. Why is there no velocity graph for figure 5b?

Author reply: Tidal currents on the mudflat generally decrease with distance from the main channel/estuary. The subsequent velocity increase at the edge of the marsh plateau may be due to ebb and flood peaks created by the topography of the marsh edge when the marsh is about to become inundated/drained. As mentioned in the main text, current velocities within the former aquaculture pond were mainly near the detection limit. A figure on the current velocities would therefore not provide further useful information.

L462:" The Mini Buoy concept design and data analysis could also be applied for hydrological monitoring of river floodplain/riparian systems." seems a rather offhand comment, not a nice wrap up of the story or take home message.

Author reply: We have deleted this and added a conclusion paragraph in line with comments made by Reviewer #1.

Technical corrections

Figure 4: blue being flood and green being ebb?

Author reply: We have added a legend.

Figure 5: b, scale numbers and units are hard to read.

Author reply: changed accordingly

Figure 6: very nice to see an example of an aquaculture pond with stagnant water and partially operational sluice system in here as an example of a very unsuitable site for restoration

Figure A2: Orange letters instead of orange dots?

Author reply: The orange dots were added in addition the letters to show the group averages. Clarified in the Figure legends now.

Monitoring tidal hydrology in coastal wetlands with the ‘Mini Buoy’: applications for mangrove restoration

5 Thorsten Balke¹, Alejandra Vovides¹, Christian Schwarz², Gail L. Chmura³, Cai Ladd¹, Mohammad Basyuni⁴

¹ School of Geographical and Earth Sciences, University of Glasgow, Glasgow, G128QQ, United Kingdom

² School of Marine Science and Policy, University of Delaware, Lewes, 19958 DE, United States

³ Department of Geography, Mc Gill University, Montreal, QX H3A 0B9, Canada

⁴ Department of Forestry, Faculty of Forestry, Universitas Sumatera Utara, Medan 20155, Indonesia

10

Correspondence to: Thorsten Balke (thorsten.balke@glasgow.ac.uk)

Abstract

Acquiring in-situ data of tidal flooding is key for the successful restoration planning of intertidal wetlands such as salt marshes
15 and mangroves. However, monitoring spatially explicit inundation time series and tidal currents can be costly and technically
challenging. With the increasing availability of low-cost sensors and data loggers, customized solutions can now be designed
to monitor intertidal hydrodynamics with direct applications for restoration and management.

In this study, we present the design, calibration, and application of the Mini Buoy, a low-cost underwater float containing an
acceleration data logger for monitoring tidal inundation characteristics and current velocities derived from single-axis
20 equilibrium acceleration (i.e. logger tilt).

The acceleration output of the Mini Buoys was calibrated against water-level and current velocity data in the hypertidal Bay
of Fundy, Canada, and in a tidally reconnected former aquaculture pond complex in North Sumatra, Indonesia. Key parameters,
such as submersion time and current velocities during submergence can be determined over several months using the Mini
Buoy. An open-source application was developed to generate ecologically meaningful hydrological information from the Mini
25 Buoy data for mangrove restoration planning. We present this specific SE Asian mangrove restoration application alongside a
flexible concept design for the Mini Buoy to be customized for research and management of intertidal wetlands worldwide.

Deleted: bottom-mounted

30 1 Introduction

1.1 Tidal flooding and coastal wetlands

Tidal flooding is the main driver of species distribution and ecosystem functioning in intertidal wetlands (i.e. salt marshes and mangroves). Inundation determines the composition of plant communities through physiological inundation and salt-tolerance limits, soil anoxia and altered competitive ability along the tidal flooding gradient (Bockelmann et al., 2002; Jiménez et al., 1991; van Loon et al., 2007; Matthijs et al., 1999; Pennings and Callaway, 1992; Silvestri et al., 2005). Tidal currents can disperse propagules (Delgado et al., 2001; Koch et al., 2009; Van der Stocken et al., 2013; Wiehe, 1935) and dislodge seedlings when drag forces exceed the stability threshold of rooted seedlings (Balke et al., 2011, 2014; Wiehe, 1935; Xiao et al., 2016). Interactions between tidal currents and the friction created by vegetation (Bouma et al., 2013; Schwarz et al., 2018; Temmerman et al., 2007) determine the evolution of intertidal landscapes through flow routing and altered sedimentation patterns (i.e. biogeomorphic feedbacks). Monitoring flooding gradients and tidal currents is not only key to understanding intertidal wetland functioning but is also a prerequisite for the design and monitoring of successful restoration projects in the intertidal zone (Lewis, 2005; Primavera and Esteban, 2008; Wolters et al., 2005). Mangrove restoration projects in particular have shown low success rates due to the lack of hydrological site assessments prior to restoration (Primavera and Esteban, 2008; Wodehouse and Rayment, 2019). Here, we present the design, calibration and application of a bottom-mounted underwater float equipped with an acceleration data logger (from here on referred to as the Mini Buoy) to monitor inundation duration and current velocities in intertidal environments with a specific application for SE Asian mangrove restoration.

1.2 Hydrological and hydrodynamic bottlenecks to mangrove restoration

Assessing the local hydrology prior to mangrove restoration is needed to determine whether conditions are too harsh for seedlings to survive and need to be mitigated (Albers and Schmitt, 2015) or whether insufficient flooding may lead to hypersalinity or succession towards terrestrial plant communities (Lewis, 2005). One of the main reasons for mangrove deforestation in the past, and hence one of the major opportunities for mangrove restoration today, are aquaculture ponds (Dale et al., 2014; Primavera and Esteban, 2008). Breaching the embankments of such ponds, built within previous mangrove forests, is an effective way to restore mangrove forests. However, previous excavation of sediment and altered tidal channels and remaining weirs may have altered the hydrology. Hence spatially explicit monitoring of inundation durations are required prior to attempting mangrove restoration (Dale et al., 2014). Especially stagnant water and inhibited drainage can locally create restoration bottlenecks in abandoned tidal pond complexes. At hydrodynamically exposed sites, where current velocities are able to dislodge recently rooted mangrove propagules, inundation free periods of several days provide a Window of Opportunity (WoO) to surpass critical establishment thresholds (Balke et al., 2011, 2014). WoO are particularly important to assess in unassisted restoration projects to predict suitability for natural colonization by mangrove pioneer species.

Deleted:

Moved down [2]: Assessment of the local hydrology prior to planting is needed to determine whether conditions are too harsh for seedlings to survive and need to be mitigated (Albers and Schmitt, 2015) or whether insufficient flooding may lead to hypersalinity or succession towards terrestrial plant communities (Lewis, 2005). However, tidal current velocity monitoring in coastal wetlands is often limited in spatial coverage and duration or missing completely due to the high costs of monitoring equipment.

Deleted: low-cost

Deleted:

Moved (insertion) [2]

Deleted: Assessment of

Deleted: planting

Deleted: However, tidal current velocity monitoring in coastal wetlands is often limited in spatial coverage and duration or missing completely due to the high costs of monitoring equipment. Key hydrological parameters in tidal wetlands are tidal inundation duration and inundation frequency (e.g. to select suitable species and sites for planting according to the flooding regime) and the duration of individual

Moved (insertion) [1]

Deleted:

Deleted: (also called

Deleted: s

Deleted: WoO exceeding species-specific minimum durations allow for seedling establishment where disturbance (i.e. uprooting and erosion by waves and currents) is a limiting factor and

Deleted: hence

Deleted: (i.e.

Deleted:)

1.3 Monitoring tidal inundation and currents

Inundation frequency and duration of tidal wetlands are generally derived from nearby tide-gauges or in-situ pressure-sensor deployments. The data is then projected onto digital elevation models or transects derived from levelling. Tidal current velocity is typically monitored using Electro Magnetic Flow Meters (EMF), Acoustic Doppler Velocimeters (ADV), or Acoustic Doppler Current Profilers (ADCP) (see for example Mullarney et al., 2017). The need for existing monitoring infrastructure and specialist equipment and knowledge means that capacity for hydrological and hydrodynamic monitoring may not always be readily available for restoration practitioners. Hydrodynamic time series data are also often limited in their duration due to the high demand for storage and battery capacity or due to concerns over theft or damage during storms. Hence long-term variability, rare disturbance events or stochastic WoO in coastal wetlands are often missed.

Proisy et al., (2018) note that large-scale mangrove restoration across disused and abandoned aquaculture ponds requires the assessment of elevations and hydrological conditions in each individual pond, since conditions can differ greatly depending on the site history. Hydrological site assessments in such complex anthropogenic tidal landscapes can thus quickly become costly and time demanding. Mangrove restoration manuals do acknowledge the need to assess site-specific tidal flooding and hydrodynamic exposure and propose practical 'low-tech' solutions for their quantification. A manual published by the Mangrove Action Project, for example, advocates measuring the elevation of a restoration site (using optical levelling equipment or a hose water level) against known references such as local tide gauges or elevations of nearby mangrove stands (Lewis and Brown, 2014). Semi-quantitative methods to assess hydrodynamic exposure, such as gypsum clod cards, are also proposed (Lewis and Brown, 2014). These methods are low-cost and locally implementable but not all are quantitative, scalable or comparable across mangrove environments. We propose that monitoring tidal inundation and hydrodynamic exposure using accelerometer technology could be an affordable, globally available and quantitative method to assess hydrological site suitability for mangrove restoration.

1.4 Accelerometer technology to monitor tidal currents

Accelerometer technology is widely used, from measuring shock and triggering safety air bags in the transport industry (MacDonald, 1990) to quantifying the physical activity of humans (Beanland et al., 2014; Passfield et al., 2017) and analysis of particle movement in geosciences (Akeila et al., 2010). Equilibrium acceleration data from two axes relative to the gravity vector can be used for precise tilt measurements of objects. This principle is used in dip-current meters which relate the tilt of a bottom-mounted float with current velocities and the drag forces exerted on the float (Figurski et al., 2011; Hansen et al., 2017). A similar single axis acceleration tilt calculation principle (i.e. the acceleration relative to the horizontal plane relates to the sine of the tilt angle) was applied here to determine inundation of the Mini Buoy and to correlate equilibrium acceleration of the Mini Buoy with current velocities (Fig. 1). For a detailed description of the individual forces acting on bottom-mounted floats see Figurski et al., (2011). Commercial dip current meters have recently become available however, to our knowledge,

Deleted: 2

Moved up [1]: Key hydrological parameters in tidal wetlands are tidal inundation duration and inundation frequency (e.g. to select suitable species and sites for planting according to the flooding regime) and the duration of individual inundation free periods (also called Windows of Opportunity (WoO) (Balke et al., 2011, 2014). WoO exceeding species-specific minimum durations allow for seedling establishment where disturbance (i.e. uprooting and erosion by waves and currents) is a limiting factor and hence are important to assess in unassisted restoration projects (i.e. for natural colonization by pioneer species). Tidal current velocities are generally characterized by their flood and ebb tide magnitude to assess tidal

Deleted: Key hydrological parameters in tidal wetlands are tidal inundation duration and inundation frequency (e.g. to select suitable species and sites for planting according to the flooding regime) and the duration of individual inundation free periods (also called Windows of Opportunity (WoO) (Balke et al., 2011, 2014). WoO exceeding species-specific minimum durations allow for seedling establishment where disturbance (i.e. uprooting and erosion by waves and currents) is a limiting factor and hence are important to assess in unassisted restoration projects (i.e. for natural colonization by pioneer species). Tidal current velocities are generally characterized by their flood and ebb tide magnitude to assess tidal exchange in enclosed systems and the potential for sediment transport or resuspension. Monitoring hydrodynamics in intertidal environments needs to be spatially explicit (i.e. across an elevational gradient or across a potential restoration site) to assess habitat suitability of a restoration site. ¶

Deleted: 3

do not routinely include the analysis of flooding characteristics for intertidal applications and are still costly compared to the described setup with off-the-shelf components. Moreover, commercial dip current meters with a fixed calibration cannot be customized. Adding additional sensors (as shown here for example a temperature sensor) or changing the shape and size of the float and length of the tether offers flexibility for the application in different environments. The single axis tilt calculation principle offers the benefit of reduced data storage requirements (i.e. increased deployment durations) and the potential application of more economic sensors.

Here we describe the Mini Buoy, primarily as a design concept for the low-cost monitoring of abiotic conditions in periodically inundated intertidal ecosystems. We further present a fully calibrated Mini Buoy design with an open-source online data analysis application to assess tidal flooding (inundation and current velocities) for ecological mangrove restoration planning

[with reference to habitat requirements of SE Asian mangrove species.](#)

Deleted: in

2 Methods

2.1 The Mini Buoy setup

The Mini Buoy consists of three readily available ‘off the shelf’ components: an acceleration data logger, a self-standing 50 ml centrifuge tube (CentriStar, Corning) and three fishing swivels. (See Fig 1a, [Fig. A1](#) and [Table A2](#) for a detailed description, overall weight = 42.3 g, displaced volume = 70 ml, and length of tube + swivels = 21.5 cm). Additional loggers can fit on top of the tube such as the HOBO MX2202 temperature and light sensor (see photo in Fig. 1 as used in the Bay of Fundy deployment). The Mini Buoy is anchored near the sediment surface and will float up when submerged and dip into the current according to the velocity magnitude near the bed. The acceleration data logger inside the Mini Buoy records gravitational acceleration as G-forces (g) along the 3 axes of the tube relative to the gravity vector. Only y-axis acceleration was used in this study, hence any single-axis acceleration logger can be used for the Mini-Buoy. The MSR 145 B4A accelerometer (MSR Electronics GmbH, Switzerland) used in this study has a capacity of 2M measurements and an internal rechargeable battery. The data recording for x-axis and z-axis acceleration can be inactivated to increase storage capacity of the device. The sensitivity of the logger was set to the 2 g. The USB connector of the logger was facing upward in the tube, hence y-acceleration was 0g when the logger was stationary in a horizontal (not submerged) position, and -1g when (submerged) in vertical position (Fig. 1). The time-averaged (i.e. equilibrium) y-axis acceleration output of the sensor ($Yacc$) corresponds to the tilt angle (θ) of the sensor relative to the horizontal plane (i.e. orthogonal to the gravity vector) following Eq. (1):

Deleted: and

$$Yacc [g] = -1g \times \sin(\theta) .$$

Y-axis acceleration was acquired every second for short-term deployments (several days) and every 10 seconds for long-term deployments (single deployments of approx. 5 months are possible). We have chosen the described setup as the loggers, tube, and tether are globally available, and the selected data logger itself has a waterproof housing and sufficiently large internal data storage for deployments across multiple spring-neap tidal cycles.

Deleted:

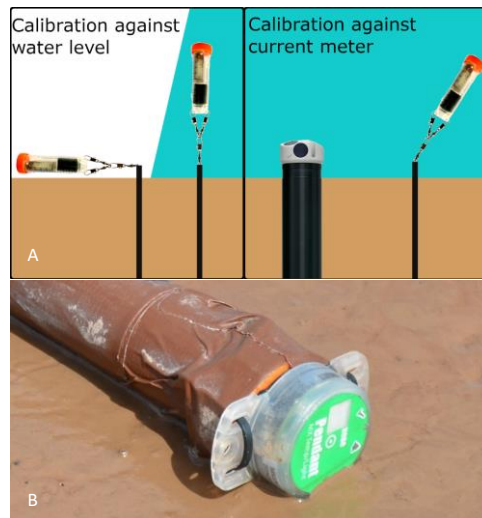


Figure 1: A) Movements of a small bottom mounted float (the Mini Buoy) equipped with an acceleration data logger during high and low tide. Single-axis equilibrium acceleration (i.e. tilt) of the buoy was calibrated against water-level and current-velocity data using an Acoustic Doppler Current Meter (pictured). The Mini Buoy consists of a flat-bottom centrifuge tube which is tethered to the tidal flat using fishing swivels and a metal stake. The acceleration data logger is a self-contained unit with internal battery and storage. Single-axis equilibrium acceleration (with y axis acceleration = -1g when vertical i.e. flooded 0g when horizontal i.e. not flooded) correlates with the sine of the datalogger tilt relative to the horizontal plane B) Additional data loggers for temperature and light can be attached on top of the Mini Buoy. Further details on dimensions and logger specifications are available in the appendix.

2.2 Field sites

2.2.1 Bay of Fundy (Canada)

A short-term deployment of 9 days using 8 Mini Buoys (L1-L8) measuring acceleration at 1 Hz was carried out along a tidal-flat to salt marsh transect in the Bay of Fundy, Canada (45°47'6.80"N, 64°37'17.30"W). The Mini Buoys in the Bay of Fundy were also fitted with a HOBO MX2202 temperature and light sensor on top of the centrifuge tube (Fig. 1b). Measurements commenced on the 9th of June and ended on the 17th of June 2018. A Nortek Aquadopp 300 m current meter was installed 5 m seaward of Mini Buoy L1 for calibration. In addition, a pressure sensor (In-Situ Rugged Troll) measured continuously at 1

Hz and on-site barometric pressure correction was carried out using a second logger. The elevations along the transect were surveyed using an Emlid Reach View Differential GPS Rover with Real-Time Kinematic positioning. The vegetation along the transect was <10 cm in height and sparse enough for the logger to rest horizontally on the sediment surface when not inundated (L4-L8 are located within the marsh). Metal rods were used to anchor the Mini Buoys in place. This site serves as a test of the Mini Buoy design concept in very energetic hypertidal conditions.

210 2.2.2 North Sumatra (Indonesia)

Short-term deployment sites:


A short-term deployment of 7 days was carried out along the East coast of North Sumatra (Fig. 2b, Percut Sei Tuan, Deli Serdang) starting on the 27th of November 2019. 15 Mini Buoys (B2-B16) measured acceleration at 1 Hz inside an abandoned, naturally recolonizing, aquaculture pond (3°43'22.86"N, 98°46'15.29"E). This pond is connected through constructed tidal channels to the main estuary and partially recolonized by *Avicennia* spp., *Rhizophora* spp. and *Nypa fruticans*. This site was transformed into aquaculture ponds in 2002 and subsequently abandoned. One main channel directly connects the study pond to the surrounding ponds and the estuary through a previously breached embankment. The channel was equipped with an additional Mini Buoy (B1) which was calibrated using an upward-facing Nortek Aquadopp 300 m current meter located 5 m North of Mini Buoy B1 (Fig. 2b, also see 'channel' deployment in Fig. 6). The logger elevations of B9, B11, B12 and B14 in relation to the pressure sensor of the current meter were established using a Leica optical level. An aerial image was acquired using a DJI Phantom 4 and Mini Buoy locations were mapped using ground targets. An additional short-term Mini Buoy was placed on a tidal flat facing the open coast directly seaward of colonizing *Avicennia marina* seedlings ('Open coast' deployment in Fig. 6 (3°44'1.55"N, 98°46'31.34"E).

Long-term deployment sites:

Long-term deployments of approximately 50 days were conducted at three locations: i) North Sumatra at an abandoned pond in Percut Sei Tuan, where tidal regulation with a sluice system was still partially active (deployment 'Abandoned 1' in Fig. 6: 3°43'33.77"N, 98°46'22.70"E, 07.10.2019), ii) at the Percut Sei Tuan short-term study site described above (see 'long-term' logger nested within the short term deployment in Fig. 2b) which was exposed to regular tidal inundation ('Abandoned 2' in Fig. 6: 07.10.2019-26.11.2019), and iii) at a recent restoration site at Belawan with active planting of *Rhizophora apiculata* in May 2019 ('Restoration' in Fig. 6: 3°45'15.74"N, 98°42'22.43"E, 09.10.2019- 26.11.2019).

Deleted: also

Deleted: Finally, I

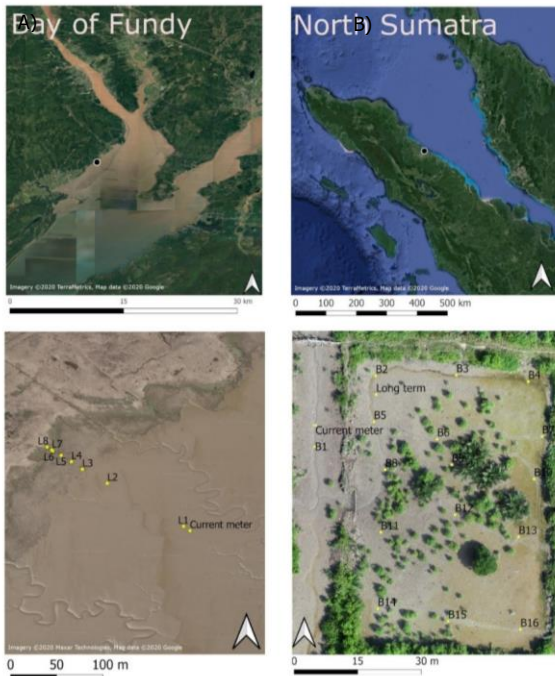

235 **Figure 2:** A) The study sites in the Bay of Fundy, Canada with 8 Mini Buoys + temp/light sensor (see Fig. 1b) deployed along an elevational transect. L1 and L2 are located on the tidal flat, L3 at the marsh edge, and L4-L8 are within the salt marsh (bottom left). B) The short-term study site in Percut Sei Tuan, North Sumatra, Indonesia, with 16 Mini Buoys (B1-B16) deployed across an abandoned aquaculture pond that was naturally re-colonized by mangrove plants (drone image at bottom right). Both study sites were equipped with a Nortek Aquadopp current meter close to L1 and B1 to calibrate the Mini Buoys. Maps were created using QGIS.

240

2.3 Training dataset to predict Mini Buoy inundation

Linear Discriminant Analysis (LDA) with R packages MASS (Venables and Ripley, 2002) and klaR (Weihs et al., 2005) was used to differentiate inundated time steps from non-inundated time periods using the acceleration data. The LDA is a machine learning tool that requires a training dataset (i.e. inundation time series at the Mini Buoy location) to then predict inundation events for other Mini Buoys and time periods. This approach was chosen as it can be directly applied to other Mini-Buoy designs that may have different buoyancy, dimensions and data loggers. Mini-Buoys closest to the Aquadopp current meter

245

and pressure sensor (L2 - L5 at the Bay of Fundy and B9, B11, B12 and B14 in North Sumatra) were selected to generate a training dataset at 1-minute resolution containing flooded and non-flooded classes based on water-level and elevation data.

- 250 For North Sumatra, water-level data was linearly interpolated to 1-minute frequency using the Aquadopp pressure sensor diagnostic output, and water-level data was generated directly from a separate pressure data logger at 1-minute frequency at the Bay of Fundy. The Mini Buoys were considered 'flooded' when fully submerged (i.e. bed elevation + 20 cm). The LDA then separated and predicted flooded and non-flooded cases using 1-minute median y acceleration and the difference between the 1-minute 75th and 25th percentile of the y acceleration (i.e. the variability of y axis measurements) as predictor variables.
- 255 The klaR package provides apparent error rates (i.e. the proportion of observed cases incorrectly predicted), and additional cross validation using LDA predictions for a subset of Mini Buoys was carried out. The generated LDA's were used to predict all Mini Buoy inundation classifications (L1-L8 and B2-B16) to create time series of inundation characteristics and subsequently predict current velocities.

260 **2.4. Mini-Buoy calibration against current velocity**

- At both study sites an Aquadopp 300 m current meter (Nortek) was installed with the measurement head 20 cm above the sediment surface. The blanking distance was set to 35 cm and the device measured in diagnostic mode with 1025 sample bursts every hour at 1 Hz (internal sampling rate = 23 Hz). Median y acceleration over a 1-minute period for both Mini Buoys (L1 at Bay of Fundy and B1 in North Sumatra) was correlated with the median current velocities for both horizontal velocity axes over a 1-minute period.
- 265

- The site and design-specific calibration curves were further used to predict current velocities for all deployed Mini Buoys (Fig. 2). In order to separate individual high-tide events for each Mini Buoy, inundation events were separated whenever no inundation occurred for at least 100 minutes. As partially inundated Mini Buoys during early phase of submergence or late stages of emergence may create inaccurate velocity predictions, a buffer time period at the start and end of each high tide was implemented. The first and last 10 minutes of each predicted tide for Bay of Fundy data and 50 minutes for the North Sumatra time series were not used for velocity predictions. This buffer duration was based on the time it takes for the tide to rise and fall by 20 cm (i.e. the Mini Buoy height) at each site, as estimated from water level measurements. Inundation durations were calculated from the predicted inundation categories using the LDA, and each high tide event was separated into two equal halves to separate approximate flood and ebb tides. Overall current velocities for the entire monitoring period were predicted as median values and 75 percentiles to reduce the influence of outliers (e.g. due to passing boats, waves or turbulence).
- 270
- 275

3 Results

3.1 Flooding and current velocity calibration

The LDA separated the Mini Buoy data in inundated and non-inundated time steps with apparent error rates of 0.008 for merged L2-L5 Mini Buoy data (Bay of Fundy) and of 0.015 for merged B9, B11, B12 and B14 Mini Buoy data (North Sumatra) (Fig. 3a). Using Mini Buoy data of L2 and L3 as a training dataset to predict L4 inundation classification with the LDA at 1-minute intervals at the Bay of Fundy transect produced 1.57% false predictions. Cross validating predictions with an LDA generated from B11 and B12 to predict B14 at the North Sumatra site produced 1.4% false predictions when validated against water level classification. The variability of the y-axis acceleration within the 1-minute time step (i.e. differences between the 75th and 25th percentile of y acceleration) was different between both field sites. Percentile ranges of up to 0.5 g were recorded at the Bay of Fundy, the Mini Buoy within the tidal channel in North Sumatra showed values of up to 0.08 g. This is likely attributed to the more dynamic conditions at the Bay of Fundy where significant wave heights calculated from the Aquadopp data reached 0.73 m during the monitoring period. Mini Buoys deployed further away from the pressure sensor were not considered for calibration as the local water levels may be influenced by local flooding and draining pattern through tidal channels.

Median current velocities for 1-minute time steps at both locations correlated with median y-axis acceleration over the same time step and were best described using a 3rd order polynomial regression rather than a sine function (Fig. 3b). The polynomial fit may be attributed to a change in the proportion of the sampled velocity profile (i.e. the Mini Buoy dips into faster currents and hence stays closer to the bed when compared to low currents). The calibration curves for both field sites show that current velocities above ~0.1 m/s could be measured by the Mini Buoy. The Bay of Fundy Mini Buoys fitted with a temperature and light logger showed a slightly higher sensitivity to low velocities (likely due to reduced buoyancy). Velocities measured at the Bay of Fundy reached up to 0.5 m/s whereas velocities at the North Sumatra tidal channel stayed generally below 0.4 m/s. After applying the identification of individual tides and removing the buffer time periods at the start and end of each inundation event, continuous predictions of velocities were achieved (see Fig. 4 for examples of tidal current predictions). Averaged tidal current predictions and inundation durations were plotted across the elevation transect at the Bay of Fundy and showed a rapid decrease in median current velocities with increasing distance from the main channel (Fig. 5a). An increase in median current velocities was observed at the edge of the highest salt marsh terrace compared to the lower marsh elevations. Animations of the predicted inundation events and current velocities are available from the online materials.

Deleted: 2.4 Long-term deployments and mangrove restoration site assessment application ¶

Acceleration data acquisition can be reduced to 10-second intervals to allow for longer deployment periods across spring-neap tidal cycles and seasons. For this purpose, Mini Buoys B1, B11 and B12 were re-sampled at 10 second intervals to construct a new low-frequency calibration. The same analyses for inundation predictions using the LDA and correlation against current velocities (described above) were carried out over 15-minute time periods. This analysis was only performed for the North Sumatra case study to develop a monitoring application for mangrove restoration in SE Asia. Mini Buoys were considered submerged in the calibration time series when measured water levels were above the Mini Buoy for the entire 15-minute period. ¶

¶ An online app, using the R package shiny (Chang et al., 2020), was created as a quick and easy way to assess local hydrological site conditions prior to restoration of mangroves. Instead of the LDA, a fixed acceleration threshold was applied to differentiate between flooded and non-flooded time steps. This threshold allows for the use of the Mini Buoy and the R shiny application without the need to load training datasets and was informed by the results of the LDA. The fixed threshold predictions were further cross validated against the LDA predictions for Mini Buoys B11 and B12. The application calculates inundation and current velocity statistics for the entire monitoring period: average high tide duration (min), average flooding duration (min/d), flooding frequency (d⁻¹), maximum WoO duration (d) = longest inundation free period, median current velocity (m/s), 75 percentile current velocity (m/s), and difference of flood - ebb median velocity (m/s). The R shiny application separates individual inundation events (i.e. high tides) using a minimum inundation free period of 100 minutes and removes the first and last 60 minutes of each inundation event for current velocity predictions to avoid misinterpretation of velocities in very shallow or stagnant water. The application also allows for a comparison with a second Mini Buoy to assess differences in conditions between a restoration target site and a reference site which has the desired conditions/habitat (i.e. previously successful restoration site or site with natural colonization of the desired species). The R shiny app code and a Mini Buoy handbook for logger programming, field deployment and data analysis are available via Github. The app can also be used directly online via <https://mangroverestoration.shinyapps.io/MiniBuoyApp/> and the handbook can be downloaded from zenodo: <https://doi.org/10.5281/zenodo.4245198>. ¶

Deleted: elevation

Deleted: is

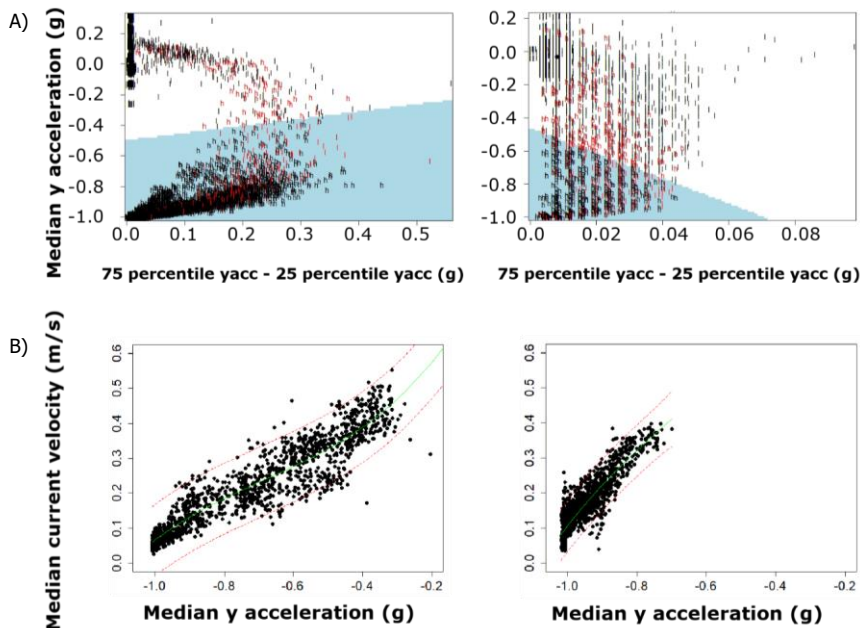


Figure 3: Training data for the Mini Buoy calibration at both study sites. A) Linear Discriminant Analysis (LDA) with prediction of flooded and non-flooded time steps of L2-L5 (Bay of Fundy, left) and B9, B11, B12, B14 (North Sumatra, right) based on acceleration data and validated against measured water levels. The error rate of the LDA for the Bay of Fundy was 0.008 and for North Sumatra 0.015 (l=low tide, h=high tide, red letters = false predictions). The blue-shaded area indicates the range of values for which inundation is predicted by the LDA. The LDA was then used to predict inundation events for all Mini Boys.

B) Polynomial regression provided the best fit for the median y-axis acceleration [Y_{acc} (g)] against the measured current velocity [V_{cur} (m/s)] for 1-minute intervals at both study sites. L1 Bay of Fundy: $V_{cur} = Y_{acc} \cdot 0.8812 + (1.9209 * Y_{acc}) + ((2.1394) * Y_{acc}^2) + ((1.0344) * Y_{acc}^3)$, $R^2_{adj} = 0.84$, $P < 0.05$; B1 North Sumatra: function $V_{cur} = Y_{acc} \cdot 1.488 + ((2.893) * Y_{acc}) + ((2.921) * Y_{acc}^2) + ((1.410) * Y_{acc}^3)$, $R^2_{adj} = 0.79$, $P < 0.05$. Red dotted lines show the 95% prediction intervals. Note that the Mini Buoy design differs slightly between both case studies as the Bay of Fundy design has an additional temp/light logger attached.

Predicted median current velocities within the disused aquaculture pond at the North Sumatra study site mostly ranged between 0.09 and 0.12 m/s and were thus near the detection limit of this Mini Buoy design. Two buoys, within the channel filling and draining the abandoned aquaculture pond, B5 and B8, reached median velocities of 0.13m/s (see Fig. 4 for B8 predictions). Inundation duration ranged between 292 and 635 min/d within the abandoned pond (Fig. 5b). The spatial pattern of inundation

Deleted: was used to determine the time-averaged acceleration signal of the y-axis for

Deleted: ^

Deleted: ^

Deleted: R²adj.

Deleted: ^

Deleted: ^

Formatted: Subscript

375 duration showed that drainage occurred via the tidal creek in the Northern part of the pond (see animation of inundation events
 online). The shorter inundation durations generally corresponded to the more densely recolonized areas of the abandoned pond,
 whereas the Southeast corner of the pond and the channel with inundation durations exceeding 460 min/d showed a lack of
 recolonization by mangrove trees (Fig. 5b). However, these are short-term assessments to test the Mini Buoy performance,
 and further investigation into inundation durations should be carried out over a spring/neap cycles as described in section 3.2.
 380 All Mini Buoy acceleration data, temperature and light data and Aquadopp data are available online.

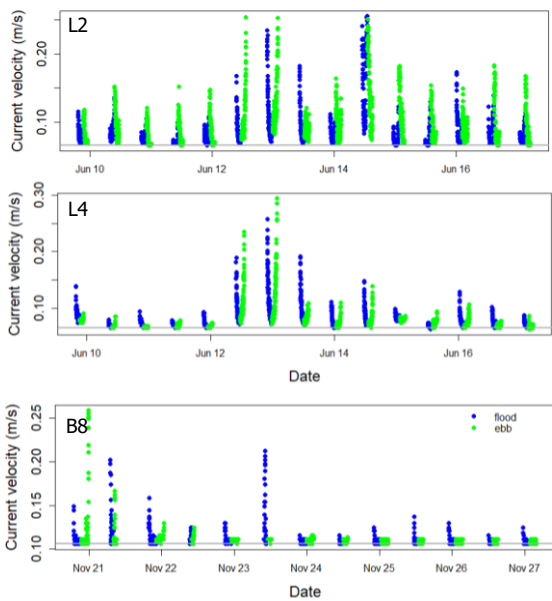


Figure 4: Examples of predicted current velocities during predicted inundation events for L2, L4 and B8 using the LDA (Fig. 3a) for inundation and regression analysis for velocity predictions (Fig. 3b). Colours denote the first and second half of the inundation time period (approx. flood and ebb tide) and the grey line indicates the detection threshold (i.e. Bay of Fundy (L2, L3) = 0.06 m/s, North Sumatra (B8) = 0.106 m/s, see Fig. 3b).

420

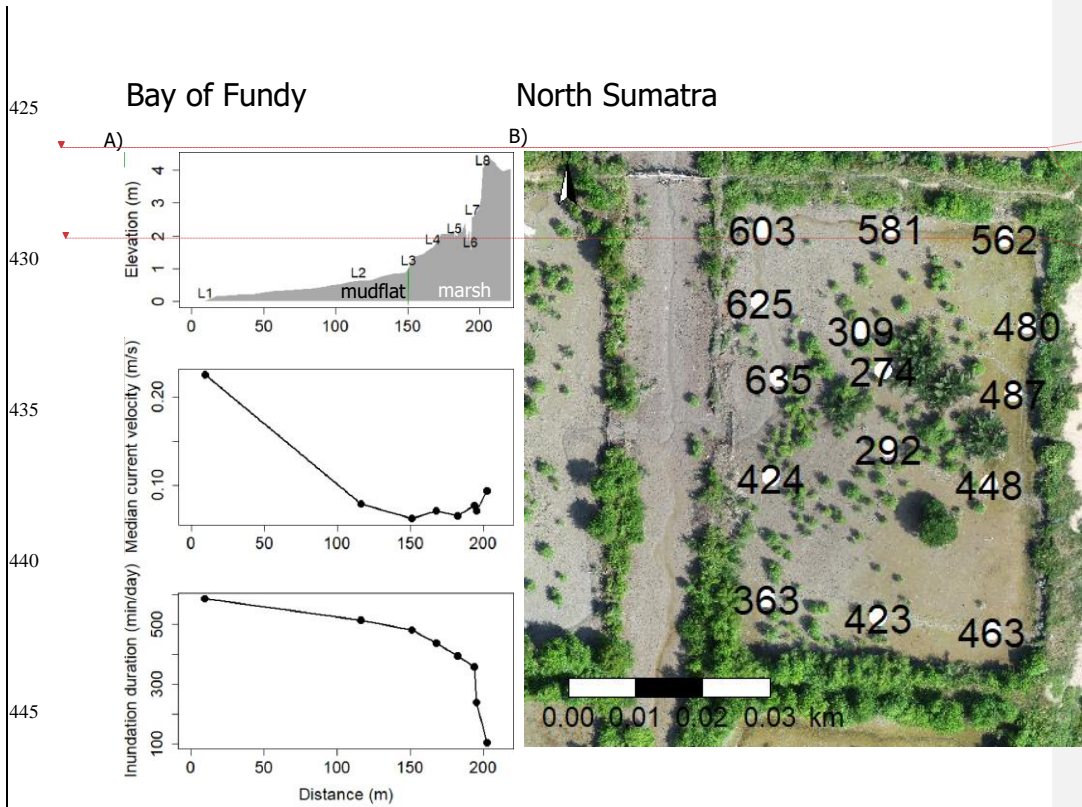


Figure 5a) Summary of predicted median current velocities and inundation duration for the entire monitoring duration (based on 1-minute aggregated data) along the elevational gradient of the terraced salt marsh at the Bay of Fundy. **b)** Inundation duration (min/day) at the logger locations at North Sumatra field site.

Deleted: ¶

Deleted: Figure 5:

Deleted: a)

460 **3.2 Hydrological site assessments for mangrove restoration in SE Asia using the Mini Buoy application**

3.2.1 Development of the Mini Buoy R shiny application

465 An online app, using the R package shiny (Chang et al., 2020), was created as a quick and easy way to assess local hydrological site conditions prior to restoration of mangroves with reference to requirements of SE Asian mangrove species. Acceleration data acquisition can be reduced to 10-second intervals to allow for longer deployment periods across spring-neap tidal cycles and seasons. For calibration of low the frequency data, Mini Buoys B1, B11 and B12 were re-sampled at 10 second intervals. The same analyses for inundation predictions using the LDA and correlation against current velocities (as described above) were carried out over 15-minute time periods. Mini Buoys were considered submerged in the calibration time series when measured water levels were above the Mini Buoy for the entire 15-minute period. Instead of the LDA, a fixed acceleration threshold was applied to differentiate between flooded and non-flooded time steps. This threshold allows for the use of the

470 Mini Buoy and the R shiny application without the need to load training datasets and was informed by the results of the LDA. The fixed threshold predictions were further cross validated against the LDA predictions for Mini Buoys B11 and B12. The LDA using 10-second interval acceleration data for 15-minute time step predictions achieved an apparent error rate of 0.017 for Mini Buoys B11 and B12 (Fig. A3). A fixed threshold of -0.5g median y-axis acceleration to separate inundated and non-inundated events was applied to replace the LDA predictions. With a fixed threshold, inundation events were wrongly

475 classified 2.49% of the time when compared with LDA predictions for buoys B11 and B12. Correlation between y acceleration measured by the Mini Buoys, and median current velocities measured by the Aquadopp current meter in 15-minute intervals was best explained using linear regression ($V_{cur} = 1.173 + 1.059 * Y_{acc}$, $R_{adj} = 0.7724$, $P < 0.05$). This low-frequency calibration matches the calibration against 1Hz acceleration data for values within the calibration dataset (Fig. A3).

480 The R shiny application calculates inundation and current velocity statistics for the entire monitoring period: average high tide duration (min), average flooding duration (min/d), flooding frequency (d^{-1}), maximum WoO duration (d) = longest inundation free period, median current velocity (m/s), 75 percentile current velocity (m/s), and difference of flood - ebb median velocity (m/s). The R shiny application separates individual inundation events (i.e. high tides) using a minimum inundation free period of 100 minutes and removes the first and last 60 minutes of each inundation event for current velocity predictions to avoid misinterpretation of velocities in very shallow or stagnant water. The application also allows for a comparison with a second

485 Mini Buoy to assess differences in conditions between a restoration target site and a reference site which has the desired conditions/habitat (i.e. previously successful restoration site or site with natural colonization of the desired species). The R shiny app code and a Mini Buoy handbook for logger programming, field deployment and data analysis are available via Github. The app can also be used directly online via <https://mangroverestoration.shinyapps.io/MiniBuoyApp/> and the handbook can be downloaded from zenodo: [10.5281/zenodo.4521304](https://zenodo.org/record/105281).

Formatted: Heading 3

Formatted: Subscript

Formatted: Default Paragraph Font

3.2.2. Application of the Mini Buoy and the R shiny application

This 15-minute fixed threshold analysis as described above was implemented in the R shiny app to allow deployment over longer durations and without calibration or training datasets and is aimed at mangrove restoration practitioners in SE Asia. We applied the Mini Buoy and the R shiny app across 5 different mangrove settings in North Sumatra (Fig. 6, Table 1). None of the deployments on tidal flats within abandoned aquaculture ponds ('Abandoned 1', 'Abandoned 2' and 'Restoration' site deployments) recorded median current velocities or 75th percentile velocities above the detection limit. Only the short-term open coast and the tidal channel deployments showed 75th percentile velocities of up to 0.2 and 0.17 m/s, respectively. Site 'Abandoned 1' had prolonged periods of stagnant water (i.e. low frequency and long inundation periods) due to a sluice system partially in operation during the monitoring period, whereas sites 'Abandoned 2' (i.e. 'long-term' in Fig. 2) and 'Restoration' could freely flood and drain through openings in the embankment. Only the 'restoration' site showed inundation free WoO for more than two consecutive tides during the monitoring period.

Formatted: Heading 3

Deleted: The developed R shiny application operates with acceleration data over 15-minute intervals using 10-second interval acceleration measurements to allow deployments of several months. The LDA using 10-second interval acceleration data for 15-minute time step predictions achieved an apparent error rate of 0.017 for Mini Buoys B11 and B12 (appendix A2). A fixed threshold of -0.5g median y-axis acceleration to separate inundated and non-inundated events can be applied to replace the LDA predictions. With a fixed threshold, inundation events were wrongly classified 2.49% of the time when compared with LDA predictions for buoys B11 and B12. Correlation between y acceleration measured by the Mini Buoys, and median current velocities measured by the Aquadopp current meter in 15-minute intervals was best explained using linear regression ($V_{cur} = 1.173 + 1.059 * Y_{acc}$, Radj = 0.7724, P<0.05). This low-frequency calibration matches the calibration against 1Hz acceleration data for values within the calibration dataset (appendix A2b).

Deleted: further

Deleted: Windows of Opportunities (WoO)



Figure 6: Photographs of deployment sites in North Sumatra

Indicator	Open coast	Abandoned 1	Abandoned 2	Restoration	Channel
Monitoring period (d)	6.25	50.15	50.64	47.45	6.64
Average high tide duration (min)	310.0	6492.0	282.3	218.2	343.8
Flooding frequency (d ⁻¹)	1.92	0.20	1.90	1.60	1.96
Maximum WoO duration (d)	0.36	0.91	0.84	3.64	0.34
Average flooding duration (min/d)	624.0	1298.5	556.8	373.3	702.9
Median current velocity (m/s)	0.14	0.11	0.11	0.09	0.13
75 percentile velocity (m/s)	0.20	0.11	0.11	0.09	0.17
Flood-ebb median velocity (m/s)	0.01	0.00	0.00	0.00	-0.01

Formatted Table

Deleted: 0

Deleted: 0

Deleted: 4

Deleted: 9

Deleted: 5

Deleted: 6

Deleted: 2

Deleted: 2

Deleted: 8

Deleted: 9

Deleted: Figure.

Deleted: 6:

Table 1: Summary of site characteristics in North Sumatra using the Mini Buoy and the R shiny application. Note that 'Abandoned 2' corresponds with the long-term location and 'Channel' corresponds with B1 in Fig. 2. Only 'Open coast' and 'Channel' show current velocities above the detection threshold. At site 'Abandoned 1' a sluice system was partially in operation leading to prolonged non-tidal flooding.

4 Discussion

We successfully designed and calibrated the Mini Buoy, a small bottom-mounted float equipped with acceleration data logger, in contrasting intertidal environments. We further developed the Mini Buoy into a ready-to-use tool for mangrove restoration hydrological site assessments with a focus on disused aquaculture ponds and unvegetated tidal flats [with reference to SE Asian mangrove species](#). This study provides i) a design concept for low-cost monitoring of abiotic parameters in intertidal environments and ii) enables practitioners to directly implement the Mini Buoy using an R shiny application in mangrove restoration, rehabilitation, and creation projects in SE Asia. [This application can be easily customized to other regions with different species requirements and flooding characteristics](#). Calibrating the acceleration data of the Mini Buoy against water-level and current-velocity data showed that current velocities in excess of 0.1 m/s (>0.06m/s with added temp/light logger at the Bay of Fundy) could be detected. Inundation events could be correctly identified using the Mini Buoy, with misclassifications below 1.6% and 2.5% when using a machine learning approach or a fixed vertical acceleration threshold respectively. With measurement intervals of 10 seconds, the Mini Buoys as described here can be deployed for several months before data retrieval and battery recharging becomes necessary (the authors have successfully deployed the Mini Buoy for 164 days in a separate study using the design presented here). Whilst the Mini Buoys were able to represent a wide range of flood-ebb conditions, the current design has a limited capacity to measure low current velocities (<0.1 m/s) and cannot make current velocity predictions when the Mini Buoy is partially submerged (i.e. when water depths are below or around 20 cm). The latter issue is resolved in the R shiny app by implementing an algorithm that detects individual inundation events and can identify non-tidal flooding events (e.g. due to sluice gate operations). Moreover, a buffer period around the start and end of each inundation (1 hour in the R shiny app) is deleted to ensure that no erroneous current velocity predictions for partially inundated loggers are made. Despite the lower accuracy of current velocity information provided by the Mini Buoys compared to conventional hydrodynamic monitoring equipment, the low costs and quick direct deployment and analysis (e.g. no levelling or specialist hydrological knowledge required) make this a suitable tool to assess hydrological site conditions at ecologically relevant scales. Additional loggers used in combination with the Mini Buoy can provide further insight into temporal variability of abiotic conditions in combination with tidal flooding, [for example in water quality studies](#) (see flood and ebb temperature plot in [Fig.A4](#)). Calibrations in two very contrasting conditions (i.e. Bay of Fundy and North Sumatra) [showed](#) that the concept design is robust and easy to implement even in strong currents, humid and hot climates and on soft muddy tidal flats. We demonstrated that the single-axis acceleration tilt calculation principle is of sufficient accuracy to identify ecologically relevant inundation and current velocity information. Hence it is possible to reduce the costs of the Mini Buoy even further.

The primary information that the Mini Buoys provide are in-situ flooding characteristics. This data can be compared to species-specific flooding thresholds from the literature. Van Loon et al., (2007), for example, estimated from a 1-month flooding time series in the Mekong delta, that flooding duration was between 800 and 400 min/d for mangrove pioneers *Avicennia* spp. and *Sonneratia* spp., whereas the *Rhizophora* spp. / *Ceriops* spp. / *Bruguiera* spp. zone had 400-100 min/d inundation durations

Deleted: in

Deleted: appendix

Deleted: 3

on average. In addition to the physiological tolerance to flooding of established plants, mangrove propagules of *Avicennia* spp. require approximately 1-5 inundation free days to sufficiently root against dislodgement by the tide on bare tidal flats (i.e. WoO) (Balke et al., 2015). The stronger the hydrodynamic forcing upon first submergence, the longer the required WoO (i.e. the longer the roots required to stay anchored). The Mini Buoy is well suited as a tool to identify WoO as it measures inundation and hydrodynamic forcing directly on the tidal flat where new establishment may occur. The Mini Buoy can be further customized to include detection of very shallow inundation events on tidal flats, for example to study propagule dispersal. Whereas WoO may be very stochastic and require deployment across seasons or even years to detect, average inundation conditions and velocities can be adequately estimated with monitoring across one or more spring-neap tidal cycle (>15days). Seasonal variability of conditions, especially with respect to the fruiting season of the desired species, should be accounted for where possible. To allow for a first rapid assessment of hydrological site suitability without expert knowledge and with a single Mini Buoy the R shiny app contains several warning/interpretation messages related to SE Asian mangrove habitat suitability. For general site unsuitability (WoO < 1 day and for inundation durations >800 min/day or <100 min/d) warning messages will appear. Velocities are classified as low ($\leq 15\text{cm/s}$) and high ($> 15\text{cm/s}$) to allow a first estimation of hydrodynamic exposure. Warning messages will also appear where measurements do not cover spring and neap tidal cycles (i.e. are shorter than 15 days). For more detailed single-deployment approaches, Mini Buoy data could be combined with a parameterized WoO model of the local pioneer species including root-growth rates and stability thresholds (Balke et al., 2014, 2015). Wave exposure could be included in site suitability assessments for wave exposed tidal flats, however, such sites are generally not recommended for restoration in the first place due to low success rates (Wodehouse and Rayment, 2019).

Our mangrove site comparison (Fig. 6, Table 1) using the Mini Buoys demonstrated how hydrological site conditions can vary locally. The site 'Abandoned 1' was the only site which exceeded the 800 min/d inundation threshold due to a temporarily closed sluice gate in the second half of the monitoring period. Hence the data from the Mini Buoy suggested that the remaining mangrove trees in 'Abandoned 1' (see photo in Fig. 6) will die off if the present flooding regime is maintained. Flooding duration in the 'Abandoned 2' site was generally suitable for mangrove pioneer colonization and current velocities were below the detection limit. This was corroborated by the recent establishment of *Avicennia* spp. saplings and trees at the site. The 'Restoration' site assessment confirmed that previously planted *Rhizophora apiculata* at this site is likely to survive as the flooding duration is slightly below 400 min/d and no significant current velocities were detected. This was the only site where WoO of >1 day were detected during the monitoring period, which suggests that additional natural colonization could be expected if propagule dispersal is not hindered. The predicted current velocities of the 'Open coast' tidal flat location (Table 1) showed the typical tidal pattern with flood, slack and ebb tides (see R shiny example in supplementary information).

Physiological tolerance to tidal inundation and establishment thresholds of mangroves also depend on other environmental factors such as soil anoxia, soil porewater salinity, bioturbation, microclimate etc. (Krauss et al., 2008). These factors may enhance or restrict the flooding tolerance of mangrove seedlings and trees at a given location. We therefore advocate the deployment of two Mini Buoys in tandem (as implemented in the R shiny application) in order to generate site-specific

Deleted: Window of Opportunity (

Deleted:)

Deleted: Fig. 6

Deleted: Fig. A4

620 physiological thresholds, rather than rely on published information alone. This is especially recommended during short-term
deployments over single spring-neap cycles. One Mini Buoy monitoring the conditions at the target restoration site can be
compared to Mini Buoy data from a local reference site with the desired conditions and plant community. This has several
benefits: i) the reference site will likely experience the same regional stochastic variation in water levels (i.e. wind setup) over
the monitoring period, ii) the reference site will have the same local species pool and iii) the reference site will have similar
635 edaphic soil conditions. Reference sites should show recent seedling establishment of the desired species as conditions suitable
for seedling establishment are not equal to conditions required for survival of mature mangrove trees (Krauss et al., 2008). An
example of the R shiny application output for a comparative deployment between is provided in the [supplementary information](#).

5 Conclusions

630 With this study we were able to show that low-cost monitoring of hydrological conditions in intertidal environments
(inundation and current velocities) across multiple spring-neap tidal cycles is possible using single axis accelerometer
technology and readily available materials for an underwater float (i.e. the Mini Buoy). Whereas this approach can be a useful
tool in coastal research, we especially highlight the Mini Buoy as a stand-alone tool for easy-to-implement hydrological site
suitability assessments prior to mangrove restoration. The Mini Buoy can be globally implemented as a standard for mangrove
restoration site assessments as it is low cost, easy to transport across borders, difficult to spot on the tidal flat, not prone to
635 storm damage as it is close to the ground and does not require specialist knowledge in coastal engineering or data analysis.
Especially in the complex hydrological networks of abandoned aquaculture ponds in SE Asia, the Mini Buoy has the potential
to efficiently assess site and pond specific conditions with only a few Mini Buoys rotated around the site. Learning from past
mistakes in mangrove restoration, where a lack of hydrological site assessments has led to very low restoration success rates
(Dale et al., 2014; Kodikara et al., 2017; Zaldivar-Jimenez et al., 2010), this new affordable and easy to implement technology
640 will be able to assist urgently needed upscaling of future mangrove rehabilitation efforts (Worthington and Spalding, 2018).

Deleted: appendix A4

Moved down [3]: With this study we were able to show that low-cost monitoring of hydrological conditions in intertidal environments (inundation and current velocities) across multiple spring-neap tidal cycles is possible using single axis accelerometer technology and readily available materials for a bottom mounted float (i.e. the Mini Buoy). Whereas this approach can be a useful tool in coastal research, we especially highlight the Mini Buoy as a stand-alone tool for easy-to-implement hydrological site suitability assessments prior to mangrove restoration. Learning from past mistakes in mangrove restoration, where a lack of hydrological site assessments has led to very low restoration success rates (Dale et al., 2014; Kodikara et al., 2017; Zaldivar-Jimenez et al., 2010), this new affordable and easy to implement technology will be able to assist upscaling of future mangrove rehabilitation efforts (Worthington and Spalding, 2018). The Mini Buoy can be globally implemented as a standard for mangrove restoration site assessments as it is low cost, easy to transport across borders, difficult to spot on the tidal flat, not prone to storm damage as it is close to the ground and does not require specialist knowledge in coastal engineering or data analysis. Especially in the complex hydrological networks of abandoned aquaculture ponds in SE Asia, the Mini Buoy has the potential to efficiently assess site and pond specific conditions with only a few Mini Buoys rotated around the site. The Mini Buoy concept design and data analysis could also be applied for hydrological monitoring of river floodplain/riparian systems.¶

Deleted: ¶

Moved (insertion) [3]

Deleted: bottom mounted

Deleted: Learning from past mistakes in mangrove restoration, where a lack of hydrological site assessments has led to very low restoration success rates (Dale et al., 2014; Kodikara et al., 2017; Zaldivar-Jimenez et al., 2010), this new affordable and easy to implement technology will be able to assist upscaling of future mangrove rehabilitation efforts (Worthington and Spalding, 2018).

Deleted: The Mini Buoy concept design and data analysis could also be applied for hydrological monitoring of river floodplain/riparian systems.

680 Figure A1: Mini Buoy components and installation



Fix logger to metal stake, protruding <1cm from tidal flat sediment

Table A2: Components of the Mini Buoy (without Temperature and light logger)

Item	Size	Weight
Corning® 50 mL PP Centrifuge Tubes, Self-Standing CentriStar™	114.9mm (L)	14.6g
Accelerometer MSR 145 B4A (MSR Electronics GmbH, Switzerland)	20 x 14 x 62 mm (W x H x L)	18g
3x Interlock Snap Fishing Swivel with Barrel (#1)	55mm (L)	1.9g
Foam to insert at bottom of logger, plastic bag to wrap accelerometer, tape, silicone seal	various	< 4g
TOTAL		42.3g

Deleted: ¶

Page Break

¶ Appendices¶

Formatted: Heading 1

Formatted: Font: (Default) Times New Roman

690

Figure A3: Calibration of 10 second measurement interval data for 15-minute time steps

a) Linear Discriminant Analysis for North Sumatra dataset (B11 and B12) using 10-second interval acceleration data and aggregation over 15-minute time steps (**l=low tide, h=high tide, red letters = false predictions**). Additionally, the LDA group averages are indicated as orange dots. The -0.5 y acceleration threshold to separate inundation from non-inundation time steps was applied for the R shiny application.

Linear regression (blue line) provided the best fit for the median y-axis acceleration [Y_{acc} (g)] against the measured current velocity of B1 [V_{cur} (m/s)] for 15-minute intervals: $V_{cur} = 1.173 + 1.059 * Y_{acc}$, $R_{adj} = 0.7724$, $P < 0.05$. The grey line shows the 1 Hz deployment regression line of Fig. 3 and the green line the predictions within the measured range of values.

695

700

Deleted: Page Break

Deleted: 2

Deleted: T

Formatted: Font: 10 pt

Deleted: .


Formatted: Not Superscript/ Subscript

Formatted: Subscript

27

Figure A4: Time series example of temperature data at the Bay of Fundy Mini Buoy L2.

Measured temperature during inundation by the Hobo data logger fixed to the top of the Mini Buoy L2, colours indicate first and second half of inundation.

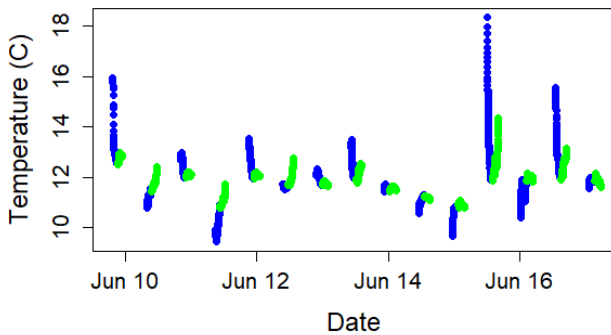

710

Deleted: 3

715 **Code and data availability:**

The Rshiny app can be used directly online under: <https://mangroverestoration.shinyapps.io/MiniBuoyApp/>

Code is available on Github: <https://github.com/thorstenbalke/Mini-Buoy.git>

1. Mini Buoy R shiny app code (.R)

720 2. Mini Buoy Manual

Zenodo repository: [10.5281/zenodo.4521304](https://zenodo.org/record/105281/files/4521304)

1. Readme file

2. Aquadopp data (.dia):

725 2.1 North Sumatra

2.2 Bay of Fundy

3 Mini Buoy data (.csv):

3.1 Bay of Fundy: Mini Buoy acceleration L1-8 and Temperature/Light data

730 3.2 North Sumatra study site: Mini Buoy acceleration B1-16

Deleted: ¶

Figure A4 Comparative deployment example output of the Mini Buoy R shiny application. Site 'Restoration' at Belawan was used as the site of interest and the reference site was the 'Open coast' deployment (Fig. 6).¶



File input: Site of interest


Browse... Restoration Belawan1.csv

Upload complete

File input: Reference site

Browse... Open Coast B19.csv

Upload complete



¶

Indicator	
Monitoring period (d)	
Avg. high tide duration (min)	
Flooding frequ. (F/d)	
Max. WoO duration (d)	
Avg. flooding duration (min/d)	
Median current vel. (m/s)	
75 percentile velocity (m/s)	
Flood-ebb median velocity (m/s)	

Site of interest - Interpretation: In duration generally suitable...

Deleted: Page Break

Deleted: [10.5281/zenodo.4244642](https://zenodo.org/record/105281/files/4244642)

755 3.3 North Sumatra additional sites (.csv)

- Open Coast Percut Sei Tuan
- Abandoned pond 1 Percut Sei Tuan non-tidal
- Abandoned pond 2 Percut Sei Tuan (study site)
- Restoration Belawan

760 - Channel (B1)

4 Animations of inundation/velocity predictions (mp4, gif):

4.1 Bay of Fundy animation of current velocities at 10-minute time steps, arbitrary scale for the bars (.gif)

4.2 Inundation animation of the North Sumatra field site for two tidal cycles: (.mp4)

[5 Mini Buoy application screenshots](#)

765

Author contribution

Balke designed the Mini Buoy, carried out the data analysis and coding of the R shiny app and lead the writing of the manuscript. Balke and Basyuni carried out fieldwork in Indonesia. Balke and Chmura carried out fieldwork at the Bay of Fundy. Schwarz assisted with hydrodynamic analyses for the Bay of Fundy dataset. Balke, Vovides, Schwarz, Chmura, Ladd and Basyuni jointly wrote and improved the final manuscript.

770

Acknowledgements

Balke and Vovides acknowledge NERC grant NE/P014127/1 for financial support. Balke acknowledges the Early Career Mobility Scheme of the University of Glasgow and the British Society for Geomorphology for additional financial support to conduct fieldwork at the Bay of Fundy. Balke and Ladd acknowledge Living Deltas NE/S008926/1. Basyuni acknowledge DIPI-LPDP grant NE/P014127.1 for financial support. We thank M. Kalacska for loan of the Emlid DGPS Rover. We thank Bejo Slamet, Nurdin Sulistiyono, Yunta Bimantra, Riska Amelia, Muttia Chandra, and Nur Indah Lestari for help with fieldwork at Percut Sei Tuan. We thank Zulkifli and Legiman for allowing us to access the former aquaculture ponds at Percut Sei Tuan. We thank Yagasu for allowing us to access their restoration site at Belawan.

775

References:

Akeila, E., Salcic, Z. and Swain, A.: Smart Pebble for Monitoring Riverbed Sediment Transport, IEEE Sens. J., 10(11), 1705–1717, <https://doi.org/10.1109/JSEN.2010.2046726>, 2010.

780

- Albers, T. and Schmitt, K.: Dyke design, floodplain restoration and mangrove co-management as parts of an area coastal protection strategy for the mud coasts of the Mekong Delta, Vietnam, *Wetl. Ecol. Manag.*, 23(6), 991–1004, <https://doi.org/10.1007/s11273-015-9441-3>, 2015.
- 785 Balke, T., Bouma, T., Horstman, E., Webb, E., Erfteimeijer, P. and Herman, P.: Windows of opportunity: thresholds to mangrove seedling establishment on tidal flats, *Mar. Ecol. Prog. Ser.*, 440, 1–9, <https://doi.org/10.3354/meps09364>, 2011.
- Balke, T., Herman, P. M. J. and Bouma, T. J.: Critical transitions in disturbance-driven ecosystems: identifying Windows of Opportunity for recovery, edited by C. Nilsson, *J. Ecol.*, 102(3), 700–708, <https://doi.org/10.1111/1365-2745.12241>, 2014.
- 790 Balke, T., Swales, A., Lovelock, C. E., Herman, P. M. J. and Bouma, T. J.: Limits to seaward expansion of mangroves: Translating physical disturbance mechanisms into seedling survival gradients, *J. Exp. Mar. Biol. Ecol.*, 467, 16–25, <https://doi.org/10.1016/j.jembe.2015.02.015>, 2015.
- Beanland, E., Main, L. C., Aisbett, B., Gastin, P. and Netto, K.: Validation of GPS and accelerometer technology in swimming, *J. Sci. Med. Sport*, 17, 234–238, <https://doi.org/10.1016/j.jsams.2013.04.007>, 2014.
- 795 Bockelmann, A.-C., Bakker, J. P., Neuhaus, R. and Lage, J.: The relation between vegetation zonation, elevation and inundation frequency in a Wadden Sea salt marsh, *Aquat. Bot.*, 73(3), 211–221, [https://doi.org/10.1016/S0304-3770\(02\)00022-0](https://doi.org/10.1016/S0304-3770(02)00022-0), 2002.
- Bouma, T. J., Temmerman, S., Duren, L. A., Martini, E., Vandenbruwaene, W., Callaghan, D. P., Balke, T., Biermans, G., Klaassen, P. C., Steeg, P., Dekker, F., Koppel, J., Vries, M. B. and Herman, P. M. J.: Organism traits determine the strength of scale-dependent biogeomorphic feedbacks: A flume study on three intertidal plant species, *Geomorphology*, 180–181, 57–65, <https://doi.org/10.1016/j.geomorph.2012.09.005>, 2013.
- 800 Chang, W., Joe Cheng, J. J. A., Xie, Y. and McPherson, J.: shiny: Web Application Framework for R. <https://CRAN.R-project.org/package=shiny>, 2020.
- Dale, P., Knight, P. and Dwyer, P.: Mangrove rehabilitation: a review focusing on ecological and institutional issues, *Wetl. Ecol. Manag.*, 229, 587–604, <https://doi.org/10.1007/s11273-014-9383-1>, 2014.
- 805 Delgado, P., Hensel, P. F., Jiménez, J. A. and Day, J. W.: The importance of propagule establishment and physical factors in mangrove distributional patterns in a Costa Rican estuary, *Aquat. Bot.*, 71(3), 157–178, [https://doi.org/10.1016/S0304-3770\(01\)00188-7](https://doi.org/10.1016/S0304-3770(01)00188-7), 2001.
- Figurski, J. D., Malone, D., Lacy, J. R. and Denny, M.: An inexpensive instrument for measuring wave exposure and water velocity: Measuring wave exposure inexpensively, *Limnol. Oceanogr. Methods*, 9(5), 204–214, <https://doi.org/10.4319/lom.2011.9.204>, 2011.
- Hansen, A. B., Carstensen, S., Christensen, D. F. and Aagaard, T.: PERFORMANCE OF A TILT CURRENT METER IN THE SURF ZONE, *Coast. Dyn.*, 218, 11, 2017.
- 810 Jiménez, J. A., Sauter, K. and Jimenez, J. A.: Structure and Dynamics of Mangrove Forests along a Flooding Gradient, *Estuaries*, 14(1), 49, <https://doi.org/10.2307/1351981>, 1991.
- Koch, E. W., Ailstock, M. S., Booth, D. M., Shafer, D. J. and Magoun, A. D.: The Role of Currents and Waves in the Dispersal of Submersed Angiosperm Seeds and Seedlings, *Restor. Ecol.*, 18(4), 584–595, <https://doi.org/10.1111/j.1526-100X.2010.00698.x>, 2009.
- 815 Kodikara, K. A. S., Mukherjee, N., Jayatissa, L. P., Dahdouh-Guebas, F. and Koedam, N.: Have mangrove restoration projects worked? An independent study in Sri Lanka, *Restor. Ecol.*, 25(5), 705–716, 2017.
- Krauss, K. W., Lovelock, C. E., McKee, K. L., López-Hoffman, L., Ewe, S. M. L. and Sousa, W. P.: Environmental drivers in mangrove establishment and early development: A review, *Aquat. Bot.*, 89(2), 105–127, <https://doi.org/10.1016/j.aquabot.2007.12.014>, 2008.
- Lewis, R. R.: Ecological engineering for successful management and restoration of mangrove forests, *Ecol. Eng.*, 24(4), 403–418, <https://doi.org/10.1016/j.ecoleng.2004.10.003>, 2005.

- 820 Lewis, R. R. and Brown, B. M.: Ecological Mangrove Rehabilitation A Field Manual for Practitioners, third ed., Canadian International Development Agency, USAID, Oxfam., 2014.
- van Loon, A. F., Dijkma, R. and van Mensvoort, M. E. F.: Hydrological classification in mangrove areas: A case study in Can Gio, Vietnam, *Aquat. Bot.*, 87(1), 80–82, <https://doi.org/10.1016/j.aquabot.2007.02.001>, 2007.
- 825 MacDonald, G. A.: A review of low cost accelerometers for vehicle dynamics, *Sens. Actuators Phys.*, 21, 303–307, [https://doi.org/10.1016/0924-4247\(90\)8506-H](https://doi.org/10.1016/0924-4247(90)8506-H), 1990.
- Matthijs, S., Tack, J., Van Speybroeck, D. and Koedam, N.: Mangrove species zonation and soil redox state, sulphide concentration and salinity in Gazi Bay (Kenya), a preliminary study, *Mangroves Salt Marshes*, 3(4), 243–249, 1999.
- Mullarney, J., Norris, B., Bryan, K., Fricke, A., Sandwell, D. and Culling, D.: A Question of Scale: How Turbulence Around Aerial Roots Shapes the Seabed Morphology in Mangrove Forests of the Mekong Delta, *Oceanography*, 30(3), 34–47, <https://doi.org/10.5670/oceanog.2017.312>, 2017.
- 830 Passfield, L., Hopker, J. G., Jobson, S., Friel, D. and Zabala, M.: Knowledge is power: issues of measuring training and performance in cycling, *J. Sports Sci.*, 35, 1426–1434, <https://doi.org/10.1080/02640414.2016.1215504>, 2017.
- Pennings, S. C. and Callaway, R. M.: Salt Marsh Plant Zonation: The Relative Importance of Competition and Physical Factors, *Ecology*, 73(2), 681–690, <https://doi.org/10.2307/1940774>, 1992.
- 835 Primavera, J. H. and Esteban, J. M.: A.: A review of mangrove rehabilitation in the Philippines: successes, failures and future prospects, *Wetl. Ecol. Manag.*, 16(5), 345–358, <https://doi.org/10.1007/s11273-008-9101-y>, 2008.
- Proisy, C., Viennois, G., Sidik, F., Andayani, A., Enright, J. A., Guitet, S., Gusmawati, N., Lemonnier, H., Muthusankar, G., Olagoke, A., Proserpi, J., Rahmania, R., Ricout, A., Soulard, B. and Suhardjono: Monitoring mangrove forests after aquaculture abandonment using time series of very high spatial resolution satellite images: A case study from the Perancak estuary, Bali, Indonesia, *Mar. Pollut. Bull.*, 131, 61–71, <https://doi.org/10.1016/j.marpolbul.2017.05.056>, 2018.
- 840 Schwarz, C., Gourgue, O., Belzen, J., Zhu, Z., Bouma, T. J., Koppel, J. and Temmerman, S.: Self-organization of a biogeomorphic landscape controlled by plant life-history traits, *Nat. Geosci.*, 11(9), 672–677, <https://doi.org/10.1038/s41561-018-0180-y>, 2018.
- Silvestri, S., Defina, A. and Marani, M.: Tidal regime, salinity and salt marsh plant zonation, *Estuarine, Coast. Shelf Sci.*, 62(1–2), 119–130, <https://doi.org/10.1016/j.ecss.2004.08.010>, 2005.
- 845 Temmerman, S., Bouma, T. J., Koppel, J., Wal, D., De Vries, M. B. and Herman, P. M. J.: Vegetation causes channel erosion in a tidal landscape, *Geology*, 35(7), 631–634, 2007.
- Van der Stocken, T., De Ryck, D. J. R., Balke, T., Bouma, T. J., Dahdouh-Guebas, F. and Koedam, N.: The role of wind in hydrochorous mangrove propagule dispersal, *Biogeosciences*, 10(6), 3635–3647, <https://doi.org/10.5194/bg-10-3635-2013>, 2013.
- Venables, W. N. and Ripley, B. D.: *Modern Applied Statistics with S*, Fourth., Springer, New York., 2002.
- 850 Weihs, C., Ligges, U., Luebke, K. and Raabe, N.: *klaR Analyzing German Business Cycles*, edited by D. Baier, R. Decker, and L. Schmidt-Thieme, Springer-Verlag, Berlin., 2005.
- Wiehe, P.: O.: A Quantitative Study of the Influence of Tide Upon Populations of *Salicornia Europea*, *J. Ecol.*, 23(2), <https://doi.org/10.2307/2256124>, 1935.
- 855 Wodehouse, D. C. J. and Rayment, M. B.: Mangrove area and propagule number planting targets produce sub-optimal rehabilitation and afforestation outcomes, *Estuar. Coast. Shelf Sci.*, 222, 91–102, <https://doi.org/10.1016/j.ecss.2019.04.003>, 2019.

Wolters, M., Garbutt, A. and Bakker, J. P.: Salt-marsh restoration: evaluating the success of de-embankments in north-west Europe, *Biol. Conserv.*, 123(2), 249–268, <https://doi.org/10.1016/j.biocon.2004.11.013>, 2005.

Worthington, T. and Spalding, M.: *Mangrove Restoration Potential: A global map highlighting a critical opportunity.*, 2018.

860 Xiao, D., Zhang, C., Zhang, L., Zhu, Z., Tian, K. and Gao, W.: Seed dispersal capacity and post-dispersal fate of the invasive *Spartina alterniflora* in saltmarshes of the Yangtze Estuary, *Estuar. Coast. Shelf Sci.*, 169, 158–163, <https://doi.org/10.1016/j.ecss.2015.11.032>, 2016.

Zaldivar-Jimenez, M. A., Herrera-Silveira, J. A., Teutli-Hernandez, C., Comin, F. A., Andrade, J. L., Molina, C. C. and Ceballos, R. P.: Conceptual Framework for Mangrove Restoration in the Yucatan Peninsula, *Ecol. Restor.*, 28(3), 333–342, <https://doi.org/10.3368/er.28.3.333>, 2010.