

# 1 Macroinvertebrate habitat requirements in rivers: overestimation of 2 environmental flow calculations in incised rivers

3

4 Renata Kędzior<sup>1</sup>, Małgorzata Kłonowska-Olejniak<sup>2</sup>, Elżbieta Dumnicka<sup>3</sup>, Agnieszka Woś<sup>4</sup>, Maciej  
5 Wyrębek<sup>4</sup>, Leszek Książek<sup>4</sup>, Jerzy Grela<sup>5</sup>, Paweł Madej<sup>5</sup>, Tomasz Skalski<sup>6</sup>

6 <sup>1</sup>Department of Ecology, Climatology and Air Protection, Faculty of Environmental Engineering and Land Surveying,  
7 Agricultural University of Krakow, 30059, Krakow, Poland

8 <sup>2</sup>Centre of Research and Science Innovations, 20819, Lublin, Poland

9 <sup>3</sup>Institute of Nature Conservation, Polish Academy of Science, 31120, Krakow, Poland

10 <sup>4</sup>Department of Hydraulic Engineering and Geotechnics, Faculty of Environmental Engineering and Land Surveying,  
11 Agricultural University of Kraków Poland, 30059, Krakow, Poland

12 <sup>5</sup>MGGP joint-stock company, 33100, Tarnów, Poland

13 <sup>6</sup>Biotechnology Centre, Silesian University of Technology, 44100 Gliwice, Poland

14 *Correspondence to:* Tomasz Skalski (tomasz.skalski@polsl.pl)

15 **Abstract.** Flow variability determines the conditions of river ecosystem and river ecological functioning. The variability of  
16 ecological processes in river ecosystems gradually decreases due to river channelization and incision. Prediction of the  
17 environmental flow allowing to keep biological diversity and river health developed as a response to the degradation of aquatic  
18 ecosystems overexploited by human. The goal of the study was to test the influence of river incision on environmental flow  
19 estimation based on the biological monitoring working party macroinvertebrate index. The 240 macroinvertebrate  
20 assemblages of 12 waterbodies differing in the bed substrate, amplitude of discharge were surveyed in southern Poland. The  
21 variations in the distribution of 151 466 macroinvertebrates belonging to 92 families were analysed. The similarity of benthic  
22 macroinvertebrates reflects the typological division of the rivers into three classes: mountain Tatra streams, mountain flysch  
23 rivers, and upland carbonate and silicate rivers. As a response variable reflecting the macroinvertebrate distribution in the river,  
24 environmental parameters, BMWP\_PL index was chosen. The river incision significantly increased the values of e-flow  
25 calculations in relation to redeposited channels. The area of habitat suitability for macroinvertebrates decreased with the bed  
26 incision intensity. In highly incised rivers, the environmental flow values are close to the mean annual flow, suggesting that a  
27 high volume of water is needed to obtain good macroinvertebrate conditions. As a consequence, the river downcutting  
28 processes and impoverishment of suitable habitats will proceed.

## 29 1 Introduction

30 Human water demand, including irrigation to increase crop productivity, dams, and reservoirs to control the timing of stream  
31 flow, and water withdrawal from rivers, has increased dramatically over the last 100 years (Vörösmarty et al., 2010; Veldkamp  
32 et al., 2017). Maintenance of a suitable water flow in an active river channel should not only secure human needs, but above  
33 all ensure the proper functioning of aquatic ecosystems (Anderson et al., 2006). This has become particularly important since  
34 river beds began to be perceived not only as channels filled with water, but as complex ecological systems, in which biological  
35 elements play a key role (Poff et al., 1997; Bunn and Arthington, 2002; White et al., 2016). The Water Framework Directive

36 (WFD, European Community, 2000/60/EC) was introduced by European countries to protect and improve the state of aquatic  
37 ecosystems and formalize a water flow framework that would maintain this state (Chen and Olden, 2017).

38 Discharge intensity is one of the most important factors influencing multispecies communities of aquatic and water-dependent  
39 organisms (Tharme, 2003; Arthington et al., 2006; Higgisson et al., 2019). It is a parameter which shapes the morphology  
40 (Michalik and Książek, 2009) and hydraulic flow conditions (water depth, flow velocity) and it influences the diversity and  
41 quality of habitats for fauna and flora in the active channel and in the floodplain (Allan, 1995; Poff et al., 1997; Ward and  
42 Tockner, 2001; Skalski et al., 2016; 2020). Furthermore, flow significantly influences abiotic elements, such as water  
43 temperature and oxygenation, as well as nutrient cycles in the aquatic ecosystem (Monk et al., 2008; Laini et al., 2019). This  
44 applies in particular to rivers subjected to strong human impact (e.g., channel regulation and incision, dams, or retention  
45 reservoirs, as well as a continuous increase in water abstraction). Artificial restriction and control of a range of water flow  
46 values leads to substantial impoverishment of biological diversity (Pander et al., 2019). Environmental Flow is an amount of  
47 water required to maintain biological diversity in the river ecosystem. This definition requires to quantify ecological response  
48 of aquatic elements to flow alteration, which data are rather scarce in the literature (Poff and Zimmerman, 2010). Therefore, it  
49 appears crucial to estimate empirical ranges of environmental flows that ensure optimal habitat conditions for living organisms  
50 (Bunn and Arthington, 2002; Acreman et al., 2014).

51 Environmental flow has been studied by many researchers, resulting in numerous methods for its determination. The simpler  
52 ones include hydrological methods, which are based on historical hydrological data and mean annual discharge (Tennant,  
53 1976; Jowett, 1997; Tharme, 2003; Rosenfeld, 2017). Analysis of such data makes possible to specify a percentage of the  
54 mean annual flow as the critical value below which severe degradation of biotic elements occurs. Unfortunately, hydrological  
55 methods do not take into account the morphology of the river bed, which is a key factor shaping the river habitat (Książek et  
56 al., 2020). Therefore, a number of hydraulic methods based on simple hydraulic variables such as critical riffle analysis  
57 and wetted area/wetted perimeter have been introduced (Gippel and Stewardson, 1998; Książek et al., 2019). Determination  
58 discharge values (Q) for environmental flow involves defining the breaking point of the hydraulic variable discharge curves  
59 as the e-flow (Gippel and Stewardson, 1998; Vezza et al., 2012; Tare et al., 2017). Over time, hydraulic methods have  
60 developed in the direction of habitat simulation methods. They have additionally focused on the habitat requirements of  
61 selected groups of model organisms, most commonly water depth, flow velocity, and bed substrate (Jowett and Davey, 2007;  
62 Li et al., 2009; Muñoz-Mas et al., 2016). Based on the analysis of these environmental factors, habitat-discharge curves were  
63 drawn for organisms, and from these it was possible to read the optimal flows maintaining the normal ecological functions of  
64 aquatic ecosystems. Another type of method, which emphasizes the importance of the natural flow regime for the entire  
65 ecosystem, are holistic methods. They attempt to maintain the natural flow regime as well as flow variability. In this case,  
66 environmental flow is defined in the category of deviation from the natural flow regime (Yarnell et al., 2015).

67 The methods presented above focus on the fish distribution and rarely on diversity and availability of habitats for freshwater  
68 macroinvertebrates, which are the most important and sensitive indicators of the ecological state of the ecosystem (Jowett et  
69 al., 2008; Birk et al., 2012). The diversity and taxonomic composition of aquatic organisms living in freshwater streams and  
70 rivers are used as indicators in the evaluation of environmental flow (Pander et al., 2019). In many cases, macroinvertebrate  
71 assemblages are considered (Hayes et al., 2014; Laini et al., 2019), as numerous studies confirm that they are relatively good  
72 indicators of ecological water quality and integrity (Buss et al., 2015; Wyzga et al., 2016; Schneider and Petrin, 2017).

73 Freshwater macroinvertebrates also play an important role in the processing of nutrients and organic energy in running water  
74 ecosystems, as well as in sustaining ecosystem integrity.

75 Another parameter, which is usually neglected in flow modelling, is associated with morphological channel modification and  
76 incision (Wyzga et al., 2012; Skalski et al., 2016). Incision and channel simplification is a global problem overwhelming most  
77 of the rivers in the mountain as well as in upland areas (Skaipich et al., 2020). During the last 100 years anthropogenic  
78 processes related to river regulation (narrowing and straitening) disturbed the fluvial processes leading to enormous river


79 incision (Rinaldi et al., 2005; Wyżga, 2008). As a results rivers become a vertically closed systems losing the ability to store  
80 alluvial material. Moreover incision up to the bedrock simplifies the microhabitat array of the river (Neachell, 2014) and lead  
81 to elimination most of the habitats (Muñoz-Mas et al., 2016) as well as affect ecosystem functioning (biodiversity lost and  
82 food web network simplification, Shields et al., 1998; Jeffres et al., 2008).

83 The goal of the study was to test the influence of river incision on environmental flow estimation based on the biological  
84 monitoring working party macroinvertebrate index. Specific aims of the study were: (1) to establish the habitat preferences of  
85 macroinvertebrates communities (240 local assemblages) in mountain and upland rivers using generalized additive models,  
86 (2) to calculate the e-flow values combining the habitat requirements and hydraulic method of environmental flow calculation  
87 in relation to river hydromorphological parameters (redeposition and incision), (3) to identify reality of providing e-flow values  
88 for different hydromorphological modifications in relation to available amount of water (Low Low Flow, Mean Low Flow and  
89 Mean Annual Flow) and (4) to check and visualize the e-flow values in relation to available water volume on randomly chosen,  
90 incised, and redeposited rivers based on CCED2D model. We expected that e-flow in incised rivers, allowing to obtain the  
91 shelf zone level of the river should be much higher than Mean Low Flow. Such assumption could determine the consecutive  
92 higher discharges and increase the bed degradation. Firstly, we should restore the sedimentation processes in incised rivers to  
93 obtain a hydrodynamic balance and then manage the proper volume of water. As a consequence, suitable habitats for  
94 invertebrates and fish will be enlarged.

## 95 2. Materials and methods

### 96 2.1 Study sites

97 The survey was conducted in 12 mountainous rivers assigned to three typological groups according to the Polish Water  
98 National Authority and the Water Framework Directive (Jusik et al., 2014): Tatra mountain rivers (Biały Dunajec, Dunajec,  
99 and Białka - Group 1), mountain flysch rivers (Raba, Brynica, Toszecki Potok, and Nysa Kłodzka - Group 2) and upland  
100 carbonate and silicate rivers (Sołokija, Warta, Ropa, Biała, and Odra - Group 3) (Fig. 1), varying in bed modification (incision  
101 intensity or redeposition).

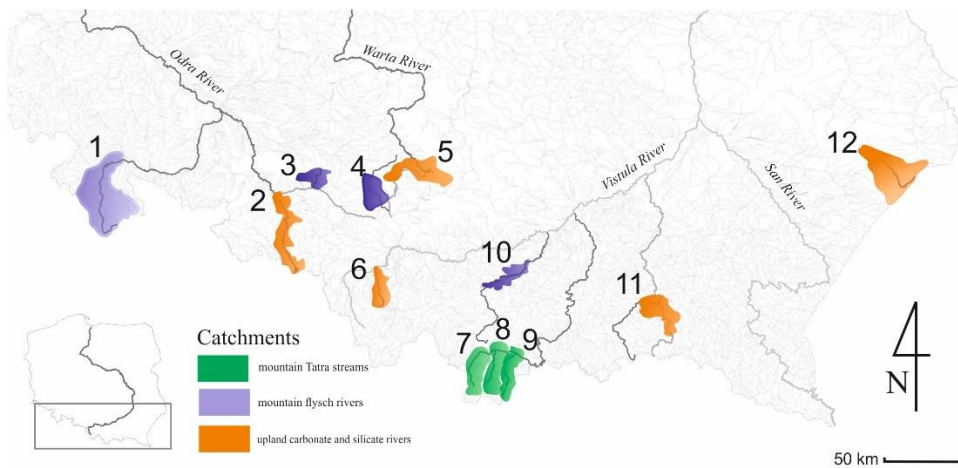

102  
103 Figure 1. Map of the studied mountainous rivers in Carpatho-Sudetic region of Poland.

104  
105 The first group comprises rivers located in an alpine granitoid region, characterized by calcareous and silicate bedrock. The  
106 second group consists of rivers flowing through much lower mountain ranges (up to the timber zone), where the bedrock  
107 contains sandstone rock formations. The third group represents rivers of upland landforms with various carbonate and silicate  
108 sediments and rocks. The typology of river channel modification was obtained from field observation and channel

109 measurements (cross-sections, longitudinal profile and cover, high of the floodplain). Narrow channels with downcutting to  
 110 the floodplain and simplified channel morphology were defined as incised.

111 All rivers are routinely monitored by the nearest monitoring station of the Environmental Agency (Environmental Agency  
 112 Data, 2018), and all twelve rivers have consistently been assigned a similar average chemical status in recent years. ANOVA  
 113 showed no variation between the river groups in incision bed modification ( $F=1.56$ ,  $p=0.26$ ) as well as in physicochemical  
 114 properties: dissolved oxygen, conductivity, hardness,  $pH_{max}$ ,  $NH_3$ ,  $NO_3^-$ ,  $NO_2^-$ , total N, and  $PO_4^{3-}$ . Only water temperature and  
 115  $pH_{min}$  significantly depended on the river group. All habitat variables (flow, depth and substrate type) were significantly  
 116 dependent on river group (Table 1), meanwhile the incision was not influenced by the parameters variation.

117

118 Table 1 Mean values  $\pm$  standard deviation of the physicochemical and habitat variables of the three river groups, with results  
 119 of one-way ANOVA.

Environmental data	Group 1		Group 2		Group 3		F	p
	Mean	St. dev.	Mean	St. dev.	Mean	St. dev.		
<b>Physicochemical</b>								
Water temperature [ $^{\circ}C$ ]	7.27	1.55	11.40	2.43	12.17	0.89	6.76	<b>0.016</b>
Dissolved oxygen [ $mgL^{-1}$ ]	10.73	0.45	9.33	1.34	9.15	0.79	2.39	0.150
Conductivity [ $\mu S\ cm^{-1}$ ]	202.67	91.58	1095.60	1594.59	356.5	93.26	0.85	0.458
Water hardness [mg $CaCO_3/l$ ]	113.00	55.49	252.10	298.52	148.5	20.87	0.53	0.602
$pH_{min}$	7.97	0.11	7.52	0.11	7.20	0.08	47.91	<b>0.000</b>
$pH_{max}$	8.43	0.35	8.16	0.15	8.15	0.37	1.04	0.390
$NH_3$ [ $mgL^{-1}$ ]	0.20	0.31	0.32	0.36	0.95	0.81	2.09	0.179
$NO_3^-$ [ $mgL^{-1}$ ]	0.60	0.20	2.11	0.93	2.25	0.92	4.16	0.052
$NO_2^-$ [ $mgL^{-1}$ ]	0.02	0.01	0.10	0.12	0.17	0.13	1.45	0.284
Total N [ $mgL^{-1}$ ]	0.97	0.75	3.43	1.78	4.17	2.09	3.12	0.093
$PO_4^{3-}$ [ $mgL^{-1}$ ]	0.03	0.04	0.09	0.05	0.06	0.02	2.08	0.180
<b>Habitat</b>								
Flow [ $m^3s^{-1}$ ]	0.83	0.55	0.45	0.39	0.44	0.32	38.06	<b>0.000</b>
Depth [m]	0.29	0.14	0.54	0.34	0.50	0.33	25.89	<b>0.000</b>
Substrate index	22.31	5.60	7.07	5.58	6.39	3.85	422.95	<b>0.000</b>

120

## 121 2.2 Macroinvertebrate sampling

122 Benthic invertebrate samples were collected in two seasons: autumn (October, 2017) and spring (April, 2018). No flood waves  
 123 occurred between these surveys, and the channel morphology remained the same throughout the sampling period. We collected  
 124 20 subsamples (1  $m^2$  each subsample) from each low-flow channel along a representative 100 m section of each river according  
 125 to the sampling procedure for the BMWP\_PL index (Bis and Mikulec, 2013). A total of 480 subsamples were taken from a  
 126 wide range of water depths and flow velocity. Following Jowett et al. (1991) and Muñoz-Mas et al. (2016), the substrate types  
 127 were converted to a single index by summing the weighted percentages of each type.

128 Macroinvertebrate samples were collected with a D-frame net according to the Environmental Agency's sampling protocol for  
 129 biomonitoring assessment using a kicking motion for 3 minutes across all habitats (Bis and Mikulec, 2013). All collected  
 130 material was preserved in the field with 4% formaldehyde. Aquatic macroinvertebrates were separated from the rest of the

131 material in the laboratory using a stereoscopic microscope and then, they were identified to the family level (Tachet et al.,  
132 2000), except Oligochaeta, Porifera, and Hydrozoa, which were recorded as such. Due to the varied preferences of  
133 macroinvertebrates to habitat conditions, the BMWP\_PL index was adopted as the best qualitative index. The Biological  
134 Monitoring Working Party (BMWP) is one of the most commonly used biotic indices in various rivers and streams around the  
135 world (Roche et al., 2010; Wyżga et al., 2013). It has been adopted in many countries, including Poland (Dz.U. 2019 poz.  
136 2149, 2019). The BMWP index was originally developed to represent water quality, but subsequent studies showed that it  
137 reflects ecological quality of the waterbodies and can be also related to hydromorphological impoverishment such like incision  
138 or straightening (Mutz et al., 2013; Wyżga et al., 2013; Mikuś et al., 2021). This index best considers the sensitivity of  
139 invertebrates to environmental variables, because families with similar stress tolerances are grouped together (Armitage et al.,  
140 1983).

### 141 **2.3 Data analysis**

142 ANOVA was used to verify the statistical significance of the differences in environmental data between the three river groups  
143 groups (Statsoft, 2013). Non-metric multidimensional scaling (NMDS) was used to test the relationship between the  
144 macroinvertebrate taxonomic composition of the assemblages of the 12 rivers assigned to three groups (Group 1, Group 2 and  
145 Group 3) and hydromorphological variables (water velocity and depth) during the spring and autumn. Descriptive physical  
146 properties (water depth and velocity) were classified into two or three categories: Low, Medium and High. We used minimum  
147 and maximum values of depth and velocity range in each river group and divided them into 33 percentile ranges of the total  
148 value variability. In the case when the ranges were less than 0.5 m depth we have chosen two groups of 50 percentiles of the  
149 depth ranges. The significance of differences between depth and velocity classes was tested by ANOSIM (p-values of pairwise  
150 comparison with Bonferroni correction) on the Bray-Curtis dissimilarity matrix with 499 permutations of the data. PAST  
151 software (version 3.13) was used to analyse NMDS and ANOSIM (Hammer et al., 2001).

152 To develop habitat suitability functions of macroinvertebrates, reflecting the optimal conditions in the river, generalized  
153 additive models (GAMs) procedures were chosen. The advantage of the method described by Jovett and Davey (2007), is that  
154 it calculates the probability of relations between dependent biotic variables and independent flow parameters. To choose the  
155 best-fitting model, we have ranked the available models according to Akaike information criteria procedure and  $\Delta AICc$  values,  
156 which reflects the difference of AIC between a given model and the lowest AIC. The best fitting model, describing the  
157 relationship between independent variables (depth and velocity and its two-way interaction between them) and  
158 macroinvertebrate BMWP\_PL index, was generalized additive model with Poisson error distribution and log link function.  
159 We have also measured the accuracy of the GAM procedures (Shearer et al., 2015). The total deviance explained calculated  
160 as the relative difference between the residual and the null deviances of the model ( $[\text{null deviance} - \text{residual deviance}] / \text{null}$   
161  $\text{deviance}$ ) was adopted. The course of the regression line of the BMWP-PL and depth and velocity for each group of the bed  
162 material rivers was obtained using CurveExpert software, where the best fitted line for the set of nonlinear curves was applied  
163 and ranked. The BMWP\_PL curve maximum values were regarded as the most suitable for invertebrates and the most  
164 preferred. We were interested in calculation of optimal condition for depth and velocity separately to obtain the optimal  
165 conditions allowing to calculate the discharge which are needed for hydraulic and CCHE2D modelling. The preferred depths  
166 and velocities for each season and river bed material groups were used to calculate the hydraulic discharges which are the most  
167 suitable for BMWP\_PL variables and recognized as environmental flow.


### 168 **2.4 Hydraulic modelling**

169 We used the hydraulic method for the assessment of the environmental flow of each river because of the relationship between  
170 the hydraulic parameters of watercourses (depth and velocity) and the quality of the aquatic environment (BMWP\_PL - GAM

171 relations). We used rating curves for each river describing the water depth – flow relations to obtain environmental flow for  
 172 given optimal depth. Detailed description of the applied hydraulic method of environmental flow calculation is given in  
 173 Książek et al. (2019). To compare the environmental flow in relation to hydromorphological parameters (incision,  
 174 redeposition), we used the proportion of Environmental flow ( $Q_{env}$ ) to mean hydraulic parameters of the minimum discharge:  
 175 Low Low Flow (LLF), Mean Low Flow (MLF), and Mean Annual Flow (MAF). Those metrics show the position of the  
 176 calculated environmental flow in relation to available water volume (flow characteristics from hydrological year-to-year 1961  
 177 to 2017 observations).

## 178 2.5 Case study 2D modelling methodology

179 We provided the detailed modelling of a randomly chosen incised and redeposited river based on CCHE2D model. The model  
 180 is a depth-averaged two-dimensional numerical model for simulating unsteady, turbulent, free-surface flow in open channels  
 181 with a moveable bed. The CCHE2D model solves depth-integrated shallow water equations for all hydraulic calculations (Wu  
 182 et al., 2000; Duan et al., 2001). The CCHE2D package consists of two modules: a Mesh Generator (MG) and a Graphical User  
 183 Interface (GUI). The main function of the MG is designing a complex mesh system. The mesh is generated based on the  
 184 surveyed topography and/or Digital Terrain Model (DTM). The model was applied in two representative rivers, varying in  
 185 river bed morphology – from incised bed rock channels to a channel with natural sediment structures (with redeposition). The  
 186 mesh for each sector of the river was generated by interpolating cross sections. A total of 5,112 observations were used: Raba  
 187 – 3033 (incision) and Ropa – 2079 (redeposition). The shape of the channels was fairly regular along the reach under study,  
 188 and its pattern presented little complexity (i.e., a single channel with no islands), but riffle-pool sequences were observed. The  
 189 153–200 m long meshes were composed of cells and nodes (length and number of nodes, respectively, for Ropa 153 m, 49715  
 190 and Raba 200 m, 99200). Data used for the initial conditions was extracted from field measurements. Special attention was  
 191 devoted to bed roughness due to its importance for water surface level. Roughness values ranged from 0.01 in hydraulic smooth  
 192 bed zones to 0.07 in rough areas. Finally, the model time step was defined at 0.1 s or 0.25 s, depending on the model structure.  
 193 The model was calibrated by comparing the measured and computed water surface levels for measured discharges in all cells  
 194 and nodes (Fig. 2).

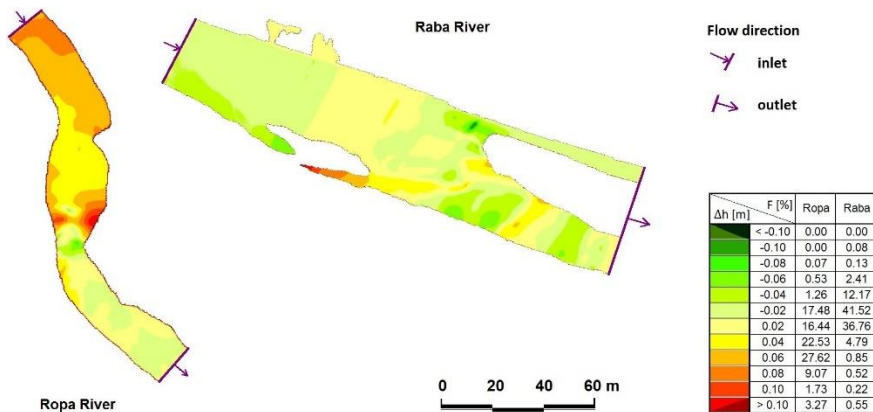


195  
 196 Figure 2. Comparison of calculated and measured water surface levels: The Ropa River for discharge  $6.71 \text{ m}^3\text{s}^{-1}$ , and The Raba  
 197 River for discharge  $10.29 \text{ m}^3\text{s}^{-1}$  ( $\Delta h$  – difference between measured and calculated water surface level, F - area of particular  
 198 differences, percentage).

199  
 200 In the case of the Raba River, for 70% of the calculated nodes, the difference between the calculated and measured water  
 201 surface level (WSL) was in the range  $\pm 0.02 \text{ m}$ . 84% of Ropa River nodes were in the range between of  $-0.02$  to  $0.06 \text{ m}$ . In all  
 202 described models,  $\Delta h$  in the main channel does not cross  $\pm 0.02 \text{ m}$ , but the visible differences are related to the horizontal layout

203 of WSL in cross-section. Evaluation of the compatibility measures of the numerical model showed very good accordance  
204 (Książek et al., 2010) and the prepared models did not need recalibration.

205 The habitat suitability index was estimated in the first step by selecting a usable habitat for macroinvertebrates. For each  
206 research section, we choose 20 points at each subsampled area differing in water velocity and water depth as the main  
207 environmental variables creating habitat heterogeneity for macroinvertebrates. Then, according to the relationship between  
208 hydromorphological habitat attributes (water depth and velocity) and the BMWP\_PL index values (describing the ecological  
209 quality of the river), we constructed a GAM model as the best fitted method to mark out the range of hydromorphological  
210 attributes (where the BMWP\_PL suitability index obtained from the GAM model curve is the highest). Based on the optimal  
211 depth values environmental flow was established using rating curves.

212 Two rivers (located in the same Carpathian region) representing opposite bed modifications (incision and redeposition) were  
213 chosen for the model as a case study. The modelled sectors of the river had channels with a pool-riffle sequence and fluvial  
214 deposits, but varied in terms of degradation of the bed structure. The hydrological characteristics of the modelled river are  
215 presented in Fig. 3.

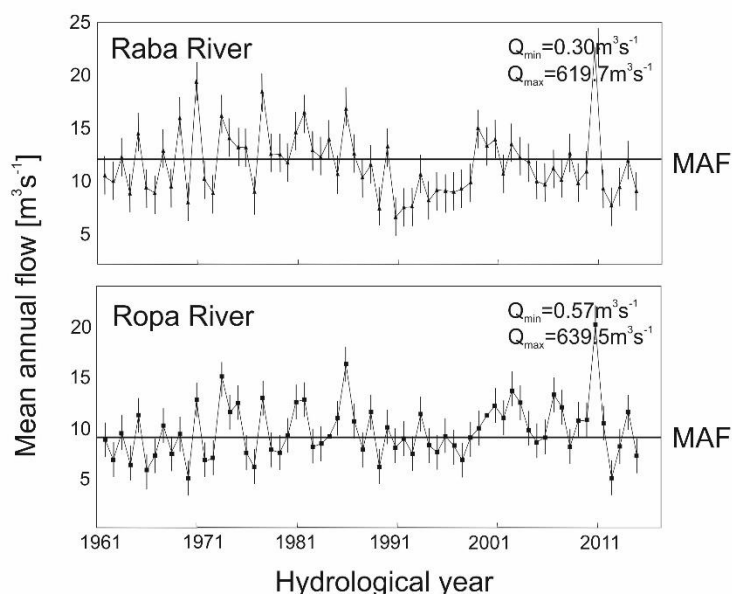

216

217 Figure 3. Changes in hydrological regime of the Raba and Ropa Rivers. The horizontal line indicates the Mean Annual Flow  
218 (MAF).

219

220 The Raba was selected to represent incised channel rivers (bottom material mainly gravel and small stones, substrate index  
221 14.9). The Dobczyce retention reservoir, which influences the hydrology and morphology of the river, is located upstream of  
222 the examined sector of the river (12 km). Constructing of the retention reservoir in 1986 led to a significant decline in average  
223 annual flow values (MAF values varied from  $12.22\text{m}^3/\text{s}$ ; in 1951-1985 to  $10.57\text{m}^3/\text{s}$  in 1986-2015,  $F = 49.90$ ,  $p < 0.0001$ )  
224 and broke the continuity of the sediment transport. The reduction in flow, blockade of sediment supply and longitudinal training  
225 work of the Raba led to incision of the riverbed and permanent compactness of the bed material. The Ropa River, chosen to  
226 represent the redeposition processes, was located among upland, carbonate, and silicate rivers, with the lowest human impact–  
227 agricultural land. The bottom material consists mainly of gravel and sand (substrate index 7.2), where bedload transport  
228 remains undisturbed.

229 We also wanted to estimate minimum flow values for two rivers which were modelled using CCHE2D. The values of depth  
230 and velocity corresponding th the highest BMWP\_PL, obtained from the GAM model for each group of river and season were  
231 plotted against the number of pixels having values resembling suitability model. Giving those calculations we were able to  
232 obtain the Weighted Usable Area (WUA) showing the most suitable habitat parameters (GAM depth and GAM velocity). Each

233 pixel covered 0.25 m<sup>2</sup> of total river area, so the number of counted calculated cells were the given values of velocity and depth  
 234 of each group of river were summarized and multiplied by the surface area. Based on those calculations using CCHE2D model  
 235 we were able to find the relationship between usable area and flow values. To calculate the optimal environmental flow values,  
 236 the curve between flow and suitable area was created. The optimum of environmental flow was estimated as 50% of WUA  
 237 values (Jowett et al., 2008) for CCHE2D modelled rivers.

238 A hydraulic habitat 2D model of each river section was used for spring and autumn as an example to estimate habitat prediction  
 239 in terms of calculated environmental flow during the season. Environmental flow that did not meet the conditions of 100%  
 240 habitat suitability for macroinvertebrates was expressed as the critical instream environmental flow value ( $Q_{env}$  critical), below  
 241 which the parameters of aquatic macroinvertebrate communities dramatically declined.

### 242 3. Results

#### 243 3.1 Environmental flow based on benthic invertebrates distribution in relation to river hydromorphology

244 A total of 151 466 individuals belonging to 92 benthic invertebrate families from 480 macroinvertebrate assemblages were  
 245 identified. High variation was shown in the taxonomic composition of aquatic invertebrates depending on the  
 246 hydromorphological parameters (water depth and velocity) and the season (Fig. 4). In the case of rivers classified as Group 1,  
 247 water velocity was found to significantly affect the taxonomic composition of the macroinvertebrates in both spring and  
 248 autumn (Table 2).

250 Table 2 Results of ANOSIM analysis comparing macroinvertebrate assemblages between classes of velocity and depth  
 251 measured for three river groups in the spring and autumn season.


		Velocity			Depth		
		Low - Medium	Medium - High	High - Low	Low - Medium	Medium - High	High - Low
Spring	Group 1	<b>0.1*</b>	<b>0.21**</b>	<b>0.1*</b>	-0.01		
	Group 2	<b>0.09**</b>	<b>0.09**</b>	<b>0.16***</b>	-0.01	<b>0.13**</b>	<b>0.16***</b>
	Group 3	<b>0.07*</b>	0.01	<b>0.12**</b>	0.02	<b>0.26***</b>	<b>0.08*</b>
Autumn	Group 1	0.04	0.06	<b>0.09*</b>	0.0001		
	Group 2	<b>0.15***</b>	<b>0.25***</b>	<b>0.39***</b>	<b>0.07*</b>	<b>0.3***</b>	<b>0.13***</b>
	Group 3	0.04	0.03	0.03	0.03	<b>0.11**</b>	0.01

252 Significance level (p with Bonferroni correction): \*p<0.05, \*\* p<0.01, \*\*\* p<0.001

253

254



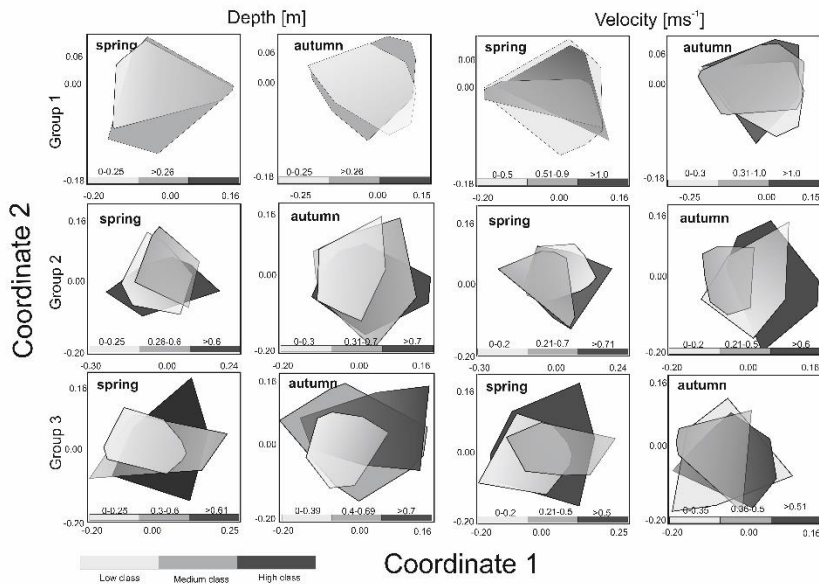

255


256 Figure 4. Non-metric multidimensional scaling (NMDS) of macroinvertebrates taxonomic composition of three groups of  
 257 rivers in the spring and autumn season according to velocity and depth ranges.

258

259 In spring, there were significant differences between velocity classes (low and high and medium and high), while in autumn,  
 260 before overwintering, significant differences were only noted for medium and high classes. In neither season, the differences  
 261 noted in taxonomic composition depending on the range of depth were statistically significant in the case of rivers of the second  
 262 abiotic group (Group 2), more significant differences were observed between velocity and depth classes (three depth classes  
 263 were adopted due to the greater amplitude of these parameters). In the spring, significant differences were visible in all velocity  
 264 classes, while in the case of depth they were noted only in the comparison of the low and middle depth classes. In autumn,  
 265 differences were found for all classes in the case of variation in both velocity and depth. In the case of Group 3 rivers (carbonate  
 266 and silicate fine sediments and rocks), the velocity parameter taxonomically differentiated macroinvertebrate communities  
 267 only in the spring between the high and medium velocity classes. In the case of depth, differences were observed in both  
 268 seasons – in spring between the deepest and shallowest environments and those with medium depth, and in autumn only  
 269 between the deepest and the shallowest zones (Table 2).

270 Each of the hydromorphological parameters was evaluated by the GAM model, which provided the best fit to the data (Table  
 271 3). There were significant effects of depth and velocity and its combination on variation of BMWP\_PL index. Generally, the  
 272 percentage of the total deviance was the highest for the combination of both hydrological parameters, however depth parameter  
 273 alone described similar level of the total deviance. Velocity explained 38.1 and 44.5 % of the total deviance of BMWP\_PL  
 274 variation in the mountain rivers (Group 1) for spring and autumn respectively. In other river groups the total deviance  
 275 described for velocity varied between 6 to 29 %. Bringing into consideration that both hydrological parameters alone described  
 276 more of the total deviance, we regarded them in further analyses separately. The curves of the generalized additive models for  
 277 the biotic index BMWP\_PL in spring and autumn are presented in Fig. 5.

278

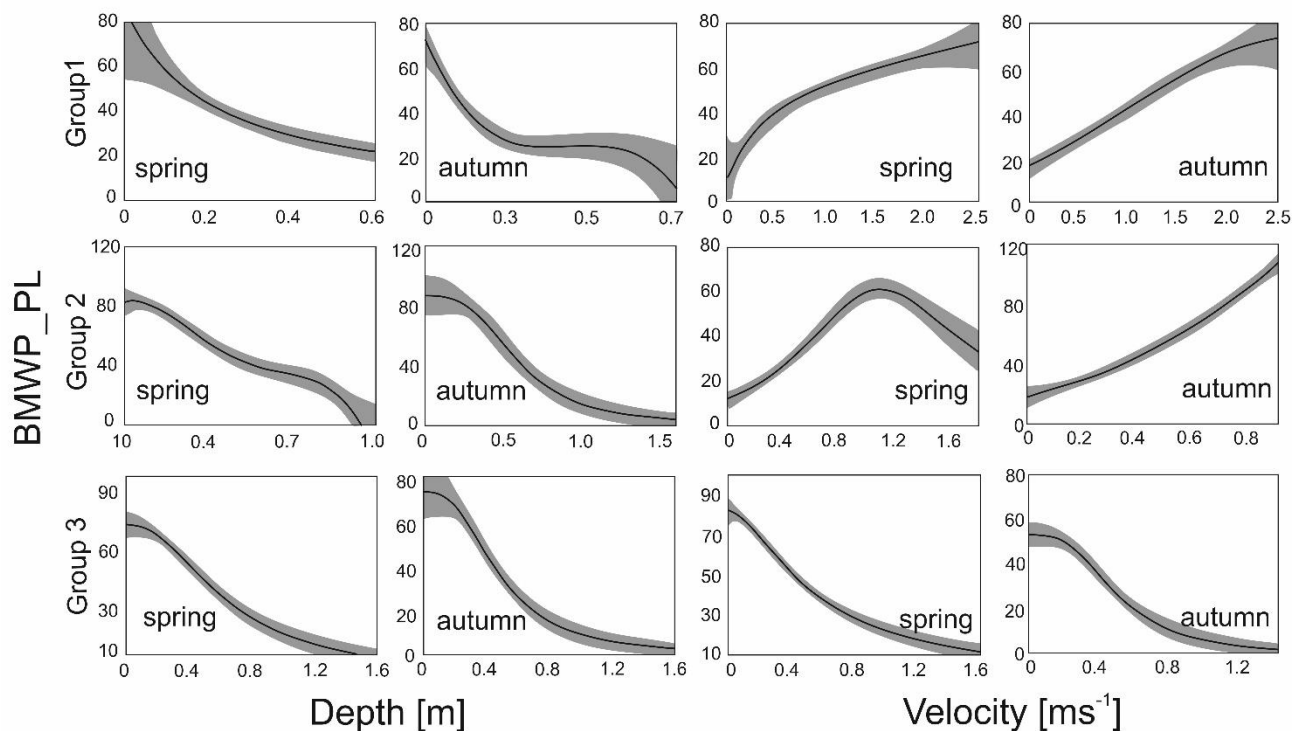

279

280 Figure 5. Habitat suitability curves using Generalized Additive Models of BMWP\_PL index for water velocity and depth in  
 281 spring and autumn season for three river groups.

282

283 These models were made for each of the three river groups: calcareous and silica bedrock alpine rivers (Group 1), sandstone  
 284 mountain rivers (Group 2), and carbonate and silicate upland rivers (Group 3). In the first group, with a gravel bottom, the  
 285 BMWP\_PL index reached its highest values at high water velocity and in shallower zones (by the shores). In the second group  
 286 of river, the BMWP\_PL index was highest at medium velocities in spring and at high velocities in autumn. In both seasons,  
 287 higher values for the biotic index were associated with shelf environments, as in the case of Group 1. Similar relationships  
 288 with depth were noted in the Group 3 rivers, where BMWP\_PL values were highest in the shallow environments at low velocity  
 289 in both spring and autumn (Fig. 5).

290

291 Table 3 Summary of the Generalized Additive Models for BMWP\_PL according to velocity and water depth parameters in  
 292 three river groups for spring and autumn season. Res. dev. – residual deviance; % deviance – percentage of total deviance;  
 293 Res. df. – residual degrees of freedom; p – significance value.

		Spring			Autumn		
		Group 1	Group 2	Group 3	Group 1	Group 2	Group 3
Null	Res.dev.	2676	1324	2334	2717	2632	1971
	% deviance explained	0	0	0	0	0	0
	Res. d.f.	99	99	99	99	99	99
	F	-	-	-	-	-	-
	p	-	-	-	-	-	-
Velocity [ms <sup>-1</sup> ]	Res.dev.	1655	1250	2031	1508	1890	1570
	% deviance explained	38.1	6.6	12.9	44.5	28.2	20.3
	Res. d.f.	97	96.9	96.9	97	96.9	96.9
	F	30.66	3.01	7.9	41.46	18.41	12.1

	p	<0.0001	0.005	0.0005	<0.0001	<0.0001	<0.0001
	Res.dev.	1098	762	1879	1231	979	1467
	% deviance explained	58.9	42.4	19.4	54.6	62.7	25.5
Depth [m]	Res. d.f.	97	96.9	96.9	97	97	97
	F	73.3	36.86	13.11	64.93	78.6	17.15
	p	<0.0001	<0.0001	<0.0001	<0.0001	<0.0001	<0.0001
	Res.dev.	979	672	1781	1007	858	1284
	% deviance explained	63.4	49.2	23.6	62.9	67.4	34.8
Velocity [ms-1] x Depth [m]	Res. d.f.	95	94.9	95	94.9	94.9	95
	F	43.41	23.63	8.45	45.04	49.2	13.48
	p	<0.0001	<0.0001	<0.0001	<0.0001	<0.0001	<0.0001

294

295 Using the optimal depth characteristics reflecting the habitat suitability (Fig. 5), the environmental flow based on hydraulic  
296 method (rating curve) was defined . The results are shown in Table 4.

297


298 Table 4 Environmental flow and flow proportion (S) in different abiotic and bed modification types (I- incision, R-  
299 redeposition) of 12 mountainous rivers.

River name	Ab. type	Rive r bed mod .	Environmental flow ( $Q_{env}$ ) [ $m^3s^{-1}$ ]		Hydrological characteristics [ $m^3s^{-1}$ ]			Environmental flow proportion (S)					
			spring	autumn	LLF	MLF	MAF	SLLF spring	SLLF autumn	SMLF spring	SMLF autumn	SMAF spring	SMAF autumn
Biały Dunajec	I	I	0.89	1.10	0.22	0.54	2.26	4.02	4.97	1.66	2.05	0.39	0.49
Dunajec	I	R	0.64	0.86	0.19	0.68	3.09	3.43	4.62	0.94	1.27	0.21	0.28
Białka	I	R	0.78	0.98	0.27	0.65	3.88	2.90	3.64	1.20	1.51	0.20	0.25
Brynica	II	I	0.17	0.10	0.02	0.13	0.77	6.89	4.05	1.34	0.79	0.22	0.13
Raba	II	I	4.80	3.60	0.30	3.53	11.45	16.00	12.00	1.36	1.02	0.42	0.31
Toszecki Potok	II	I	0.27	0.18	0.02	0.11	0.59	14.35	9.56	2.43	1.62	0.46	0.30
Biała Nysa	II	I	1.20	1.05	0.31	0.96	2.69	3.89	3.41	1.25	1.09	0.45	0.39
Kłodzka	II	I	1.90	1.50	0.14	0.61	3.68	13.37	10.55	3.12	2.46	0.52	0.41
Sołokija	II	R	0.36	0.50	0.25	0.72	1.34	1.42	1.97	0.50	0.69	0.27	0.37
Warta	III	I	1.75	1.65	0.22	0.96	2.07	8.09	7.63	1.83	1.73	0.85	0.80
Odra	III	R	7.40	7.00	4.22	9.54	42.26	1.75	1.66	0.78	0.73	0.18	0.17
Ropa	III	R	2.15	2.00	0.58	1.79	9.64	3.73	3.47	1.20	1.12	0.22	0.21

300 LLF- Low Low Flow, MLF- Mean Low Flow, MAF- Mean Annual Flow

301

302 There is a high variation of the  $Q_{env}$ , related to its own channel properties and volume of water. To obtain the relation to  
303 hydraulic river parameters, the mean  $Q_{env}$  relative similarity to MAF, MLF, and LLF were measured. There was no relation  
304 to the abiotic group of river (Table 5). The only significant relation was linked to channel modification (Fig. 6). In all cases,  
305 the relative similarity of flow was significantly higher in incised channels than redeposited ones.

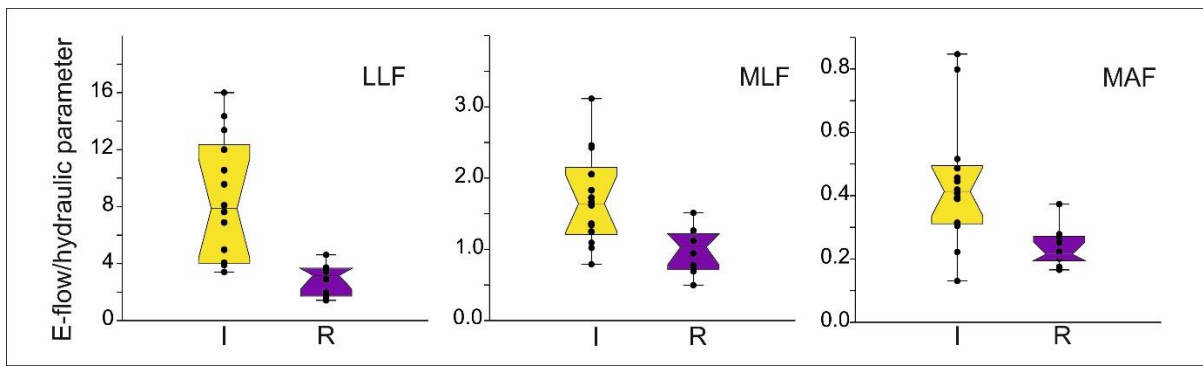

306

307 Figure 6. The distribution of mean values  $\pm$  SE (box) and whisker length (one sigma) with distribution of jitter of e-flow  
 308 proportion to Low Low Flow (LLF), Mean Low Flow (MLF), and Mean Annual Flow (MAF) in relation to river bed  
 309 modification (I – incision, R – redeposition).

310

311 In each type of flow (MAF, MLF, LLF), the relative similarity was higher in incised rivers than redeposited, showing that the  
 312 incised rivers needed much more volume of water to sustain appropriate conditions for macroinvertebrates compared with the  
 313 redeposited ones. More detailed analysis and visualization of spatial modelling were predicted by 2D modelling of randomly  
 314 chosen rivers presented below as a case study.

315

316 Table 5 General linear modelling results for hydrological flow similarity (S) in relation to bed modification (incision and  
 317 redeposition), season, and abiotic river group, SS – sum of squares; d.f. – degrees of freedom; MS – mean square.


Parameter	SS	d.f.	MS	F	p
<b>LLF<sub>sim</sub></b>					
Intercept	648.66	1	648.66	54.09	0.00
<b>Incision</b>	<b>101.13</b>	<b>1</b>	<b>101.13</b>	<b>8.43</b>	<b>0.01</b>
Group	11.28	2	5.64	0.47	0.63
Season	6.32	1	6.32	0.53	0.48
Error	227.86	19	11.99		
<b>MLF<sub>sim</sub></b>					
Intercept	41.19	1	41.19	138.07	0.00
<b>Incision</b>	<b>3.14</b>	<b>1</b>	<b>3.14</b>	<b>10.52</b>	<b>0.00</b>
Group	0.50	2	0.25	0.84	0.45
Season	0.10	1	0.10	0.33	0.57
Error	5.67	19	0.30		
<b>MAF<sub>sim</sub></b>					
Intercept	2.70	1	2.70	126.31	0.00
<b>Incision</b>	<b>0.32</b>	<b>1</b>	<b>0.32</b>	<b>15.04</b>	<b>0.00</b>
Group	0.11	2	0.06	2.60	0.10
Season	0.00	1	0.00	0.14	0.71
Error	0.41	19	0.02		

318 LLF<sub>sim</sub> – Low Low Flow similarity, MLF<sub>sim</sub> – Mean Low Flow similarity, MAF<sub>sim</sub> – Mean Annual Flow similarity

319

### 320 3.2 Case study

321 We calculated the detailed 2D modelling for two randomly chosen incised and redeposited rivers. According to the GAM  
322 macroinvertebrate habitat suitability model, WUA-flow curves were calculated for rivers with varying intensity of bed  
323 modification, Raba (incised) and Ropa (redeposited), as shown in Fig. 7.

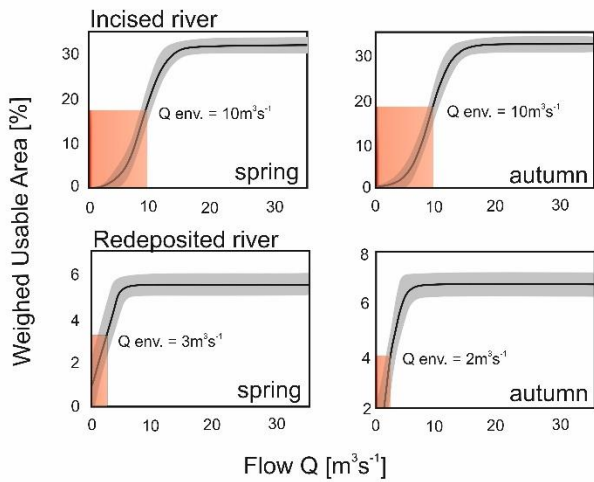


324

325 Figure 7. Weighted Usable Area (WUA) - flow relation curves (spring and autumn season) of the rivers varying in bed  
326 modification: Raba River with incision and Ropa River with redeposition.

327

328 The environmental flow was defined as the lowest flow corresponding to 50% of the value of the usable area, which ensures  
329 minimum optimal conditions for the development and functioning of aquatic macroinvertebrates (Jowett et al., 2008). Analysis  
330 of the curves for the Raba River shows a 50% reduction in the usable area at the flow of about 10 m³s⁻¹ for both spring and  
331 autumn. In the case of the Ropa River, the WUA-flow curves show a 50% reduction in the usable area at the flow of about 2  
332 m³s⁻¹ in spring and 3 m³s⁻¹ in autumn (Table 6).

333 A spatial visualization of macroinvertebrate habitat suitability for Q<sub>env</sub> optimal conditions is presented in Fig. 8. In the case of  
334 the strongly incised Raba River, a very small suitable habitat area was observed, covering only the shelf zone. In the case of  
335 the Ropa River, where sediment transportation occurs, the usable areas constitutes more than 20% of the environmental flow  
336 area. The modelling was also used to determine Q<sub>env</sub> critical, at which the most valuable areas in terms of habitat (over 80%  
337 suitability) disappear (Fig. 8, Table 6). Below this Q<sub>env</sub> critical value, a dramatic decline in macroinvertebrate diversity should  
338 be expected.

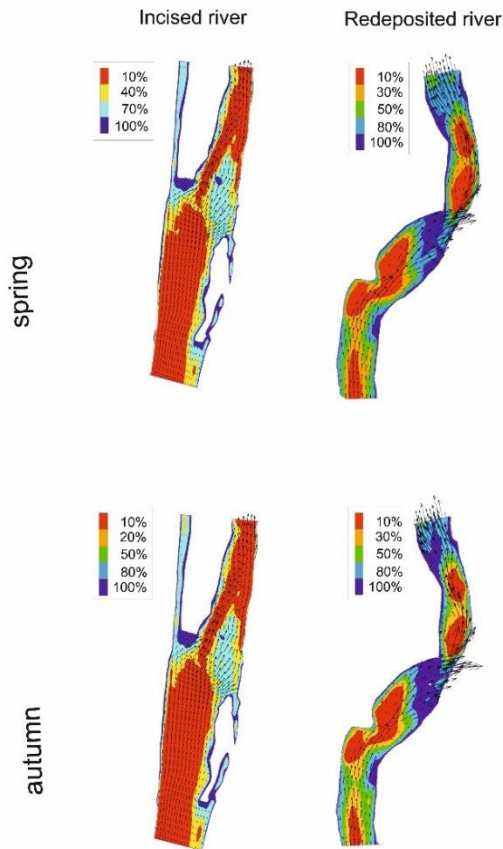

339

340 Figure 8. Probability of habitat suitability calculated as a percentage of optimal conditions occurrence of macroinvertebrates  
 341 habitat suitability for calculated  $Q_{env}$  in spring and autumn season in incised (Raba), and redeposited (Ropa) rivers.

342

343 A comparison of the  $Q_{env}$  values (optimal and critical) and means: Annual Flow (MAF) and Low Flow (MLF) for the two  
 344 types of rivers is presented in Table 7. In the highly incised river (Raba River), the  $Q_{env}$  optimal requirement for spring was  
 345 lower but for autumn was higher than MAF, and  $Q_{env}$  critical was always higher than MLF. In the redeposited Ropa River, in  
 346 spring as well as in the autumn season,  $Q_{env}$  optimal requirements were much lower than MAF, and MLF was higher than  $Q_{env}$   
 347 critical. Both findings are congruent with the former hydraulic calculations for all rivers.

348

349 Table 6 Environmental optimal and critical flow based on macroinvertebrate habitat suitability models of two mountainous  
 350 rivers with mean MAF, MLF, and LLF in relation to the seasons.

		River bed modification	
Season	Flow type [ $m^3s^{-1}$ ]	Incision	Redeposition
		Raba	Ropa
Spring	$Q_{env}$ optimal	10	2
	$Q_{env}$ critical	<6	<1
	MAF	14.79	12.94
	MLF	5.20	2.93
Autumn	$Q_{env}$ optimal	10	3
	$Q_{env}$ critical	<6	<1
	MAF	7.86	5.81
	MLF	3.80	1.96
	MAF	11.45	9.64

Year	MLF	3.53	1.79
	LLF	0.3	0.58

---

351

#### 352 4. Discussion

353 The present study showed that river bed transformation, disturbing sedimentation processes and increasing the incision of the  
354 river bed vastly increases the environmental flow values for macroinvertebrates habitat suitability. This is important because  
355 incision processes are common in most European rivers (Gore, 1996). Channel incision decreases the area of suitable habitat  
356 for macroinvertebrates and increases the potential environmental flow to an extremely high level to obtain the minimum  
357 beneficial habitat capacity for macroinvertebrates (Bravard et al., 1997; Skalski et al., 2020). In incised channels, the degree  
358 of lateral connectivity between the river and floodplain is reduced, and the degree of modification of the substrate material is  
359 higher (Wyżga et al., 2012). As a consequence of channelization and incision, the continuity of the floodplain and shelf zone  
360 along the river is disrupted (Walther and Whiles, 2008; Kędzior et al., 2016; Anim et al., 2018; dos Reis Oliveira et al., 2019).  
361 Moreover, incision results in a concomitant decrease in sediment supply to the channels, reducing the microhabitat diversity  
362 and the quality of macroinvertebrate habitats (Wyżga, 2007; McKenzie et al., 2020). During the incision process,  
363 morphological changes in the channel, especially in the case of highly incised rivers, decrease the area of shelf habitat, and  
364 fluvial deposits are drastically reduced. Thus, to keep areas wet, flow requirements must be much higher than the mean annual  
365 flow and associated with inundation hazards.

366 Linkage between mean annual flow and environmental flow estimation has been the subject of consideration for many years  
367 (Tennant, 1976), based on the assumption that to obtain good stream environment conditions, some percentage of the average  
368 flow is required (Richter et al., 2012; Van Niekerk et al., 2019). According to Tennant (1976), 10% of the average flow is the  
369 minimum flow recommended to sustain short-term survival habitat for most aquatic life forms. Thirty percent was  
370 recommended as a base flow to sustain good survival biota conditions. Sixty percent provides excellent to outstanding habitat  
371 for most aquatic life forms during their primary periods of growth and for most recreational uses. However, what about strongly  
372 channelized and incised rivers, which are the most common channel types in Europe? Our survey indicated that to obtain high  
373 macroinvertebrate diversity, we need a much higher volume of water than 10% of MAF. In the case of incision, a high volume  
374 of water is needed to cover the shelves and sediment storage, which are the principal elements of macroinvertebrate habitats  
375 and refuges in a dynamic river system (Duan et al., 2009; Anim et al., 2018).

376 It is obvious that macroinvertebrates are closely linked to the substrate, which is highly variable in terms of particle size  
377 (Bravard et al., 1997; Merz and Ochikubo Chan, 2005; Duan et al., 2009). Alluvial processes are strongly disturbed in an  
378 incised river, leading to deepening of the channel and bed degradation (Wyżga, 2007). The areas shown in Fig. 7, which are  
379 100% suitable for macroinvertebrates, are extremely narrow in incised rivers throughout the spring and autumn. In most rivers  
380 with an augmented bed, the sedimentation process is disturbed, and thus only habitats located closer to the surface, where  
381 lateral erosion occurs, provide a suitable habitat for macroinvertebrates. Modern restoration efforts often involve the artificial  
382 addition of sediments to sand (dos Reis, Oliveira et al., 2019) or modification of channel morphology to restore the  
383 sedimentation process (Violin et al., 2011; Anim et al., 2018).

384 The biotic integrity of rivers is primarily restricted by downstream transport of sediments controlling the integrity of fluvial  
385 ecosystems (Katano et al., 2009; White et al., 2016). Substrate characteristics such as size, stability, compactness, quality, and  
386 dynamics are a key parameter determining the occurrence and variation in macroinvertebrate communities. High substrate  
387 stability, substrate heterogeneity, and low compactness determine high macroinvertebrate diversity (Beisel et al., 2000; Duan  
388 et al., 2009). On the other hand, fine sediments can be regarded as a potential stressor for macroinvertebrates (Meißner et al.,  
389 2019). In highly incised sectors of the river, a deficiency of sediment and its compactness as well as a lack of food sources  
390 (Shields et al., 1994; Jowett, 2003) lead to impoverishment of the taxonomic composition of macroinvertebrates and favour

391 taxa adapted to high flow only (Wyżga et al., 2013). Our results indicates that prevention of optimal conditions requires more  
392 volume of water which exceeds the mean annual flow. This conclusion seems paradoxical and rather dangerous, because  
393 increase discharge augments incision processes. We can thus fall into a kind of ecological trap. A solution may be to pay  
394 careful attention to the bed morphology, especially in the case of incised channels. There is still a problem to gather information  
395 on flow ecological response of any organisms and extend the survey in international context should be done (Poff and  
396 Zimmermann, 2010; Fornaroli et al., 2015). We then have two options to preserve the high biodiversity of invertebrates  
397 according to the EU water directive: to vastly increase the water volume or to restore sedimentation processes to obtain a  
398 hydrodynamic balance. As a consequence, suitable habitats for invertebrates and fish will be enlarged. The second option  
399 seems much more realistic. Only then we will be able to successfully maintain the diversity of aquatic biota.

## 400 **5. Conclusions**

401 In habitat modelling, careful attention should be paid to the morphology of the modelled river, its geometry, and the fluvial  
402 processes in the active channel. In incised channels where sedimentation processes are altered, for example, by dam reservoirs  
403 or bedrock downcutting, the area of suitable habitat is limited. Macroinvertebrate habitat preferences are strongly linked to  
404 shelf habitats, where sediment storage and redeposition of bed material is the highest. In that case, the recolonization pattern  
405 of invertebrates requires much higher flows, even higher than the mean annual flow. As a consequence, the river is endangered  
406 by downcutting processes and impoverishment of suitable habitats.

407 **Author contribution:** Kędzior Renata: Data curation, Formal analysis, Investigation, Resources, Software, Validation,  
408 Writing - review & editing; Kłównowska-Olejniak Małgorzata: Data curation; Dumnicka Elżbieta: Data curation; Woś  
409 Agnieszka: Investigation; Wyrębek Maciej: Investigation, Resources, Visualization; Książek Leszek: Investigation,  
410 Methodology, Resources, Validation, Writing - review & editing; Paweł Madej: Funding acquisition, Project administration;  
411 Grela Jerzy: Funding acquisition, Project administration; Skalski Tomasz: Conceptualization, Formal analysis, Investigation,  
412 Methodology, Software, Supervision, Visualization, Writing - original draft.

413 **Competing interests:** The authors declare that they have no conflict of interest.

## 414 **Acknowledgements**

415 The work was partially financed by the National Water Management Authority in Poland "Implementation of the method of  
416 estimating environmental flows in Poland" under the project POIS.02.01.00-00.0016/16 (macroinvertebrates and hydrological  
417 data) and by Ministry of Science and Higher Education in Poland. The statistical analyses used in the paper were supported by  
418 the project "Integrated Program of the University of Agriculture in Krakow" co-financed by European Union under the  
419 European Social Fund. We are grateful to native speaker Sara Wild for improvement of the English text.

## 420 **References**

- 421 Acreman, M.C., Overton, I.C., King, J., Wood, P.J., Cowx, I.G., Dunbar, M.J., Kendy, E., and Young, W.J.: The changing  
422 role of ecohydrological science in guiding environmental flows, *Hydrol. Sci.*, 59, 3-4, 433-450,  
423 <https://doi.org/10.1080/02626667.2014.886019>, 2014.
- 424 Allan, J.D.: *Stream ecology: structure and function of running waters*, Chapman and Hall, London, UK.  
425 <https://doi.org/10.1002/aqc.3270050209>, 1995.
- 426 Anderson, K.E., Paul, A.J., McCauley, E., Jackson, L.J., Post, J.R., and Nisbet, R.M.: Instream flow needs in streams and  
427 rivers: the importance of understanding ecological dynamics, *Front. Ecol. Environ*, 4, 6, 309-318,  
428 [https://doi.org/10.1890/1540-9295\(2006\)4\[309:IFNISA\]2.0.CO;2](https://doi.org/10.1890/1540-9295(2006)4[309:IFNISA]2.0.CO;2), 2006.



429 Anim, D.O., Fletcher, T.D., Vietz, G., Pasternack, G., and Burns, M.J.: Effect of urbanization on stream hydraulics, *River Res.*  
430 *Applic*, 1–14, <https://doi.org/10.1002/rra.3293>, 2016.

431 Armitage, P.D., Moss, D., Wright, J.F., and Furse, M.T.: The performance of a new biological water quality score system  
432 based on macroinvertebrates over a wide range of unpolluted running-water sites, *War. Res.*, 17, 3, 333-347,  
433 [https://doi.org/10.1016/0043-1354\(83\)90188-4](https://doi.org/10.1016/0043-1354(83)90188-4), 1983.

434 Arthington, A.H., Bunn, S.E., Poff, N.L., and Naiman, R.J.: The challenge of providing environmental flow rules to sustain  
435 river ecosystems, *Ecological Applications*, 16, 1311-1318, [https://doi.org/10.1890/1051-0761\(2006\)016\[1311:TCOPEF\]2.0.CO;2](https://doi.org/10.1890/1051-0761(2006)016[1311:TCOPEF]2.0.CO;2), 2006.

437 Beisel, J.N., Usseglio-Polatera, P., and Moreteau, J.C.: The spatial heterogeneity of a river bottom: a key factor determining  
438 macro-invertebrate communities, *Hydrobiologia*, 422/423, 163–171, <https://doi.org/10.1023/A:1017094606335>, 2000.

439 Birk, S., Bonne, W., Borja, A., Brucet, S., Courrat, A., Poikane, S., Solimini, A., Van de Bund, W., Zampoukas, N., and  
440 Hering, D.: Three hundred ways to assess Europe's surface water: an almost complete overview of biological methods to  
441 implement the Water Framework Directive, *Ecological Indicators*, 18, 31-41, <https://doi.org/10.1016/j.ecolind.2011.10.009>,  
442 2012.

443 Bis, B., and Mikulec, A.: Guidelines to the ecological status assessment of rivers based on benthic macroinvertebrates,  
444 *Biblioteka Monitoringu Środowiska*, Warsaw, (in Polish), 2013.

445 Bravard, J.P., Amoros, C., Pautou, G., Bornette, G., Bournaud, M., Creuzé des Châtelliers, M., Gibert, J., Peiry, J.L., Perrin,  
446 J.F., and Tachet, H.: River incision in south-east France: morphological phenomena and ecological effects, *River Res. Applic.*,  
447 13, 1, 75-90, 1997.

448 Bunn, S.E., and Arthington, A.H.: Basic principles and ecological consequences of altered flow regimes for aquatic  
449 biodiversity, *Environmental Management*, 30, 492-507, <https://doi.org/10.1007/s00267-002-2737-0>, 2002.

450 Buss, D.F., Carlisle, D.M., Chon, T.S., Culp, J., Harding, J.S., Keizer-Vlek, H.E., Robinson, W.A., Strachan, S., Thirion, C.,  
451 and Hughes, R.M.: Stream biomonitoring using macroinvertebrates around the globe: A comparison of large-scale programs,  
452 *Environmental Monitoring Assessment*, 187, 4132, <https://doi.org/10.1007/s10661-014-4132-8>, 2015.

453 Chen, W., and Olden, J.D.: Designing flows to resolve human and environmental water needs in a dam-regulated river, *Nat.*  
454 *Commun*, 8, <https://doi.org/10.1038/s41467-017-02226-4>, 2017.

455 dos Reis Oliveira, P.C., Kraak, M.H.S., Verdonschot, P.F.M., and Verdonschot, R.C.M.: Lowland stream restoration by sand  
456 addition: Impact, recovery, and beneficial effects on benthic invertebrates, *River Res Applic*, 35, 1023–1033,  
457 <https://doi.org/10.1002/rra.3465>, 2019.

458 Duan, J.G., Wang, S.S.Y., and Jia, Y.: The applications of the enhanced CCHE2D model to study the alluvial channel migration  
459 processes, *J. Hydr. Research*, 39, 469-491, <https://doi.org/10.1080/00221686.2001.9628272>, 2001.

460 Duan, X., Wang, Z., Hu, M., and Zhang, K. Effect of streambed sediment on benthic ecology. *International Journal of*  
461 *Sediment Research*, 24, 3, 325-338, [https://doi.org/10.1016/S1001-6279\(10\)60007-8](https://doi.org/10.1016/S1001-6279(10)60007-8), 2009.

462 European Community 2000/60/EC: Directive of the European Parliament and the Council, Establishing a Framework for  
463 Community Action in the Field of Water Policy, European Union, Brussels, Belgium, pp. 1-73, 2000.

464 Dz.U. 2019 poz. 2149: Regulation of the Polish Ministry of Maritime Economy and Inland Sailing Heritage, 11 of October  
465 2019 on the classification of ecological status, ecological potential and chemical status and the method of classification of the  
466 surface water bodies, as well as environmental quality standards for priority substances.  
467 (<https://isap.sejm.gov.pl/isap.nsf/DocDetails.xsp?id=WDU20190002149>), 2019.

468 Fornaroli, R., Cabrini, R., Sartori, L., Marazzi, F., Vraccic, D., Mezzanotte, V., Annala, M., and Canobbio, S.: Predicting the  
469 constraint effect of environmental characteristics on macroinvertebrate density and diversity using quantile regression mixed  
470 model, *Hydrobiologia*, 742, 153–167, <https://doi.org/10.1007/s10750-014-1974-6>, 2015.

471 Gippel C.J., and Stewardson M.J.: Use of wetted perimeter in defining minimum environmental flows. *Regul Rivers Res*  
472 *Manag* 14, 53–67, 1998.

473 Gore, A.: Response of aquatic biota to hydrological change G.E. Petts, P. Calow (Eds.), *River Biota Diversity and Dynamics*,  
474 Blackwell Scientific Publication, London, pp. 209-230, 1996.

475 Hammer, Ø., Harper, D.A.T., and Paul, D.R.: Past: Paleontological Statistics Software Package for Education and Data  
476 Analysis, *Palaeontol. Electronica*, 4(1), art.4: 9,178kb, 2001.

477 Hayes, J.W., Shearer, K.A., Goodwin, E.O., Hay, J., Allen, C., and Olsen, D.A.: Test of benthic invertebrate habitat - flow  
478 time series model incorporating disturbance and recovery processes, *River Res Applic*, 31, 7, 785-797,  
479 <https://doi.org/10.1002/rra.2773>, 2014.

480 Higginson, W., Higginson, B., Powell, M., Driver, P., and Dyer, F.: Impacts of water resource development on hydrological  
481 connectivity of different floodplain habitats in a highly variable system. *River Res Applic*, 36, 542–552,  
482 <https://doi.org/10.1002/rra.3409>, 2019.

483 Jeffres, C.A., Opperman, J.J., Moyle, P.B.: Ephemeral floodplain habitats provide best growth conditions for juvenile Chinook  
484 salmon in a California river, *Environmental Biology of Fishes*, 83, 449–458, <https://doi.org/10.1007/s10641-008-9367-1>,  
485 2008.

486 Jowett, I.G., Richardson, J., Biggs, B.J.F., Hickey, C.W., and Quinn, J.M.: Microhabitat preferences of benthic invertebrates  
487 and the development of generalized *Deleatidium* spp. habitat suitability curves, applied to four New Zealand rivers, *New*  
488 *Zealand Journal of Marine and Freshwater Research*, 25, 187-199, <https://doi.org/10.1080/00288330.1991.9516470>, 1991.

489 Jowett, I.G.: Instream flow methods: a comparison of approaches. *Regulated Rivers: research & Management*, 13, 115-127.  
490 [https://doi.org/10.1002/\(SICI\)1099-1646\(199703\)13:23.O.CO:2-6](https://doi.org/10.1002/(SICI)1099-1646(199703)13:23.O.CO:2-6), 1997.

491 Jowett, I.G.: Hydraulic constraints on habitat suitability for benthic invertebrates in gravel-bed rivers, *River Res Applic*, 19,  
492 495-507, <https://doi.org/10.1002/rra.734>, 2003.

493 Jowett, I.G., and Davey, A.J.H.: A comparison of composite habitat suitability indices and generalized additive models of  
494 invertebrate abundance and fish presence-habitat availability, *Transactions of the American Fisheries Society*, 136, 428-444.  
495 <https://doi.org/10.1577/T06-104.1>, 2007.

496 Jowett, I.G., Hayes, J.W., and Duncan, M.J.: *A Guide to Instream Habitat Survey Methods and Analysis*, NIWA Science and  
497 Technology Series No.54, 2008.

498 Jusik, S., Bryl, Ł., Przesmycki M., and Kasprzak, M.: The Evolution of Hydromorphological Method for River Assessment  
499 RHS-PL in Poland, *Inżynieria i Ochrona Środowiska*, 17, 1, 41-62, 2014.

500 Katano, I., Negishi, J.N., Minagawa, T., Doi, H., Kawaguchi, Y., and Kayaba, Y.: Longitudinal macroinvertebrate organization  
501 over contrasting discontinuities: effects of a dam and a tributary, *J. North Am. Benthol. Soc*, 28, 331–351,  
502 <https://doi.org/10.1899/08-010.1>, 2009.

503 Kędzior, R., Skalski, T., and Radecki-Pawlik, A.: The effect of channel restoration on ground beetle communities in the  
504 floodplain of a channelized mountain stream, *Period. Biol.*, 118, 3, 171–184, <https://doi.org/10.18054/pb.2016.118.3.3943>,  
505 2016.

506 Książek, L., Wałęga, A., Bartnik, W., and Krzanowski, S.: Calibration and verification of computational model of the Wisłok  
507 River by means of flood wave transformation, *Infrastructure and Ecology of Rural Areas*, 8 (1), 15-28, (in Polish), 2010.

508 Książek, L., Woś, A., Florek, J., Wyřbek, M., Młyński, D., Wałęga, A.: Combined use of the hydraulic and hydrological  
509 methods to calculate the environmental flow: Wisłoka river, Poland: case study, *Environmental Monitoring and Assessment*,  
510 191, 254, 1-17, <https://doi.org/10.1007/s10661-019-7402-7>, 2019.

511 Książek, L., Woś, A., Wyřbek, M., and Strużyński, A.: Habitat structure changes of the Wisłoka River as a result of channel  
512 restoration, in: Kalinowska M., Mrokowska M., Rowiński P, (eds) *Recent Trends in Environmental Hydraulics*, GeoPlanet:  
513 *Earth and Planetary Sciences*, Springer, Cham, pp. 103-115, [https://doi.org/10.1007/978-3-030-37105-0\\_9](https://doi.org/10.1007/978-3-030-37105-0_9), 2020.

514 Laini, A., Viaroli, P., Bolpagni, R., Cancellario, T., Racchetti, E., and Guareschi, S.: Taxonomic and Functional Responses of  
515 Benthic Macroinvertebrate Communities to Hydrological and Water Quality Variations in a Heavily Regulated River, *Water*,  
516 11, 1478, <https://doi.org/10.3390/w11071478>, 2019.

517 Li, F., Cai, Q., Fu, X., and Liu, J.: Construction of habitat suitability models (HSMs) for benthic macroinvertebrate and their  
518 applications to instream environmental flow: A case study in Xiangxi River of Three Gorges Reservoir region, China, *Progress*  
519 *in Natural Science*, 19, 359-367, <https://doi.org/10.1016/j.pnsc.2008.07.011>, 2009.

520 McKenzie, M., Mathers, K.L., Wood, P.J., England, J., Foster, I., Lawler, D., and Wilkes, M.: Potential physical effects of  
521 suspended fine sediment on lotic macroinvertebrates, *Hydrobiologia* 847, 697–711, [https://doi.org/10.1007/s10750-019-](https://doi.org/10.1007/s10750-019-04131-x)  
522 [04131-x](https://doi.org/10.1007/s10750-019-04131-x), 2020.

523 Meißner, T., Sures, B., and Feld, C.K.: Multiple stressors and the role of hydrology on benthic invertebrates in mountainous  
524 streams, *Science of The Total Environment*, 663, 841-851, <https://doi.org/10.1016/j.scitotenv.2019.01.288>, 2019.

525 Merz, J.E., and Ochikubo Chan, L.K.: Effects of gravel augmentation on macroinvertebrate assemblages in a regulated  
526 California River, *River Res. Applic.*, 21, 1, 61 – 74, <https://doi.org/10.1002/rra.819>, 2005.

527 Michalik, A., and Książek, L.: Dynamics of water flow on degraded sectors of Polish mountain stream channels, *Polish J. of*  
528 *Environ. Stud.*, 18, 4, 665-672, 2009.

529 Mikuś, P., Wyźga, B., Bylak, A., Kukułka, K., Liro, M., Oglęcki, P., Radecki-Pawlik, A.: Impact of the restoration of an  
530 incised mountain stream on habitats, aquatic fauna and ecological stream quality, *Ecological Engineering*, 170, 106365,  
531 <https://doi.org/10.1016/j.ecoleng.2021.106365>, 2021.

532 Monk, W.A., Wood, P.J., Hannah, D.M., and Wilson, D.A.: Macroinvertebrate community response to inter - annual and  
533 regional river flow regime dynamics, *River Res. Applic.*, 24, 7, 988-1001, <https://doi.org/10.1002/rra.1120>, 2008.

534 Muñoz-Mas, R., Papadaki, C., Martínez-Capel, F., Zogaris, S., Ntoanidis, L., and Dimitriou, E.: Generalized additive and  
535 fuzzy models in environmental flow assessment: A comparison employing the West Balkan trout (*Salmo farioides*; Karaman,  
536 1938), *Ecological Engineering*, 91, 365-377, <https://doi.org/10.1016/j.ecoleng.2016.03.009>, 2016.

537 Mutz, M., Eloşegi, A., Piégay, H.: Preface: physical template and river ecosystem functioning: interdisciplinary feedbacks for  
538 improving rivers, *Hydrobiologia*, 712:1–4, <https://doi.org/10.1007/s10750-013-1507-8>, 2013.

539 Neachell, E.: Book Review - Environmental flows: Saving rivers in the third millennium, *River Res. Appl.*, 30, 132–133,  
540 <https://doi.org/10.1002/rra>, 2014.

541 Pander, J., Knott, J., Mueller, M., and Geist, J.: Effects of environmental flows in a restored floodplain system on the  
542 community composition of fish, macroinvertebrates and macrophytes, *Ecological Engineering*, 132, 75-86,  
543 <https://doi.org/10.1016/j.ecoleng.2019.04.003>, 2019.

544 Poff, N.L., Allan, J.D., Bain, M.B., Karr, J.R., Prestegard, K.L., Richter, B.D., Sparks, R.E., and Stromberg, J.C.: The natural  
545 flow regime, *BioScience*, 47(11), 769-784, <https://doi.org/10.2307/1313099>, 1997.

546 Poff, N.L., Zimmerman, J.K.H.: Ecological responses to altered flow regimes: a literature review to inform the science and  
547 management of environmental flows, *Freshwater Biology*, 55, 194-205, <https://doi.org/10.1111/j.1365-2427.2009.02272.x>,  
548 2010.

549 Richter, B.D., Davis, M.M., and Konrad, C.: Short communication a presumptive standard for environmental flow protection,  
550 *River Res. Applic.*, 28, 1312–1321, <https://doi.org/10.1002/rra.1320>, 2012.

551 Rinaldi, M., Wyźga, B., and Surian, N.: Sediment mining in alluvial channels: physical effects and management perspectives,  
552 *River Res. and Appl.*, 21, 805–828, <https://doi.org/10.1002/rra.884>, 2005. Roche, K.F., Queiroz, E.P., Ocampo Righi, K., and  
553 de Souza, G.M.: Use of the BMWP and ASPT indexes for monitoring environmental quality in a neotropical stream, *Acta*  
554 *Limnologica Brasiliensia*, 22, 1, 105-108, <https://doi.org/10.4322/actalb.02201010>, 2010.

555 Rosenfeld, J.S.: Developing flow - ecology relationships: Implications of nonlinear biological responses for water  
556 management, *Freshwater Biology*, 62, 8, 1305–1324, <https://doi.org/10.1111/fwb.12948>, 2017.

557 Shearer, K., Hayes, J., Jowett, I., and Olsen, D.: Habitat suitability curves for benthic macroinvertebrates from a small New  
558 Zealand river, *N. Z. J. Mar. Freshw. Res.*, 49, 178–191, <https://doi.org/10.1080/00288330.2014.988632>, 2015.

559 Shields, F.D., Knight, S.S. and Cooper, C.M.: Effects of channel incision on base flow stream habitats and fishes,  
560 *Environmental Management*, 18, 43–57, <https://doi.org/10.1007/BF02393749>, 1994.

561 Shields, F.D. Jr., Knight, S.S., and Cooper, C.M.: Rehabilitation of aquatic habitats in warm-water streams damaged by channel  
562 incision in Mississippi, *Hydrobiologia*, 382, 63–86, <https://doi.org/10.1023/A:1003485021076>, 1998.

563 Schneider, S.C., and Petrin, Z.: Effects of flow regime on benthic algae and macroinvertebrates - A comparison between  
564 regulated and unregulated rivers, *Science of The Total Environment*, 579, 1059-107,  
565 <https://doi.org/10.1016/j.scitotenv.2016.11.060>, 2017.

566 Skalski, T., Kędzior, R., Wyżga, B., Radecki-Pawlik, A., Plesiński, K., and Zawiejska, J.: Impact of incision of gravel-bed  
567 rivers on ground beetle assemblages, *River Res. Appl.*, 32, 1968–1977, <https://doi.org/10.1002/rra.3027>, 2016.

568 Skalski, T., Kędzior, R., and Radecki-Pawlik, A.: Riparian ground beetles in gravel bed rivers: validation of Invertebrate  
569 Bankfull Assessment method, *Science of the Total Environment*, 707, 135572,  
570 <https://doi.org/10.1016/j.scitotenv.2019.135572>, 2020.

571 Skarpich, V., Macurová, T., Galia, T., Ruman, S., and Hradecký, J.: Degradation of multi-thread gravel-bed rivers in medium-  
572 high mountain settings: Quantitative analysis and possible solutions, *Ecological Engineering*, 148, 105795,  
573 <https://doi.org/10.1016/j.ecoleng.2020.105795>, 2020.

574 StatSoft: STATISTICA (data analysis software system), version 13.0. Available from: <http://www.statsoft.com/>, 2013.

575 Tachet, H., Richoux, P., Bournaud, M. and Usseglio-Polatera, P.: *Invertébrés d'Eau Douce. Systématique, Biologie, Écologie*,  
576 CNRS Editions, Paris, France, 2000.

577 Tare, V., Gurjar, S.K., Mohanta, H., Kapoor, V., Modi, A., Mathur, R.P., and Sinha, R.: Eco-geomorphological approach for  
578 environmental flows assessment in monsoon-driven highland rivers: A case study of Upper Ganga, India, *J Hydrol Reg Stud.*,  
579 13, 110–121, doi: 10.1016/j.ejrh.2017.07.005, 2017.

580 Tennant, D.L.: Instream flow regimens for fish, wildlife, recreation and related environmental resources, *Fisheries*, 1, 6–10,  
581 [https://doi.org/10.1577/1548-8446\(1976\)001<0006:IFRFFW>2.0.CO;2](https://doi.org/10.1577/1548-8446(1976)001<0006:IFRFFW>2.0.CO;2), 1976.

582 Tharme, R.E.: A global perspective on environmental flow assessment: emerging trends in the development and application  
583 of environmental flow methodologies for rivers, *River Res. Applic.*, 19, 5-6, 397-441, <https://doi.org/10.1002/rra.736>, 2003.

584 van Niekerk, L., Taljaard, S., Adams, J., Lamberth, S.J., Huizinga, P., Turpie, J.K., and Wooldridge, T.H.: An environmental  
585 flow determination method for integrating multiple-scale ecohydrological and complex ecosystem processes in estuaries,  
586 *Science of The Total Environment*, 656, 482-494, <https://doi.org/10.1016/j.scitotenv.2018.11.276>, 2019.

587 Tharme, R.E.: A global perspective on environmental flow assessment: emerging trends in the development and application  
588 of environmental flow methodologies for rivers, *River Res. Applic.*, 19, 5-6, 397-441, <https://doi.org/10.1002/rra.736>, 2003.

589 van Niekerk, L., Taljaard, S., Adams, J., Lamberth, S.J., Huizinga, P., Turpie, J.K., and Wooldridge, T.H.: An environmental  
590 flow determination method for integrating multiple-scale ecohydrological and complex ecosystem processes in estuaries,  
591 *Science of The Total Environment*, 656, 482-494, <https://doi.org/10.1016/j.scitotenv.2018.11.276>, 2019.

592 Theodoropoulos, C., Papadonikolaki, G., Stamou, A., Bui, M.D., Rutschmann, P., and Skoulikidis, N.: A methodology for the  
593 determination of environmental flow releases from dams based on hydrodynamic habitat modelling and benthic  
594 macroinvertebrates, *Proceedings of the 14th International Conference on Environmental Science & Technology*. 3-5  
595 September 2015, Rhodes, Greece, 2015.

596 Veldkamp, T.I.E., Wada, Y., Aerts, J.C.J.H., Döll, P., Gosling, S.N., Liu, J., Masaki, Y., Oki, T., Ostberg, S., Pokhrel, Y.,  
597 Satoh, Y., Kim, H., and Ward, P.J.: Water scarcity hotspots travel downstream due to human interventions in the 20th and 21st  
598 century, *Nature Communications*, 8, 1, 15697, <https://doi.org/10.1038/ncomms15697>, 2017.

599 Vezza, P., Parasiewicz, P., Rosso, M., Comoglio, C.: Defining minimum environmental flows at regional scale: Application  
600 of mesoscale habitat models and catchments classification, *River Res Appl*, 28, 717–730, doi: 10.1002/rra.1571, 2012.

601 Violin, C.R., Cada, P., Sudduth, E.B., Hassett, B.A., Penrose, D.L., and Bernhardt, E.S.: Effects of Urbanization and Urban  
602 Stream Restoration on the Physical and Biological Structure of Stream Ecosystems, *Ecological Applications*, 21, 6, 1932–49,  
603 <https://doi.org/10.1890/10-1551.1>, 2011.

604 Vörösmarty, C.J., McIntyre, P.B., Gessner, M.O., Dudgeon, D., Prusevich, A., Green, P., Glidden, S., Bunn, S.E., Sullivan,  
605 G.A., Liermann, C.R., and Davies, P.M.: Global threats to human water security and river biodiversity, *Nature*, 467, 555–561,  
606 <https://doi.org/10.1038/nature09440>, 2010.

607 Walther, D.A., and Whiles, M.R.: Macroinvertebrate responses to constructed riffles in the Cache River, Illinois, USA,  
608 *Environ. Manag.*, 41, 516–527, <https://doi.org/10.1007/s00267-007-9058-2>, 2008.

609 Ward, J.V., and Tockner, K.: Biodiversity: towards a unifying theme for river ecology, *Freshwater Biology*, 46, 807–819,  
610 <https://doi.org/10.1046/j.1365-2427.2001.00713.x>, 2001.

611 White, J.C., Hannah, D.M., House, A., Beatson, S.J.V., Martin, A., and Wood, P.J.: Macroinvertebrate responses to flow and  
612 stream temperature variability across regulated and non-regulated rivers. *Ecohydrology*, 10, e1773, <https://doi.org/10.1002/eco.1773>, 2016.

614 Wu, W., Wang, S.S.Y., and Jia, Y., Nonuniform Sediment Transport in Alluvial Rivers, *J.Hydr.Res*, 38, 6, 427–434,  
615 <https://doi.org/10.1080/00221680009498296>, 2000.

616 Wyżga, B.: A review on channel incision in the Polish Carpathian rivers during the 20th century, *Developments in Earth  
617 Surface Processes*, 11, 525–553, 2007.

618 Wyżga, B., Oglęcki, P., Radecki - Pawlik, A., Skalski, T., and Zawiejska J.: Hydromorphological complexity as a driver of  
619 the diversity of benthic invertebrate communities in the Czarny Dunajec River, Polish Carpathians, *Hydrobiologia*, 696, 29–  
620 46, <https://doi.org/10.1007/s10750-012-1180-3>, 2012.

621 Wyżga, B., Oglęcki, P., Hajdukiewicz, H., Zawiejska, J., Radecki-Pawlik, A., Skalski, T., and Mikuś, P.: Interpretation of the  
622 invertebrate-based BMWP-PL index in a gravel-bed river: insight from the Polish Carpathians, *Hydrobiologia*, 712, 71–88,  
623 <https://doi.org/10.1007/s10750-012-1280-0>, 2013.

624 Wyżga, B., Zawiejska, J., and Radecki-Pawlik, A.: Impact of channel incision on the hydraulics of flood flows: Examples  
625 from Polish Carpathian rivers. *Geomorphology*. 272, 10–20, <https://doi.org/10.1016/j.geomorph.2015.05.017>, 2016.

626 Yarnell, S.M., Petts, G.E., Schmidt, J.C., Whipple, A.A., Beller, E.E., Dahm, C.N., Goodwin, P., Viers, J.H.: Functional flows  
627 in modified riverscapes: hydrographs, habitats and opportunities, *Bioscience*, 65 (10), 963–972,  
628 <https://doi.org/10.1093/biosci/biv102>, 2015.