

Improving ~~object-oriented radar-based~~ rainfall nowcast by a nearest neighbour approach: Part I – Storm Characteristics

Bora SHEHU¹, Uwe HABERLANDT¹

¹Institute for Hydrology and Water Resources Management, Leibniz University Hannover, Germany

Correspondence to: Bora Shehu (shehu@iww.uni-hannover.de)

Abstract.

The nowcast of rainfall storms at fine temporal and spatial resolutions is quite challenging due to the erratic nature of rainfall at such scales. Typically, rainfall storms are recognized by ~~weather radar data~~, and extrapolated in the future by the Lagrangian persistence. However, storm evolution is much more dynamic and complex than the Lagrangian persistence, leading to short forecast horizons especially for convective events. Thus, the aim of this paper is to investigate the improvement that past similar storms can introduce to the object-oriented radar based nowcast. Here we propose a nearest neighbour approach that measures first the similarity between the “to-be-nowcasted” storm and past observed storms, and later uses the behaviour of the past most similar storms to issue either a single nowcast (by averaging the 4 most similar storm-responses) or an ensemble nowcast (by considering 30 most similar storm-responses). Three questions are tackled here: i) what features should be used to describe storms in order to check for similarity? ii) how to measure similarity between past storms? and iii) is this similarity useful for ~~storm-oriented~~ object-oriented nowcast? For this purpose, individual storms from 110 events in the period 2000-2018 recognized within the Hannover Radar Range (R~115km²), Germany, ~~were~~ are used as a basis for investigation. A “leave-one-event-out” cross-validation is employed to ~~train and validate~~ test the nearest neighbour approach for the prediction of the area, mean intensity, the x and y velocity components, and the total lifetime of the “to-be-nowcasted” storm for lead times from +5min up to + 3 hours. Prior to the ~~training~~ application, two importance analyses methods (Pearson correlation and partial information correlation) are employed to identify the most important predictors. The results indicate that most of storms behave similarly, and the knowledge obtained from such similar past storms ~~can help to improve capture considerably better~~ the storm ~~nowcast~~ dissipation, and improves the nowcast compared to the Lagrangian persistence especially for convective events (storms shorter than 3 hours) and longer lead times (from 1 to 3 hours). The main advantage of the nearest neighbour approach is seen when applied in a probabilistic way (with the 30 closest neighbours as ensembles) rather than in a deterministic way (averaging the response from 4 closest neighbours). The ~~nearest-neighbour~~ probabilistic approach seems -promising, especially for convective storms, nevertheless and there is still room for improvement-it can be further improvement by either increasing the sample size, -or- employing more suitable methods for the predictor identification, or selecting physical predictors.

Keywords:

Rainfall nowcast, Lagrangian persistence, probabilistic nowcast, similar storms, nearest neighbour

1. Introduction

Urban pluvial floods are caused by short, local and intense rainfall convective storms, that overcome rapidly the drainage capacity of the sewer network and lead to surface inundations. These types of floods are becoming more relevant with time due to the expansion of urban areas worldwide (Jacobson, 2011; United, 2018), and the potential of such storms getting more extreme under the changing global climate (Van Dijk et al., 2014). Because of the high economical, and even human losses associated with these floods, modelling and forecasting becomes crucial for impact-based early warnings (i.e. July 2008 in Dortmund Grünewald (2009), August 2008 in Tokyo, Kato & Maki (2009)). However, one of the main challenges in the urban pluvial flood forecasting, remains the accurate estimation of rainfall intensities at very fine scales. — Since the urban area responds fast and locally to the rainfall (due to the sealed surfaces and the artificial deviation of watercourse), the Quantitative Precipitation Forecasts (QPFs) fed into the urban models should be provided at very fine temporal (1-5min) and spatial ($100\text{m}^2 - 1\text{km}^2$) scales (Berne et al., 2004). The Numerical Weather Prediction Models (NWP) are typically used in hydrology for weather forecast at several days ahead, nevertheless they are not suitable for urban modelling as they still cannot produce reliable and accurate intensities for spatial scales smaller than 10km^2 and temporal time steps short than an hour (Golding, 2009; Surcel et al., 2015). Ground rainfall measurements (rain-gauges) are considered the true observation of rainfall but they are as well not adequate for QPFs because they cannot capture the spatial structure of rainfall. Therefore, the only product useful in providing QPFs for urban pluvial floods remains the weather radar. The weather radar can measure indirectly the rainfall intensities at high spatial ($\sim 1\text{km}^2$) and temporal ($\sim 5\text{min}$) scales by capturing the reflected energy from the water droplets in the atmosphere. The rainfall structures and their evolution in time and space can be easily identified by the radar and hence serve as a basis for issuing QPFs at different forecast horizons. One of the main drawbacks of radar-based forecast, is that a rainfall structure has to be first identified in order to be extrapolated in the future. In other words, rainfall cannot be predicted before it has started anywhere in the region, only the movement can be predicted. As already discussed in Bowler et al., (2006) and Jensen et al. (2015), these initialization errors cause the radar forecast to be used only for short forecast horizons (up to 3 hours), and that is why are typically referred to as nowcasts. For longer lead times a blending between NWP and radar based nowcast should be used instead (Codo & Rico-Ramirez, 2018; Foresti et al., 2016; Jasper-Tönnies et al., 2018). Nonetheless, for short forecast horizons up to 2-3h, the radar nowcast remains the best product for pluvial flood simulations as it outperforms the NWP one (Berenguer et al., 2012; Jensen et al., 2015; Lin et al., 2005; Zahraei et al., 2012).

Two approaches can be distinguished on the radar based QPFs depending on how the rainfall structures are identified, tracked and extrapolated into the future: object-oriented nowcast (herein as object-based to avoid the confusion with the programming term) and field-based nowcast. The object-based nowcast treats rainfall structures as objects, each object is regarded as a storm and is defined as a set of radar grid cells that moves together as a unit (Dixon & Wiener, 1993). The field-based approach considers the rainfall as an intermittent field inside a given domain, and through methods like optical flow, tracks and extrapolates how the intensity is moving from one pixel to the other inside this domain (Ruzanski et al., 2011; Zahraei et al., 2012). Convective storms have been proven to have an unique movement from nearby storms (Moseley et al., 2013), thus are thought to be better nowcasted with object-based approach (Kyznarová & Novák, 2009). On the other hand, the field-based approach with an optical flow solution, tracks and extrapolates rainfall structures inside a region of size W together as a unit with a constant velocity (Lucas & Kanade, 1981) and are considered more suitable for major scale events, i.e. stratiform storms, as they are widespread in the radar image and exhibit more uniform movements (Han et al., 2009). Even though the field-based approach has gained popularity recently (Ayzel et al., 2020; Imhoff et al., 2020) the focus in this study is on object-based nowcast as they are more convenient for convective storms that typically cause urban pluvial floods.

Formatted: Space After: 0 pt

Formatted: Superscript


Formatted: Superscript

Formatted: Superscript

Formatted: Superscript

Formatted: German (Germany)

Figure 1 illustrates the three main steps performed in an object-based nowcast: a) first the storm is identified – a group of grid cells with intensity higher than a threshold is recognized in the radar image at time t_0 , b) the storm identified is then tracked for the time $t_0 + \Delta t$ (where Δt is the temporal resolution of the radar data) and velocities are assigned, and finally c) the storm as lastly observed at time t (when the nowcast is issued) is extrapolated at a specific lead time (the time in the future when the forecast is needed) t_{+LT} , with the last observed velocity vector. This is a linear extrapolation of the storm structure in the future, considering the spatial structure and the movement of the storm as constant in time – also referred to as Lagrangian Persistence (Germann et al., 2006). Applications of such storm-based nowcast are common in literature like TITAN, HyRaTrac, Konrad etc. (Han et al., 2009; Hand, 1996; Krämer, 2008; Lang, 2001; C. E. Pierce et al., 2004).

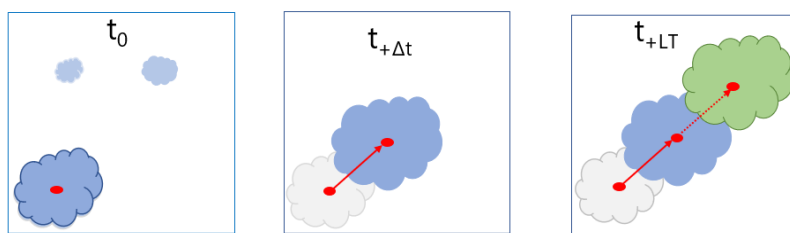

a) *Step 1- Storm Identification* b) *Step 2- Storm Tracking* c) *Step 3- Storm Extrapolation*

Figure 1 The main steps of an object-based radar nowcast. Blue indicates the current state of the storm at any time t , grey indicates the past states of the storm (at $t - \Delta t$), and green indicates the future states of the storm ($t + LT$) (Shehu, 2020)

Typically, radar-based nowcasts are used for short-term rainfall nowcast. The rainfall is either considered as an object (a set of radar grid cells with the intensity above a threshold that moves together as a unit and is regarded as a storm (Dixon & Wiener, 1993; Johnson et al., 1998)) or as an intermittent field (intensity is moving from one pixel of the radar image to the other (Ruzanski et al., 2011; Zahraei et al., 2012)). Whilst the field-based approach of rainfall nowcasting has gained popularity recently, here the focus is only on the object-oriented forecast, thus on the nowcasting of storms. In such forecast three main steps are performed (illustrated in **Figure 1**): a) first the storm is identified – so a group of grid cells with intensity higher than a threshold is recognized in the radar image at time t_0 , b) the storm identified is then tracked for the time $t_0 + \Delta t$ (where Δt is the temporal resolution of the radar data) and velocities are assigned to the movement of the storm, and finally c) the storm as lastly observed at time t (when the forecast is issued) is extrapolated at a specific lead time (the time in the future when the forecast is needed) t_{+LT} , with the last observed velocity vector. This is a linear extrapolation of the storm structure in the future, considering the spatial intensity distribution within the storm and the movement of the storm as constant in time – also referred to as Lagrangian Persistence (Germann et al., 2006). Applications of such storm-based nowcast are common in literature like TITAN, HyRaTrac, Konrad etc. (Han et al., 2009; Hand, 1996; Krämer, 2008; Lang, 2001; C. E. Pierce et al., 2004).

One of the main drawbacks of radar-based forecast, is that a storm has to be first identified in order to be extrapolated in the future. In other words, the storm cannot be predicted before it has started anywhere in the region, only the movement can be predicted. As already discussed in Bowler et al., (2006) and Jensen et al. (2015), these birth errors cause the radar forecast to be used only for short lead time forecast (up to 3 hours), and for longer lead times a blending between a Numerical Weather Prediction Model (NWP) and radar-based nowcast should be used instead (Codo & Rico-

Formatted: Indent: First line: 1.25 cm

Formatted: Font: Not Bold

Formatted: English (United Kingdom)

Field Code Changed

Ramirez, 2018; Foresti et al., 2016; Jasper-Tönnies et al., 2018). Nevertheless, for short lead times (1-2 hours) the radar based nowcast is still preferred as it outperforms the NWP nowcasts (Berenguer et al., 2012; Jensen et al., 2015; Lin et al., 2005; Zahraei et al., 2012). Apart from the birth errors, other sources of the errors in the object-oriented nowcast can be attributed to storm identification, storm tracking and Lagrangian extrapolation (L. Foresti & Seed, 2015; C. Pierce et al., 2012; Rossi et al., 2015).

Apart from the initialization errors mentioned before, other error sources in the object-based nowcast can be attributed to storm identification, storm tracking and Lagrangian extrapolation (L. Foresti & Seed, 2015; C. Pierce et al., 2012; Rossi et al., 2015). Many works have been already conducted to investigate the role ~~that of~~ different intensity thresholds ~~for on~~ the storm identification, or ~~that of~~ different storm tracking algorithms ~~have on~~ the nowcasting results (Goudenhoofd & Delobbe, 2013; Han et al., 2009; Hou & Wang, 2017; Jung & Lee, 2015; Kober & Tafferner, 2009). Very high intensity thresholds may be suitable for convective storms, however can cause false splitting of the storms and which can affect negatively the tracking algorithm. Thus, one has to be careful in adjusting the intensity threshold dynamically over the radar field and type of storm. Storm tracking algorithm can be improved if certain relationships are learned from past observed dataset (like a Fuzzy approach in Jung & Lee (2015) or a tree-based structure in Hou & Wang (2017)), but there is still a limit that the tracking improvement cannot surpass due to the implementation of the Lagrangian persistence (Hou & Wang, 2017).

These errors due to the Lagrangian persistence are particularly high for convective events at longer lead times (past 1 hour) as the majority of convective storms ~~last no longer than~~ ~~dissipate within~~ 60 minutes (Goudenhoofd & Delobbe, 2013; Wilson et al., 1998). At these lead times, the persistence fails to predict ~~mainly the death-dissipation~~ of these storm cells, while for shorter lead times it fails to represent the growing/decaying rate and the changing movement of a storm cell (Germann et al., 2006). For stratiform events, since they are more persistent in nature, Lagrangian persistence can ~~potentially~~ give reliable results up to 2 or 3 hours lead time (Krämer, 2008). Nevertheless studies have found that for fine spatial (1km²) and temporal (5min) scales, the Lagrangian Persistence can yield reliable results up to 20-30 min lead time, which is also known in the literature as the predictability limit ~~of rainfall~~ at such scales (Grecu & Krajewski, 2000; Kato et al., 2017; Ruzanski et al., 2011). ~~For-In~~ object-oriented-based radar ~~based~~ nowcast, this predictability limit can be extended up to 1 hour for stratiform events and up to 30-45min for convective events if a better radar product (merged with rain gauge data) is fed into the nowcast model (Shehu & Haberlandt, 2021). Past these lead times, the errors due to the growth/decay and ~~death-dissipation~~ of the storms govern.

Nevertheless, The rainfall predictability of convective storms can be extended, if instead of the Lagrangian persistence, one can estimate ~~estimates roughly these~~ non-linear processes (growth/decay/dissipation) by acknowledging consulting previously ~~storm~~ observed storm cells ~~life~~ characteristics. For instance, if it is known that a storm is of convective nature, most probably it will die from 20 min to two hours of the storm birth, the peak intensities happen ~~mainly in the afternoon or evening, and that they dissipate fast after the peak intensity has been reached. Such characteristics of storm behaviour can be analysed from the past observations~~ (Goudenhoofd & Delobbe, 2013; Zawadzki, 1973). For instance, Kyznarova and Novak (2009) used the CellTrack algorithm to derive life cycle characteristics of convective storms and observed that there is a dependency between storm area, maximum intensity, life phase and height of 0°C isotherm level. Similar results were also found by (Moseley et al., 2013) which concluded that convective storms show a clear life cycle with the peak occurring at 1/3 of total storm duration, a strong dependency on the temperature and increasing average intensity with longer durations. In case of extreme convective storms, earlier peaks are more obvious causing a steeper increase to maximum intensity. A later study by (Moseley et al., 2019) found that the longest and most intense storms were expected in the late afternoon hours in Germany. Thus, it is to be expected that an extensive

Formatted: English (United Kingdom)

Field Code Changed

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: Indent: First line: 0 cm

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

observation of past storm behaviours can be very useful in creating and establishing new nowcasting rules (Wilson et al., 2010) that can outperform the Lagrangian persistence.

~~Such characteristics of storm behaviour can be analysed from the past observation (Goudenhoofd & Delobbe, 2013; Zawadzki, 1973). As stated by (Gallus et al., 2008), the rainfall characteristics are related to the morphological characteristics of the storm itself. Thus, it is to be expected that an extensive observation of past storm behaviours can be very useful in creating and establishing new nowcasting rules (Wilson et al., 2010).~~

An implementation of such learning from previous observed storms (with focus only on the object-based nowcast and not the field-based one) is for instance shown by Hou & Wang (2017) where a Fuzzy classification scheme was implemented to improve the tracking and matching of storms which resulted in an improved nowcast, and Zahraei et al. (2013) where a Self-Organizing-Maps (SOM) algorithm was used to predict the initialization birth and decay-dissipation of storms on coarse scales extending the predictability of storms by 20-%. These studies suggest that past observed relationships may be useful in extending the predictability limit of the convective storms. These studies suggest that past observed storms may be useful in extending the predictability limit of the storms at hand. Thus, the aim of this study is to investigate if non-linear relationships learned from past observed storms can surpass the Lagrangian persistence and extend the predictability limit of different storms. For this purpose Under this context, a nearest neighbour method (k-NN) is may be developed at the storm scale, which is and used to first recognize similar storms in the past, and then assign their behaviours to the “to-be-nowcasted”-storm.

The nearest neighbour method has been used in the field of hydrology mainly for classification, regression or resampling purposes (e.g. Lall & Sharma (1996)) but there are some examples of prediction as well (Galeati, 1990). The assumption of this method is that similar events are described by similar predictors, and thus if one identifies the predictors successfully, similar events that behave similarly can be identified. For a new event, the respective response is then obtained by averaging the responses of past k – most similar storms. The k-value can be optimized by minimizing a given cost function. Because of the averaging, the response obtained, will be a new one, satisfying thus the condition that nature doesn't repeat itself, but nevertheless it is confined within the limits of the observed events (therefore is unable to predict extreme behaviours outside of the observed range).

Similar approaches are implemented in field-based nowcast (referred to as analogue events), where past similar radar fields are selected based on weather conditions and radar characteristics i.e. in NORA nowcast by (Panziera et al., 2011) mainly for orographic rainfall, or in the multi-scaled analogues nowcast model by (Zou et al., 2020). Panziera et al. 2011 showed that there is a strong dependency between air-mass stability, wind speed and direction and the rainfall patterns observed from the radar data, and that the NORA nowcast can improve the hourly nowcasts of orographic rain up to 1 hour when compared to Eulerian Persistence and up to 4 hours when compared with the COSMO2 NWP. Improvement of predictability through a multi-scaled analogues nowcast was also reported by (Zou et al., 2020), which identified neighbours first by accounting similar meteorological conditions and then the spatial information from radar data. However, both of these studies show the applicability of the method on rainfall types that tend to repeat the rainfall patterns; i.e. the orographic forcing in the case of Panziera et al. (2011) and winter stratiform events in the case of Zou et al. (2020). So far, to the authors knowledge, such application of the k-NN has not been applied for convective events.

This application e-application of the k-NN seems reasonable as an extension of the object-oriented-based radar based-nowcast, in order to treat each convective storm independently. It can be used instead of the Lagrangian persistence in step 3 in Figure 1-c, for the extrapolation of rainfall storms into the future. Moreover, the benefit of the k-NN application is that one can either give a single or an ensemble nowcast; since k-neighbours can be selected as similar to a storm at hand, a probability based on the similarity rank, can be issued at each of the past storm, providing so an ensemble of responses, which are more preferred compared to the deterministic nowcast due to the high uncertainty associated with

Formatted: Check spelling and grammar

Formatted: Check spelling and grammar

Formatted: Indent: First line: 1.25 cm


rainfall predictions at such fine scales (Germann & Zawadzki, 2004). Thus, it is the aim of this study to investigate the suitability of the k-NN application to substitute the Lagrangian Persistence in the nowcasting of mainly convective events that have the potential to cause urban pluvial floods.

We would like to achieve this by first investigating if a K-NN is able to nowcast successfully storm characteristics like Area, Intensity, Movement and Total Lifetime at different life cycles and lead times. Based on the observed dependency of the storm characteristics on the life cycle, it would be interesting to see if the morphological features are enough to describe the evolution of the convective storms. Therefore, the focus is here only of the features recognized by the radar data, and further works will include as well the use of meteorological factors. To reach our aim, the suitability of the k-NN approach is studied as an extension of the existing object-based nowcast algorithm HyRaTrac developed from Krämer (2008). The benefit of the k-NN application is that one can either give a single or an ensemble nowcast; since k-neighbours can be selected as similar to a storm at hand, a probability based on the similarity rank, can be issued at each of the past storm, providing so an ensemble of responses. Ensemble nowcasts are more preferred for rainfall nowcasts due to the high uncertainty associated with rainfall predictions at such fine scales (Germann & Zawadzki, 2004).

Before applying a k-NN for the storm nowcast such an application, questions that arise are I) what features are more important when describing a storm, II) how to evaluate similarity between storms and III) how to use their information for the nowcasting of the storm at hand. To answer these questions and to achieve the aim of this study, the paper is organized as follows: First in Section 2 the study area is described, following with the structure of the k-NN method in Section 3.1 where: the generation of the storm database is discussed in Section 3.1.1, the predictors selected and target variables are given in in Section 3.1.2, the methods used for predictor identification in Section 3.1.3, and different application of the k-NN in Section 3.1.4. The training optimization and the performance criteria are shown in Section 3.2 followed by the results in Section 4 separated into predictors influence (Section 4.1), single deterministic k-NN (Section 4.2), and ensemble probabilistic k-NN performance (Section 4.3), and the nowcasting of unmatched storms (Section 4.4). Finally, the study is closed by derived conclusions and outlook in Section 5.

2. Study Area and Data

The study area is located in northern Germany, and lies within the Hannover Radar Range as illustrated in Figure 2. The radar station is situated at the Hannover Airport, and it covers an area with a radius of 115 km. The Hannover radar

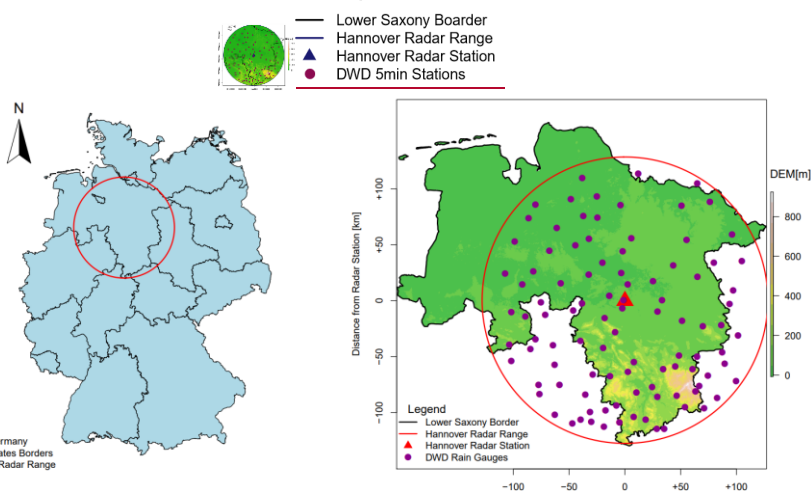

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Centered

Formatted: Font: 10 pt, Not Expanded by / Condensed by

Figure 2 The location of the study area (left) within Germany and (right) with the corresponding elevation and

data are C-band data (single-pol) provided by German Weather Service (DWD), and measure the reflectivity at an azimuth angle of 1° and at 5 min scans (Winterrath et al., 2012). The reflectivity measurements are converted to intensity according to Marshall-Palmer relationship with the coefficients $a=256$ and $b=1.42$ (Bartels et al., 2004). The radar data were corrected from the static clutters and erroneous beams and then converted to Cartesian Coordinate system (1 km^2 and 5 min) as described in (Berndt et al., 2014). Additionally, following the results from Shehu & Haberlandt (2021), a conditional merging between the radar data and 100 gauge recording (see Figure 2 -right) with the radar range at 5 min time steps was performed. The conditional merging aims to improve the kriging interpolation of the gauge recordings by adding the spatial variability and maintaining the storm structures as recognized by the radar data. In case a radar image is missing, the kriging interpolation of the gauge recordings is taken instead.

The period from 2000 to 2018 was used as a basis for this investigation, from which 110 events with different characteristics were extracted (see Shehu & Haberlandt (2021) or Shehu (2020)). These events were selected for urban flood purposes, and thus contain mainly convective events and few stratiform events. Here, rainfall events are referred to a time period when rainfall has been observed inside the radar range and at least at one rain gauge has registered an extreme rainfall volume (return period higher than 5 years) for durations varying from 5 min to 1 day. The start and the end of the rainfall event is determined when areal mean radar intensity is lower than 0.05 mm for more than 4 hours. Within a rainfall event many rainfall storms, at different times and locations, can be recognized. Figure 3-a shows a simple illustration to distinguish between the rainfall event and rainfall storm concepts employed in this study.

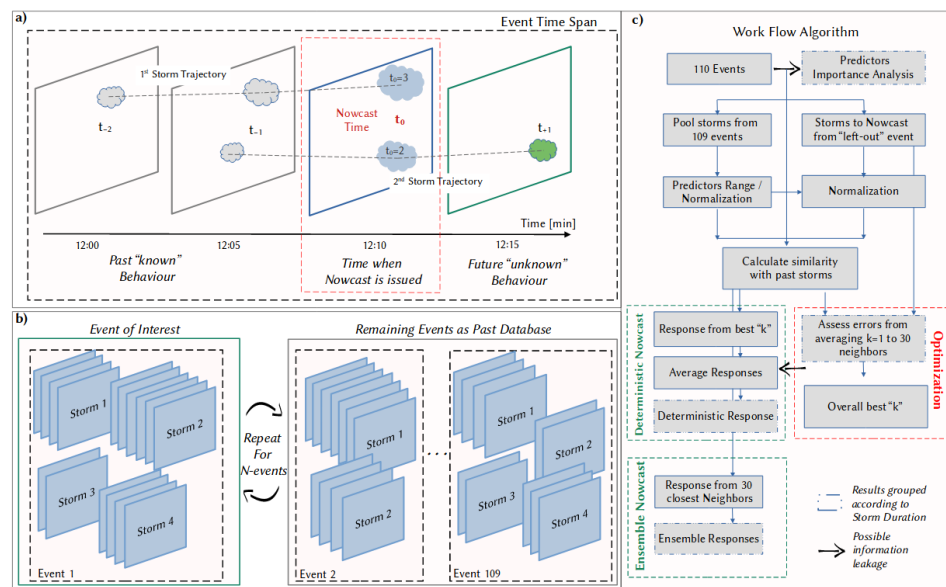


Figure 3. Illustration of concepts and workflows in this study a) an event contains many rainfall storms inside the radar range which are tracked and nowcasted: the dashed grey lines indicate the movements of storms in space-time within the radar event and the event time span. b) The “leave-one-out-event cross-validation” – the storms of the event of interest are removed from the past database, and the nowcast of these storms is issued based on the past database. This process is repeated 110 times (once for each event). c) the workflow implemented here for the optimization and application of the k -NN approach.


3. Methods

3.1 Developing the k-NN model

3.1.1 Generating the storm database

Each of the selected events contains many storms, whose identification and tracking was performed on the basis of the HyRaTrac algorithm in the hindcast mode (Krämer, 2008; Schellart et al., 2014). A storm is initialized if a group of radar grid cells (> 64) has a reflectivity higher than $Z=20\text{dBz}$, while storms are recognized as convective – if a group bigger than 16 radar grid cells has an intensity higher than 25 dBz, and as stratiform – if a group bigger than 128 radar grid cells has an intensity higher than 20 dBz. Typically, higher values (40dBz) are used to identify the core of convective storms (as in E-Titan), but to avoid false splitting of convective storms and to test the methodology on all types of storms, these identification thresholds were kept low, following as well the studies from Moseley et al. 2013). The tracking of individual storms in consecutive images is done by the optimization of the cross-correlation optimization between the last 2 images ($t=0$ and $t=5$ min), and local displacement vectors for each storm are calculated. In case a storm is just recognized, then global displacement vectors based on cross-correlation of the entire radar image are assigned to them.

Thus, a dataset with several types of storms is built and saved. The storms are saved with an ID based on the starting time and location, and for each time step of the storm evolution the spatial information is saved. Here the spatial structure of the rainfall inside the storm boundaries at a given time, the spatial rainfall intensities of a storm at a particular time step (in 5min) of the storms' life, is referred to as the "state" of the storm. A storm that has been observed for 15 minutes,

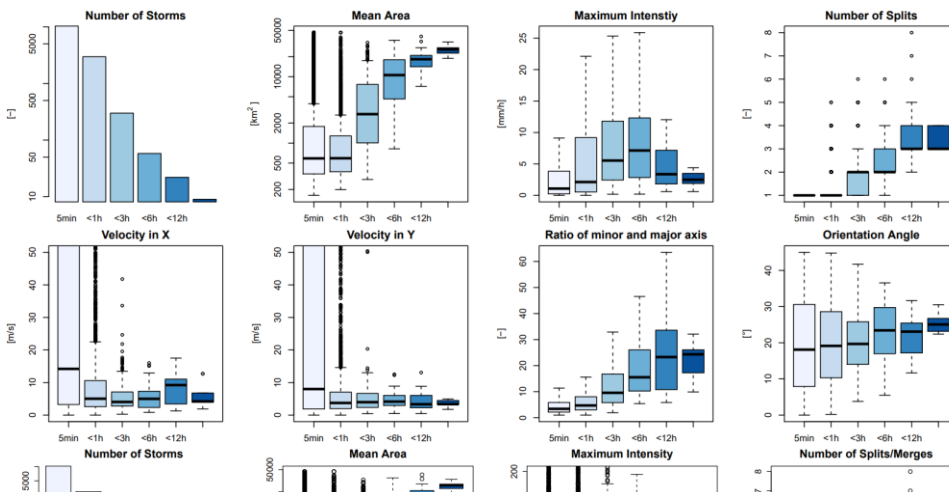

consists of three "states" each occurring at a 5 min time step. For each of the storm states an ellipsoid is fitted to the intensities in order to calculate the major and minor axis and the orientation angle of the major axis. This storm database is the basis for developing the k-NN method and for investigating the similarity between storms. Some characteristics of the identified storms like duration (or also total lifetime of the storm), mean area, maximum intensity, number of splits/merges, local velocity components, and ellipsoidal features, are shown in the Figure 43. These storm characteristics were obtained by an hindcast analysis run of all 110 events with the HyRaTrac algorithm which resulted in around 5200 storms. The local velocities in x and y direction are obtained by a cross-correlation optimization within the storm boundary. For more information about the tracking identification and algorithm, reader is directed to Krämer (2008).

As seen from the number of storms for each duration in **Figure 34**, the unmatched storm cells make the majority of the storms recognized. These are storms that last just 5 min (one-time step) as the algorithm fails to track them at consecutive time steps. These “storms” can either be dynamic clutters from the radar measurement, as they are characterized by small area, circular shapes (small ratio of minor and major axis) and by very high velocities, or artefacts created by low intensity thresholds used for the storm identification, or finally produced by the unrepresentativeness of the volume captured by the radar station. Another thing to keep in mind, is that merged radar are fed to the algorithm for storm recognition, and this affect the storm structures particularly when the radar data is missing. In such case, the ordinary kriging interpolation of rain gauges is given as input, which is well known to smoothen the spatial distribution of rainfall and hence resulting in a short storm characterized by a very large area. Since the “not” matched storms can either be dynamic clutter or artefacts, they are left outside of the k-NN application. Nonetheless, they are treated shortly in section 4.5.

Apart from the unmatched storms, the majority of the remaining storms are of convective nature: storms with short duration (shorter than 6 hours), high intensity and low areal coverage.

Here two types of convective storms are distinguished: local convective with very low coverage (on average lower than 1000 km²) and low intensity (on average ~ 5 mm/h), and mesoscale convective which are responsible for floods (very-with high-intensity up to 100 mm/h or more) and have a larger coverage (on average lower than 5000 km²). The stratiform storms characterized by large area, long duration and low intensities, as well as meso- γ scale convective events with duration up to 6 hours, are not very well represented by the dataset as only a few of them are present in the selected events (respectively circa 20 and 50 storms). Therefore, it is to be expected ~~that-for~~ the k-NN approach ~~may-not~~ to yield very good results for such storms due to the low representativeness. From the characteristics of the storms illustrated in **Figure 34**, it can be seen that for stratiform storms that live longer than twelve hours the variance of the characteristics is quite low (when compared to the rest of the storms) which can either be attributed to the persistence of such storms or to the low representativeness in the database. ~~Thus, eE~~ven though the data size for stratiform is quite small, the k-NN may still deliver good results as characteristics of such storms are more similar. Nevertheless, the stratiform storms are typically nowcasted well by the Lagrangian persistence (specially by a field-oriented approach) as they are wide-spread and persistent. Hence the value of the k-NN is primarily seen for convective storms and not for stratiform ones.

3.1.2 Selecting features for similarity and target variables

At first storms are treated like objects that manifest certain features (predictors) like area, intensity, lifetime etc., at each state of the storms’ life until the storm ~~dies-dissipates~~ (and the predictors are all set to zero). The features of the objects are categorized into present and past features, as illustrated in **Figure 4-5** (shown respectively in blue and grey). The present features describe the current state of the storm at the time of nowcast (denoted with t_0 in **Figure 45**), and are calculated from one state of the storm. To compute certain features, an ellipsoid is fitted to each state of the storm. The past features, on the other hand, describe the predictors of the past storm states (denoted with t_1, t_2 in **Figure 45**) and their change over the past life of the storm. For example, the average area from time t_2 to t_1 is a past feature. A pre-analysis of important predictors showed that the average features over the last 30 minutes are more suitable as past predictors than the averages over last 15 or 60 min or than the calculation of past changing rates. Therefore, averages over past 30 minutes are computed here:

$$P_{30} = \sum_{i=t_0}^{t-30min} P_i / 67, \quad (1)$$

where P_i is the predictors value at time i , and P_{30} the average value of the predictor over last 30min. In case of missing values, the remaining time steps are used for averaging. The selected features (both present and past) that are used here

Formatted: Space Before: 2.85 pt

Formatted: Superscript

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Superscript

Formatted: Font: Bold, Italic

to describe storms as objects, and hence tested as predictors, are shown in Table 1. The present features help to recognize storms that are similar at the given state when the nowcast is issued (blue storm in Figure 45) and the past ones give additional information about the past evolution of the storm (average of grey storms in Figure 45).

The aim of these features is to recognize the states of previously observed storms that are most similar to the current one (shown in blue in Figure 45) of the “to-be-nowcasted” storm. Once the most similar past storm states are recognized,

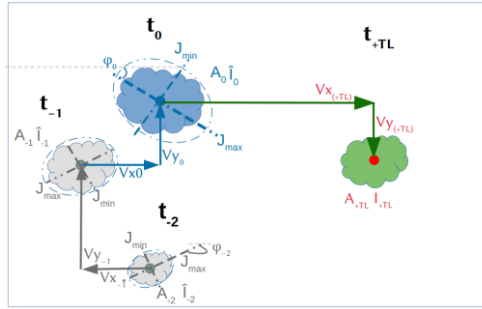


Figure 5 The features describing the past (grey) and present (blue) states of the storm used as predictors to nowcast the future states of the storm (green) at a specific lead time (T_{+LT}) that is described by 4 target variables (in red). The nowcast is issued time t_0 . A full description of these predictors and target variables is given in Table 1.

their respective future states at different lead times can be assigned as the future behaviour (shown in green in Figure 45) of the current state of the “to-be-nowcasted” storms. Since the storms are regarded as objects with specific features, future behaviours at different lead times are determined by four target variables: area (A_{+LT}), mean intensity (I_{+LT}) and velocity in X (V_{x+LT}) and Y (V_{y+LT}) direction. Additionally, the total lifetime of the storm is considered as a fifth target (L_{tot}). Theoretically, the total lifetime is predicted indirectly when any of the first four targets is set to zero, however here it is considered as an independent variable in order to investigate if similar storms have similar lifetime durations.

For each state of each observed storm in the database, the past and present features of that state with its’ respective future states of the five target variables from +5min to +180min (every 5 min) lead times are saved together and form the predictor-target database that is used for the development of the k-NN nowcast model. A summary of the predictors and target variables calculated per state is given in Table 1. Before training-optimizing and validating the k-NN method (advise Figure 3- c), an importance analysis is performed for each of the target variables in order to recognize the most important predictors. As the predictors have different ranges, prior to the importance analysis and the k-NN application, they are normalized according to their median and range between the 0.05 and 0.95 quantiles:

$$normP_i = \frac{P_i - Q_{Pi}^{0.5}}{Q_{Pi}^{0.95} - Q_{Pi}^{0.05}},$$

where P is the actual value, $normP$ the normalized value, and $Q_{Pi}^{0.5}$, $Q_{Pi}^{0.95}$, $Q_{Pi}^{0.05}$ the quantiles 0.5, 0.05 and 0.95 of the i^{th} predictors’ vector. The reason why these quantiles were used for the normalization instead of the typical mean and maximum to minimum range, is that some outliers are present in the data. For instance, very high and unrealistic velocities are present in some convective storms where the tracking algorithm fails to capture adequate velocities (Han et al., 2009). Thus, to avoid the influence of these outliers, the given range is employed.

Formatted: Font: Bold

Formatted: Indent: Left: 0 cm, First line: 0 cm, Space Before: 2.85 pt, After: 2.85 pt

324 **3.1.3 Selection of most relevant predictors**

Formatted: Font: Bold, Italic

325 The application of the k-NN method can be relevant if there is a clear connection between the target variable and
326 the features describing this target variable. For instance, in the case of Galeati (1990), a physical background backed up
327 the connection between target variable (discharge) and the features (daily rainfall volume and mean temperature). In the
328 case of the storms at such fine temporal and spatial scales, due to the erratic nature of the rainfall itself, there are no
329 physical related information that can be extracted from radar data. Different features of the storm itself can be investigated
330 for their importance to the target variable. Nevertheless, the identification of such features (referred here as predictors) is
331 difficult because it is bounded to the set of the available data and the relationships considered. Commonly a strong **Pearson**
332 correlation between the predictors selected and the target variable is used as an indicator of a strong **linear** relationship
333 between them. However, the relationship between predictors and target variables may still be of non-linear nature, thus
334 another predictor **important-importance** analysis should be advised when selecting the predictors. Sharma & Mehrotra
335 (2014) proposed a new methodology, designed specifically for the k-NN approach, where no prior assumption about the
336 system type is required. The method is based on a metric called the Partial Information Correlation and is computed from
337 the Partial Information as:

338
$$PIC = \sqrt{(1 - \exp(-2PI))}$$
 with $PI = \int \int f_{X|Z,P|Z}(x,p|z) \log \left[\frac{f_{X|Z,P|Z}(x,p|z)}{f_{X|Z}(x|z) f_{P|Z}(p|z)} \right] dx dp dz$, (3)

339 where *PIC* is the Partial Information Correlation, ~~and the~~ *PI* is the Partial Information **which represents the partial**
340 **dependence of *X* on *P* conditioned to the presence of a predictor *Z***. The Partial Information itself is a modification of the
341 Mutual Information in order to measure partial **statistical** dependency between the predictors (*P*) and the target variable
342 (*X*), by adding predictors one at a time (*Z*) (step-wise procedure). The evaluation of *PIC* needs a pre-existing identified
343 predictor from which the computation can start. If the pre-defined predictor is correctly selected, then through the Equation
344 (3), the method is able to recognize and leave out the new predictors which are not related to the response and which don't
345 bring additional value to the existing relationship between the current predictors and target variable. Relative weights for
346 the k-NN regression application can be derived for each predictor, as a relationship between the *PIC* metric and the
347 associated partial correlation:

348
$$\alpha_j = PIC_{X,ZXj|ZX(-j)} \frac{S_{XY|ZX(-j)}}{S_{Zj|ZX(-j)}},$$
 (4)

349 where *X* is the **predictor-target response**, *Z_j* is the added predictor from the step-wise procedure, ~~Y the target response, Z(-~~
350 ~~j) previous predictor vector excluding the predictor *Z_j*~~, *S_{XY|ZX(-j)}* the scaled conditional standard deviations between ~~the first~~
351 ~~predictor and the target (x) and predictor vector Z(-j)~~, *S_{XZj|ZX(-j)}* the scaled conditional standard deviations between the
352 additional predictor (*Z_j*) and the first ~~one~~ predictor vector *Z(-j)*, and the *α_j* **denotes** the predictors weight. The R package
353 NPRED was used for the investigation of the *PIC* derived importance weights (Sharma et al., 2016).

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic

Table 1 List of all the past and present features of the storms ~~object~~ that are investigated for their importance as
predictors, and the respective target variables calculated for different lead times.

Formatted: Font: 9 pt

Formatted: Font: 9 pt

▲	Features	Symbol
Present Features	number of storm cells within the storm region	Cells [-]
	current storm lifetime at time of nowcast	L _{now} [min]
	area of the storm	A [km ²]
	mean spatial intensity	I _{ave} [mm/h]
	maximum spatial intensity	I _{max} [mm/h]
	standard deviation of the spatial intensities	I _{sd1} [-]
	standard deviation of intensities groups inside the storm	I _{sd2} [-]
	global velocity of the entire radar image	V _g [m/s]

	x and y component of the local velocity of the storm region major and minor axis of the ellipsoid and their ratio orientation angle of the major axis of the ellipsoid	V_x, V_y [m/s] J_{max}, J_{min} [km] J_r [-] Φ [°]
Past Features	average area over the last 30 min of storm existence	A_{30} [km ²]
	average mean intensity over the last 30 min of storm existence	I_{ave30} [mm/h]
	average maximum intensity over the last 30 min of storm existence	I_{max30} [mm/h]
	average standard deviation of intensity over the last 30 min of storm existence	I_{sd130} [-]
Past Features	average standard deviation of intensity groups over the last 30 min of storm existence	I_{sd230} [-]
	average global velocity over the last 30 min of storm existence	V_{g30} [m/s]
	average x and y component of the local velocity over the last 30 min of storm existence	V_{x30}, V_{y30} [m/s]
	average value of the major and minor axis of the ellipsoid and their ratio over the last 30 min of storm existence	J_{max30}, J_{min30} [km] J_{r30} [-]
Target Variables	average major axis orientation of the ellipsoid over the last 30 min of storm existence	Φ_{30} [°]
	Total lifetime of the storm	L_{tot} [min]
	Predicted-Estimated Area and Intensity at LT from +5min to +180min	A_{+LT} [km ²], I_{ave+LT} [mm/h]
	Predicted-Estimated Velocity X and Y at LT from +5min to +180min	V_{x+LT}, V_{y+LT} [m/s]

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Here in this study, these two importance analyses are used to determine the most important predictors and their respective weights in the k-NN similarity calculation. For each target variable the most important predictor identified from Pearson Correlation, is given to the PIC metric as the first predictor. The analysis is complex due to the presence of several predictors, 38 states of future behaviour for each target variable (for each 5min between +5min to +180 min lead times), and different ~~times-of-nowcast~~ **nowcast times**; the weights were calculated first for three lead times +15min, +60min and +180 min, and for three storm groups separated according to their duration <60min, 60min-180min, and > 3 hours. Here the averages weights over these groups and lead times are calculated and used as a reference for each importance analysis. The k-NN errors with these average weights are compared in Section 4.1.

3.1.4 Developing the k-NN structure

The structure of the proposed k-NN approach at the storm scale is illustrated at **Figure 56** - left) the current “to-be-nowcasted” storm is shown, while at - right) the past observed storms. First in Step 1, the Euclidean distance between the most important predictors (either present or past predictors), of past storm states and the current one is calculated to identify the most-similar states of the past storms (distance between the blue shapes at left and right side of **Figure 65**):

$$E_d = \sqrt{\sum_{i=1}^N w_i \cdot (X_i - Y_i)^2}, \quad (5)$$

where w is the weight of the respective i^{th} predictor **as dictated by the importance analysis (results are shown in Table 2)**, X the predictor of the “to-be-nowcasted” storm, Y the predictor of a past observed storm, N the total number of predictors used and E_d the Euclidian distance between the “to-be-nowcasted” and a past observed storm. The assumption made here is that the smaller the distance, the higher the similarity of future behaviour between the selected storms and the “to-be-nowcasted” storm. Therefore, in **Step 2** these distances are ranked in an ascending order and 30 past storm states with the smallest distance are selected (**Step 3**). Once the similar past storm states have been recognized (the blue-shape in **Figure 65** - right), the future states of these storms (the green-shapes in **Figure 65** - right, each for a specific lead time from the

Formatted: Font: Bold, Italic

occurrence of the selected similar blue-state), are treated as future states (the green-shape in **Figure 65** - left) of the “to-be-nowcasted” storm. In **Step 4**, either a single (**deterministic**) or an ensemble (**probabilistic**) nowcast is issued. If a single nowcast is selected, then the green-instances of the k-neighbours are averaged with weights for each lead time:

Formatted: Font: Bold, Italic

$$R_{new} = \sum_{i=1}^k Pr_i \cdot R_i, \quad (6)$$

where k is the number of neighbours obtained from optimization, R and Pr are respectively the response and weight of the i^{th} neighbour and the R_{new} the response of the “to-be-nowcasted” storm as averaged from k neighbours. **The response R refers to each of the 5 target variables: Area, Intensity, Velocity in X and Y direction, and Total Lifetime.** Contrary, if a probabilistic nowcast is selected, **30-ensemble memberss ensembles are issued-selected from the closest 30 stormsindependently; to each neighbour where each member is assigned a probability is assigned-according to their-the rank of the respective neighbour stormwith the “to-be-nowcasted” storm:**

Formatted: Font: Italic

$$Pr_i = \frac{(1/Rank_i)}{\sum_{i=1}^k (1/Rank_i)}, \quad (7)$$

where k is the selected number of neighbours and $Rank$ and Pr are respectively the rank and the probability weights of the i^{th} neighbour/ensemble member. **An ensemble member is then selected randomly based on the given probability weights. These probability weights calculated here are as well used for computation of the single nowcast in Equation (6). Only neighbours that display a distance lower than 0.5 are selected for both single and ensemble nowcast in order to minimize the influence of non-similar storms.**

Since the performance of the single k-NN nowcast is highly dependent on the number of k – neighbours used for the averaging, a prior **training is to optimization should** be done in order to select the right k-neighbours that yield the best performance **(as illustrated in Figure 3-c)**. The application of the k-NN **(and consequently its training)** can either be done per each target variable independently, or for all target variables grouped together. In the first approach, the dependency of the target variables between one another is not assured, they are predicted independently from one another. This is referred here as the target-based k-NN and is denoted in the results as VS1. The main advantage of this application is that, since the relationship between the target variables are not kept, new storms can be generated. Theoretically, the predicted variables should have a lower error since the **training-application** is done specifically per each variable, nevertheless this approach doesn't say much if similar storms behave similarly. Therefore, it is used here as a benchmark for best possible **training-optimization** that can be reached by the k-NN with the current selected predictor set. In the second approach, the relationships between target variables as exhibited by previous storms are kept. The storm structure and the relationship between features are maintained as observed and thus the question if similar storms behave similarly can be answered. This is referred here as the storm-based k-NN and is denoted in the results as VS2. In this study the two approaches are used (respectively called VS1 and VS2) to understand the potential and the actual improvement that the k-NN can bring to the storm nowcast.

Formatted: Font: Bold

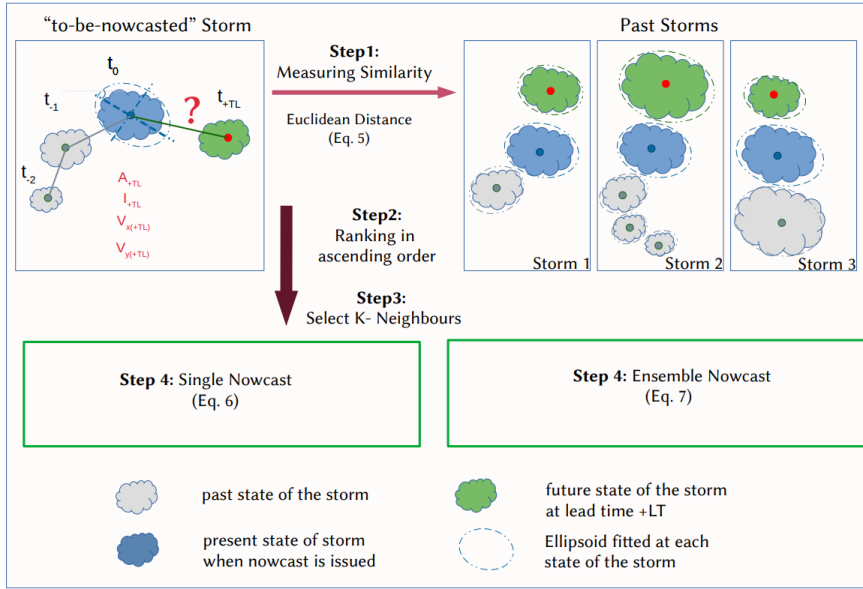


Figure 6 The main steps involved in the k -NN based nowcast with the estimation of similar storms (Step 1 to 3) and assigning the future responses of past storm as the new response of the “to-be-nowcasted” storm either in a *single deterministic* nowcast (Step4-left) or in a *probabilistic ensemble* nowcast (Step4-right).

3.2 Training Application of the k -NN and performance assessment

3.2.13 Training-Optimizing the *single-deterministic* k -NN nowcast

The **training-optimization** of the k -NN is done based on the 5189 storms extracted from 110 events on a “leave-one-out” cross-validation. Since the “not” matched storms can either be dynamic clutter or artefacts of the tracking algorithm, they are left outside of the k -NN **training-optimization** and validation. The assumption is here that an improvement of the radar data or tracking algorithm would eliminate the “not” matched storms, hence **we-the focus is only-only** on the improvement that the k -NN can introduce to the matched storms. “Leave-one-event-out” cross-validation means here that the storms of each event have to be nowcasted by considering as a past database the storms from the remaining 109 events (**a detailed visualization is given in Figure 3-b**). The objective function is the minimization of the **mean** absolute error between predicted and observed target variables at lead times from +5min to +180 min:

$$\text{Error} \neq \text{MAE}_{\text{target}} = \sum_{i=1}^N (|\text{Pred}_{i,+LT}| - |\text{Obs}_{i,+LT}|) / N \quad (8)$$

where the Pred is the predicted response, **and** Obs the observed response for the i^{th} storm, **and** $+LT$ the lead time **and** N the number of storms considered inside an event. The results of the storms’ nowcast are also dependent on the **time-of nowcastnowcast time** in respect to the storms’ life (time step of the storm existence when the nowcast is issued – refer to **Figure 3-a**). If the **time-of nowcastnowcast time** is 5min, only the present predictors are used for the calculation of storm similarity, and as higher **the the time-of nowcastnowcast time**, as more predictors are available for the similarity calculation. It is expected for the nowcast to perform worse at the first 5min of the storm existence, as the velocities are not assigned properly to the storm region and the past predictors are not yet calculated. Therefore, the **training-optimization** is done separately for three different groups of nowcast times, in order to achieve a proper **training-application** of the k -NN model: Group 1 – Nowcast issued at 1st timestep of storm recognition, Group 2 – Nowcast issued between 30min to 1 hour of

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Font: Bold, Italic

Formatted: Font: Italic

Formatted: Font: Italic

storm evolution, and Group 3 – Nowcast issued between 2 and 3 hours of storm evolution. The k-number with the lowest absolute error averaged over all the events for most of the lead times (as median of MAE-per from Equation (8) over all events) is selected as a representative for the single-deterministic nowcast. For the training, the mean instead of the median is computed over each group in order to account as well for the influence of outliers.

3.2.2.3 Validating the k-NN single-deterministic and ensemble-probabilistic nowcast

Once the important predictors are identified and the k-NN has been trained/optimized, the performance of both single-deterministic and ensemble-probabilistic k-NN is assessed also in a “leave-one-event-out” cross-validation mode. Two performance criteria are used to assess the performance: i) absolute error per lead time and target variable (as in the training-optimization of the k-NN in Equation (8), and ii) the improvement (%) per each lead time and target variable that the k-NN approach introduces to the nowcast when compared to the Lagrangian persistence in object-based approach;

$$Error_{impr} [\%] = 100 \cdot \frac{(|Error_{ref}| - |Error_{new}|)}{|Error_{ref}|}, \tag{9}$$

where the $Error_{new}$ is the event error manifested by the k-NN, the $Error_{ref}$ the event error manifested by the Lagrangian persistence and the $Error_{impr}$ the improvement in reducing the error per each lead time. For improvements higher than 100% or lower than -100%, the values are reassigned to the limits respectively 100% and -100%. Here the Lagrangian persistence refers to as persistence of the storm characteristics (Area, Intensity, Velocity in X and Y Direction) as last observed and constant for all lead times. For the ensemble-probabilistic application-approach of the k-NN method, the Continuous Rank Probability Score (CRPS) as shown in Equation (10) is computed additional criteria were employed.

$$CRPS(F, y) = \int_{-\infty}^{\infty} (F(x) - 1\{y \leq x\})^2 dx = E_F|Y - y| - \frac{1}{2} E_F|Y - Y'| \tag{10}$$

where F is a probabilistic forecast, y the observed value, Y the independent random variable with CDF of F , and Y' the finite first moment (Gneiting and Katzfuss, 2014). The CRPS is a generalization of the mean absolute error, thus if a single nowcast is given, it is reduced to the mean absolute error (Equation 8). This enables a direct comparison between the probabilistic and deterministic nowcast and to investigate the advantages of the probabilistic one. As in Equation (8), the values obtained in Equation (9) and (10) are averaged per each of the 110 events. For each storm the number of time steps where the observed target variable was within the range of the ensemble nowcast, was computed in order to give an idea how effective the ensemble range is depending on the lead time. Moreover, the number of ensembles that have a smaller error than the Lagrangian persistence were computed for each lead time and target variable.

As stated earlier the results depend on the time-of-nowcast/nowcast time and also storm duration (in regard to available storms). Therefore, the performance criteria for both single-and-ensemble-k-NN nowcasts were computed separately for different storm durations and time-of-nowcasts/nowcast times as illustrated in **Table 2**. It is important to mention as well, that since one event may contain many storms of similar nature, when leaving one event out for the cross-validation, the number of available storms is actually lower than the numbers given in **Table 2**. This is particularly affecting the performance of the storms longer than 6 hours, as the “leave-one-event-out” cross-validation causes-leaves fewer available storms for the similarity computation.

Table 2 The selected storm durations and time-of-nowcast/nowcast times for the performance calculation of the single-deterministic and ensemble-probabilistic nowcast and the respective number of storms for each case.

Storm living <u>shorter-less</u> than 30 min		Storms living within 0.5 - 3 hours		Storms living longer than 3 hours	
<u>Nowcast Time</u> <u>Time of Nowcast</u>	No. Storms	<u>Time of Nowcast</u> <u>Time of Nowcast</u>	No. Storms	<u>Time of Nowcast</u> <u>Time of Nowcast</u>	No. Storms
5 min	4106	5 min	994	5min	89

Formatted: Font: Bold, Italic

Formatted: English (United Kingdom)

Formatted: Font: Italic, English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: Font: Italic, English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: Font: Italic, English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: Font: Italic, English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: Font: Italic, English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom), Highlight

Formatted: English (United Kingdom)

Formatted: Font color: Red, English (United Kingdom)

15 min	2265	1h	370	2h	89
30 min	271	3h	6	6h	33

4. Results:

4.1 Predictors Importance Analysis

Figure 6Table 3 illustrates the results of the two important analysis methods (Pearson correlation and partial information correlations - PIC) for each of the target variable and their average over the 5 variables. The stronger the shade of the green colour, the more important is the predictor for the target variable. The weights given here are averaged from the weights calculated at three different lead times and storm durations (see [Appendix 8.1 and 8.2](#) for more detailed information about the calculated weights). First the Pearson Correlation weights were advised for the identification of the most important predictors. From the results it is clear that the autocorrelation has a higher influence, as the target variables are mostly correlated with their respective past and present values. This influence logically is higher for the shorter lead times and smaller for the longer lead times. For longer lead times the importance of other predictors, that are not related directly with the target variable, increases. Similar patterns can be observed among the Area, Intensity and Total Lifetime target variables, indicating that these three variables may be dependent on each other, and on similar predictors like: current lifetime, area, standard deviation of intensity, the major and minor ellipsoidal axis and the global velocity. This conclusion agrees well with the life cycle characteristics of convective storms reported in the literature review. On the other hand, are the velocity components, which seem to be highly dependent on the autocorrelation and slightly correlated to area and ellipsoidal axes. It has to be mentioned that apart for the standard deviation intensities also the mean, median, and maximum spatial intensities were investigated. Nevertheless, it was found that the I_{sd1} and I_{sd2} had the higher correlation weights, and since there is a high collinearity between these intensity predictors, they were left out of the predictor's importance analysis.

Table 3. Strength of relationship between the selected predictors and the target variables averaged for three lead times and storm duration groups (original weights can be seen in the Appendix 8.1 and 8.2) based on two predictors identification methods: upper – correlation, and lower – PIC weights. The green shade indicates the strength of the relationship: with 0 for no relationship at all, and 1 for highest dependency.

Method	Target	Present Predictors													Past Predictors - averaged from last 30 min												
		Cells	L_{now}	A	PI_{sd1}	PI_{sd2}	V_x	V_y	V_z	J_{max}	J_{min}	J_r	Φ	A	PI_{sd1}	PI_{sd2}	V_x	V_y	V_z	J_{max}	J_{min}	J_r	Φ				
Pearson Correlation	A	0.09	0.18	0.67	0.15	0.48	0.05	0.00	0.00	0.50	0.49	0.09	0.00	0.65	0.17	0.00	0.07	0.00	0.06	0.51	0.49	0.12	0.00				
	I	0.00	0.07	0.11	0.36	0.14	0.04	0.00	0.00	0.12	0.12	0.00	0.04	0.10	0.33	0.13	0.00	0.00	0.05	0.12	0.11	0.05	0.04				
	Vx	0.00	0.00	0.10	0.02	0.04	0.16	0.21	0.00	0.08	0.00	0.00	0.03	0.09	0.00	0.00	0.18	0.28	0.00	0.09	0.00	0.00	0.00				
	Vy	0.00	0.05	0.00	0.00	0.05	0.00	0.00	0.15	0.04	0.00	0.00	0.00	0.00	0.00	0.05	0.00	0.04	0.22	0.05	0.04	0.00	0.00				
	L _{tot}	0.00	0.11	0.36	0.10	0.22	0.09	0.00	0.00	0.22	0.20	0.05	0.05	0.34	0.00	0.21	0.10	0.00	0.00	0.22	0.20	0.08	0.07				
	Average	0.00	0.08	0.25	0.13	0.18	0.07	0.10	0.10	0.19	0.16	0.05	0.04	0.24	0.10	0.08	0.07	0.10	0.10	0.19	0.17	0.05	0.02				
Partial Information Correlation	A	0.00	0.08	0.15	0.00	0.00	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.33	0.00	0.07	0.00	0.00	0.33	0.00				
	I	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
	Vx	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00				
	Vy	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00				
	L _{tot}	0.00	0.15	0.13	0.00	0.00	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33	0.00	0.00	0.00	0.11	0.33	0.00				
	Average	0.00	0.05	0.06	0.00	0.00	0.09	0.00	0.00	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.20	0.01	0.20	0.02	0.13	0.00				

The application of the PIC analyses requires that the most important predictors should be introduced to the analysis first. Hence based on the Pearson correlation values the following most important predictors were selected: Area – A, Intensity – PI_{sd1} , - Velocity X – V_{x30} , Velocity Y – V_{y30} , Total Lifetime – A. The results of the PIC analysis are shown in the lower row of **Figure 6Table 3 and Appendix 8.2**. For storm duration lower than 3 hours, where a lot of zeros are present, the PIC methods seems to be unable to converge to stable results or to identify important predictors. For the intensity and velocity components, the PIC identifies only 1 important predictor which, in the case of the Intensity and

Formatted: Font: Bold, Italic

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Font: (Default) Times New Roman, 10 pt, Bold, English (United Kingdom)

Formatted: Space Before: 0 pt, After: 0 pt, Line spacing: 1.5 lines, Keep with next

Formatted: Font: (Default) Times New Roman, 10 pt, English (United Kingdom)


Formatted: Font: (Default) Times New Roman, 10 pt, English (United Kingdom)

Formatted: Font: Not Bold

Velocity in the Y direction, does not correspond with the most important predictor fed first in the analysis. Contrary for Total Lifetime and Area, only for storms that last longer than 3 hours, the method is able to converge and give the most important predictors; for Area - A, Vg, past Vy₃₀ and the L_{now}, while for Total Lifetime - A, Vel_g, L_{now} and Jmin₃₀. At the moment it is unclear why the PIC method is unable to perform well for all of the target variables and storm groups. One reason might be that only the Area and Total Lifetime are dependent on the chosen target variables. Another **most probable** reason might be that for the other target variables the heavy-tail of the probability distribution and the high zero sample size may influence the calculation of the joint and mutual probability distribution. The reason why **this** method is performing poorly for the application at hand, even though developed specifically for the k-NN application, is not completely understood and is not investigated further on for the time being since it is outside the scope of this paper.

Overall, the results from the Pearson correlation seem more robust and stable (throughout the lead times and storm groups) than the PIC method (**refer to Appendix 8.1 and 8.2**): the importance weights increase with the lifetime of the storm and decrease with higher lead time. These behaviours are expected as with increasing lead time the uncertainty becomes bigger and with increasing lifetime the storm dynamic becomes more persistent (due to the large scales and the stratiform movements involved). Moreover, the important predictors do not change drastically from one lead time or storm group to the other, as seen in the PIC. Therefore, the predictors estimated from the correlation with the given weights in **Figure 6 Table 3** are used as input to the k-NN application. In order to make sure that the predictor set from the Pearson correlation was the right one, the improvement in the single k-NN training error of using these predictors instead of the ones from PIC are shown in **Figure 7**. The results shown in this figure are computed according to the Equation (9) (where “new” is k-NN with correlation weights, and “ref” is the k-NN with PIC weights) for the target-based k-NN approach (solid lines) and storm-based k-NN approach (dashed lines) and are averaged for three groups of nowcast times as indicated in the **training optimization** of k-NN (Section 3.2.3) and as well in the legend of **Figure 7**.

The results from **Figure 7** indicate that for the Area, Intensity, and Velocity components, the Pearson correlation weights improve the performance of target-based k-NN **from 5 up to up to 1030%** compared to the PIC weights. This happens mainly for the short lead times (**LT<+60min**) throughout the three groups of nowcast times. For longer lead times there seems to be no significant difference between the predictors sets. **Nevertheless, here the mean over the grouped storms is shown to illustrate the influence of the outliers. In the case of the median, the Pearson correlation has the clear**

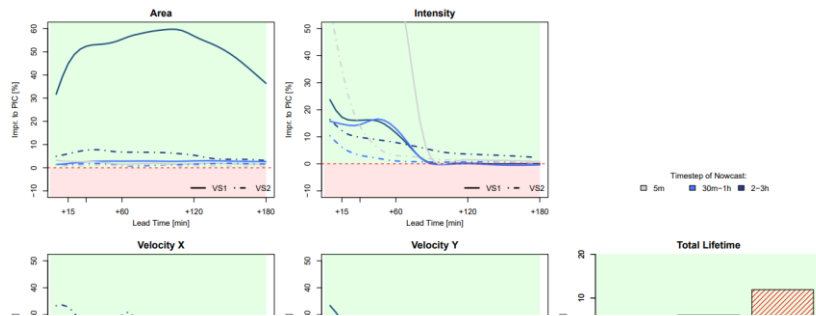

superiority compared to the PIC predictors set. The same cannot be said for the Total Lifetime as a target variable, here **not always** the Pearson correlation weights **do not** give the best results for all the nowcast times. In fact, here the k-NNs based on the PIC weights seem to be more appropriate and yielded better results. However, as the other 4 target variables are better for the Pearson correlation, this predictor set was selected for all applications of the k-NN (with different weights according to **Table 3 Figure 6**) to keep the results consistent with one another. A further analysis was done that proved

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Standard, Justified, Line spacing: 1.5 lines

that the application of the correlation weights produces lower errors than the non-weighted k-NN application (all weights are assigned to 1 to the most important predictors from Pearson correlation).

Lastly, it should be emphasized that for the computation of predictors weights, all the events were grouped together, and thus when applying the k-NN nowcast in the cross-validation mode, there is a potential that the information leaks from the important analysis to the performance of the k-NN (also illustrated in Figure 3-c). In other words, the performance of the k-NN will be better, because the weights were derived from all the events grouped together. Typically, in modelling applications, the optimization dataset should be clearly separated by the validating one, in order to remove the effect of such information leakage. For this purpose, the correlation weights were computed 110 times, on a “leave-one-event-out” cross-sampling, in order to investigate their dependence on the event database. The results of such cross-sampling are visualized in Appendix 8.3 and indicate a very low deviation of the predictors weights (lower than 0.01) over all the target variables. The shown low variability of the Pearson Correlation weights justifies the decision to estimate the weights from the whole database, as the potential information leakage is not likely affecting the results of the k-NN performance. This is another reason favouring the calculation of the predictor’s weights based on the Pearson Correlation. On the other hand, the weights from the PIC analysis are changing very drastically depending on the dataset and hence the effect of the information leakage would be much larger in the k-NN developed from PIC weights. Moreover, a sensitivity analysis as done in Appendix 8.3 cannot be performed for the PIC analysis because it would be extremely time consuming.

4.2 Training of Optimizing the single deterministic k-NN nowcast

Once the most important predictors and their weights are determined, the training optimization of the single k-NN nowcast for the two k-NN applications (storm-based and target-based) was performed. The optimal k-value obtained from minimizing the mean absolute error (MAE) produced by k-NN are shown in Figure 8-upper row. The results are averaged computed for the given nowcast times (see legend), each lead times and target variables for both k-NN applications (VS1 target-based and VS2 storm-based). For the 4 target variables Area, Intensity and Velocity in X/Y direction, the number of optimal values decreases quasi exponentially for lead time up to 1 hour. After these lead time,

Formatted: Font: Bold

Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Auto

Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Auto

Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Auto


Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Auto

Formatted: Font: Bold

Formatted: Font: Bold, Italic

Formatted: Space After: 0 pt

Formatted: Space Before: 0 pt

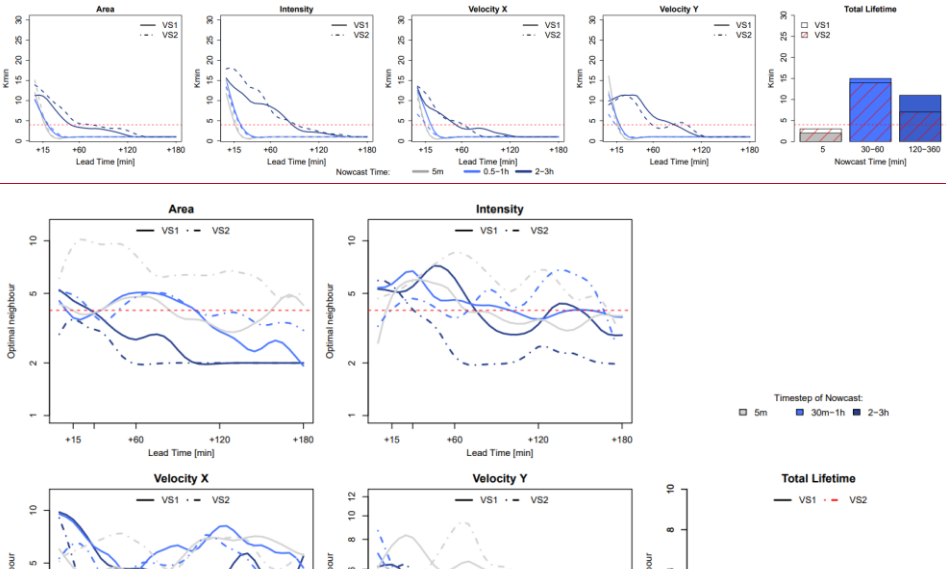

when the majority of the storms are dissipated, the optimal k-number converges at 1, meaning that the closest neighbour is enough to predict the dissipation of the storms. Contrary, for the very short lead times, the closest identified neighbour is unable to capture the growth/decay processes of the storms, thus the response has to be average from k-neighbours, with k depending strongly on target variable, nowcast time, lead time, and total lifetime. This seems to be the case also for the Total Lifetime, where averages between 3-15 neighbours are computed as K_{min} . Overall the k=1 seems to yield the lowest MAE for the majority of the lead time, nowcast times and target variables, and therefore, is selected to continue further on with the analyses. However, selecting the first neighbour does not satisfy the requirement that the nature doesn't repeat itself, and ideally a $k>1$ should be achieved such that the responses from similar neighbour can be averaged to create a new response. For this purpose, the optimal K were additionally obtained by minimizing the mean error (ME) and are shown in Figure 8 -lower row. Here the overestimation and underestimation of different storms balance one another, and the results seem to converge when averaging 3-5 neighbours. A direct comparison of the MAE for k=2-5 and k=1 was performed in order to understand if a higher k will benefit the application of both k-NN versions. The median improvements of using neighbours from 2-5 instead of 1 (over the selected groups of nowcast times) are shown only for the Total Lifetime in Table 4. The other target variables are left outside this analysis as the improvements averaged over all the lead times are very close to zero, as the dissipation of storms is captured well by all the 5 closest neighbours. From the results of the Table 4 it is visible that k=4 brings the most advantages and hence was selected for both applications as a better compromise. The selection of k=4 is not an optimization per se, as it was not learned with artificial intelligence, instead was selected based on human intuition, and it does not represent the best possible training of the K_{min} . For a more complex optimization, the machine learning can be employed in the future to learn the parameters of the exponential relationship between K_{min} , lead time, nowcast time and target variable. In that case a proper splitting of the database into training and validation should be done in order to avoid, information being leaked from the optimization to the validation of the k-NN. In our case, the effect of the information leakage at this stage (also illustrated in Figure 3-c) is minimized by obtaining the K_{min} on a cross-sampling of the events, and averaged over the events, lead times and nowcast times.

Overall, it seems that averaging between 2 to 10 neighbours give the best results depending on the lead time, and there is a clear-decreasing trend of neighbours with increasing lead time. The best achieved k-numbers from the two k-NN-applications are different from one another at some lead times, nevertheless they seem to converge around k=3 or k=4 neighbours. Here for both application the k=4 was selected (indicated with red dashed horizontal line in Figure 8) as a better compromise between different lead times, nowcast times and target variables.

Table 4. The median improvement of the total lifetime MAE when using k=2-5 instead of k=1 over the three selected groups of nowcast times.

	k=2	k=3	k=4	k=5
Storm-based	9.09%	10.74%	13.09%	11.94%
Target-based	3.40%	5.89%	6.54%	6.02%

4.3 Results of the single-deterministic 4-NN nowcast

The absolute median errors-MAE of the 4-NN determinist nowcast over all the events, run for both target- and storm-based approaches are shown in Figure 9 for each lead time and target variable. The results are grouped according to the storm duration; i) upper row – for storms that lived 30min, ii) middle row – for storms that lived up to 3 hours and iii) lower row – for storms that lived longer than 3 hours, and are averaged per nowcast times given in Table 2. To get a better overview of the majority of storms, the median results were shown here instead of the mean ones. As shown as well in the training-optimization of the 4-NN, the target-based k-NN exhibits lower Area, Intensity and Velocity errors

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Subscript

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Font: Bold, Not Highlight

Formatted: Not Highlight

Formatted: Font: Bold

Formatted: Not Highlight

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Font: (Default) Times New Roman, 10 pt, Bold

Formatted: Caption, Keep with next

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 9 pt, English (United Kingdom)

Formatted Table

Formatted: Font: (Default) Times New Roman, 9 pt, English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: Font: (Default) Times New Roman, 9 pt, English (United Kingdom)

Formatted: Font: (Default) Times New Roman, 9 pt, English (United Kingdom)


Formatted: English (United Kingdom)

Formatted: Font: (Default) Times New Roman, 9 pt, English (United Kingdom)

Formatted: Font: Bold, Italic

than the stormevent-based 4-NN. **Table 5-a** illustrates the median deterioration (-) or improvement (+) in percent (%) over all lead times that the storm-based 4-NN can reach when compared to the target-based one.

For storm living less than 30 minutes, the error-MAE is decreasing with the lead time and past LT+30 min is mostly zero, as the deaths-dissipations of the storms have been captured successfully. The Total Lifetime of the majority of the storms can be captured with only 5~15 min over-/underestimation regardless of the nowcast time. The errors for the 4 target variables (except Total Lifetime) are lower for the earlier-later nowcast times than for the later-earlier ones (as expected). The difference between the storm- and target-based 4-NN is very small for Area, Intensity and Total Lifetime, but much higher for the velocity components (with storm-based exhibiting up to 40% higher errors than the target-based). The biggest difference seems to be for shorter lead times (LT < +1h). This is explained by the sample size, as with increasing nowcast time, the sample size becomes smaller and thus 4-NN may not find the suitable neighbours. For very short lead times in these storms (up to LT+15min), the errors of event-based are between 10% (for Area, Intensity and Total Lifetime) to 20% (for Velocity components) higher than the target-based 4-NN. For Area and Intensity, the errors are consistently higher than the target-based, however for the Total Lifetime and Velocity components there are certain nowcast times and lead times where the errors from the storm-based are up to 50% lower. Past 30 min lead times there is no difference between the two 4-NN approaches as both of them predict the death of

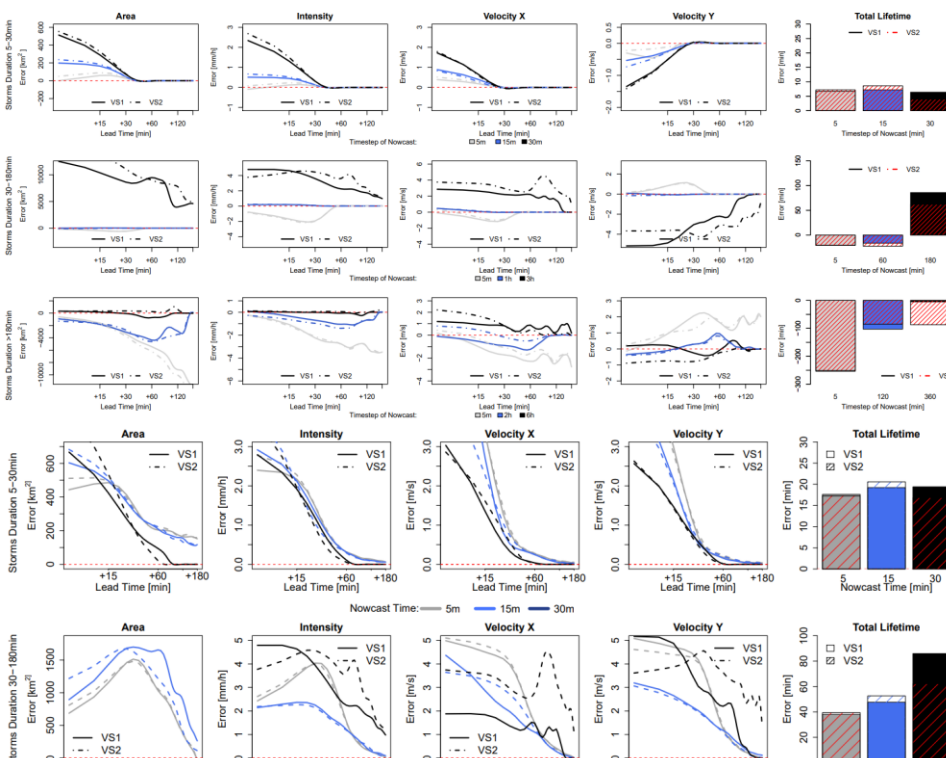

storms correctly.

For the storms living up to three hours, the same behaviour is, more or less, observed. The only difference is for nowcasts issued at the 36th-timestep 3rd hour of the storm existence (last moment the storm is observed). Here it is clear that the 4-NN fails to capture the death-dissipation of the storms that live exactly three hours, however this is attributed

Formatted: Font: Bold

Formatted: Left

Formatted: Justified

Formatted: Superscript

to the number of available storms with duration of 3 hours (median over 6 storms available). Since the Area, Intensity and Total Lifetime are overestimated and not converging to zero for high lead times, it is clear that the nearest neighbours are being selected from the longer storms that do not dissipate within the next 3 hours. The differences between the two 4-NN approaches are visible mainly for lead times up to 2-30 min hours (except the nowcast at 36th time-step of 3rd hour of the storms life), afterwards the errors are relatively converging to -zero for the 4 target variables each other. The storm-based 4-NN produces circa 10-20% lower-higher errors than the target-based one for the nowcast times lower than 30min 3 hours, while for later-nowcast time of 3 hours,s the errors are up to clearly-100% higher than the target-t based one (up to 100% higher). At these storms as well, the higher discrepancy between the two versions of 4-NN is seen at the Velocity components. As the sample size is the same for both approaches, it seems like storm-based may be more appropriate at the beginning of the storm's life and that these storms behave more similarly at the first 30 minutes of their evolution rather than in their later life.

For the storms that live longer than 3 hours (under 100 storms available) the same problem, as in the nowcast issued-time of 3 hours at the 36th time-step of the previous storms seen before, is present. The Total Lifetime is clearly underestimated (up to 100min) as due to database the information is taken from shorter storms. It is important to notice here, that although 70 storms are present, because of the "leave-one-event-out" validation, the storm database is actually smaller. Nevertheless, the error is manifested here differently: as the long storms are more persistent in their features: The Area, Intensity and Velocity components are captured better for the short lead times with the error increasing at higher lead times. Here as well the nowcast issued at the earlier stages of the storm's life exhibit higher errors than in the later stages. Especially for the nowcast at the 6th hour of the storm's existence, the errors are quite low for all 5 target variables due to the persistence of the stratiform storms. For this group of long storms, the storm-based nowcast yields errors from 0 up to more than 100% higher errors than the target-based one, with only few exceptions depending on the time of nowcast and variable. It is clear that the storm-based 4-NN is more influenced by the number of available storms than the target-based approach.

Table 5. Median Deterioration (-) or Improvement (+) of k-NN storm-based (VS2) compared to target-based (VS1) over all lead times according to the storm duration and nowcast times (shown in %). Equation 9 is used here, where "ref" is the target-based and "new" is the storm-based k-NN.

a) deterministic comparison of median MAE from storm-based to target- based																				
Storm Duration 5-30min	Nowcast Time	Area	Intensity	Velocity X	Velocity Y	Total Lifetime	Storm Duration 0.5-3h	Nowcast Time	Area	Intensity	Velocity X	Velocity Y	Total Lifetime	Storm Duration >3h	Nowcast Time	Area	Intensity	Velocity X	Velocity Y	Total Lifetime
	5min	-3%	8%	-8%	-27%	2%		5min	-0.21%	-2%	3%	-1%	-4%		5min	-9%	0%	2%	-1%	-1%
	15min	0%	7%	-14%	-38%	-7%		60min	30.00%	2%	-5%	23%	-11%		120min	-10%	-7%	-3%	-10%	2%
	30min	0%	0%	0%	0%	13%		180min	-15%	-28%	-100%	-100%	28%		360min	-10%	-8%	-8%	21%	18%
b) probabilistic comparison of median MAE from storm-based to target- based																				
Storm Duration 5-30min	Nowcast Time	Area	Intensity	Velocity X	Velocity Y	Total Lifetime	Storm Duration 0.5-3h	Nowcast Time	Area	Intensity	Velocity X	Velocity Y	Total Lifetime	Storm Duration >3h	Nowcast Time	Area	Intensity	Velocity X	Velocity Y	Total Lifetime
	5min	-19%	7%	-12.75%	-50.00%	0.50%		5min	-3.00%	0.00%	-0.50%	-14.40%	-4.02%		5min	-9.30%	-4.24%	1.10%	-0.67%	-9.27%
	15min	3%	4%	-6.95%	-58%	-9.61%		60min	11.58%	-0.23%	-11.60%	15.37%	3%		120min	-5%	2%	-4%	-5%	4.79%
	30min	30.23%	29.62%	35%	40.18%	3.45%		180min	-8%	-4%	-100%	-88%	5%		360min	-3.50%	-0.42%	-1.6%	11%	5.14%
c) deterministic comparison of median improvement towards Langrangean Persistence from storm-based to target-based																				
Storm Duration 5-30min	Nowcast Time	Area	Intensity	Velocity X	Velocity Y	Total Lifetime	Storm Duration 0.5-3h	Nowcast Time	Area	Intensity	Velocity X	Velocity Y	Total Lifetime	Storm Duration >3h	Nowcast Time	Area	Intensity	Velocity X	Velocity Y	Total Lifetime
	5min	-1%	0%	0%	-1%	0%		5min	0.00%	0%	1%	0%	0%		5min	-26%	0%	0%	6%	-8%
	15min	0%	0%	0%	-1%	0%		60min	12.53%	1%	-1%	3%	0%		120min	-31%	-22%	-29%	-39%	89%
	30min	0%	0%	0%	0%	0%		180min	0%	0%	1%	0%	0%		360min	-5%	-21%	-8%	8%	89%
d) probabilistic comparison of median improvement towards Langrangean Persistence from storm-based to target-based																				
Storm Duration 5-30min	Nowcast Time	Area	Intensity	Velocity X	Velocity Y	Total Lifetime	Storm Duration 0.5-3h	Nowcast Time	Area	Intensity	Velocity X	Velocity Y	Total Lifetime	Storm Duration >3h	Nowcast Time	Area	Intensity	Velocity X	Velocity Y	Total Lifetime
	5min	-1%	0%	0%	0%	0%		5min	-1.40%	0%	0%	0%	-1%		5min	-44%	-11%	5%	-3%	0%
	15min	0%	0%	0%	0%	0%		60min	2.50%	0%	0%	0%	0%		120min	-20%	11%	-5%	-6%	6%
	30min	0%	0%	0%	0%	0%		180min	-1%	0%	0%	-1%	0%		360min	-28%	0%	-24%	6%	6%

Formatted: Superscript

Formatted: Font: (Default) Times New Roman, 10 pt, Bold

Formatted: Font: (Default) Times New Roman, 10 pt, Bold

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt


Formatted: Caption, Left, Indent: First line: 0 cm, Line spacing: single

619 **Figure 10** shows the improvement that the 4-NN introduces to the nowcast when compared to the
 620 Lagrangian persistence (either target- or storm-based) and are averaged per lead time for each of the three group of storms
 621 and the respective times of nowcast. Since the Lagrangian Persistence doesn't issue a Total Lifetime nowcast, only the
 622 four target variables (Area, Intensity and Velocity components) are considered. The green area indicates the percent of
 623 improvement from the application of the 4-NN approach, and the red area indicates the percent of deterioration from the
 624 4-NN application (Lagrangian persistence is better). Additionally, median improvements (+) or deterioration (-) over all
 625 lead times of the storm-based compared to target-based 4-NN approach in respect to the Lagrangian Persistence are
 626 illustrated in Table 5-c.
 627 For the 30min storms, the 4-NN approach (both target- and storm-based) are considerably better than the Lagrangian
 628 persistence: improvement is higher than 50% from the LT+15min and up to 100% from LT+60min. The improvement
 629 is greater for nowcast at the 1st min at 3rd timestep of storm existence (when the persistence predictors are considered).
 630 It is clear than due to the autocorrelation, the Lagrangian persistence is more reliable for the short lead times and for
 631 earlier times of nowcast times. However, after 15 min lead times LT+15min-a and for times of nowcast
 632 times near to the dissipation of the storms, where the non-linear relationships govern, and hence the improvements from
 633 the nearest neighbour are more significant. The target-based 4-NN results in slightly higher improvements than the storm-
 634 based one only for lead time up to 30min, with storm-based improvements being 10-40% less than the target-based. Ppast
 635 these this lead time the improvements are for both 100% from both versions are converging.

Formatted: Indent: First line: 1.25 cm

Formatted: Indent: First line: 0 cm

Formatted: Superscript

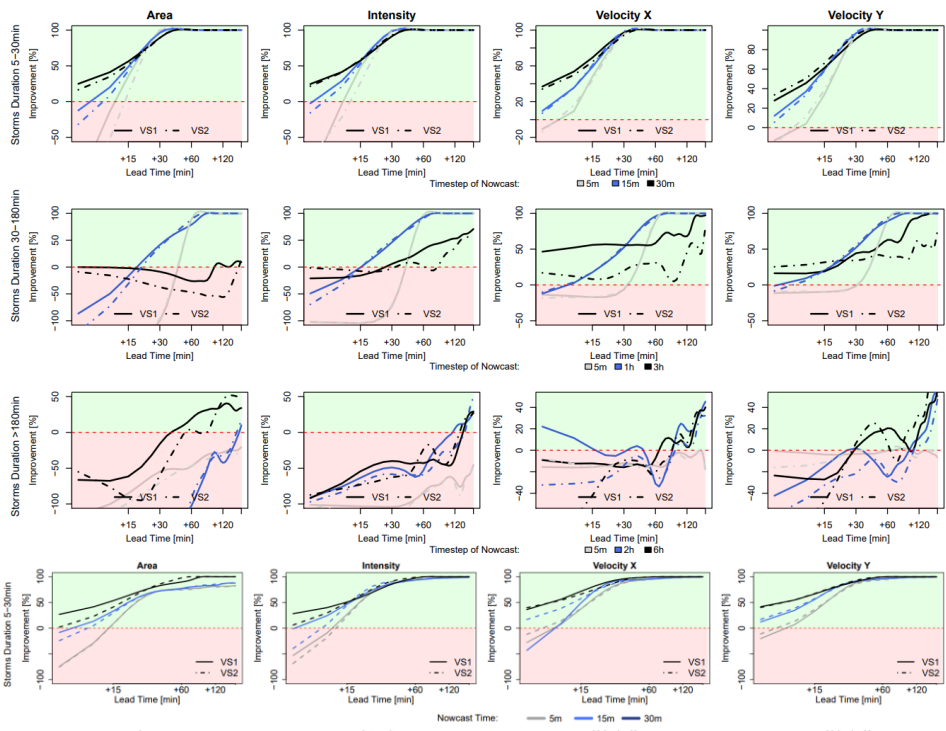

636 For the storms that live between 30 min to 3 hours, the improvements are introduced first after LT+15 or +30 min
 637 depending on the time of nowcast time: with increasing time of nowcast time increases the improvement


as well. The only exception is for the nowcast of Area and Intensity on the 36th timestep 3rd hour of the storm existence, where no clear improvement of the 4-NN approaches could be seen before LT+30min or LT+12h. This low improvement for the nowcast issued time of at the 36th timestep of storms life 3 hours was expected following the poor performance of the 4-NN shown in Figure 9. It seems like the Lagrangian persistence is particularly good for predicting the Area and Intensity at very short lead times (up to LT+20min). Here, for nowcast times of 5min, the Lagrangian Persistence is 100% better than any of the 4-NN approaches. But not the same is true for the Velocity Components, with the Lagrangian Persistence exhibiting very low advantages against the 4-NN for the short lead times. Regarding the difference of the two 4-NN approaches, with few exceptions, the storm-based nowcast introduces exhibits 5-40% less similar improvements than as the target-based. Another exception is the nowcast at the 36th time step time of 3 hours, where the storm-based

Formatted: Superscript

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

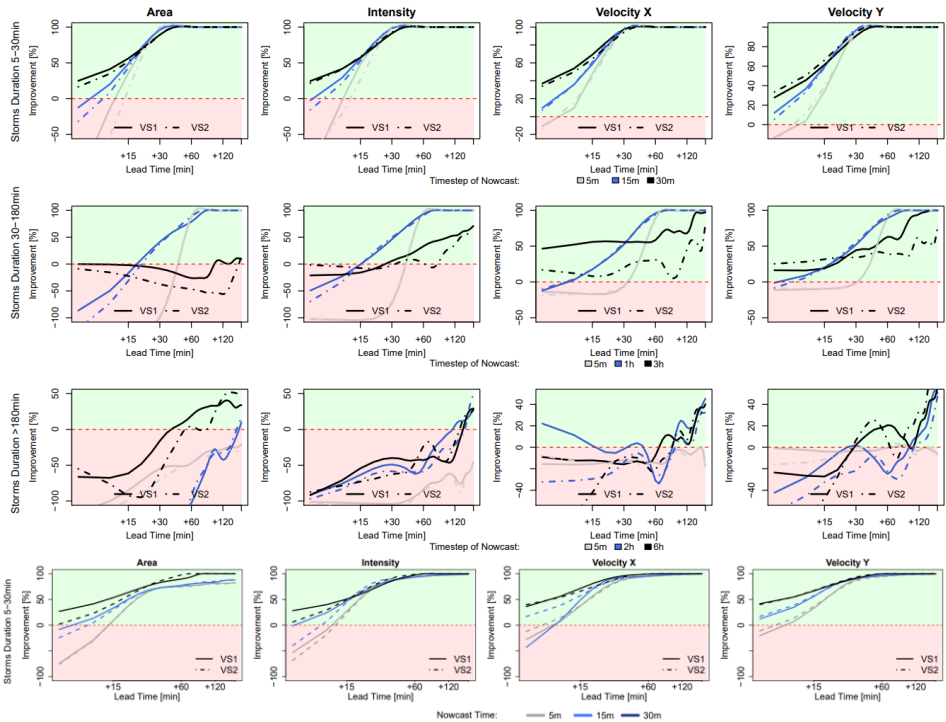

improvements are clearly lower, especially for the higher lead times, than the target-based (up to 40%). (up to 100% or more).

For storms living longer than 3 hours, the improvements are present for lead times higher than 2 hours. Since the features of the long storms (mostly of stratiform nature) are persistent in time, it is understandable for the Lagrangian Persistence to deliver better nowcast up to LT+2h. Past this lead time non-linear transformations should be considered. Here, even though the storm database is small, the non-linear predictions based on the 4-NN capture better these transformations than the persistence. The improvement introduced by the storm-based are generally from 20-40% lower than the improvements introduced from the target based.

Formatted: Not Highlight

Formatted: Indent: First line: 0 cm

656 To conclude, the 4-NN ~~single-deterministic~~ nowcast brings up to 100% improvements for lead times higher than
657 the predictability limit of the Lagrangian persistence and are dependent mainly on the storm type and the size of database.
658 Overall, for all ~~of the~~ storms the improvement is mainly at the high lead times and later times of nowcast, as the ~~4k~~-NN
659 is capturing particularly well the ~~death-dissipation~~ of the storms. The results from the long events are suffering the most
660 from the small size of the database. ~~_-~~This was anticipated, as the events were mainly selected from convective ~~and~~
661 ~~mesoscale-convective-event~~events that have the potential to cause urban floods. A bigger database, with more stratiform
662 events included, ~~will-can~~ introduce a higher improvement to the Lagrangian persistence. These improvements are
663 expected to be higher for lead times longer than 2 hours, but is yet to be seen if a larger database can as well behave better
664 than the persistence even for lead times shorter than the predictability limit. Regarding the two different 4-NN approaches,
665 the storm-based performs ~~around-200-40%~~ worse than the target-based nowcast, introducing generally 40% lower
666 improvements to the Lagrangian persistence. ~~These values are valid mostly for the first 4 target variables and not for the~~
667 ~~Total Lifetime. Regarding the Total Lifetime, both of these approaches deliver more or less same results, indicating that~~
668 ~~similar storms have similar life times.~~ The main differences between these two approaches lie between the growth/decay
669 processes, which the target-based 4-NN can capture better. ~~Also, these differences are particularly larger for the Velocity~~
670 ~~Components and for the Total Lifetime, than in the Area and Intensity as target variables. Furthermore, it seems that the~~
671 ~~storm-based 4-NN is more susceptible to the size of the database than the target-based one.~~ Nevertheless, ~~there are some~~
672 ~~cases where the storm-based behaves better than the target-based nowcast (as illustrated with green in Table 5 -a) even~~
673 ~~though theit has to be mentioned that the~~ target-based approach ~~is profitingshould be profiting~~ more from the selected
674 predictors and their respective weights. A ~~more-better suitable-optimized~~ K_{min} ~~for each lead time and nowcast~~
675 ~~timepredictor set and weights~~, may actually improve ~~further on~~ the results of ~~both the storm-based 4-NN versions~~
676 ~~considerably, and give the advantages mainly to target-based nowcast.~~

677 **4.4 Results of the ensemble 30-NN nowcast**

678 **▲** ~~Figure 11 illustrates the minimum error achieved from the best ensemble member of 30 most similar~~
679 ~~storms for the “to-be-nowcasted” storm.~~The median CRPS over all the events for the probabilistic 30NNs (in solid lines)
680 together with the median MAE for the deterministic 4-NN (in dashed lines), are illustrated respectively for storm-based
681 approach in **Figure 11** and for target-based approach approaches in **Figure 12**. The results are shown as in the previous
682 Figures per each lead time and target variable, for storms divided into 3 groups according to their duration and averaged
683 depending on the time of nowcast. ~~Additionally, the median improvements (+) or deterioration (-) of storm-based CRPS~~
684 ~~values in comparison with the target-based are given in Table 5-b.~~ For the 30min long storms, the errors of the ~~best~~
685 ~~ensembleprobabilistic nowcast~~ are typically lower than the single 4-NN nowcast for all the variables, lead times and ~~time~~
686 ~~of nowcastsnowcast times~~, independent of the 30NNs approach (either storm- or target-based). ~~In contrast to the~~
687 ~~deterministic 4-NN, the probabilistic 30NNs performance is very little dependent on the nowcast time (mainly for Area,~~
688 ~~Intensity and Total Lifetime).~~ The storm-based 30NNs has up to 50% higher errors than the target-based, but on the other
689 side can have up to 40% lower errors than the target-based for nowcast times of 30min. ~~Here only the nowcasts issued at~~
690 ~~the 1st timestep of storm existence have errors slightly higher than zero for short lead times (up to LT+15min), apart from~~
691 ~~that, regardless of the 30-NN approach, all errors are zero.~~This suggests ~~once again~~ that storms in this duration behave
692 similarly and their ~~response dissipation~~ can be predicted adequately by ~~the storm-based approach with more than 4~~ similar
693 neighbours.
694

Formatted: Font: Bold

Formatted: Subscript

Formatted: Font: Bold, Italic

Formatted: Font: (Default) Liberation Serif, 12 pt

Formatted: Normal, Line spacing: single

Formatted: Font: Not Bold

Formatted: Font: Not Bold

Formatted: Font: Not Bold

Formatted: Font: Not Bold

Formatted: Font: Bold

Formatted: Font: Not Bold

Formatted: Font: Not Bold

Formatted: Font: Not Bold

Formatted: Font: Bold


For storms that live shorter than 3 hours, the error of the best ensemble member is decreasing with increasing lead time and timestep of nowcast. same performance is as well exhibited: the probabilistic 30NNs has lower errors than the deterministic 4-NN. The difference between the target- and storm-based nowcasts is within the range of the single 4-NN nowcast for the first 4 target variables, with storm-based ensemble-30NNs having 10%-30% higher errors in the first 30 min of the nowcast than the target-based. For the Intensity and the Total Lifetime, both of the ensembles-30NNs exhibit very similar errors for most of the nowcast times. It is worth mentioning here, that for the nowcast at the 36th time step, hour of storms' existence the errors are much lower than the single 4-NN nowcast. This proves that the most similar storms is are within the 30 members, but not within the first 4 neighbours selected in the case of the single 4-NN nowcast.

Due to the unrepresentativeness in the database, the errors of the longer storms are considerably higher than the other storm groups, and the errors of the first 4 target variables are increasing with the lead time and decreasing with the nowcast time, as in the case of the deterministic 4-NN nowcasts. These results correspond to the ones from the single 4-NN nowcast. However here unlike the other storm groups, the differences between the storm-based and target-based

Formatted: Indent: First line: 0 cm


Formatted: Superscript


Formatted: Highlight

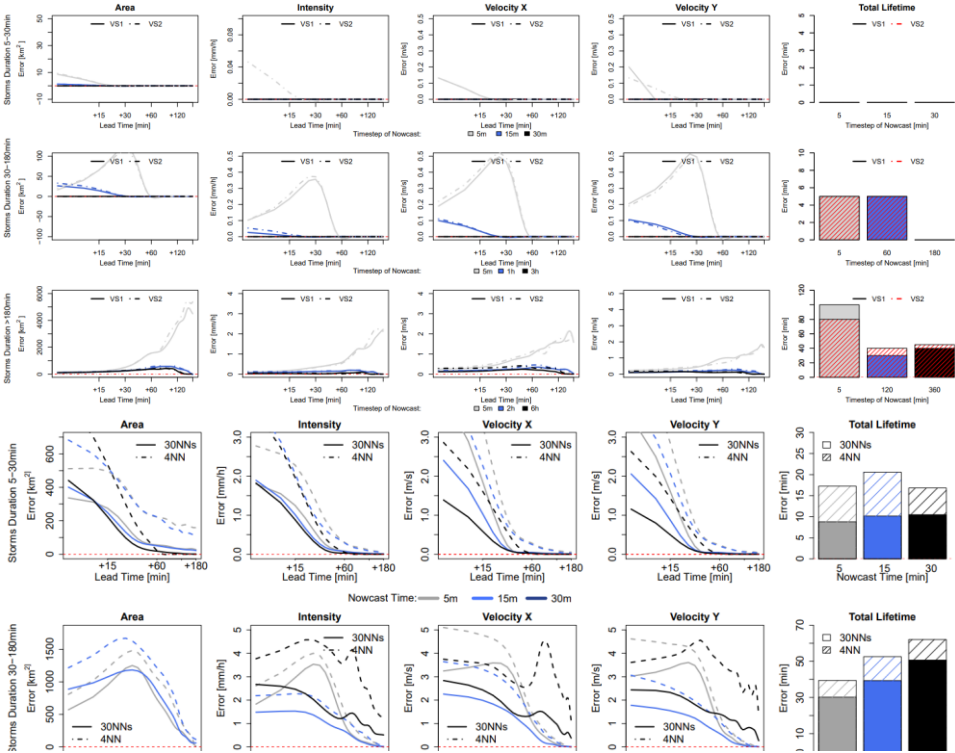

approach are visible past 30 min lead time, with the storm-based errors being up to 15-35% higher than the target-based. As the best ensemble is between the 30 most similar storms (with zero errors for shorter lead times), then the given predictors set is failing to capture the most similar storms within the 4 closest storms (or the rank average of the 4 closest storms is not the best solution possible). This is understandable as the predictor's weights and the training of the k-NN was focused mainly on shorter storms.

Overall the ensemble results are clearly better than the single 4-NN nowcast, suggesting that the best responses are obtained by singular neighbours (either the closest one or within the 30 neighbours) and not by averaging. Thus, there is still room for improving the single 4-NN nowcast by selecting better the important predictors and their weights or averaging differently the nearest neighbours. Nevertheless, the results from **Figure 44-11** and **Figure 12** emphasize that similar storms do behave similarly, as the error is almost zero, and that the developed k-NN on the given database with 30 ensembles gives satisfactory results. Compared to the deterministic 4NNs it has the advantage that no k-optimization is needed, and the two approaches (storm- and target-based) have less discrepancies with one another.

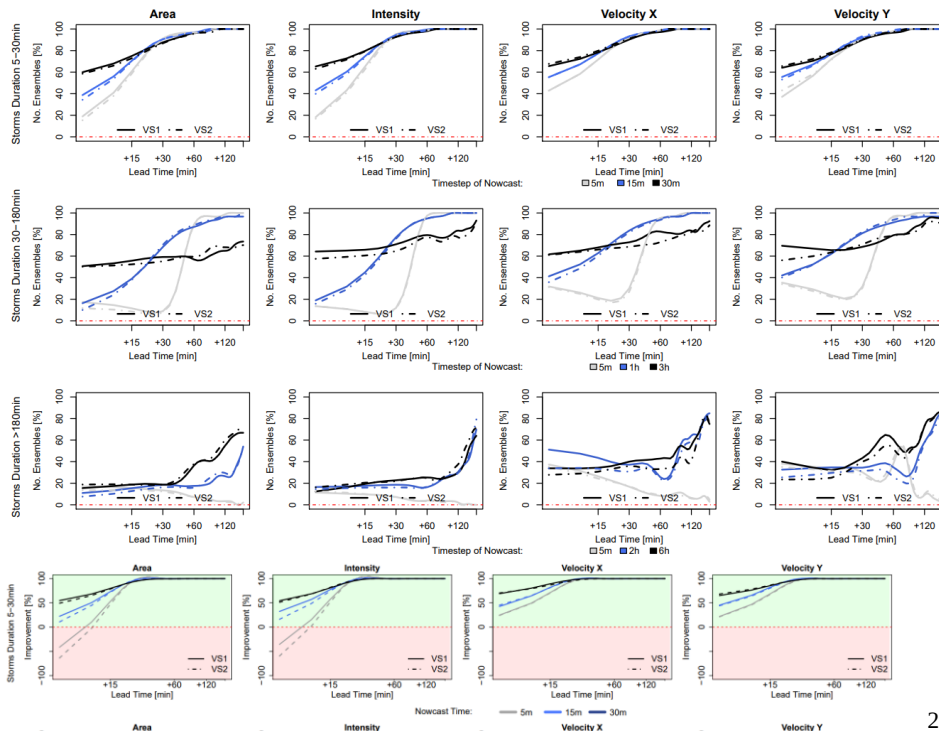


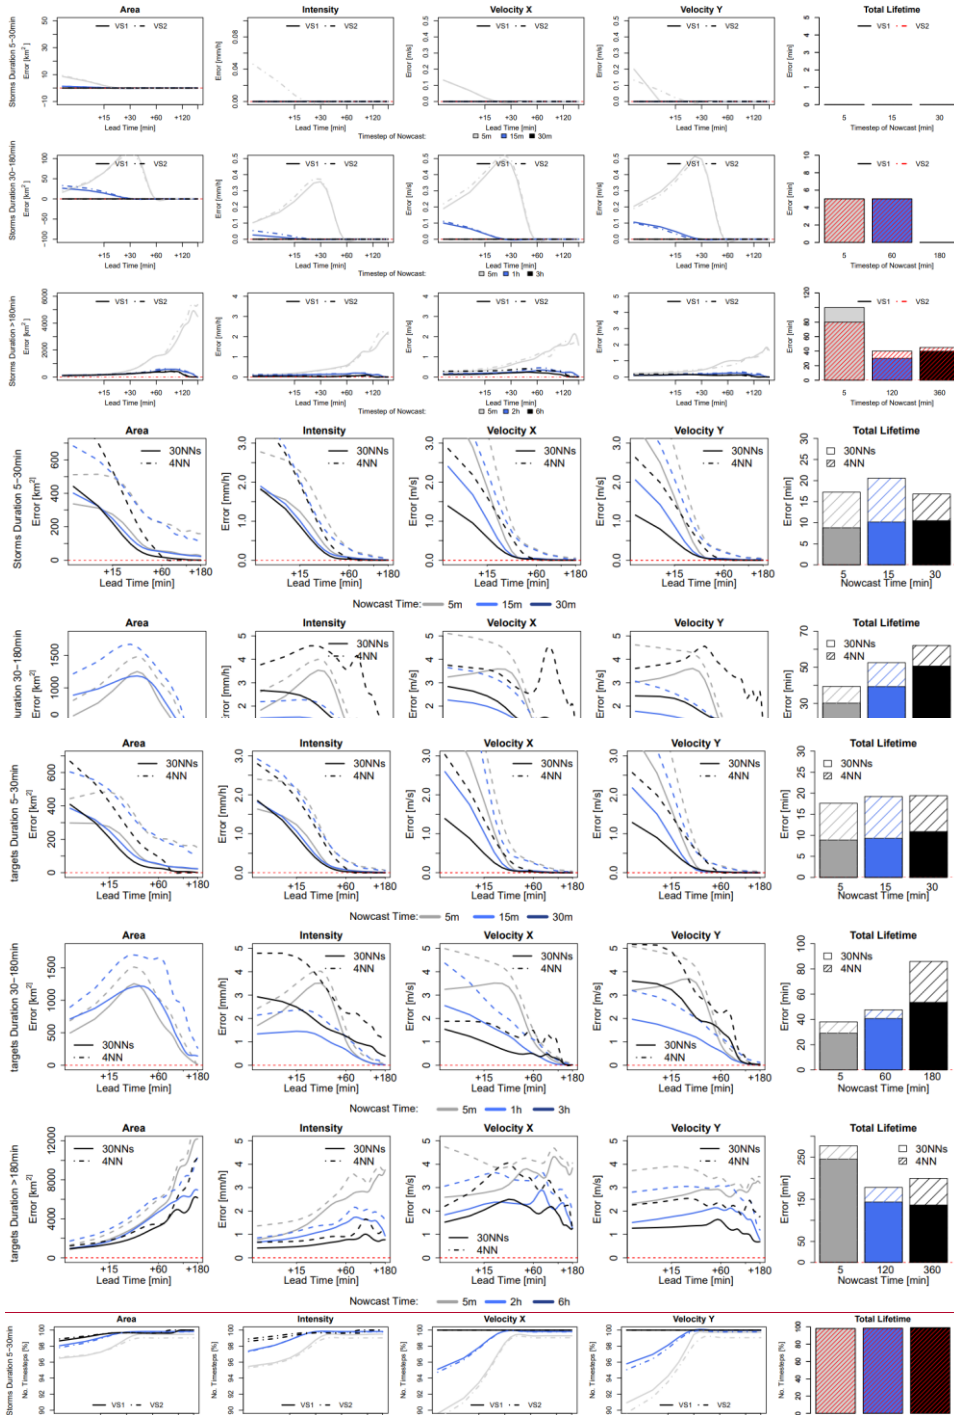


Formatted: Line spacing: Multiple 1.15 li

Formatted: Line spacing: single

Formatted: Line spacing: single

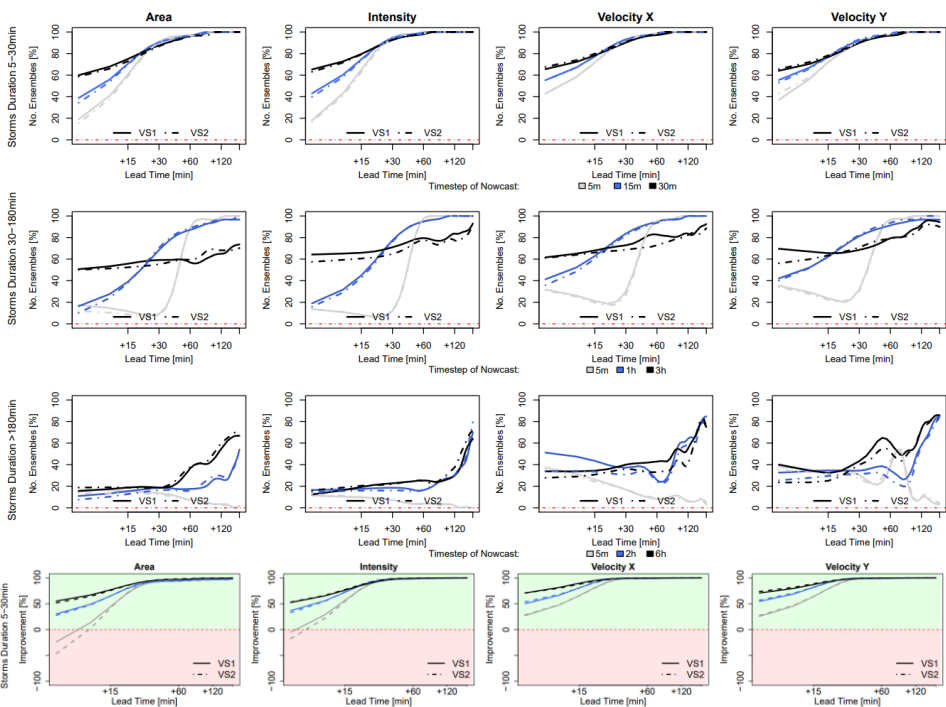

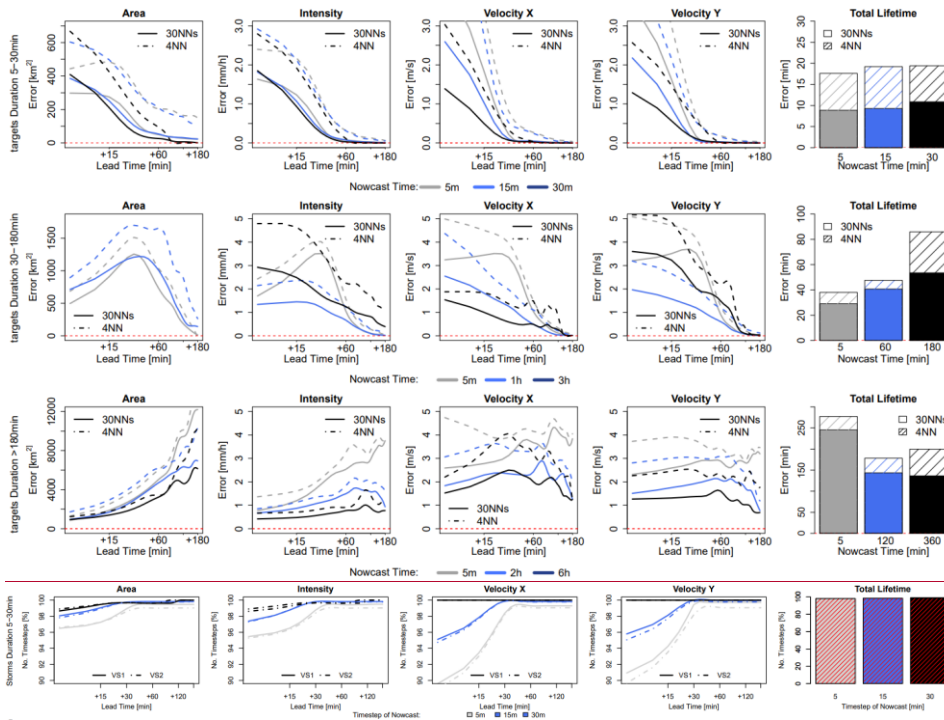

To investigate the use of the ensemble spread in the nowcast, in Figure 12, the percent of time steps, where the observed values fell within the ensemble range, is calculated for each storm duration group, nowcast time and lead time. For the short storms (duration < 30 min), almost at 100% of the time steps, the observed target values fall within the ranges of the ensemble 30-NN. This value decreases slightly for storms with duration up to 3 hours, but still is higher than 80%. However, for the long storms (longer than 3 hours), the range of the ensembles captures the observed value better for shorter lead times and for longer times of nowcast. For longer lead times and early times of nowcast, more than 50% of the time steps are representing adequately the observed target variables. While the ensemble range is satisfactory for the short storms, improvements should be done, either by increasing the database of stratiform events or selecting different predictors, in order for the ensemble range to represent the observed target variables adequately. There is hardly any difference between the storm-based and the target-based nowcast: for short storms (duration shorter than 3 hours) independent of the time of nowcast and variables, at the storm-based the number of time steps are less than 1% fewer than the ones from the target-based, and for longer storms less than 5%. This suggests that the suitability of the ensemble range does not depend on the k-NN approach but mostly on the past storms available.

Figure 13 demonstrates the number of ensembles that yielded a better nowcast than improvement of the probabilistic 30NNs when compared to the Lagrangian persistence (better ensembles)-storm-based in dashed line, and target-based in solid line. This percent of ensembles as before the median improvement over the events is computed and shown for each storm duration group, time of nowcast, nowcast time, and lead time and target variables (except for the Total Lifetime). For all the three groups it is visible that the number of better ensembles performance increases considerably with the lead time – suggesting that the ensemble predictions are particularly useful for the longer lead times where the single nowcast is not able to capture the storm evolution. For short storms (duration shorter than 30min) the number of ensembles is low

Formatted: Highlight

Formatted: Indent: First line: 0 cm

for lead-times up to 30 min and in this range the ensembles are worse for the early times of nowcasts. Lagrangian persistence is only better for the Area and Intensity at 5min nowcast time and for very short lead times (up to 10min). However, past this lead time, the number of better ensembles is more than 80 % (24 ensembles) the probabilistic 30NNs has the clear advantage with improvements up to 100%. Past LT+30min, with no clear difference between different times of nowcast. This coincides with the predictability limit of the Lagrangian persistence at such scales, there is no difference between the nowcast time and 30NNs approach. Thus, it makes sense that the ensemble nowcasts behave better after the predictability limit of the persistence is reached. Moreover, for these storms the difference between the two types of 30-NN is insignificant (less than 1% for all target variables and nowcast times of nowcasts). For storms that live shorter than 3 hours, the results are slightly worse than the very short storms, but still exhibit the same patterns. Here as well the number of better ensembles increases drastically main improvements of the 30NNs probabilistic approach is seen for all the target variables between LT+15min to LT+30min for all the target variables. Interesting in this storm group are the results from the nowcast time at the of 3 hour hours that of storm existence that exhibit different behaviours than the other deterministic nowcast times approach. This is expected as the Lagrangian persistence performs particularly poorly because it cannot model the storms deaths dissipations. Here as well the difference between the two types of 30-NN is insignificant, although a bit higher than for the very short storms (~2.5% difference). For the longer storms the percent of better ensembles is increasing with the time of nowcast and are increasing benefit of the probabilistic 30NNs is seen mainly for LT+45min to LT+1260min, but still not as high as in the other storm groups. The worse performance is at nowcast time of 5min, s at the 1st time step of the storm where the percent of better ensembles is quite low the 30NNs fails to bring any advantage to the prediction of Area and Intensity when compared to the Lagrangian Persistence. (between 1 and 0 ensembles) for the LT+180min for all of the target variables. What is interesting from these storms, is that the the percent improvement of better ensembles is higher is more significant at the Velocity components than in the Area and Intensity predictions. This suggest the velocity components are more persistent (see Figure 43) and easier to be predicted from similar storms. Still it is worth mentioning that the percent of better ensembles is almost never zero. Even with a small database for the long storms, the 30-NN can recognize 1-5 similar past storms that can give useful information in improving the nowcast when compared to the Lagrangian persistence.

As a conclusion the probabilistic nowcasts are better than the Lagrangian Persistence mainly for convective storms that last shorter than 3 hours and lead times higher than LT+15min. Of course, there is still room for improving the 30NNs application by increasing the size of the past database. Overall, it seems that the velocity components can be captured much better by the 30NNs application than the Lagrangian Persistence, while the Lagrangian Persistence is more suitable for long persistent storms and for nowcast times of 5min where not enough information is available to select similar storms. An increase in the database, with more stratiform storms, may improve the performance of the 30NNs and its advantage towards the Lagrangian Persistence. However, the value of the probabilistic 30NNs relies mainly in the nowcasting of convective events. Moreover, the possibility of merging Lagrangian Persistence with a probabilistic 30NNs approach should be explored and further investigated; the Lagrangian Persistence should be implemented for very short lead times (up to 30min) and for the first nowcast times where the predictors are not enough to select similar past storms.

Improving the nowcasting of storm characteristics is the first step in improving rainfall nowcasting at fine temporal and spatial scales. On a second step, the knowledge about the storm characteristics (as nowcasted by the 30NNs) should be implemented on the spatial structure of the storms to estimate rainfall intensities at fine scales (1km² and 5min). There are two options to deal with the spatial distribution of the rainfall intensities inside the storm region (which is so far no treated in this study): 1. Increase/Reduce the area by the given nowcasted area (as target variable) for each lead

Formatted: Not Highlight

Formatted: Superscript

Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Auto

Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Auto

Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Auto

time, scale the average intensity with the nowcasted intensity, and move the position of the storm in the future with the nowcasted velocity in x and y direction. 2. Take the spatial information of the selected neighbours, perform an optimisation in space (such that present storm and the neighbour's storms locations match) and assign this spatial information to the present storm for each lead time. The former is an extension of the target-based 30NNs, while the latter an extension of the storm-based 30NNs. So far, the comparison between these two versions, showed that the target-based approach is better suited mainly to nowcast the velocity components, thus a merging of the two could also be reasonable: the storm-based approach is used for nowcasting Area-Intensity-Total Lifetime (features that are co-dependent based on the life cycle characteristics of convective storms), and the target-based approach for the nowcasting of the velocity components. The suitability of the proposed combinations and the merging of the 30NNs with the Lagrangian persistence for nowcasting rainfall intensities at fine scales, is currently under investigation and will be discussed in a follow up paper.

4.5 Nowcasting the unmatched storms

For the optimization and testing of the k-NN approaches, the unmatched storms from the tracking algorithm were left outside of the database. Nevertheless, in an online application (operational nowcast), when the storm is recognized for the first time, one can not predict if the storm is an artefact, or it will not be matched by the tracking algorithm. Therefore, it is important to investigate how the developed k-NN deals with these unmatched storms. Figure 14 illustrates the median performance over the 110 events of the developed target-based (upper row) and storm-based (lower row) k-NN when predicting the target variables of the unmatched storms from a past database of only matched storms (storms with duration equal or longer than 10min). As in the previous results, the 30NNs probabilistic application yields better errors than the deterministic one, causing an overestimation of these storms for the first 10-20min for the target-based approach and 15-30min for the storm-based one. A direct comparison of these errors with the Lagrangian Persistence is shown in Figure 15, with the deterministic 4-NN in the upper row and the probabilistic 30NNs in the lower row. As expected the probabilistic 30NNs brings the most improvement when compared to the Lagrangian Persistence for all lead times and target variables. Thus, even though, most of these unmatched storms will be overestimated in their duration, the 30NNs will capture their dissipation much better than either the deterministic 4-NN or the Lagrangian Persistence.

Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Auto

Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Auto

Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Auto

Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Auto

Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Auto

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Font: 11 pt

Formatted Table

Formatted: Centered, Numbered + Level: 1 + Numbering Style: a, b, c, ... + Start at: 1 + Alignment: Left + Aligned at: 0.63 cm + Indent at: 1.27 cm

Formatted: Centered, Numbered + Level: 1 + Numbering Style: a, b, c, ... + Start at: 1 + Alignment: Left + Aligned at: 0.63 cm + Indent at: 1.27 cm, Keep with next

Formatted: Font: (Default) Times New Roman, 10 pt, Bold

Formatted: Caption, Left, Indent: First line: 0 cm

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt


Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt


Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

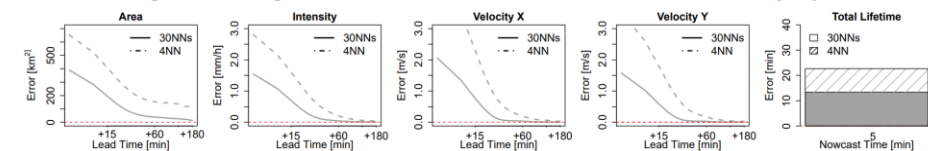

a) Target-based k-NN application

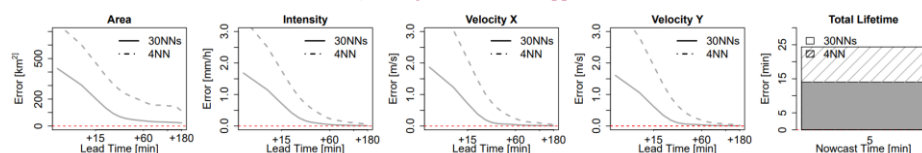

b) Storm-based k-NN application

Figure 15. Median CRPS error over the 110 events for each of the target variables nowcasted from 4-NN deterministic (in dashed lines) and 30NNs probabilistic (in solid lines) applications, for both target- (upper row) and storm-based (lower row) approaches. The results shown here are from the "unmatched storms" when the nowcast time is 5 min.

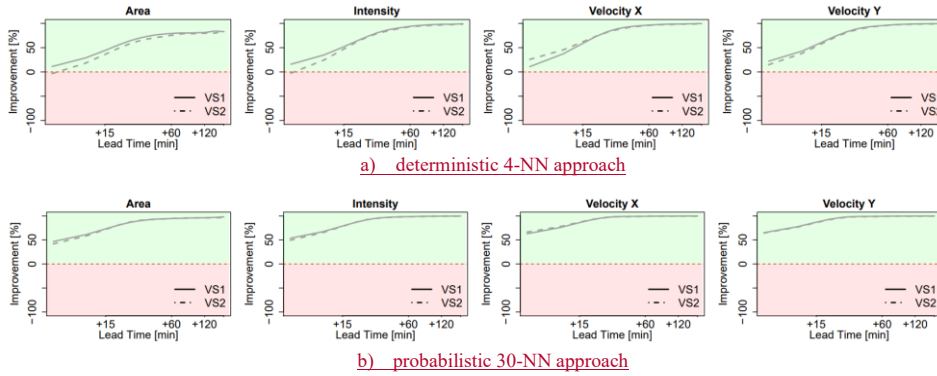


Figure 15. Median performance improvement over the 110 events for each of the target variables nowcasted from 4-NN deterministic (upper row) and 30NNs probabilistic (lower row) applications when compared to the Lagrangian Persistence, for both target- (upper row) and storm-based (lower row) approaches. The results shown here are from the “unmatched storms” when nowcast time is 5min.

55. Conclusions

Accurate predictions of rainfall storms at fine temporal and spatial scales (5min, 1km²) based on radar data are quite challenging to achieve. The errors associated with the radar measurements, identification and tracking of the storms, and more importantly the extrapolation of the storms in the future based on the Lagrangian persistence, are limiting the forecast horizons of such radar based nowcasts to 30-45 min for convective storms and to 1 hour for stratiform events. The focus of this paper was the improvement of the storm-oriented radar based nowcasts by considering other non-linear behaviours for future extrapolation instead of the Lagrangian persistence. For this purpose, a nearest neighbour approach was proposed that predicts future behaviours based on past observed behaviours of similar storms. The method was developed and validated for the Hannover Radar Range where storms from 110 events were pooled together and used in a “leave-one-event-out” cross-validation. From 110 events a total of around 5200 storms with different morphology were identified and tracked with HyRaTrac in order to build up the database for the k-NN implementation. The storms were treated as ellipses and for each state of the storms’ evolution different features (describing both present and past states) were computed. The k-NN approach was developed on these features to predict the behaviour of the storms in the future (for lead times up to 3 hours) through 5 target variables (Area, Intensity, Velocity in X and Y direction and Total Lifetime).

First an importance analysis was performed in order to recognize the most important predictors for each of the target variable. Two different approaches were employed for this purpose: Pearson correlation, and Partial Information Correlation (PIC). A comparison of these two methods revealed that for the application at hand the Pearson Correlation is more reliable at determining important predictors, and delivers 5%-30% better results than the PIC method. However, the PIC seems promising mainly for determining the most important predictors of the Area and Total Lifetime for storms longer than 3 hours, and is still recommended to investigate for further works for investigation in the future. The Area, Intensity and Total Lifetime of the storms seem to be co-dependent on one another and on the features that describe their evolution. In particular the variance of the spatial intensity is an important predictor for the three of them. On the other hand, the velocity components are dependent as well more on features that describe their evolution. Nevertheless, there

Formatted: Centered, Numbered + Level: 1 + Numbering Style: a, b, c, ... + Start at: 1 + Alignment: Left + Aligned at: 0.63 cm + Indent at: 1.27 cm

Formatted Table

Formatted: Centered, Numbered + Level: 1 + Numbering Style: a, b, c, ... + Start at: 1 + Alignment: Left + Aligned at: 0.63 cm + Indent at: 1.27 cm, Keep with next

Formatted: Font: (Default) Times New Roman, 10 pt, Bold

Formatted: Caption, Left, Indent: First line: 0 cm

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Superscript

is still a dependency of the area and velocity components, and should be included when predicting each other mainly for high lead times.

The weights derived from the Pearson correlation were used for the similarity estimation of different storms based on the Euclidian distance. Two k-NN approaches were developed on two measurements of similarity: a) target-based approach – similarity was computed for each target independently and indicates the best performance possible by the given predictors and weights, and b) storm-based approach – similarity was computed for each storm keeping the relationship between the target variables. For the two approaches a single-deterministic (averaging the 4 closest neighbours) and a ensemble-probabilistic (with 30 nearest neighbours) nowcast were issued for all of the storms in “leave-one-event-out” cross-validation mode. In the single-deterministic nowcast the difference between the two lied-remains mainly at short lead times (up to 30 min) and at the Velocity Components, with the eventstorm-based results yielding 40-30 up to 40% higher errors than the target-based ones. Exception was the Total Lifetime where the storm-based prediction was almost the same as the target-based approach. However, at higher lead times the difference between the two became insignificant, as the death-dissipation proeesseprocessess were captured well for the majority of the storms. The same behaviours were observed as well in the ensemble nowcast, with target-based ensembles being slightly better than the storm-based nowcast. Overall the storm-based approach seems reasonable for Area-Intensity and Total Lifetime, as they are co-dependent and their relationship should be maintained for each storm, while target-based approach captures better the velocity components. A combination of the both approaches, may results in better nowcasting of storms' characteristics.

To investigate what value each of the two k-NN approaches introduces to the nowcast, their errors (for both single-deterministic and ensemble-probabilistic nowcast) were compared to the errors produced by the Lagrangian persistence. For both of the approaches the improvement was up to 100% more than 50% for convective storms for lead times higher than 15 min, and up to 50% for mesoscale storms for lead times higher than 2 hours. The results were particularly good for the small convective storms due to the high number of storms available in the database. For the mesoscale storms (with duration longer than 3 hours) the improvements were not satisfactory due to the small sample size of such long storms. An increment in Increasing the sample size is expected to improve the performance of the k-NN for these storms as well. However, when consulting the ensemble-probabilistic k-NN application it seems that, even for these storms and the given database, there are at least 5-10 ensemble enough similar members in the 30 neighbours that are better than the Lagrangian persistence. This emphasizes that the probabilistic nowcast is less affected by the sample size than the deterministic 4-NN. Moreover, the differences between the storm-based and target-based approaches, become smaller in the probabilistic approach than the deterministic ones. Lastly, the optimization of the adequate neighbours for the deterministic approach is far more complex than implemented here, but when issuing the probabilistic nowcast there is no need to optimize the k – number. It is clear that the probabilistic application of the k-NN outperforms the deterministic ones, and has more potential for future works. not only the importance of the ensemble nowcast in comparison to the single one, but also the importance of nearest neighbour method in its potential to improve the nowcast.

Overall the results suggest that if the database is big enough, storms that behave similarly can be recognized by their features, and their responses are useful in improving the nowcast up to 3 hours lead times. We recommend the use of the nearest neighbour in a probabilistic application (30NNs) to capture better the storm characteristics at different lead times. A merging with the Lagrangian Persistence for short lead times (up to 15min) and early nowcast times can be as well implemented. Further improvements can be achieved if the predictors importance is estimated better (i.e. Monte Carlo approach, or neural networks) or if additional predictors are included from other data sources like: cloud information from satellite data, temperature, convective available potential energy (CAPE) and convective inhibition (CIN) from Numerical Weather Prediction Models, lightening flash activity, additional measurements from Doppler or dual polarized radar data (like phase shift, doppler velocity, vertical profile at different elevation angels), various geographical

information (as distance from heavy urbanized areas, mountains or water bodies) and so on. The main benefit of the probabilistic 30NNs is mainly seen for convective events and creating new nowcasting rules based on the predicted storm characteristics. Future works include the integration of the developed 30NNs application in the object-oriented radar based nowcast to extend the rainfall predictability limit at fine spatial and temporal scales (1km² and 5min). Further improvements can be achieved if the predictors importance is estimated better (i.e. Monte Carlo approach, or neural networks) or if additional predictors are included from other data sources like satellite data, Numerical Weather Prediction Models etc. A different averaging of the neighbours, either different weights or k-neighbours, may as well improve performance and match the results of the single nowcast with the ensemble one at least for the short lead times. In conclusion, the results seem promising at the storms scale, nevertheless is still to be seen if the methodology applied here can introduce improvements as well at the local scale, i.e. validation with the measurements from the rain gauge observations.

6. Funding

This research was funded by the German Federal Ministry of Education and Research (BMBF) grant number Förderkennzeichen 03G0846B.

7. Acknowledgements

The results presented in this study are part of the research project “Real-time prediction of pluvial floods and induced water contamination in urban areas (EVUS)”, funded by the German Federal Ministry of Education and Research (Bundesministerium für Bildung und Forschung BMBF) who are gratefully acknowledged. We are also thankful for the provision and right to use the data from the German National Weather Service (Deutscher Wetterdienst DWD).

Formatted: Superscript

895
896

Formatted: Font: Bold


Formatted: Font: Bold, Italic

8. Appendix

8.1 Obtained predictors weights from the Pearson correlation importance analysis:

Duration	Area	Present Predictors																Average Past 30min Predictors															
		Cell	Life	A	avePI	medPI	maxPI	sdp1	sdp2	Vg	Vx	Vy	Jx	Jy	Jr	Phi	A	avePI	medPI	maxPI	sdp1	sdp2	Vg	Vx	Vy	Jx	Jy	Jr	Phi				
Area	Intensity	Lead Time	0.13	0.21	0.01	0.06	0.04	0.05	0.00	0.00	0.00	0.00	0.02	0.01	0.04	0.04	0.01	0.00	0.06	0.04	0.05	0.00	0.00	0.06	0.02	0.02	0.00	0.02	0.01	0.00			
		15min	0.09	0.27	0.01	0.19	0.07	0.07	0.20	0.04	0.05	0.00	0.03	0.03	0.08	0.04	0.03	0.06	0.21	0.06	0.08	0.22	0.07	0.08	0.08	0.07	0.08	0.70	0.08	0.02			
		60min	0.12	0.10	0.00	0.18	0.06	0.23	0.29	0.04	0.05	0.04	0.05	0.72	0.70	0.28	0.00	0.21	0.05	0.20	0.31	0.46	0.01	0.05	0.09	0.57	0.68	0.38	0.02	0.00			
		180min	0.09	0.13	0.00	0.16	0.06	0.04	0.25	0.18	0.03	0.01	0.05	0.63	0.57	0.34	0.00	0.75	0.20	0.02	0.23	0.38	0.57	0.14	0.00	0.09	0.61	0.55	0.18	0.02			
		<1hr	0.05	0.11	0.02	0.04	0.03	0.00	0.03	0.22	0.00	0.01	0.01	0.04	0.25	0.01	0.01	0.51	0.04	0.03	0.01	0.04	0.21	0.00	0.02	0.03	0.25	0.25	0.01	0.02			
		60min	0.13	0.14	0.02	0.13	0.08	0.09	0.14	0.27	0.07	0.02	0.02	0.12	0.26	0.02	0.03	0.39	0.15	0.10	0.30	0.34	0.17	0.07	0.02	0.05	0.12	0.25	0.08	0.02			
		180min	0.06	0.07	0.01	0.17	0.03	0.19	0.27	0.39	0.16	0.05	0.07	0.41	0.34	0.15	0.06	0.50	0.20	0.06	0.23	0.25	0.38	0.18	0.07	0.11	0.40	0.32	0.20	0.08			
		>3hr	0.09	0.18	0.07	0.12	0.05	0.10	0.15	0.48	0.05	0.03	0.03	0.50	0.49	0.09	0.02	0.68	0.14	0.05	0.11	0.17	0.48	0.07	0.04	0.06	0.51	0.49	0.12	0.02			
		Average	0.09	0.18	0.07	0.12	0.05	0.10	0.15	0.48	0.05	0.03	0.03	0.50	0.49	0.09	0.02	0.68	0.14	0.05	0.11	0.17	0.48	0.07	0.04	0.06	0.51	0.49	0.12	0.02			
		Area	Duration	Lead Time	No Cells	Life	TS	Area	meanPI	medPI	maxPI	sdp1	sdp2	GVel	VelX	VelY	Jx	Jy	Jratio	Phi	Area	meanPI	medPI	maxPI	sdp1	sdp2	Velg	Velx	Velxy	Jx	Jy	Jr	Phi
Area	Velocity X	15min	0.04	0.02	0.00	0.01	0.01	0.00	0.06	0.04	0.03	0.02	0.06	0.00	0.00	0.00	0.00	0.08	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
		60min	0.02	0.08	0.00	0.05	0.01	0.02	0.54	0.11	0.06	0.03	0.00	0.02	0.02	0.00	0.01	0.00	0.52	0.40	0.50	0.52	0.11	0.06	0.03	0.01	0.02	0.02	0.00	0.01			
		180min	0.03	0.13	0.11	0.21	0.07	0.08	0.77	0.11	0.09	0.09	0.03	0.14	0.15	0.05	0.06	0.11	0.76	0.62	0.68	0.70	0.13	0.11	0.04	0.14	0.15	0.06	0.18	0.18			
		<1hr	0.02	0.18	0.01	0.15	0.08	0.22	0.17	0.14	0.04	0.02	0.01	0.08	0.10	0.01	0.04	0.26	0.14	0.07	0.20	0.16	0.13	0.04	0.02	0.01	0.08	0.09	0.02	0.01			
		60min	0.01	0.06	0.01	0.11	0.18	0.46	0.97	0.10	0.02	0.02	0.01	0.07	0.07	0.02	0.00	0.01	0.28	0.19	0.43	0.34	0.09	0.01	0.02	0.06	0.06	0.05	0.04	0.05			
		180min	0.01	0.09	0.10	0.43	0.46	0.50	0.47	0.30	0.08	0.06	0.01	0.25	0.22	0.09	0.09	0.08	0.42	0.37	0.47	0.44	0.19	0.30	0.08	0.01	0.24	0.21	0.12	0.10			
		>3hr	0.03	0.11	0.02	0.02	0.00	0.08	0.03	0.11	0.02	0.01	0.01	0.08	0.00	0.01	0.01	0.11	0.01	0.05	0.02	0.02	0.00	0.01	0.01	0.08	0.08	0.01	0.02				
		60min	0.02	0.08	0.08	0.07	0.05	0.17	0.11	0.09	0.02	0.00	0.03	0.06	0.04	0.02	0.04	0.05	0.06	0.04	0.16	0.10	0.08	0.02	0.00	0.05	0.03	0.04	0.04				
		180min	0.01	0.05	0.30	0.10	0.18	0.10	0.06	0.31	0.03	0.02	0.10	0.38	0.35	0.11	0.05	0.04	0.07	0.15	0.05	0.02	0.30	0.05	0.16	0.06	0.33	0.15	0.05	0.05			
		Average	0.02	0.07	0.11	0.20	0.28	0.37	0.36	0.14	0.04	0.03	0.03	0.12	0.12	0.03	0.04	0.30	0.10	0.32	0.36	0.30	0.11	0.06	0.04	0.06	0.17	0.11	0.06	0.04			
Area	Velocity Y	Lead Time	0.04	0.02	0.00	0.01	0.01	0.00	0.06	0.04	0.03	0.02	0.06	0.00	0.00	0.00	0.00	0.08	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
		15min	0.03	0.03	0.02	0.03	0.04	0.02	0.02	0.04	0.03	0.37	0.06	0.03	0.03	0.01	0.03	0.11	0.04	0.04	0.02	0.03	0.04	0.33	0.02	0.09	0.15	0.04	0.00	0.03			
		60min	0.04	0.01	0.06	0.05	0.06	0.04	0.05	0.00	0.02	0.32	0.05	0.12	0.06	0.01	0.06	0.07	0.04	0.05	0.01	0.04	0.00	0.06	0.42	0.05	0.14	0.07	0.01	0.05			
		180min	0.03	0.06	0.10	0.02	0.01	0.01	0.06	0.01	0.07	0.01	0.05	0.04	0.01	0.00	0.00	0.00	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.15	0.03	0.00	0.03			
		<1hr	0.06	0.06	0.15	0.03	0.02	0.03	0.02	0.06	0.20	0.30	0.06	0.11	0.05	0.01	0.03	0.14	0.05	0.04	0.03	0.03	0.05	0.25	0.42	0.07	0.16	0.04	0.01	0.04			
		60min	0.04	0.03	0.02	0.02	0.01	0.01	0.04	0.02	0.05	0.02	0.04	0.01	0.01	0.02	0.00	0.02	0.04	0.02	0.00	0.02	0.00	0.02	0.00	0.01	0.15	0.01	0.01	0.02			
		180min	0.04	0.04	0.05	0.04	0.04	0.03	0.04	0.04	0.07	0.16	0.09	0.04	0.04	0.00	0.02	0.04	0.05	0.04	0.03	0.04	0.05	0.08	0.23	0.07	0.15	0.05	0.02	0.02			
		>3hr	0.02	0.02	0.08	0.01	0.02	0.02	0.02	0.02	0.17	0.03	0.04	0.04	0.01	0.00	0.00	0.02	0.02	0.02	0.02	0.02	0.02	0.04	0.14	0.02	0.15	0.02	0.01	0.03			
		60min	0.04	0.01	0.10	0.03	0.03	0.02	0.02	0.04	0.18	0.21	0.04	0.08	0.04	0.01	0.03	0.00	0.02	0.03	0.02	0.02	0.04	0.18	0.28	0.04	0.15	0.02	0.01	0.03			
		Average	0.04	0.03	0.12	0.03	0.03	0.02	0.02	0.04	0.18	0.21	0.04	0.08	0.04	0.01	0.03	0.00	0.02	0.03	0.02	0.02	0.04	0.18	0.28	0.04	0.15	0.02	0.01	0.03			
Area	Duration	Lead Time	No Cells	Life	TS	Area	meanPI	medPI	maxPI	sdp1	sdp2	GVel	VelX	VelY	Jx	Jy	Jratio	Phi	Area	meanPI	medPI	maxPI	sdp1	sdp2	Velg	Velx	Velxy	Jx	Jy	Jr	Phi		
		15min	0.04	0.04	0.04	0.02	0.00	0.00	0.03	0.03	0.06	0.03	0.02	0.15	0.03	0.03	0.01	0.00	0.04	0.02	0.00	0.04	0.01	0.07	0.04	0.03	0.01	0.00	0.00	0.00			
		60min	0.00	0.04	0.02	0.08	0.07	0.09	0.08	0.00	0.00	0.05	0.05	0.22	0.00	0.00	0.01	0.02	0.08	0.07	0.09	0.08	0.00	0.01	0.06	0.33	0.01	0.00	0.02	0.02			
		180min	0.01	0.06	0.00	0.02	0.01	0.01	0.06	0.01	0.04	0.27	0.07	0.01	0.01	0.01	0.00	0.06	0.02	0.01	0.01	0.06	0.01	0.05	0.05	0.44	0.00	0.01	0.00	0.00			
		<1hr	0.01	0.06	0.06	0.03	0.02	0.07	0.04	0.07	0.01	0.01	0.05	0.03	0.06	0.00	0.01	0.05	0.03	0.01	0.06	0.04	0.06	0.02	0.00	0.04	0.02	0.04	0.00	0.00			
		60min	0.01	0.06	0.02	0.04	0.03	0.04	0.06	0.01	0.01	0.06	0.18	0.02	0.05	0.01	0.01	0.04	0.04	0.03	0.04	0.06	0.01	0.00	0.07	0.26	0.01	0.04	0.01	0.01			
		180min	0.00	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.22	0.07	0.04	0.01	0.04	0.01	0.01	0.00	0.00	0.04	0.34	0.07	0.05	0.01	0.01	0.01				
		>3hr	0.01	0.07	0.03	0.00	0.01	0.03	0.01	0.03	0.01	0.04	0.00	0.01	0.01	0.02	0.02	0.02	0.00	0.01	0.02	0.00	0.02	0.01	0.01	0.03	0.00	0.00	0.01	0.03			
		60min	0.00	0.02	0.02	0.01	0.01	0.01	0.07	0.00	0.04	0.09	0.09	0.08	0.01	0.01	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
		180min	0.00	0.01	0.01	0.05	0.04	0.04	0.04	0.04	0.01	0.02	0.14	0.09	0.08	0.01	0.01	0.02	0.05	0.04	0.04	0.05	0.02	0.01	0.22	0.10	0.08	0.00	0.00	0.00			
		Average	0.01	0.05	0.03	0.03	0.02	0.06	0.03	0.05	0.01	0.03	0.15	0.04	0.04	0.01	0.01	0.03	0.03	0.02	0.05	0.03	0.05	0.01	0.04	0.22	0.05	0.04	0.01	0.01			
Area	Duration	Lead Time	No Cells	Life	TS	Area	meanPI	medPI	maxPI	sdp1	sdp2	GVel	VelX	VelY	Jx	Jy	Jratio	Phi	Area	meanPI	medPI	maxPI	sdp1	sdp2	Velg	Velx	Velxy	Jx	Jy	Jr	Phi		
Don't ch	0.06	0.14	0.11	0.02	0.04	0.00	0.22	0.03	0.00	0.19	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.02	0.03	0.01	0.21	0.03	0.01	0.19	0.25	0.01	0.14	0.01				
Don't 3hr	0.07	0.22	0.43	0.20	0.11	0.18	0.21	0.21	0.15	0.04	0.04	0.25	0.16	0.14	0.01	0.00	0.00	0.40	0.27	0.14	0.20	0.20	0.20	0.17	0.07	0.21	0.14	0.14	0.01				
Average	0.06	0.14	0.16	0.04	0.06	0.09	0.30	0.22	0.09	0.03	0.03	0.20	0.05	0.05	0.00	0.00	0.00	0.34	0.12	0.09	0.12	0.21	0.11	0.06	0.25	0.20	0.14	0.01	0.01				

8.3 The standard deviation of the Pearson Correlation Weights from a cross-sampling of the events

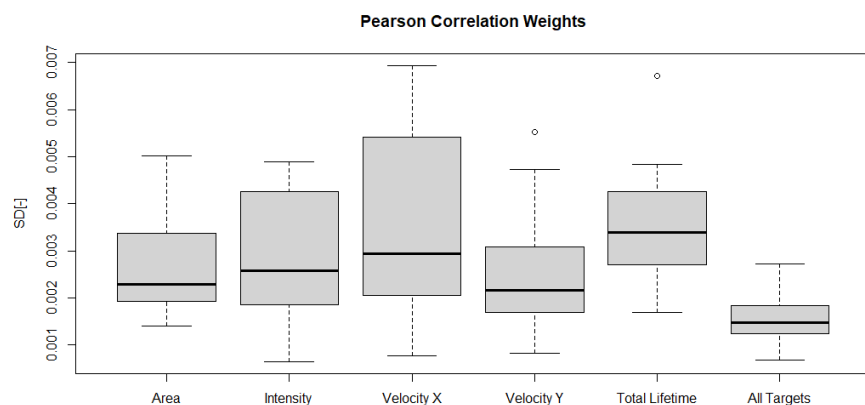

89. References

- Ayzel, G., Scheffer, T., & Heistermann, M. (2020). RainNet v1.0: A convolutional neural network for radar-based precipitation nowcasting. *Geoscientific Model Development*, 13(6). <https://doi.org/10.5194/gmd-13-2631-2020>
- Bartels, H., Weigl, E., Reich, T., Lang, P., Wagner, a., Kohler, O., Gerlach, N., & MeteoSolutions GmbH. (2004). *Projekt RADOLAN - Routineverfahren zur Online-Aneichung der Radarniederschlagsdaten mit Hilfe von automatischen Bodenniederschlagsstationen (Ombrometer)*. 111.
- Berenguer, M., Surcel, M., Zawadzki, I., Xue, M., & Kong, F. (2012). The diurnal cycle of precipitation from continental radar mosaics and numerical weather prediction models. Part II: Intercomparison among numerical models and with Nowcasting. *Monthly Weather Review*, 140(8), 2689–2705. <https://doi.org/10.1175/MWR-D-11-00181.1>
- Berndt, C., Rabiei, E., & Haberlandt, U. (2014). Geostatistical merging of rain gauge and radar data for high temporal resolutions and various station density scenarios. *Journal of Hydrology*, 508, 88–101. <https://doi.org/10.1016/j.jhydrol.2013.10.028>
- Berne, A., Delrieu, G., Creutin, J. D., & Obled, C. (2004). Temporal and spatial resolution of rainfall measurements required for urban hydrology. *Journal of Hydrology*, 299, 166–179. [https://doi.org/10.1016/S0022-1694\(04\)00363-4](https://doi.org/10.1016/S0022-1694(04)00363-4)
- Bowler, N. E., Pierce, C. E., & Seed, A. W. (2006). STEPS: A probabilistic precipitation forecasting scheme which merges an extrapolation nowcast with downscaled NWP. *Quarterly Journal of the Royal Meteorological Society*, 132, 2127–2155. <https://doi.org/10.1256/qj.04.100>
- Codo, M., & Rico-Ramirez, M. A. (2018). Ensemble radar-based rainfall forecasts for urban hydrological applications. *Geosciences (Switzerland)*, 8(8), 297. <https://doi.org/10.3390/geosciences8080297>
- Dixon, M., & Wiener, G. (1993). TITAN: thunderstorm identification, tracking, analysis, and nowcasting - a radar-based methodology. *Journal of Atmospheric & Oceanic Technology*, 10(6), 785–797. [https://doi.org/10.1175/1520-0426\(1993\)010<0785:TTITAA>2.0.CO;2](https://doi.org/10.1175/1520-0426(1993)010<0785:TTITAA>2.0.CO;2)
- Foresti, L., Reyniers, M., Seed, A., & Delobbe, L. (2016). Development and verification of a real-time stochastic precipitation nowcasting system for urban hydrology in Belgium. *Hydrology and Earth System Sciences*, 20(1), 505–527. <https://doi.org/10.5194/hess-20-505-2016>

Formatted: Indent: First line: 0 cm

Formatted: German (Germany)

Formatted: German (Germany)

Formatted: German (Germany)

Formatted: German (Germany)

Formatted: Spanish (Ecuador)

Galeati, G. (1990). A comparison of parametric and non-parametric methods for runoff forecasting. *Hydrological Sciences Journal*, 35(1), 79–94. <https://doi.org/10.1080/02626669009492406>

Germann, U., & Zawadzki, I. (2004). Scale Dependence of the Predictability of Precipitation from Continental Radar Images. Part II: Probability Forecasts. *Journal of Applied Meteorology*, 43(1), 74–89. [https://doi.org/10.1175/1520-0450\(2004\)043<0074:SDOTPO>2.0.CO;2](https://doi.org/10.1175/1520-0450(2004)043<0074:SDOTPO>2.0.CO;2)

Germann, U., Zawadzki, I., & Turner, B. (2006). Predictability of precipitation from continental radar images. Part IV: Limits to prediction. *Journal of the Atmospheric Sciences*, 63(8), 2092–2108. <https://doi.org/10.1175/JAS3735.1>

Gneiting, T., Katzfuss, M. (2014). Probabilistic Forecasting. *Annual Review of Statistics and Its Application*, 1 (1), 125–151.

Golding, B. W. (2009). Long lead time flood warnings: Reality or fantasy? *Meteorological Applications*, 16(1), 3–12. <https://doi.org/10.1002/met.123>

Goudenhoofd, E., & Delobbe, L. (2013). Statistical characteristics of convective storms in belgium derived from volumetric weather radar observations. *Journal of Applied Meteorology and Climatology*. <https://doi.org/10.1175/JAMC-D-12-079.1>

Grecu, M., & Krajewski, W. F. (2000). A large-sample investigation of statistical procedures for radar based short-term quantitative precipitation forecasting. *Journal of Hydrology*, 239(1–4), 69–84. [https://doi.org/10.1016/S0022-1694\(00\)00360-7](https://doi.org/10.1016/S0022-1694(00)00360-7)

Grünwald, U. (2009). Gutachten zu Entstehung und Verlauf des extremen Niederschlag-Abfluss-Ereignisses am 26.07.2008 im Stadtgebiet von Dortmund.

Haberlandt, U. (2015). Stochastic simulation of daily lows for reservoir planning considering climate change . *Hydrologie Und Wasserbewirtschaftung*, 59(5), 247–254. <https://doi.org/10.5675/HyWa-2015,5-5>

Han, L., Fu, S., Zhao, L., Zheng, Y., Wang, H., & Lin, Y. (2009). 3D convective storm identification, tracking, and forecasting - An enhanced TITAN algorithm. *Journal of Atmospheric and Oceanic Technology*, 26(4), 719–732. <https://doi.org/10.1175/2008JTECHA1084.1>

Hand, W. H. (1996). An object-oriented technique for nowcasting heavy showers and thunderstorms. *Meteorological Applications*, 3, 31–41. <https://doi.org/10.1002/met.5060030104>

Hou, J., & Wang, P. (2017). Storm tracking via tree structure representation of radar data. *Journal of Atmospheric and Oceanic Technology*, 34, 729–747. <https://doi.org/10.1175/JTECH-D-15-0119.1>

Imhoff, R. O., Brauer, C. C., Overeem, A., Weerts, A. H., & Uijlenhoet, R. (2020). Spatial and Temporal Evaluation of Radar Rainfall Nowcasting Techniques on 1,533 Events. *Water Resources Research*, 56(8), 1–22. <https://doi.org/10.1029/2019WR026723>

Jacobson, C. R. (2011). Identification and quantification of the hydrological impacts of imperviousness in urban catchments: A review. *Journal of Environmental Management*, 92(6), 1438–1448. <https://doi.org/10.1016/j.jenvman.2011.01.018>

Jasper-Tönnies, A., Hellmers, S., Einfalt, T., Strehz, A., & Fröhle, P. (2018). Ensembles of radar nowcasts and COSMO-DE-EPS for urban flood management. *Water Science and Technology*, 2017(1), 27–35. <https://doi.org/10.2166/wst.2018.079>

Jensen, D. G., Petersen, C., & Rasmussen, M. R. (2015). Assimilation of radar-based nowcast into a HIRLAM NWP model. *Meteorological Applications*, 22(3), 485–494. <https://doi.org/10.1002/met.1479>

Johnson, J. T., Mackeen, P. L., Witt, A., Mitchell, E. D., Stumpf, G. J., Eilts, M. D., & Thomas, K. W. (1998). The storm cell identification and tracking algorithm: An enhanced WSR-88D algorithm. *Weather and Forecasting*, 13(2), 263–276. [https://doi.org/10.1175/1520-0434\(1998\)013<0263:TSCIAT>2.0.CO;2](https://doi.org/10.1175/1520-0434(1998)013<0263:TSCIAT>2.0.CO;2)

Formatted: German (Germany)

Formatted: German (Germany)

Formatted: Font: (Default) Times New Roman, 10 pt, German (Germany), Do not check spelling or grammar

Formatted: German (Germany)

Formatted: Font: (Default) Times New Roman, 10 pt, German (Germany), Do not check spelling or grammar

Formatted: German (Germany)

Formatted: German (Germany)

- Jung, S. H., & Lee, G. (2015). Radar-based cell tracking with fuzzy logic approach. *Meteorological Applications*, 22, 716–730. <https://doi.org/10.1002/met.1509>
- Kato, A., Maki, M. (2009). Localized Heavy Rainfall Near Zoshigaya, Tokyo, Japan on 5 August 2008 Observed by X-band Polarimetric Radar — Preliminary Analysis — Sola, 5, 89-92
- Kato, R., Shimizu, S., Shimose, K. I., Maesaka, T., Iwanami, K., & Nakagaki, H. (2017). Predictability of meso- γ -scale, localized, extreme heavy rainfall during the warm season in Japan using high-resolution precipitation nowcasts. *Quarterly Journal of the Royal Meteorological Society*, 153(704), 1406–1420. <https://doi.org/10.1002/qj.3013>
- Kober, K., & Tafferner, A. (2009). Tracking and nowcasting of convective cells using remote sensing data from radar and satellite. *Meteorologische Zeitschrift*, 18(1), 75–84. <https://doi.org/10.1127/0941-2948/2009/359>
- Krämer, S. (2008). *Quantitative Radardatenaufbereitung für die Niederschlagsvorhersage und die Siedlungsentwässerung*. Leibniz Universität Hannover.
- Kyznarová, H., & Novák, P. (2009). CELLTRACK - Convective cell tracking algorithm and its use for deriving life cycle characteristics. *Atmospheric Research*, 93(1–3), 317–327. <https://doi.org/10.1016/j.atmosres.2008.09.019>
- L. Foresti, & Seed, A. (2015). On the spatial distribution of rainfall nowcasting errors due to orographic forcing. *Meteorological Applications*, 22(1), 60–74.
- Lall, U., & Sharma, A. (1996). A Nearest Neighbor Bootstrap For Resampling Hydrologic Time Series. *Water Resources Research*, 32, 679–693. <https://doi.org/10.1029/95WR02966>
- Lang, P. (2001). Cell tracking and warning indicators derived from operational radar products. *Proceedings of the 30th International Conference on Radar Meteorology, Munich, Germany*, i, 245–247. <http://link.springer.com/10.1007/s00376-014-0003-z>
- Lin, C., Vasić, S., Kilambi, A., Turner, B., & Zawadzki, I. (2005). Precipitation forecast skill of numerical weather prediction models and radar nowcasts. *Geophysical Research Letters*, 32, L14801. <https://doi.org/10.1029/2005GL023451>
- Lucas, B. ., & Kanade, T. (1981). Iterative Technique of Image Registration and Its Application to Stereo. *Proceedings of the International Joint Conference on Neural Networks*, 674–679.
- Moseley, C., Berg, P., & Haerter, J. O. (2013). Probing the precipitation life cycle by iterative rain cell tracking. *Journal of Geophysical Research Atmospheres*, 118(24), 13,361–13,370. <https://doi.org/10.1002/2013JD020868>
- Moseley, C., Henneberg, O., & Haerter, J. O. (2019). A Statistical Model for Isolated Convective Precipitation Events. *Journal of Advances in Modeling Earth Systems*, 11(1). <https://doi.org/10.1029/2018MS001383>
- Panziera, L., Germann, U., Gabella, M., & Mandapaka, P. V. (2011). NORA-Nowcasting of Orographic Rainfall by means of analogues. Quarterly Journal of the Royal Meteorological Society, 137(661), 2106–2123. https://doi.org/10.1002/qj.878
- Pierce, C. E., Ebert, E., Seed, A. W., Sleigh, M., Collier, C. G., Fox, N. I., Donaldson, N., Wilson, J. W., Roberts, R., & Mueller, C. K. (2004). The nowcasting of precipitation during Sydney 2000: An appraisal of the QPF algorithms. *Weather and Forecasting*, 19(1), 7–21. [https://doi.org/10.1175/1520-0434\(2004\)019<0007:TNOPDS>2.0.CO;2](https://doi.org/10.1175/1520-0434(2004)019<0007:TNOPDS>2.0.CO;2)
- Pierce, C., Seed, A., Ballard, S., Simonin, D., & Li, Z. (2012). *Nowcasting. Doppler Radar Observations - Weather Radar, Wind Profiler, Ionospheric Radar, and Other Advanced Applications* (J. Bech and J. L. Chau (ed.); pp. 97–142). <https://doi.org/10.5772/39054>
- Rossi, P. J., Chandrasekar, V., Hasu, V., & Moiseev, D. (2015). Kalman filtering-based probabilistic nowcasting of object-oriented tracked convective storms. *Journal of Atmospheric and Oceanic Technology*, 32(3), 461–477. <https://doi.org/10.1175/JTECH-D-14-00184.1>
- Ruzanski, E., Chandrasekar, V., & Wang, Y. (2011). The CASA nowcasting system. Journal of Atmospheric and

Formatted: Font: (Default) Times New Roman, 10 pt,
Do not check spelling or grammar

Formatted: German (Germany)

Formatted: German (Germany)

Formatted: German (Germany)

1016 *Oceanic Technology*, 28(5), 640–655. <https://doi.org/10.1175/2011JTECHA1496.1>

1017 Schellart, A., Liguori, S., Krämer, S., Saul, A., & Rico-Ramirez, M. A. (2014). Comparing quantitative precipitation
1018 forecast methods for prediction of sewer flows in a small urban area. *Hydrological Sciences Journal*, 59(7), 1418–
1019 1436. <https://doi.org/10.1080/02626667.2014.920505>

1020 Sharma, A., & Mehrotra, R. (2014). An information theoretic alternative to model a natural system using observational
1021 information alone. *Water Resources Research*, 50(1), 650–660.
1022 <https://doi.org/https://doi.org/10.1002/2013WR013845>

1023 Sharma, A., Mehrotra, R., Li, J., & Jha, S. (2016). A programming tool for nonparametric system prediction using
1024 Partial Informational Correlation and Partial Weights. *Environmental Modelling & Software*, 83, 271–275.
1025 <https://doi.org/https://doi.org/10.1016/j.envsoft.2016.05.021>

1026 Shehu, B. (2020). *Improving the rainfall nowcasting for fine temporal and spatial scales suitable for urban hydrology*.
1027 Leibniz Universität Hannover.

1028 Shehu, B., & Haberlandt, U. (2021). Relevance of merging radar and rainfall gauge data for rainfall nowcasting in urban
1029 hydrology. *Journal of Hydrology*, 594, 125931. <https://doi.org/https://doi.org/10.1016/j.jhydrol.2020.125931>

1030 Surcel, M., Zawadzki, I., & Yau, M. K. (2015). A study on the scale dependence of the predictability of precipitation
1031 patterns. *Journal of the Atmospheric Sciences*, 72(1), 216–235. <https://doi.org/10.1175/JAS-D-14-0071.1>

1032 United, N. (2018). World Urbanization Prospects. In *Demographic Research*.
1033 <file:///C:/Users/rocey/Downloads/WUP2018-Report.pdf>

1034 Van Dijk, E., Van Der Meulen, J., Kluck, J., & Straatman, J. H. M. (2014). Comparing modelling techniques for
1035 analysing urban pluvial flooding. *Water Science and Technology*, 69(2), 305. <https://doi.org/10.2166/wst.2013.699>

1036 Wilson, J. W., Crook, N. A., Mueller, C. K., Sun, J., & Dixon, M. (1998). Nowcasting Thunderstorms: A Status Report.
1037 *Bulletin of the American Meteorological Society*, 79(10), 2079–2099. [https://doi.org/10.1175/1520-0477\(1998\)079<2079:NTASR>2.0.CO;2](https://doi.org/10.1175/1520-0477(1998)079<2079:NTASR>2.0.CO;2)

1038

1039 Wilson, J. W., Feng, Y., Chen, M., & Roberts, R. D. (2010). Nowcasting challenges during the Beijing olympics:
1040 Successes, failures, and implications for future nowcasting systems. *Weather and Forecasting*, 25(6), 1691–1714.
1041 <https://doi.org/10.1175/2010WAF2222417.1>

1042 Winterrath, T., Rosenow, W., & Weigl, E. (2012). On the DWD quantitative precipitation analysis and nowcasting
1043 system for real-time application in German flood risk management. *IAHS-AISH Publication*, 351, 323–329.

1044 Zahraei, A., Hsu, K. lin, Sorooshian, S., Gourley, J. J., Hong, Y., & Behrangi, A. (2013). Short-term quantitative
1045 precipitation forecasting using an object-based approach. *Journal of Hydrology*, 483, 1–15.
1046 <https://doi.org/10.1016/j.jhydrol.2012.09.052>

1047 Zahraei, A., Hsu, K. lin, Sorooshian, S., Gourley, J. J., Lakshmanan, V., Hong, Y., & Bellerby, T. (2012). Quantitative
1048 Precipitation Nowcasting: A Lagrangian Pixel-Based Approach. *Atmospheric Research*, 118, 418–434.
1049 <https://doi.org/10.1016/j.atmosres.2012.07.001>

1050 Zawadzki, I. I. (1973). Statistical Properties of Precipitation Patterns. *Journal of Applied Meteorology*, 12(3), 459–472.
1051 [https://doi.org/10.1175/1520-0450\(1973\)012<0459:spopp>2.0.co;2](https://doi.org/10.1175/1520-0450(1973)012<0459:spopp>2.0.co;2)

1052 Zou, X., Dai, Q., Wu, K., Yang, Q., & Zhang, S. (2020). An empirical ensemble rainfall nowcasting model using multi-
1053 scaled analogues. *Natural Hazards*, 103(1), 165–188. <https://doi.org/10.1007/s11069-020-03964-3>

Formatted: German (Germany)