



1 Spatial distribution of groundwater recharge, based on regionalized soil 2 moisture models in Wadi Natuf karst aquifers, Palestine

3 Clemens Messerschmid¹, Amjad Aliewi²

4
5 ¹ Hydrologist, Independent researcher, Hannover, Germany

6 ² Water Research Center, Kuwait, Kuwait Institute for Scientific Research, Kuwait

7
8 **Correspondence:** Clemens Messerschmid (clemensmesserschmid@yahoo.de)

9 10 11 12 **Abstract.**

13 While groundwater recharge is considered fundamental to hydrogeological insights and basin management, only
14 relatively little attention has been paid to its spatial distribution. And in ungauged catchments it has rarely been
15 quantified, especially on the catchment scale.

16
17 For the first time, this study attempts such analysis, in a previously ungauged basin. Our work based on field data
18 of several soil moisture stations, which represent five geological formations of karst rock in Wadi Natuf, a semi-
19 arid to sub-humid Mediterranean catchment in the occupied Palestinian West Bank. For that purpose, recharge
20 was conceptualized as deep percolation from soil moisture under saturation excess conditions, which had been
21 modelled parsimoniously and separately with different formation-specific recharge rates.

22 For the regionalisation, inductive methods of empirical field-measurements and observations were combined with
23 deductive approaches of extrapolation, following the recommendations for hydrological Prediction in Ungauged
24 Basins (PUB), by the International Association of Hydrological Sciences (IAHS). Our results show an average
25 annual recharge estimation in Wadi Natuf Catchment (103 km²), ranging from 24 to 28 Mm³/yr, equivalent to
26 recharge coefficients (RC) of 39-46% of average annual precipitation.

27
28 Thus, for the first time, formation-specific RC-values could be derived, assessed and quantified in their spatial
29 distribution, and by creating a schematic conceptual basin classification framework for regionalisation that is also
30 applicable in many comparable sedimentary basins in the Mediterranean and worldwide.

31
32
33 **Keywords.** Distributed recharge, classification framework, regionalisation PUB, landscape features

34 35 36 **1 Introduction**

37
38 The assessment of distributed groundwater recharge is considered a challenge already in basins with scarce data;
39 even more so its spatial distribution and the regionalisation of point measurements and plot-scale experiments,
40 since the governing processes of recharge and its spatial distribution often remain poorly understood (Hartmann
41 *et al.*, 2012a) even in well-developed basins. An additional complication poses the nature of karstic aquifers,
42 characterized by their diverse and complicated inhomogeneous and anisotropic flow fields (Schmidt *et al.*, 2014
43 and Geyer *et al.*, 2008). Yet, regionalised information on spatially distributed recharge is highly important, not
44 only for the correct budgeting of inflows on different scales, but also for the overriding and growing demands in
45 resource protection and sustainable management, as well as the equitable allocation of groundwater among
46 different basin riparians.

47 48 49 **1.1 Approaches to spatial variability in ungauged basins (results of PUB)**

50
51 In order to investigate spatial variability, two shifts in general approaches can be observed; on the one hand a shift
52 from so-called indirect to direct approaches, which try to observe, determine and quantify surface-near processes
53 (Dörhöfer and Jesopait, 1997; Lerner *et al.*, 1990), as discussed in Messerschmid *et al.* (2019). This is particularly



1 the case in areas, where the observation of deep underground surfaces is limited or severely restricted, as in Wadi
2 Natuf, under Israeli occupation (World Bank, 2009). And on the other hand, many authors of the PUB-literature
3 recommended a shift away from lumped and integrated models and towards distributed models that differentiate
4 hydrological processes, such as soil saturation, runoff or recharge, together with their drivers, e.g. precipitation,
5 evapotranspiration, etc. (Batelaan and de Smedt, 2001, 2007; Hrachowitz *et al.*, 2013 and Sivakumar *et al.*, 2013).
6 This is because lumped aquifer budgeting of observable inflows and outflows (e.g. wells and springs) are
7 problematic in many of the scarcely gauged basins around the world. And furthermore, lumped budgeting all too
8 often is inapplicable in the sub-catchments of large groundwater basins with lateral groundwater flow connections,
9 both, to neighbouring sub-catchments or within the same basin.

10
11 In order to differentiate and quantify the spatially distributed processes or to identify organizing principles and to
12 formulate a unified theory, research should start with a synthesis of data, process understanding and the link
13 between catchment form and function (Hrachowitz *et al.*, 2013). This can be done by setting up so-called
14 catchment classification and similarity frameworks that relate observable landscape elements to hydrological
15 diversity (Berne *et al.*, 2005) and are based on similarities of hydrological function (McDonnell and Woods, 2004).
16 Sivapalan *et al.* (2003a) summarize that such predictive systems should contain three components – (1) a model
17 that describes key processes, (2) climatic input with the meteorological drivers of basin response and (3)
18 parameters of landscape properties that govern these processes. In other words, basin classification frameworks
19 differentiate, describe and, where possible, quantify the observable physical landscape features, both underground
20 (using geology) and above surface (using soil cover or land use and land cover, LU/LC) and relate them to each
21 other. For their part, Sivakumar *et al.* (2013) offer a three-step procedure for an effective formulation and
22 verification of a catchment classification framework: (1) the detection of possible patterns in hydrologic data and
23 determination of complexity and connectivity levels; (2) the classification into groups and subgroups based on
24 data patterns, system complexity and connections; and (3) the verification of the classification framework.

25
26

27 **1.2 Reliable field data in regional flow systems**

28

29 Several factors pose a challenge to the estimation of spatially distributed recharge, such as the need for reliable
30 field data or the correct conceptual representation of the aquifer and its flow and recharge processes (Goldscheider
31 & Drew, 2007; Scanlon *et al.*, 2006). Important physical landscape features are often spatially highly variable and
32 localised in nature and therefore difficult to control. Yet, they shape the overlapping processes of groundwater
33 recharge (Batelaan and De Smedt, 2001; Beven and Kirkby, 1979). And for basins, in which observations of
34 surface water and of the saturated, deeply buried zone of the aquifer are not available (as in Messerschmid *et al.*;
35 2019), Scanlon *et al.* (2006) recommend a third group of recharge estimation methods which are based on
36 observations within the unsaturated zone (where available within the bedrock or otherwise in the soil cover).

37

38 The problems with the regionalisation of distributed recharge are further exacerbated in deeply buried karstic aquifers,
39 known for their non-Darcian flows and anisotropic natural flow fields, which often are further altered and disturbed
40 by human intervention, e.g. well abstractions. In such basins, even a well-controlled basin response based on lumped
41 outflows in the often strongly confined downstream area often does not truly reflect upstream variability in
42 unconfined and outcropping areas, where recharge takes place. This is especially the case in settings where several
43 sub-units are stacked and hydraulically interconnected in one uniformly acting regional aquifer in the downstream
44 abstraction zone, with low gradients and excessive pumping, as Dafny (2009) and Dafny *et al.* (2010) have shown
45 for the Western Aquifer Basin (see also Hartmann *et al.*, 2012b; Guttman & Zukerman, 1995 and Abusaada, 2011).
46 Last not least, with respect to spatially distributed recharge from different hydrogeological units, the concept of
47 budgeting in- and outflows only functions correctly when no downward leakage has to be accounted for. This
48 process, however, is often beyond the reach of observations and measurements, particularly in poorly or entirely
49 ungauged basins around the world.

50

51

52 **1.3 Physical landscape characteristics**

53



1 According to Franchini and Pacciani (1991), hydrological models should have a complete and physically realistic
2 representation of dominant processes to ensure that parameters are well constrained, thus combining highly
3 location-specific empirical work conceptual efforts, like the correct differentiation of different groups of landscape
4 features that rule the recharge process. Hrachowitz *et al.* (2013) detailed the diverse selections of parameter sets
5 representing catchment characteristics; most studies differentiate between three principal groups of spatial
6 parameters governing recharge (and use one or two of them): Geology and lithology as first group (Sanz *et al.*,
7 2011); as a second group, soil characteristics combined with land use, topography, water level data and lithology
8 (Batelaan and de Smedt, 2001; Batelaan and de Smedt, 2007; Aish, Batelaan and de Smedt, 2010;) and as a third
9 group, landscape features, including topography, vegetation and land use, sometimes combined to so-called land
10 forms or more narrowly restricted to land use and land cover characteristics (LU/LC) (Aish, Batelaan and de
11 Smedt, 2010; Zomlot *et al.*, 2015). However, Radulović *et al.* (2011) used distributed physical parameters from
12 all three groups, and reports that these parameters for groundwater recharge were not actually measured in the
13 field and instead conceptual assumptions were used to assign them with weights as variables in a basin-wide
14 transfer function between spatial characteristics and hydrological response.

15
16 In ungauged basins, where information on hydrological basin responses are missing, physical parameters can be
17 regionalised by using physiographic similarity as a proxy (Arheimer and Brandt 1998, Parajka *et al.* 2005, Dornes
18 *et al.* 2008, Masih *et al.* 2010). However, the correct linkage and translation of point- and plot-scale observations
19 into regionalised findings on the catchment scale often remains a crucial challenge (Hartmann *et al.*, 2013). Seibert
20 (1999) developed relationships between the calibrated model parameters and the physical catchment characteristics
21 of landscape found in the field. Yet, PUB emphasised that regionalisation of observable spatial parameters remains
22 connected to the empirical efforts of field observation and measurements (maps, aerial photography, satellite
23 imagery and of course field visits). This article therefore draws on the recharge measurements and modelling in
24 Messerschmid *et al.* (2019).

25
26

27 **1.4 Physical basin form and hydrological function**

28

29 The translation of physical basin form into hydrological function is crucial and challenging, since it involves two
30 discrete conceptual levels and an extraordinary complexity of interactions. Physical features of the basin are far
31 from being uniquely correlated to each other (Beven, 2000; Oudin *et al.*, 2010). Importantly, the scale at which
32 the entire complexity of distributed recharge processes and their interactions is fully at play, is the catchment scale
33 (Hrachowitz *et al.*, 2013), and therefore McDonnell *et al.* (2007) emphasise that it is the correct scale for the
34 investigation of hydrological processes in general and of recharge in particular. Many studies (Arheimer and
35 Brandt 1998, Parajka *et al.*, 2005, Dornes *et al.*, 2008, Masih *et al.*, 2010) suggested the use of physiographic
36 similarity as a proxy for functional similarity, basing the regionalisation of runoff, recharge or other dynamic
37 catchment response characteristics on physical characteristics (Yadav *et al.*, 2007). In addition, the use of so-called
38 hydrological system signatures can help create a link between physical features and basin response and to describe
39 emergent system properties (Eder *et al.*, 2003; Hartmann *et al.*, 2013). Signatures, e.g. temporal patterns discharge,
40 flow duration curves or spring hydrographs, can be employed quantitatively, e.g. for the calibration of models
41 (Hingray *et al.*, 2010), or qualitatively, as indicators of basin response (see Messerschmid *et al.*, 2019; Sivapalan
42 *et al.*, 2003b and Winsemius *et al.*, 2009). In ungauged catchments, signatures can serve for the regionalisation of
43 plot-scale findings into basin-wide overall processes (e.g. Castellarin *et al.*, 2004; Bulygina *et al.*, 2009 and Pallard
44 *et al.*, 2009), or be used to test and investigate modelling results (see Messerschmid *et al.*, 2019). Conceptually,
45 Sawicz *et al.* (2011) developed a simple cooking recipe for regionalisation consisting of three steps: (1)
46 classification (to give names), (2) regionalisation (to transfer information), and (3) generalization (to develop new
47 theory), or in brief terms: name it, attribute it, theorize it.

48

49 Sivapalan *et al.* (2003a) stated that in ungauged basins predictive systems must be inferred from direct field
50 observation of dominant processes and empirically derived field parameters. They must be firmly based on local
51 knowledge of the observable landscape (and climate) controls of hydrological processes (see also Messerschmid
52 *et al.*, 2019). On the other hand, McDonnell *et al.* (2007) argued that any mapping or characterization of landscape
53 heterogeneity and process complexity must be driven by a desire to generalize and extrapolate observations from
54 one place to another, or across multiple scales. A certain degree of extrapolation is therefore inevitable when



1 attributing physical features and feature ensembles to processes and basin responses (or from the observed to
2 another location). This therefore involves deductive steps. But the need for direct observation remains. PUB theory
3 therefore postulates the imperative of a combination, or better the integration of inductive (experimental and
4 empirical) and deductive approaches in regionalisation (Pomeroy, 2011).

5
6

7 **1.5 Western Aquifer Basin – overview and existing recharge studies**

8

9 Details of the characteristics of the Western Aquifer Basin (WAB) were described in Messerschmid *et al.* (2019).
10 The WAB is an up to 1000 m thick Upper Cretaceous carbonatic karst aquifer (SUSMAQ, 2002) and
11 conventionally divided into two regional aquifer layers (Fig. 1) – an Upper Aquifer (UA) of Turonian to
12 Cenomanian age and a Lower Aquifer (LA) of Upper Albian age, (see Fig. 2a in Messerschmid *et al.*, 2019).
13 However, this simplified regional hydrostratigraphy applies only to the Coastal Plain downstream, with its
14 productive abstraction and discharge zone, where the fully confined aquifer acts uniformly and with a low
15 hydraulic gradient (Dafny *et al.*, 2010); see Table 1, section 2. On a local scale, especially in the phreatic zone
16 upstream, the hydrostratigraphy is far more complex than the above-mentioned bipartite division into Upper and
17 Lower Aquifers.

18

19 Importantly, whereas the productive Coastal Plain is well developed, monitored and gauged through hundreds of
20 Israeli deep wells, the WAB recharge and accumulation zones in the mountains, slopes and foothills of the West
21 Bank, remain almost untouched, ungauged and unexplored, due to severe Israeli restrictions on Palestinian water
22 use and development (World Bank, 2009). Wadi Natuf, the study area of this paper, lies almost entirely within the
23 aquifer's recharge zone, with only the most downstream western portion bordering on the productive abstraction
24 zone in the coastal plain (Fig. 1) and with one single abstraction well not far from the western catchment boundary.

25

26 So far, only a few authors have attempted the analysis of fully distributed recharge in the WAB (Hughes *et al.*,
27 2008) and no previous study was based on empirical field evidence, measurements and observations. Sheffer
28 (2009) introduced a semi-distributed, partially lumped recharge model, however with a very coarse lithological
29 differentiation into merely two types of rock, either permeable or less permeable. In addition, Sheffer (2009) took
30 his soil model parameters from the general literature and later adjusted them by calibration. In his own words, he
31 focussed and aimed at '*the understanding of temporal influence on recharge processes*', rather than on
32 understanding spatial influences (Sheffer *et al.*, 2010; Sheffer, 2009).

33

34 During the last two decades, other studies of field-based and empirical investigations on sub-catchment, local and
35 plot-scales were conducted. Chloride mass balance calculations were carried out in the adjacent Eastern Aquifer
36 Basin (EAB) (Marei *et al.*, 2010; Schmidt *et al.*, 2013; Aliwi *et al.*, 2021) and in the central WAB (Jebreen *et al.*,
37 2018). However, they contributed little to the spatial differentiation of distributed recharge processes, let alone, its
38 regionalisation.

39

40

41 **1.6 Research gaps**

42

43 In the WAB, lumped studies of basin-wide replenishment are widely available, however, mostly based on desktop
44 work. By contrast, distributed recharge quantification has hardly been attempted. Moreover that, the physical form
45 and the spatially variable parameters that rule the recharge process were not observed or measured directly in the
46 field. At most, some empirical recharge studies were conducted on the point scale but without further
47 regionalisation efforts (crucial acc. to Martínez-Santos and Andreu, 2010). This is despite the fact that physical
48 observations of basin form and, if possible, hydrological basin response, were strongly recommended by Sivapalan
49 *et al.* (2003a). Still, the regionalisation of the observed and modelled field results in most cases must include at
50 least some measure of extrapolation and deduction. In order to guide the extrapolation of local recharge results
51 into regionalised basin recharge, Hrachowitz *et al.*, (2013) therefore recommended the establishment of a basin
52 classification framework, which currently does not exist in the WAB.

53

54



1 **1.7 Aims and motivation – our study**

2
3 In order to advance the crucial but challenging task of a realistic representation of distributed recharge, this study
4 on Wadi Natuf presents a novel combination of existing techniques that are based on observable processes,
5 parameters and signatures. The assessment adheres to the goal of parsimony and that integrates inductive and
6 deductive steps. The previous paper (Messerschmid *et al.*, 2019) was firmly grounded in field observation,
7 measurements and a forward-calculating location-specific model; now, this current paper extends the findings of
8 the local models in a regionalisation effort to the entire surface catchment area of 103 km².

9
10 The study aims at generating specific recharge coefficients for every litho-stratigraphic formation in Wadi Natuf
11 in two consecutive steps, i.e. through attribution and extrapolation of the modelled recharge coefficients and based
12 on the understanding of dominant physical parameters and processes: First, a recharge classification framework
13 was set up for this largely ungauged basin and based on field observations, as well as conceptualisation and
14 classification; Relevant physical features were identified and attributed to three different groups and within each
15 group, different recharge classes were differentiated. In a second step, the previous model results, such as the
16 location-specific recharge coefficients (RC) of Messerschmid *et al.* (2019) were extrapolated along the above
17 grouping and classification scheme.

18
19
20 **2 Study area**


21
22 The 103 km² large catchment of Wadi Natuf extends on the western flanks of the West Bank from the Mountain
23 crest in the east towards 1949 Armistice Line ('Green Line') in the wester foothills. Much of its topography is
24 characterized by undulating hills with deeply incised ephemeral rivers (Wadis). The catchment exhibits a
25 pronounced spatial variability of climatic drivers (precipitation, evaporation), land use and land cover features
26 (LU/LC), soil thickness and not least, rock lithology of the different geological (litho-stratigraphical) formations
27 (see Fig. 2a in Messerschmid *et al.*, 2019).

28
29
30 **2.1 Geology and hydrogeology**

31
32 One of the reasons for choosing Wadi Natuf as an exemplary sub-catchment on the recharge zone of the Western
33 Aquifer Basin (WAB), besides field accessibility, was the unrivalled litho-stratigraphic diversity, reaching from
34 the deepest outcropping, Aptian formations, all the way up to the top cover series of impermeable chalks from
35 Senonian (and Lower Tertiary) age. All formations of the WAB are covered in this study (Fig. 2b in Messerschmid
36 *et al.*, 2019). Together, the aquifers cover around two thirds (64.4 %) of the outcrop areas in Wadi Natuf; they are
37 entirely carbonatic and in most parts strongly karstified.

38
39 According to the old, conventional view – valid on the regional scale – the regional Upper and Lower Aquifers
40 are divided by some 100 to 150 m thick marly, chalky and carbonatic series of a so-called 'Middle Aquitard' or
41 Yatta formation (Bartov *et al.*, 1981; SUSMAQ, 2002; Messerschmid *et al.*, 2003a, 2003b; ESCWA–BGR, 2013).
42 The regional geology is indicated in the land use and geology map, Fig. 2 (for a detailed geological map, compare
43 with Messerschmid *et al.*, 2019, Fig. 2b). However, closer scrutiny reveals that this regional 'Middle Aquitard'
44 can be further subdivided. The top forms an aquitard or even aquiclude section of impermeable yellow soft marl
45 (upper Yatta, u-Yat). By contrast, the main (lower) part of this 'regional aquitard' is more carbonatic and in parts
46 karstified, however complemented by smaller portions of chalk, marl and chert. These somewhat marly and chalky
47 limestones and dolomites of lower Yatta formation (l-Yat) thus form an intermediate perched aquifer horizon that
48 drains through small local springs.

49

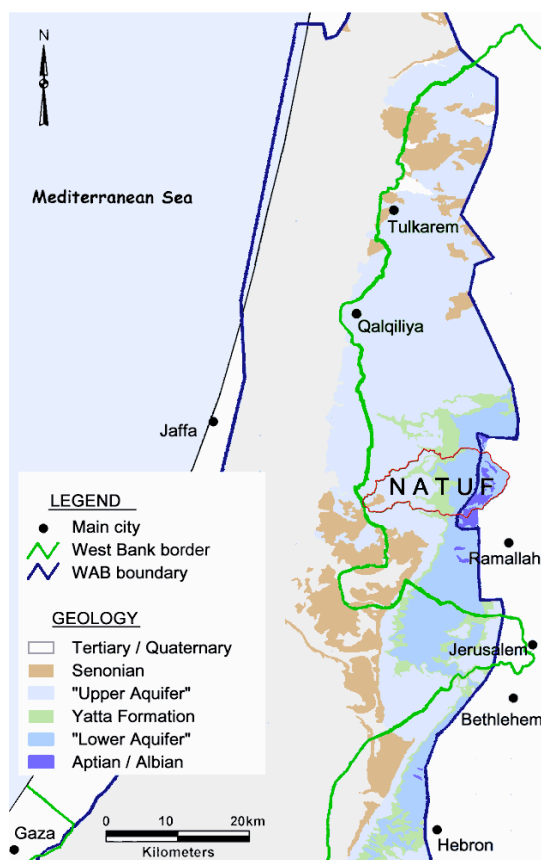

1
2 **Figure 1.** Overview of regional aquifer outcrops in Wadi Natuf and the WAB; modified after Messerschmid *et al.*
3 (2003a).
4

5 Also, the regional 'Lower Aquifer' (LBK & UBK) must be differentiated on the local scale into more aquiferous
6 and more permeable parts (Table 1). Its top is formed by the conspicuous cliff-forming and very permeable reefal
7 limestone of upper UBK (u-UBK), that also acts as a leaky perched aquifer on the local scale (such as in Wadi
8 Zarqa). By contrast, the lower UBK formation (l-UBK) mostly consists of banked, often chalky dolomites (again
9 with intercalations of marl and chert) with a relatively poor aquifer potential. Its top however was found to be more
10 carbonatic but underlain by a twin marl band (Fig. 3c), which hydraulically separates the top from the main, lower
11 part of l-UBK and above which local contact springs align. This top of l-UBK acts as a third local and isolated
12 perched aquifer horizon.

13 By contrast, the regional 'Upper Aquifer' is void of both, perched aquifers and springs, despite the fact that it too
14 contains formations with thin marl intercalations of reduced permeability, such as the colourful plated limestone
15 series of lower Betlehem formation (l-Bet), the outcrops of which are often covered by small forests. This is due
16 to the presence of the thin marl intercalations which promote the development of thicker soils here (e.g. the forested
17 hilltop in Fig. 3a). It can thus be summarized that almost the entire Upper Aquifer and most of the Lower Aquifer
18 outcrops in the recharge area are void of springs.


19 Only the intermediate aquifers of the central study area show land forms of deeply incised erosional Wadis, which
20 often completely isolate the small local and often perched aquifer reservoirs on individual hills or hill groups. They
21 drain through over 100 hundred small and very small local contact springs (Fetter, 1994) with individual spring
22 flow between zero and a maximum of 1.7 l/s (Messerschmid *et al.*, 2003a, 2003b).

23 These isolated perched hilltop aquifers of central Wadi Natuf stand in contrast to the thick regional aquifers and
24 therefore only incompletely contribute to the deep regional groundwater recharge of the two regional storage and
25 flow systems. Together, the formations of the three isolated perched aquifer systems cover 13 % of the catchment.



1 The outcrop areas of all formations, as well as the differences between the local and the regional hydrostratigraphy
 2 form one focus of the present study (see Table 1).

3

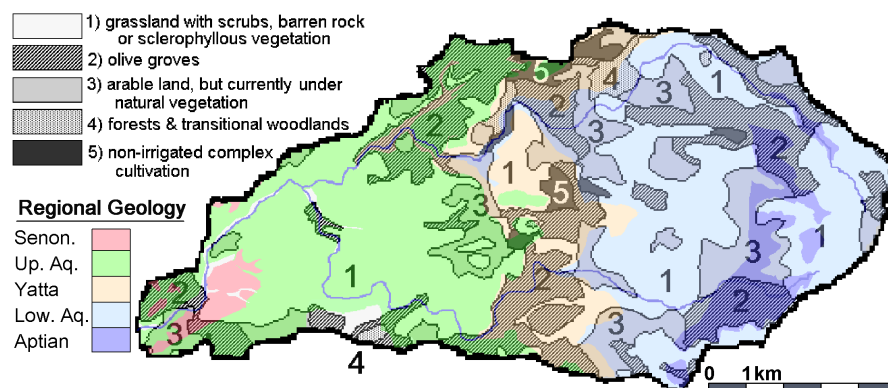

4

5 **Figure 2.** Wadi Natuf Land Use and Land Cover (LU/LC) map and regional hydrostratigraphy in shaded colours
 6 (modified after LRC, 2004 and Messerschmid *et al.*, 2003a and ARIJ, 2012).

7

8 Note: The land cover types 4 and 5 are almost completely restricted to Yatta formation outcrops (and in some places parts of
 9 the UBK formations). Type 3 is typically found over outcrops of the regional Lower Aquifer. The Upper Aquifer outcrop area
 10 is dominated by type 1 (grassland and barren rock). Olives (type 2) can be found in all areas, but are grown on tenced terraces
 11 mostly in the steep slopes of the Lower Aquifer outcrops in upper Wadi Natuf.

12

13 **Table 1.** Outcrop (recharge) area, average precipitation and formation names in Wadi Natuf – regional and local
 14 refined hydrostratigraphies

Age	Area (km ²)	Precipitation (mcm/a)	Formation (symbol)	Local stratigraphy, aquifer potential	Regional Stratigraphy
Recent	1.53	0.85	Alluvial (All)	(minor)	Top
Senonian	2.38	1.31	Senonian (Sen)	–	Aquiclude
Turonian	9.24	5.07	Jerusalem (Jer)	major	UPPER AQUIFER (UA)
Upper Cenomanian	7.65	4.26	u-Betlehem (u-Bet)	good	
	9.77	5.58	l-Betlehem (l-Bet)	poor	
Lower Cenomanian	10.06	5.77	Hebron (Heb)	major	Middle Aquitard
	4.93	2.92	u-Yatta (u-Yat)	–	
Upper	10.18	6.14	l-Yatta (l-Yat)	local *	LOWER AQUIFER (LA)
	2.44	1.50	u-Upper Beit Kahil (u-UBK)	good *	
Albian	8.44	5.26	l-Upper Beit Kahil (l-UBK)	local (at top) * poor (at bottom)	
Lower	13.16	8.21	u-Lower Beit Kahil (u-LBK)	major	Bottom Aquiclude
	16.4	10.23	l-Lower Beit Kahil (l-LBK)	major	
Albian	4.56	2.80	Qatannah (Qat)	–	
Aptian	1.82	1.12	Ein Qiniya (EQ)	good (local)	
Aptian	0.06	0.04	Tammoun (Tam)	–	
SUM	102.6	61.1			

15

16 Note: The area of formation outcrop here is equated with the area for infiltration (recharge). Precipitation here is expressed as
 17 average annual amount of area precipitation over the respective formation outcrops and calculated with rainfall of the
 18 respective sub-catchments within Wadi Natuf. Ein Qiniya formation is a local aquifer, which however does not belong to any
 19 of the regional aquifer units or basins; its recharge potential does not form part of the water balance calculations for the
 20 WAB. * perched leaky aquifers with dashed line at bottom; Source: this study.

21

22 2.2 Physical landscape features

23

24 Less than 5% of the rural Wadi Natuf landscape are built-up (Messerschmid, 2014). Its typical land forms (Fig. 2)
 25 range from rock outcrops and terraces with olives, over grass- and shrublands, arable but currently uncultivated



1 lands, mixed vegetation and transitional woodlands to agricultural plains and forests (Messerschmid, 2014; LRC,
2 2004). All land forms in Wadi Natuf are closely related to the underlying geology (Fig. 3). The soft marl of u-Yat
3 usually forms an eroded step in the landscape that can develop into small inland plains with cultivated agricultural
4 fields. By contrast, the mixed intercalations of marly, chalky and limey rocks of l-Yat form natural steps and
5 terraces in the landscape, often with a bushy landscape, partly also with trees. The regional aquitard of u-Yat is
6 overlain by the strongly karstified massively bedded limestone of Hebron formation (Heb), which often restricts
7 soil development to small pockets in an otherwise sparsely vegetated karren-field landscape. This karstic formation
8 with an excellent recharge potential (and very low runoff generation, see Messerschmid *et al.*, 2017), in turn is
9 overlain by the already mentioned soft, plated limestone with thin marl intercalations of l-Bet, which not only
10 erodes differently but also allows the formation of thicker soils; Figure 3a shows l-Bet at the top of the hill,
11 conspicuously covered by a little forest and with a sharp boundary to the LU/LC type of the underlying karstic
12 Hebron formation.

13
14 Typically, in Wadi Natuf, this distribution of LU/LC follows the formation outcrops (geology) with great accuracy,
15 discernible even from aerial photographs. Also soil thickness was measured and found to strongly correlate with
16 lithology and land forms (LU/LC) as discussed in the first part of this series (see Table D1 in Messerschmid *et al.*,
17 2019). This recurrent field finding of strict correlation between the three groups of physical features – LU/LC, soil
18 thickness and geology – forms the basis of the classification framework in Wadi Natuf (see sections 3.2, 3.3, 5.1),
19 since it allows categorization of key elements of recharge and the attribution of lithological and hydro-
20 stratigraphical characteristics with the aquifer and recharging potential of the different formations.

21



22

23 **Figure 3.** Correlation of landform and lithology. Nabi Ghayth hill, west of Beitillu (a); Nabi Aneer spring group
24 (b). Twin marl band underlying a local perched aquifer (c).

25

26 Note: The karstic limestone of Hebron formation forms outcrops with thin soil cover, bare rock or karren fields and tends to
27 erode into steeper slopes above the soft, mostly eroded upper Yatta formation – the only true aquiclude within the Westbank
28 Group (with levelled agricultural plains in the inset photo in Fig. 3a. By contrast, the top of the hill is formed by lower Betlehem
29 formation; a thinly plated coloured limestone ensemble with fine marl interbedding that lacks karstification and promotes soil
30 development and natural vegetation. Figure 3c shows the twin marl band, underlying and confining Beitillu, Harat Al-Wad
31 spring group (of Top l-UBK formation).

32

33

3 Methodology

34

35 The regionalisation of this study employs two consecutive procedures. Step a): Identification and parameterization
36 of physical features and their classification in a conceptual response matrix, attributed to classes of hydrological
37 impacts (Fig. 4, rows 1 and 2). Step b): Extrapolation and regionalisation of the model results within a classification
38 framework (row 3).

39

40

3.1 Physical features

41

42 The classification of distributed physical landscape features and their parameters stands at the heart of this study.
43 Mapping, detection, interpretation and where possible, quantification of their parameters was carried out over a
44 period of more than ten years and over 200 field visits to gain local knowledge on specific field conditions.
45 Accordingly, the landscape characteristics in Wadi Natuf could be attributed to three groups: geology, soil
conditions and land use/land cover features (LU/LC).

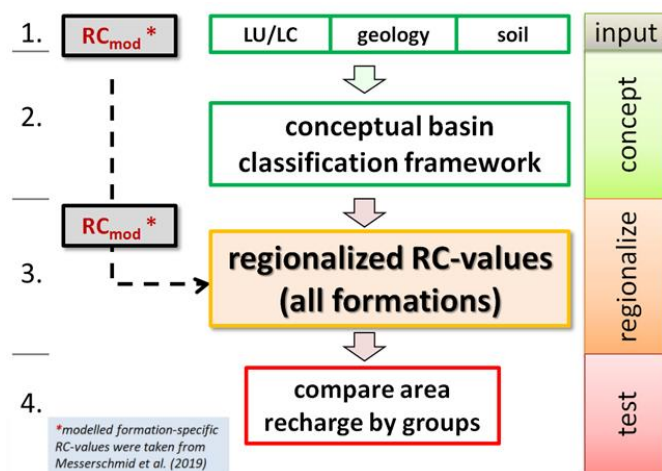


Figure 4. Conceptual flow diagram of work steps
 First row: field observations on land forms, geology and soil, together with key date campaign on spring flow measurements;
 second row: setting up a conceptual classification framework; third row: introducing formation-specific RC-values (from
 Messerschmid *et al.*, 2019) and regionalisation of RC-values for the entire catchment (all formations and all three groups);
 fourth row: area recharge calculation and comparison of results for the different groups.

First, existing geological maps in the scale 1:50,000 (GSI, 2000; 2008; Rofe & Raffety, 1963) were corrected, complemented and refined by extensive field mapping and remote sensing (stereoscopic aerial photographs) with the target to detect, describe and interpret the lithological rock content, (chemism, texture, grain distribution), the degree of crystallisation and structural features like folding, faulting, cleavage, jointing, as well as primary porosity and karstic features. Another focus was the refinement of local hydrostratigraphy, in particular with respect to the spring-feeding formations (Messerschmid *et al.*, 2003b; Dafny *et al.*, 2009) and their catchment areas. Of particular interest were not only the spatial pattern and distribution of such features, but especially the comparison of these geological features with the features and distribution of the other groups, i.e. soil and LU/LC. This enabled us to assign particular, spatially distributed geological characteristics to each of the different formations. This study first re-examined the distribution of landscape features with respect to their recharge potential and the exact delineation of the outcrop and recharge areas of the different aquifer and aquitard formations.

The second part of field mapping and investigations targeted the soils in Wadi Natuf. Lab tests found silty to clayey residual soils (terra rossa), which are typical for Mediterranean carbonate environments (see also Messerschmid *et al.*, 2019). The main aim of this sub-study was to investigate soil thickness and its distribution over the area. As already mentioned a conspicuous spatial pattern emerged, namely that typical soil thicknesses formed over different formations (see Fig. 3a, 3b). Appendix D in Messerschmid *et al.* (2019,) presents these results in a soil thickness matrix, where the distribution of soil depth was documented for different LU/LC-types and different lithostratigraphic units.

Thirdly, and similar to geology and soil thickness, land use and land cover characteristics, such as relief, natural vegetation and its alteration by human land use (section 2), can be interpreted as indicators of different hydrological processes that determine recharge. Whereas the differences in landscape units with respect to their runoff potential were discussed in Messerschmid (2014); Messerschmid *et al.* (2018), this study aimed at creating a simplified but realistic categorization of physical, recharge-controlling landscape features and their spatial distribution along the lines of outcropping formations.

3.2 Conceptual basin classification framework and regionalisation

Conceptually, as already mentioned, the regionalisation in this study comprises of two main steps (rows 2, 3 in Fig. 4), i.e. the creation of a basin classification framework and the attribution of the model results of Messerschmid *et al.*, (2019) to this framework by extrapolation and regionalisation, which will be further specified in the following.



1 Based on the PUB-understanding that physical characteristics control hydrological processes and thus
 2 (hydrological) function follows (physical) form, a conceptual framework was set up, as shown in Table 2. The
 3 physical features were divided into three groups, such as LU/LC, soil and geology (columns in Table 2), and within
 4 each group separately, the different landscape units were divided into distinct classes of recharge potential (lines
 5 in Table 2), based on the available geological literature and our extensive field investigations. Then, each
 6 lithostratigraphic formation (numbered a, b, c, etc. in the schematic Table 2) was attributed to a distinct recharge
 7 class (from low to high in Table 2; as roman numbers I – V in Table 3). As a result, we obtained three independent
 8 sets of differently ordered litho-stratigraphic formations, ranked by their recharge potential. This separation
 9 allowed us to examine the result of attributed recharge classes separately for each group in order to gain a more
 10 realistic picture, to examine the differences in outcomes and to avoid over-simplification in line with PUB-
 11 recommendations (section 1.2). Again, this procedure was based on the findings of section 2, namely that such a
 12 correlation between the three groups of physical features was clearly discernible in field explorations in Wadi
 13 Natuf. It should be noted here that whereas soil thickness was quantifiable in the field, other physical parameters
 14 such as LU/LC and geology were not; they were hence differentiated qualitatively and correlated with soil
 15 thickness in the aforementioned soil matrix (see Appendix D in Messerschmid *et al.*, 2019).

16
 17 The general classification framework was then applied to Wadi Natuf and the specific physical features were inserted
 18 in Table 2, to obtain a conceptual recharge classification framework, specific for Wadi Natuf (Table 3). Here, in each
 19 of the groups (columns), the different formations rank differently as to their recharge potential (classes I–V). The next
 20 steps of the recharge distribution analysis were regionalisation and extrapolation by applying the modelled RC-results
 21 from the eight SM stations in Messerschmid *et al.* (2019) to the un-modelled formations. These values were inserted
 22 into the Wadi Natuf basin classification framework (Table 3), resulting in Table 4. However, the modelled RC-values
 23 cover only five of the different litho-stratigraphic formations of Wadi Natuf. Thus, for the remaining un-modelled
 24 formations, specific RC-values were assigned by attributing discrete recharge coefficient values to the different
 25 classes of recharge potential, again for each group independently (Table 4). After the empirical work of measurement
 26 and modelling, this last part includes strong conceptual elements of extrapolation and deduction (section 5). The last
 27 step of the recharge analysis (row 4 in Fig. 4) was a comparison of the results of the different groups by summing
 28 up total catchment recharge and under consideration of previous findings on lumped area recharge in the WAB.

29
 30 **Table 2.** Schematic conceptual basin classification framework

		Groups of physical features					
		LU/LC		Soil thickness		Rock lithology	
		Ftn.	Phys. features	Ftn.	Phys. features	Ftn.	Phys. features
High	↑ Classes of recharge potential	a)	Rock	b)	Thin	c)	Karst
		b)	Grassland	a)	Medium	b)	Limestone
		c)	Forest	c)	Thick	a)	Marl
		etc.	etc.	etc.	etc.	etc.	etc.
Low							

31 Note that the order of formations (a, b, c, etc.), differs from group to group, thus indicating different ranking orders of
 32 formations as to their recharge potential (classes) in each group.

33
 34
 35 **Results**

36 **3.3 Basin Classification**

37
 38 This analysis results in a basin classification framework that categorizes different groups of recharge potential and
 39 attributes each formation to one of these classes, shown in Table 3. Each formation is attributed to different classes
 40 of recharge potential (lines) and independently for each “group” of physical features (columns). Hereby, the ranking
 41 order of some of the formations differs from group to group, based on literature and field observations as well as on
 42 conceptual considerations grounded in general physical laws, (see Fig. 2; sections 2 and 3).



1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11
 12
 13

3.4 Regionalisation and extrapolation of modelled RC-values

Using this basin classification framework, it was now possible to extrapolate the results of the parsimonious percolation model and attribute the modelled recharge coefficients to other formations (according to classes of recharge potential, Table 3). To avoid equifinality problems and increase the reliability of the approach, this attribution of RC-values was performed for each group of physical features independently. This approach rests on the assumption that the seven-year observation period fairly represents long-term variability of inter-annual rainfall (see Messerschmid *et al.*, 2019; App. E). Table 4 shows the modelled and the newly attributed and inserted average annual recharge coefficients for each group. In the table, those RC-values, which are directly taken from the model (Messerschmid *et al.*, 2019) were marked in bold font and red colour (in group 2, representing soil thickness).

Table 3. Conceptual basin classification framework, specific for Wadi Natuf

	group 1 - LU/LC		group 2 - soil		group 3 - geology		Increasing recharge potential ↑
	formations	features	formations	feat.	formations	features	
I	u-UBK	cliff = rock outcrops	All, l-LBK, Jer	--	All, l-LBK, Jer	well dev. karst (& gravel)	
II	All, l-LBK, Jer, u-LBK, Heb	olive terraces, rock outcrops	u-UBK , u-LBK	-	u-UBK, u-LBK, Heb	karstified lst / dol	
III	l-UBK, u-Bet	arable but uncultivated, grass- & shrublands	Heb , u-Bet, EQ, l-UBK	±	u-Bet, l-UBK, l-Bet	lst / dol (some marl/chalk) (<i>Nari for u-Bet</i>)	
IV	l-Bet, EQ, l-Yat	mixed, transit. woodlands	l-Bet, l-Yat	+	EQ, l-Yat	mixed lst + marl	
V	u-Yat, Sen, Apt	agric. plains, forests	u-Yat, Sen, Apt	++	u-Yat, Sen, Apt	marl (chalk)	

Note: Left column: classes of recharge potential (I – V); middle columns: groups of phys. features (1-3); formation names as in Table 1; soil thickness increases from thin (--) to thick (++) . The formations shown in bold type were the ones monitored and modelled. The grouping and class distribution was based on field work and literature, e.g. SUSMAQ (2002), LRC (2004), GSI (2001), Keshet and Mimran (1993), Messerschmid (2014) and Messerschmid *et al.* (2018).

Table 4 lists the 15 different outcropping formations in Wadi Natuf in chronological order from the youngest, alluvial series and impermeable Senonian chalks down to the oldest, also impermeable lower Albian – upper Aptian Tammoun shales formation (Messerschmid, 2003a). In between, there are two aquitardal series (Qat, u-Yat) and ten more or less aquiferous formations, almost all of which are partially composed of carbonates (including the unconsolidated carbonate gravels forming the shallow alluvial in the Wadis). However, the recharge coefficients (as fraction of rainfall) of the aquifers deviate by over 15 % between the most susceptible karstic limestones with an RC > 57 % and the more aquitardal series, containing some degree of marl and chalk, be it as discrete thin beds (l-Bet) or as marly and chalky limestones (l-Yat) with an RC of almost 42 %. These high recharge rates are partly due to the much reduced (in fact negligible) rates of runoff generation measured in Wadi Natuf. But more importantly, they are a result of the overall quite modest amounts of actual evapotranspiration, caused by the Mediterranean climate with a rather short but very wet winter season and a prolonged rain-free summer season, in which the dried-up soils cannot offer any amounts of water to direct soil evaporation or plant transpiration, undergoing a kind of summer dormancy.

As described before and applied in the modelling code of the SM-saturation excess and percolation model, the rate of groundwater percolation (here equated with recharge) from the soil into the aquifer bedrocks is directly related to the thickness of the soil. In other words, our model and hence also this table is based on the observation and assumption that thicker soils permit less recharge than thin soil covers. Consequently, the highest RC-values are all found in formations with very thin soils and larger portions of rock outcrops (around soil pockets), such as the Turonian limestones of Jerusalem formation at the top of the regional Upper Aquifer and as the bottom of the regional Lower Aquifer, the lower LBK formation (l-LBK), both of which display highly karstified and massively bedded limestone series with strong features of epikarst in the outcrop (SUSMAQ, 2002). These formations also show the highest recharge coefficients in the physical landscape feature group 3 (geology), due to the



1
 2
 3
 4
 5
 6
 7
 8
 9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

Table 4. Extrapolated recharge coefficients per group

Formation	Wadi Natuf			1. LC/LU		2. Soil		3. Geology	
	Area km ²	Precipitation mcm/a	mm/a	Recharge RC (%)	mm/a	Recharge RC (%)	mm/a	Recharge RC (%)	mm/a
Alluvial	1.53	0.85	553	45.3%	250	57.3%	317	57.3%	317
Senonian	2.38	1.31	552	0.0%	0	0.0%	0	0.0%	0
Jerusalem	9.24	5.07	549	45.3%	249	57.3%	315	57.3%	315
u-Betlehem	7.65	4.26	557	44.7%	249	45.3%	252	49.4%	275
l-Betlehem	9.77	5.58	571	41.8%	239	41.8%	239	49.4%	282
Hebron	10.06	5.77	574	45.3%	260	45.3%	260	54.1%	311
u-Yatta	4.93	2.92	592	0.0%	0	0.0%	0	0.0%	0
l-Yatta	10.18	6.14	603	41.8%	252	41.8%	252	41.8%	252
u-UBK	2.44	1.50	615	54.1%	333	54.1%	333	54.1%	333
l-UBK	8.44	5.26	623	44.7%	279	44.7%	279	49.4%	308
u-LBK	13.16	8.21	624	45.3%	283	54.1%	338	54.1%	338
l-LBK	16.4	10.23	624	45.3%	283	57.3%	358	57.3%	358
Qatannah	4.56	2.80	613	0.0%	0	0.0%	0	0.0%	0
Ein Qiniya	1.82	1.12	613	41.8%	256	45.3%	278	41.8%	256
Tammoun	0.06	0.04	614	0.0%	0	0.0%	0	0.0%	0
SUM / avg.	102.6	61.1	595.3	39.5%	235	43.8%	261	46.0%	274

Note: The modelled RC-values from Messerschmid *et al.* (2019) are indicated in red and bold fonts under the second group (soil conditions). Aquitards void of recharge are shaded grey.


Note again that Wadi Natuf comprises of a main part belonging to the WAB, a smaller Eastern portion (in the mountains) belonging to the groundwater catchment of the EAB and reduced outcrop areas, older than and stratigraphically below the bottom formations of the regional Lower Aquifer in both, WAB and EAB. **Table 5** documents the total recharge in Wadi Natuf (as well as that of the WAB portion only, in brackets and blue colour). The resulting overall area recharge coefficient for the entirety of Wadi Natuf ranges between 39.4 % and 46.1 %, slightly higher for the WAB portion (44.2 % as mean value of the three groups). As can be noted, despite the independent approaches and individual RC-attribution for each group, the final results of average area recharge within the WAB portion match rather closely for each calculation, with 24.1, 26.8 and 28.1 mcm/a, respectively, or in other words, with a deviation of total distributed recharge by less than 10 percent.

The values of the soil-based group (middle column, marked bold) take an intermediate position, close to the arithmetic mean of the three groups. Their values were also used for the recharge map in **Figure 5**. A more detailed translation of the recharge values for different stations into area and aquifer recharge rates is documented in Table A1.

Table 5. Annual average recharge in Wadi Natuf for different groups of landscape features – (WAB only)

Scenario	Unit	Recharge – all Natuf (WAB)		
		Group 1 landform-based	Group 2 soil-based	Group 3 lithology-based
Recharge	(mcm/a)	24.1 (20.6)	26.8 (22.6)	28.1 (23.9)
Catchment area	(km ²)		102.6 (85.5)	
Average precipitation	(mm/a)		595	
Annual recharge rate	(l/m ² /a)	0.23 (0.24)	0.26 (0.26)	0.27 (0.28)
	(mm/a)	234.8 (241.4)	261.4 (264.2)	274.1 (279.8)
Recharge coefficient	(%)	39.4 % (40.8 %)	43.8 % (44.6 %)	46.1 % (47.3 %)

Note: mcm/a = million cubic-metres per year, the blue numbers refer only to the WAB-portion with Wadi Natuf.

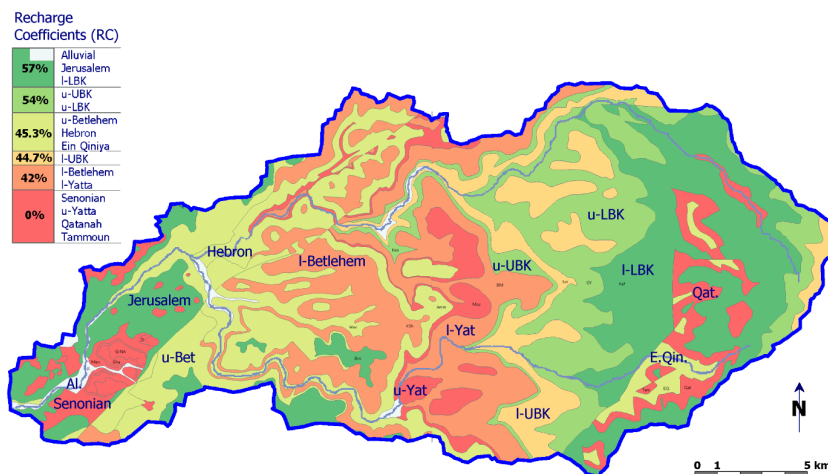

1
 2 **Figure 5.** Recharge map of Wadi Natuf – Recharge Coefficients of the soil-based group 2 (RC-values in % of
 3 annual precipitation)
 4
 5

6 **5 Discussion**

7 **5.1 General approach of process representation**

8
 9 PUB research had previously suggested new ways to describe and estimate distributed basin responses, but mostly
 10 focussed on runoff rather than on recharge and its spatial distribution.

11 Savenije (2010) suggested assigning individual hydrological processes and distinct hydrological functions (e.g.
 12 runoff) to different landscape units by dissecting catchments in a semi-distributed way and according to a
 13 hydrologically meaningful landscape classification metric. Batelaan & de Smedt (2001) accounted for spatial
 14 variation of physical features using a water budget of rain, evapotranspiration and runoff. In Batelaan and de Smedt
 15 (2007) long-term recharge largely depended on soil and LU/LC differences (with parameters based on literature
 16 values). Aish, Batelaan and de Smedt (2010) could not only draw on physical features but also on hydrological basin
 17 response knowledge (water levels) in their water balance model of the Gaza Strip. Several authors used dimensionless
 18 numbers of ‘similarity patterns’ to relate physical form to hydrological impact in basin-wide transfer functions (Berne
 19 *et al.*, 2005; Woods, 2003 and Radulović, 2011). Other authors calibrated parameters of the transfer functions such
 20 as soil properties (Ali *et al.*, 2012) or LU/LC, soil and geology (Göttinger, 2006). Simple soil water models at the
 21 basin scale for daily recharge estimates in moderate climates were used by Dripps *et al.* (2007) and by Finch (2001)
 22 as responses to land cover changes.
 23

24 This study went a step further – combining deductive (conceptual) and inductive (empirical) approaches to determine
 25 spatial variations in groundwater recharge, based on qualitative (dimensionless) and on measured quantitative basin
 26 observations alike. Our distribution into distinct classes of recharge potential, we would like to stress here again,
 27 was an act of attribution and deduction; it was however, firmly grounded in general physical laws, such as permeability
 28 of different lithologies or different forms of land use. Only the second group of soil moisture was empirically
 29 quantified by repeated field measurements in the form of soil depth probing. The results of this empirical survey of
 30 soil depth distribution for different hydrostratigraphical units are documented in the soil depth matrix in
 31 Messerschmid *et al.* (2019), Table D1.
 32

33 Previous authors (Beven, 2000; Hartmann *et al.*, 2013; Seibert, 1999; Hrachowitz *et al.*, 2013) have contended
 34 that a given feature of basin form, such as land use and land cover, soil conditions and lithologies does not translate
 35 directly into one single possible impact of basin behaviour and instead, the hydrologic response of a basin is the
 36 result of an assembly of overlapping processes governed by the interaction of different sets of physical features;
 37 as a consequence several possible sets of combinations of parameters can lead to the same results. Zomlot *et al.*



1 (2015) investigated multicollinearity; they assessed the weight and correlation of recharge controlling factors and
2 found – by order of importance – precipitation, soil texture and vegetation cover to be the most meaningful proxies.
3 Therefore, PUB literature concluded that it is necessary to separately control the different main processes at work
4 rather than simply trying to optimise the exact quantification of employed parameters by ever more sophisticated
5 mathematical models. Such multicollinearity of physical expressions was also clearly observed in Wadi Natuf.
6 This is why we tried to avoid problems of multicollinearity and equifinality by testing three conceptual approaches
7 individually and separately in different groups according to physical basin form (grounded in empirical
8 observation). It should be noted here that this approach was based on general knowledge and understanding of
9 processes that can be observed worldwide; for example, high recharge potential can be attributed to areas with
10 barren rock but also to terraces with tended olive groves, where runoff is inhibited by stone walls, where soils are
11 relatively thin and farmers plough and remove weeds twice a year, which in turn reduces plant transpiration and
12 thus slows down the loss of soil moisture. On the other hand, forests and agricultural plains with thick accumulated
13 soils are known to reduce the infiltration, percolation and hence recharge potential. The same is true for different
14 lithologies of receiving bedrock (like carbonatic, argillaceous and arenitic sediments). Although applicable
15 worldwide in principle, our approach of separately accounting for three land feature groups signals a departure
16 from many of the existing studies in other areas, which probably over-simplified matters by combining and
17 subsuming all types of typical landscape features in one group, which then were split into different classes of basin
18 responses.

19
20 As already mentioned, and by contrast to most earlier studies in the WAB, the focus of our approach was clearly
21 the spatial, not temporal distribution and variability of recharge. This work was based on two assumptions: a) that
22 the seven-year rain period of the SM-percolation model is a fair representation of long-term averages of both inter-
23 annual and seasonal distribution of precipitation (see Messerschmid *et al.*, 2019) and b) that each of the selected
24 SM stations is representative of the entire formation. Here we draw on the above results for the spatial distribution
25 of physical features (Table 2) and soil depth (Table D1 in Messerschmid *et al.*, 2019) of the respective formations.
26 In addition, our results confirmed that the temporal distribution of precipitation – usually as events of several days
27 duration – strongly affects the percolation rates; a modelling frequency of daily steps was found appropriate under
28 the particular climatic conditions of the WAB recharge areas in the Eastern Mediterranean mountainsides.

29
30 As the main aim of our research, we thereby obtained a detailed differentiation of the spatial distribution of
31 recharge with formation-specific recharge coefficients for all formations in Wadi Natuf, which is a representative
32 catchment for the recharge area of the WAB. The results of our three-way conceptual analysis and attribution
33 seemed to suggest that indeed, slightly different results of overall recharge rates follow from the three approaches.
34 However, the relative closeness of the three results, e.g. the total WAB recharge in Wadi Natuf of 24, 26 and 28
35 mcm/a, respectively, did suggest that each of the three independent transfer procedures between basin form and
36 response was a realistic representation of the processes at hand. In other words, instead of producing an apparently
37 precise figure for groundwater recharge, our analysis resulted in a less “exact” but more robust realistic and
38 nonetheless close range of recharge quantifications.

39
40

41 **5.2 Annual RC – overall basin RC – compared with other studies**

42

43 As presented already, the individual recharge coefficients for the different formations cropping out in Wadi Natuf
44 lie between a minimum of 0% (non-recharging formations) and a maximum of 57%. For the WAB portion of Wadi
45 Natuf, the total average recharge for each group was found at 20.6, 22.6 and 23.9 mcm/a, respectively. (This is
46 equivalent to a WAB recharge coefficient of 40.8%, 44.6 % and 47.3 %, respectively, within Wadi Natuf.) These
47 overall recharge values fall well into the range, usually quoted for the WAB (see Table A1). Also compare with
48 the detailed table in Appendix H of Messerschmid *et al.* (2019) that lists the regional and other reported recharge
49 coefficients, both for annual and event-based calculations and together with the methods applied therein. Weiss
50 and Gvirtzman (2007) reported maximum recharge for one outstanding year (1988) as 91 % of annual rainfall at
51 the small Ein Al-Harrasheh catchment on the SE edge of Wadi Natuf (Table H1). Allocca *et al.* (2014) found in
52 the Apennine that for single events, up to 97 % of event precipitation may percolate and arrive as recharge at the
53 groundwater table. Rosenzweig (1972) reported that for pasture and grassland at Mt. Carmel Basin, land form-
54 specific recharge can amount to 60 % of annual precipitation. Our findings of a range between <40 % and >47 %



1 of overall annual recharge coefficients lie well in the middle of reported literature (incidentally, Weiss and
2 Gvirtzman's average RC of 47.2 % for Harrasheh sub-catchment matches exactly with our maximum area RC of
3 47.3 %). By contrast, RC-values determined in recent studies in the Eastern Aquifer Basin at 33 % in the upper
4 slopes (Ries *et al.*, 2015) and 25 % in the lower slopes near the Jordan Valley (Schmidt *et al.*, 2014) ranged
5 somewhat lower; this is according to expectations due to the more arid climatic conditions with less precipitation
6 and higher evaporation rates.

7
8

9 **6 Conclusions**

10

11 This study contributes to the assessment of distributed recharge in a Mediterranean karst area with a pronounced
12 annual rainfall pattern of two seasons (dry and wet) and with a high variability in lithostratigraphy and other related
13 landscape features. In line with the findings of the PUB decade, it was possible to solidly ground our basin
14 classification for dominant recharge processes in observations of the physical form and based on fundamental laws
15 of physics. We found an accentuated spatial variability of percolation fluxes and a strong dependency on three
16 main groups of physical form, namely LU/LC, soil thickness and lithology. For the first time in the WAB, our
17 study used a truly distributed approach for a great variety of different physical land forms by employing extensive
18 direct field observations and intensive multi-seasonal measurements. To extrapolate our findings, we ran three
19 independent sets of basin classification and grouping in classes of recharge potential as observed in our study area.
20

21

22 While our regionalised recharge coefficients originated from plot-scale measurements, the results matched closely
23 with long-term observations reported in the WAB literature. The application, attribution and extrapolation of these
24 coefficients for other, unmonitored formations reflect the ranges of recharge reported in the same region (WAB
25 and environs) by previous studies that used lumped outflow-based basin-wide modelling (without spatial recharge
26 differentiation).

27

28 On the side of spatial differentiation and given the lack of existing hydrological measurements, our approach
29 followed the three-way compromise prescribed by PUB (Beven and Kirkby, 1979) between the advantages of
30 model simplicity, the complex representation of spatial variability of hydrological basin response and the economic
31 limitations on field parameter measurement. This was done by applying the simple cooking recipe of Sawicz *et al.*
32 (2011) for regionalisation in ungauged basins, namely classification (to give names), regionalisation (to transfer
33 information) and generalization (to develop new or enhance existing theory).

34

35 **7 References**

36

- 37 Abusaada, M. J.: Flow Dynamics and Management Options in Stressed Carbonate Aquifer System, The Western Aquifer Basin,
38 Palestine, PhD Thesis, University of Göttingen, 2011, <https://d-nb.info/1042263574/34>, last access: 19 April 2017.
- 39 Aish, A.M., Batelaan, O. and De Smedt, F.: Distributed recharge estimation for groundwater modeling using WetSpa model,
40 case study -Gaza strip, Palestine, *Arabian Journal for Science and Engineering* 35(1), 155, 2010.
- 41 Ali, G., Tetzlaff, D., Soulsby, C., McDonnell, J.J. and Capell, R.: A comparison of similarity indices for catchment
42 classification using a cross-regional dataset, *Advances in Water Resources*, 40, 11-22, 2012.
- 43 Aliewi, A., Bhandary, H., Sabarathinam, C., Al-Qallaf, H.: A new modified chloride mass balance approach based on aquifer
44 properties and other sources of chloride to assess rainfall recharge in brackish aquifers. *Submitted to Hydrological Processes*
45 *for publications*, 2021.
- 46 Allocca, V., Manna, F. and De Vita, P.: Estimating annual groundwater recharge coefficient for karst aquifers of the southern
47 Apennines (Italy), *Hydrol. Earth Syst. Sci.*, 18(2), 803–817, 2014, doi:10.5194/hess-18-803-2014.
- 48 Arheimer, B. and Brandt, M.: Modelling nitrogen transport and retention in the catchments of southern Sweden, *Ambio*, 27(6),
49 471–480, 1998.
- 50 ARIJ: The Palestinian Community Profiles and Needs Assessment, Applied Research Institute Jerusalem - Geographic
51 Information Systems and Remote Sensing Unit; Land Use Analysis, Bethlehem, 2012, <http://vprofile.arij.org/ramallah/>, last
52 accessed: 27 January 2019.
- 53 Bartov, Y., Arkin, Y. A., Lewy, Z. E. and Mimran, Y. A.: Regional stratigraphy of Israel: a guide for geological mapping,
54 (Hebrew), GSI-Report, Geol. Surv. Isr., Tel Aviv, [http://www.gsi.gov.il/uploads/ftp/CurrentResearch/1980/Geology-](http://www.gsi.gov.il/uploads/ftp/CurrentResearch/1980/Geology-Regional-Stratigraphy-300dpi-Cleaned.pdf)
55 [Regional-Stratigraphy-300dpi-Cleaned.pdf](http://www.gsi.gov.il/uploads/ftp/CurrentResearch/1980/Geology-Regional-Stratigraphy-300dpi-Cleaned.pdf), last access: 19 April 2018.



- 1 Batelaan, O. and De Smedt, F.: WetSpa: a flexible, GIS based, distributed recharge methodology for regional groundwater
2 modelling, IAHS Publ., 11(18), 2001.
- 3 Batelaan, O. and De Smedt, F.: GIS-based recharge estimation by coupling surface–subsurface water balances, *J. Hydrol.* 337(3-
4 4), 337-355, 2007.
- 5 Berne, A., Uijlenhoet, R. and Troch, P.A.: Similarity analysis of subsurface flow response of hillslopes with complex geometry,
6 *Water Resources Research* 41, W09410, , 2005, doi:10.1029/2004WR003629.
- 7 Beven, K.J. and Kirkby, M.J.: A physically based, variable contributing area model of basin hydrology, *Hydrological Sciences*
8 *Bulletin* 42(1), 43–69, 1979.
- 9 Beven, K.J.: Uniqueness of place and process representation in hydrological modelling, *Hydrol. Earth Syst. Sci.*, 4(2), 203–
10 213, 2000.
- 11 Bulygina, N., McIntyre, N. and Wheeler, H.: Conditioning rainfall–runoff model parameters for ungauged catchments and land
12 management impacts analysis, *Hydrol. Earth Syst. Sci.*, 13(6), 893–904, 2009.
- 13 Castellarin, A., Galeati, G., Brandimarte, L., Montanari, A. and Brath, A.: Regional flow-duration curves: reliability for
14 ungauged basins, *Advances in Water Resources*, 27(10), 953-965, 2004.
- 15 Dafny, E., Burg, A., and Gvirtzman, H.: Effects of Karst and geological structure on groundwater flow: The case of Yarqon-
16 Taninim Aquifer, Israel, *J. Hydrol.*, 389(3), 260-275. doi: 10.1016/j.jhydrol.2010.05.038, 2010.
- 17 Dafny, E.: Groundwater flow and solute transport within the Yarqon-Taninim aquifer, Israel, Diss. PhD Thesis, Hebrew
18 University of Jerusalem, Israel, 2009.
- 19 Dan, Y., Raz, Z., Yaalon, D.H. and Koyumdjisky, H.: Soil map of Israel 1: 500,000, Ministry of Agriculture, Agricultural
20 Research Organization & Soil Conservation and Drainage Dept., Jerusalem, 1975.
- 21 Dörhöfer, G., and Jesopait, V.: Grundwasserneubildung und ihre Ermittlung – eine Anmerkung zum Beitrag von Höltling:
22 Modellrechnungen zur Grundwasser-neubildung, *Grundwasser*, 2(2), 77-80, doi.org/10.1007/s767-1997-8523-3, 1997.
- 23 Domes, P.F., Tolson, B.A., Davison, B., Pietroniro, A., Pomeroy, J.W. and Marsh, P.: Regionalisation of land surface
24 hydrological model parameters in subarctic and arctic environments, *Physics and Chemistry of the Earth, Parts A/B/C*, 33(17-
25 18), 1081-1089, 2008.
- 26 Dripps, W.R. and Bradbury, K.R.: A simple daily soil–water balance model for estimating the spatial and temporal distribution
27 of groundwater recharge in temperate humid areas, *Hydrogeol. J.*, 15(3), 433-444, 2007.
- 28 ESCWA-BGR: Inventory of shared water resources in Western Asia - Chapter 16 Western Aquifer Basin, UN-ESCWA (United
29 Nations Economic and Social Commission for Western Asia) and BGR (Federal Institute for Geosciences and Natural
30 Resources), Beirut, 23 pp., 2013, <http://waterinventory.org/groundwater/western-aquifer-basin>, last access: 14 May 2018.
- 31 Fetter C.W.: Applied Hydrogeology, Macmillan College Publishing Company, Inc., New York, 1994.
- 32 Finch, J.W.: Estimating change in direct groundwater recharge using a spatially distributed soil water balance model, *Quarterly*
33 *Journal of Engineering Geology and Hydrogeology*, 34(1), 71-83, 2001.
- 34 Franchini, M. and Pacciani, M.: Comparative analysis of several conceptual rainfall–runoff models, *J. Hydrol.*, 122, 161–219,
35 1991.
- 36 Geyer, T., Birk, S., Liedl, R. and Sauter, M.: Quantification of temporal distribution of recharge in karst systems from spring
37 hydrographs, *J. Hydrol.* 348, 452–463, 2008.
- 38 Göttinger, J., Jagelke, J., Barthel, R. and Bárdossy, A.: Integration of water balance models in RIVERTWIN, *Advances in*
39 *Geosciences*, 9, 85-91, 2006.
- 40 GSI: Geological Map of Israel, Sheet 8-III: Lod, Geological Map by: Yechieli, Y., GSI - Geological Survey of Israel, Jerusalem,
41 2008, <http://www.gsi.gov.il/eng/?CategoryID=253&ArticleID=778>, last access: 16 March 2018.
- 42 GSI: Geological Map of Israel, Sheet 8-IV: Ramallah, Geological Map by: Shachnai, E., GSI - Geological Survey of Israel,
43 Jerusalem, 2000, <http://www.gsi.gov.il/eng/?CategoryID=253&ArticleID=777>, last access: 16 March 2018.
- 44 Goldscheider, N. and Drew, D. (eds.): Methods in Karst Hydrogeology, International Contribution to Hydrogeology, IAHS, vol
45 26. Taylor and Francis/Balkema, London, 264 pp., 2007.
- 46 Guttman, J., and Zukerman, H.: Yarqon-Taninim-Beer Sheeba Basin, flow model, Tahal Consult. Eng., Tel Aviv, Israel, 37
47 pp., 1995.
- 48 Hartmann, A., Lange, J., Weiler, M., Arbel, Y., and Greenbaum, N.: A new approach to model the spatial and temporal
49 variability of recharge to karst aquifers, *Hydrol. Earth Syst. Sci.*, 16, 2219–2231, doi:10.5194/hess-16-2219-2012, 2012a.
- 50 Hartmann, A., Kralik, M., Humer, F., Lange, J. and Weiler, M.: Identification of a karst system’s intrinsic hydrodynamic
51 parameters: upscaling from single springs to the whole aquifer, *Environ Earth Sci.*, 65(8), 2377-2389,
52 <http://doi.org/10.1007/s12665-011-1033-9>, 2012b.
- 53 Hartmann, A., Weiler, M., Wagener, T., Lange, J., Kralik, M., Humer, F., Mizyed, N., Rimmer, A., Barberá, J. A., Andreo, B.,
54 Butscher, C., and Huggenberger, P.: Process-based karst modelling to relate hydrodynamic and hydrochemical characteristics to
55 system properties, *Hydrol. Earth Syst. Sci.*, 17(8), 3305-3321, <http://doi.org/10.5194/hess-17-3305-2013>, 2013.
- 56 Hingray, B., Schaefli, B., Mezghani, A. and Hamdi, Y.: Signature-based model calibration for hydrological prediction in
57 mesoscale Alpine catchments, *Hydrol. Sci. J.*, 55(6), 1002-1016, 2010.
- 58 Hrachowitz, M., Savenije, H.H., Blöschl, G., McDonnell J.J., Sivapalan, M., Pomeroy, J.W., Arheimer, B., Blume T., Clark,
59 M.P., Ehret, U. and Fenicia, F.: A decade of Predictions in Ungauged Basins (PUB)—a review, *Hydrol. Sci. J.*, 58(6), 1198-
60 255, 2013.



- 1 Hughes, A. G., Mansour, M. M. and Robins, N. S.: Evaluation of distributed recharge in an upland semi-arid karst system: the
2 West Bank Mountain Aquifer, Middle East, *Hydrogeol. J.*, 16, 845–854, doi:10.1007/s10040-008-0273-6, 2008.
- 3 Jebreen, H., Wöhnlich, S., Wisotzky, F., Banning, A., Niedermayr, A. and Ghanem, M.: Recharge estimation in semi-arid karst
4 catchments: Central West Bank, Palestine, *Grundwasser*, 23(1), 91–101, 2018.
- 5 Keshet, N. and Mimran, Y.: Landuse mapping – Ramallah area, unpublished report in Hebrew, Geological Survey of Israel,
6 GSI/14/93, Jerusalem, 1993. LRC: Land Cover Mapping, unpubl. digital version of satellite imagery based GIS maps (scale
7 1: 150,000),
8 Land Research Center: Land Cover Mapping. Digital version of satellite imagery based GIS maps, scale 1: 150,000, Arab
9 Studies Society - LRC, El-Bireh, unpubl., 2004.
- 10 Lerner D.N., Issar, A.S. and Simmers, I.: Groundwater recharge: A guide to understanding and estimating natural recharge,
11 *International Contributions to Hydrogeology*, Vol. 8, Verlag Heinz Heise, Hannover, 375 pp., 1990.
- 12 Marei, A., Khayat, S., Weise, S., Ghannam, S., Sbaih, M. and Geyer, S.: Estimating groundwater recharge using the chloride
13 mass-balance method in the West Bank, Palestine, *Hydrol. Sci. J.*, 55(5), 780–791, 2010.
- 14 Martínez-Santos, P. and Andreu, J. M.: Lumped and distributed approaches to model natural recharge in semiarid karst aquifers,
15 *J. Hydrol.*, 388 (3–4), 389–398, doi.org/10.1016/j.jhydrol.2010.05.018, 2010.
- 16 Masih, I., Uhlenbrook, S., Maskey, S. and Ahmad, M.D.: Regionalization of a conceptual rainfall–runoff model based on
17 similarity of the flow duration curve: a case study from the semi-arid Karkheh basin, Iran, *Journal of Hydrology*, 391(1–2),
18 188–201, 2010.
- 19 McDonnell, J. J., Sivapalan, M., Vaché, K., Dunn, S., Grant, G., Haggerty, R., Hinz, C., Hooper, R., Kirchner, J., Roderick, M. L., Selker, J.
20 and Weiler, M.: Moving beyond heterogeneity and process complexity: a new vision for catchment hydrology, *Water Resources*
21 *Research*, 43, W07301. doi: 10.1029/2006WR005467, 2007.
- 22 McDonnell, J.J. and Woods, R.: On the need for catchment classification, *J. Hydrol.*, 299, 2–3, 2004.
- 23 Messerschmid, C.: Feedback between societal change and hydrological response in Wadi Natuf, a karstic mountainous
24 watershed in the occupied Palestinian Westbank, *Proc. IAHS*, 364, 261–266, doi.org/10.5194/piahs-364-261-2014, 2014.
- 25 Messerschmid, C., Kalbouneh, A., Zayed, O. and Sayfi, E.: Conceptual Model of Wadi Natuf Groundwater Recharge, Final
26 Report – SUSMAQ-NAT # 64 V 0.3, Prepared by: SUSMAQ TEAM, Palestinian Water Authority, Palestine; Water Resource
27 Systems Research Laboratory, University of Newcastle upon Tyne, UK; November 2003, Ramallah, 2003a.
- 28 Messerschmid, C., Aliewi, A., Kalbouneh, A., Sayfi, E. and Ziada, M.: Field trips to the springs in Wadi Natuf, Final Report –
29 SUSMAQ-NAT # 65 V 0.1, Prepared by: SUSMAQ TEAM, Palestinian Water Authority, Palestine; Water Resource Systems
30 Research Laboratory, University of Newcastle upon Tyne, UK; July 2003, Ramallah, 2003b.
- 31 Messerschmid, C., Lange, J. and Sauter, M.: Assessment of transmission loss in a Mediterranean karstic watershed (Wadi
32 Natuf, West Bank), *Hydr. Proc.*, 32(10), 1375–1390, doi.org/10.1002/hyp.11496, 2018.
- 33 Messerschmid, C., Sauter, M. and Lange, J.: Field-based estimation and modelling of distributed groundwater recharge in a
34 Mediterranean karst catchment, Wadi Natuf, West Bank, *Hydrol. Earth Syst. Sci.*, 24, 1–31, 2020.
- 35 Oudin, L., Kay, A., Andréassian, V. and Perrin, C.: (2010). Are seemingly physically similar catchments truly hydrologically
36 similar?. *Water Resour. Res.*, 46(11), W11558, 2010.
- 37 Pallard, B., Castellarin, A. and Montanari, A.: A look at the links between drainage density and flood statistics, *Hydrol. Earth*
38 *Syst. Sci.*, 13(7), 1019–1029, 2009.
- 39 Parajka, J., Merz, R. and Blöschl, G.: A comparison of regionalisation methods for catchment model parameters. *Hydrology*
40 *and earth system sciences discussions*, 9(3), 157–171, 2005.
- 41 Pomeroy, J.: IAHS Decade for Predictions in Ungauged Basins, PUB – Advances and Prospects, Presentation at IAHS-PUB
42 11 May, 2011, Canmore, Canada, 2011,
43 http://www.usask.ca/hydrology/pub2011/presentations/Pomeroy_PUB2011_Weds11May.pdf, last access: 17 December 2018.
- 44 Radulović, M.M., Stevanović, Z. and Radulović, M.: A new approach in assessing recharge of highly karstified terrains –
45 Montenegro case studies. *Environ Earth Sci.*, 65 (8), 2221–2230, doi.org/10.1007/s12665-011-1378-0, 2011.
- 46 Ries, F., Lange, J., Schmidt, S., Puhmann, H., and Sauter, M.: Recharge estimation and soil moisture dynamics in a
47 Mediterranean, semi-arid karst region, *Hydrol. Earth Syst. Sci.*, 19, 1439–1456, doi.org/10.5194/hess-19-1439-2015, 2015.
- 48 Rofe and Raffety Consulting Engineers: Jerusalem and District Water Supply: Geological and Hydrological Report, Report to
49 the Central Water Authority of the Hashemite Kingdom of Jordan, Rofe and Raffety Consulting Engineers, London,
50 Hashemite Kingdom of Jordan. Central Water Authority, Amman, 1963.
- 51 Rosenzweig, A.: Study of the difference in effects of forest and other vegetative covers on water yield, Final report, Project A-
52 10-FS-13, State of Israel, Ministry of Agriculture, Soil Conservation and Drainage Division Research Unit, Rishon LeTsiyon,
53 Israel, 1972.
- 54 Sanz, E., Menéndez Pidal de Navascués, I. and Távora, C.: Calculating the average natural recharge in large areas as a factor
55 of their lithology and precipitation, *Hydrol. Earth Syst. Sci. Discuss.*, 8, 4753–4788, doi:10.5194/hessd-8-4753-2011, 2011.
- 56 Savenije, H.H.G.: Topography driven conceptual modeling, FLEX-Topo. *Hydrol. Earth Syst. Sci.*, 14, 2681–2692, 2010.
- 57 Sawicz, K.A., Wagener, T., Sivapalan, M., Troch, P.A. and Carrillo, G.: Catchment classification: empirical analysis of hydrologic
58 similarity based on catchment function, *Hydrol. Earth Syst. Sci.* 15(9), 2895–2911, 2011.
- 59 Scanlon, B.R., Keese, K.E.A., Flint, L., Flint, L.E., Gaye, C.B., Edmunds, W.M. and Simmers, I.: Global synthesis of
60 groundwater recharge in semiarid and arid regions, *Hydrol. Proc.*, 20(15), 3335–3370, doi:10.1002/hyp.6335, 2006.



- 1 Schmidt, S., Geyer, T., Guttman, J., Marei, A., Ries, F., and Sauter, M.: Characterisation and modelling of conduit restricted
2 karst aquifers – example of the Auja spring, Jordan Valley, *J. Hydrol.*, 511, 750–763, 2014.
- 3 Schmidt, S., Geyer, T., Marei, A., Guttman, J., Sauter, M., 2013. Quantification of long-term wastewater impacts on karst
4 groundwater resources in a semi-arid environment by chloride mass balance methods. *Journal of Hydrology* 502, 177–190.
- 5 Seibert, J.: Regionalisation of parameters for a conceptual rainfall-runoff model. *Agricultural and forest meteorology*, 98, 279–
6 293, 1999.
- 7 Sheffer, N.A., Dafny, E., Gvirtzman, H., Navon, S., Frumkin, A., and Morin, E.: Hydrometeorological daily recharge
8 assessment model (DREAM) for the Western Mountain Aquifer, Israel: Model application and effects of temporal patterns,
9 *Water Resour. Res.*, 46, W05510, doi:10.1029/2008WR007607, 2010.
- 10 Sheffer, N.A.: Variable scale recharge measurement and modeling using the hydrometeorological DREAM, Ph.D. dissertation,
11 Hebrew Univ. of Jerusalem, Israel, 97 pp., 2009.
- 12 Sivakumar, B., Singh, V.P., Berndtsson, R. and Khan, S.K.: Catchment classification framework in hydrology: challenges and
13 directions. *Journal of Hydrologic Engineering* 20(1), A4014002, 2013, DOI:10.1061/(ASCE)HE.1943-5584.0000837.
- 14 Sivapalan, M., Takeuchi, K., Franks, S.W., Gupta, V.K., Karambiri, H., Lakshmi, V., Liang, X., McDonnell, J.J., Mendiondo,
15 E.M., O'Connell, P.E., Oki, T., Pomeroy, J.W., Schertzer, D., Uhlenbrook, S. and Zehe, E.: IAHS Decade on Predictions in
16 Ungauged Basins (PUB), 2003–2012: Shaping an exciting future for the hydrological sciences, *Hydr. Sci. J.*, 48(6), 857–880,
17 DOI:10.1623/hysj.48.6.857.51421, 2003a.
- 18 Sivapalan, M., Blöschl, G., Zhang, L. and Vertessy, R.: Downward approach to hydrological prediction, *Hydrol. Processes*,
19 17(11), 2101–2111, 2003b.
- 20 SUSMAQ: Boundaries of the Western Aquifer Basin and the Eocene Aquifer in the Northeastern Aquifer Basin, SUSMAQ-MOD
21 Report No. # 6.1 V1.0, The Sustainable Management for the West Bank and Gaza Aquifers, Palestinian Water Authority and
22 University of Newcastle upon Tyne, UK, Ramallah, Palestine, 56 pp., 2001,
23 http://www.hwe.org.ps/Projects/SUSMAQ_Reports/FlowModeling/Boundaries.pdf, last access: 2 April 2015.
- 24 SUSMAQ: Compiled Base Data for the Numerical Groundwater Flow Model of the Western Aquifer Basin. Volume 1 - General
25 Background, SUSMAQ-MOD Report No. #07 V0.4, The Sustainable Management for the West Bank and Gaza Aquifers,
26 Palestinian Water Authority and University of Newcastle upon Tyne, UK, Ramallah, Palestine, 306 pp., 2002.
- 27 Weiss, M. and Gvirtzman, H.: Estimating ground water recharge using flow models of perched karstic aquifers, *GroundWater*,
28 45, 761–773, 2007.
- 29 Weiss, M. and Gvirtzman, H.: Estimating ground water recharge using flow models of perched karstic aquifers, *GroundWater*,
30 45, 761–773, 2007.
- 31 Winsemius, H.C., Schaefli, B., Montanari, A. and Savenije, H.H.G.: On the calibration of hydrological models in ungauged
32 basins: A framework for integrating hard and soft hydrological information, *Water Resources Research*, 45(12), 2009.
- 33 Woods, R.A.: Seeing catchments with new eyes, *Hydrological Processes*, 16(5), 1111–1113, 2002.
- 34 World Bank: West Bank & Gaza: Assessment of Restrictions on Palestinian Water Sector Development, , Washington D.C.,
35 <https://unispal.un.org/pdfs/47657-GZ.pdf>, 2009.
- 36 Yadav, M., Wagener, T. and Gupta, H.: Regionalization of constraints on expected watershed response behavior for improved
37 predictions in ungauged basins, *Advances in Water Resources*, 30(8), 1756–1774, 2007.
- 38 Zomlot, Z., Verbeiren, B., Huysmans, M. and Batelaan, O.: Spatial distribution of groundwater recharge and base flow:
39 Assessment of controlling factors, *J. Hydrol. Reg. Stud.*, 4, 349–368, doi.org/10.1016/j.ejrh.2015.07.005, 2015.

APPENDIX

45 Table A1 below lists the detailed results of the regionalization of RC-values for individual formations (see also Table 4) and
46 independently for each group of physical features. The table refers to the entire catchment, including WAB, EAB and the
47 erosion zone between the two. The arithmetic mean of the results of all three physical feature groups is indicated in the column
48 to the right. The ranges of recharge coefficient for individual formations lay between 57% and 0% of annual rainfall, each
49 depending on the individual land use, geology and soil type conditions of the formation. The order of formations in this table
50 is listed as groups of differing aquifer potential (second column from the left), from the very permeable and productive regional
51 aquifers reaching, in average of all three physical feature groups to over 50% RC (strong blue) down to in average 42% RC for
52 the weak, somewhat aquitardal local aquifers (brown fonts). The aquitards are assumed as impermeable and contributing no
53 recharge. The relative weight of recharge of each aquifer type group is indicated under “group fraction”, indicating the
54 contribution of each group of respective aquifer types between almost 60% (regional aquifers) and only 10% (weak aquifers)
55 of total recharge, summing up to 100%.

56 The average of total area recharge in Wadi Natuf as arithmetic mean of the three physical landscape feature groups lies at 43.1
57 %. It should be noted that although the regionalisation was performed for each group of physical features independently, the
58 differences in individual formations equal out to very similar overall recharge rates of approximately 27 ± 2 mcm/a (or as
59 percentage, between 39% and 46%), as average over the seven-year measurement and modelling period.



Table A1. Recharge of all formations and aquifer groups in all of Wadi Natuf, detailed by groups of physical features (as coefficients and annual recharge rates)

For- mation	Aquifer Group	Area km ²	Ø P mcm/a	RC (%)		Recharge (mcm/a)		Group Rech. (mcm/a)		Group fraction (%)		Group RC, Natuf (%)		Ø RC (%) ± Natuf
				LU/LC	Soil	LU/LC	Soil	LU/LC	Soil	LU/LC	Soil	LU/LC	Soil	
All	Alluvial	1.5	0.8	45.3%	57.3%	0.4	0.5	0.4	0.5	1.6%	1.8%	45.3%	57.3%	53%
I-LBK	Strong	16.4	10.2	45.3%	57.3%	4.6	5.9	4.6	5.9					
Jerus	Regional	9.3	5.1	45.3%	57.3%	2.3	2.9	13.3	15.8	55.1%	59.1%	45.3%	54.0%	52%
u-LBK	Aquifer	13.2	8.2	45.3%	54.1%	3.7	4.4							
Heb		10.1	5.8	45.3%	45.3%	2.6	3.1							
u-UBK	Inter- mediate	2.4	1.5	54.1%	54.1%	0.8	0.8	7.4	7.4	30.7%	27.7%	44.6%	44.7%	46%
I-UBK		8.4	5.3	44.7%	49.4%	2.4	2.4							
u-Bet	Aquifer	7.7	4.3	44.7%	49.4%	1.9	1.9							
I-Bet		9.8	5.6	41.8%	41.8%	2.3	2.3							
E.O.	Weak	1.8	1.1	41.8%	41.8%	0.5	0.5	3.0	3.1	12.6%	11.5%	41.8%	42.3%	42%
I-Yat	Aquifer	10.2	6.1	41.8%	41.8%	2.6	2.6							
Senon		2.4	1.4											
Qat	Aquitard	4.6	2.7	0%	0%	0	0	0	0	0%	0%	0%	0%	0%
Tam		0.1	0.03											
u-Yat		4.9	2.9											
Total		102.6	61.1	39.4%	43.9%	24.1	26.8	24.1	26.8	100%	100%	39.4%	43.9%	43.1%

Note that the above values are surface catchment based, including both, WAB and EAB. The table indicates the outcrop area of each formation in Wadi Natuf and the respective area rainfall (here taken as area average and seven-year average for the sake of comparison)