

1 A Framework for Irrigation Performance Assessment Using 2 WaPOR data: The case of a Sugarcane Estate in Mozambique

3 Abebe D. Chukalla^a, Marloes L. Mul^a, Pieter van der Zaag^{a,b}, Gerardo van Halsema^c, Evaristo Mubaya^d,
4 Esperança Muchanga^e, Nadja den Besten^{f,b}, and Poolad Karimi^a

5 ^a The Department of Land and Water Management, IHE Delft Institute for Water Education, 2611 AX,
6 Delft, The Netherlands

7 ^b Water Management Department, Delft University of Technology, 2600 AA, Delft, The Netherlands

8 ^c Water Resources Management Group, Wageningen University & Research, 6700 AA, Wageningen,
9 the Netherlands

10 ^d Xinavane Estate, Xinavane, Mozambique

11 ^e Afri-Food Inclusive Value Chain Development Programme (PROCAVA) - FDA, Maputo, Mozambique

12 ^f VanderSat B.V., Agri, Food and Commodity Unit, Wilhelminastraat 43a, 2011VK Haarlem, the
13 Netherlands

14 Correspondence to: Abebe D. Chukalla (a.chukalla@un-ihe.org)

15 Abstract

16 The growing competition for the finite land and water resources and the need to feed an ever-growing
17 population requires new techniques to monitor the performance of irrigation schemes and improve land
18 and water productivity. Datasets from FAO's portal to monitor Water Productivity through Open access
19 Remotely sensed derived data (WaPOR) is increasingly applied as a cost-effective means to support
20 irrigation performance assessment and identifying possible pathways for improvement. This study
21 presents a framework that applies WaPOR data to assess irrigation performance indicators including
22 uniformity, equity, adequacy and land and water productivity differentiated by irrigation method (furrow,
23 sprinkler and centre pivot) at the Xinavane sugarcane estate, Mozambique. The WaPOR data on water,
24 land and climate is near-real-time and spatially distributed, with the finest spatial resolution in the area
25 of 100m. The WaPOR data were first validated agronomically by examining the biomass response to
26 water, then the data was used to systematically analyse seasonal indicators for the period 2015 to 2018
27 on ~8,000 ha. The WaPOR based yield estimates were found to be comparable to the estate-measured
28 yields with $\pm 20\%$ difference, root mean square error of 19 ± 2.5 ton/ha and mean absolute error of 15 ± 1.6
29 ton/ha. A climate normalization factor that enables the spatial and temporal comparison of performance
30 indicators are applied. The assessment highlights that in Xinavane no single irrigation method performs
31 the best across all performance indicators. Centre pivot compared to sprinkler and furrow irrigation
32 shows higher adequacy, equity, and land productivity, but lower water productivity. The three irrigation
33 methods have excellent uniformity (~ 94%) in the four seasons and acceptable adequacy for most
34 periods of the season except in 2016, when a drought was observed. While this study is done for
35 sugarcane in one irrigation scheme, the approach can be broadened to compare other crops across
36 fields or irrigation schemes across Africa with diverse management units in the different agro-climatic
37 zone within FaO WaPOR coverage. We conclude that the framework is useful for assessing irrigation
38 performance using the WaPOR dataset.

39 **Keywords:** irrigation performance indicators; water productivity; remote sensing; Africa; sugarcane

Deleted:

41

42 1. Introduction

43 Increasing agricultural production to feed the growing global population can be achieved through either
 44 expanding agricultural land or by increasing productivity of the existing agricultural areas. With growing
 45 competition and scarcity of the finite water and land resources, and the environmental and social costs
 46 of expanding agricultural land (Hess et al., 2016), improving irrigation performance indicators including
 47 land and water productivity has a clear preference.

Deleted: land and water

48 The increasing global demand for sugar is also reflected in the steady increase in sugarcane production
 49 in Mozambique at an average annual rate of 10 percent (FAO, 2019). The majority of this increase
 50 comes from expanding agricultural land (Hess et al., 2016). Whilst Moraes et al. (2018) estimate there
 51 is a vast potential for expanding sugarcane production in Mozambique (~ 15% of the land area is
 52 suitable for sugarcane production), the water and land resources in the country are under increasing
 53 strain due to land degradation (Sutton et al., 2016), sectoral competition and climate effects (e.g.
 54 drought and flood) (Van der Zaag and Carmo Vaz, 2003; Arndt et al., 2011). With the land productivity
 55 well below the global average (Binswanger-Mkhize and Savastano, 2017; Nkamleu, 2013), and
 56 amongst the lowest in the Southern African region (Johnson et al., 2014), there is an opportunity to
 57 meet the demand without expanding the agricultural land. Thus, raising sugarcane productivity per unit
 58 of land and water on existing croplands needs to be explored by conducting irrigation performance
 59 assessment.

60 Monitoring irrigation performance indicators is key to check the general health, compare the spatial and
 61 temporal performances of the scheme, and to look for causes and provide corrective action that aims
 62 at improving overall service provision and productivity (Molden et al., 1998; Bos et al., 2005). The
 63 traditional irrigation performance assessment considers indicators that can be categorised as (i) water
 64 balance, water service and maintenance, (ii) environment, and (iii) economic indicators. The water
 65 balance, water service and maintenance indicators are water fluxes and production based indicators.
 66 The water delivery and production based indicators include uniformity (evenness of water distribution
 67 within fields), equity (uniformity of water distribution between fields), adequacy (sufficiency of irrigation
 68 delivery, compared to the requirement), land productivity (production per unit area), water productivity
 69 (production per unit water use) and efficiency (the fraction of productive water use) (Molden and Gates,
 70 1990; Bos, 1997; Molden et al., 1998). These irrigation performance indicators were assessed using
 71 field data such as flow (discharge), crop yield, and plot level water consumption estimate using lysimeter
 72 or crop model (Araya et al., 2011; Dejen, 2015; Edreira et al., 2018).

Deleted: that

Deleted: crop

Deleted: water use

Deleted: water

Deleted: ¶
Whilst in the past, t

Deleted: use

Deleted: over a farm

Deleted: ,

Deleted: r

73 Recent developments and improvements of remote sensing (RS) products offer a viable alternative
 74 (Bastiaanssen et al., 1996; Karimi et al., 2011). RS-derived data have been increasingly applied as a
 75 cost-effective means for irrigation performance assessment. The RS derived irrigation performance
 76 assessment are based on production and actual water consumption, which the latter is fairly considered
 77 as the net outcome and result of effective rainfall and irrigation, allowing a hydrological assessment and
 78 quantification of the net water abstracted by irrigated crops. In addition, it provides spatially distributed
 79 data, covers long periods and wide areas and can be done retrospectively (Bastiaanssen et al., 1996;
 80 Karimi et al., 2011). Field data, in contrast, does not represent well the spatial variation across an
 81 irrigation system and is costly to obtain (Bastiaanssen et al., 2000). The traditional and RS-based
 82 performance assessments are complementary as the former has strength in observing the horizontal
 83 water fluxes such as discharges while the latter has strength in observing high resolution vertical water
 84 fluxes and biomass production.

85 Earlier studies provide insight into the application of RS-derived data to assess irrigation performance
 86 indicators. In this research, the earlier RS-based irrigation performance assessment studies are

98 strengthened by considering a simple consistency check to validate the RS-derived data for established
99 biomass response to water consumption (Steduto and Albrizio, 2005) and by introducing a
100 comprehensive framework that guide the step by step translation of RS-derived datasets into irrigated
101 agricultural performance indicators. In addition, the current study introduces a climate normalization
102 factor that enables the spatial and seasonal comparison of irrigation performance indicators. The
103 climate normalization is applied to distinguish climatic factors from agricultural management factors in
104 their effect on irrigation performance.

105 This study first evaluates the WaPOR data for consistency based on the established agronomic
106 principle (biomass response to water consumption). It is then used to develop a framework to assess
107 irrigation performance indicators, including adequacy, uniformity, equity and land and water
108 productivity. This framework is then used to assess the irrigation performance at Xinavane sugarcane
109 estate differentiated by irrigation method.

110

111 2. Materials and Methods

112 2.1. Study area


113 The study focusses on one of the largest sugarcane estates in Maputo province in Mozambique, the
114 Xinavane estate. The estate is located on the banks of the Incomati River, approximately 136 km
115 northwest of Maputo. This region is characterized by optimal conditions for sugarcane production in
116 terms of climate, soils and water availability. With a seasonal long-term average precipitation of 721
117 mm/year (den Besten et al., 2020), the sugarcane production requires irrigation water especially during
118 the dry season, supplied by the Incomati river.

119 The most important water infrastructure in the Incomati Basin in Mozambique is the Corumana Dam,
120 which was built for improving flood control, regulating downstream irrigation abstractions (including
121 Xinavane) and hydropower production (de Boer and Droogers, 2016). Xinavane sugarcane estate,
122 despite receiving allocations from the dam, remains largely vulnerable to climate variability. During a
123 recent drought in 2016, reservoir levels in the Corumana Dam dropped drastically and little water was
124 available for irrigation in the Xinavane sugarcane estate. This resulted in a significant reduction in
125 sugarcane production in 2016 compared to previous years (Tongaat Hullet, 2018). Such events are
126 expected to continue to occur. To partially address this, Mozambique put drought mitigation measures
127 in place for the Xinavane area, including the construction of the new Moamba Major Dam (760 Mm³)
128 and the heightening of the Corumana Dam wall, which will result in a capacity increase from 879 Mm³
129 to 1,260 Mm³ (Tongaat Hullet, 2018).

130 The widely used irrigation methods at the Xinavane sugarcane estate are furrow, overhead sprinkler
131 (hereinafter referred to as sprinkler) and centre pivot irrigation (Figure 1). A total of 8,027 ha categorized
132 into 387 georeferenced fields and three irrigation application methods are considered in our analysis.
133 Furrow, sprinkler and centre pivot irrigation cover 3,343 ha, 3,629 ha and 1,055 ha, respectively. The
134 average field size under furrow, sprinkler and centre pivot irrigation methods is 17 ha, 18.3 ha and 55.8
135 ha, respectively. All fields in the sample are operated and managed by the estate; fields operated by
136 out-growers were excluded from the analyses.

Formatted: Font: 10 pt, Not Italic

Deleted: Figure 1

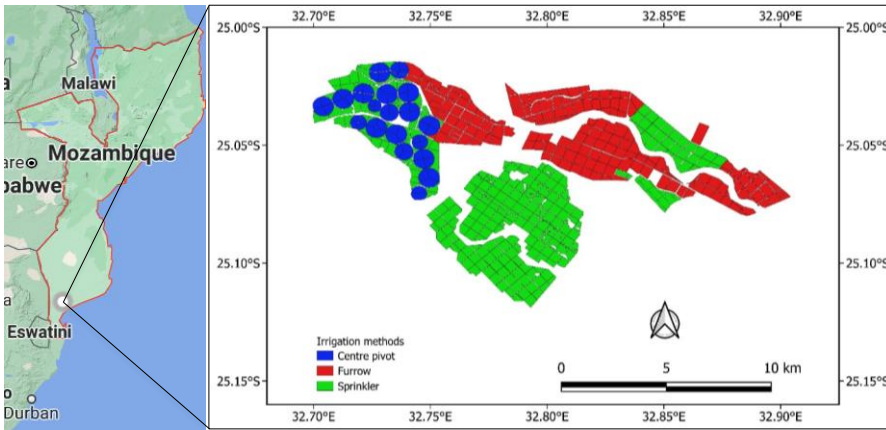

138

139 *Figure 1. Irrigated areas (estate operated) with different application methods at Xinavane sugarcane estate,*
 140 *Mozambique showed in the map of Mozambique (Map data ©2021 Google, AfriGIS(Pty) Ltd)*

141

2.2. WaPOR datasets

142

143 Datasets from FAO's portal to monitor Water Productivity through Open access Remotely sensed
 144 derived data (WaPOR; URL: https://wapor.apps.fao.org/home/WAPOR_2/1) are used for the analyses
 145 as it provides the required layers to estimate both land and water productivity. The database covers
 146 Africa and the Near East regions in near real-time for the period between 2009 to date (2021) (FAO,
 147 2020c). WaPOR datasets are available at the continental scale (Level 1 at 250 m), country (Level 2 at
 148 100 m) and project level (Level 3 at 30 m). The latest WaPOR version (WaPOR v2.1) is an improvement
 149 from WaPOR v1.0 following the quality assessments by IHE Delft and ITC (Mul and Bastiaanssen,
 150 2019; FAO, 2020a). The methodology used for compiling the actual evapotranspiration of WaPOR is
 151 based on the ETLook method (Bastiaanssen et al., 2012) and further developed by the FRAME
 152 consortium (the full description of the methodology is provided in FAO (2020b)). WaPOR v2.1 was
 153 found suitable for inter-plot comparison of irrigation performance indicators for plots larger than 2 ha
 154 (Blatchford et al., 2020).

155 At Xinavane, the finest resolution of the WaPOR data is 100 m (Level 2). The WaPOR Level 2 datasets
 156 used in this study include layers for actual evaporation (E), transpiration (T), and net primary production
 157 (NPP) at a dekadal (10-day) timescale. In addition, daily precipitation at 5 km resolution, daily reference
 158 evapotranspiration at 20 km resolution, and annual land cover classification (LCC) at 100 m resolution
 159 were used. The precipitation (P) and reference evapotranspiration (RET) datasets were resampled to
 160 100 m resolution using the nearest neighbour resampling techniques (GDAL, 2021). An overview of the
 161 WaPOR data used in the analyses is presented in Table 1.

162 Although there is a continuous WaPOR L2 dataset (100 m) available from 2009 to date (2021), only the
 163 data from 2014 is derived that stems from the PROBA-V satellite. The data prior to 2014 is derived from
 164 resampled L1 (250m) data which is obtained from the MODIS satellite. Since this creates a discontinuity
 165 in the data as observed by Chukalla et al. (2020b), the pre 2014 data has been discarded in this analysis
 166 and only data starting from the 2014-2015 growing season onwards has been selected.

167 *Table 1: The WaPOR layers used for the analyses*

Deleted: 5

Formatted: Font: Italic

Deleted: ref

Formatted: Font: Italic

WaPOR layer	Spatial resolution	Temporal resolution (coverage)
Evaporation (E)	100 m	
Transpiration (T)	100 m	
Net primary production (NPP)	100 m	Dekadal (2014-2018)
Precipitation (P)	5 km	
Reference evapotranspiration (RET_r)	20 km	
Land cover classification (LCC)	100 m	

170

171

172

2.3. A framework for assessing irrigation performance using WaPOR data

173

174

175

176

177

178

179

180

181


182

183

184

185

Figure 2 shows the flowchart describing the approach to assess WaPOR based irrigation performance indicators at the Xinavane sugarcane estate. Irrigation performance indicators are derived from WaPOR and field data in three main steps. First, actual evapotranspiration ($ET_a = E+T$), reference evapotranspiration (RET_r) and net primary production (NPP) layers of FAO WaPOR are pre-processed to match the spatial resolution, remove non-crop pixels and undergo a quality check. Second, the seasonal ET_a ($ET_{a,s}$), seasonal potential evapotranspiration ($ET_{p,s}$) and seasonal NPP (NPP_s) are calculated from their respective WaPOR layers between the start of the season (SOS) and end of the season (EOS) for each plot. $ET_{p,s}$ is derived from RET_r and crop coefficient (K_c). Finally, the irrigation performance indicators are analysed. At this stage, NPP_s is translated to above-ground biomass (hereafter referred to as biomass (B)) using crop specific information (above over total biomass (AOT), light use efficiency correction factor (f_c) and moisture content of fresh biomass (m_c)). The biomass is multiplied by harvest index (HI) to derive the crop yield. The remainder of this section describes in more detail the input data and equations used in each step.

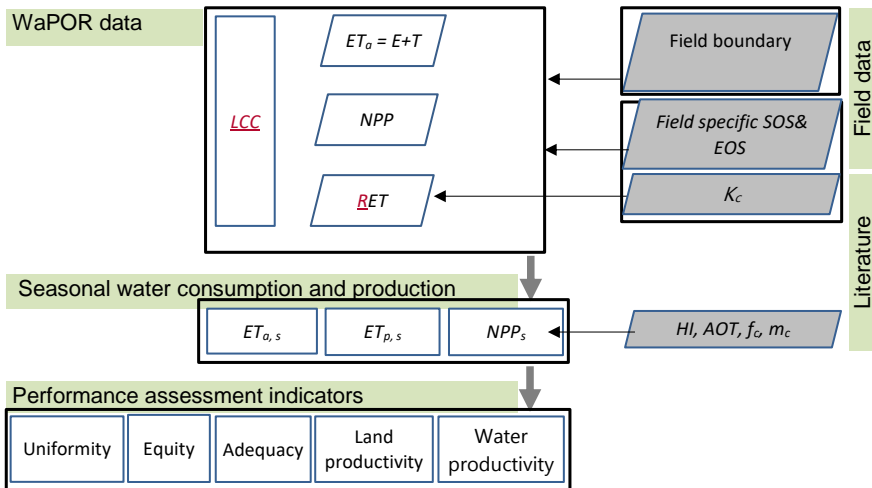

186

187

Figure 2. Schematic representation of WaPOR based Irrigation performance assessment framework

Deleted: ref

Deleted: 5

Formatted Table

Formatted: Font: 10 pt, Not Italic

Deleted: Figure 2

Formatted: Font: Italic

Deleted: ref

Formatted: Font: Italic

Deleted: ref


Formatted: Not Superscript/ Subscript

193

194 2.3.1. Seasonal water consumption and crop yield

195 Growing season

196 The sugarcane estate operates on a ratooning system. Thus, the start of the growing season (one day
 197 after harvesting) and end of season (next year's harvesting date) varies per field. The actual growing
 198 period of each field was used to calculate the production per unit of land and per unit of water consumed.
 199 The average length of the growing season is 347 ± 32 days. This study covers four growing seasons:
 200 season 1 (2014/2015), season 2 (2015/2016), season 3 (2016/2017) and season 4 (2017/2018)
 201 reported as 2015, 2016, 2017 and 2018, respectively, i.e. the year the fields are harvested (Figure 3).

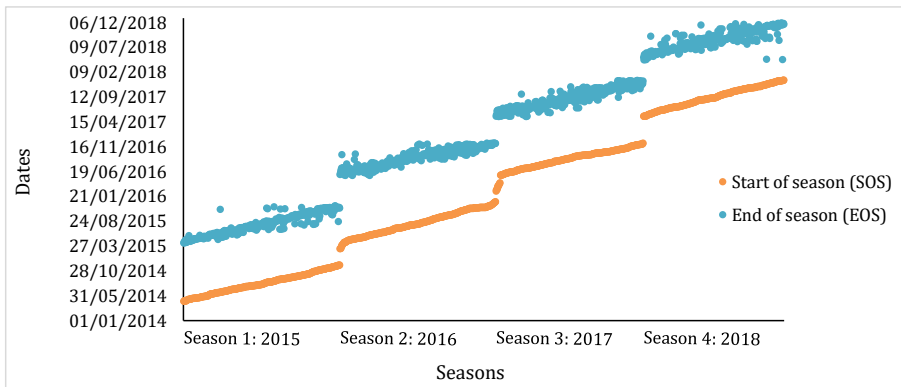

202
 203 *Figure 3. The start and end of season for individual fields for the four growing seasons at Xinavane estate*

204 Seasonal water consumption

205 Actual water consumption refers to the amount of water that is depleted from the root zone through the
 206 process of transpiration by a crop and direct evaporation from the soil represented by WaPOR $E + T$
 207 (ET_a). The seasonal ET_a is the total actual water consumption during the cropping season.

208

209 Crop yield

210 The season NPP layer from WaPOR, accumulated over the crop growing period (Figure 3), is converted
 211 to above-ground biomass (B) in kg/ha and crop yield (Y) in kg/ha using Equation 1 and 2 (Mul and
 212 Bastiaanssen, 2019):

$$B = AOT * f_c * \frac{NPP * 22.222}{(1 - m_c)} \quad \text{Equation 1}$$

214 where m_c is the moisture content of the fresh biomass, f_c is the light use efficiency (LUE) correction
 215 factor calculated by dividing the LUE of the crop (in this case sugarcane) by the LUE of a generic crop
 216 type that WaPOR NPP layer uses (2.7 MJ/g biomass; FAO (2018) and FAO (2020b)), and AOT is the
 217 ratio of above ground over total biomass. The B and Y can be expressed in in ton/ha , by dividing the in
 218 kg/ha by a 1,000. Crop yield is calculated by multiplying the biomass by the harvest index (HI):

Deleted: Figure 3

Formatted: Font: 10 pt, Not Italic

Commented [MM1]: I see later on you use kg/ha, whatever it is lets be consistent.

Deleted:

Deleted:

Deleted:

Deleted:

224

225

$$Y = B * HI \quad \text{Equation 2}$$

226

227 In absence of field data, literature was consulted to estimate these crop parameters. Table 2 presents
228 the values and the source of the parameters.

229

230 *Table 2: Parameters used in the biomass and yield analyses of sugarcane*

Parameter	Description	Value	Source
m_c	Moisture content of fresh crop biomass	59%	Yilma, 2017; Mul and Bastiaanssen, 2019
f_c	Light use efficiency correction factor	1.6	Villalobos and Fereres, 2016
AOT	The ratio of above ground over total biomass (AOT)	1	FAO, 2020c
HI	Harvest index	1	FAO, 2020c

231

232 The WaPOR based sugar cane yield was validated with sugarcane yields as measured by the Xinavane
233 estate for four seasons on 387 fields. In addition, the WaPOR based biomass and water consumption
234 were checked for consistency with agronomic principles. An increasingly strong linear relationship is
235 expected between biomass and evapotranspiration (Steduto and Albrizio, 2005), between biomass and
236 transpiration (De Wit, 1958), and between biomass and normalized transpiration (Steduto and Albrizio,
237 2005), whereby the normalized transpiration is the sum of the daily ratio of transpiration over reference
238 evapotranspiration over the crop season (Steduto et al., 2007).

239

240 2.3.2. Performance assessment indicators

241 The irrigation performance indicators selected for this study are uniformity, equity, adequacy and
242 productivity, these were selected as these could be assessed (sometimes with a slight modification)
243 using the WaPOR data. These performance indicators are further explained below, and the set of
244 equations for water consumption based performance indicators are presented in Table A1.

245 Uniformity measures the evenness of water consumption within an irrigated field. It is calculated by
246 assessing the coefficients of variation (CV) of seasonal ET_a within a field. Thus, uniformity is one minus
247 the CV (Ascough and Kiker, 2002). It serves as a measure for the heterogeneity of soil water storage
248 capacity and thus water storage efficiency in a field. It can serve as a proxy for irrigation distribution
249 uniformity (Burt et al., 1997) in farms where the management is central and consistently the same level
250 of inputs are applied (e.g. variable rate input application in not practices). Other factors like soil type,
251 fertility, pest, crop variety can also affect actual water consumption and thus uniformity. Thus, CV of
252 seasonal ET_a indicates the combined effect of all factors (water, fertility, pests, diseases, salinity).

253 According to Pitts et al. (1996), the acceptable standard uniformity of irrigation application distribution
254 for centre pivot, sprinkler, drip and furrow irrigation methods are 75%, 75%, 85% and 65%, respectively.
255 The distribution uniformity exceeding the standard threshold is considered excellent.

Deleted: , and serves as a proxy for irrigation distribution uniformity (Burt et al., 1997).

Formatted: Font: Italic

Formatted: Font: Italic, Subscript

Commented [MM2]: Please ignore if removing the spaces is not in line with the journal's standard, but I like to see the percentages without the space

Deleted:

Deleted:

Deleted:

Deleted:

262 Equity measures the evenness of water consumption between fields within an irrigation scheme with a
263 homogenous crop, which could be a proxy for an even distribution of water to the different irrigated fields.
264 It is calculated as the CV of the average ET of each field, which is an indication of equity in the scheme.
265 A CV of 0 to 10% is defined as good equity, CV of 10 to 25% as fair equity and CV > 25% as poor equity
266 (Bastiaanssen et al., 1996; Karimi et al., 2019).

Deleted:

Deleted:

Deleted:

267 Adequacy (A) is the measure of the degree of agreement between the actual water use and crop water
268 requirement (Bastiaanssen and Bos, 1999; Clemmens and Molden, 2007). Adequacy is estimated as
269 the ratio of seasonal ET_a over seasonal potential evapotranspiration ($ET_{p,s}$) (Kharrou et al., 2013; Karimi
270 et al., 2019). The seasonal $ET_{p,s}$ is aggregated from the monthly value of crop coefficient of sugarcane
271 (Table A2) times the reference evapotranspiration (Allen et al., 1998). Good adequacy performance is
272 defined for the range of $0.8 < A \leq 1$, acceptable range $0.68 < A \leq 0.8$ and poor performance $A \leq 0.68$
273 (Karimi et al. 2019).

274 Productivity is a measure of benefit generated per unit of resource used. The benefit could be
275 biophysical, economic and/or social; the resource base could be consumed or supplied water or land
276 covered by the crop (Zwart and Bastiaanssen, 2004; Hellegers et al., 2009; Karimi et al., 2011). This
277 study focussed on biophysical production per unit of land or evapotranspiration, also known as land and
278 water productivity.

279 Land productivity is defined as biomass production or crop yield per unit of land. For water, we similarly
280 distinguish biomass water productivity (WP_b) and crop yield water productivity (WP). WP_b is defined as
281 the ratio of biomass over seasonal $ET_{a,s}$, whereas WP is defined as the yield over $ET_{a,s}$. Since for
282 sugarcane we use a harvest index of 1, WP_b is here equal to WP .

283 Spatial-temporal variations can be caused by both management practices and climate. Figure B1 shows
284 a correlation between water productivity and reference evapotranspiration (r^2 of 0.5, 0.7 and 0.8 for
285 furrow, sprinkler and centre pivot irrigated fields, respectively). The correlation between actual
286 evapotranspiration and reference evapotranspiration (Figure B2) is even stronger ($r^2 > 0.8$). Thus, to
287 exclude the climate related factor, we normalized the water productivity and evapotranspiration using a
288 climate normalisation factor. This is defined as the ratio of the weighted average reference
289 evapotranspiration (weighted based on the field size and growing length of the fields) to the reference
290 evapotranspiration at the field (Equation 3).

291
$$f_{norm} = \left(\frac{RET}{RET_i} \right) \quad \text{Equation 3}$$

292 where f_{norm} is the normalizing factor for the selected indicator, RET is weighted average reference
293 evapotranspiration, and RET_i is reference evapotranspiration at a field in mm per season.

Deleted: ET_{ref}

Formatted: Font: Italic

Deleted: ref

294 2.4 Consistency check of WaPOR data


295 Figure 4 shows the relationship between biomass (B ; WaPOR derived and observed) and water
296 consumption of irrigated fields categorized by irrigation methods for the year 2018 (with the
297 supplementary materials, Figure S1, showing the other 3 year from 2015 to 2017). In furrow and sprinkler
298 irrigated fields, the WaPOR derived biomass and actual evapotranspiration show a high correlation (a
299 minimum r^2 of ~ 0.83 ($n \approx 150$) in 2015, 2017 and 2018 and $r^2 \approx 0.63$ in the relatively dry year of 2016),
300 indicating consistency between the two independently generated datasets. For the centre pivot irrigated
301 fields r^2 is much lower with a value of ≈ 0.6 in 2015, 2016 and 2017 and lowest r^2 of 0.2 ($n \approx 19$) in 2018.
302 The low number of fields irrigated by centre pivots may have contributed to the low correlation. Moreover,
303 the estate-observed yield at Xinavane sugar estate versus ET_a shows a high spread and thus a low
304 correlation ($r^2 \approx 0.13$).

Deleted: Figure 4

Formatted: Font: 10 pt, Not Italic

311 The supplementary materials, Table S1, provide the analyses of the relationship between biomass and
 312 transpiration and biomass and normalised transpiration for the entire period of analyses (2015-2018). In
 313 contrast to expectations based on agronomic principles, the correlation is decreases when considering
 314 biomass and transpiration (~ 0.80) and biomass and normalized transpiration ($\sum T_a/RET$) (~ 0.71) (see
 315 further Supplementary materials). The accuracy of the evaporation and transpiration split in WaPOR is
 316 therefore questioned, this was also observed by Mul and Bastiaanssen (2019). Further analyses will
 317 therefore only focus on indicators that use evapotranspiration, not evaporation and transpiration, as
 318 input. For instance, the beneficial fraction (i.e., the ratio of transpiration over evapotranspiration) is not
 319 included in the analysis. Yet, two tests based on WaPOR derived biomass and total actual
 320 evapotranspiration (ETa) have confirmed the agronomic expectations (Table S2). The first is that the
 321 correlation coefficient of the linear regression line passing through the origin for the biomass vs.
 322 normalized actual water consumption is higher than that of the correlation coefficient for the biomass vs.
 323 actual water consumption. Second, the crop water productivity normalized by reference
 324 evapotranspiration (WP*), is confirmed to be conservative and within the range of values for C4 crops
 325 (30-35 g/m²) including sugarcane (Steduto et al., 2007; Steduto et al., 2009).

Deleted: ref

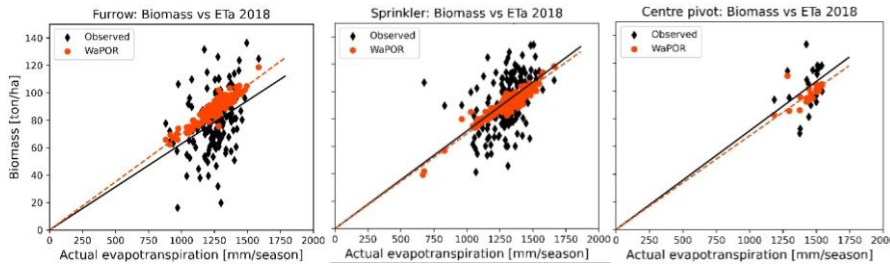

326
 327 *Figure 4. The relationship between biomass (as measured by the estate and derived from WaPOR) and actual*
 328 *evapotranspiration (derived from WaPOR) of furrow (left), sprinkler (centre) and centre pivot (right) irrigated fields*
 329 *at Xinavane sugar estate harvested in 2018*

330

331 3. Results


332 3.1. Seasonal water consumption

333 Figure 5, shows the seasonal actual and potential evapotranspiration, and seasonal precipitation at
 334 Xinavane sugarcane estate, distinguished by the three irrigation application methods. The four-season
 335 (2015 to 2018) average precipitation is 640 mm/season and ranges from the minimum of 500
 336 mm/season in 2016 to the maximum precipitation of 875 mm/season in 2017. The four-season average
 337 ET_a at Xinavane is 1,350 mm/season and its average seasonal values range between 1,255 mm/season
 338 in 2018 at furrow irrigated fields to 1,533 mm/season in 2016 at fields irrigated by centre pivot. In the
 339 four seasons the ET_a is significantly the highest (P -value < 0.05) at fields irrigated by centre pivot
 340 followed by sprinkler and furrow (Table A4 in the Appendix).

Formatted: Font: 10 pt, Not Italic

Deleted: Figure 5

Commented [MM3]: Should be A4 correct?

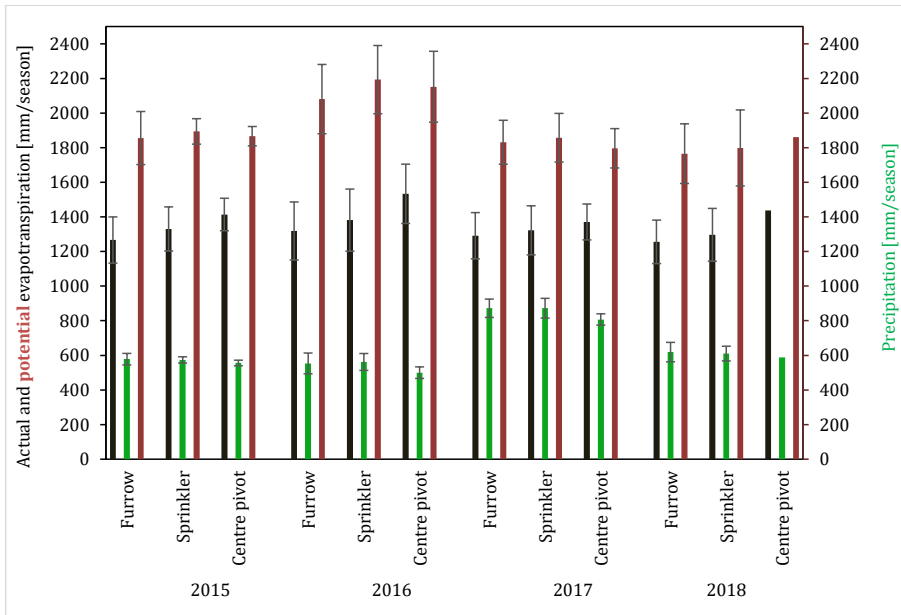


343

344 *Figure 5. Seasonal actual and potential evapotranspiration and precipitation at Xinavane sugar estate from 2015*
 345 *to 2018. The error bar indicates the variation across the fields irrigated by an irrigation method.*

346 The high average ET_a over Xinavane irrigation scheme in 2016 coincides with the reported drought
 347 year. This mainly manifested itself with high ET_{pot} as the annual precipitation that fall within the
 348 command area was not much lower than in 2015 and 2018. After normalizing for climate variation, the
 349 normalised ET_a is actually lowest for 2016, indicating higher water deficit (lowest actual per unit of
 350 potential evapotranspiration), with the drought having more impact on sprinkler and furrow irrigation
 351 than on centre pivot. Despite the ET_a being the highest in 2016, when normalised by climate the results
 352 show that 2016 experiences the highest water deficit. The four-season average actual water
 353 consumption of centre pivot remains the highest followed by sprinkler and furrow, except for 2016, when
 354 the sprinkler normalised ET_a is at the same level as furrow ET_a (Figure 6). This indicates that the
 355 sprinkler system was more affected by the drought conditions in 2016 compared to the other systems.

Formatted: Font: 10 pt, Not Italic

Deleted: Figure 6

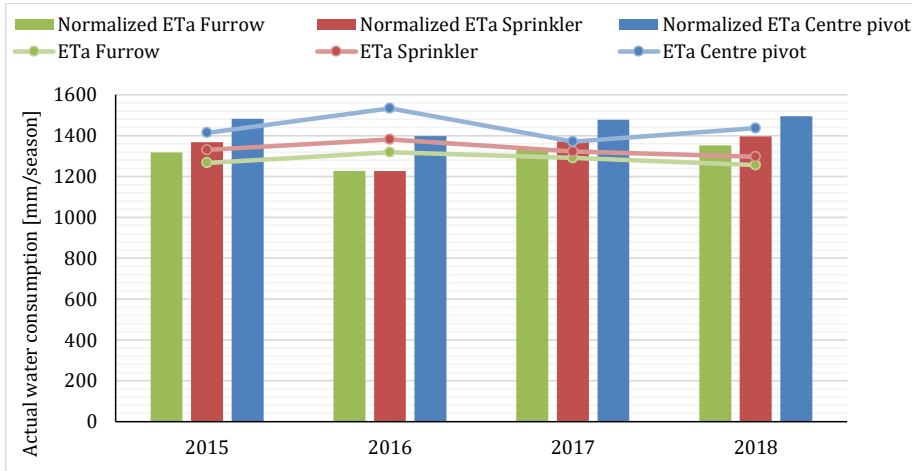

357
358 Figure 6. Normalized actual evapotranspiration at Xinavane sugar estate categorized by irrigation methods from
359 2015 to 2018.

360

361 3.2. Performance of irrigation delivery


362 3.2.1. Uniformity

363 The uniformity of water consumption within the fields is ~ 94% for all three irrigation methods (Figure 7).
364 The calculated uniformity is above the standard values per irrigation method and are therefore
365 considered as excellent. Centre pivots show an even higher uniformity than the other irrigation methods.

Deleted:

Formatted: Font: 10 pt, Not Italic

Deleted: Figure 7

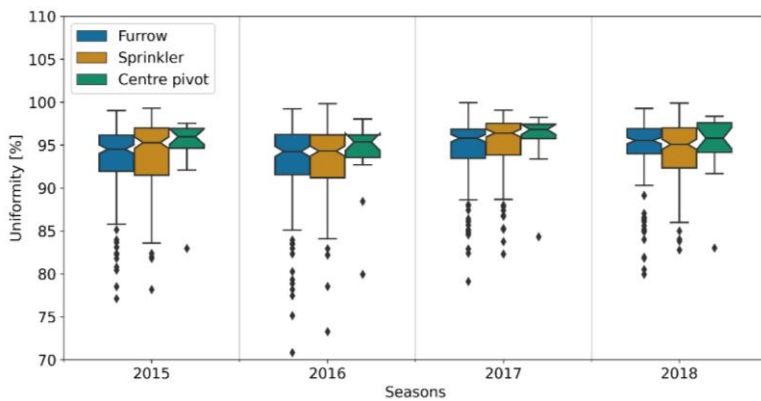


366
367 Figure 7. Coefficient of variation of actual water consumption per pixel inside a field at Xinavane sugar estate
368 categorized by irrigation methods from 2015 to 2018. The lower and upper whisker in the box plot show the minimum
369 and maximum values. The lower, middle and upper bar of the box show the 25, 50 and 75 percentiles of the values.

372

373

3.2.2. Equity

374 The average seasonal coefficient of variation (CV) of $ET_{a,s}$ among fields irrigated by the same irrigation method is 15% (Figure 8). Fields irrigated using furrows, with a CV of 18%, have the highest
375 heterogeneity in water consumption compared to areas irrigated using sprinkler (CV=14%) and centre
376 pivot irrigation method (CV=13%). The coefficient of variation of water consumption between fields
377 irrigated by a particular irrigation method and thus equity of water use among the fields is considered
378 fair.
379

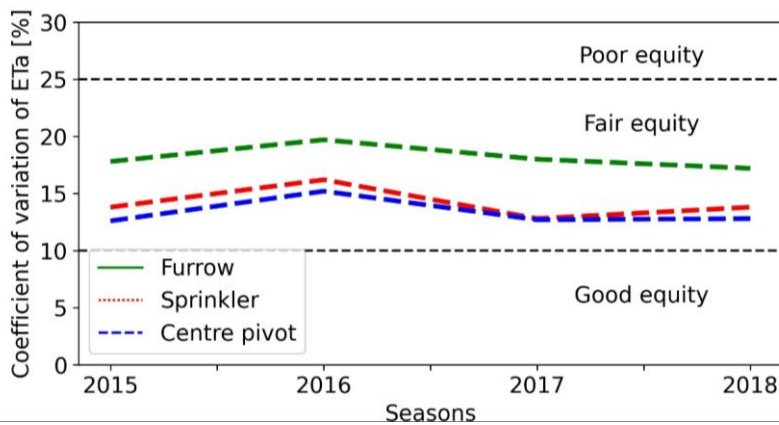

380

381 Figure 8. Coefficient of variation of actual water consumption between fields irrigated by an irrigation method at
382 Xinavane sugar estate from 2015 to 2018.

383

384

3.2.3. Adequacy

385 The four-season average adequacy varies spatially across the Xinavane irrigation scheme with visible
386 differences between fields irrigated using centre pivot compared to fields irrigated using furrow and
387 sprinkler for the period analysed. Figure 9 shows the highest adequacy for fields irrigated using centre
388 pivot (0.75) followed by fields irrigated using sprinkler and furrow (~0.69). In the study period, the
389 adequacy performance at fields under centre pivot fall in the acceptable range (from 0.68 and 0.8) for
390 sugarcane (Karimi et al., 2019). The adequacy in fields under sprinkler and furrow also is acceptable
391 except in the year 2016, which is recognized as a drought year, when adequacy was poor.

Commented [MM4]: Space or no space, that is the question

Deleted:

Formatted: Font: 10 pt, Not Italic


Deleted: Figure 8

Deleted:

Deleted:

Deleted: Figure 9


Formatted: Font: 10 pt, Not Italic

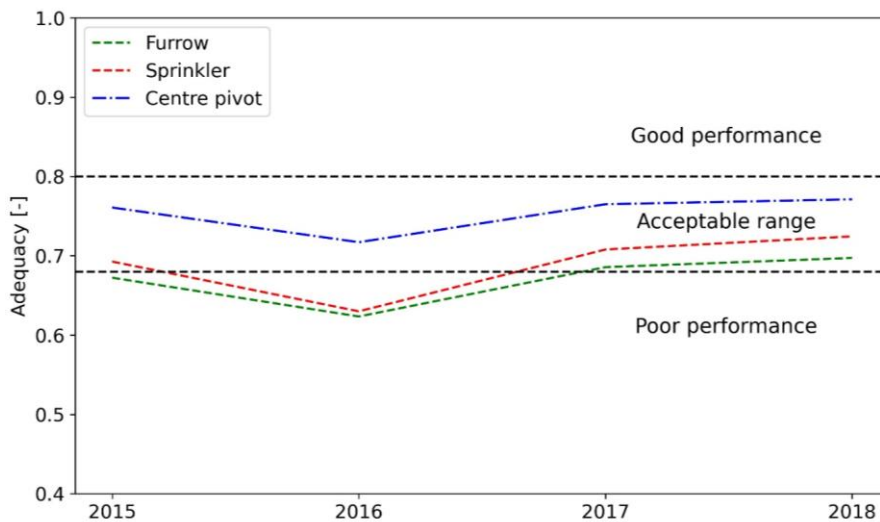

397
398 Figure 9. Adequacy [-] at Xinavane sugar estate categorized by irrigation methods.
399

400 3.2.4. Land productivity

401 The four-year seasonal average WaPOR based yield is 89 ton/ha (86 ton/ha for fields irrigated using
402 furrow, 88 ton/ha for areas irrigated using sprinkler and 93 ton/ha for fields irrigated using entre pivot).
403 For all years (except 2017) the highest sugarcane yield (land productivity) at Xinavane is found in fields
404 irrigated by centre pivot followed by fields irrigated by sprinkler and furrow irrigation methods (Figure
405 10).

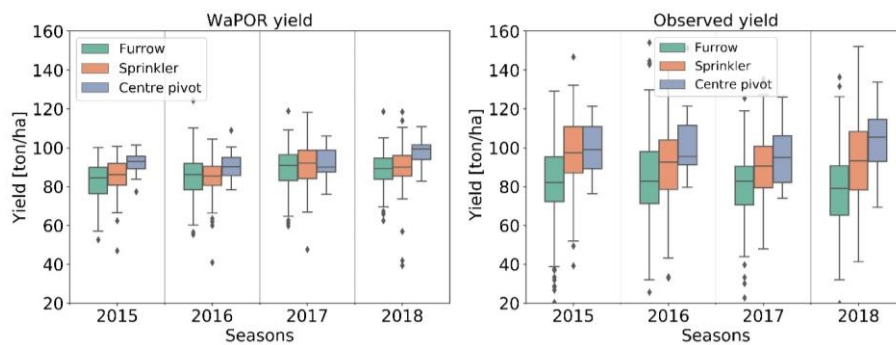

406
407 Figure 10. Boxplot of yield at Xinavane sugar estate categorized by irrigation methods from 2015 to 2018: WaPOR
408 yield (a) and estate-measured (observed) yield (b). The lower and upper whisker in the box plot show the minimum
409 and maximum values across the fields irrigated by an irrigation method. The lower, middle and upper bar of the
410 box show the 25, 50 and 75 percentiles of the values across the fields irrigated by an irrigation method.

411 The four-year seasonal WaPOR yield is in the same order of magnitude compared to the estate-
 412 measured sugarcane yield: 86 ton/ha vs. 81.4 ton/ha, 88 ton/ha vs. 93 ton/ha and 93 ton/ha vs. 99
 413 ton/ha for fields irrigated using the furrow, sprinkler and centre pivot irrigation methods, respectively.
 414 Part of the minor discrepancy between the WaPOR and estate-measured yield could be due to the
 415 selection of crop parameters such as harvest index and moisture content. Yet, the comparison between
 416 both yields shows acceptable statistics (Table A3), with a Root mean square error of 19 ± 2.5 ton/ha and
 417 Mean absolute error of 15 ± 1.6 ton/ha.

418 Whilst the average values for WaPOR based yields are of the same magnitude as the estate-observed
 419 data (65% of yield differences at the fields are within $\pm 20\%$), WaPOR overestimates relatively low yields
 420 (marks on scatter plot above 1:1 line) and underestimates relatively high yields (marks on scatter plot
 421 below 1:1 line) (Figure 11). WaPOR yields thus show a marked less variation in yields than reported by
 422 the estate.

Commented [MM5]: If this is the way you present it, then I would suggest to do the same in the beginning


Deleted:

Commented [MM6]: Italic or not italic, lets be consistent


Commented [AC7R6]:

Deleted: Figure 11

Formatted: Font: 10 pt, Not Italic

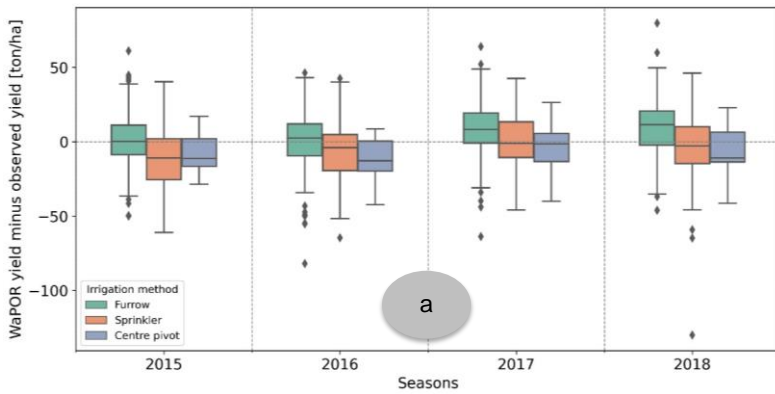

423

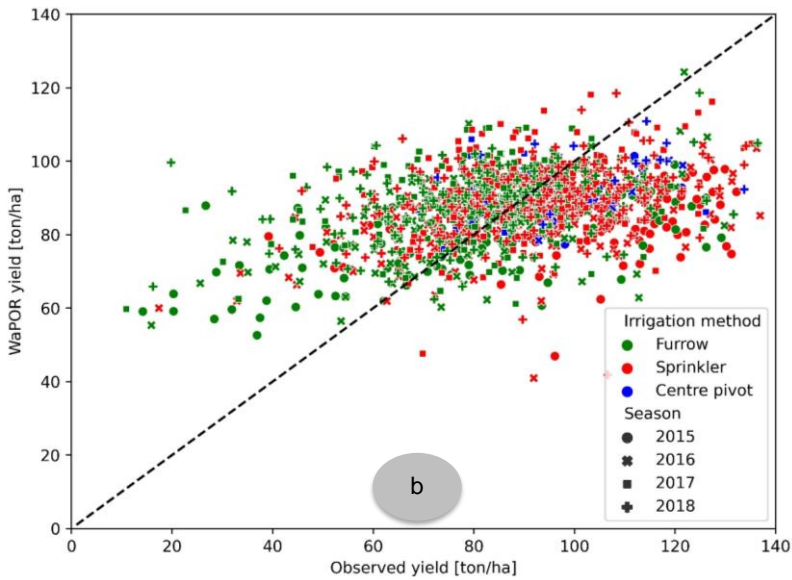

424

427 Figure 11. WaPOR yield compared to estate-observed yield: (a) the difference between estate-measured and
 428 WaPOR yield, (b) scatter plot of WaPOR yield vs. estate-measured yield.


429

430 **3.2.5. Water productivity**

431 The seasonal and four-season average water productivity at Xinavane is shown in **Figure 12**. The four-
 432 season average water productivity is the highest for furrow irrigated fields (6.9 kg/m³), compared to the
 433 values for fields irrigated with sprinkler (6.7 kg/m³) and centre pivot (6.6 kg/m³). One of the reasons for
 434 such differences is the fraction of *ET_a* being utilised for productive purposes (transpiration) compared
 435 to non-productive evaporation. Raes et al. (2013) reports that centre pivot and sprinkler irrigation wets
 436 100% of the field compared to furrow that wets ~ 80% of the field and thus results in higher evaporation
 437 rates, which is in line with our observations.

Deleted: Figure 12
 Formatted: Font: 10 pt, Not Italic

Deleted:
 Deleted:

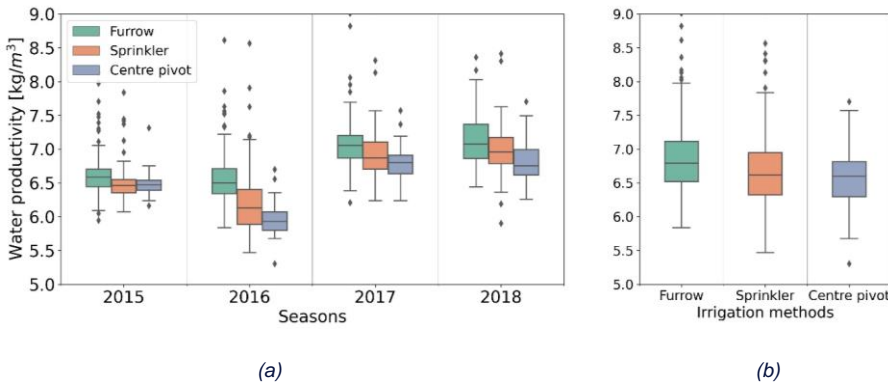

438

439

440 Figure 12. Boxplot of water productivity in kg/m³ at Xinavane sugarcane estate categorized by (a) irrigation methods
 441 in 2015 to 2018 and (b) four-season average. The lower and upper whisker in the box plot show the minimum and
 442 maximum values across the fields irrigated by an irrigation method. The lower, middle and upper bar of the box
 443 show the 25, 50 and 75 percentiles of the values across the fields irrigated by an irrigation method.

444 The large variation of *WP* over the years (**Figure 12**) is also apparent after normalizing for climate
 445 variation (**Figure 13**). The normalised *WP* is highest in a relatively dry year (2016) compared to the other
 446 three years, this is opposite to *WP*, where 2016 has the lowest *WP*. It indicates that climate-related
 447 parameters expressed through potential evapotranspiration has a large impact on the *WP*. The
 448 normalised *WP* shows the variations which are related to management practices, during the drought of
 449 2016, the Xinavane estate practiced deficit irrigation, which is reflected in the high normalised *WP*
 450 values.

Formatted: Font: 10 pt, Not Italic
 Deleted: Figure 12
 Deleted: Figure 13
 Formatted: Font: 10 pt, Font color: Custom Color(RGB(9;21;64))

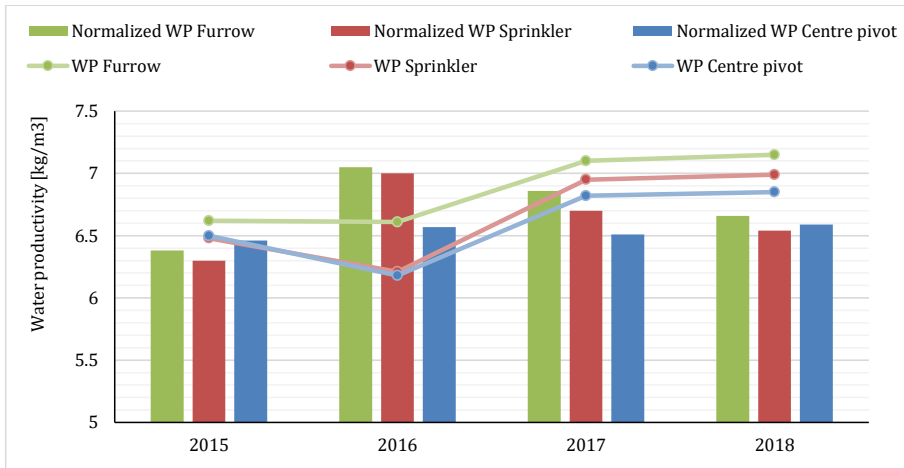


Figure 13. Normalized water productivity at Xinavane sugarcane estate categorized by irrigation methods in 2015 to 2018.

Commented [PK8]: Can you make sure fonts/sizes used in tables, graphs are consistent?

4. Discussion

4.1. The framework

The presented framework was used to conduct an irrigation performance assessment using WaPOR data. Our analysis shows that fields irrigated using centre pivots have the highest equity, adequacy and land productivity followed by fields irrigated using sprinkler and furrow. This outcome agrees with the conclusion by Karimi et al. (2019) who assessed performance of irrigated sugarcane in Eswatini (Swaziland) by differentiating areas according to management regimes including irrigation methods. The adequacy performance under the three irrigation methods was generally acceptable except in 2016 when performance of all three irrigation methods was poor. Fields under centre pivots do, however, have the lowest water productivity followed by sprinkler and furrow irrigation, which is contrary to the finding by Karimi et al. (2019) who reported the WP of centre pivot to exceed that of furrow irrigation. In fact, it is claimed that pressurized irrigation (sprinkler and centre pivot) improve uniform distribution, application efficiency of irrigation water and increase crop yield (Magwenzi and Nkambule, 2003; Playán and Mateos, 2006). Yet, these irrigation methods increase seasonal evaporation (Playán and Mateos, 2006), which could be due to differences in percentage of land wetted. Our findings show that the uniformity of water consumption on the fields under the three irrigation methods are reasonably comparable and high (~ 94%), which can be regarded as excellent according to the standard set by Pitts et al. (1996). The high uniformity of water consumption in furrow irrigated fields is in the same range as that of centre pivot and sprinkler, which is unlike what was found in South Africa (Griffiths and Lecler, 2001).

Deleted:

The results of normalisation for climate differences of the water consumption and water productivity allows for comparing the results under different climate conditions (different years). While the ranking for the different irrigation technologies according to the indicators remains the same, it clearly shows the impact of the climate. In particular during the drought year of 2016 when the potential evapotranspiration was relatively high, the normalised water consumption was low, indicating higher water deficit compared to the other years. The impact on sprinkler irrigated field was the highest. On

487 the other hand, the normalised *WP* during 2016 was the highest of all the years, even though the *WP*
488 was lowest for the same biomass in 2016, indicating the climate having a large impact on non-beneficial
489 evaporation.

490 This finding seems to suggest that production constraints can be addressed by taking certain measures,
491 including improved farm practices. However, one factor that influences crop yield but that is difficult to
492 influence, and that has not been assessed by this study, is the age of the crop. It is known that the early
493 ratoons (harvests after first planting the cane) achieve significantly higher yields than subsequent
494 ratoons (Mehareb and Galal, 2017). So, achieving the 90th percentile targets may not be easy for fields
495 with older crops, even though the Xinavane Estate uses a higher target yield than the 90th percentile
496 crop yield.

497 This study shows that the presented framework offers a systematic approach to assess irrigation
498 performance indicators using WaPOR and field data. Five WaPOR-derived irrigation performance
499 indicators, namely uniformity, equity, adequacy, and land and water productivity, are used to monitor
500 the quality of the irrigation and agronomic services. Our framework builds on earlier studies that assess
501 irrigation performance indicators based on RS (Karimi et al., 2019; Blatchford et al., 2020) and provides
502 a comprehensive and simple step-by-step framework to conduct an agronomic evaluation using
503 WaPOR data. The approaches in the framework are scripted with Python in Jupyter Notebooks [that can](#)
504 [be run on local machine and Google Colaboratory \(Colab\).js](#) published [together with observed yield](#)
505 [data](#) in GitHub (Chukalla et al., 2020a). It shows that with limited field information (crop type and
506 cropping season) and some parameters obtained from the literature the analyses can be implemented.

Deleted: and

507

508 4.1.1. Limitations of the WaPOR database

509 The linear relationship between the independently derived WaPOR biomass and water consumptions
510 agrees with the expected agronomic principles (De Wit, 1958; Steduto and Albrizio, 2005). However,
511 the correlation coefficient of the biomass versus actual evapotranspiration is higher than the correlation
512 coefficient of the biomass versus transpiration and biomass versus normalized transpiration. This
513 implies an inaccurate estimation of transpiration (T) and evaporation (E) in WaPOR. WaPOR separates
514 the available energy into T and E using a factor $\alpha \cdot LAI$, where α is the light extinction factor (FAO, 2018;
515 Mul and Bastiaanssen, 2019). A review on values for α shows large differences between different land
516 use classes and within land use classes (Zhang et al., 2016). Thus, WaPOR applying only one fixed
517 value for α could have serious implications for the use of the T and E layers of WaPOR such as in
518 quantifying beneficial fraction (the ratio of transpiration over evapotranspiration).

519 Even though the analyses seem to be consistent with the understanding of how the different irrigation
520 technologies perform, there are some known limitations of RS and WaPOR data in particular, which
521 need to be mentioned here. These may stem from: (i) the Land Surface Temperature (LST) used by
522 WaPOR (which is taken from MODIS and has a resolution of 1 km; this layer is used to derive moisture
523 stress and thus to calculate the actual evapotranspiration and net primary production; this could be the
524 cause for the reduced variation of WaPOR biomass data, and may affect the spatial variation of
525 evapotranspiration as well); (ii) land cover noise of non-sugarcane land use such as farm roads, and
526 irrigation and drainage infrastructures within a pixel; (iii) the number of cloud free RS images on which
527 the analysis and numerical interpolation are based (the fewer the cloud free images the poorer the data
528 quality, the higher the uncertainty in the indicators one can expect); (iv) the time of day when the images
529 are taken (determinant for which part of the daily ET curve is monitored and the time of day the water
530 stress is more or less severe); and (v) the angle of image capture and its correction function.

532 The methods used in WaPOR for data production and statistical methods for the reconstruction of
533 missing values are, however, at par with those used in other RS based products for monitoring agro-
534 hydrological parameters developed by the scientific community. As such some of these limitations are
535 inherent to the use of remote sensing in general. Yet, our analysis shows consistency between the
536 different datasets.

537

538 4.1.2. Limitation of the crop related information

539 Crop specific parameters such as harvest index, the moisture content of the fresh yield and the ratio
540 between above ground over total biomass ratio were fixed values and determined using literature and
541 fieldwork in Ethiopia. However, it is known that these crop parameters can vary significantly based on
542 climatic or field management conditions. Other variations may stem from differential exposure to pests
543 and diseases, and soil and rooting conditions caused by waterlogging (den Besten et al., 2021) and soil
544 salinity, which are not catered for. We were unable to determine how much these assumptions affect
545 the results. All these factors are potential sources of (slight) deviations in the numerical output of
546 WaPOR that may lead to over- and under-estimations of crop yield and *WP*.

547 Having noted this, we did perform a validation of the WaPOR biomass data using observed harvested
548 cane data of more than 300 fields over four seasons. WaPOR biomass data for ~65% of the field level
549 comparison differed within a $\pm 20\%$ range. The comparison between the estate-measured yield and
550 WaPOR biomass showed acceptable statistics (Table A3).

551

552 4.2. The way forward

553 [Investments in high quality public domain global and regional remote sensing data product for water](#)
554 [and lands, us e.g. WaPOR datasets, has made it possible](#) to conduct spatiotemporal [analysis of](#)
555 [irrigation performance at multiple scales from an irrigation scheme to district, basin and the whole](#)
556 [country. This provides a great advantage](#) especially in areas where both water and land resources are
557 [scarce and in-situ data are scant. This study presents a RS based assessment framework and](#)
558 [showcases the power of using](#) the WaPOR dataset in providing spatial and temporal irrigation
559 performance indicators. Such information cannot be generated with the data collected traditionally (point
560 data) or would come at a significant cost.

561 Yet, accurate interpretation of the results, diagnosing the causes of the performance variation and
562 formulation of practical solutions cannot be made unless the WaPOR analyses and results are
563 complemented with observed data of field conditions (e.g., the level of water and nutrient inputs,
564 waterlogging, and salinity levels) that can help explore the constraints. Though this limitation puts a
565 disclaimer on our findings, the procedures in this study can provide a useful reference for similar future
566 studies.

567 Subsequent studies could additionally consider socio-economic performance indicators, such as social
568 water productivity (e.g., employment per unit water or land use) and economic water productivity
569 (economic return per unit water or land use), which could help to implement comprehensive
570 performance assessment of irrigation schemes.

571

572 **5. Conclusions**

573 Remote sensing datasets are increasingly applied as innovative tool for monitoring the performance of
 574 irrigation schemes in order to improve land and water productivity amid the growing competition for
 575 finite and even dwindling resources (land and water). In this study, first, the remotely-sensed FAO
 576 WaPOR dataset were successfully validated based on two agronomic features of biomass response to
 577 water: (i) there is stronger correlation between biomass and normalized actual water consumption than
 578 between biomass and actual water consumption, and (ii) the water productivity of sugarcane normalized
 579 by reference evapotranspiration falls within the conservative values reported for C4 crops. Second, the
 580 WaPOR derived datasets are, applied to assess irrigation performance indicators including uniformity,
 581 equity, adequacy, and land and water productivity at Xinavane sugarcane estate, segmented by
 582 irrigation method. We conclude that the systematic approach demonstrated in the current study can
 583 serve as a framework to operationalize the use of WaPOR-derived data and other increasingly available
 584 RS-derived products for irrigation performance monitoring and assessment.

585 The comprehensive WaPOR based irrigation performance assessment in this sugarcane state, finds
 586 that fields irrigated by centre pivots have the highest adequacy, land productivity and equity followed
 587 by sprinkler and furrow irrigated fields, but the lowest water productivity.

588 We identified that the spatial and seasonal variation of indicators, water productivity and seasonal water
 589 consumption in particular, are caused by non-climatic factors that can be influenced by management
 590 interventions. Investigating the root causes of the land productivity variation and whether proper
 591 management of inputs, and controlling of salinity and drainage could improve productivity and the
 592 overall performance require further study, including field-based observations.

593

594 **Appendices**

595 Appendix A. Tables

596 Table A1. Water consumption-based irrigation performance assessment criteria and indicators

Criteria	Indicator	Equation*	Reference
Uniformity	CV of ET	CV of seasonal average ET_a per pixels in a field	Karimi, 2019
Equity	CV of ET	CV of seasonal average ET_a per field inside the scheme/block	Karimi, 2019
Adequacy	The ratio of $ET_{a,s}$ over $ET_{a,p}$ or relative evapotranspiration (RET)	$RET = \frac{ET_{a,s}}{ET_{p,s}}$ $ET_{a,s} = \sum_{SOS}^{EOS} ET_a$ $ET_{p,s} = \sum_{SOS}^{EOS} ET_{p,m}$ $ET_{p,m} = \sum_{SOS}^{EOS} k_{c,m} * RET_m$	Karimi, 2019

Deleted: techniques to

Deleted: stoo

Deleted: is

Deleted: translate

Deleted: assessment

Deleted: The study shows the potential use of WaPOR-derived products to assess key performance indicators that are relevant for operation and modernization of irrigation schemes.

Deleted: Yet, we were unable to determine the underlying causes for performance variation, which can be caused by farm management, inputs, as well as stresses resulting from factors such as waterlogging and salinity.

Commented [MM11]: Doesn't this come after the references?

Commented [AC12R11]: In HESS Appendix comes ahead of references section.

Land productivity	Biomass production (B)	$B = AOT * f_c * \frac{NPP_s * 22.222}{(1-MC)}$ <p>AOT is above over total biomass, fc is light use efficiency correction factor and MC is moisture content in fresh biomass.</p>	Mul and Bastiaanssen, 2019
	Yield	<p>Yield = B*HI</p> <p>HI is harvest index.</p>	FAO 66
Water productivity	Biomass WP (WP _b)	$WP_b = \frac{B}{ET_{a,s}}$	
	Crop yield WP (WP)	$WP = \frac{Y}{ET_{a,s}}$	

611 *where SOS and EOS is start of season and end of season, $ET_{a,s}$ is seasonal actual evapotranspiration, $ET_{p,s}$ and
612 $ET_{p,m}$ are seasonal and monthly potential evapotranspiration, RET_m is monthly reference evapotranspiration, $k_{c,m}$ is
613 crop coefficient, and NPP_s is seasonal net primary production.

Deleted: that has green $ET_{a,s}$ and blue $ET_{a,s}$ components

Deleted: ET_{ref}

614

618 Table A2. Crop coefficients of sugarcane

Crop stages	Duration of crop development stages		Kc values [-]
	Default in CROPWAT 8.0 (Smith, 1992) [Days]	%	
Initial	30	8	0.4
Development	60	16	[0.4 - 1.25]
Mid-season	180	49	1.25
Late-season	95	26	[1.25 - 0.75]
	365		

Formatted: Font: 9 pt

619

620 Table A3. Statistical comparison of WaPOR yield and estate-measured yield

Season	Irrigation method	Number of fields compared (n)	Root mean square error [ton/ha]	Mean absolute error [ton/ha]
2015 (n=352)	Furrow	175	18.5	14
	centre pivot	16	14.7	13
	sprinkler	160	22.5	18
2016 (n=351)	Furrow	153	20.3	15
	centre pivot	17	16.7	13
	sprinkler	180	19.6	15
2017 (n=332)	Furrow	152	21	16.5
	centre pivot	19	16	13
	sprinkler	161	17	14
2018 (n=317)	Furrow	149	21.7	17
	centre pivot	19	16.7	14.5
	sprinkler	149	22	16
Average			18.9	14.9
SD			2.5	1.6

621

622 Table A4. Summary of the statistical test whether the average seasonal actual water consumption (ET_a) at
623 Xinavane estate are different

SUMMARY: Anova: Single Factor for ET_a[mm/season] in 2015

Groups	Count [-]	Sum [mm/season]	Average [mm/season]	Variance [mm/season] ²
<i>Furrow</i>	<i>175</i>	<i>221.623</i>	<i>1.266</i>	<i>17.823</i>
<i>Sprinkler</i>	<i>160</i>	<i>212.857</i>	<i>1.330</i>	<i>16.236</i>
<i>Centre pivot</i>	<i>16</i>	<i>22.621</i>	<i>1.414</i>	<i>8.795</i>

ANOVA

Commented [MM14]: ???

Formatted: Font: Italic

Formatted: Font: Italic

Formatted Table

Commented [MM15]: Unit?

Formatted: Superscript

Source of Variation	SS	df	MS	F	P-value	F critical
Between Groups	550.210	2	27.5105	16.46	1.47E-07	3.022
Within Groups	5,814.685	348	16.709			
Total	6,364.895	350				

625

SUMMARY: Anova: Single Factor for ETa[mm/season] in 2016

Groups	Count [-]	Sum [mm/season]	Average [mm/season]	Variance [mm/season] ²
Furrow	153	20.1762	1.319	28.102
Sprinkler	180	248.632	1.381	32.201
Centre pivot	17	26.067	1.533	29.346

Commented [MM16]: Unit?

ANOVA

Source of Variation	SS	df	MS	F	P-value	F critical
Between Groups	852.752	2	426.376	14.084	1.315E-06	3.022
Within Groups	10,505.019	347	30.274			
Total	11,357.771	349				

626

SUMMARY: Anova: Single Factor for ETa[mm/season] in 2017

Groups	Count [-]	Sum [mm/season]	Average [mm/season]	Variance [mm/season] ²
Furrow	152	196.271	1.291	17.828
Sprinkler	161	212.875	1.322	20.093
Centre pivot	19	26.044	1.371	10.756

Commented [MM17]: Unit?

ANOVA

Source of Variation	SS	df	MS	F	P-value	F critical
Between Groups	147.266	2	73.633	3.97	0.020	3.02
Within Groups	6,100.424	329	18.542			
Total	6,247.690	331				

627

SUMMARY: Anova: Single Factor for ETa[mm/season] in 2018

Groups	Count [-]	Sum [mm/season]	Average [mm/season]	Variance [mm/season] ²
Furrow	149	187.113	1.256	15.781
Sprinkler	149	193.172	1.296	23.265
Centre pivot	19	27.304	1.437	9.258

Commented [MM18]: Unit?

ANOVA

Source of Variation	SS	df	MS	F	P-value	F critical
Between Groups	585.782	2	292.891	15.47	3.91E-07	3.02
Within Groups	5,945.377	314	18.934			
Total	6,531.158	316				


628

* Sum is the product of Count [-] and Average [mm/season]

629

630 Appendix B. Figures


631 Figure B1. Relationship between water productivity and seasonal reference evapotranspiration at
632 Xinavane sugarcane estate categorized by irrigation methods in 2015 to 2018.

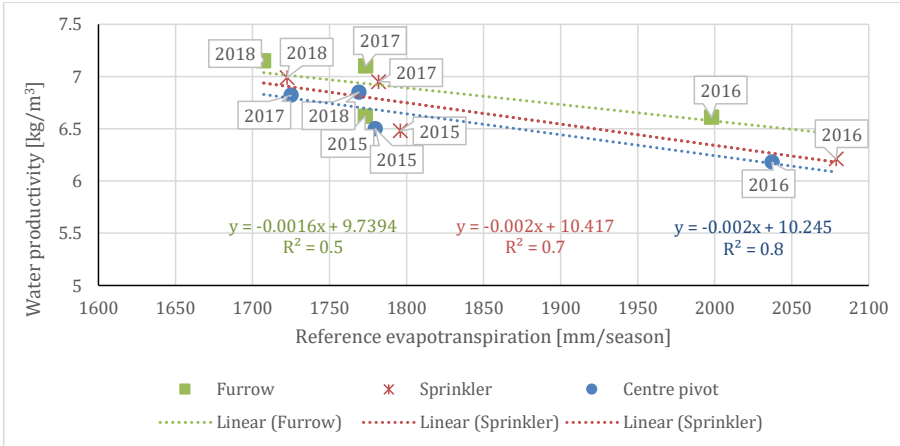

633

634

635 Figure B2. Relationship between seasonal actual evapotranspiration and reference evapotranspiration
636 at Xinavane sugarcane estate categorized by irrigation methods in 2015 to 2018.

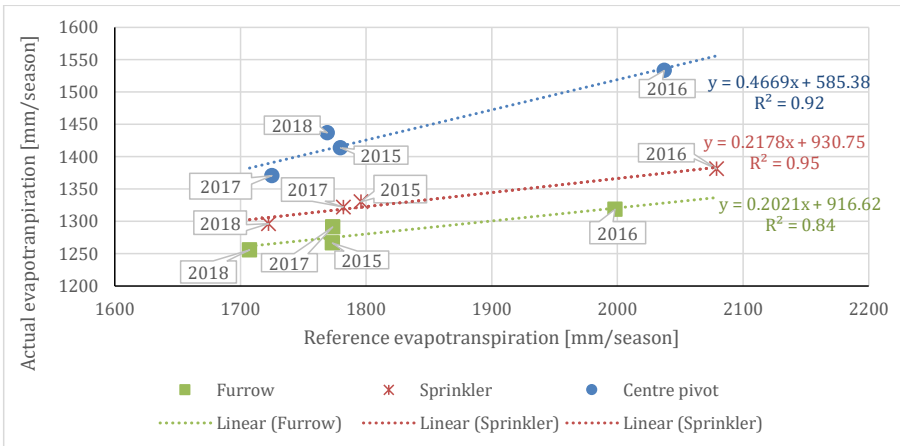

637

638 6. Acknowledgements

639 This study was supported by the Water Productivity Improvement in Practice (Water-PIP) project, which
640 is supported by the Directorate-General for International Cooperation (DGIS) of the Ministry of Foreign
641 Affairs of the Netherlands under the DGIS – IHE Delft Programmatic Cooperation (DUPC). The authors
642 wish to thank Tongaat Hulett for their support and sharing data of Xinavane Estate farm.

644 **7. References**

- 645 Allen, R. G., Pereira, L. S., Raes, D., and Smith, M.: Crop evapotranspiration-Guidelines for computing
646 crop water requirements-FAO Irrigation and drainage paper 56, Fao, Rome, 300, D05109, 1998.
- 647 Araya, A., Stroosnijder, L., Girmay, G., and Keesstra, S.: Crop coefficient, yield response to water stress
648 and water productivity of teff (*Eragrostis tef* (Zucc.), *Agricultural water management*, 98, 775-783,
649 2011.
- 650 Arndt, C., Strzepeck, K., Tarp, F., Thurlow, J., Fant, C., and Wright, L.: Adapting to climate change: an
651 integrated biophysical and economic assessment for Mozambique, *Sustainability Science*, 6, 7-20,
652 10.1007/s11625-010-0118-9, 2011.
- 653 Ascough, G., and Kiker, G.: The effect of irrigation uniformity on irrigation water requirements, *Water*
654 *Sa*, 28, 235-242, 2002.
- 655 Bastiaanssen, W., Cheema, M., Immerzeel, W., Miltenburg, I., and Pelgrum, H.: Surface energy balance
656 and actual evapotranspiration of the transboundary Indus Basin estimated from satellite
657 measurements and the ETLook model, *Water Resources Research*, 48, 2012.
- 658 Bastiaanssen, W. G., Van der Wal, T., and Visser, T.: Diagnosis of regional evaporation by remote
659 sensing to support irrigation performance assessment, *Irrigation and Drainage Systems*, 10, 1-23,
660 1996.
- 661 Bastiaanssen, W. G., and Bos, M.: Irrigation performance indicators based on remotely sensed data: a
662 review of literature, *Irrigation and drainage systems*, 13, 291-311, 1999.
- 663 Bastiaanssen, W. G., Molden, D. J., and Makin, I. W.: Remote sensing for irrigated agriculture:
664 examples from research and possible applications, *Agricultural water management*, 46, 137-155,
665 2000.
- 666 Binswanger-Mkhize, H. P., and Savastano, S.: Agricultural intensification: The status in six African
667 countries, *Food Policy*, 67, 26-40, <https://doi.org/10.1016/j.foodpol.2016.09.021>, 2017.
- 668 Blatchford, M., Mannaerts, C., Zeng, Y., Nouri, H., and Karimi, P.: Influence of Spatial Resolution on
669 Remote Sensing-Based Irrigation Performance Assessment Using WaPOR Data, *Remote Sensing*,
670 12, 2949, 2020.
- 671 Bos, M. G.: Performance indicators for irrigation and drainage, *Irrigation and drainage systems*, 11,
672 119-137, 1997.
- 673 Bos, M. G., Burton, M. A., and Molden, D. J.: Irrigation and drainage performance assessment: practical
674 guidelines, CABI publishing, 2005.
- 675 Burt, C. M., Clemmens, A. J., Strelkoff, T. S., Solomon, K. H., Bliesner, R. D., Hardy, L. A., Howell, T.
676 A., and Eisenhauer, D. E.: Irrigation performance measures: efficiency and uniformity, *Journal of*
677 *irrigation and drainage engineering*, 123, 423-442, 1997.
- 678 Chukalla, A. D., Mul, M., Tran, B., and Karimi, P.: Standardized protocol for land and water productivity
679 analyses using WaPOR (v1.1). , Zenodo. <http://doi.org/10.5281/zenodo.4641360>, 2020a.
- 680 Chukalla, A. D., Mul, M., van Halsema, G., van der Zaag, P., Uyttendaele, T., and Karimi, P.: Water
681 Productivity Analyses using the WaPOR Database. A Case Study in Xinavane, Mozambique, IHE
682 Delft Institute for Water Education, Delft, the Netherlands, 2020b.
- 683 Clemmens, A., and Molden, D.: Water uses and productivity of irrigation systems, *Irrigation science*,
684 25, 247-261, 2007.
- 685 de Boer, F., and Droogers, P.: Water allocation models for the Incomati River Basin, Mozambique,
686 FutureWater, Wageningen, 2016.
- 687 De Wit, C. T.: Transpiration and crop yields, Wageningen University 0372-6223, 1958.
- 688 Dejen, Z. A.: Hydraulic and operational performance of irrigation schemes in view of water saving and
689 sustainability: sugar estates and community managed schemes In Ethiopia, CRC Press/Balkema,
690 2015.
- 691 den Besten, N., Kassing, R., Muchanga, E., Earnshaw, C., de Jeu, R., Karimi, P., and van der Zaag,
692 P.: A novel approach to the use of earth observation to estimate daily evaporation in a sugarcane
693 plantation in Xinavane, Mozambique, *Physics and Chemistry of the Earth, Parts A/B/C*, 102940,
694 2020.
- 695 den Besten, N., Steele-Dunne, S., de Jeu, R., and van der Zaag, P.: Towards Monitoring Waterlogging
696 with Remote Sensing for Sustainable Irrigated Agriculture, *Remote Sensing*, 13, 2929, 2021.
- 697 Edreira, J. I. R., Guilpart, N., Sadras, V., Cassman, K. G., Van Ittersum, M. K., Schils, R. L., and
698 Grassini, P.: Water productivity of rainfed maize and wheat: A local to global perspective, *Agricultural*
699 *and forest meteorology*, 259, 364-373, 2018.

700 FAO: WaPOR Database Methodology: Level 2. Remote Sensing for Water Productivity Technical
701 Report: Methodology Series. Rome, FAO. 63 pages. Licence: CC BY-NC-SA 3.0 IGO, 2018.
702 FAO: Food Outlook – Biannual Report on Global Food Markets, Rome, Italy, 2019.
703 FAO: WaPOR V2 quality assessment – Technical Report on the Data Quality of the WaPOR FAO
704 Database version 2, Rome, 89 pp, 2020a.
705 FAO: WaPOR database methodology: Version 2 release, April 2020. Rome.
706 <https://doi.org/10.4060/ca9894en>, 78 pages, 2020b.
707 FAO: WaPOR: The FAO portal to monitor Water Productivity through Open access of Remotely sensed
708 derived data, https://wapor.apps.fao.org/home/WAPOR_2/1, 23 October, FAO, Rome, Italy, 2020c.
709 GDAL: GDAL/OGR contributors Geospatial Data Abstraction software Library. Open Source Geospatial
710 Foundation. URL <https://gdal.org> (last access: June 2021), 2021.
711 Griffiths, B., and Lecler, N.: Irrigation system evaluation, Proc S Afr Sug Technol Ass, 2001, 58-67,
712 Hellegers, P., Soppe, R., Perry, C., and Bastiaanssen, W.: Combining remote sensing and economic
713 analysis to support decisions that affect water productivity, Irrigation Science, 27, 243-251, 2009.
714 Hess, T. M., Sumberg, J., Biggs, T., Georgescu, M., Haro-Monteagudo, D., Jewitt, G., Ozdogan, M.,
715 Marshall, M., Thenkabail, P., and Daccache, A.: A sweet deal? Sugarcane, water and agricultural
716 transformation in Sub-Saharan Africa, Global environmental change, 39, 181-194, 2016.
717 Johnson, M. E., Benin, S., You, L., Diao, X., Chilonda, P., and Kennedy, A.: Exploring strategic priorities
718 for regional agricultural research and development investments in Southern Africa, Intl Food Policy
719 Res Inst, 2014.
720 Karimi, P., David, S., and Bastiaanssen, W. G.: Mapping crop water productivity in the Nile basin
721 through combined use of remote sensing and census data. In ICID. 21st Congress on Irrigation and
722 Drainage: Water Productivity towards Food Security, Tehran, Iran, 15-23 October 2011. New Delhi,
723 India: ICID. pp.137-148. (ICID Transaction No. 30-A), 2011,
724 Karimi, P., Bongani, B., Blatchford, M., and de Fraiture, C.: Global satellite-based ET products for the
725 local level irrigation management: An application of irrigation performance assessment in the
726 sugarcane belt of Swaziland, Remote Sensing, 11, 705, 2019.
727 Kharrou, M. H., Le Page, M., Chehbouni, A., Simonneaux, V., Er-Raki, S., Jarlan, L., Ouzine, L.,
728 Khabba, S., and Chehbouni, G.: Assessment of equity and adequacy of water delivery in irrigation
729 systems using remote sensing-based indicators in semi-arid region, Morocco, Water resources
730 management, 27, 4697-4714, 2013.
731 Magwenzi, O., and Nkambule, S.: Suitability of centre pivot irrigation for sugarcane production in
732 Swaziland, Proc S Afr Sug Technol Ass, 2003, 77,
733 Mehareb, E., and Galal, M. O.: Ratooning ability of some promising Egyptian sugarcane varieties, J.
734 Sugarcane Tech, 32, 50-59, 2017.
735 Molden, D. J., and Gates, T. K.: Performance measures for evaluation of irrigation-water-delivery
736 systems, Journal of irrigation and drainage engineering, 116, 804-823, 1990.
737 Molden, D. J., Sakthivadivel, R., Perry, C. J., and De Fraiture, C.: Indicators for comparing performance
738 of irrigated agricultural systems, Iwmi, 1998.
739 Moraes, R. A., Beauclair, E. G. F. d., Gomes, F. H., Moreira, M. M. R., and Maia, R. d.: Identification
740 and estimation of the sugarcane production potential of Mozambique, African Journal of Agricultural
741 Research, 13, 1924-1931, 2018.
742 Mul, M., and Bastiaanssen, W.: WaPOR quality assessment: Technical report on the data quality of the
743 WaPOR FAO database version 1.0, Rome, 134 pp, 2019.
744 Nkamleu, G.: Extensification versus intensification: revisiting the role of land in African agricultural
745 growth, Proceedings of African economic conference, Johannesburg, South Africa, 2013, 28-30,
746 Pitts, D., Peterson, K., Gilbert, G., and Fastenau, R.: Field assessment of irrigation system performance,
747 Applied Engineering in Agriculture, 12, 307-313, 1996.
748 Playán, E., and Mateos, L.: Modernization and optimization of irrigation systems to increase water
749 productivity, Agricultural water management, 80, 100-116, 2006.
750 Smith, M.: CROPWAT: A computer program for irrigation planning and management, 46, Food and
751 Agriculture Organization, Rome, Italy, 1992.
752 Steduto, P., and Albrizio, R.: Resource use efficiency of field-grown sunflower, sorghum, wheat and
753 chickpea: II. Water use efficiency and comparison with radiation use efficiency, Agricultural and
754 Forest Meteorology, 130, 269-281, 2005.
755 Steduto, P., Hsiao, T. C., and Fereres, E.: On the conservative behavior of biomass water productivity,
756 Irrigation Science, 25, 189-207, 2007.
757 Steduto, P., Hsiao, T. C., Raes, D., and Fereres, E.: AquaCrop—The FAO crop model to simulate yield
758 response to water: I. Concepts and underlying principles, Agronomy Journal, 101, 426-437, 2009.

759 Sutton, P. C., Anderson, S. J., Costanza, R., and Kubiszewski, I.: The ecological economics of land
760 degradation: Impacts on ecosystem service values, *Ecological Economics*, 129, 182-192,
761 <https://doi.org/10.1016/j.ecolecon.2016.06.016>, 2016.
762 Tongaat Hulett: 2018 Integrated annual report: Value creation for all stakeholders through an all-
763 inclusive approach to growth and development, Tongaat Hulett, South Africa, 2018.
764 Van der Zaag, P., and Carmo Vaz, Á.: Sharing the Incomati waters: cooperation and competition in the
765 balance, *Water Policy*, 5, 349-368, 2003.
766 Yilma, W. A.: Computation and spatial observation of water productivity in Awash River Basin,
767 UNESCO-IHE, Delft, 2017.
768 Zhang, Y., Peña-Arancibia, J. L., McVicar, T. R., Chiew, F. H., Vaze, J., Liu, C., Lu, X., Zheng, H.,
769 Wang, Y., and Liu, Y. Y.: Multi-decadal trends in global terrestrial evapotranspiration and its
770 components, *Scientific reports*, 6, 1-12, 2016.
771 Zwart, S. J., and Bastiaanssen, W. G.: Review of measured crop water productivity values for irrigated
772 wheat, rice, cotton and maize, *Agricultural water management*, 69, 115-133, 2004.

773