

A hydrological framework for persistent ~~river~~ pools along non-perennial rivers

Sarah A. Bourke¹, Margaret Shanafield², Paul Hedley³, Sarah Chapman^{1,3}, Shawan Dogramaci^{1,3}

¹School of Earth Sciences, University of Western Australia, Crawley WA 6009 Australia

²College of Science and Engineering, Flinders University, Bedford Park, SA 5042, Australia

³Rio Tinto Iron Ore, Perth, WA 6000 Australia

Correspondence to: Sarah A. Bourke (sarah.bourke@uwa.edu.au)

Abstract

Persistent surface water pools along non-perennial rivers represent an important water resource for plants, animals, and humans. While ecological studies of these features are not uncommon, these are rarely accompanied by a rigorous examination of the hydrological and hydrogeological characteristics that create or support ~~the persistent river~~ pools. Here we present an overarching framework for understanding the hydrology of persistent pools. We identified perched water, alluvial water through-flow and groundwater discharge as mechanisms that control the persistence of pools along river channels. Groundwater discharge is further categorized into that controlled by a geological contact or barrier (~~not previously described in the literature~~), and discharge controlled by topography. Emphasis is put on clearly defining through-flow pools and the different drivers of groundwater discharge, as this is lacking in the literature. ~~A~~The suite of regional-scale and pool-scale diagnostic tools (~~including geological mapping, available for elucidating these hydraulic data and hydrochemical surveys~~) is generally required to identify the mechanism(s) supporting persistent pools. ~~mechanisms are summarized and critiqued~~. Water fluxes to pools supported by through-flow alluvial and ~~bedrock~~ aquifers groundwater discharge can vary ~~seasonally and spatially and temporally and quantitatively~~ resolving ~~these inputs is generally~~ pool water balance components is commonly non-trivial. This

Formatted: Font color: Auto

framework allows the evaluation of the susceptibility of persistent pools along river channels to changes in climate or groundwater withdrawals. Finally, we ~~present three case studies from the Hamersley Basin of north-western Australia to demonstrate how~~ the application of this framework using a suite of the available diagnostic tools can be applied within to conduct a regional and pool-scale assessment of the proposed framework. hydrology of persistent river pools in the Hamersley Basin of north-western Australia.

1 Introduction

Permanent or almost permanent water features along non-perennial rivers (hereafter referred to as “persistent pools”) represent an important water resource for plants, animals, and humans. These persistent pools typically hold residual water from periodic surface flows, but also may receive input from underlying aquifers, and have alternately been termed pools (Bogan and Lytle, 2011; Jaeger and Olden, 2011; John, 1964), springs (Cushing and Wolf, 1984), waterholes (Arthington et al., 2005; Bunn et al., 2006; Davis et al., 2002; Hamilton et al., 2005; Knighton and Nanson, 2000; Rayner et al., 2009), and wetlands (Ashley et al., 2002). Non-perennial streams are globally distributed across all climate types (Shanafield et al., 2021; Messager et al., 2021). The occurrence of persistent pools along non-perennial streams has been well-documented (Bonada et al., 2020), particularly in the arid southwest of the U.S. (Bogan and Lytle, 2011) and across Australia (Arthington et al., 2005; Bunn et al., 2006; Davis et al., 2002).

Several studies have confirmed that ~~these water features~~ persistent river pools support a highly diverse community of flora and fauna (Shepard, 1993; Bonada et al., 2020) and can vary significantly in water quality (Stanley et al., 1997). Persistent pools are also often of cultural significance (Finn and Jackson, 2011; Yu, 2000), providing key connectivity across landscapes for biota (Sheldon et al., 2010; Goodrich et al., 2018), and early hominid migration (Cuthbert et al., 2017). Paradoxically, the unique ecosystems they support are also sensitive to changing climate and human activities (Bunn et al., 2006; Jaeger and Olden, 2011). Persistent pools may dry out naturally after successive dry years (Shanafield et al., 2021)

Formatted: Font color: Text 1

Formatted: Font color: Text 1

Formatted: Font color: Text 1

Formatted: Font color: Text 1

50 and recent studies have shown that persistent pools are also changing over time in response to alterations
51 in climate and sediment transport (Pearson et al., 2020, Bishop-Taylor et al., 2017). However, their
52 hydrology is typically poorly understood, and the treatment of the hydrology of persistent river pools
53 in published literature to date has been largely descriptive, vague, or tangential to the main theme of the
54 paper (Thoms and Sheldon, 2000). As a result, effective water resource management is limited by a
55 lack of understanding of the mechanisms and water sources that support these persistent pools.

56 By far, the published literature on persistent pools focuses on the ecological processes and patterns.
57 They have received attention for the role they play as a seasonal refuge (Goodrich et al., 2018), and
58 with regards to connectivity between riparian ecosystems (Godsey and Kirchner, 2014). For example,
59 they have been shown to host unique fish assemblages (Arthington et al., 2005; Labbe and Fausch,
60 2000), macroinvertebrate communities (Bogan and Lytle, 2011), and play a vital role in primary
61 productivity (Cushing and Wolf, 1984). Recently, it was shown that the structure, but not composition,
62 of these pools mirrors that of perennial rivers (Kelso and Entekin, 2018). However, rarely are these
63 ecological studies accompanied by a rigorous examination of the hydrological and hydrogeological
64 characteristics that provide a setting for these ecologic communities. Although there are isolated studies
65 that examine the composition of water and propose sources within specific pools (Hamilton et al., 2005;
66 Fellman et al., 2011), more frequently they simply describe the seasonal persistence of flow and basic
67 hydrologic parameters (typically temperature and salinity, sometimes also oxygen).

68 From a geological perspective, classification of persistent pools, and springs in general, dates back to
69 the early 20th Century, when geological drivers such as faults and interfaces between bedrock and the
70 overlying alluvial sediments were first discussed in relation to springs (Bryan, 1919; Meinzer, 1927).
71 Subsequently, a diverse, modern toolbox of hydrologic and hydrogeologic field and analysis methods
72 to analyse water source, age, and composition has evolved. Yet contemporary work on springs (Alfaro
73 and Wallace, 1994; Kresic, 2010), and hydrogeology textbooks (e.g. Fetter, 2001; Poeter et al., 2020)
74 are still based primarily on these early classifications. More recent classifications, moreover, are either
75 descriptive or focus on the context (karst vs desert) or observable spring water quality (Springer and

76 Stevens, 2009; Shepard, 1993; Alfaro and Wallace, 1994) and are not readily applied to understand the
77 hydrology of persistent river pools (not all persistent pools are springs). There has also been a robust
78 body of literature developed around surface water – groundwater interaction of the past 20 years (e.g.
79 Stonedahl et al., 2010; Winter et al., 1998), some of which informs our understanding of persistent river
80 pools, but has not yet been explicitly applied in this context. Similarly, our understanding of the
81 hydrology of non-perennial streams and their links to groundwater systems continues to expand
82 (Costigan et al., 2015; Gutiérrez-Jurado et al., 2019; Blackburn et al., 2021; Bourke et al., ~~2021~~
83 ~~review~~2021). Thus, there is both the need and opportunity for a comprehensive hydrologic framework
84 (Costigan et al. 2016; Leibowitz et al., 2018) that incorporates the relevant literature on groundwater
85 springs and surface - groundwater interaction, along with the modern suite of diagnostic tools, to
86 provide a robust ~~framework~~platform for understanding the hydraulic mechanism that support persistent
87 river pools.

88 ~~Here, we establish the conceptual models~~The aim of this paper is to consolidate the hydrologic
89 ~~processes and nomenclature required for~~observational diagnostic tools within existing literature into a
90 ~~more rigorous approach~~cohesive framework to support the study of persistent river pools. We first
91 ~~classify~~characterization the hydrology of persistent pools along non-perennial rivers. To this end, we i)
92 ~~identify the range of~~hydraulic mechanisms that support persistent supporting river pool persistence
93 ~~during periods of no-flow and show how these mechanisms can manifest in the landscape, ii) discuss~~
94 ~~the resulting susceptibility of pools (Section 2) and then to changing climate or groundwater~~
95 ~~withdrawals and iii) present and critique the hydrologic field-based observational tools available for~~
96 identifying these mechanisms based on field observation (Section 3). We then discuss the susceptibility
97 ~~of persistent pools to shifts in climate or groundwater withdrawals based on the mechanism(s)~~
98 ~~supporting them (Section 4). Finally, we present hydraulic mechanisms. The application of this~~
99 ~~framework is demonstrated a regional-scale assessment and three case~~pool-scale studies from the
100 Hamersley Basin of north-western Australia ~~to demonstrate how the available diagnostic tools can be~~
101 ~~applied within the proposed framework (Section 5). In conclusion, we suggest next steps for refining~~

Formatted: Font color: Text 1

Formatted: Font color: Text 1

Formatted: Font color: Text 1

Formatted: Font color: Text 1

Formatted: Font color: Text 1

Formatted: Font color: Auto

102 and applying this framework to improve our understanding and management of persistent river pools
103 (Section 6).

105 2 Hydraulic mechanisms supporting the persistence of in-stream pools

106 Here we propose a framework for classifying the key hydraulic mechanisms that support the persistence
107 of pools along non-perennial rivers in environments where the shallow, unconfined aquifer does not
108 support year-round flow (summarized in Table 1). Geologically, we start by considering the general
109 case of a non-perennial river along an alluvial channel (inundated and/or flowing during contemporary
110 flood events) within valley-fill sediments deposited over bedrock (Sections 2.1 and 2.2).
111 We then move onto a discussion of the ways in which geological structures and outcrops can underpin
112 the persistence of river pools by facilitating the outflow of regional groundwater (Section 2.3). The
113 range of geological settings for non-perennial streams is vast (Shanafield et al., 2021); we have
114 endeavoured to provide sufficient general guidance so that the principles can be applied to specific river
115 systems as required. Hydrologically, we only consider the water balance of residual river pools after
116 surface flows have ceased and consider any. Any water that has infiltrated to the subsurface saturated
117 zone (which may be a perched aquifer) is considered to be groundwater, irrespective of the residence
118 time of that water in the subsurface. This groundwater may be alluvial groundwater, stored within the
119 alluvium beneath and adjacent to the contemporary river, or regional groundwater stored within regional
120 aquifers.

121 Identification of the hydraulic mechanisms supporting in-stream pools is essential for effective
122 management of risks to pool ecosystems associated with groundwater withdrawals, changes to the
123 hydraulic properties of the catchment (e.g. land use change) or climate change. The water balance of
124 persistent pools may respond to a combination of more than one of these hydraulic mechanisms, and
125 the dominant mechanisms can vary spatially and temporally within pools. For example, a pool may
126 contain a mixture of water from streambed sediments.

127 Table 1 Summary of hydrological framework for persistent pools

Formatted: Justified, Space After: 5 pt

Formatted: Font: 11 pt, Not Bold, Font color: Text 1

Formatted: Normal, None, Don't keep with next

<u>Mechanism supporting pool persistence and water balance*</u>	<u>Physical characteristics</u>	<u>Hydrochemical characteristics</u>	<u>Susceptibility to stressors</u>
<u>Perched water</u> $\frac{\partial V}{\partial t} = EA$	<u>Topographic low that catches rainfall/runoff. Present in i) elevated hard-rock headwaters of catchments and ii) regionally low-lying topographic location. Water levels in aquifer lower than pool water levels. Vertical head gradient between pool and aquifer with unsaturated zone below pool.</u>	<u>Highly variable: hydrochemistry is a function of rainfall and subsequent evaporation. Substantial enrichment of solutes and water isotopes during dry season. Precipitated salts usually wash away in next flood, (or do not form because of low solute concentrations in streamflow source)</u>	<u>Relies on surface flows and overland runoff, which is directly tied to precipitation. Sensitive to climate but largely independent of groundwater use. Where infiltration capacity is high pools in downstream areas are more vulnerable to reduced rainfall.</u>
<u>Alluvium through-flow</u> $\frac{\partial V}{\partial t} = Q_i - Q_o - EA$	<u>Expression of river alluvium water table and through-flow. Head gradient reflects water table in alluvium. Water levels in pool coincident with water level in adjacent alluvium (cm-scale gradients expected at influent or effluent zones). Bank storage is important for pool water balance. Absence of surface geological features (e.g. hard-rock ridges) or waterfalls. Physical location may migrate as flood-scour re-shapes alluvium bedform.</u>	<u>Hydrochemically similar to alluvial water; enrichment of solutes and water isotopes during dry season limited by through-flow. Flood water flushes through the alluvium and replaces or mixes with any residual stored water (i.e. hydrochemically flood and alluvial groundwater are the same after a flood). More through-flow means shorter pool residence time and less enrichment.</u>	<u>Relatively small changes in rainfall or groundwater level can result in pool drying if the water level in the unconfined (alluvial) aquifer is reduced to below the base of the pool. Impact of withdrawals from alluvium depends on volume and proximity to pool. Abstraction from regional aquifers that are hydraulically connected to alluvium may also affect pool water levels by inducing downward leakage from alluvium.</u>
<u>Groundwater discharge</u> 1) <u>Geological contacts and barriers to flow</u> $\frac{\partial V}{\partial t} = Q_i - Q_o - EA$	<u>Two sub-types: i) Catchment constriction across ridges, or ii) aquifer thinning due to geological barrier intersecting topography. Presence of waterfalls or surface geological features (hard-rock ridges). Hydraulic head step-changes across pool feature. Carbonate deposits if source aquifer has sufficient alkalinity.</u>	<u>Consistent hydrochemical composition at point of contact/barrier. Evapo-concentration and evaporative enrichment down-gradient of discharge point. Initial pulse of water from runoff may be saline, pool salinity equilibrates with groundwater at low water levels.</u>	<u>Susceptibility to groundwater abstraction depends on scale of source groundwater reservoir (if large then potentially more resilient) and location of groundwater abstraction. Water persistence is less susceptible to changes in rainfall than other pool types. Presence of geological barrier between pool and groundwater abstraction may limit impacts.</u>
2) <u>Topographically controlled seepage from regional aquifer</u> $\frac{\partial V}{\partial t} = Q_i - EA$	<u>Topography intersects i) water table or ii) preferential flow from artesian aquifer. Standing water persists during dry season due to groundwater discharge in absence of rainfall. Negligible recharge to aquifer during flood event (pool is regional discharge zone). Carbonate deposits if source aquifer has sufficient alkalinity.</u>	<u>Consistent hydrochemical composition at point of seepage. Initial pulse of water from runoff may be saline, pool salinity equilibrates with groundwater at low water levels.</u>	<u>Susceptibility to groundwater abstraction depends on scale of source groundwater reservoir (if large then potentially more resilient) and location of groundwater abstraction. Hydraulic gradient supporting pools may be similar to pool depth. No geological barrier to limit susceptibility.</u>

Formatted Table

Formatted Table

*Water balance of residual pool when disconnected from surface water flows and if only the one mechanism is operating

and regional groundwater during certain hydroperiods, but the pool wouldn't persist through the dry season in that location without groundwater discharge from the regional aquifer. Thus, the maintenance of the stream ecosystem in its current state would require preservation of in-stream water storage and regional groundwater inflows.

2.1 Perched surface water

Perched surface water can be retained in topographic lows that retain rainfall and runoff during the dry season but are disconnected from the groundwater system (Fig. 1) if there is a low-permeability layer between the pool and the water table (Brunner et al., 2009). The presence of this low-permeability layer is essential to maintain a surface water body that is disconnected from the groundwater system. In the absence of a low-permeability layer, the surface water will slowly infiltrate into the subsurface (Shanafield et al., 2021). This low-permeability layer typically consists of clay, cemented sediments (e.g. calcrete) or bedrock (Melly et al., 2017; [Joque et al., 2010](#)). The persistence of water in these pools will depend on a) shading from direct sunlight and/or, b) sufficient water volume so that it is not completely depleted by evapotranspiration during the dry season (which will be a function of pool depth).

The occurrence and biological significance of such perched pools has been described particularly for rivers in inland Australia, where contribution of groundwater has been ruled out on the basis of pool hydrochemistry (e.g. Bunn et al., 2006; Fellman et al., 2016). For example, along Cooper Creek in central Australia, geochemical and isotopic studies revealed a lack of connection to groundwater, and that convergence of flows at the surface and subsequent evaporative water loss-controlled water volumes in many pools (Knighton and Nanson, 1994; Hamilton et al., 2005). These pools are situated in depressions caused by erosion through sandy subsurface layers (note that the low-conductivity layer for perching was not elucidated). It should be noted, that definitive characterization of perched surface water (i.e. disconnected from the groundwater system) requires the measurement of a vertical hydraulic gradient between the water level in the pool and local groundwater, as well as identification of a low-permeability layer at the base of the surface water (Brunner et al. 2009). Although the ecological significance of perched in-stream pools is documented within the literature (Boulton et al., 2003; Arthington et al., 2005; Bonada et al, 2020), there is typically no detailed analysis of the hydrology and sampling is synoptic, so the mechanism of persistence is unclear.

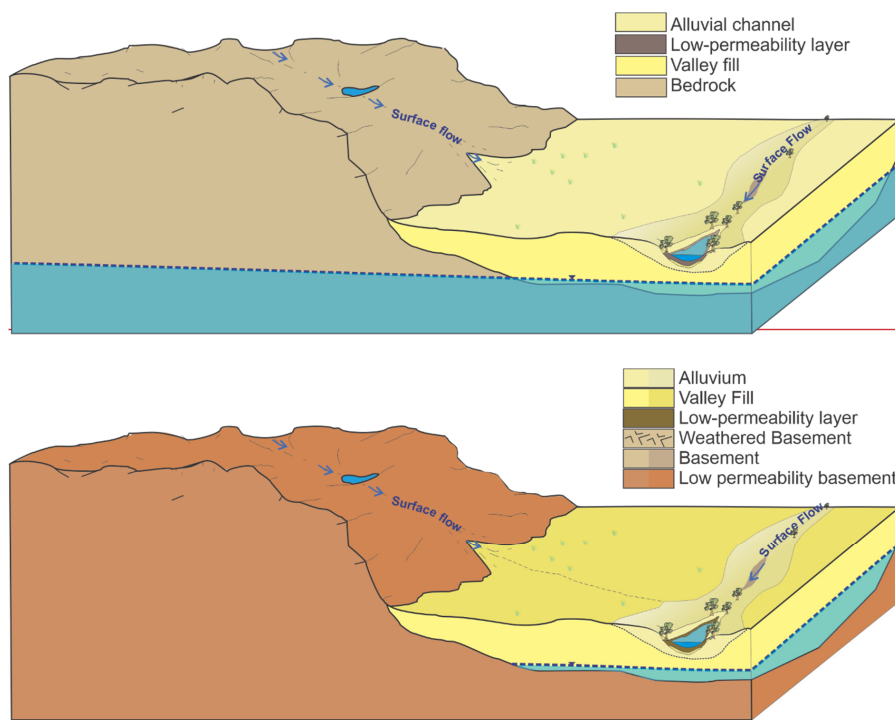


Figure 1 Schematic illustration of perched pools where rainfall-runoff collects in a depression that has morphology that limits evaporation and/or low permeability lithology beneath the pool that limit infiltration, allowing water to be retained for an extended duration.

2.2 Through-flow of alluvial groundwater

After a rainfall event, increases in water levels in rivers result in water storage and flow within the unconsolidated alluvial sediments in the beds and banks of stream channels (Cranswick and Cook., 2015). As the streamflow recedes after a flood, continuous surface flow ceases, resulting in isolated pools along the river channel. Water will remain within the alluvial sediments that line the stream channel beyond the period of surface flow, for a duration that will vary according to the amount of water stored, the hydraulic gradient within the sediments (from the headwaters to the catchment outlet)

172 and the permeability of the sediments (Doble et al., 2012; McCallum and Shanafield, 2016). This
173 alluvial water can be either perched above, or connected to, the regional unconfined aquifer depending
174 on the depth of the regional water table and the presence of a low- permeability layer to enable perching
175 (Villeneuve et al. 2015, Rhodes et al., 2017). Once within the alluvial sediments, this water can
176 subsequently 1) flow through the alluvial sediments towards the bottom of the catchment 2) be lost to
177 the atmosphere through evapotranspiration, or 3) migrate vertically downward into lower geological
178 layers (Shanafield et al., 2021); [Leibowitz and Brooks, 2008](#)). Typically, a combination of these three
179 processes occurs, and persistent surface water pools can be expressions of this water within streambed
180 sediments (Fig. 2). Indeed, this source of water, limited to the floodplain, distinguishes the through-
181 flow mechanism from regional groundwater discharge. ~~The water level in these pools~~[Although the](#)
182 [subsurface residence times of this alluvial water may be on the order of months to years \(Doble et al.,](#)
183 [2012\), this water can be accurately described as groundwater. The water level in pools supported by](#)
184 [this alluvial groundwater](#) is effectively a window into the water table within the streambed sediments
185 (Townley and Trefry, 2000).

186 The subsurface water flow through these disconnected pools can be hydrologically considered as an
187 elongated, through-flow lake with inflow from the subsurface at the top of the pool and outflow to the
188 subsurface at the bottom of the pool (Townley and Trefry, 2000; Zlotnik et al., 2009). The rate of inflow
189 to (and outflow from) the pool is dependent on the hydraulic conductivity of the sediments (Käser et
190 al., 2009) and the balance of inflow and outflow controls the depth and residence time of water in the
191 pools (Cardenas and Wilson, 2007). The duration of persistence of the pool will also depend on the
192 storage capacity of the alluvial sediments that support it; these pools may dry seasonally (Rau et al.
193 2017) or persist throughout the dry season if the water level in the alluvial sediments remains above the
194 elevation of the pool. The water level and hydraulic gradients adjacent to persistent through-flow pools
195 can change seasonally in response to alluvial recharge by rainfall events and subsequent depletion of
196 water stored in the sediments. This process is analogous to “bank storage” adjacent to flowing streams
197 (e.g. Käser et al., 2009; McCallum and Shanafield, 2016).


198 There is a comprehensive body of literature on the dynamics of through-flow lakes (Pidwirny et al.,
199 2006; Zlotnik et al., 2009; Ong et al., 2010; Befus et al., 2012). The storage and movement of water
200 within alluvial sediments beneath and adjacent to streams has also been described extensively in
201 literature on hyporheic exchange (e.g. Stonedahl 2010) with water fluxes across temporal (days to
202 weeks) and spatial scales (centimetres to tens of metres). From a hydrological perspective, the key
203 feature of the hyporheic zone, and hyporheic exchange, is that it is a zone of mixing between surface
204 water and groundwater. Based on this definition, alluvial water that is perched above, and not connected
205 to, the regional aquifer, does not fit the dominant conceptualization of hyporheic exchange. However,
206 some authors have considered alluvial flows through this hyporheic lens (Rau et al., 2017, del Vecchia
207 et al., under review) and the physical process that links streambed elevation changes to flow paths
208 beneath pool-riffle sequences can be relevant to persistent in-stream pools, regardless of connection
209 status.

210

211

a)

- Alluvial channel
- Low-permeability layer
- Valley fill
- Bedrock

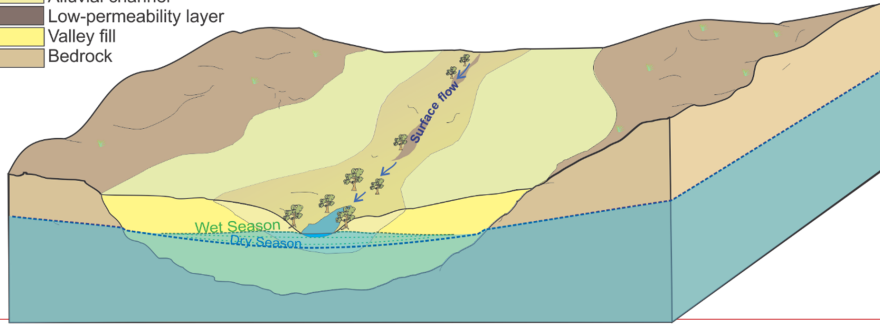


212

213

b)

- Alluvial channel
- Low-permeability layer
- Valley fill
- Bedrock

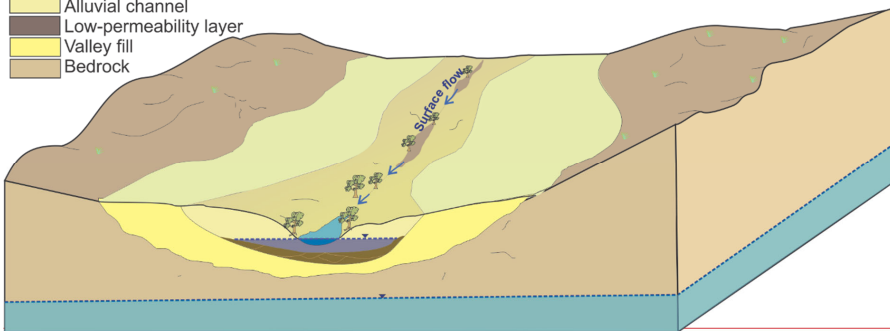

214

215

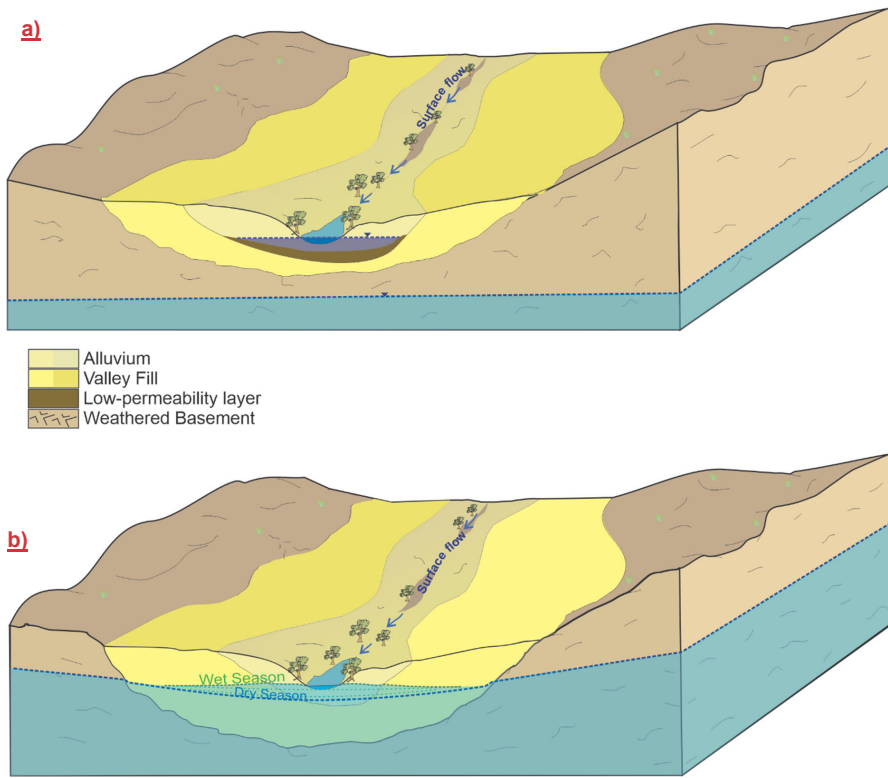


Figure 2- Schematic illustration of pools that are maintained by through-flow from the adjacent alluvial sediments. The water in these alluvial sediments can be either a) connected to the unconfined aquifer, or b) form a perched aquifer if the water is stored over a low-permeability geological layer.

2.3 Regional groundwater discharge

Similar to springs, rivers can be discharge points for regional groundwater, and this discharge can support the persistence of in-stream pools during periods without surface flow. Groundwater discharge through springs has been articulated into a range of detailed and complex categories, which are not consistent within the literature (Bryan, 1919; Springer and Stevens, 2009; Kresic and Stevanovic, 2010). These existing spring classifications are based on geological mechanism, hydrochemical properties,

227 landscape setting, or a combination of all three, leading to broad categories such as thermal or artesian,
228 as well as nuanced distinctions based on detailed geological structures (Alfaro 1994). For the purposes
229 of understanding persistent river pools, this array of categories is both overly complex and incomplete
230 from a hydraulic point of view. For example, Springer (2009) presents a classification of springs based
231 on their “sphere of influence”, which is the setting into which the groundwater flows. A “limnocrene
232 spring” is simply any groundwater that discharges to a pool, as distinct from say a “cave spring”, which
233 emerges into a cave. On this basis, one might consider all persistent pools that are not perched as
234 limnocrene springs. However, the schema also articulates “helocrene springs” which are associated with
235 wetlands and “rheocrene springs” that emerge into stream channels. These also seem to be potentially
236 fitting labels for persistent river pools, which does one choose? And what would it matter for water
237 resource management and the conservation of pool ecosystems if you chose one category over the other?

238 We suggest two broad categories can encompass the range of hydraulic mechanisms supporting
239 persistent pools in intermittent stream channels; geological features (i.e. lithologic contacts and barriers
240 to flow), and topographic lows. This distinction is valuable because it facilitates an understanding of
241 the source of groundwater discharge (shallow, near-water table vs deeper groundwater) and the size of
242 the reservoir supporting the pool, both of which contribute to the susceptibility of pool persistence to
243 groundwater pumping. This distinction can also be useful for identifying the dominant hydrogeological
244 control on the influx of regional groundwater to the pool; in hard-rock settings with geological contacts
245 and barriers the influx may be limited by fracture aperture, whereas in a topographic low the influx will
246 be controlled by hydraulic head gradient between the pool and the groundwater source (see Case Studies
247 below).

248 **2.3.1 Geological contacts and barriers to flow**


249 Geological contacts are well-established as potential drivers of groundwater discharge through springs
250 (Bryan, 1919; Meinzer, 1927). For example, contact springs occur where groundwater discharges over
251 a low-permeability layer, commonly associated with springs along the side of a hill or mountain (Kresic
252 and Stevanovic, 2010; Bryan, 1919). Similarly, pool persistence can be supported by groundwater

253 discharge into a stream channel over a low-permeability geological layer caused by the reduced the
254 vertical span of the aquifer (Fig. 3a); where this vertical span reduces to zero is known colloquially as
255 the aquifer “pinching out”. This mechanism has been identified as driving regional groundwater
256 discharge to streams (Gardener et al., 2011), but to our knowledge has not yet been explicitly discussed
257 in the context of persistent river pools.

258 Outflow of groundwater where a catchment is constrained by hard-rock ridges that constrict
259 groundwater flow (by reducing the lateral span of surface flow and the aquifer) can also support the
260 persistence of surface water pools (Fig. 3b). Although the importance of catchment constriction has
261 been identified by practitioners (e.g. Queensland Government, 2015), to our knowledge the discharge
262 of groundwater caused by catchment constriction as a mechanism for surface water generation has not
263 previously been described in published literature (springs or otherwise).

264

265

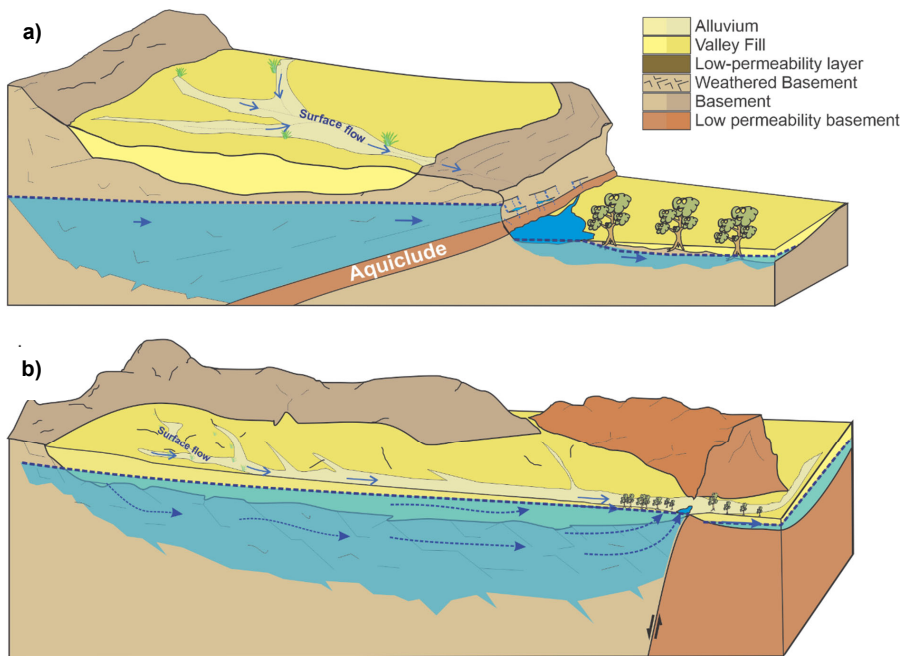

266

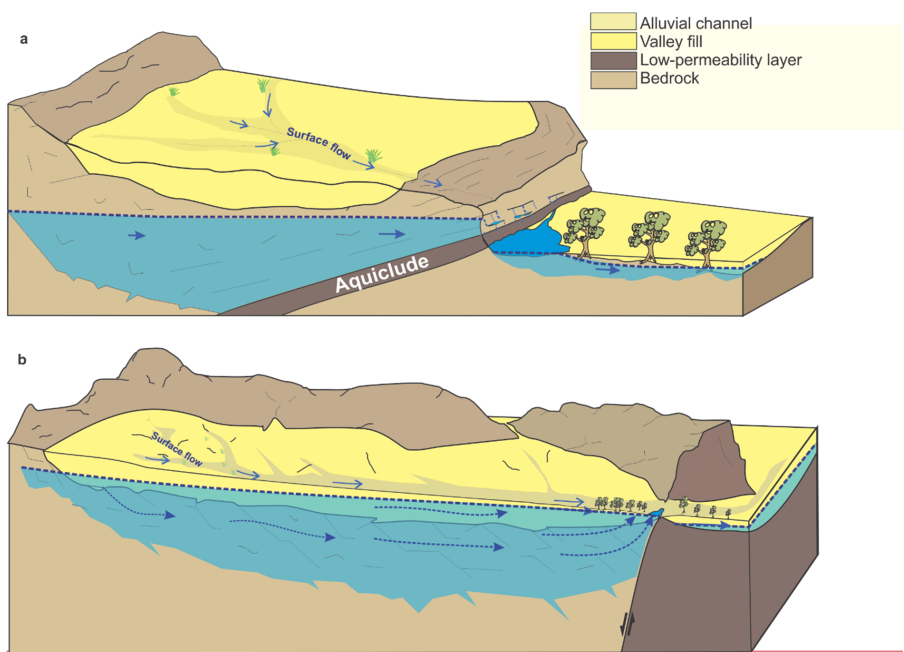



Figure 3 Schematic illustration of a groundwater discharge pools where surface water persistence is driven by geological barriers that a) cause a regional aquifer to pinch out vertically, or b) form a lateral constraint on the catchment and underlying regional aquifer.

2.3.2 Topographically controlled seepage from regional aquifers

Pool persistence can be sustained by groundwater seepage from regional aquifers in the absence of geological barriers or contacts if there is a topographic low that intersects the regional water table (Fig. 4). This mechanism will generally occur where differential erosion causes a difference in topography, which is equivalent to depression springs (Kresic and Stevanovic, 2010; Bryan, 1919) and analogous to the lakes that form in pit voids left after mining ceases (McJannet et al., 2017). For example, pools likely supported by this mechanism have been identified within the Adelaide region of South Australia where erosion within a syncline has exposed bedrock, facilitating groundwater discharge (Lamontagne et al., 2021). Within the humid landscape of south-eastern USA, Deemy and Rasmussen (2017) also describe a vast number of pools along intermittent streams. These pools, which are seasonally connected by surface flows during the wet season, are expressions of the karst groundwater networks that underlie them and may be considered special cases of topographically-controlled groundwater discharge pools. Topographic depressions that fill seasonally with water, known as “sloughs” on the North American prairie, operate similarly hydraulically (seasonal snow melt inputs, evaporation induces groundwater inflow), but these sloughs are not within river channels and commonly reside within low-permeability glacial clays so that they are supported by the local-scale ~~the~~ groundwater system (Van der Kamp and Hayashi, 2009). Even some Arctic lakes, formed in shallow topographic depressions, receiving groundwater input and seasonally situated within a stream of snowmelt runoff (Gibson, 2002) can be considered as pools supported by topographically-controlled groundwater discharge.

Pools may also be sustained by topographically controlled seepage from confined aquifers if there is a fault or fissure that acts as a conduit to groundwater flow (different to Fig. 3a because there is no geological transition to sustain a hydraulic gradient across the pool). Topographically controlled

293 discharge from a confined aquifer is analogous to artesian mound springs like those found in the Great
 294 Artesian Basin of central Australia (Ponder, 1986), but these do not reside within non-perennial streams.
 295 Groundwater discharge along fractures or faults has been identified as an important mechanism for
 296 groundwater discharge to the Fitzroy River in northern Australia (Harrington et al., 2013), but the
 297 significance of this regional groundwater discharge to individual persistent pools is not yet known.

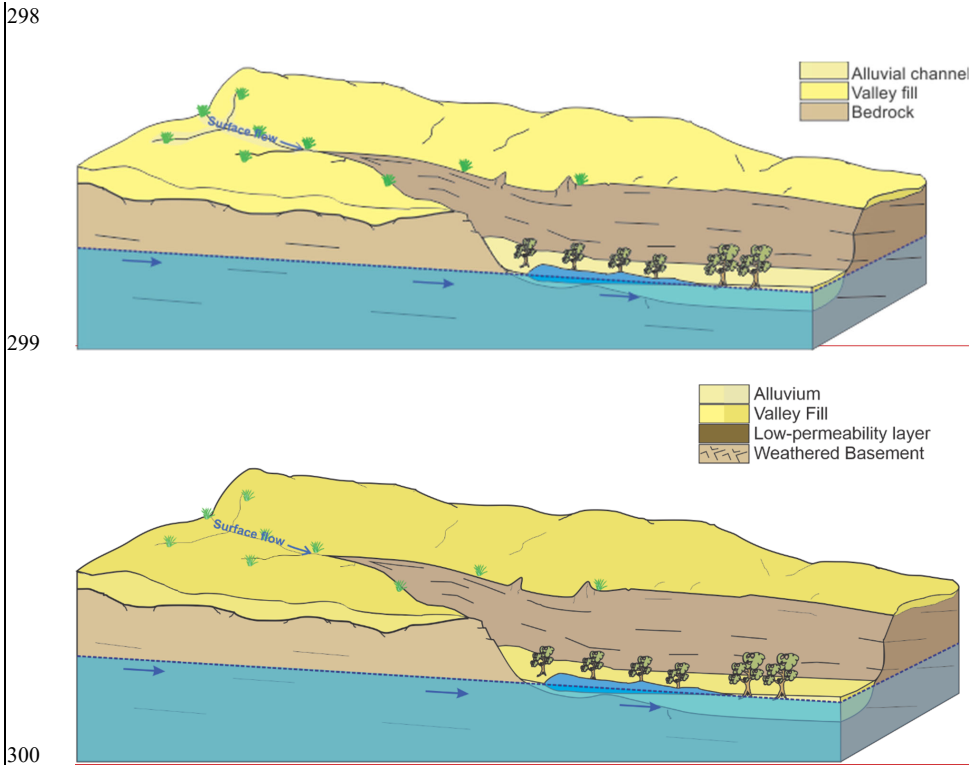

301 **Figure 4 Schematic illustration of a pool receiving topographically-controlled groundwater outflow from**
 302 **an unconfined regional aquifer.**

303

33 Management implications: Susceptibility of persistent pools to changing hydrological regimes

Robust water resource management in semi-arid regions requires an understanding of the ways in which human activities or shifting climates can alter water balances and/or the duration of pool water persistence (Caldwell et al., 2020; Huang et al., 2020). In the absence of published literature quantifying the susceptibility of persistent pools, we present general guidance on the susceptibility of pools to changes in rainfall and groundwater withdrawals based on hydrologic principles (Table 1).

Intuitively, the size of the reservoir (surface catchment or groundwater storage) that supplies water to the pool should be a key factor in determining the susceptibility of persistent pools to changing hydrological regimes. However, the patchiness of rainfall and substantial transmission losses typical of semi-arid zone intermittent river catchments (Shanafield and Cook, 2014) mean that for pools reliant on surface catchments (perched or supported by alluvial through-flow), catchment size alone is unlikely to be a robust predictor of resilience. As has been demonstrated for arid zone wetlands in Australia (Roshier et al., 2001), pools that are storage-limited can be highly sensitive to climate variability. However, increasing heavy rainfall events may not necessarily result in increased pool persistence (particularly in pools closest to the location of rainfall) if subsurface storage up-gradient of the pool is already filling during the wet season. In this case, subsequent rainfall will increase streamflow downstream, but not result in increased subsurface storage in the reservoir supporting the pool. Moreover, recent work has shown that groundwater response times are sensitive to aridity, with longer response times associated with increased aridity (Cuthbert et al., 2019), so that there may be substantial time-lags between climate variability and hydrologic response in pools supported by groundwater discharge.

We have distinguished between geological or topographic control on groundwater discharge, but this distinction may not always be critical from a management perspective. In any system connected to groundwater, perturbation of the dynamic equilibrium between groundwater recharge and discharge can

329 impact surface water-groundwater interactions; the timing and extent of the change will depend on the
330 magnitude and rate of alteration (Winter et al., 1998). The hydraulic head gradients (and groundwater
331 discharge rates) supporting persistent river pools may be small (Δh on the order of cms), so that small
332 decreases in groundwater level (either due to successive low-rainfall years, or groundwater
333 withdrawals) can potentially have a detrimental impact on the pool and cause the pool to dry out
334 (particularly for topographically controlled groundwater discharge to pools).

335 For pools supported by alluvial through-flow, the water balance is dominated by water outflow from
336 contemporary fluvial deposits but abstraction from regional groundwater could impact the pool if these
337 two subsurface reservoirs are hydraulically connected. The volume of groundwater storage in the source
338 reservoir can indicate the resilience of pools to hydrological change (i.e. a longer groundwater system
339 response time), but impacts will also depend on the distance from the recharge zone or groundwater
340 abstraction (Cook et al., 2003). The time-lag prior to a decrease in groundwater outflow to the pool, and
341 shape of the response (i.e. a slow decline or sharp decrease), will also depend on the spatial distribution
342 of the forcing (pool distance from recharge or groundwater abstraction) (Cook et al., 2003; Manga,
343 1999). Thus, focussed groundwater abstraction close to a pool will cause a larger and faster reduction
344 in groundwater outflow than diffuse abstraction across the aquifer, or abstraction further away (Cook
345 et al., 2003; Theis, 1940). For example, groundwater pumped from within 1 km of a pool will result in
346 a rapid decrease in discharge (months to years) but the same volume of abstraction distributed
347 throughout the catchment will result in a more gradual decline in groundwater discharge to the pool
348 (years to decades). Susceptibility can be further modified by geological barriers, which may not be
349 obvious from the surface topography or regional geological maps (Bense et al., 2013), but can isolate
350 pools from the regional groundwater system and either i) increase susceptibility to pumping within the
351 connected aquifer, or ii) reduce susceptibility if the pumping is on the other side of the barrier (Marshall
352 et al. 2019).

4 Diagnostic tools for elucidating hydraulic mechanisms supporting pool persistence

Several tools in the hydrologist's toolbox are appropriate for gathering the data needed to distinguish between the ~~types of pool~~ hydraulic mechanisms that support pool-persistence as outlined in the previous section. For most of these, there are no examples ~~in published literature that are~~ specific to persistent pools along intermittent rivers. Therefore, ~~in this section,~~ provides general background and suggested considerations for ~~use within the application of these methods to characterize the hydrology of persistent pools is given for a (Table 2). A selection of the most common methods. The information these methods provide is critical to calculate water balances and identify susceptibility to groundwater withdrawals and climate change (Section 5).~~

~~The process of understanding pool occurrence is an iterative one. Data must~~ these tools may ~~be collected to infer the mechanism supporting the pool (e.g. geological mapping, water levels, salinity), but also an understanding deployed at a given site to characterize a) the relationship of the pool mode of occurrence can be used to inform appropriate monitoring regimes. For example, pools that are supported by the discharge of deep regional groundwater are potentially vulnerable to groundwater abstraction, while perched pools are unlikely to be impacted. Thus, if managing impacts from groundwater abstraction, then monitoring efforts would be best directed to the groundwater dependant pools at the expense of pools that are disconnected from the to the groundwater system. It is also important to note the potential logistical constraints that can apply when installing any infrastructure for sampling and monitoring in stream pools. Persistent pools in arid landscapes are commonly sites of environmental and cultural significance (Finn and Jackson, 2011; Yu, 2000) so that appropriate approvals and permissions typically must be obtained prior to the installation of monitoring infrastructure. This may restrict the types of data that can be collected. Moreover, some sites may be sacred sites, limiting who is able to access them. Surface water features in general are a draw for travellers and roaming livestock, so that any infrastructure must be secure from theft or damage. Flood events and sudden, flashy streamflows are also potential threats to infrastructure, with substantial sediment and vegetation (branches, trees)~~

Formatted: Font color: Auto

Formatted: Font color: Auto

Formatted: Font color: Auto

transported across the floodplain to heights of 2–3 m that can (and have) destroyed sampling equipment. Furthermore, because regional groundwater inputs can be a relatively small (but important) component of the, and b) the relative contributions of evaporation, transpiration, and groundwater fluxes (alluvial and regional) to the pool water balance of pools, snapshot sampling commonly targets the end of the dry season. This is when the contribution of regional groundwater is likely to be at its greatest. However, when unseasonal or early rainfall occurs, or if infrastructure has been damaged, that endpoint in the water balance may not be captured.

Formatted: Font color: Auto

Formatted: Font color: Auto

Table 2. Summary of pros and cons of available diagnostic tools for assessing the hydraulic mechanisms supporting persistent river pools.

<u>Diagnostic tool</u>	<u>Strengths</u>	<u>Limitations</u>
<u>Regional scale</u>		
<u>Landscape position and geological context</u>	Low cost, can be assessed using publicly available data.	May be misleading if interpretation made in the absence of robust understanding of subsurface geology and groundwater system. Water balance components not quantified. Surface geology maps may not adequately capture subsurface structures that are important drivers of groundwater discharge.
<u>Hydrogeological context</u>	Low cost if the regional hydrogeological system has been previously characterized and water table map (or data) are publicly available.	Hydrogeological maps are not as ubiquitous as surface geology maps and may have been developed based on sparse data sets so that surface water-groundwater interaction is not adequately captured.
<u>Remote sensing</u>	Existing data sets available. Requires expertise in spatial data analysis.	Spatial or temporal resolution of data may not be adequate to capture pool hydrology. Water balance components not quantified.
<u>Pool hydrography</u>	Water level measuring equipment relatively low cost and readily available.	Equipment may be washed out during flood events. Pool water levels need to be combined with adjacent alluvial and groundwater level data to enable quantification of water balance components. Needs to be combined with bathymetry data to quantify water storage volume in pool.
<u>Pool scale</u>		
<u>Pool hydrochemistry</u>	Salinity (electrical conductivity) can be measured as a time-series using relatively inexpensive equipment (approx. double the cost of a water level logger).	Multiple discrete samples required to develop time-series. Overlapping values between end-members and spatio-temporal variation can complicate interpretation.
<u>Stable isotopes of water</u>	Readily available, low-cost analyses. Mixing and fractionation processes relatively well understood.	Snapshot data interpreted in the absence of an understanding of pool water volumes may be misleading. Sample preservation required for some analytes. Overlapping values between end-members and spatio-temporal variation can complicate interpretation.
<u>Radon-222</u>	Distinct end-members between surface and subsurface waters. Can measure in-situ time-series using a portable sampler Rad-7.	Some rock types have naturally low radon concentrations. Requires specialist equipment to measure. Cannot easily distinguish between alluvial and regional groundwater.
<u>Temperature</u>	Sensors are relatively cheap, well-established technique for inferring vertical water fluxes in streambeds. Can rapidly and cheaply measure pool-	Alluvial and regional groundwater fluxes not easily separated. Can indicate locations of water inflow but not

bed temperature. Relatively simple to collect time-series data at multiple depths and estimate vertical water fluxes.

outflow. While vertical fluxes are relatively simple to estimate, lateral fluxes are often overlooked.

4.1 Regional-scale tools

4.1.1 Remote sensing and image analysis

Mapping the persistence of vegetation and water in the landscape based on remotely sensed data (i.e. NDVI or NDWI) or aerial photos can be useful to identify river pools that persist in the absence of rainfall (Haas et al., 2009; Soti et al., 2009; Alaibakhsh et al., 2017).

3.1 Landscape position and remote sensing
) This can be valuable for identifying hydrologic assets that may require risk assessment and protection but does not elucidate the hydraulic mechanism supporting the persistence of the pool. Interpretation of the key hydraulic mechanism(s) supporting a pool requires additional information on the landscape position and hydrogeological context of the pool. In combination, these regional-scale approaches are likely to be particularly useful in remote regions that are difficult to access and pool-specific data collection is challenging.

4.1.2 Landscape position and geological context

Landscape position can provide some clues as to the mechanism controlling the persistence of a given pool. For example, a pool located high in the catchment on impermeable basement rock is likely to be a perched pool. ~~A pool that is immediately prior to a~~ Pools that reside within extensive alluvial deposits are likely to be supported at least in part by through-flow of alluvial groundwater. The presence or absence of alluvial deposits capable of hosting a significant volume of groundwater can often be determined by visual inspection, but geophysical tools or drilling are required to confirm the vertical extent of the alluvial aquifer. Similarly, a pool that is immediately prior to a topographic ridge that constrains the catchment is likely to be supported by geologically constrained groundwater discharge.

Lateral catchment constriction can commonly be identified from publicly available aerial imagery, but identification of vertical catchment constriction will usually require geological data from drilling or regional-scale geophysical surveys. ~~The presence~~ Aerial geophysics (e.g. AEM) in particular can aid in identifying subsurface lithologic geometries and low-permeability layers that can be important controls on groundwater outflow, but may not be obvious from aerial photographs or surface geology maps (Bourke et al., 2021). While the locations of geological contacts can be evident from readily available maps of surface geology, but the hydraulic properties of geological contacts are not always known a-priori. Geological transitions can be zones of high permeability or barriers, or a combination of both (e.g. faults with high permeability in the vertical, low permeability laterally) depending on the depositional and deformational history of the area (Bense et al., 2013). Hydraulic head gradients can provide valuable insights, with a step change in hydraulic head a key indicator for the presence of a hydraulic barrier. The presence of active deposition of geological precipitates can also be indicative of pool mode of occurrence with carbonates associated with groundwater discharge and subsequent degassing of CO₂ (Mather et al., 2019). Mapping the persistence of vegetation and water in the landscape based on remotely sensed data (i.e. NDVI or NDWI) can be used to identify pools that persist (Haas et al., 2009; Soti et al., 2009; Alaibakhsh et al., 2017), but this alone does not explain the hydraulic mechanism determining the location of the pool. Combining these vegetation indices with aerial geophysics (i.e. AEM) can aid in developing a better understanding of hydraulic mechanisms in remote areas, allowing the identification of low-permeability layers or geological structures that are not obvious from aerial photographs (Bourke et al., *In Review*).

3.2 Hydrography and pool water balances

~~Direct~~ 4.1.3 Hydrogeological context

~~Regional~~ measurement of water balances in arid and semi-arid regions can be logistically difficult (Villeneuve et al., 2015). Rainfall (and therefore runoff) in arid and semi-arid environments is

438 commonly patchy and water fluxes can be either too large to measure (streamflow during a cyclone) or
439 too small to measure directly (dry-season groundwater seepage fluxes) (Shannon et al., 2002;
440 Shanafield and Cook, 2014). In the absence of data to characterize pool hydrology, regional
441 groundwater mapping can provide insights into the mechanisms supporting persistent pools, particularly
442 if the geology has also been well-characterized (see Case Studies below for examples). Water table
443 maps can articulate areas of groundwater recharge and discharge, and steep hydraulic gradients that
444 may (but not definitely) reflect the presence of geological barriers (e.g. Fitts, 2013). For the ecologist,
445 it is important to understand that regional-scale groundwater maps are always based on point data of
446 Hydraulic head gradients can provide valuable insights: a step-change in hydraulic heads measured in
447 the groundwater system, interpreted by a hydrogeologist in the context of what is known about geology
448 and surface drainage (Siegel, 2008). These mapshead can be refined based on measures of groundwater
449 salinity and groundwater residence times (from environmental tracer data), both of which generally
450 increase along a groundwater flow path. As such, these maps are limited by the spatial distribution of
451 the data available (commonly sparse) and therefore may not accurately capture local-scale features and
452 processes relevant to key indicator for the presence of a particular pool of interest. Nevertheless,
453 ifhydraulic barrier. If an interpreted water table surface suggests that the regional water table is tens of
454 meters below ground in the vicinity of a pool, then the surface water is likely (but not definitely)
455 perched. If a pool is situated in a region that has been identified as a regional groundwater discharge
456 zone, then this groundwater discharge is likely to be supporting pool persistence. The presence of active
457 deposition of geological precipitates can also be indicative of pool mode of occurrence with carbonates
458 associated with groundwater discharge and subsequent degassing of CO₂ (Mather et al., 2019).

459 4.2 Pool-scale tools

460 4.2.1 Pool hydrography and water balance

461 If instrumentation can be installed in the pool, then it may be possible to characterize the pool water
462 balance. Once a pool becomes isolated from the flowing river, and in the absence of rainfall, a general
463 pool water balance is given by;

Formatted: Font color: Auto

Formatted: Font color: Auto

Formatted: Font color: Auto

Formatted: Font color: Auto

$$\frac{\partial V}{\partial t} = Q_i - Q_o - EA \quad (1)$$

where V is the volume of water in the pool (L^3), t is time (T), Q_i is the water flux from the subsurface into the pool (L^3T^{-1}), Q_o is the water flux out of the pool into the subsurface (L^3T^{-1}), E is the evaporation rate (LTL^{-1}) and A is the surface area of the pool (L^2). Here we neglect rainfall on the basis that a significant rainfall event is likely to initiate streamflow, but if this is not the case, then rainfall can be included as an additional term PA , where P is the precipitation rate (LT^{-1}). The water level in the pool, h_p (L), can be routinely measured by installing pressure transducers, but conversion of water levels to pool water volume requires knowledge of pool bathymetry, and the relationship between h_p and V will change during the dry season as the pool water level recedes, or if pool bathymetry is altered by scour and/or sediment deposition during flood events. Evaporation rates can be taken from regional data or empirical equations, but actual losses can vary depending on solar shading, wind exposure and transpiration (McMahon et al., 2016). For pools with visible surface inflow or outflow, these rates can potentially be measured using flow gauging (or dilution gauging), but relatively small flow rates and bifurcation of flow can make this challenging.

Modified versions of this general water balance can be defined for particular pools, depending on the hydraulic mechanism(s) supporting pool persistence (see Table 1). For perched pools, which are disconnected from the groundwater system, $Q_i = Q_o = 0$, so that the only component of the water balance is water loss through evaporation. Pools that are supported by alluvial through-flow are hydraulically connected to the water stored in the streambed alluvium. Water levels within this alluvium will be more dynamic than regional groundwater levels, so that influx and efflux rates that can change over time in response to rainfall events or seasonal drying (of the near-subsurface). For pools supported by groundwater discharge, influx will dominate over efflux ($Q_i > Q_o$). If the groundwater discharge is over an impermeable aquiclude (see Fig. 3b) there will commonly be a seepage zone up-gradient of the pool so that water influx is via surface inflow, but outflow to the subsurface can form a source of groundwater recharge to the adjacent (down-gradient) aquifer. If the groundwater discharge is controlled by topography, then the pool will be a site of regional groundwater discharge so that local

groundwater recharge (and Q_o) should be negligible. An understanding of pool water balances can be particularly important for interpreting hydrochemical data (see 4.3)

If a pool is connected to the groundwater system Q_i (or Q_o) can be estimated from Darcy's Law;

$$Q_i = K \frac{\Delta h}{\Delta x} A_i \quad (2)$$

where K is hydraulic conductivity, $\frac{\Delta h}{\Delta x}$ is the hydraulic gradient between the pool and the source aquifer, and A_i is the area over which the groundwater inflow occurs (which will usually be less than the total area of the base of the pool). The major limitations of this approach are that K of natural sediments varies by ten orders of magnitude (Fetter, 2001), and that the area of groundwater inflow needs to be assumed or estimated using a secondary method. Hydraulic gradients between pools and streambed sediments can be measured using monitoring wells or temporary drive points, with Δh usually on the order of centimetres at most. Determination of the hydraulic gradient between regional aquifers requires that the water level in the pool has been surveyed to a common datum and there is a monitoring well near the pool to measure the groundwater level relative to that datum. In shallow, groundwater dominated lakes, geophysical methods have also been used to determine local hydraulic gradients, and therefore the direction of the water flux(es) between groundwater and surface water (Ong et al., 2010; Befus et al., 2012). Blackburn et al (2021) similarly applied shallow geophysical surveys, combined with mapping of hydraulic conductivities, to identify the key structures and processes controlling water fluxes between groundwater systems and the streams that host persistent pools (Blackburn et al., 2021).

~~3.3 Tracer techniques and pool mass balance~~

4.2.2 Pool hydrochemistry and salinity (electrical conductivity)

Numerous studies of streams and lakes have employed hydrochemical and mass balance approaches to quantify water sources (Cook, 2013; Sharma and Kansal, 2013) and groundwater recharge (Scanlon et al., 2006). Some of these methods are also applicable in persistent pools, but may require modification,

Formatted: Space Before: 6 pt, After: 6 pt

or an iterative approach that allows for refinement of the methods as the mechanism supporting the pool is elucidated. In its simplest form, snapshot measurements of pool hydrochemistry (salinity, pH, major ions) can help distinguish pools that are connected to groundwater from those that are not (Williams and Siebert, 1963). Dissolved ions ~~and stable isotopes of water~~ are relatively cheap and easy to measure and have been used extensively to estimate recharge/discharge, groundwater flow, and ecohydrology in arid climates (Herczeg and Leaney, 2011). ~~However, their application to identify or quantify water sources can be limited by overlapping values.~~ Electrical conductivity (EC) as an indicator of salinity can be measured at high temporal resolution using readily available loggers, which can be connected to telemetry systems if required. Time series of EC ~~(Bourke et al., 2015), and spatiotemporal variability (see Case Studies).~~ Time series of electrical conductivity (EC) and stable isotopes through flood-recession cycles can indicate relative rates of evaporation and through-flow (Siebers et al., 2016; Fellman et al., 2011) and allow identification of the hydraulic mechanism(s) supporting pool persistence. For example, if a pool is supported by regional groundwater discharge, the ~~re-equilibrated with EC will re-equilibrate towards~~ the groundwater EC value during the dry-season ~~(provided there isn't another streamflow event see case studies in Section 5);~~ in a perched pool, the pool EC will not plateau, but continue to evapo-concentrate until the next flood event. ~~However, in systems with large flood events, loggers can regularly become lost as the flood moves through, so EC loggers may need to be collected and downloaded prior to anticipated flood events, which isn't always practical.~~

4.2.3 Stable isotopes of water

Stable isotopic values of pool water ($\delta^{18}\text{O}$ and $\delta^2\text{H}$) can be interpreted similarly to electrical conductivity; groundwater seepage from a regional aquifer will have a relatively consistent isotopic value, while a pool isolated from the groundwater source will experience isotopic enrichment through evaporation (Hamilton et al., 2005), ~~as demonstrated in Case Study 2 (Section 5.2.2).~~ Pools receiving alluvial throughflow will have isotopic values that reflect the balance of inputs (from alluvial groundwater) and outputs (evapotranspiration and outflow to alluvial groundwater). ~~However, the interpretation stable isotopic values can be limited by overlapping ranges of values across different~~

water sources (Bourke et al., 2015), and spatiotemporal variability (see Case Studies). The isotopic values in the alluvial water itself can ~~also~~ become enriched through evapotranspiration during the dry season resulting in variability over time, and throughout the catchment, so that end-member values should be defined locally. In one case, strontium isotopes were found to be more useful than stable isotopes of water for identifying groundwater contributions to in-stream pools because the concentration in the groundwater end-member was far more constrained than salinity or stable isotope values (Bestland et al., 2017). Importantly, ~~the although these data are relatively easy to measure, their interpretation of hydrochemical data should ideally be supported by a robust understanding of the pool geometry, water flow paths and the surrounding geology to ensure that the hydraulic mechanisms identified are physically plausible. For example, Fellman et al. (2011) identified a number of perched pools along an semi-arid zone alluvial stream channel, but in the absence of a low permeability layer within the alluvium (which was not identified) it is unclear how pool water would persist in the absence of hydraulic connection to alluvial groundwater (or regional groundwater discharge).~~

4.2.4 Radon-222 and groundwater age indicators

Radon-222 is a commonly applied tracer in studies of surface water – groundwater interaction, and ²²²Rn mass balances have been effective for quantifying groundwater contributions to streams and lakes (Cook, 2013; Cook et al., 2008). Preliminary measurements of ²²²Rn in persistent pools ~~indicates~~ indicate substantial spatial variability in ²²²Rn activity along the pools, reflecting the spatial distribution of groundwater influx and gas exchange. This spatial variability will limit quantification of groundwater discharge based on the ²²²Rn mass balance but can allow for hot-spots of groundwater discharge to be identified (see Case Studies).

Other groundwater age indicators (³H, ⁴He, ¹⁴C) have been measured along streams to identify groundwater sources (Gardener et al., 2011; Bourke et al., 2014), but their applicability in pools is yet to be determined. Given that shallow, stagnant water is common, tracers such as ¹⁴C or ³H, which don't rapidly equilibrate with the atmosphere (Bourke et al., 2014; Cook and Dogramaci, 2019), are likely to be better than gaseous isotopic tracers (e.g. ⁴He) that equilibrate rapidly (Gardner et al., 2011). If a mass

balance approach is applied, then hydraulic measurements to constrain the pool water balance should be made in conjunction with hydrochemical sampling to ensure that the water balance is appropriately reflected in the mass balance.

4.2.5 Temperature as a tracer

Temperature measurements have been used extensively to identify and quantify water fluxes across streambeds and lakebeds (e.g. Shanafield et al., 2010; Lautz, 2012). Diel amplitudes of subsurface temperatures have been used to identify the transition from flowing stream to dry channel (with isolated pools) in ephemeral systems (Rau et al., 2017). In persistent pools, temperatures at the water sediment interface can be used to map zones of groundwater inflow (Conant, 2004). In arid zones, groundwater temperatures will often be warmer than pool temperatures and this type of survey is best conducted at dawn when the temperature gradient between pool and groundwater is at a maximum and there are no confounding effects from direct solar radiation. This mapping can be conducted using point sensors or thermal cameras, but in natural water bodies this method has primarily found success at thermal springs where the temperature difference between surface waters and groundwater inflows is on the order of 10 °C (Briggs et al., 2016; Cardenas et al., 2011).

Vertical profiles of temperature can also be used to estimate vertical fluid fluxes but the application of this approach in pools with coarse alluvial sediments (commonly through-flow pools) is likely to be limited by lateral flow within the subsurface when $K_h > K_v$ (Rau et al., 2010; Lautz, 2010). Analytical solutions for temperature-based flux estimates also break-down at low flux rates where the difference between convection and conduction is difficult to determine (Stallman, 1965). Recently developed instrumentation for measuring 3D flux fields (Banks et al., 2018) shows promise, but installation in coarse alluvial sediments like those commonly found in arid streambeds remains a challenge. Point-scale measurements also require up-scaling and these methods may not be applicable in fractured hard-rock pools.

Formatted: Font color: Text 1

~~4 Management implications: Susceptibility of persistent pools to changing hydrological regimes~~

~~Robust water resource management in semi arid regions requires an understanding of the ways in which human activities or shifting climates can alter water balances and/or the duration of pool water persistence (Caldwell et al., 2020; Huang et al., 2020). In the absence of published literature quantifying the susceptibility of persistent pools, we present general guidance on the susceptibility of pools to changes in rainfall and groundwater withdrawals based on hydrologic principles (Table 1). Intuitively, the size of the reservoir (surface catchment or groundwater storage) that supplies water to the pool should be a key factor in determining the susceptibility of persistent pools to changing hydrological regimes. However, the patchiness of rainfall and substantial transmission losses typical of semi arid zone intermittent river catchments (Shanafield and Cook, 2014) mean that for pools reliant on surface catchments (perched or supported by alluvial through flow), catchment size alone is unlikely to be a robust predictor of resilience. As has been demonstrated for arid zone wetlands in Australia (Roshier et al., 2001), pools that are storage limited can be highly sensitive to climate variability. However, increasing heavy rainfall events may not necessarily result in increased pool persistence (particularly in pools closest to the location of rainfall) if subsurface storage up gradient of the pool is already filling during the wet season. In this case, subsequent rainfall will increase streamflow downstream, but not result in increased subsurface storage in the reservoir supporting the pool. Moreover, recent work has shown that groundwater response times are sensitive to aridity, with longer response times associated with increased aridity (Cuthbert et al., 2019), so that there may be substantial time lags between climate variability and hydrologic response in pools supported by groundwater discharge.~~

~~We have distinguished between geological or topographic control on groundwater discharge, but this distinction may not always be critical from a management perspective. In any system connected to groundwater, perturbation of the dynamic equilibrium between groundwater recharge and discharge can impact surface water groundwater interactions; the timing and extent of the change will depend on the magnitude and rate of alteration (Winter et al., 1998). The hydraulic head gradients (and groundwater~~

Field Code Changed

616 discharge rates) supporting persistent river pools may be small (Δh on the order of cms), so that small
617 decreases in groundwater level (either due to successive low rainfall years, or groundwater
618 withdrawals) can potentially have a detrimental impact on the pool and cause the pool to dry out
619 (particularly for topographically controlled groundwater discharge to pools). For pools supported by
620 alluvial through flow, the water balance (Table 1) is dominated by water outflow from contemporary
621 fluvial deposits but abstraction from regional groundwater could impact the pool if these two subsurface
622 reservoirs are hydraulically connected. The volume of groundwater storage in the source reservoir can
623 indicate the resilience of pools to hydrological change (i.e. a longer groundwater system response time),
624 but impacts will also depend on the distance from the recharge zone or groundwater abstraction (Cook
625 et al., 2003). The time lag prior to a decrease in groundwater outflow to the pool, and shape of the
626 response (i.e. a slow decline or sharp decrease), will also depend on the spatial distribution of the forcing
627 (pool distance from recharge or groundwater abstraction) (Cook et al., 2003; Manga, 1999). Thus,
628 focussed groundwater abstraction close to a pool will cause a larger and faster reduction in groundwater
629 outflow than diffuse abstraction across the aquifer, or abstraction further away (Cook et al., 2003; Theis,
630 1940). For example, groundwater pumped from within 1 km of a pool will result in a rapid decrease in
631 discharge (months to years) but the same volume of abstraction distributed throughout the catchment
632 will result in a more gradual decline in groundwater discharge to the pool (years to decades).
633 Susceptibility can be further modified by geological barriers, which may not be obvious from the
634 surface topography or regional geological maps (Bense et al., 2013), but can isolate pools from the
635 regional groundwater system and either i) increase susceptibility to pumping within the connected
636 aquifer, or ii) reduce susceptibility if the pumping is on the other side of the barrier (Marshall et al.
637 2019).

Formatted: Font: 11 pt, Not Bold, Font color: Text 1

Table 1 Summary of hydrological framework for persistent pools

Formatted: Normal, None, Don't keep with next

Mechanism supporting pool persistence and water balance ^a	Physical characteristics	Hydrochemical characteristics	Susceptibility to stressors
Perched water $\frac{\partial V}{\partial t} = EA$	Topographic low that catches rainfall/runoff. Present in i) elevated hard-rock headwaters of catchments and ii) regionally low-lying topographic location. Water levels in aquifer lower than pool water levels. Vertical head gradient between pool and aquifer with unsaturated zone below pool.	Highly variable; hydrochemistry is a function of rainfall and subsequent evaporation. Substantial enrichment of solutes and water isotopes during dry season. Precipitated salts usually wash away in next flood, (or do not form because of low solute concentrations in streamflow source)	Relies on surface flows and overland runoff, which is directly tied to precipitation. Sensitive to climate but largely independent of groundwater use. Where infiltration capacity is high pools in downstream areas are more vulnerable to reduced rainfall.
Alluvium through-flow $\frac{\partial V}{\partial t} = Q_i - Q_o - EA$	Expression of river alluvium water table and through-flow. Head gradient reflects water table in alluvium. Water levels in pool coincident with water level in adjacent alluvium (on-scale gradients expected at influent or effluent zones). Bank storage is important for pool water balance. Absence of surface geological features (e.g. hard-rock ridges) or waterfalls. Physical location may migrate as flood-scour re-shapes alluvium bedform.	Hydrochemically similar to alluvial water; enrichment of solutes and water isotopes during dry season limited by through-flow. Flood water flushes through the alluvium and replaces or mixes with any residual stored water (i.e. hydrochemically-flood and alluvial groundwater are the same after a flood). More through-flow means shorter pool residence time and less enrichment.	Relatively small changes in rainfall or groundwater level can result in pool drying if the water level in the unconfined (alluvial) aquifer is reduced to below the base of the pool. Impact of withdrawals from alluvium depends on volume and proximity to pool. Abstraction from regional aquifers that are hydraulically connected to alluvium may also affect pool water levels by inducing downward leakage from alluvium.
Groundwater discharge 1) Geological contacts and barriers to flow $\frac{\partial V}{\partial t} = Q_i - Q_o - EA$	Two sub-types: i) Catchment constriction across ridges, or ii) aquifer thinning due to geological barrier intersecting topography. Presence of waterfalls or surface geological features (hard-rock ridges). Hydraulic head step changes across pool features. Carbonate deposits if source aquifer has sufficient alkalinity.	Consistent hydrochemical composition at point of contact/barrier. Evaporative concentration and evaporative enrichment down gradient of discharge point. Initial pulse of water from runoff may be saline, pool salinity equilibrates with groundwater at low water levels.	Susceptibility to groundwater abstraction depends on scale of source groundwater reservoir (if large then potentially more resilient) and location of groundwater abstraction. Water persistence is less susceptible to changes in rainfall than other pool types. Presence of geological barrier between pool and groundwater abstraction may limit impacts.
2) Topographically controlled seepage from regional aquifer $\frac{\partial V}{\partial t} = Q_i - EA$	Topography intersects i) water table or ii) preferential flow from artesian aquifer. Standing water persists during dry season due to groundwater discharge in absence of rainfall. Negligible recharge to aquifer during flood event (pool is regional discharge zone). Carbonate deposits if source aquifer has sufficient alkalinity.	Consistent hydrochemical composition at point of seepage. Initial pulse of water from runoff may be saline, pool salinity equilibrates with groundwater at low water levels.	Susceptibility to groundwater abstraction depends on scale of source groundwater reservoir (if large then potentially more resilient) and location of groundwater abstraction. Hydraulic gradient supporting pools may be similar to pool depth. No geological barrier to limit susceptibility.

Formatted Table

Formatted Table

^aWater balance of residual pool when disconnected from surface water flows and if only the one mechanism is operating

642 5 Application of this framework to persistent pools in the Hamersley Basin

643 In this section we demonstrate the application of this framework to persistent river pools in north-west
644 Australia. ~~We (Figure 5). Here we~~ begin by providing an overview of ~~our understanding of the~~
645 ~~hydrology of hydraulic mechanisms supporting~~ persistent river-pools in the Hamersley Basin
646 ~~region based on regional-scale tools; landscape position, geological and hydrogeological context.~~ We
647 then present three ~~pool-scale~~ case studies to demonstrate how ~~some of the tools described in Section 3~~
648 ~~this contextual understanding can be applied supported by time-series data from pools to identify further~~
649 ~~elucidate spatio-temporal variability in~~ the key hydraulic mechanisms supporting pool persistence, ~~and~~
650 ~~the implications for pool susceptibility.~~

651 5.1 Overview of persistent pools in the Hamersley Basin.

652 The Hamersley Basin has an arid-tropical climate with a wet season from October to April and a dry
653 season from May to September (Sturman and Tapper, 1996). Average annual rainfall is less than 300
654 mm yr⁻¹ with most rain falling between December and April (www.bom.gov.au). Annual rainfall
655 statistics can vary dramatically, depending on the influence of thunderstorms and cyclone activity.
656 Thunderstorm activity is commonly highly localised, limiting the potential for spatial interpolation of
657 data from individual monitoring sites. Annual evaporation is around 3000 mm yr⁻¹ (www.bom.gov.au),
658 or about ten times annual rainfall, so that permanent surface water is rare. Ranges, spurs, and hills are
659 separated by broad alluvial valleys with numerous deep gorges created by differential erosion. During
660 large flood events, runoff creates sheet-flow along the main channel and the extensive floodplain can
661 remain flooded for several weeks. In the absence of cyclonic rainfall, surface water is generally limited
662 to a series of disconnected pools along the main channels. The valleys are filled with up to 100 m of
663 consolidated and unconsolidated Tertiary detrital material consisting of clays, gravels, and chemical
664 precipitates. The Quaternary alluvial sediments along the creek-lines and incised channels (incised on
665 the order of metres) consist of coarse, poorly sorted gravel and cobbles (thickness of up to tens of
666 metres, widths of up to hundreds of metres). Fresh groundwater is abundant throughout the region, both
667 within the Archean basement rocks, where permeability is increased via weathering, fracturing or

Formatted: Normal, Line spacing: Double

mineralisation, and within the Tertiary and Quaternary sediments (Dogramaci et al., 2012). The geological basin multiple surface water catchments with drainage flowing from the headwaters in the elevated areas towards the Fortescue, Robe or Ashburton rivers.

Numerous persistent water features have been identified

Formatted: Font: Not Italic

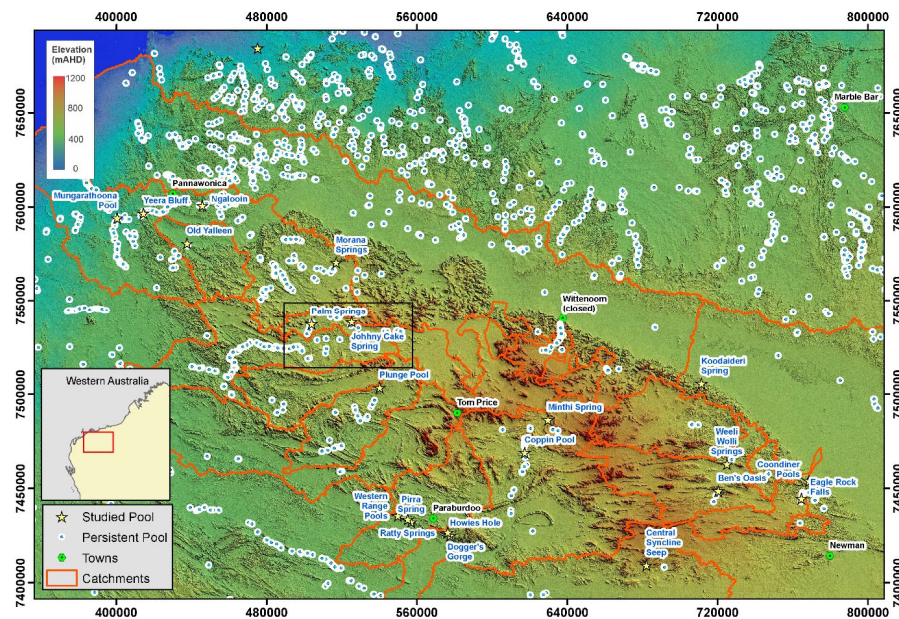



Figure 5 Prevalence of persistent pools on watercourses in the Hamersley Basin and selected pools examined in detail. Persistent pools based on “Waterholes” features from Geodata Topo 250K Series 3 data set, <http://pid.geoscience.gov.au/dataset/ga/63999>) Black rectangle indicates extent of Figure 7.

5.1 Regional-scale assessment of persistent pools within the Hamersley Basin

Regional- scale mapping of known pools has provided valuable insights about the distribution of pools and the likely hydraulic mechanisms supporting their persistence. Broad national-scale mapping of “waterholes” as part of the publicly available topographic data set for this region identifies many pools

681 along drainage lines that span the range of hydrogeological mechanisms in the framework outlined in
682 Section 2 (Fig. 5). A sub-set of but does not capture all of the known pools (see Figure 5). National-
683 scale groundwater dependent ecosystem mapping is also available across Australia
684 (<http://www.bom.gov.au/water/groundwater/gde/map.shtml>). This data identifies the groundwater
685 dependence of some river reaches within the Hammersley Basin, but does not readily allow
686 groundwater-dependent persistent pools to be differentiated from groundwater-dependent flowing
687 streams. Image analysis and local knowledge has allowed for the identification of additional pools that
688 were not mapped within the publicly available dataset.

689 Overlaying pool locations with topographic mapping allowed a number of pools located at points of
690 lateral catchment constriction to be identified suggesting that groundwater outflow (either alluvial or
691 regional groundwater) supports pool persistence. The presence of a topographic constriction was
692 confirmed using image analysis and direct observation (Figure 6).

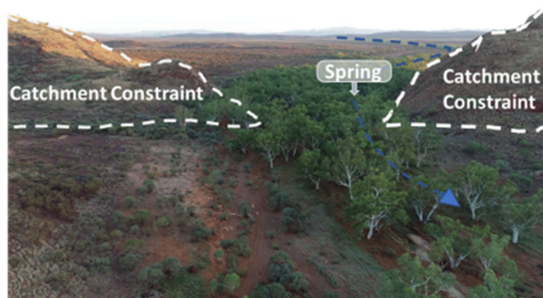

693
694 **Figure 6 Photo showing a river pool that persists where a surface catchment is constricted resulting in a**
695 **groundwater spring.**

696
697 By overlaying the locations of pools with available maps of surface geology we identified pools
698 overlying elevated basement rock in the absence of an extensive alluvial channel, indicating the
699 potential for these (22 pools) have been investigated in more detail (to be perched surface water (see
700 un-named pools at southern extent of Fig. 8 for example). For other pools their location at the likely
701 edge of a groundwater flow system where low-permeability basement intersected topography suggested

702 regional groundwater outflow at geological contacts as an important hydraulic mechanism supporting
703 persistence (e.g. Johnny Cake spring on Fig-6) to characterize their mode of occurrence (Dogramaci,
704 2016). Based on data from this subset of pools, we have generalized the distribution of the
705 hydrogeologic 8.). A number of pools were adjacent to mapped dykes; the persistence of these pools is
706 potentially influenced by regional groundwater outflow to the surface facilitated by the dyke acting as
707 a hydraulic barrier within the subsurface. Other pools were located on mapped river- channel alluvium,
708 indicating the likelihood that through-flow of alluvial groundwater at least partially supports pool
709 persistence (e.g. pools along the contemporary flow path of Caves Creek in Fig 7). The Hammersley
710 Basin is a fractured-rock province that does not host aquifers that are used for water supply (GSWA
711 2015). As such, publicly available groundwater level data is sparse and regional-scale mapping of water
712 table or depth to groundwater contours that could further inform an assessment of the connectivity of
713 pools to underlying groundwater is not available. NDVI mapping was undertaken (Fig 7 inset); while
714 this provides insights into persistence, it did not allow for the further elucidation of hydrological
715 processes that may be driving this persistence.

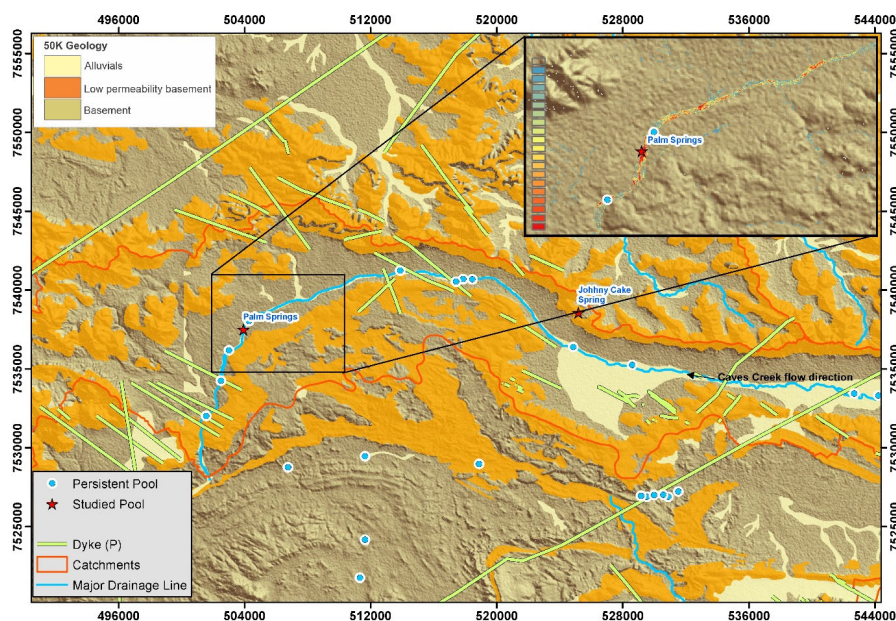


Figure 7 Map showing locations of persistent pools along Caves Creek relative to basement, low-permeability basement, dykes and alluvial river-channel sediments (Geological mapping 50K). Inset shows NDVI (on a scale of 0 in blue to 100 in red).

In-situ observation of the landscape position of pools and the qualitative duration or pool persistence has also provided valuable insights into hydraulic mechanisms supporting pool persistence across this landscape (Fig. 7). Perched pools are generally found in elevated, hard rock areas where erosion has created a deep pool that is shaded to minimise evaporation. For example, there are approximately 20 pools that reside within the ephemeral drainage lines of the Western Range that flow over hard-rock for a few days in response to rainfall and do not have extensive alluvial deposits; a subset of these pools that are deeply incised and shaded persist all year round (those that are shallower and more exposed to sunlight dry-out faster and are not perennial). These pools are important ecologically (supporting bat populations) and culturally (supporting traditional hunting practices). Because these pools are not connected to groundwater, they are not directly at risk of depletion by groundwater withdrawals. However, they are susceptible to changes in streamflow that reduce the water storage in the pools at the

commencement of the dry season, either due to Figure 9a). The presence of an extensive alluvial deposits that would facilitate alluvial groundwater throughflow as a hydraulic mechanism was also able to be inferred based on surface geological mapping and direct visual observation (Figure 8b). In other cases, alluvial deposits are present, and this alluvium is shaded within a gorge, so that alluvial through-flow is a major component of the water balance and evaporation is reduced inflows or in filling by sedimentation relative to the alluvium outside the gorge, allowing surface water to persist (Figure 8c). Persistent pools that are connected to groundwater are also abundant across the Basin, with the folded and tilted layered sedimentary sequence resulting in numerous exposures of geological contacts at the land surface. Groundwater discharge from the unconfined aquifer through contact springs is therefore a common mechanism supporting persistent river pools in this region. These are particularly prevalent at the intersection of fluvial deposits and erosion resistant, low permeability basement rocks. Groundwater fed pools are also present due to catchment constraints where erosion resistant layers form ridges in the landscape. Pools supported in part (or completely) by alluvial through flow are also common along the stream channels due to the storage capacity of the coarse alluvial sediments. The hydraulic resistance caused by a catchment constraint can further enhance the persistence of alluvial water storage up stream of the constraint, resulting in numerous persistent pools supported by alluvial throughflow. Although these pools are supported by groundwater, the hydraulic gradients maintaining groundwater inflow to the pool are commonly on the order of tens of centimetres, so that relatively small changes in the water balance can result in the pool drying out (e.g. successive low rainfall years).



Perched pool persists due to shading



Alluvial through-flow supports persistence




Groundwater outflow at geological contacts



Topography intersects regional aquifer*

*This Photo by Unknown Author is licensed under [CC BY-ND](#)

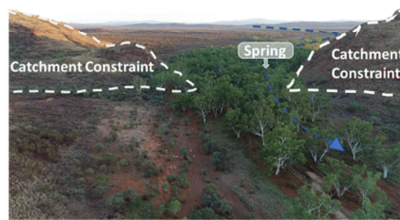

Groundwater outflow at catchment constraint

Figure 5 Photos of persistent pools within the Hamersley Basin, spanning the range of hydrogeological mechanisms within the proposed framework.

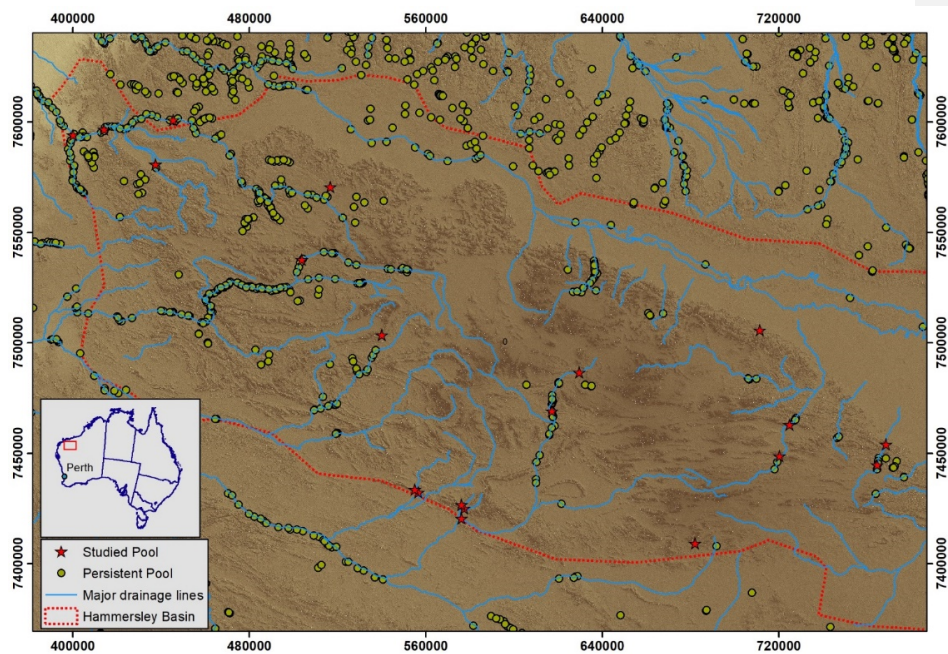


Figure 6 Prevalence of persistent pools on watercourses in the Hamersley Basin (“Waterholes” features from Geodata Topo 250K Series 3 data set, <http://pid.geoscience.gov.au/dataset/ga/63999>) and select pools examined in detail.

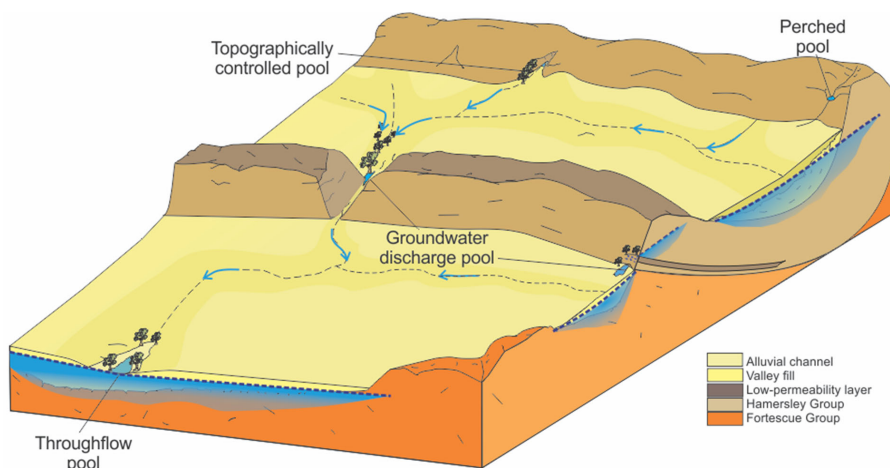


Figure 7 Generalized landscape position of each type of persistent pool within the Hamersley Basin.



Figure 9 Photos demonstrating presence or absence of alluvium indicating a) no alluvium and perched surface water, b) extensive alluvium and pool supported by through-flow of alluvial groundwater, c) alluvium within shaded gorge so that persistence of water sourced from outflow of alluvial groundwater is enhanced.

The exposure and outflow of regional groundwater as a mechanism supporting pool persistence was also able to be inferred from regional-scale data sets and direct observation in some cases. For example, some pools persist within deeply incised river gorges that do not contain extensive alluvial deposits and are therefore likely to be supported by topographically controlled outflow of regional groundwater (Figure 9a). In another case, groundwater was observed visibly seeping from an exposed rock-face above a pool (Figure 9b) inferring that the exposure of that geological unit at the surface and subsequent outflow of groundwater is important for supporting the persistence of that pool.

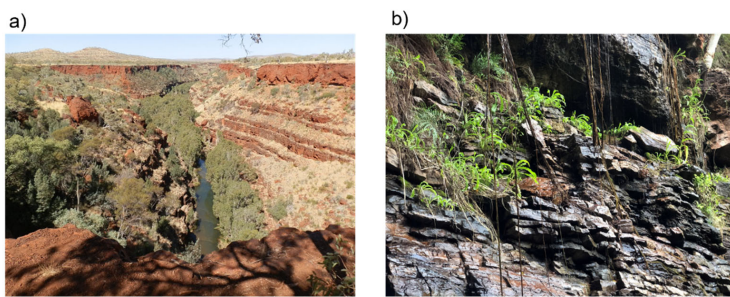


Figure 10 Photos showing a) river pool persisting within a substantially incised gorge suggesting regional groundwater outflow supports pool persistence (*This Photo by Unknown Author is licensed under CC BY-ND), and b) visible groundwater outflow from an exposed rock face above a persistent river pool.

5.2 Case Studies Pool-scale case studies

The following three case studies demonstrate the application of this framework to three different pools (or pool systems) within the Hamersley Basin. To the best of our knowledge these pools have not been impacted by human activities, groundwater withdrawals or surface water diversions. These case-studies we aim to demonstrate a) the application value of key methods to infer hydraulic mechanisms supporting pool persistence, and understanding the complexity hydrogeological setting of applying these methods in real-world situations. We start with a simple case, and build complexity with each case study, using data that highlight the pool, and b) spatio-temporal and spatial variability in pool water balances and hydrochemistry and provide valuable insight into the supporting hydraulic mechanisms (but also limits the appropriateness. Each case study begins by describing our understanding of basing an assessment

on a small number of samples), the landscape position, geological and hydrogeological context of the pool. Estimated hydraulic conductivities for the geological formations referred to herein are summarised in Table 3. We then introduce time-series data; the first case study utilizes water levels and EC in the pool and groundwater; the second case study adds in time-series of stable isotopes values of pool water and groundwater; the third case study brings in radon-222 and temperature mapping. By combining time-series data with an understanding of landscape position and hydrogeological setting, we are able to infer hydraulic mechanisms supporting pool persistence. The implications of these identified hydraulic mechanisms for the susceptibility of the pools to groundwater withdrawals or changing climate are also discussed.

Table 3 Estimated horizontal hydraulic conductivities of geological units relevant to pool-scale case studies.

Geological unit or formation	Hydraulic Conductivity (m d ⁻¹)
Alluvium/colluvium	0.2 - 5
Marra Mamba Formation	0.001 - 10
Wittenoom Formation	0.001 - 3
Brockman Formation	0.3 - 12.4
Weeli Wolli Formation	0.1
Dolerite Dykes	0.001

5.2.1 Case study 1: Plunge Pool

Plunge Pool (Fig. 8a10a) is located at the base of a steep topographic drop-off that exposes the Marra Mamba Formation (fractured banded iron formation, shale and chert). The Wittenoom Formation (consisting of dolomite and shale) and Marra Mamba Formation are hydraulically connected and form an unconfined regional aquifer where there has been sufficient weathering and fracturing to generate secondary porosity. This aquifer is 50-100 m thick and divided laterally by (sub-)vertical dykes on the order of 1 km apart (but as close as 100 m) that act as hydraulic barriers within the groundwater system. The surface catchment has an area of approximately 26 km² and is storage limited. Regional groundwater in the adjacent aquifer has a hydraulic head of 547 m AHD above sea level (asl) at a distance of 200 m from the pool, increasing to 557 m AHD asl 600 m from the pool, indicating the


816 presence of a geological barrier between these two monitoring wells. Seasonal variation in groundwater
817 hydraulic heads is minimal (on the order of 0.2 m).

818 The pool is perennial with seasonal water level fluctuation driven by variation in streamflow,
819 groundwater inflow and evapotranspiration (Fig. 8b10b). The varying proportions of the pool water
820 balance components are reflected in the temporal variation in the salinity of water in the pool. At the
821 onset of the first wet season flood the salinity in the pool spikes (up to 4171 mS/cm), reflecting the
822 flushing of surficial salts that were deposited during the previous dry through the catchment. Subsequent
823 rainfall events then cause a rapid freshening of the pool (to as low as 124 mS/cm within 1 day). In the
824 absence of rainfall, the salinity of the pool equilibrates to ~~the~~ that of groundwater in the regional aquifer
825 (900 mS/cm). Given the consistency of groundwater levels, this inflow rate will be relatively constant,
826 so that (in the absence of streamflow) the variability in the salinity of the pool is driven by seasonal
827 variation in temperature and evapotranspiration (Bureau of Meteorology Station #007185, Paraburdoo
828 Aero). These seasonal weather patterns drive evapo-concentration of solutes in the pool as water levels
829 fall during the dry season and freshening of the pool as water levels rise when evapotranspiration
830 decreases in winter (May-Sep). Measurement of the relationship between water levels and pool water
831 volume will allow for these pool water balance components to be quantitatively resolved.

832 Based on these data, the dominant hydraulic mechanism supporting the persistence of this pool is
833 groundwater inflow from the regional aquifer that is intersected by topography (Section 2.3.2). In spite
834 of the source being a regional aquifer, the spatial extent of the groundwater reservoir supporting the
835 pool is limited by the presence of geological dykes (Fig. 8e10c). The pool effectively acts as a “drain”
836 on the underlying/adjacent compartment of the unconfined aquifer with the inflow rate to the pool
837 controlled by the hydraulic conductivity of the aquifer (variation in groundwater levels is negligible).
838 The pool is also hydraulically connected to the alluvial aquifer and water from the pool is likely to
839 infiltrate into the alluvium on the down-gradient side, but this has not been measured directly (alluvium
840 is absent up-gradient of the pool – therefore alluvial through-flow is not a supporting mechanism). The
841 susceptibility of this pool to groundwater withdrawals is controlled by the hydrogeological

842 compartmentalization. The pool will be more susceptible to groundwater withdrawals from the aquifer
843 between the dyke and the pool, and less susceptible groundwater withdrawals outside of this
844 compartment. Given that evaporation is an important component of the water balance and contributes
845 to the regulation of water levels, this pool is also susceptible to increases in evapotranspiration that are
846 predicted as temperatures increase under climate change (IPCC, 2021).

847

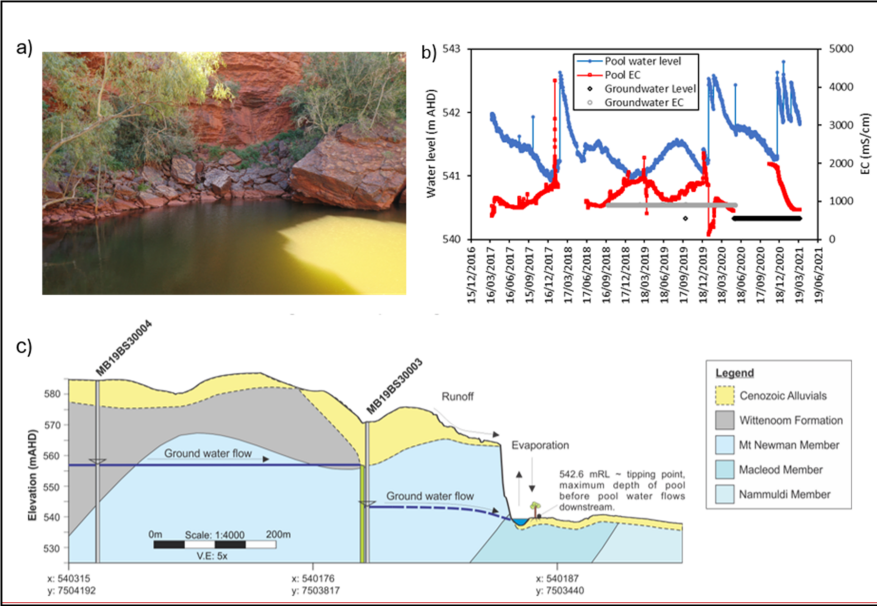

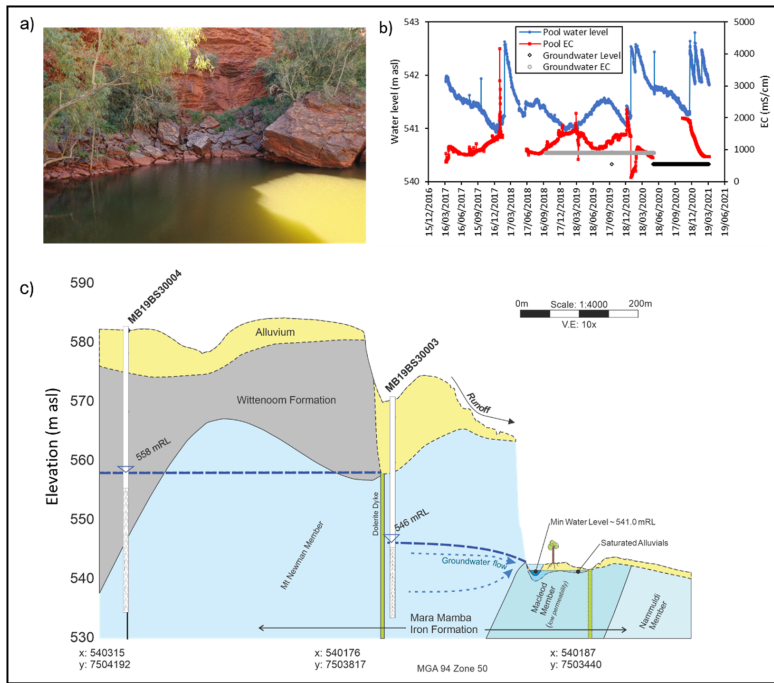


Figure 811 a) photo of Plunge Pool, b) pool water level and electrical conductivity (EC), c) hydrogeological setting of the pool.

5.2.2 Case Study 2: Howie's Hole

Howie's Hole is a pool within stream channel alluvium at the exit point of a short, narrow gorge (Fig. 9a11a). Immediately at the outlet of the gorge (approximately 30 m up-hydraulic gradient of the pool) there is also a seep where groundwater outflows to surface for most of the year (seep dries for approximately 2-3 months at end of dry season). The seep is supported by the regional unconfined aquifer hosted within the Marra Mamba Formation (fractured BIF, shale and chert) and the surficial sediments above it (including the alluvial channel sediments), which are hydraulically connected. At the seep, the Brockman formation has become adjacent to the Marra Mamba due to faulting and this forms a relatively impermeable hydraulic barrier approximately 700 m wide

(identified by the abrupt change in water table depth either side of the formation). The surface catchment upstream of Howie's Hole has an area of 33 km². The gorge restricts the stream channel from 30 m width down to a channel width of 10 m, enhancing the flow rate and resulting in scour and erosion of the Brockman formation. This area of scour during high-flow events has subsequently been filled by deposition of unconsolidated alluvial sediments, which are now at the base of the pool (sediments speculated to be 5-10 m deep).


The height of the regional water table is only known 1.5 km away from the seep, with seasonal fluctuations of 1-2 m (Fig. 9e11b). We assume that the water table declines towards the seep consistent with topographic elevation change (~ 20 m drop over 1.5 km), and that the seep reflects the height of the water table at that location (elevation of the groundwater seep is 405 m [AHDasl](#)). During the period of observation, the groundwater seep dried up when the measured water table elevation dropped below ~418.4 m [AHDasl](#) (water sample collected when the measured water table was at 418.5 m [AHDasl](#) on 12th Nov 2018); the seep was dry when the measured water table was at 418.3 m [AHDasl](#) on 7th Dec 2018. Pool water levels track groundwater elevations above 418 m [AHDasl](#), but data from 2019 shows the pool depth levelling off as the water table at the monitoring bore drops below 418 m [AHDasl](#), suggesting the cessation of significant groundwater inputs. The pool water levels have not been surveyed to the Australian Height Datum, but pool water level is consistently below the elevation of the seep (approximately 398 - 400 m [AHDasl](#)).

Similar to Plunge Pool, the pool salinity spikes with the seasonal onset of rainfall, before freshening once the accumulated salts have flushed through (Fig. 9e11c). In the absence of rainfall, pool salinity is similar to groundwater at the water table (Marra Mamba EC 1140 uS/cm) ~~until the water table drops below the pool and groundwater inputs (from the seep) cease. Subsequently, evapo-concentration dominates the water balance of Howie's Hole, resulting in salinity increases. This process of disconnection from regional groundwater is also evident in stable isotopic values at the site (Fig. 9d). Isotopic values at the seep are relatively constant and close to values in the pool while the groundwater is connected; after disconnection (Aug 2018) isotopic values increase in response~~

~~to evapo-concentration~~). Isotopic values were available for 2018 (which does not overlap with the data EC and water level data). During this dry-season isotope values of the seep and pool were relatively consistent until August, when the pool isotopic values began to enrich suggesting decreased inputs from groundwater as the water table receded (Figure 11d).

Based on these data we conclude that Howie's Hole reflects the water level in the alluvial aquifer within the stream channel (Fig. 9e11e). The location of the groundwater seep is determined by the geological contact between the permeable Marra Mamba Formation and impermeable Brockman Iron Formation in the subsurface, which coincides with the catchment constriction (gorge) that forms an outlet for surface and groundwater. As a result of the streamflow regime caused by this catchment constriction, the Brockman Iron Formation has been eroded and subsequently filled with unconsolidated stream channel sediments; water storage within these sediments now support the persistence of this pool.

The water level and isotopic data indicate a threshold groundwater level for inflow of groundwater to the pool, such that the pool water balance is primarily dominated by groundwater recharged during the previous wet season. Below this threshold water level for groundwater inflow, the persistence of the pool relies on local water storage within the streambed alluvium (supporting pool depths of up to 0.2 m). The persistence of this pool is therefore susceptible to 1) wet season rainfall that is inadequate to recharge the unconfined aquifer to above the threshold water level, or 2) groundwater withdrawals that reduce seasonal peak groundwater levels to below the threshold level. In the absence of this groundwater inflow, the pool is supported by water stored locally within the streambed sediments (directly beneath the pool) and would be more susceptible to drying through evapotranspiration (less inflow but the same amount of water loss through evapotranspiration).

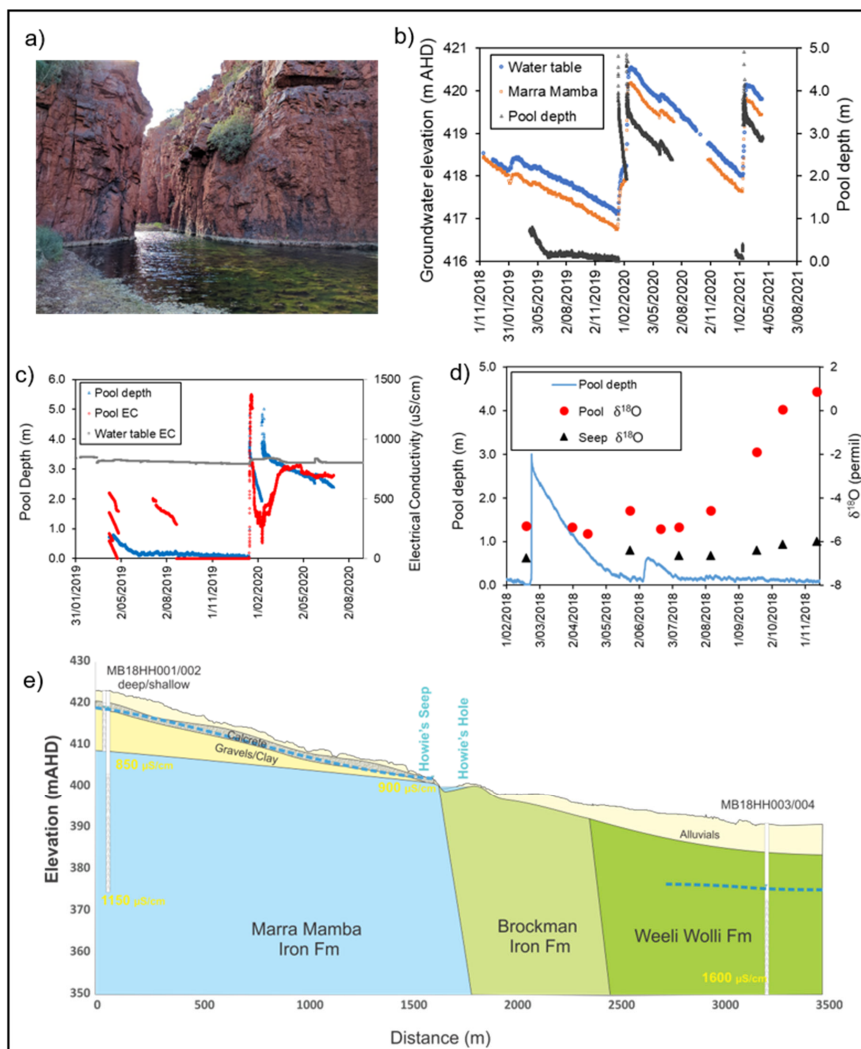

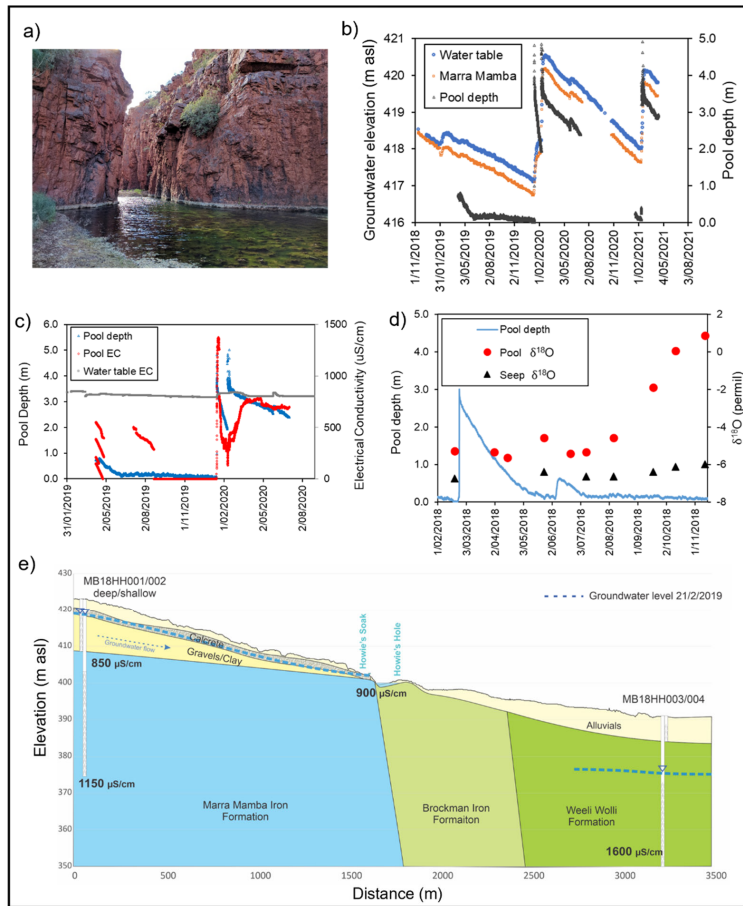


Figure 911 a) photo of Howie's Hole, b) groundwater elevations and pool depth, c) pool water levels and electrical conductivity of pool and groundwater, d) pool depth and $\delta^{18}\text{O}$ showing stable isotopic composition at groundwater seep and evaporative enrichment down-gradient of seep during the dry season, e) conceptual diagram of pool occurrence.

5.2.3 Case study 3: Ben's Oasis

Ben's Oasis is a sequence of three sub-pools that are hydraulically connected during peak water levels and subsequently disconnect during the dry season (Fig. 40a12a). The pools sit within a major drainage

918 channel that consists of poorly sorted, fine to very coarse (gravel and boulders) unconsolidated alluvial
919 sediments 10's of metres wide and on the order of metres in thickness. The regional water table is within
920 the fractured dolomite of the Wittenoom Formation, which overlies the Marra Mamba Formation. The
921 pool is 2 km up-hydraulic-gradient of two parallel dykes, with a regional water table decline of
922 approximately 20 m across these dykes indicating that they act as a barrier within the groundwater
923 system. Water levels in the upper pool have been monitored since 2016 and in 2019 a detailed study
924 commenced using environmental tracers to assess the spatial variability of surface water – groundwater
925 interaction along this pool sequence (Chapman, 2019).

926 Measured pool water levels show consistent seasonal trends with water level spikes of 2-3 m in response
927 to cyclonic rainfall events during summer, followed by approximately five months of relatively steady
928 water levels and then recession over approximately three months (Fig. ~~10b~~12b). These trends are
929 consistent with the water level variation in the adjacent alluvium, which exhibits a similar period of
930 steady water levels then recession following the cessation of summer rains. In contrast, regional
931 groundwater levels increase by about 2 m in response to summer rainfall and then immediately begin
932 to recede. Thus, although snapshot water level measurements indicate that pool water levels are
933 consistent with the regional water table, transient water level data (that includes the water level in the
934 alluvium) demonstrates that inflow of water from within the alluvial sediments within the drainage
935 channel is the dominant driver of water level fluctuations in the upper pool (where the logger was
936 installed). Spatial trends in the persistence of surface water and surface geology are also informative at
937 this site. The regional Wittenoom aquifer is exposed at surface around Pools 2 (some alluvium present)
938 and 3 (no alluvium, just bedrock), but not at Pool 1 (no bedrock, just alluvium). The upper, shallower
939 section of Pool 1 and Pool 3 dried out as the dry season progressed, but the deeper parts of Pools 1 and
940 2 persisted throughout the dry-season (during 2019 and 2020). We interpret these spatial patterns of
941 persistence as reflecting evaporation rates (more or less shading by vegetation) and heterogeneity in
942 groundwater inputs (Chapman, 2019).

943 The results of longitudinal hydrochemical surveys (^{222}Rn and $\delta^{18}\text{O}$) along the pool sequence provide an
 944 independent line of evidence to validate this interpretation (Fig. 12c). Alluvial water had a ^{222}Rn
 945 activity of 17.6 Bq L^{-1} and $\delta^{18}\text{O}$ of -6.3 ‰ . The regional Wittenoom aquifer had a lower ^{222}Rn activity
 946 of 8.1 Bq L^{-1} and more depleted $\delta^{18}\text{O}$ of -7.26 ‰ . At the top of Pool 1, ^{222}Rn activity was 7 Bq L^{-1} .
 947 Given that degassing of radon to the surface is rapid and the water level at the time of sampling was
 948 shallow, the source of water inflows must have a much higher ^{222}Rn activity than 7 Bq L^{-1} and it is
 949 therefore most likely that inflows here are dominated by the higher-Rn alluvial water. Isotopic $\delta^{18}\text{O}$
 950 values of around -6 ‰ , are also consistent with inflow of alluvial water. ^{222}Rn activities then decrease
 951 along the pool to around 0.5 Bq L^{-1} (indicating degassing, and the absence of further groundwater
 952 inputs) as stable isotopic values enrich to just under -5 ‰ (reflecting evaporation and the absence of
 953 further groundwater inputs). Water at the top of Pool 2 had ^{222}Rn of 2 Bq L^{-1} (greater than at the bottom
 954 of pool 1) and $\delta^{18}\text{O}$ of -6.3 ‰ (more depleted than at the bottom of Pool 1). These data indicate further
 955 water inflows from the subsurface, along this pool, with a lesser proportion of alluvial water, and more
 956 regional groundwater, as well as through-flow from Pool 1 (inferred from relative water levels in the
 957 pools). In Pool 3, ^{222}Rn remains around 2 Bq L^{-1} indicating further groundwater inputs, but the stable
 958 isotopic values are more enriched (possibly due to the shallow water depth allowing for enhanced
 959 evaporation).
 960 Streambed temperatures within the pools were also mapped (temperatures measured every $0.2 - 1 \text{ m}$
 961 along transects $1-10 \text{ m}$ apart) in early September, when regional groundwater was 29 °C , and alluvial
 962 water was 20 °C (Fig. 12d). Measured temperatures were recorded at dawn to reduce the effect of direct
 963 solar radiation and pool depth variability (max pool depth was 0.5 m). Streambed temperatures in the
 964 pools ranged from $17-23 \text{ °C}$, with the warmest water ($>20 \text{ °C}$) at the top of Pool 1, and temperatures
 965 between $19-20 \text{ °C}$ in middle of Pool 2 and at the top of Pool 3. These results are broadly consistent with
 966 the other results, but the approach is likely to be more conclusive in the presence of larger temperature
 967 gradients. The application of vertical temperature profiles to infer water fluxes at this site was also

968 limited by the substantial lateral component of the subsurface flow-field (i.e. violating the assumption
969 of 1D flow) and flood events that removed or damaged monitoring infrastructure.

970 Based on these data we conclude that the persistence of Ben's Oasis throughout the dry season is
971 supported by regional groundwater inflows from the unconfined aquifer where it is exposed at surface
972 (see Section 2.3), but the water balance of Pool 1 is dominated by exchange with the alluvial water (see
973 Section 2.2). This importance of the alluvial water storage in supporting the largest of these pools is
974 only evident based on time-series water level data from the alluvium. Given only snapshot water level
975 measurements from the regional aquifer and one location in the pools, the similarity in water level
976 elevations would lead to the conclusion that regional groundwater discharge was the dominant
977 supporting mechanism. The substantial spatial variability captured in the longitudinal hydrochemical
978 survey also highlights the risks of making conclusions about surface water – groundwater interactions
979 from snapshot hydrochemistry measurements in just one location within a given pool or pool sequence.
980 Subsequent numerical modelling of the groundwater system indicates that the presence of the regional-
981 scale dykes east of the pool operates as a hydraulic barrier within the groundwater system, supporting
982 the regional water table west of the dykes, promoting regional groundwater outflow to the surface at
983 the pool (Jen Gleeson pers. comm).


984 There are two hydraulic mechanisms supporting the water balance and persistence of these pools:
985 alluvial through-flow and regional groundwater discharge (Fig. 12e). The persistence of these pools
986 through the dry season is dependent on influx of water from the regional unconfined aquifer. They will
987 therefore be susceptible to groundwater withdrawals from the regional aquifer if they reduce the
988 hydraulic head to below the level of the ground surface at the pools. The water balance of these pools
989 is also controlled by the interaction with water stored in the alluvium (alluvial through-flow). Therefore,
990 the pools are also susceptible to reductions in rainfall or increases in temperature (and
991 evapotranspiration) that reduce the volume of water storage (and therefore water levels) within the
992 streambed alluvium. A reduction in the area of the surface catchment resulting from human activity
993 could also similarly alter the water balance of these pools.

1094
1095
1096 ~~10d). Measured temperatures were recorded at dawn to reduce the effect of direct solar radiation and~~
1097 ~~pool depth variability (max pool depth was 0.5 m). Streambed temperatures in the pools ranged from~~
1098 ~~17–23 °C, with the warmest water (>20 °C) at the top of Pool 1, and temperatures between 19–20 °C in~~
1099 ~~middle of Pool 2 and at the top of Pool 3. These results are broadly consistent with the other results, but~~
1100 ~~the approach is likely to be more conclusive in the presence of larger temperature gradients. The~~
1101 ~~application of vertical temperature profiles to infer water fluxes at this site was also limited by the~~
1102 ~~substantial lateral component of the subsurface flow field (i.e. violating the assumption of 1D flow) and~~
1103 ~~flood events that removed or damaged monitoring infrastructure.~~

1104 ~~There are two hydraulic mechanisms supporting the water balance and persistence of these pools;~~
1105 ~~alluvial through-flow and regional groundwater discharge (Fig. 10e). Based on these data we conclude~~
1106 ~~that the persistence of Ben's Oasis throughout the dry season is supported by regional groundwater~~
1107 ~~inflows from the unconfined aquifer where it is exposed at surface (see Section 2.3), but the water~~
1108 ~~balance of Pool 1 is dominated by exchange with the alluvial water (see Section 2.2). This importance~~
1109 ~~of the alluvial water storage in supporting the largest of these pools is only evident based on time series~~
1110 ~~water level data from the alluvium. Given only snapshot water level measurements from the regional~~
1111 ~~aquifer and one location in the pools, the similarity in water level elevations would lead to the~~
1112 ~~conclusion that regional groundwater discharge was the dominant supporting mechanism. The~~
1113 ~~substantial spatial variability captured in the longitudinal hydrochemical survey also highlights the risks~~
1114 ~~of making conclusions about surface water–groundwater interactions from snapshot hydrochemistry~~
1115 ~~measurements in just one location within a given pool or pool sequence.~~

1116 ~~The persistence of these pools through the dry season is dependent on influx of water from the regional~~
1117 ~~unconfined aquifer. They will therefore be susceptible to groundwater withdrawals from the regional~~
1118 ~~aquifer if they reduce the hydraulic head to below the level of the ground surface at the pools. The water~~
1119 ~~balance of these pools is also controlled by the interaction with water stored in the alluvium (alluvial~~

through-flow). Therefore, the pools are also susceptible to reductions in rainfall or increases in temperature (and evapotranspiration) that reduce the volume of water storage (and therefore water levels) within the streambed alluvium. A reduction in the area of the surface catchment resulting from human activity could also similarly alter the water balance of these pools.

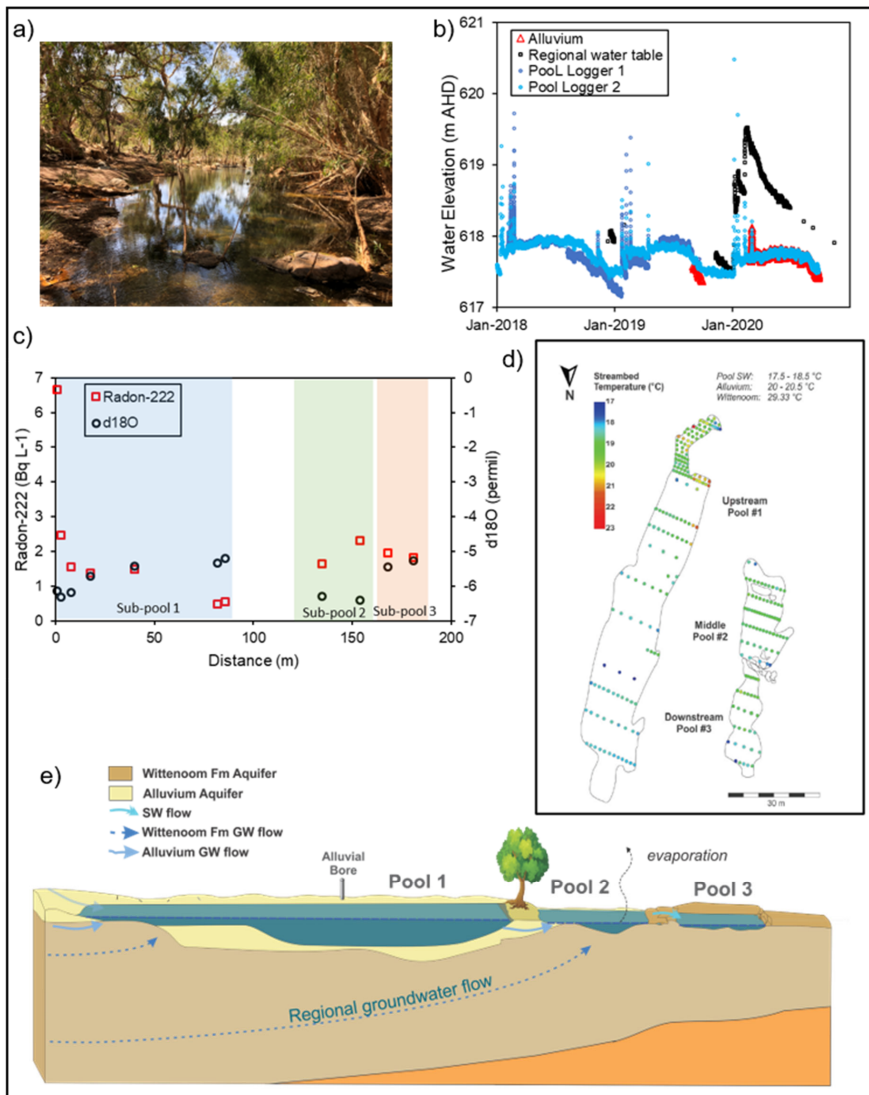

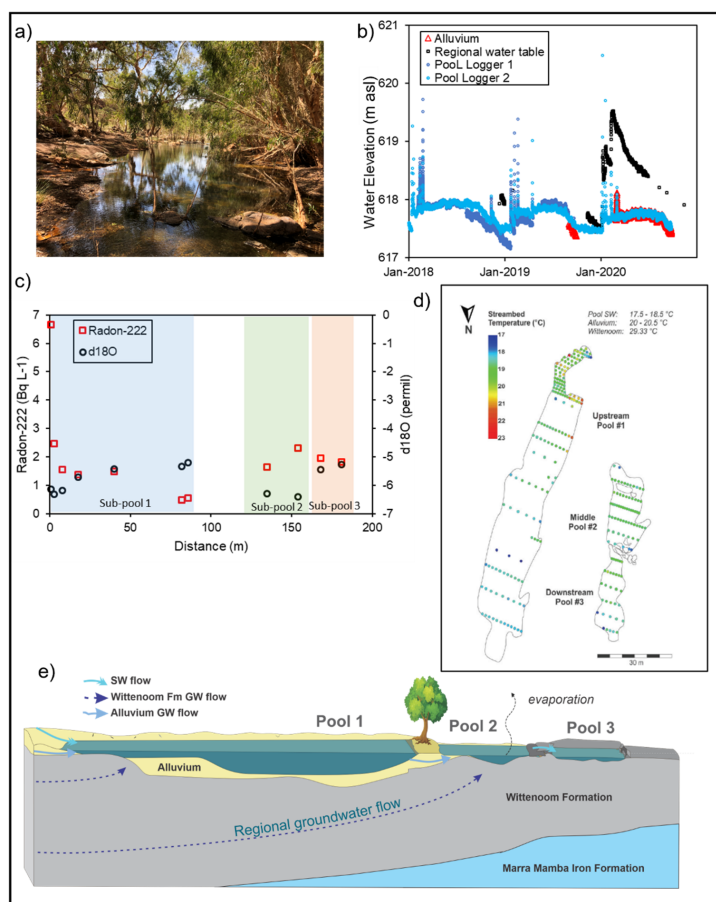


Figure 1012 a) photo of Ben's Oasis, b) water levels in the Pool 1 (logger 1 elevation was surveyed, logger 2 elevation was approximated by matching data from logger 1), alluvium (DP1) and regional unconfined aquifer, c) spatial variation in radon activities and $\delta^{18}\text{O}$ along the pool sequence, d) temperature mapping of pool sediments and e) conceptual diagram of mechanisms supporting pool persistence.

6 Conclusion and recommendations

6 Discussion

It has now been 100 years since groundwater springs were documented in published literature (Bryan, 1919; Meinzer, 1927; Meinzer, 1923) and while frameworks for groundwater springs and aspects of non-perennial streams (e.g. Costigan et al., 2016) exist, there hasn't yet been a hydraulic classification system defined that applies to persistent in-stream pools. Persistent pools are an important feature along non-perennial rivers and these types of systems are under increasing pressure from altered hydrology associated with shifting climates and anthropogenic activities (Steward et al., 2012). This paper identifies the dominant. In that time, the literature on springs, surface water-groundwater interactions, and non-perennial rivers have all expanded considerably. The goal of the present work has been to synthesize concepts from all of those fields to aid in the identification of hydraulic mechanisms that support pool persistence. Each mechanism has varying degrees of connection to groundwater or differing controls on groundwater outflow (geological barrier vs topography). Pools can be supported by multiple in-stream pools. Thus in Section 2, we identified four primary pool types, discussing hydraulic mechanisms for each conceptually and identifying relevant background literature to support each. In section 4, we then provide a toolbox for use on individual pools and at the regional scale, and show in section 5 how this toolbox can be used through a series of case studies. This identification of the hydraulic mechanisms is essential for effective management of risks to pool ecosystems associated with groundwater withdrawals, changes to the hydraulic properties of the catchment (e.g. land use change) or climate change, as discussed in Section 3. In reality, the water balance of persistent pools can respond to a combination of hydraulic mechanisms, and the dominant mechanisms can vary spatially and temporally within pools. For example, a pool may contain a mixture of water from streambed sediments (alluvial through-flow) and regional groundwater during certain hydroperiods, but the pool wouldn't persist through the dry season in that location without groundwater discharge from the regional aquifer. Thus, the maintenance of the stream

Formatted: Font color: Text 1

Formatted: Font color: Text 1

ecosystem in its current state would require preservation of in-stream water storage and regional groundwater inflows. Such pools combining alluvial through-flow pools with some regional groundwater input are likely common, but it can be difficult to definitively identify this regional component of the water balance. ~~Susceptibility to hydrological change depends on the mechanism(s) of pool persistence and the spatial distribution of stressors relative to the pool. While the existing literature hints at the hydrologic and geologic constraints imperative to pool persistence, the framework presented here provides a more scientific characterisation as required to sufficiently understand and protect persistent pools globally. We also present a suite of~~

Given the potential for this complexity, we advocate for the use of multiple lines of evidence in determining hydraulic mechanisms, in-line with the accepted paradigm in surface water-groundwater interactions literature (Kalbus et al., 2006). Regional-scale tools that can be used to test our conceptualism of pool hydrology at a given site, allowing this framework provide a valuable method to be applied to the real world.

~~With limited resources and access to sites, trade-offs must be made between detailed characterization of one pool vs a minimal data set at many pools. Snapshot data from multiple pools at one point in time can help distinguish perched pools vs groundwater discharge pools (i.e. pool water hydrochemically similar or different to rainfall or groundwater), but in some cases water types are difficult to distinguish based on easily measured parameters like electrical conductivity or stable isotopes of water (Bourke et al., 2015). Highly~~ make a first estimate of hydraulic mechanisms; however, highly instrumented sites with robust geological mapping, monitoring wells, and temporal hydrologic data are required to elucidate spatiotemporal variability in the pool water balance. Likewise, snapshot data from multiple pools at one point in time can help distinguish perched pools vs groundwater discharge pools (i.e. pool water hydrochemically similar or different to rainfall or groundwater), but in some cases water-types (or end-members) are difficult to distinguish based on easily measured parameters like electrical conductivity or stable isotopes of water (Bourke et al., 2015).

Formatted: Font color: Text 1

Formatted: Font color: Auto

Formatted: Font color: Auto

However, we also acknowledge that direct measurement of water balances in arid and semi-arid regions can be logistically difficult (Villeneuve et al., 2015). Rainfall (and therefore runoff) in arid and semi-arid environments is commonly patchy and water fluxes can be either too large to measure (streamflow during a cyclone) or too small to measure directly (dry-season groundwater seepage fluxes) (Shannon et al., 2002; Shanafield and Cook, 2014). There are also potential logistical constraints that can apply when installing any infrastructure for sampling and monitoring in-stream pools. Persistent pools in arid landscapes are commonly sites of environmental and cultural significance (Finn and Jackson, 2011; Yu, 2000) so that appropriate approvals and permissions typically must be obtained prior to the installation of monitoring infrastructure. This may restrict the types of data that can be collected. Moreover, some sites may be sacred sites, limiting who is able to access them. Surface water features in general are a draw for travellers and roaming livestock, so that any infrastructure must be secure from theft or damage. Flood events and sudden, flashy streamflows are also potential threats to infrastructure, with substantial sediment and vegetation (branches, trees) transported across the floodplain to heights of 2-3 m that can (and have) destroyed sampling equipment. ~~be confident of pool mode of occurrence. Given limited resources, we suggest that time series water level measurements (groundwater and surface water) and hydrochemistry~~ Infrastructure damage by unseasonal or early rainfalls in particular can impact our ability to capture regional groundwater contributions, since this is typically a relatively small (but important) component of the water balance of pools and is most readily captured at the end of the dry season.

With limited resources and access to sites, trade-offs must therefore be made between detailed characterization of one pool vs a minimal data set at many pools. In our experience, utilizing detailed data from fewer pools, is more likely to provide ~~useful insights~~ a robust characterization of pool hydrology at a scale required for management than snapshot data from many pools. ~~This will be particularly effective if detailed empirical data sets at archetypal sites can be used to group pools based on~~ across a region, which can be open to misinterpretation. This point is easily demonstrated using a simple synthetic model of isotopic values in a pool (Figure 13). The isotopic evolution of this

hypothetical pool is more sensitive to the surface area:volume ratio of the pool than the individual water balance components. And although the difference in isotopic enrichment may be small under different water balance scenarios, the cumulative impact could still be important hydroecologically (8-30% of initial pool water balance in scenarios shown below). Such potential pitfalls can be found in all single methods. Thus, we suggest an initial regional-scale assessment of landscape position or geology and hydrogeological context that allows for pools to be grouped into likely hydraulic mechanisms; a representative subset of these can be instrumented and sampled to provide time series of water levels (groundwater and surface water) and hydrochemistry to understand the pool water balance.

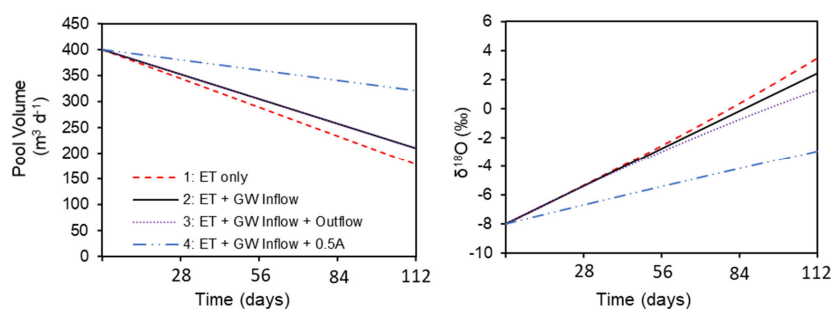


Figure 13 Evolution of pool volume and values of stable isotopes of water in pools with varying water balance components over approximately 4 months of dry season (ET = evapotranspiration, GW = groundwater, A = pool area). Model modified after (Bourke et al., 2021).

All of the above points can be seen in the Hammersley Basin. We were able to identify key hydraulic mechanisms supporting pool persistence at a number of pools, which can be summarized at regional scale (Figure 14). However, the spatio-temporally variable components of the water balance remain difficult to constrain. Although there is a lot of data in the region overall, given the remote and inaccessible nature of these pools, none of them have a complete data set of the kind advocated for here. It should be noted that as with every field study, these case studies do not represent perfect

examples of the hypothetical cases, but are instead limited by typical considerations found in the real world and are subject to ongoing research efforts. In particular, Ben's Oasis provides an example of a pool that is particularly difficult to characterise and cannot simply be linked to one hydraulic mechanism. Efforts to characterise the bathymetry of Ben's Oasis have been fraught with challenges, and the relationship between water level and pool volume remains uncertain, limiting our efforts to confidently determine the water balance.

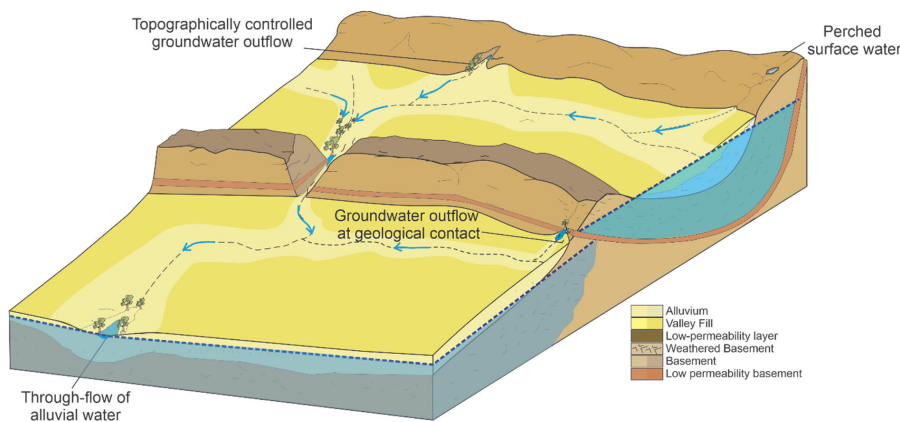


Figure 14 Generalized landscape position of persistent pools with water balances by different hydraulic mechanisms within the Hamersley Basin.

In this work, we have striven to provide a useful framework, based on a conceptual, first-principles understanding but supported by both useful tools and case studies. However, that balance has also resulted in limitations. Each of these topics could be presented as a full study. The list of field and regional-scale methods is not exhaustive, but instead presents the most commonly used and accessible tools. Various other tools, such as geophysical surveys and varied geochemical tracers, could easily be employed to garner additional data useful in further understanding in-stream pool hydrology. Moreover, the review of supporting literature, in particular from the field of groundwater-surface water interactions, has been necessarily concise and more could be said. However, we feel that there is utility

in presenting the basic background in conjunction with field tools and considerations, allowing each reader can take the parts that are most relevant to their own needs and seek out further background from the cited literature as needed. We hope this work serves as a common platform for a deeper understanding of in-stream pools globally, as non-perennial streams are increasingly recognised for both their importance and their vulnerability in our changing world.

Formatted: Font color: Auto

The study of persistent river pools is a developing science and much remains to be done. Policy makers increasingly require accurate information on the mode of occurrence of surface water pools to put forward management plans to mitigate and/or minimise the adverse impacts of human activities (Leibowitz et al., 2008). This framework is subject to refinement as sufficient data becomes available to fully characterise pool water balances and mode of occurrence. Extension of this framework to facilitate the incorporation of biological and sedimentological processes is also desirable. Persistent river pools exist in all climates across the globe, and consistent data on geomorphology, hydrology and ecology should be collected at multiple features so that generalized patterns and processes can be elucidated. The nutrient and carbon transport between pools during flows and the effects of anthropogenic disruption to groundwater inputs or surface water flushes into these pools is also not well known. These disruptions can be detrimental to water quality if the anthropogenic inputs are contaminated (Jackson and Pringle, 2010), but may also support seasonal connectivity that benefits the ecosystem by distributing nutrients and organic matter between pools (Jaeger et al., 2014). Effects of climate change (e.g. lower groundwater levels, thermal loading, and altered storm cycles) also combine with geomorphological and biological factors to impact ecosystem function, but these mechanisms are not yet well understood.

Formatted: Font: Not Bold

Formatted: Line spacing: 1.5 lines

7 Conclusion

Persistent pools are an important feature along non-perennial rivers and these types of systems are under increasing pressure from altered hydrology associated with shifting climates and anthropogenic

activities (Steward et al., 2012). Three dominant hydraulic mechanisms that support the persistence of river pools were identified from literature on groundwater springs and surface water interaction: perched surface water, through-flow of alluvial water, and regional groundwater discharge. Regional groundwater discharge can be further characterized into two types of control on groundwater outflow: geological barrier vs topography. While the existing literature hints at the hydrologic and geologic constraints imperative to pool persistence, the framework presented here provides cohesive synthesis of hydraulic mechanisms supporting persistence, as required to sufficiently understand and protect persistent pools globally. Susceptibility to hydrological change depends on the mechanism(s) of pool persistence and the spatial distribution of stressors relative to the pool. Further research is required to resolve the impacts hydroclimatic stressors at the scale of individual pools.

A suite of diagnostic tools are available for understanding the hydrologic mechanisms that support the persistence of a given river pool. An regional-scale assessment can be made based on an understanding of the pool's landscape position and hydrogeological context, which may be supported by remote sensing or image analysis. Time-series data of water levels and hydrochemistry are required to resolve the spatiotemporal variability in pool water balances, as demonstrated in the three pool-scale case studies presented. The suitability of each of these tools to any given pool or study will depend on the data and resources available, and the requirement for a coarse or highly detailed resolution of the mechanisms supporting pool persistence.

Data Availability

The data used in Section 5 of this paper are the property of Rio Tinto. Access to these data may be requested by contacting Shawan Dogramaci (shawan.dogramaci@riotinto.com)

Author Contribution

SB and MS prepared the text of the manuscript with input from all co-authors. PH, SC, SD and SB collected and analysed the data presented in Section 5. PH and SB prepared the figures.

1198

1199 **Competing Interests**

1200 The authors declare that they have no conflict of interest.

1201

1202 **Acknowledgements**

1203 This paper is based on data collection funded by Rio Tinto Iron Ore and funding from the Australian
1204 Research Council, grant LP120100310. Author Shanafield’s contribution was supported by funding
1205 from the Australian Research Council, grant DE150100302.

1206 We thank the editor and our several thorough reviewers, as well as the colleagues who have already
1207 found this framework useful and encouraged us to finalise it.

1208 **References**

- 1209 Alaibakhsh, M., Emelyanova, I., Barron, O., Khiadani, M., and Warren, G. Large-scale regional delineation of
 1210 riparian vegetation in the arid and semi-arid Pilbara region, WA, *Hydrological Processes*, 31, 4269-4281,
 1211 2017.
- 1212 Alfaro, C., and Wallace, M. Origin and classification of springs and historical review with current applications,
 1213 *Environ Geol*, 24, 112-124, 10.1007/bf00767884, 1994.
- 1214 Arthington, A. H., Balcombe, S. R., Wilson, G. A., Thoms, M. C., and Marshall, J. Spatial and temporal variation
 1215 in fish-assemblage structure in isolated waterholes during the 2001 dry season of an arid-zone floodplain river,
 1216 Cooper Creek, Australia, *Mar Freshwater Res*, 56, 25-35, <https://doi.org/10.1071/MF04111>, 2005.
- 1217 Ashley, G. M., Goman, M., Hover, V. C., Owen, R. B., Renaut, R. W., and Muasya, A. M. Artesian blister
 1218 wetlands, a perennial water resource in the semi-arid rift valley of East Africa, *Wetlands*, 22, 686-695, 2002.
- 1219 Banks, E. W., Shanafield, M. A., Noorduijn, S., McCallum, J., Lewandowski, J., and Batelaan, O. Active heat
 1220 pulse sensing of 3-D-flow fields in streambeds, *Hydrol. Earth Syst. Sci.*, 22, 1917-1929, 10.5194/hess-22-
 1221 1917-2018, 2018.
- 1222 Befus, K. M., Cardenas, M. B., Ong, J. B., and Zlotnik, V. A. Classification and delineation of groundwater–lake
 1223 interactions in the Nebraska Sand Hills (USA) using electrical resistivity patterns, *Hydrogeology Journal*, 20,
 1224 1483-1495, 10.1007/s10040-012-0891-x, 2012.
- 1225 Bense, V. F., Gleeson, T., Loveless, S. E., Bour, O., and Scibek, J. Fault zone hydrogeology, *Earth-Science*
 1226 *Reviews*, 127, 171-192, <https://doi.org/10.1016/j.earscirev.2013.09.008>, 2013.
- 1227 Bestland, E., George, A., Green, G., Olifent, V., Mackay, D., Whalen, M. Groundwater dependent pools in
 1228 seasonal and permanent streams in the Clare Valley of South Australia. *J. Hydrol. Regional Studies*, 9, 216-
 1229 235. 2017.
- 1230 Bishop-Taylor, R., Tulbure, M.G., Broich, M. Surface-water dynamics and land use influence landscape
 1231 connectivity across a major dryland region. *Ecological Applications*, 27(4), 1124-1137, 2017,
 1232 <https://doi.org/10.1002/eap.1507>.

1233 Blackburn, J., Comte, J., Foster, G., Gibbins, C. Hydrogeological controls on the flow regime of an ephemeral
 1234 temperate stream flowing across an alluvial fan. *Journal of Hydrology*, 595, 125994, 2021,
 1235 <https://doi.org/10.1016/j.jhydrol.2021.125994>.

1236 Bogan, M. T., and Lytle, D. A. Severe drought drives novel community trajectories in desert stream pools,
 1237 *Freshwater Biology*, 56, 2070-2081, 10.1111/j.1365-2427.2011.02638.x, 2011.

1238 Bonada, N., Cañedo-Argüelles, M., Gallart, F., von Schiller, D., Fortuño, P., Latron, J., Llorens, P., Murria, C.,
 1239 Soria, M., Vinyoles, D., Cid, N. Conservation and management of isolated pools in temporary rivers, *Water*,
 1240 12 (10) 2870, <https://doi.org/10.3390/w12102870>, 2020.

1241 Boulton, A.J. Parallels and contrasts in the effects of drought on stream macroinvertebrate assemblages.
 1242 *Freshwater Biology*, 48, 1173-1185. <https://doi.org/10.1046/j.1365-2427.2003.01084.x>, 2003

1243 Bourke, S. A., Harrington, G. A., Cook, P. G., Post, V. E., and Dogramaci, S. Carbon-14 in streams as a tracer of
 1244 discharging groundwater, *Journal of Hydrology*, 519, 117-130,
 1245 <http://dx.doi.org/10.1016/j.jhydrol.2014.06.056>, 2014.

1246 Bourke, S. A., Cook, P. G., Dogramaci, S., and Kipfer, R. Partitioning sources of recharge in environments with
 1247 groundwater recirculation using carbon-14 and CFC-12, *Journal of Hydrology*, 525, 418-428, 2015.

1248 Bourke, S.A., Degens, B., Searle, J., de Castro Tayer, T., Rother, J. Geological permeability controls streamflow
 1249 generation in a remote, ungauged, semi-arid drainage system. *J. Hydrol. Regional Studies*, ~~In-Review~~38,
 1250 100956, 2021.

1251 Briggs, M. A., Hare, D. K., Boutt, D. F., Davenport, G., and Lane, J. W. Thermal infrared video details multiscale
 1252 groundwater discharge to surface water through macropores and peat pipes, *Hydrological Processes*, 30, 2510-
 1253 2511, 10.1002/hyp.10722, 2016.

1254 Brunner, P., Cook, P., and Simmons, C. Hydrogeologic controls on disconnection between surface water and
 1255 groundwater, *Water Resources Research*, 45, W01422, 2009.

1256 Bryan, K.: Classification of springs, *The Journal of Geology*, 27, 522-561, 1919.

1257 Bunn, S. E., Thoms, M. C., Hamilton, S. K., and Capon, S. J. Flow variability in dryland rivers: boom, bust and
 1258 the bits in between, *River Research and Applications*, 22, 179-186, 10.1002/rra.904, 2006.

Formatted: Font: 10 pt

Formatted: Font: 10 pt

1259 Caldwell, T.G., Wolaver, B.D., Bongiovanni, T., Pierre, J.P., Robertson, S., Abolt, C., Scanlon, B.R. Spring
1260 discharge and thermal regime of a groundwater dependent ecosystem in an arid karst environment, *J. Hydrol.*,
1261 587, 124947, 2020.

1262 Cardenas, M. B., Neale, C. M. U., Jaworowski, C., and Heasler, H. High-resolution mapping of river-
1263 hydrothermal water mixing: Yellowstone National Park, *International Journal of Remote Sensing*, 32, 2765-
1264 2777, 10.1080/01431161003743215, 2011.

1265 Cardenas, M.B., Wilson, J.L. Exchange across a sediment–water interface with ambient groundwater discharge.
1266 *Journal of hydrology*, 346(3-4), 69-80, 2007, <https://doi.org/10.1016/j.jhydrol.2007.08.019>.

1267 Chapman, S. Groundwater discharge to persistent in-stream pools in dryland regions. Master Thesis, School of
1268 Earth Sciences, University of Western Australia, 2019.

1269 Conant, B.: Delineating and quantifying ground water discharge zones using streambed temperatures, *Ground*
1270 *Water*, 42, 243-257, 2004.

1271 [Cook, P. G., Jolly, I. D., Walker, G. R., & Robinson, N. I. From drainage to recharge to discharge: Some timelags](#)
1272 [in subsurface hydrology. *Developments in water science*, 50, 319-326, 2003.](#)

1273 Cook, P. G., Wood, C., White, T., Simmons, C. T., Fass, T., and Brunner, P. Groundwater inflow to a shallow,
1274 poorly-mixed wetland estimated from a mass balance of radon, *Journal of Hydrology*, 354, 213-226,
1275 <http://dx.doi.org/10.1016/j.jhydrol.2008.03.016>, 2008.

1276 Cook, P. G. Estimating groundwater discharge to rivers from river chemistry surveys, *Hydrological Processes*,
1277 27, 3694-3707, 10.1002/hyp.9493, 2013.

1278 Cook, P. G., and Dogramaci, S. Estimating Recharge From Recirculated Groundwater With Dissolved Gases: An
1279 End-Member Mixing Analysis, *Water Resources Research*, 55, 5468-5486, 10.1029/2019wr025012, 2019.

1280 Costigan, K.H., Daniels, M.D., Dodds, W.K. Fundamental spatial and temporal disconnections in the hydrology
1281 of an intermittent prairie headwater network. *J. Hydrol.* 522, 305–316.
1282 <https://doi.org/10.1016/j.jhydrol.2014.12.031>, 2015.

1283 Costigan, K. H., Jaeger, K. L., Goss, C. W., Fritz, K. M., & Goebel, P. C. Understanding controls on flow
1284 permanence in intermittent rivers to aid ecological research: integrating meteorology, geology and land cover.
1285 *Ecohydrology*, 9(7), 1141–1153. <https://doi.org/10.1002/eco.1712>, 2016.

1286 Cranswick, R.H., Cook, P.G., Scales and magnitude of hyporheic, river-aquifer and bank storage exchange fluxes,
 1287 Hydrological Processes, 29(14) 3084-3097, 2015.

1288 Cushing, C. E., and Wolf, E. G.: Primary production in Rattlesnake Springs, a cold desert spring-stream,
 1289 Hydrobiologia, 114, 229-236, 10.1007/bf00031874, 1984.

1290 Cuthbert, M.O., Gleeson, T., Reynolds, S.C., Bennett, M.R., Newton, A.C., McCormack, C.J., Ashley, G.M.
 1291 Modelling the role of groundwater hydro-refugia in East African hominin evolution and dispersal, Nature
 1292 Communications, 8(1), 1-11, 2017.

1293 Cuthbert, M.O., Gleeson, T., Moosdorf, N., Befus, K.M., Schneider, A., Hartmann, J., Lehner, B. Global patterns
 1294 and dynamics of climate-groundwater interactions, Nature Climate Change, 9, 137-141, 2019.

1295 Davis, L., Thoms, M. C., Fellows, C., and Bunn, S.: Physical and ecological associations in dryland refugia:
 1296 waterholes of the Cooper Creek, Australia, International Association of Hydrological Sciences, Publication,
 1297 276, 77-84, 2002.

1298 Deemy, J. B., and Rasmussen, T. C. Hydrology and water quality of isolated wetlands: Stormflow changes along
 1299 two episodic flowpaths, Journal of Hydrology: Regional Studies, 14, 23-36,
 1300 <https://doi.org/10.1016/j.ejrh.2017.10.001>, 2017.

1301 Doble, R., Brunner, P., McCallum, J., Cook, P.G. An analysis of river bank slope and unsaturated flow effects on
 1302 bank storage, Groundwater, 50, 77-86, <https://doi.org/10.1111/j.1745-6584.2011.00821.x>, 2012

1303 Dogramaci, S., Skrzypek, G., Dodson, W., Grierson, P.F. Stable isotope and hydrochemical evolution of
 1304 groundwater in the semi-arid Hamersley Basin of subtropical northwest Australia, J. Hydro., 475, 281-293,
 1305 2012.

1306 Dogramaci S. Springs, pools and seeps in the Hamersley Basin, NW Australia, internal report for Rio Tinto Iron
 1307 Ore, 2016.

1308 Fellman, J. B., Dogramaci, S., Skrzypek, G., Dodson, W., and Grierson, P. F. Hydrologic control of dissolved
 1309 organic matter biogeochemistry in pools of a subtropical dryland river, Water Resour. Res., 47, W06501,
 1310 10.1029/2010wr010275, 2011.

1311 Fetter, C.W. Applied hydrogeology (Fourth Edition). Prentice Hall, Upper Saddle River, USA, 2001.

1312 Finn, M., and Jackson, S. Protecting Indigenous Values in Water Management: A Challenge to Conventional
 1313 Environmental Flow Assessments, *Ecosystems*, 14, 1232-1248, 10.1007/s10021-011-9476-0, 2011.

1314 Fitts, C. R. Groundwater science. Elsevier, 2002.

1315 Gardener, W.P., Harrington, G.A., Solomon, D.K., Cook, P.G. Using terrigenic 4He to identify and quantify
 1316 regional groundwater discharge to streams, *Water Resources Research*, 47, W06523,
 1317 doi:10.1029/2010WR010276, 2011.

1318 [Geological Survey of Western Australia \(GSWA\). Hydrogeological Map of Western Australia. Department of](#)
 1319 [Mines, Industry Regulation and Safety, Government of Western Australia, 2015.](#)

1320 Gibson, J.J. Short-term evaporation and water budget comparisons in shallow Arctic lakes using non-steady
 1321 isotope mass balance. *Journal of Hydrology*, 264(1-4), 242-261, 2002.

1322 Godsey, S. E., and Kirchner, J. W. Dynamic, discontinuous stream networks: hydrologically driven variations in
 1323 active drainage density, flowing channels and stream order, *Hydrological Processes*, 28, 5791-5803,
 1324 10.1002/hyp.10310, 2014.

1325 Goodrich, D. C., Kepner, W. G., Levick, L. R., and Wigington Jr., P. J. Southwestern Intermittent and Ephemeral
 1326 Stream Connectivity, *JAWRA Journal of the American Water Resources Association*, 54, 400-422,
 1327 10.1111/1752-1688.12636, 2018.

1328 Gutiérrez-Jurado, K.Y., Partington, D., Batelaan, O., Cook, P., Shanafield, M. What Triggers Streamflow for
 1329 Intermittent Rivers and Ephemeral Streams in Low-Gradient Catchments in Mediterranean Climates. *Water*
 1330 *Resour. Res.* 55, 9926–9946. <https://doi.org/10.1029/2019WR025041>, 2019.

1331 Haas, E. M., Bartholomé, E., and Combal, B. Time series analysis of optical remote sensing data for the mapping
 1332 of temporary surface water bodies in sub-Saharan western Africa, *Journal of Hydrology*, 370, 52-63,
 1333 <https://doi.org/10.1016/j.jhydrol.2009.02.052>, 2009.

1334 Hamilton, S. K., Bunn, S. E., Thoms, M. C., and Marshall, J. C. Persistence of aquatic refugia between flow pulses
 1335 in a dryland river system (Cooper Creek, Australia), *Limnology and Oceanography*, 50, 743-754, 2005.

1336 Harrington, G. A., Payton Gardner, W., and Munday, T. J. Tracking Groundwater Discharge to a Large River
 1337 using Tracers and Geophysics, *Groundwater*, 2013.

1338 Herczeg, A.L. and Leaney, F.W. Environmental tracers in arid-zone hydrology. *Hydrogeology Journal*, 19(1), 17-
1339 29, 2011, <https://doi.org/10.1007/s10040-010-0652-7>.

1340 Huang, J., Chunyu, X., Zhang, D., Chen, X., Ochoa, C.G. A framework to assess the impact of ecological water
1341 conveyance on groundwater-dependent terrestrial ecosystems in arid inland river basins, *Sci. Tot. Env.*, 709,
1342 136155, 2020.

1343 IPCC, 2021 Climate Change 2021: The Physical Science Basis. Contribution of Working Group I to the Sixth
1344 Assessment Report of the Intergovernmental Panel on Climate Change [Masson-Delmotte, V., P. Zhai, A.
1345 Pirani, S. L. Connors, C. Péan, S. Berger, N. Caud, Y. Chen, L. Goldfarb, M. I. Gomis, M. Huang, K. Leitzell,
1346 E. Lonnoy, J. B. R. Matthews, T. K. Maycock, T. Waterfield, O. Yelekçi, R. Yu and B. Zhou (eds.)].
1347 Cambridge University Press. In Press.

1348 Jackson, C.R., Pringle, C.M. Ecological benefits of reduced hydrologic connectivity in intensively developed
1349 landscapes. *BioScience*, 60(1), 37-46, 2010, <https://doi.org/10.1525/bio.2010.60.1.8>.

1350 Jaeger, K., Olden, J. Electrical resistance sensor arrays as a means to quantify longitudinal connectivity of rivers,
1351 *River Research and Applications*, 2011.

1352 Jaeger, K. L., Olden, J. D., and Pelland, N. A. Climate change poised to threaten hydrologic connectivity and
1353 endemic fishes in dryland streams, *Proceedings of the National Academy of Sciences*, 111, 13894-13899,
1354 2014.

1355 John, K. R. Survival of Fish in Intermittent Streams of the Chiricahua Mountains, Arizona., *Ecology*, 45,
1356 <https://doi.org/10.2307/1937112>, 1964.

1357 [Jocque, M., Vanschoenwinkel, B. and Brendonck, L.U.C. Freshwater rock pools: a review of habitat](#)
1358 [characteristics, faunal diversity and conservation value. *Freshwater Biology*, 55\(8\), 1587-1602, 2010.](#)

1359 [Kalbus, E., Reinstorf, F., and Schirmer, M. Measuring methods for groundwater-surface water interactions: a](#)
1360 [review. *Hydrology and Earth System Sciences*, 10\(6\), 873-887, 2006.](#)

1361 Käser, D.H., Binley, A., Heathwaite, A.L., Krause, S. Spatio-temporal variations of hyporheic flow in a riffle-
1362 step-pool sequence. *Hydrological Processes: An International Journal*, 23(15), 2138-2149, 2009,
1363 <https://doi.org/10.1002/hyp.7317>.

1364 Kelso, J. E., and Entrekin, S. A. Intermittent and perennial macroinvertebrate communities had similar richness
 1365 but differed in species trait composition depending on flow duration, *Hydrobiologia*, 807, 189-206, 2018.
 1366 Knighton, A. D., and Nanson, G. C. Waterhole form and process in the anastomosing channel system of Cooper
 1367 Creek, Australia, *Geomorphology*, 35, 101-117, 2000.
 1368 Kresic, N., and Stevanovic, Z. *Groundwater Hydrology of Springs*, Elsevier, 592 pp., 2010.
 1369 Labbe, T. R., and Fausch, K. D. Dynamics of intermittent stream habitat regulate persistence of a threatened fish
 1370 at multiple scales *Ecological Applications*, 10, 1774-1791, doi: 10.1890/1051-
 1371 0761(2000)010[1774:doishr]2.0.co;2, 2000.
 1372 Lamontagne, S, Kirby, J, Johnston, C. Groundwater–surface water connectivity in a chain-of-ponds semiarid
 1373 river. *Hydrological Processes*. 35:e14129. <https://doi.org/10.1002/hyp.14129>, 2021.
 1374 Lautz, L. K. Impacts of nonideal field conditions on vertical water velocity estimates from streambed temperature
 1375 time series, *Water Resour. Res.*, 46, W01509, 10.1029/2009wr007917, 2010.
 1376 [Leibowitz, S.G., Brooks, R.T. Hydrology and landscape connectivity of vernal pools. In *Science and Conservation*](#)
 1377 [of Vernal Pools in Northeastern North America](#), Eds. Calhoun, A.J.K., deMaynadier, P.G., CRC Press: Boca
 1378 [Raton, FL, USA, pp. 31–53, 2008.](#)
 1379 Leibowitz, S. G., Wigington Jr, P. J., Rains, M. C., and Downing, D. M. Non-navigable streams and adjacent
 1380 wetlands: addressing science needs following the Supreme Court's Rapanos decision, *Frontiers in Ecology and*
 1381 *the Environment*, 6, 364-371, 2008.
 1382 McCallum, J.L., Shanafield, M. Residence times of stream-groundwater exchanges due to transient stream stage
 1383 fluctuations, *Water Resour. Res.*, #52, 2059– 2073, doi:10.1002/2015WR017441.
 1384 McJannet, D., Hawdon, A., Van Neil, T., Boadle, D., Baker, B., Trefry, M., Rea, I.: Measurement of evaporation
 1385 from a mine void lake and testing of modelling approaches, *J. Hydrol.* 555, 631-647, 2017.
 1386 McMahon, T.A., Finlayson, B.L., Peel, M.C. Historical development of models for estimating evaporation using
 1387 standard meteorological data, *Wires Water*, 3(6) 788-818, 2016.
 1388 Manga, M. On the timescales characterizing groundwater discharge at springs, *Journal of Hydrology*(Amsterdam),
 1389 219, 56-69, 1999.

1390 Marshall, S.K., Cook, P.G., Miller, A.D., Simmons, C.T., Dogramaci, S. The effect of undetected barriers on
1391 groundwater draw-down and recovery, *Groundwater*, 57(5), 718-726, 10.1111/gwat.12856, 2019.

1392 Mather, C. C., Nash, D. J., Dogramaci, S., Grierson, P. F., and Skrzypek, G. Geomorphic and hydrological controls
1393 on groundwater dolomite formation in the semi-arid Hamersley Basin, northwest Australia, *Earth Surface*
1394 *Processes and Landforms*, 44, 2752-2770, 10.1002/esp.4704, 2019.

1395 Melly, B.L., Schael, D.M., Gama, P.T. Perched wetlands: An explanation to wetland formation in semi-arid areas,
1396 *Journal of Arid Environments*, 141, 34-39, <https://doi.org/10.1016/j.jaridenv.2017.02.004>, 2017.

1397 Meinzer, O. Outline of ground-water hydrology with definitions, US Geol Surv Water Suppl Pap, 494, 1923.

1398 Meinzer, O. E. Large springs in the United States, Washington, D.C., Report 557, 119, 1927.

1399 Messenger, M.L., Lehner, B., Cockburn, C., Lamouroux, N., Pella, H., Snelder, T., Tocknew, K., Trautmann, T.,
1400 Watt, C., Datry, T. Global prevalence of non-perennial rivers and streams, *Nature* 594, 391-397, 2021.

1401 Ong, J. B., Lane, J. W., Zlotnik, V. A., Halihan, T., and White, E. A. Combined use of frequency-domain
1402 electromagnetic and electrical resistivity surveys to delineate near-lake groundwater flow in the semi-arid
1403 Nebraska Sand Hills, USA, *Hydrogeology Journal*, 18, 1539-1545, 10.1007/s10040-010-0617-x, 2010.

1404 Pearson, M.R., Reid, M.A., Miller, C., Ryder, D. Comparison of historical and modern river surveys reveal
1405 changes to waterhole characteristics in an Australian dryland river. *Geomorphology*, 356, 107089,
1406 <https://doi.org/10.1016/j.geomorph.2020.107089>, 2020.

1407 Pidwirny, M. Throughflow and Groundwater Storage, in *Fundamentals of Physical Geography*, 2nd Edition. 2006.

1408 Poeter, E., Fan, Y., Cherry, J., Wood, W., Mackay, D. Groundwater in our water cycle – getting to know Earth's
1409 most important fresh water source, 136pp. Groundwater Project, Geulph, Ontario, Canada. 2020

1410 Ponder, W. F. Mound Springs of the Great Artesian Basin, in: *Limnology in Australia*, edited by: De Deckker, P.,
1411 and Williams, W. D., Springer Netherlands, Dordrecht, 403-420, 1986.

1412 Queensland Government, Queensland. Catchment constrictions, *WetlandInfo* website, accessed 16 June 2021.
1413 Available at: [https://wetlandinfo.des.qld.gov.au/wetlands/ecology/aquatic-ecosystems-natural/groundwater-](https://wetlandinfo.des.qld.gov.au/wetlands/ecology/aquatic-ecosystems-natural/groundwater-dependent/catchment-constrictions/)
1414 [dependent/catchment-constrictions/](https://wetlandinfo.des.qld.gov.au/wetlands/ecology/aquatic-ecosystems-natural/groundwater-dependent/catchment-constrictions/), 2015.

1415 Rau, G. C., Andersen, M. S., McCallum, A. M., and Acworth, R. I. Analytical methods that use natural heat as a
 1416 tracer to quantify surface water–groundwater exchange, evaluated using field temperature records,
 1417 Hydrogeology Journal, 18, 1093-1110, 10.1007/s10040-010-0586-0, 2010.

1418 Rau,G.C., Halloran, L.J.S., Cuthbert, M.O., Andersen, M.S., Acworth, R.I., Tellam, J.H. Characterising the
 1419 dynamics of surface water-groundwater interactions in intermittent and ephemeral streams using streambed
 1420 thermal signatures, Advances in Water Resources, 107, 354-369,
 1421 <https://doi.org/10.1016/j.advwatres.2017.07.005>, 2017.

1422 Rayner, T. S., Jenkins, K. M., and Kingsford, R. T. Small environmental flows, drought and the role of refugia
 1423 for freshwater fish in the Macquarie Marshes, arid Australia, Ecohydrology: Ecosystems, Land and Water
 1424 Process Interactions, Ecohydrogeomorphology, 2, 440-453, 2009.

1425 Rhodes, K. A., Proffitt, T., Rowley, T., Knappett, P. S. K., Montiel, D., Dimova, N., ... Miller, G. R. The
 1426 importance of bank storage in supplying baseflow to rivers flowing through compartmentalized, alluvial
 1427 aquifers. Water Resources Research, 53, 10,539– 10,557. <https://doi.org/10.1002/2017WR021619>, 2017.

1428 Roshier, D.A., Whetton, P.H., Allan, R.J., Robertson, A.I. Distribution and persistence of temporary wetland
 1429 habitats in arid Australia in relation to climate change, Austral Ecology, 26(4) 371-384, 2001.

1430 Scanlon, B.R., Keese, K.E., Flint, A.L., Flint, L.E., Gaye, C.B., Edmunds, M., Simmers, I. Global synthesis of
 1431 groundwater recharge in semiarid and arid regions, Hydrol. Process., 20, 3335-3370, 2006.

1432 Shanafield, M., Bourke, S.A., Zimmer, M.A. Costigan, K.H. An overview of the hydrology of non-perennial rivers
 1433 and streams. Wiley Interdisciplinary Reviews: Water, 8(2), e1504, 2021.

1434 Shanafield, M. and Cook, P.G. Transmission losses, infiltration and groundwater recharge through ephemeral and
 1435 intermittent streambeds: A review of applied methods. Journal of Hydrology, 511, 518-529, 2014,
 1436 <https://doi.org/10.1016/j.jhydrol.2014.01.068>.

1437 Shannon, J., Richardson, R., Thomes, J. Modelling event-based fluxes in ephemeral streams. In: L. J. Bull, M. J.
 1438 Kirkby (Eds.). Dryland Rivers: Hydrology and Geomorphology of Semi-Arid Channels, 129-172, John Wiley
 1439 and Sons, Chichester, England. 2002.Sharma, D., Kansal, A. Assessment of river quality models: a review.
 1440 Reviews in Environmental Science and Bio/Technology, 12(3), 285-311, 2013, [https://doi.org/10.1007/s11157-](https://doi.org/10.1007/s11157-012-9285-8)
 1441 012-9285-8.

1442 Sheldon, F., Bunn, S. E., Hughes, J. M., Arthington, A. H., Balcombe, S. R. and Fellows, C. S. Ecological roles
 1443 and threats to aquatic refugia in arid landscapes: Dryland river waterholes, *Mar. Freshw. Res.*, 61(8), 885–
 1444 895, doi:10.1071/MF09239, 2010.

1445 Shepard, W. D. Desert springs-both rare and endangered, *Aquatic Conservation: Marine and Freshwater*
 1446 *Ecosystems*, 3, 351-359, 1993.

1447 Siebers, A. R., Pettit, N. E., Skrzypek, G., Fellman, J. B., Dogramaci, S., and Grierson, P. F. Alluvial ground
 1448 water influences dissolved organic matter biogeochemistry of pools within intermittent dryland streams,
 1449 *Freshwater Biology*, 61, 1228-1241, 10.1111/fwb.12656, 2016.

1450 Siegel, D. Reductionist hydrogeology: ten fundamental principles, *Hydrol. Processes*, 22, 4967-4970, 2008.

1451 Soti, V., Tran, A., Bailly, J.-S., Puech, C., Seen, D. L., and Bégué, A. Assessing optical earth observation systems
 1452 for mapping and monitoring temporary ponds in arid areas, *International Journal of Applied Earth Observation*
 1453 *and Geoinformation*, 11, 344-351, <https://doi.org/10.1016/j.jag.2009.05.005>, 2009.

1454 Springer, A. E., and Stevens, L. E. Spheres of discharge of springs, *Hydrogeology Journal*, 17, 83, 2009.

1455 Stallman, R. Steady one-dimensional fluid flow in a semi-infinite porous medium with sinusoidal surface
 1456 temperature, *Journal of Geophysical Research*, 70, 2821-2827, 1965.

1457 Stanley, E. H., Fisher, S. G., and Grimm, N. B. Ecosystem Expansion and Contraction in Streams, *BioScience*,
 1458 47, 427-435, 10.2307/1313058, 1997.

1459 Steward, A. L., von Schiller, D., Tockner, K., Marshall, J. C., Bunn, S. E. When the river runs dry: human and
 1460 ecological values of dry riverbeds., *Front. Ecol. Environ.*, 10, 202–209, 2012.

1461 Stonedahl, S.H., Harvey, J.W., Worman, A., Salehin, M., Packman, A.I. A multiscale model for integrating
 1462 hyporheic exchange from ripples to meanders, *Water Resour. Res.*, 46, W12539, 10.1029/2009wr008865,
 1463 2010.

1464 Sturman, A. P., and Tapper, N. J. The weather and climate of Australia and New Zealand, Oxford University
 1465 Press, USA, 1996.

1466 Theis, C. V. The source of water derived from wells, *Civil Engineering*, 10, 277-280, 1940.

1467 Thoms, M. C., and Sheldon, F. Lowland rivers: an Australian introduction, *Regulated Rivers: Research &*
 1468 *Management: An International Journal Devoted to River Research and Management*, 16, 375-383, 2000.

1469 Townley, L. R., and Trefry, M. G. Surface water-groundwater interaction near shallow circular lakes: Flow
1470 geometry in three dimensions, *Water Resources Research*, 36, 935-948, 10.1029/1999wr900304, 2000.

1471 Van der Kamp, G. and Hayashi, M. Groundwater-wetland ecosystem interaction in the semiarid glaciated plains
1472 of North America. *Hydrogeology Journal*, 17(1), 203-214, 2009.

1473 Villeneuve, S., Cook, P.G., Shanafield, M., Wood, C. White, N. Groundwater recharge via infiltration through an
1474 ephemeral riverbed, central Australia. *Journal of Arid Environments*, 117, 47-58, 2015.

1475 Williams, W.D. and Siebert, B.D. The chemical composition of some surface waters in central Australia. *Marine*
1476 *and Freshwater Research*, 14(2), 166-175, 1963, <https://doi.org/10.1071/MF9630166>. Winter, T.C., Harvey,
1477 J.W., Franke, O.L., Alley, W.M. Groundwater and surface water: a single resource. USGS Circular 1139,
1478 1998.

1479 Yu, S. Ngapa Kunangkul: living water, Report on the Indigenous cultural values of groundwater in the La Grange
1480 sub-basin. Perth, Western Australian Water and Rivers Commission, 2000.

1481 Zlotnik, V.A., Olaguera, F., Ong, J.B. An approach to assessment of flow regimes of groundwater-dominated
1482 lakes in arid environments, *J. Hydrol.* 371(1-4), 22-30, 2009.