

Supplement of

How do inorganic nitrogen processing pathways change quantitatively at daily, seasonal and multi-annual scales in a large agricultural stream?

Jingshui Huang^{1,2}, Dietrich Borchardt², Michael Rode²

¹Chair of Hydrology and River Basin Management, Technical University of Munich, Arcisstrasse 21, 80333 Munich, Germany

²Department of Aquatic Ecosystem Analysis, Helmholtz Centre for Environmental Research - UFZ, Brueckstrasse 3a, 39114 Magdeburg, Germany

Correspondence to: Jingshui Huang (jingshui.huang@tum.de)

Supplementary Information includes SI Text for estimation of discharges from the tributaries, calculation of NO_3^- and NH_4^+ uptake rates, and comparison of N uptake results among different studies, SI Figures S1-S4, and SI Tables S1-S3.

1 SI Text

2 1. Estimation of discharges from the tributaries

3 The discharges of 8 tributaries within the study reach were only measured bi-monthly, which would bring large
4 uncertainties in boundary conditions by interpolating such coarse resolution datasets with highly temporal
5 heterogeneous characteristics. However, a tributary Geesgraben, about 500 m upstream of HAD, has a gauge station,
6 which provides daily discharge. Since the geology, soil structure, elevation, and precipitation pattern are homogeneous
7 in the study area, we assume that the area specific discharges of the tributaries in the study reach are similar to that of
8 Geesgraben. Based on the assumption, the daily discharge ($m^3 s^{-1}$) of each tributary ($Q_{Trib,i}$) was calculated by the
9 area specific method (eq. S1)

$$Q_{Trib,i} = \frac{Q_{Gees}}{A_{Gees}} \times A_{Trib,i} \quad (\text{eq. S1})$$

10 where Q_{Gees} donates the daily natural discharge of Geesgraben ($m^3 s^{-1}$); A_{Gees} and $A_{Trib,i}$ represent catchment areas
11 (km^2) of Geesgraben and i^{th} tributary, representatively. The catchment areas are provided in Table S1. What needs to
12 be mentioned is that sewage from a large sugar refinery continuously discharged into Geesgraben. For an accurate
13 area specific discharge calculation, Q_{Gees} was obtained by subtracting the sewage flow from the measured daily flow
14 of Geesgraben.

15 We also considered the situations that the small tributaries can dry out in the summer months. The tributaries with
16 the catchment size below $30 km^2$, namely Roethe, Suelzgraben, Hecklinger Hauptgraben, and Boernecker Graben,
17 were assumed to dry out when the discharge of the Geesgraben fell beneath its base flow value of $0.05 m^3 s^{-1}$. Finally,
18 to test the reliability of the calculated values, a hydrological budget with a percentage error of discharge (*Error*, in %)
19 was derived as

$$Error = \left(Q_{Up} + \sum_i^8 Q_{Trib,i} - Q_{Down} \right) / Q_{Down} \times 100\% \quad (\text{eq. S2})$$

20 where $\sum_i^8 Q_{Trib,i}$ is the sum of the 8 tributary discharges; Q_{UP} and Q_{DOWN} represent the mean daily discharge at the
21 upstream and downstream stations. We found that the mean percentage error for 5 years was 0.97%.

22 2. Calculation of NO_3^- and NH_4^+ uptake rates

23 Because many studies measured uptake rates for specific N form (i.e., NO_3^- and NH_4^+) separately or only, in order to
24 better compare the uptake rate results of this study with others, we also calculated the nitrate gross uptake rate
25 (U_{GROSS,NO_3}), nitrate net uptake rate (U_{NET,NO_3}), ammonia gross uptake rate (U_{GROSS,NH_4}), and ammonia net uptake
26 rate (U_{NET,NH_4}) separately. All process rates have the same unit of $mg N m^{-2} d^{-1}$.

$$U_{GROSS,NO_3} = U_D + U_{A,P,NO_3} + U_{A,B,NO_3} \quad (\text{eq. S3})$$

$$U_{NET,NO_3} = U_D + U_{A,P,NO_3} + U_{A,B,NO_3} - U_{NIT} \quad (\text{eq. S4})$$

$$U_{GROSS,NH_4} = U_{A,P,NH_4} + U_{A,B,NH_4} + U_{NIT} \quad (\text{eq. S5})$$

$$U_{NET,NH4} = U_D + U_{A,P} + U_{A,B} - R_P - R_B + U_{NIT} - U_{MIN} \quad (\text{eq. S6})$$

27 where $U_{A,P,NO3}$ and $U_{A,B,NO3}$ represent the assimilatory NO_3^- uptake rate by phytoplankton and benthic algae,
 28 respectively; $U_{A,P,NH4}$ and $U_{A,B,NH4}$ represent the assimilatory NH_4^+ uptake rate by phytoplankton and benthic algae,
 29 respectively; U_{NIT} is the nitrification rate. NH_4^+ is a preferred DIN form for algae due to the lower energy required to
 30 assimilate into biomass. The preference percentage for ammonia uptake of total DIN uptake by phytoplankton (P_{NH3})
 31 and benthic algae (P_{NH4b}) are calculated as:


$$P_{NH3} = \frac{C_{NH4} C_{NO3}}{(K_{mN} + C_{NH4})(K_{mN} + C_{NO3})} + \frac{C_{NH4} K_{mN}}{(C_{NH4} + C_{NO3})(K_{mN} + C_{NO3})} \quad (\text{eq. S7})$$

$$P_{NH4b} = \frac{C_{NH4} C_{NO3}}{(K_{hnxb} + C_{NH4})(K_{hnxb} + C_{NO3})} + \frac{C_{NH4} K_{hnxb}}{(C_{NH4} + C_{NO3})(K_{hnxb} + C_{NO3})} \quad (\text{eq. S8})$$

32 where K_{mN} is the half-saturation constant for N uptake for phytoplankton and K_{hnxb} is the ammonia preference factor
 33 for benthic algae showed in Table S3.


34 **3. Comparison of N uptake results among different studies**

35 We compared our instream DIN uptake rates with the results of other studies. Our results of $U_{NET,NO3}$ in the growing
 36 season (i.e., spring and summer) are comparable to those measured in 4-5th order streams (9.1-376.7 mg N m⁻² d⁻¹)
 37 with nutrient addition methods summarized by Ensign and Doyle (2006). Exceptions that exceeded this range were
 38 for a few days at the spring phytoplankton peaks. Our results are also comparable with the measured $U_{NET,NO3}$ in rivers
 39 of similar size by longitudinal profiling method (Hensley et al., 2014; Kunz et al., 2017). Ensign and Doyle (2006)
 40 reported $U_{NET,NH4}$ of 3.6-228.5 mg N m⁻² d⁻¹ for 4-5th order streams, which is comparable to the rates estimated for
 41 the Lower Bode in the growing seasons (Table 4).

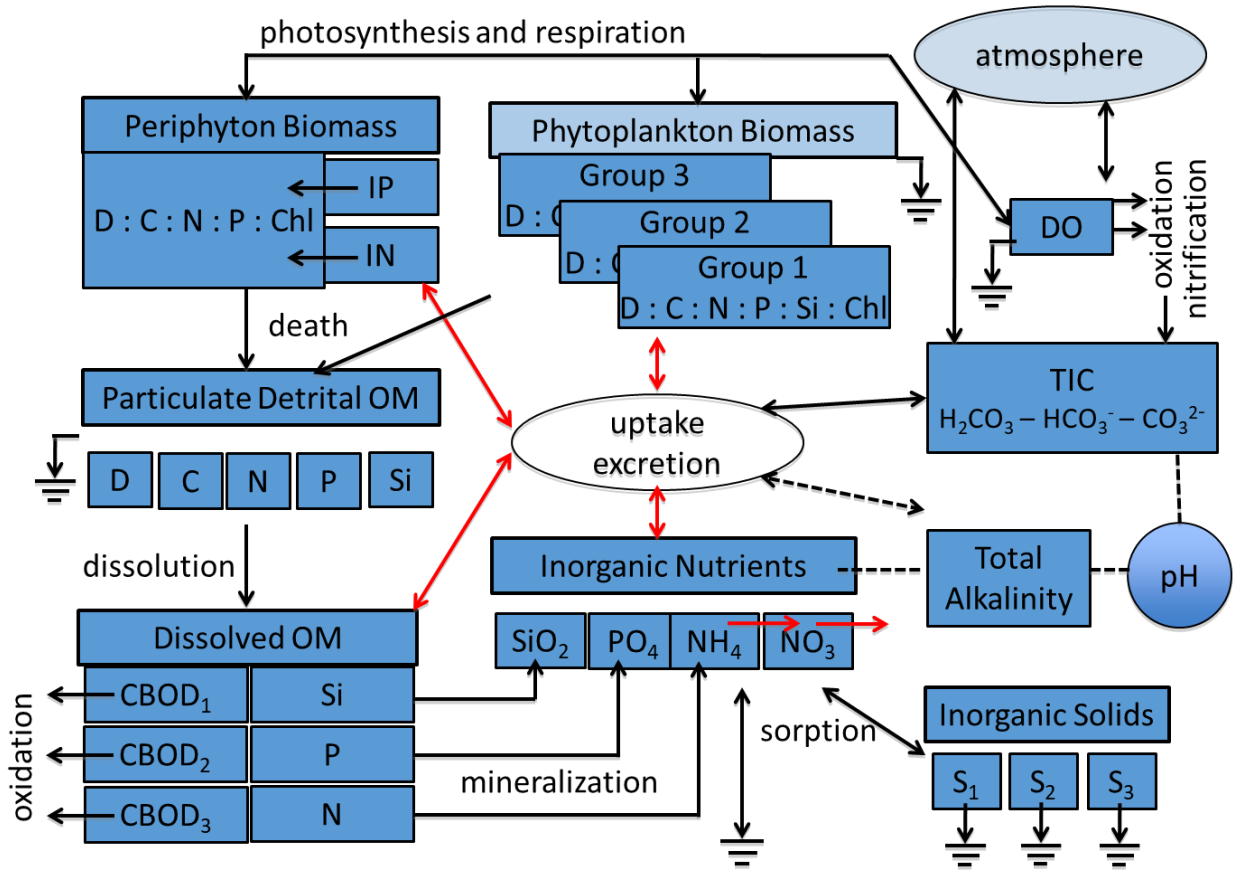


43

44 **Figure S1.** Schematic description of the kinetic model for WASP Advanced EUTRO Module. The red lines represent the N
 45 cycling processes we focused on in this study. The schematic chart was adopted from Wool et al. (2020).

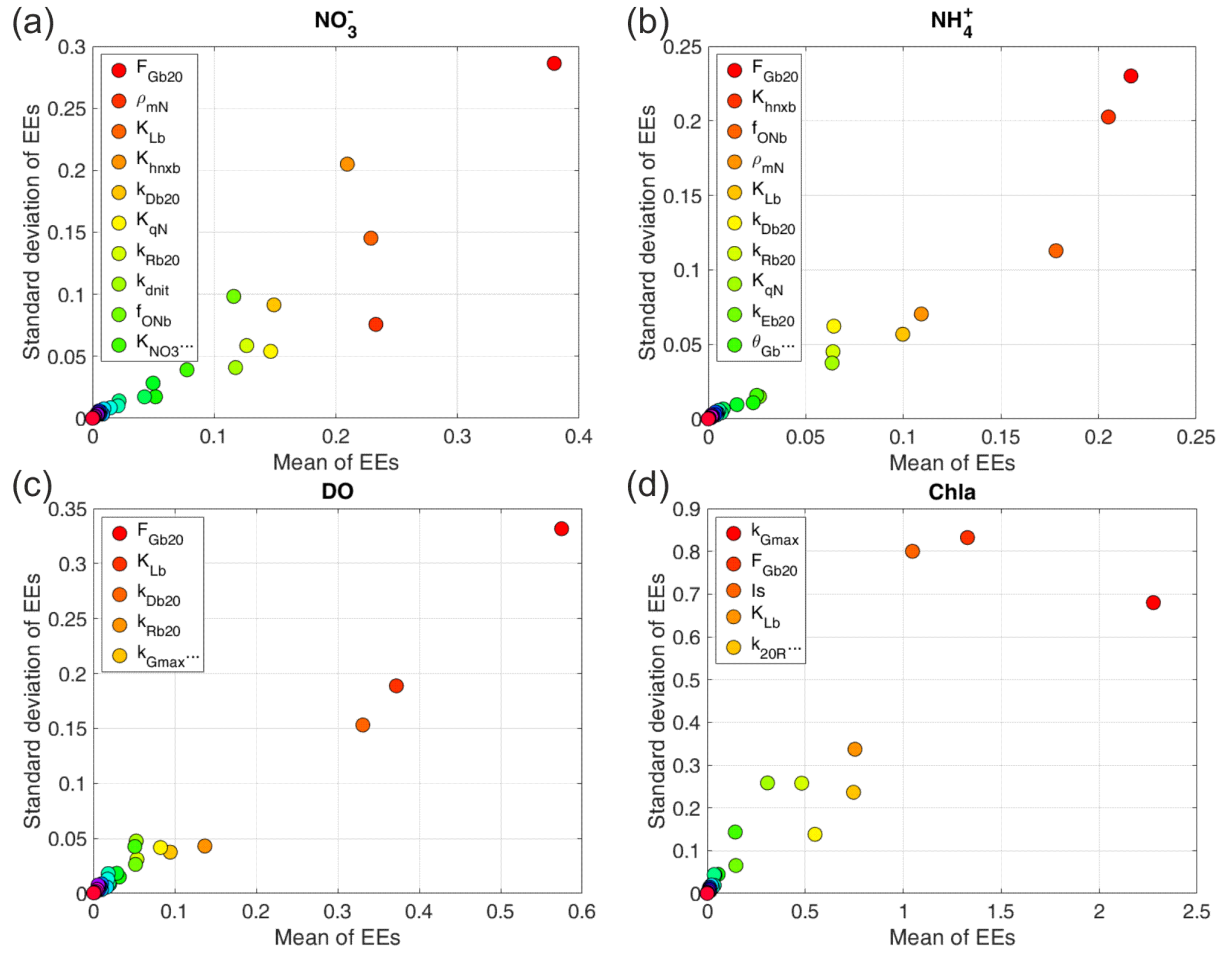

46


47 **Figure S2. Parameter sensitivity ranking by Elementary Effects (EE) method with different objective functions defined**
 48 **respectively by the RMSE of (a) NO_3^- , (b) NH_4^+ , (c) DO, and (d) Chl-a. The more to the right a point along the horizontal**
 49 **axis, the more influential the parameters. The higher up a point along the vertical axis, the larger its degree of interactions**
 50 **with other parameters. The most sensitive parameters for each objective function are shown in the legends.**

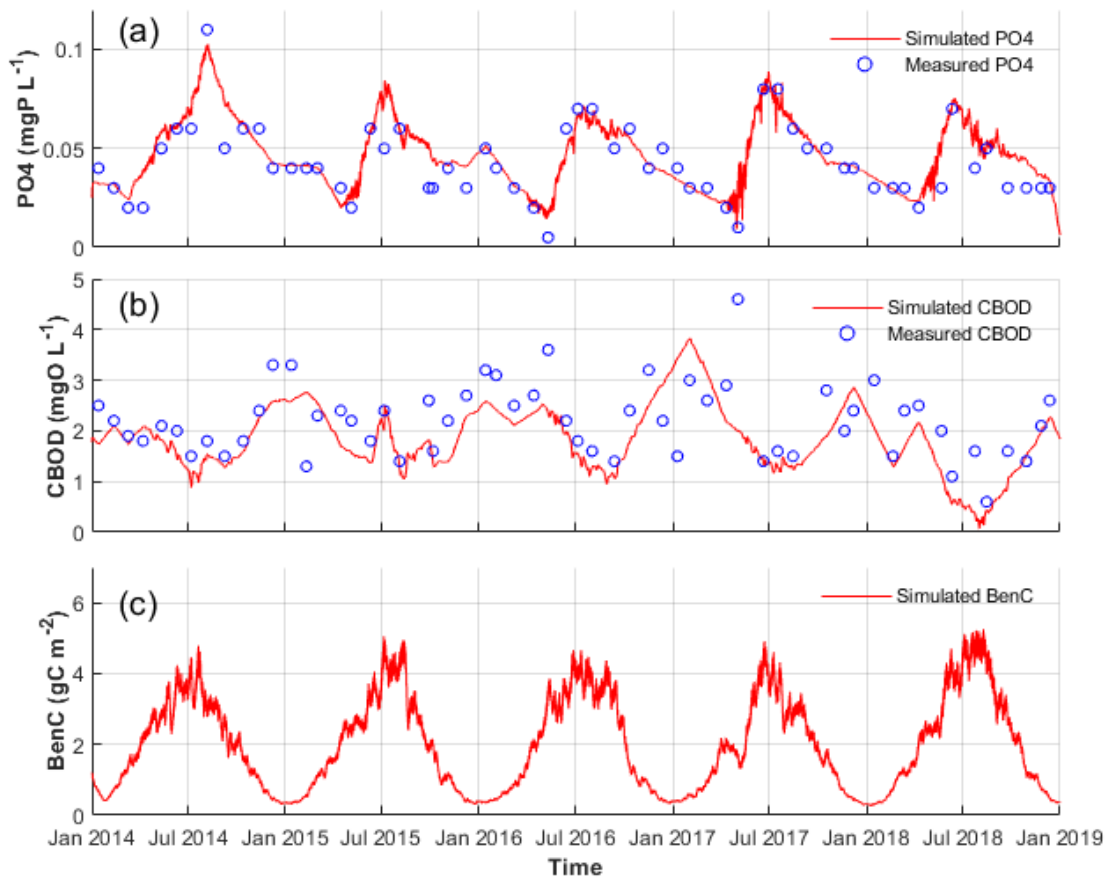

51

52 **Figure S3. Measured and simulated (a) PO₄³⁻ (b) CBOD and simulated (c) benthic algae biomass carbon concentrations in**
 53 **calibration and validation periods at the STF station.**

54

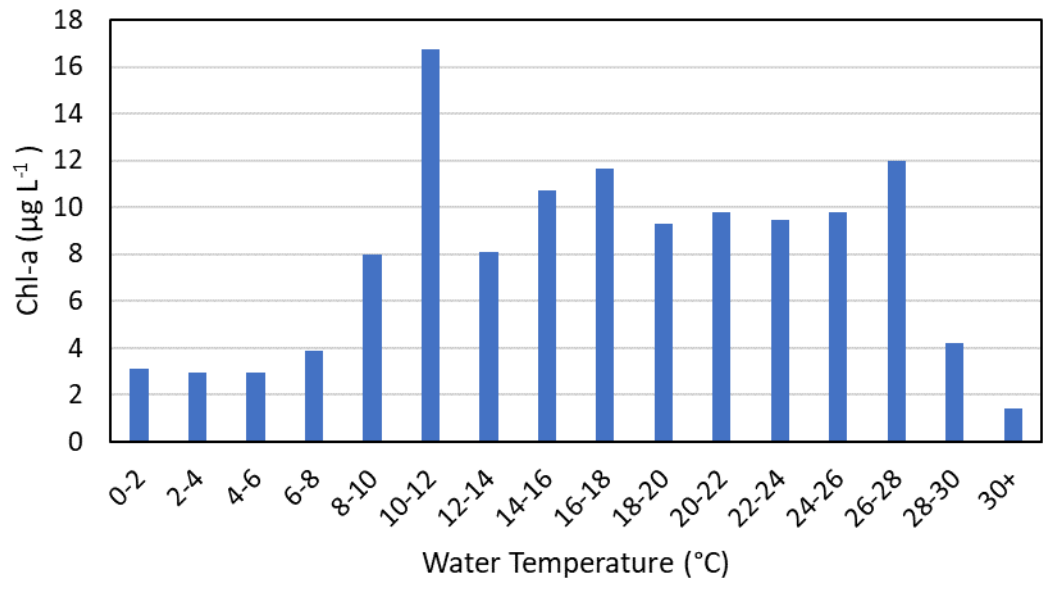

55

56 **Figure S4. Measured average Chl-a concentration at different water temperatures at STF.**

57 **SI Table**58 **Table S1. Summary of C-Q analysis for the tributaries of Lower Bode.**

	Watershed area (km²)	Slope for C-Q linear regression[#]	Offset for C-Q linear regression	R² for correlation of Q and NO₃⁻
Sarre	70.89	13.31	3.48	0.51
Sülzgraben	23.43	75.93	6.17	0.14
Röthe ^{1*}	22.01	-	-	-
Ehle	118.74	3.33	1.25	0.44
Marbegraben	77.98	7.95	-0.07	0.18
Börnecker Graben ^{2§}	27.24	-	-	-
Hecklinger Hauptgraben	10.81	22.66	0.42	0.26
Beek	51.95	2.38	8.28	0.005

59 ^{*,§} No water quality data are available for Röthe and Börnecker Graben. For these two streams for which no regression
60 could be made, their equations were adopted by those of the most similar streams in catchment size or NO₃⁻
61 concentration, i.e., Röthe by Sülzgraben and Börnecker Graben by Hecklinger Hauptgraben.

62 [#] Positive slopes indicate enrichment, and negative slopes indicate dilution.

63

Table S2. Stoichiometry and kinetic parameters related to N processes in the WASP model.

Symbol	Kinetic Constant	Units	Value	Range^s
k_{nitr}	Nitrification rate constant at 20 °C	d^{-1}	0.4	0-0.4
θ_{nitr}	Nitrification temperature coefficient	--	1.07	1.04-1.1
K_{nit}	Half saturation constant for nitrification oxygen limit	mg O L^{-1}	2	0-5
k_{dnit}^*	Denitrification rate constant at 20 °C	d^{-1}	0.15	0-0.4
θ_{dnit}	Denitrification temperature coefficient	--	1.1	1.04-1.1
K_{NO_3}	Half saturation constant for denitrification oxygen limit	mg O L^{-1}	1	0-5
$F_{\text{Gb}20}^*$	Benthic algae maximum growth rate	$\text{gD m}^{-2} \text{d}^{-1}$	6.5	5 – 100
θ_{Gb}	Temp coefficient for benthic algal growth	--	1.08	1.05 - 1.1
$k_{\text{Rb}20}^*$	Benthic algae respiration rate constant	d^{-1}	0.2	0.05 – 0.2
θ_{Rb}	Temperature coefficient for benthic algal respiration	--	1.05	1.05 – 1.08
$k_{\text{Eb}20}^*$	Internal nutrient excretion rate constant for benthic algae	d^{-1}	0.1	0.02 – 0.1
$\theta_{\text{Eb}20}^*$	Temperature coefficient for benthic algal nutrient excretion	--	1.05	1.05 – 1.08
$k_{\text{Db}20}^*$	Benthic algae death rate constant	d^{-1}	0.02	0.001-0.2
$\theta_{\text{Db}20}$	Temperature coefficient for benthic algal death	--	1.05	1.05 – 1.08
K_{sNb}	Half saturation uptake constant for extracellular N for benthic algae	mg N L^{-1}	0.2	0.05-0.8
K_{Lb}^*	Light constant for benthic algal growth	Ly d^{-1}	130	50-300
K_{hnxb}^*	Ammonia preference for benthic algae	mg N L^{-1}	0.025	0.01 – 0.5
q_{ON}	Minimum cell quota of internal N for benthic algal growth	mgN/gD	7	4-20
ρ_{mN}^*	Maximum N uptake rate for benthic algae	mgN/gD-d	720	200 – 2000
K_{qN}^*	Half saturation uptake constant for intracellular N for benthic algae	mgN/gD	9	5 – 20
f_{ONb}^*	Fraction of benthic algae recycled to organic N	--	0.21	0 – 0.5
NCRB	Phytoplankton N to carbon ratio	gN/gC	0.25	0.15-0.25
CChla	Phytoplankton carbon to chlorophyll ratio	gC/gChl	50	25-125
k_{Gmax}^*	Phytoplankton maximum growth rate constant at 20 °C	d^{-1}	2.5	0.5 – 4.0
θ_{G}	Phytoplankton growth temperature coefficient	--	1.07	1.05-1.1
$k_{20\text{R}}$	Phytoplankton respiration rate constant at 20 °C	d^{-1}	0.1	0.05 – 0.25
θ_{R}	Phytoplankton respiration temperature coefficient	--	1.05	1.05 – 1.08
k_{D}	Phytoplankton death rate constant (non-zoo predation)	d^{-1}	0.02	0.003 – 0.1
K_{mN}	Phytoplankton half-saturation constant for N uptake	mg N L^{-1}	0.02	0.005-0.4
Is	Phytoplankton optimal light saturation	Ly d^{-1}	250	100 – 500
f_{ON}	Fraction of phytoplankton death recycled to organic N	--	0.2	0.05 – 0.5
k_{min}	Mineralization rate constant for organic N	d^{-1}	0.1	0.01 – 0.2
θ_{min}	Temperature coefficient for mineralization	--	1.07	1.04 – 1.1
K_{mpc}	Algal half-saturation constant for mineralization	mg C L^{-1}	0.025	0.01 – 0.5
a_{NC}	Benthic algae N to carbon ratio	gN/gC	0.18	0.06 – 0.3

G_p	Phytoplankton growth rate	d^{-1}	$k_{Gmax} X_{RT} X_{RI} X_{RN}$ #
D_p	Phytoplankton death rate	d^{-1}	$k_{20R} \theta_R^{T-20} + k_D$
F_{Gb}	Benthic algal zero-order growth rate	d^{-1}	$F_{Gb20} \phi_{Tb} \phi_{Lb} \phi_{Nb}$ %

65 * The most identifiable parameters used for auto-calibration.

66 \$ Sources of literature values: Wool et al. (2002) and Martin et al. (2017).

67 # X_{RT} , X_{RI} and X_{RN} refer to dimensionless temperature adjustment factor, light, and nutrient limitation factor for
68 phytoplankton, respectively.

69 % ϕ_{RT} , ϕ_{RI} and ϕ_{RN} refer to dimensionless temperature adjustment factor, light, and nutrient limitation factor for
70 benthic algae, respectively. T represents water temperature. More details on the calculation of G_p , D_p and F_{Gb} are
71 provided in the WASP manual.

72

73 **Table S3. Statistics calculated on uptake rates and efficiency: minimum (Min), median, mean, and maximum**
 74 **(Max) values.**

Variable	Unit	Min	Median	Mean	Max
U_{GROSS}	mg N m ⁻² d ⁻¹	7.9	74.0	124.1	707.9
U_{NET}	mg N m ⁻² d ⁻¹	-17.4	19.9	56.8	553.9
E_{GROSS}	%	0.03	2.7	6.0	43.3
E_{NET}	%	-1.3	0.7	2.7	29.1
U_D	mg N m ⁻² d ⁻¹	0.2	4.3	14.1	117.1
$U_{NET,A,P}$	mg N m ⁻² d ⁻¹	-4.7	6.7	28.4	536.9
$U_{NET,A,B}$	mg N m ⁻² d ⁻¹	-21.6	11.5	14.3	77.9
$U_{GROSS,NO3}$	mg N m ⁻² d ⁻¹	1.3	35.7	60.5	485.2
$U_{NET,NO3}$	mg N m ⁻² d ⁻¹	-49.7	23.6	49.2	481.4
$U_{GROSS,NH4}$	mg N m ⁻² d ⁻¹	5.7	45.6	63.6	257.1
$U_{NET,NH4}$	mg N m ⁻² d ⁻¹	-42.0	4.0	7.6	161.3

75

76 **References**

- 77 Ensign, S.H. and Doyle, M.W.: Nutrient spiraling in streams and river networks, *J. Geophys. Res. Biogeosci.*, 111,
78 G04009, <https://doi.org/10.1029/2005JG000114>, 2006.
- 79 Hall Jr, R.O., Tank, J.L., Sobota, D.J., Mulholland, P.J., O'Brien, J.M., Dodds, W.K., Webster, J.R., Valett, H.M.,
80 Poole, G.C., Peterson, B.J., Meyer, J.L., McDowell, W.H., Johnson, S.L., Hamilton, S.K., Grimm, N.B., Gregory,
81 S.V., Dahm, C.N., Cooper, L.W., Ashkenas, L.R., Thomas, S.M., Sheibley, R.W., Potter, J.D., Niederlehner, B.R.,
82 Johnson, L.T., Helton, A.M., Crenshaw, C.M., Burgin, A.J., Bernot, M.J., Beaulieu, J.J., and Arangob, C.P.: Nitrate
83 removal in stream ecosystems measured by 15N addition experiments: Total uptake, *Limnol. Oceanogr.*, 54(3), 653-
84 665, <https://doi.org/10.4319/lo.2009.54.3.0653>, 2009.
- 85 Hensley, R.T., Cohen, M.J., and Korhnak, L.V.: Inferring nitrogen removal in large rivers from high-resolution
86 longitudinal profiling, *Limnol. Oceanogr.*, 59(4), 1152-1170, <https://doi.org/10.4319/lo.2014.59.4.1152>, 2014.
- 87 Kunz, J.V., Hensley, R., Brase, L., Borchardt, D., and Rode, M.: High frequency measurements of reach scale nitrogen
88 uptake in a fourth order river with contrasting hydromorphology and variable water chemistry (Weiße Elster,
89 Germany), *Water Resour. Res.*, 53(1), 328-343, <https://doi.org/10.1002/2016WR019355>, 2017.
- 90 Wool, T.A., Ambrose, R.B., Martin, J.L., and Comer, E.A.: Water Quality Analysis Simulation Program (WASP)
91 Version 6.0 DRAFT: User's Manual, US Environmental Protection Agency – Region 4, Atlanta, GA, US, 2002.
- 92 Wool, T., Ambrose, R.B., Martin, J.L., and Comer, E.A.: WASP 8: The Next Generation in the 50-year Evolution of
93 USEPA's Water Quality Model, *Water*, 12(5), <https://doi.org/10.3390/w12051398>, 2020.
- 94 Martin, J.L., Robert B., and Wool, T.A.: WASP7 Benthic Algae - Model Theory and User's Guide, Supplement to
95 Water Analysis Simulation Program (WASP) User Documentation, US Environmental Protection Agency – Region
96 4, Atlanta, GA, US, 2017.