

Sources and mean transit times of stream water in an intermittent river system: the upper Wimmera River, southeast Australia

5 Zibo Zhou¹, Ian Cartwright¹, Uwe Morgenstern²

¹School of Earth, Atmosphere and Environment, Monash University, Clayton, VIC, 3800, Australia

²GNS Science, Lower Hutt, 5040, New Zealand

Corresponding to: Zibo Zhou (email: zibo.zhou@monash.edu)

10

15

Abstract

20 Determining the mean transit times (MTTs) and water sources in catchments at different flow conditions helps better understand river functioning, and manage river health and water resources. Despite being common in a range of environments, the MTTs and water sources in intermittent streams are much less well understood compared to perennial streams. Major ion geochemistry, stable isotopes, ^{14}C , and ^3H were used in this study to identify water sources and MTTs of the

25 periodically-intermittent upper Wimmera River from southeast Australia at different flow conditions, including zero-flow periods. The disconnected pool waters during the zero-flow period in the summer months of 2019 had ^3H activities of 0.64 to 3.29 TU. These and the variations in total dissolved solids and stable isotopes imply that these pools contained a mixture of older groundwater and younger stream water impacted by evaporation. ^3H activities during the high-

30 flow period in July 2019 were 1.85 to 3.00 TU, yielding MTTs of up to 17 years. The ^3H activities at moderate and low-flow conditions in September and November 2019 ranged from 2.26 to 2.88 TU, implying MTTs of 1.6 to 7.8 years. Regional groundwater near the Wimmera River had ^3H activities of < 0.02 to 0.45 TU and ^{14}C activities of 57 to 103 pMC and was not recharged by the river at high flows. The Wimmera River and other intermittent streams in southeast Australia are

35 sustained by younger catchment waters from relatively small near-river stores than comparable perennial streams, which have older deeper regional groundwater inputs. This results in these intermittent streams being more susceptible to short-term changes in climate and necessitates the protection of near-river corridors to maintain the health of the riverine systems.

40 **1 Introduction**

Understanding the timescales of water flow through catchments to rivers at different hydrological conditions is vital for effective water resources management, protecting riverine systems, and predicting the changes in river functioning due to climate variability, changes in land use and water utilization (Sophocleous, 2002; Cook., 2013; Van Dijk et al., 2013; Gleeson et al., 2016; Segura et al., 2019). Mean transit times (MTTs) represent the average time for precipitation to be transmitted from a recharge area through a catchment to where it discharges into rivers or streams (Cook and Bohlke, 2000; McDonnell et al, 2010; Morgenstern et al., 2010). Transit time distributions (i.e. the frequency of water of different ages in the sample) potentially provide better information on catchment processes than MTTs. In particular, they allow better understanding of finer-scale catchment processes (e.g., the release of water from different stores as catchments wet up and dry down) (Hrachowitz et al., 2010; Benettin et al., 2015; Birkel et al., 2015). However, MTTs are important for understanding broad catchment behaviour (McGuire and McDonnell, 2006; McDonnell et al, 2010; Blavoux et al., 2013; Duvert et al., 2016; Howcroft et al., 2018) such as the average age of the water stores contributing to streams at different flow conditions. Documenting MTTs is also important for understanding the resilience of catchments. Streams with long MTTs are sustained by larger volumes reservoirs of water from within the catchments (e.g., Morgenstern et al., 2010; Gusyeve et al., 2016; Howcroft et al., 2018) and thus are less sensitive to short-term climate variability (e.g., droughts lasting years to decades). In addition, the MTTs may control water salinity, water temperature, microbial activity, and the attenuation and dispersion input of nutrients and other contaminants to rivers (Kirchner et al., 2000; Hare et al., 2021).

The water that sustains river flow may have residence times ranging from a few days to several centuries. Younger water may be derived from stores in the shallow near-river environment (such

as surface runoff, water stored in the soil, and interflow), while regional groundwater represents a large store of older water (Soulsby et al., 2000; McGuire and McDonnell, 2006; Stewart et al., 2010; Cartwright and Morgenstern, 2015; Duvert et al., 2016; Jung et al., 2019). However, 65 relatively little is known about the timescale of water flow in most catchments and whether water of different ages and from different stores contributes to rivers at different flow conditions. Numerous studies have focused on perennial streams and have revealed the presence of long-lived water stores contributing to streamflow especially during low-flow periods (Rice and Hornberger, 70 1998; Soulsby et al., 2006; Hrachowitz et al., 2009; Cartwright and Morgenstern, 2015; Gusyev et al., 2016; Howcroft et al., 2018; Cartwright et al., 2020). There has been less attention on intermittent streams, which represent > 50% of global rivers and are especially important in semi-arid areas (Datry et al., 2014; Costigan et al., 2015; Gutiérrez-Jurado et al., 2019, Shanafield et al., 2021). The connection between intermittent streams and regional groundwater may be less 75 important than for perennial streams, especially during the periodic cease-to-flow times when the water table falls and water from near-river stores become dominant (e.g., Zimmer and McGlynn, 2017). Determining MTTs of intermittent streams will improve our understanding of groundwater-surface water interaction in these catchments.

1.1 Documenting mean transit times

80 Several approaches can be used to estimate MTTs in rivers. MTTs may be determined by using lumped parameter models (LPMs) that describe the distribution of water with different ages or tracer concentrations in homogeneous aquifers with simple geometries and consistent recharge rates (Maloszewski and Zuber, 1982; Maloszewski, 2000; Zuber et al., 2004; McGuire and McDonnell, 2006).

85 LPMs may be based on the attenuation of $\delta^{18}\text{O}$ values or Cl concentration variabilities in rainfall
at the catchment outlet. This approach requires frequent (generally at least monthly but preferably
shorter spaced if the details of hydrological processes are to be captured) long-term tracer records
in rainfall and stream water (Kirchner et al., 2004; McGuire and McDonnell, 2006), and such
datasets are available only in a small number of catchments globally. Because intermittent streams
90 only flow for part of the year, it is more difficult to use LPMs based on continuous ^{18}O or Cl
measurements than in perennial streams. In addition, this approach assumes that the catchment is
at steady state, which is unlikely to be the case (Kirchner, 2016b). It is also not viable where MTTs
are greater than 4 to 5 years due to attenuation of the input record to below the resolution at which
the tracers can be measured (Stewart et al. 2010), which is commonly the case in southeast
95 Australia (Cartwright et al., 2020). Techniques such as ensemble hydrographs (Kirchner, 2019;
Knapp et al., 2019), flux tracking (Hrachowitz et al., 2013), and StoreAge Selection Functions
(Rinaldo et al., 2015) can determine transit times from shorter time-series and do not assume
steady-state conditions. However, these methods still require frequent tracer data for rainfall and
streams that are not commonly available.

100 Tritium (^3H) has a half-life of 12.32 years and is part of the water molecule. Unlike tracers such as
chlorofluorocarbons, and SF_6 , ^{14}C , and ^3He , its abundance is not affected by degassing or
geochemical or biogeochemical reactions. This allows ^3H to be used to estimate MTTs of shallow
groundwater, water from the unsaturated zone and stream water (e.g., Morgenstern et al., 2010;
Duvert et al., 2016; Jung et al., 2019). Due to atmospheric nuclear tests, ^3H activities in rainfall
105 reached a peak in the 1950s and 1960s (the “bomb pulse”). In the southern hemisphere, the remnant
bomb pulse ^3H activities are now lower than those in modern rainfall (Morgenstern et al., 2010;
Tadros et al., 2014). This makes it possible to estimate MTTs from a single ^3H measurement in a

similar way to how other radioisotopes such as ^{14}C and ^{36}Cl are used to determine residence times of older groundwater (e.g., Clark, 2015; Cartwright et al., 2017; Howcroft et al., 2019). Low-level ^3H measurements allow MTTs of up to ~150 years to be determined, although the relative precision of the estimates decreases at longer MTTs.

MTT estimates made using ^3H have several uncertainties. The decline of the bomb pulse ^3H activities in the southern hemisphere makes it impossible to assess the suitability of an LPM by time-series ^3H measurements that commence now (Cartwright and Morgenstern, 2015). Assigning LPMs is therefore based on catchment attributes (e.g., the geometry of the flow system) or information from previous studies in similar catchments. Although it represents an uncertainty, MTTs are less sensitive to the choice of LPMs than in the northern hemisphere (Morgenstern et al., 2010; Blavoux et al., 2013). In addition, where multiple water sources (e.g., groundwater, soil water, or water from multiple tributaries) with different MTTs contribute to rivers (aggregation), it is difficult to estimate MTTs (Suckow, 2014; Kirchner, 2016a; Stewart et al., 2017). The heterogeneous hydraulic conductivities of aquifers also contribute to uncertainties in MTT calculations (Weissmann et al., 2002; McCallum et al., 2015). However, where the scale of heterogeneity is small relative to the size of the aquifer, the MTTs are similar to those predicted by the LPMs (Cartwright et al., 2018). Lastly, the seasonal variability of ^3H activities in rainfall could lead to uncertainty in MTT estimates. Where strong seasonal recharge occurs, ^3H activities of rainfall that recharges the catchment may be different from those of annual rainfall, which is usually used as the ^3H input (e.g., Morgenstern et al., 2010). Although these factors introduce uncertainties in MTT calculations, water in the southern hemisphere with lower ^3H activities invariably has longer MTTs, which allows relative relationships to be determined. This also

130 permits the understanding of the changing sources of water contributing to streams during different
flow conditions (Duvert et al., 2016; Howcroft et al., 2018; Cartwright et al., 2018, 2020).

Previous studies of perennial streams in southeast Australia (summarized in Cartwright et al., 2020)
noted that the runoff coefficient (the proportion of annual rainfall exported by the stream) had an
inverse correlation with MTTs. This relationship probably reflects the high evapotranspiration
135 rates in some catchments which results in less of the rainfall being exported as runoff. Those
catchments will also have low recharge rates and slower groundwater flow, and consequently the
water discharging to the streams will have longer MTTs. The runoff coefficient represents a more
viable first-order proxy for MTTs than catchment attributes such as slope, drainage density, or
major ion concentrations in those catchments. Whether a similar relationship between MTTs and
140 runoff coefficients occurs in intermittent catchment is not known.

1.2 Understanding water sources

As noted above, rivers are potentially fed by a range of water stores from within catchment,
including soil water, interflow, bank return flow, shallow riparian groundwater, and deeper
regional groundwater (e.g., Peters et al., 2014; Duvert et al., 2016; Cartwright and Morgenstern,
145 2018; Howcroft et al., 2019). Due to mineral dissolution, the breakdown of organic matter and
evapotranspiration, water stored within catchments commonly has a higher salinity than surface
runoff (Herczeg et al., 2001; Edmunds, 2009). Variable operation of these processes may result in
differences in major ion geochemistry between the water sources. For example, soil water may
have high nitrate or organic carbon concentrations due to breakdown of organic matter. There may
150 also be differences in the stable isotope geochemistry of these waters reflecting seasonal recharge,
evapotranspiration, or long-term changes to rainfall stable isotope ratios (Hughes and Crawford,
2012). Not all catchments, however, contain water stores with distinct geochemistry. This is

commonly the case in southeast Australia where high evapotranspiration rates mask the effects of mineral dissolution (Herczeg et al., 2001; Cartwright and Morgenstern, 2015; Howcroft et al., 2018; Barua et al., 2022). In those catchments, documenting MTTs allows the inputs of older and younger catchment water to be assessed.

1.3 Objectives

This study determines the mean transit time and water sources at different flow conditions (including zero flows) in the seasonally-intermittent upper Wimmera River in southeast Australia using ^3H , ^{14}C , stable isotopes, and major ion geochemistry. A previous study (Zhou and Cartwright, 2021) used similar tracers to understand the locations of groundwater inflow to the river; however, did not specifically address the timescale of water flow in the catchment or the volumes of the water stores that sustain streamflow. We hypothesized that: 1) mean transit times in the Wimmera River are younger than in comparable perennial streams from southeast Australia; 2) younger near-river water stores (such as shallow riparian groundwater and bank return flows) are more important than regional groundwater in sustaining the river at all flow conditions; and 3) due to the river containing alternate gaining and losing reaches, the runoff coefficient will not be a reliable indicator of mean transit times. As with many rivers globally (Shanafield et al., 2020; Messenger et al., 2021), the upper Wimmera River has become more intermittent over recent years due to climate change. The results from this study are important in understanding and managing catchment behaviour in intermittent streams more generally. We also assess what tracers are useful in distinguishing between water sources, which will help inform studies on similar catchments.

2 Study area

Located in southeast Australia, the Wimmera River is an intermittent river in the southern Murray-Darling Basin. The Wimmera catchment has an area of approximately 24,000 km² and the middle

and lower parts of the river are important for agriculture (Fletcher, 2015; Department of Environment, Land, Water and Planning, 2021). In the summers of all but the wettest years, the Wimmera River ceases to flow and comprises a series of disconnected pools (Western et al., 1996). Since the 1980s, the Wimmera River has experienced a decline in streamflow and an increase in
180 intermittency (Department of Environment, Land, Water and Planning, 2021) especially between 1996 to 2009 when southeast Australia experienced a large reduction in rainfall and streamflow during the Millennium Drought (Bureau of Meteorology, 2021). The study area is located in the upper Wimmera River catchment (Fig. 1) which has an area of approximately 3000 km². Dryland pasture with remnant native eucalypt woodlands is the dominant vegetation coverage in the upper
185 catchment (Fletcher, 2015; Department of Environment, Land, Water and Planning, 2021) and there is only minor groundwater and river water use (Robinson et al., 2006; Wimmera Catchment Management Authority, 2013; Fletcher, 2015).

The upper catchment of the Wimmera River comprises a Palaeozoic basement of metamorphosed shales and schists of the St Arnaud Group, indurated sandstones of the Glenthompson and
190 Grampians Groups, and Devonian granites (Fig. 1: Department of Jobs, Precincts and Regions, 2021). Alluvial and lacustrine Palaeogene to Recent sediments that were deposited by the precursors of the current rivers overlie the basement. These sediments consist of rounded gravels, coarse sands, silts and clays (Robinson et al., 2006). The dominant topography in the upstream reaches of the upper Wimmera River is a broad valley while the downstream part is a flat alluvial
195 flood plain (Robinson et al., 2006; Department of Environment, Land, Water and Planning, 2021). There is a decreasing trend of average annual rainfall from the southeast (709 mm) to northwest (505 mm) in this area (Bureau of Meteorology, 2021), and the winter and spring months (May to

August) are the wettest (Fig. 2a). Similar to rainfall, high river flows occur in the winter and spring (Department of Environment, Land, Water and Planning, 2021; Fig. 2b).

200 Groundwater in the upper Wimmera recharges on the margins of catchment and flows northwards, with flow paths converging on the river (Radke and Howard, 2007; Fig. 1). River water geochemistry demonstrates that groundwater discharge locally occurs in the upper and middle reaches of the upper Wimmera River driven by relatively steep topography and high hydraulic gradients, whereas the lower reaches have lower groundwater inflows due to subdued topography

205 (Zhou and Cartwright, 2021). From the downstream trends in Cl and ^{222}Rn and the high ^3H activities, the study concluded that near-river stores were important contributors to streamflow.

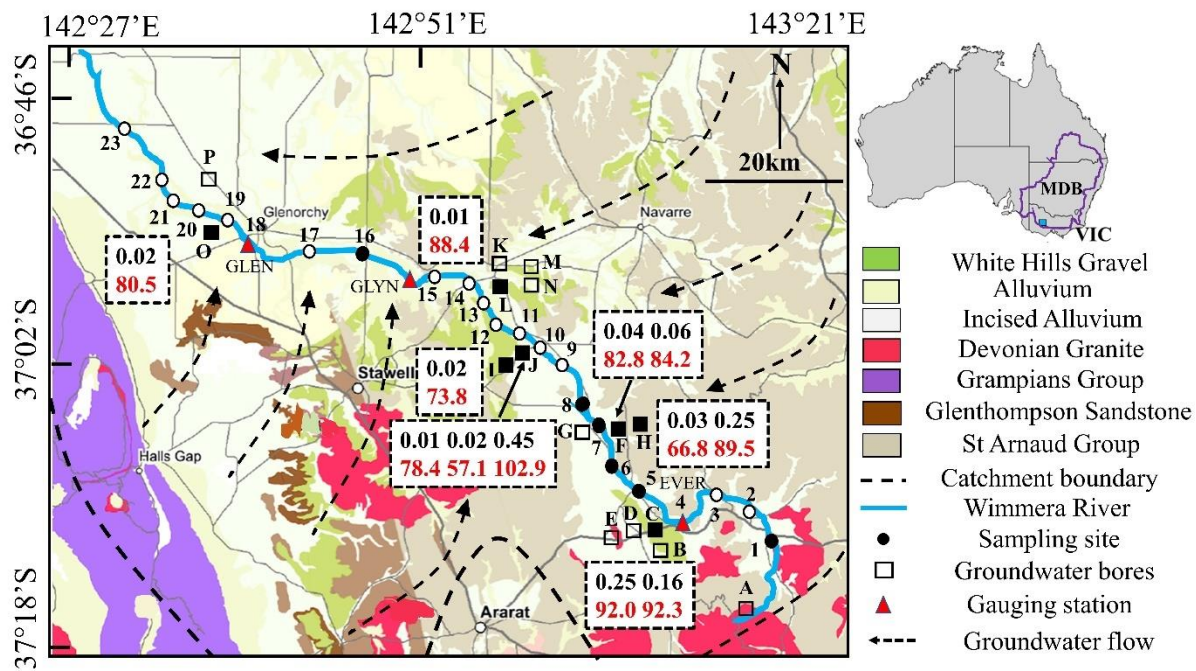


Figure 1. Summary geological and hydrogeological map of the upper Wimmera River. Stream water sampling sites and groundwater bores are indicated by numbers and letters, respectively. The sites that have radioactive isotope data are shown in solid symbols. Gauging stations with site number are Eversley (EVER; 415207), Glynwylln (GLYN; 415206), and Glenorchy (GLEN; 415201). Background geological map from Department of Jobs, Precincts and Regions (2021) (© State Government of Victoria 1996-2021); other information from Robinson et al. (2006), Department of Environment, Land, Water and Planning (2021), and Zhou and Cartwright (2021). Boxes show ^{14}C (red) and ^3H activities (black) of groundwater (data from Table 2).

210

215

3 Materials and methods

3.1 Sampling

Stream water samples (four rounds in total) were collected between March and November 2019 in the upper Wimmera River (Fig. 1, Table S1). River samples were collected from the centre of the river ~1m below the surface, or just above the bed where the river was shallower, using an open sample collector. 15 samples of pool water were taken using an open sample collector in March 2019 when the river consisted of disconnected pools with small flowing sections. These samples were taken from isolated pools, not the flowing reaches. 23 samples were collected in July, September, and November. July and September were high and moderate flow periods, respectively, whereas November was a low flow period just before the river ceased to flow again. 13 samples of near-river water (NRW) were taken from the top of the saturated zone within 3m of the river. Due to Covid-19, the NRW samples were collected in April 2021 but the conditions were similar to March 2019. Groundwater samples were taken in November 2019 from groundwater-monitoring bores installed on the river bank and floodplain using an impeller pump (Fig. 1, Table S2). In excess of three volumes of water were extracted prior to sampling or the bores were pumped dry and allowed to recover.

There are three gauging stations along the river that continuously measure streamflow including Eversley, Glynwylln and Glenorchy on Fig. 1. (Department of Environment, Land, Water and Planning, 2021). Linear interpolation and extrapolation were used to estimate intermediate streamflow data. Runoff coefficients (the percentage of rainfall that is exported annually by the stream) were estimated using 1993 to 2021 streamflow records from the three gauges (Department of Environment, Land, Water and Planning, 2021). Because insufficient rainfall data exist to calculate area-weighted rainfall amounts upstream of each gauge, runoff coefficients were

calculated using the higher and lower annual rainfall from the catchment (505 and 709 mm; Bureau
240 of Meteorology, 2021), which results in a 15% uncertainty at each site. Here, the runoff coefficient
is treated as a catchment attribute reflecting average flows rather than the flow at any one time.

3.2 Analytical techniques

^3H activities were analysed at the Institute of Geological and Nuclear Sciences (GNS) in New
Zealand by liquid scintillation in Quantulus ultra-low-level counters following vacuum distillation
245 and electrolytic enrichment (Morgenstern and Taylor, 2009). ^3H activities are expressed in Tritium
Units (TU) and the detection limit is 0.02 TU with relative uncertainties (1σ) of approximately
 $\pm 2\%$. ^{14}C activities of groundwater were measured at GNS in New Zealand by accelerator mass
spectrometer (AMS). CO_2 in groundwater was extracted using orthophosphoric acid and then
converted into a graphite target after being purified under vacuum. ^{14}C activities are expressed as
250 percent modern carbon (pMC), where the ^{14}C activity of modern carbon is 95% of the ^{14}C activity
of the NBS oxalic acid standard in 1950 (Stewart et al., 2004).

EC values were measured in the field using a calibrated TPS meter and electrode. A ThermoFischer
quadrupole ICP-OES at Monash University was used to measure cation concentrations on samples
that were filtered through $0.45\mu\text{m}$ cellulose nitrate filters and acidified to $\text{pH} < 2$. Anion
255 concentrations were measured using a Thermo Fischer ion chromatograph at Monash University
on filtered, unacidified samples. Based on replicate analyses, the precision (σ) of major ion
concentrations ranges from 2 to 5 %. Stable isotope ratios were analysed at Monash University
using a ThermoFinnigan Delta Plus Advantage mass spectrometer. $\delta^{18}\text{O}$ values of water were
measured in a ThermoFinnigan Gas Bench by equilibration with He-CO_2 at 32°C for 24-48 hours.
260 $\delta^2\text{H}$ values of water were measured following reduction by Cr at 850°C in a Finnigan MAT
H/Device. $\delta^{18}\text{O}$ and $\delta^2\text{H}$ values were normalised following Coplen (1988) and are expressed

relative to V-SMOW. Precision (σ) based on replicate analyses is 0.15‰ for $\delta^{18}\text{O}$ and 1‰ for $\delta^2\text{H}$. The geochemistry data is in the Supplement.

3.3 Mean transit times

265 MTTs were calculated from single measurements of ^3H using lumped parameter model (LPMs) implemented in the TracerLPM Excel workbook (Jurgens et al., 2012). The ^3H activity of stream water at time t ($C_0(t)$) is related to the input of ^3H (C_i) in rainfall overtime via the convolution integral:

$$C_0(t) = \int_0^\infty C_i(t-\tau)g(\tau)e^{-\lambda\tau}d\tau \quad (1)$$

270 In equation (1), τ is the transit time, $t-\tau$ is the time that the water was recharged, λ is the decay constant of ^3H (0.0563 yr^{-1}), and $g(\tau)$ is a function that describes the distribution of flow paths and transit times in the flow system. The ^3H input was from the annual weighted average ^3H activities of rainfall in Melbourne (Tadros et al., 2014). Modern rainfall in central Victoria is predicted to have average annual ^3H activities in the range of 2.8 to 3.2 TU (Tadros et al., 2014); measured ^3H activities of rainfall in Victoria are within the range of the Tadros et al. (2014) estimates (Cartwright and Morgenstern, 2015; Cartwright et al., 2018; Howcroft et al., 2018; Barua et al., 2022).

Several LPMs were used. The dispersion model (DM) stems from the one-dimensional advection-dispersion transport equation and can be applied to a variety of aquifer configurations (Zuber and Maloszewski, 2001; McGuire and McDonnell, 2006; Jurgens et al., 2012). The dispersion parameter (DP), which is the ratio of dispersion to advection, needs to be defined when using this model. For kilometre-scale flow systems such as in this study, DP values of 0.05 to 0.5 are suitable (Maloszewski, 2000; Zuber and Maloszewski, 2001). The Exponential Mixing Model (EMM) represents a flow system with a simple exponential distribution of flow paths. The Exponential

285 Piston Flow Model (EPM) describes flow systems that have both exponential and piston-flow sections. It is an appropriate model for unconfined aquifers with vertical recharge through the unsaturated zone and exponential flow in the saturated zone (Maloszewski, 2000; Morgenstern et al., 2010; Howcroft et al., 2019). The EPM ratio is the relative contribution of piston to exponential flow and values of 0.33 and 1, which represent 75% and 50% exponential flow were used. MTTs
290 were estimated by matching the ^3H activities predicted by the LPMs to the measured ^3H activities. While the estimates of MTTs are based on single samples, these LPMs have successfully reproduced long-term time-series ^3H activities of stream water in other regions (Maloszewski and Zuber, 1982; Blavoux et al., 2013; Morgenstern et al., 2015).

The same lumped parameter models were used to calculate the predicted ^{14}C vs. ^3H trends and
295 MTTs of groundwater. For ^{14}C , the input function is based on activities of atmospheric CO_2 (McCormac et al., 2004; Reimer et al., 2013). Calcite in these aquifers is mainly cements and veins, which are likely to have variable $\delta^{13}\text{C}$ values (Cartwright and Morgenstern, 2012; Cartwright et al., 2013; Clark, 2015; Meredith et al., 2016), precluding the use of isotope mass-balance to estimate the degree of closed-system calcite dissolution. However, the aquifers are siliceous and
300 close-system calcite dissolution is expected to be minor (< 10%) (Clark, 2015).

3.4 Volumes of groundwater

The groundwater volumes (V in m^3) that contribute to the river are related to MTT and streamflow (Q in $\text{m}^3 \text{yr}^{-1}$) via:


$$V = Q \times \text{MTT} \tag{2}$$

305 (Maloszewski and Zuber, 1982, 1992; Morgenstern et al., 2010).

4 Results

4.1 Streamflow

The variations of streamflow at the three gauging stations (Fig. 1) along the upper Wimmera River in 2019 are shown in Fig. 2b. Although streamflow of up to $50 \text{ m}^3 \text{ day}^{-1}$ was recorded at Glynwylln during the summer months (January to March), the river largely consisted of disconnected pools with only minor flowing sections. Based on the streamflow at this and the Eversley and Glenorchy gauges (Fig. 2b), the river is estimated to have commenced flowing continuously in early to mid-April. There was a significant increase in streamflow from June following autumn rains (Fig.2a) and it reached a peak in August (up to $6.1 \times 10^5 \text{ m}^3 \text{ day}^{-1}$ at Glenorchy). Streamflow then decreased over spring and summer and the river ceased to flow continuously in late November. Runoff coefficients have ranges of 4.0 to 5.4% at Eversley, 2.3 to 3.2% at Glynwylln, and 2.2 to 3.0% at Glenorchy.

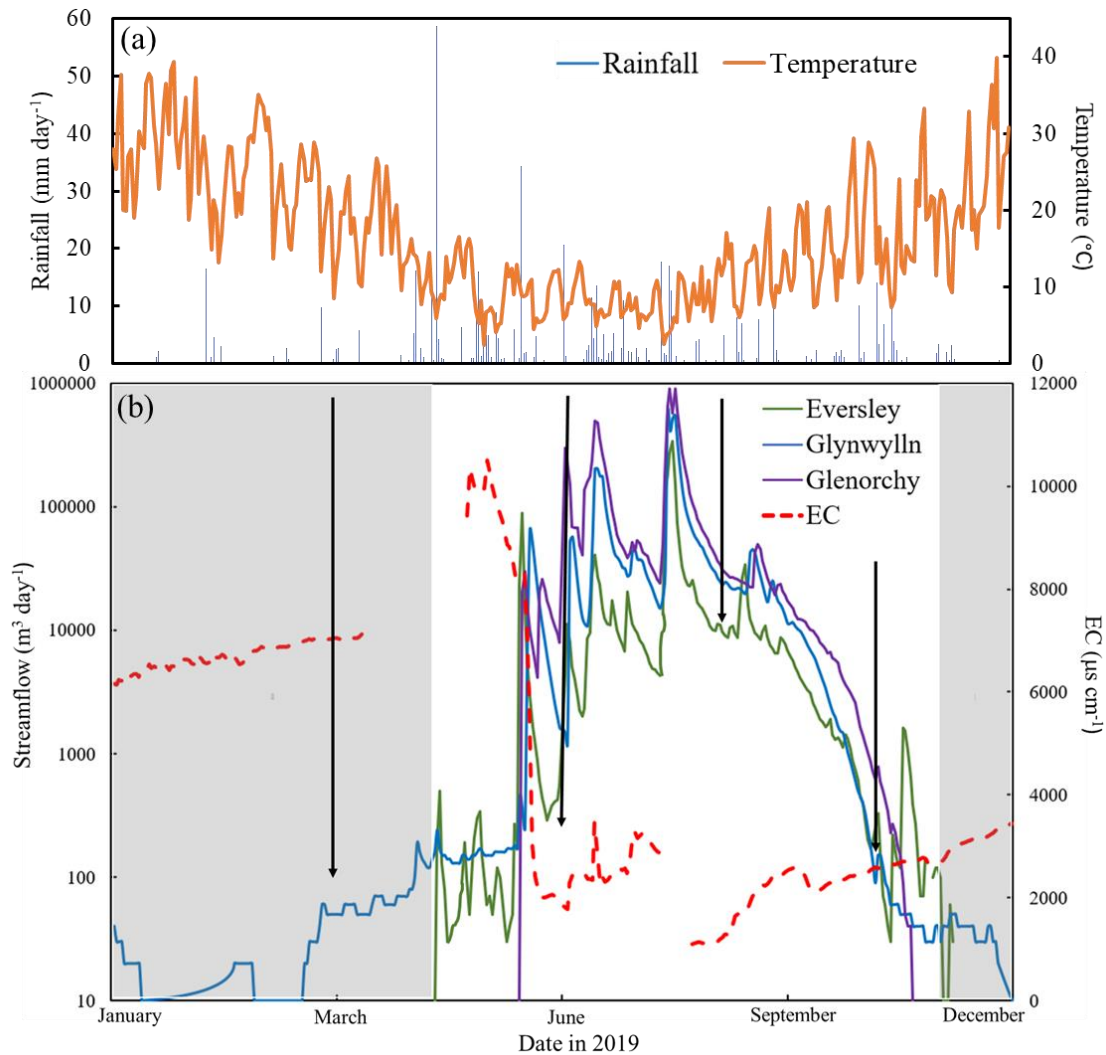

320 Figure 2. (a) Variations in daily rainfall and temperature and (b) EC at Glynwyll (missing data are caused
 325 by measurement errors of equipment) and streamflow at Eversley, Glynwyll, and Glenorchy (Fig.1) in the
 upper Wimmera River in 2019. Variations in EC at Glynwyll (missing data are caused by measurement
 errors of equipment) and streamflow at Eversley, Glynwyll, and Glenorchy (Fig.1) in the upper Wimmera
 River in 2019. Sampling times are indicated by arrowed lines. Shaded areas represent the zero-flow periods.
 Data from Department of Environment, Land, Water and Planning (2021) and Bureau of Meteorology
 (2021).

4.2 EC and major ion geochemistry

EC values in 2019 at the Glynwyll gauging station increased during the summer months, peaked
 at 10,500 $\mu\text{S cm}^{-1}$ in late May, and decreased to 1780 $\mu\text{S cm}^{-1}$ in June (Fig. 2b). Overall, EC values
 330 were broadly inversely correlated with streamflow. TDS concentrations of stream water in the
 upper Wimmera River varied from 360 to 2490 mg L^{-1} (Table S1) and were also higher during the

low flow period in November 2019. Na is the most abundant cation in the stream water (74-83% on a molar basis) with lower abundances of Ca (3-7%), Mg (12-19%), and K (1-2%). Cl is the most common anion (82-99% on a molar basis) in the stream water (Fig. 3). During the zero-flow period in March 2019, the pool water was much more saline with EC values of 2430-15,330 $\mu\text{S cm}^{-1}$ and TDS concentrations (up to 11,420 mg L^{-1}) (Table S1). Near-river water (NRW) from the zero-flow period in 2021 had EC values of 1035 to 6080 $\mu\text{S cm}^{-1}$. TDS concentrations of regional groundwater from monitoring bores in this region ranged from 550 to 13,720 mg L^{-1} (mean = 4900 \pm 3770 mg L^{-1} ; Table S2) and there is no correlation between TDS and depth. Na and Cl are again the dominant cations and anions in the groundwater (Fig. 3, Table S2). Overall, the major ion geochemistry of the groundwater, stream water from the different flow conditions, pool water and, NRW are similar (Fig. 3).


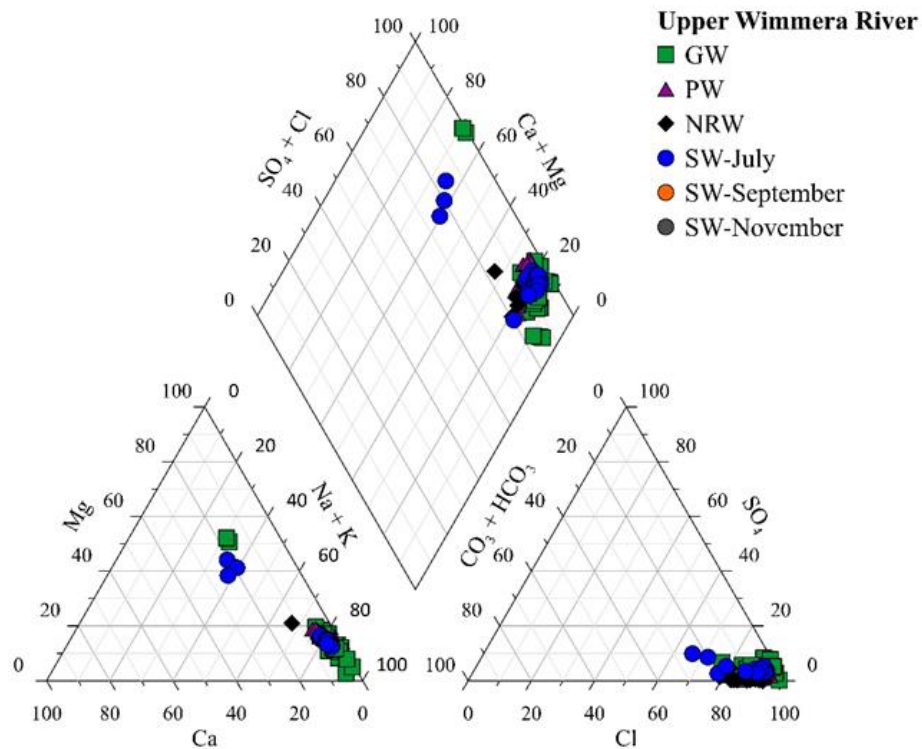


Figure 3. Trilinear diagram summarising molar major ion ratios of the different water sources in the upper Wimmera River (data from Table S1 and S2). GW=groundwater; PW= Pool Water; NRW=Near River Water; SW=Stream Water.

4.3 Stable isotopes

The $\delta^{18}\text{O}$ and $\delta^2\text{H}$ values of the stream water differed between the sampling rounds (Tables S1 and S2, Fig. 4). The $\delta^2\text{H}$ and $\delta^{18}\text{O}$ values of the pool water were -24 ‰ to +37 ‰ and -3.3 ‰ to +10.3 ‰, respectively and define an array to the right of Melbourne meteoric water line with a slope of 4.2 which implies that evaporation has occurred (Gonfiantini, 1986; Clark and Fritz, 1997). The pool water array intercepts the Melbourne meteoric water line at lower $\delta^{18}\text{O}$ and $\delta^2\text{H}$ values (-5.6 ‰ and -31 ‰) than those of average rainfall in Melbourne ($\delta^{18}\text{O} = -4.98$ ‰, $\delta^2\text{H} = -28.4$ ‰; Hollins et al., 2018), probably due to the Wimmera region being further inland. $\delta^{18}\text{O}$ and $\delta^2\text{H}$ values of river water in July and September cluster close to the Melbourne meteoric water line. $\delta^{18}\text{O}$ and $\delta^2\text{H}$ values in July 2019 were -3.6 to -7.2 ‰ (mean = -6.1 ± 0.7 ‰) and -29 to -43 ‰ (mean = -35 ± 3.8 ‰), respectively, whereas in September 2019, $\delta^{18}\text{O}$ and $\delta^2\text{H}$ values were -3.9 to -6.1 ‰ (mean = -5.3 ± 0.4 ‰) and -29 to -32 ‰ (mean = -31 ± 0.9 ‰), respectively (Table S1). $\delta^{18}\text{O}$ and $\delta^2\text{H}$ values during the low streamflow period in November 2019 ranged from -2.7 to -4.8 ‰ and -20 to -26 ‰, respectively, while those of the NRW were -0.5 to -3.1 ‰ and -8 to -29 ‰, respectively. Both the November river samples and the near-river waters define similar evaporative trends to the pool waters. Groundwater has $\delta^{18}\text{O}$ and $\delta^2\text{H}$ values of -4.4 to -6.7 ‰ (mean = -5.4 ± 0.6 ‰) and -28 to -38 ‰ (mean = -31 ± 2.7 ‰) respectively that overlap with those of the stream water in July and September (Fig. 4; Table S1).

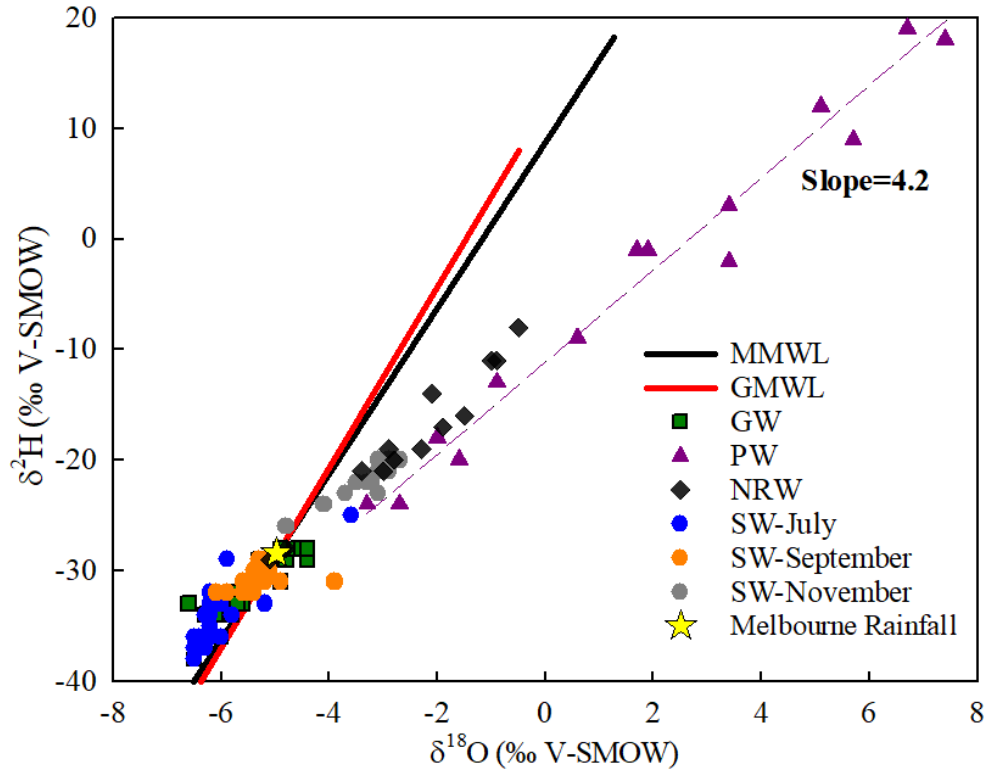

365

Figure 4. Stable isotope ratios of water samples in the upper Wimmera River. GMWL=Global Meteoric Water Line ($\delta^2\text{H} = 8.2 \times \delta^{18}\text{O} + 11.3 \text{‰}$, as defined by Rozanski et al., 1993); MMWL= Melbourne Meteoric Water Line ($\delta^2\text{H} = 7.4 \times \delta^{18}\text{O} + 8.6 \text{‰}$, as defined by Hughes and Crawford, 2012). GW=regional groundwater; PW=pool water; NRW=Near-river water; SW=stream water. The dashed line is the best fit for the pool water data. Data from Table S1 and S2.

370

4.4 ^3H and ^{14}C activities

4.4.1 Regional groundwater

^3H activities of regional groundwater were < 0.02 to 0.45 TU (Table 2), which are significantly lower than the predicted average ^3H activity of annual modern rainfall in this area (3.0 ± 0.2 TU:


375

Tadros et al., 2014). The higher ^3H activities were from shallow groundwater (< 18 m depth) in the upper and middle catchment, whereas deep groundwater (> 30 m depth) had ^3H activities < 0.02 TU. Groundwater close to the river does not generally have high ^3H activities (Fig. 1). ^{14}C activities of regional groundwater ranged between 57.1 and 103 pMC (Table 2). The highest ^{14}C activities (up to 103 pMC) are again from the shallow groundwater in the upper and middle catchment. The

380

trend of ^3H vs. ^{14}C activities (Fig. 5) are similar to those predicted for an aquifer system that does

not show mixing between shallow younger groundwater and deeper older groundwater (i.e., where the activities of the two radioisotopes are controlled by their input functions and decay rates).

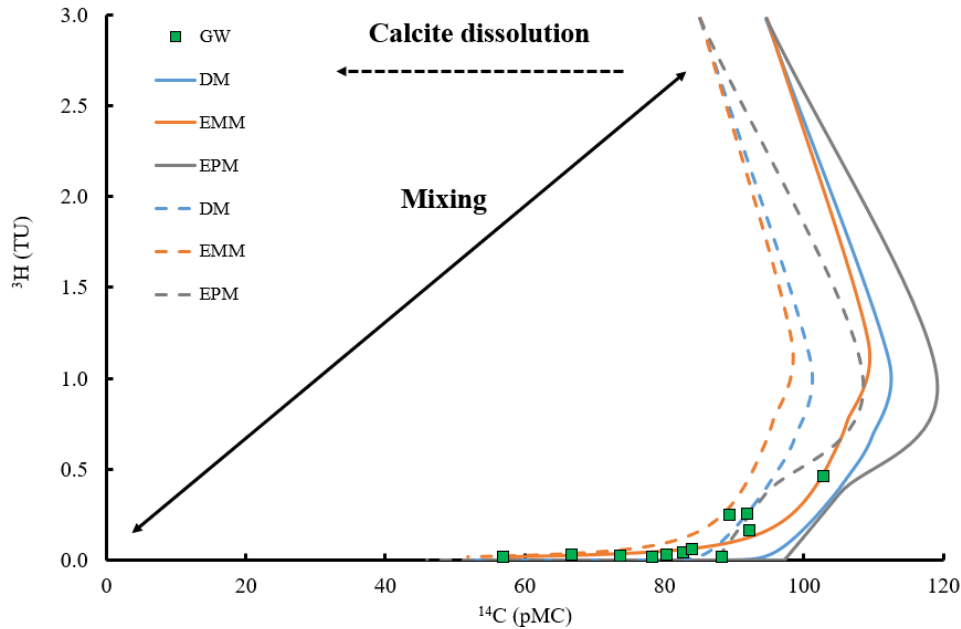

385 Figure 5. ^3H activities vs. ^{14}C activities of groundwater from the upper Wimmera River. Curved lines are the predicted covariance in the radioisotopes predicted by the Exponential Mixing, Exponential-Piston (EPM ratio = 1), and Dispersion (DP=0.5) lumped parameter models. Solid arrowed lines show schematically the effects of mixing between old regional groundwater (low ^{14}C and ^3H free) and modern or recently recharged water (high ^{14}C and ^3H). Calcite dissolution lowers the predicted ^{14}C activities (dashed lines are used to display 10% calcite dissolution).


390

4.4.2 River water

The ^3H activities of pool water varied from 0.64 to 3.29 TU (Fig. 6; Table 1). The highest ^3H activity (3.29 TU), which is higher than that of average annual rainfall, was from an area of subdued topography in the lower reaches. In contrast, ^3H activities were lowest (down to 0.64 TU)


395

where the river is located near steeper hillslopes and flows through coarse sediments. There is a strong positive correlation ($R^2 = 0.94$) between ^3H activities of pool water and $\delta^2\text{H}$ values (Fig. 6a). Pool waters have a wide range of ^3H activities with variable TDS concentrations, ranging from 2237 to 4639 mg L^{-1} . The stream water was less saline with a range of TDS 433-2038 mg L^{-1} (Fig. 6b).

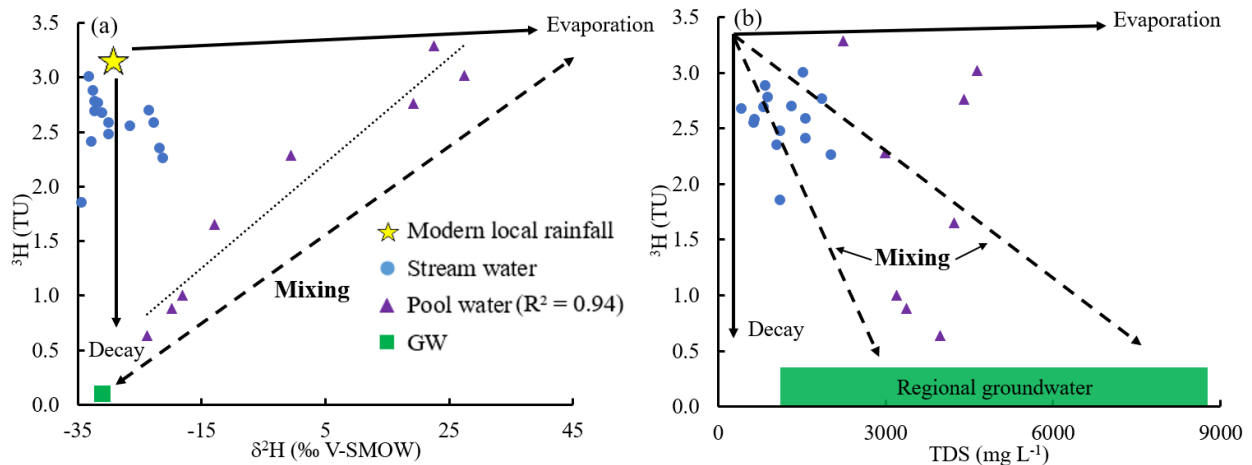

400 Figure 6. (a) Variation of ^3H activities and $\delta^2\text{H}$ values and (b) ^3H activities and TDS of stream water, pool water and groundwater (GW) in the upper Wimmera catchment. arrows show trends expected from evaporation and mixing. Data from Table S1 and S2.

405 The ^3H activities of stream water during the periods when the river was flowing were generally lower than those of rainfall and had a range of 1.85 to 3.00 TU in July, 2.48 to 2.88 TU in September, and 2.26 to 2.69 TU in November (Table 1). During the high streamflow in July, the ^3H activities of river water were more variable than in September and November (Figs. 6, 7). Both lowest and highest values of ^3H activities were recorded in the high flow period (Fig. 7).

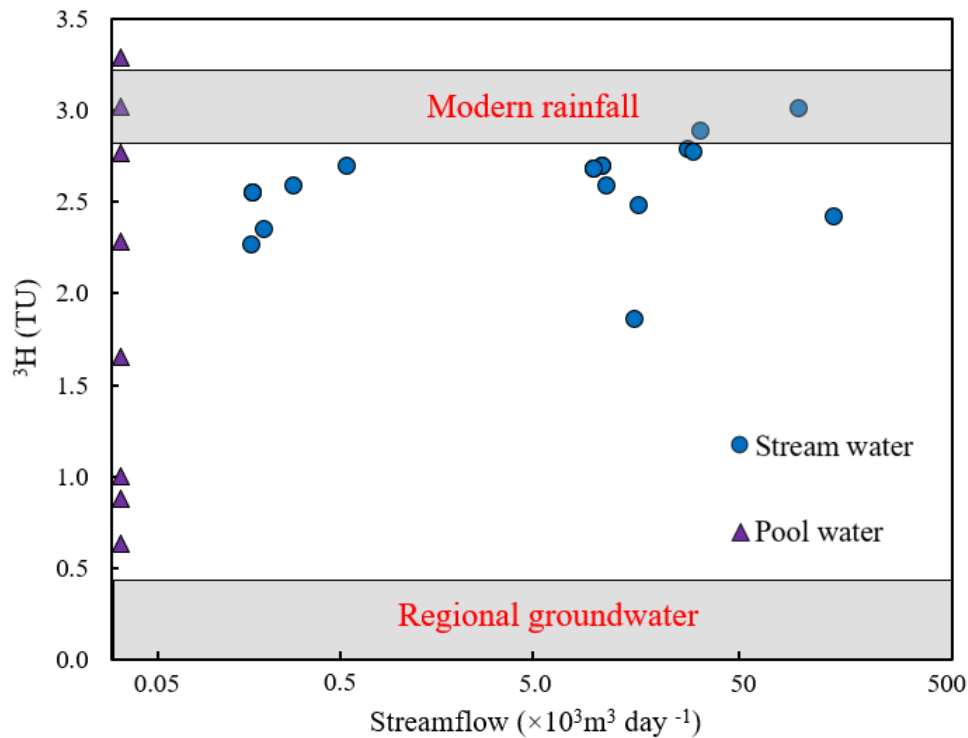

410

Figure 7. Variation of ^3H activities and streamflow. Pool water represents a time of zero streamflow. Shaded areas show ^3H range of modern rainfall and regional groundwater. Data from Table 1.

5 Discussion

415 The combined streamflow, major ion geochemistry, and stable and radioactive isotopes allow the water sources contributing to streamflow and MTTs at different flow conditions to be understood.

5.1 Identification of water sources

Pool waters in summer months contain the last remnants of river water from when the river ceases to flow, rainfall and/or groundwater discharging from the underlying aquifers (Cartwright and
 420 Morgenstern, 2016; Lamontagne et al., 2021). In the upper Wimmera River, most of the pools are perennial and have a wider range of ^3H activities than stream water and groundwater (Fig. 7). The variation in ^3H activities with $\delta^2\text{H}$ (Fig. 6a) and TDS concentrations (Fig. 6b) most likely reflects the mixing between older regional groundwater (saline with lower ^3H activities) and younger surface water with lower salinity and higher ^3H activities. The variations between $\delta^{18}\text{O}$ and $\delta^2\text{H}$

425 values (Fig. 4) and ^3H activities and $\delta^2\text{H}$ values (Fig. 6a) imply that the surface water dominated pools have undergone higher degrees of evaporation than those with greater groundwater inflows. Conceivably, the pools that are better connected to the groundwater are throughflow systems, which would limit evaporation whereas other pools may trap surface water which then evaporates. Some of the pool water has higher ^3H activities (up to 3.29 TU) than were recorded at the low

430 flows that immediately precede the formation of the pools (Fig. 7). Summer rainfall in southeast Australia, however, generally has ^3H activities close to the annual average (Tadros et al., 2014), and the input of summer rainfall cannot readily explain the locally high ^3H activities. Late winter and spring rainfall has higher ^3H activities than those of average rainfall due to stratosphere-to-troposphere moisture exchange (Tadros et al., 2014). The upper Wimmera River is locally losing

435 at high streamflows, such as commonly occur in late winter and early spring (Fig. 2) allowing bank storage to occur. Subsequent drainage of bank water back to the river potentially explains the local high ^3H activities in the pools. Alternatively, these high ^3H activities may reflect the input of young water from perched aquifers in the riparian zone as documented in intermittent streams elsewhere in western Victoria (Barua et al., 2022).

440 The ^3H activities of stream water when the upper Wimmera River is flowing is much higher than that of groundwater (Figs. 6, 7), implying that the river is largely fed by young water. This is the case even during the low flow periods, which is when rivers are most likely to be sustained by long-lived water stores (e.g., Gusyev et al., 2016; Cartwright et al., 2020). The much lower TDS concentrations of the river water compared with the groundwater (Fig. 6b) and irregular

445 downstream trends in major ion concentrations (Table S1) are also consistent with the input of water from mainly near-river sources. The one lower ^3H activity (1.85 TU) during high flow conditions in July 2019 (Table 1, Fig. 7) may reflect very local input of regional groundwater or

older near-river waters being flushed into the stream during the early stages of rainfall by hydraulic loading. This has been documented in other Australian catchments (e.g., the Tambo River: Unland
450 et al., 2015) and is a common feature in many river systems (sometimes referred to as the old water paradox: Kirchner, 2003; Cartwright and Morgenstern, 2018). Unlike in some catchments (Tsuji-mura et al., 2007; Birks et al., 2019; Jung et al., 2019), the major ion and stable isotope geochemistry of regional groundwater and near-river water are similar (Figs. 3 and 4; Tables S1 and S2). The geochemistry of the stream also does not vary with flow. This precludes using these
455 tracers to distinguish water sources or as a proxy for ^3H activities (e.g., Peters et al., 2014; Cartwright and Morgenstern, 2015; Beyer et al., 2016; Cartwright et al., 2020). The large difference in ^3H activities between regional groundwater and rainfall, however, explicitly allows the input of older groundwater to be assessed.

5.2 Mean transit times of river water


460 The estimates of mean transit time assume that there is a single flow system within the catchment. The pool waters probably represent discrete mixing between older groundwater and younger water (Fig. 6). It is not possible to calculate the MTTs of these waters using a single LPM and there is insufficient data to use binary LPM calculations. In common with other studies of MTTs, it is assumed that when the river is flowing it is sustained by a single store of water with MTTs that
465 vary as the catchment dries down and wets up. As discussed above, most of the water sustaining the river when it is flowing is envisaged to be derived from near-river stores with little input from regional groundwater.

The MTTs in the upper Wimmera River when it was flowing ranged from < 1 to 17 years and are mostly less than 7 years (Table 1). The different LPMs yielded slightly different MTTs and the
470 range of MTTs increases with decreasing ^3H activities. The highest estimates of MTTs are from

the EMM and the lowest are from the DM with D_p 0.05. During the high flow period in July 2019, MTTs were generally higher (<1 to 16.8 years). By contrast, the range of MTTs at moderate and low flow conditions was 1.6 to 7.8 years (Table 1).

The MTTs are subject to several uncertainties. The uncertainty arising from the choice of LPMs is greater at ^3H activities <2.5 TU with an average uncertainty of 22% (Table 1). The influence of uncertainties in the ^3H activities of modern rainfall (± 0.2 TU: Tadros et al., 2014) may be demonstrated using the EPM with an EPM ratio of 0.33 (the effects are similar in other models) (Fig. 8a). Varying the ^3H activities between 2.8 TU and 3.2 TU translates into uncertainties of ± 6 to 7% (Fig. 8a). Applying a similar 10% uncertainty to the entire ^3H input function produces uncertainties of 9 to 21%, with the largest difference when ^3H activities were greater than 1 TU (Fig. 8b). Uncertainties arising from the precision of the ^3H analyses are <0.8 years. Mixing of multiple water sources with different MTTs (aggregation) may result in actual MTTs being lower than calculated MTTs (Suckow, 2014; Kirchner, 2016a; Stewart et al., 2017). Aggregation has the most impact when there is binary mixing between water with very different MTTs. Mixing between multiple water stores with a range of MTTs has less impact on the MTTs calculated using ^3H as that scenario is similar to what is modelled using the LPMs (Cartwright and Morgenstern, 2016). In the case of the upper Wimmera River, the smaller range of MTTs implies that aggregation may not be as significant as in other catchments in southeast Australia where the range of MTTs in the catchment waters is much larger. Considering the uncertainties from the different LPMs, the analytical uncertainty, and the tritium activities of modern and historical rainfall, the range of MTTs for a ^3H activity of 1.5 TU was 15.2 to 25.5 years, which is a relative uncertainty of -24 to +27%. For water with 0.5 TU, the MTTs ranged 92.6 to 108 years, which is an uncertainty

of -9 % to +15%. Although these are substantial, it does not alter the conclusion that the upper Wimmera River is fed by relatively young water at all stages of flow.

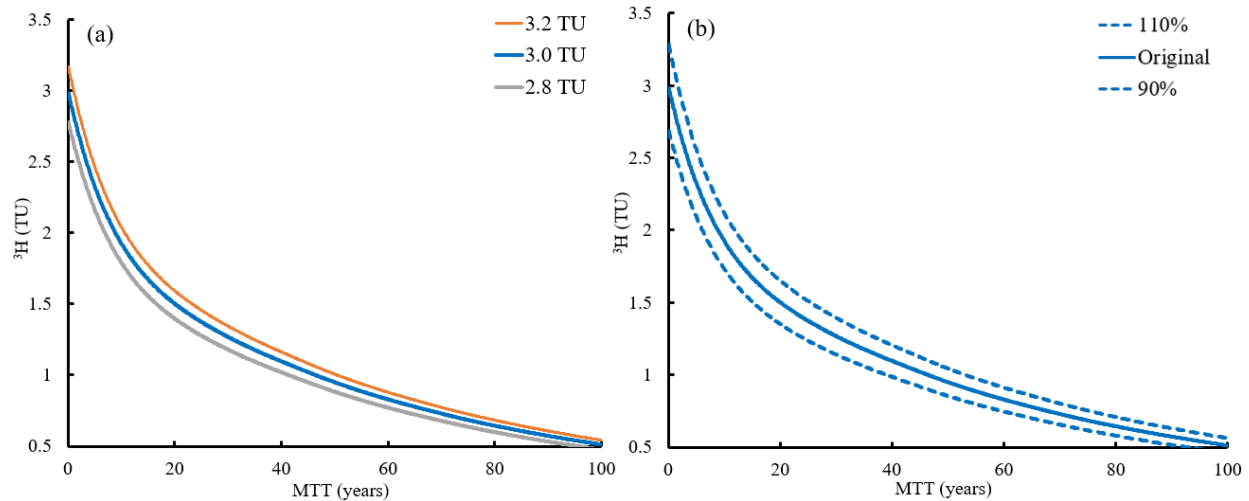

495

Figure 8. (a) Impacts of varying the ^3H activity of modern rainfall from 2.8 to 3.2 TU on MTTs calculated using the Exponential-Piston Flow Model (EPM ratio = 0.33). (b) Impacts of varying ^3H activity of rainfall between 90% and 110% of its assumed values on mean transit time calculated using the Exponential-Piston Flow Model (EPM ratio = 0.33).

500

The average annual rainfall ^3H activities were used in the MTTs calculations. However, if there is strong seasonal recharge due to summer rainfall being lost by evapotranspiration, the ^3H activities of the recharging water may be different to the average annual ^3H activity (Morgenstern et al., 2010; Blavoux et al., 2013). Monthly variations in rainfall ^3H activities are less than 1 TU and the ^3H activities of summer rainfall are close to annual rainfall values (e.g., Tadros et al., 2014). Considering the general uncertainty in the ^3H input function, uncertainties that originate from adopting the average annual ^3H activity are minor.

505

The volume of water store that sustained the streamflow calculated from the MTTs (Eq. (2)) ranged from $3.2 \times 10^5 \text{ m}^3$ to $2.6 \times 10^8 \text{ m}^3$ (Fig. 9b). The estimated volume of water stored in the riparian zone of the river is $3.1 \times 10^5 \text{ m}^3$, which was calculated from the estimated river length (120,000 m), the width and depth of the riparian zone (6.5 m and 2 m, respectively), and an assumed porosity of 0.2. This value is three orders of magnitude smaller than that of the calculated volume of water

510

needed to generate streamflow during the high flow period, implying that the streamflow was generated from water derived from the broad landscape. By contrast, the volume of water in the riparian zone is similar to the volume needed to generate streamflow at low flow conditions, which indicates that it may be derived from near-river stores.

5.3 Groundwater transit times


Groundwater MTTs were calculated using the EPM model (EPM ratio = 0.33; Table 2). This model is applicable to groundwater flow systems where the bores sample deeper groundwater flow paths but not the short near-surface flow paths (Maloszewski and Zuber, 1982). MTTs of groundwater with ^3H activities >0.25 TU were calculated using ^3H . For groundwater with lower ^3H activities, the ^{14}C activities were used. As discussed above, the proportion of DIC from closed system calcite dissolution in these siliceous aquifers is likely to be minor and MTTs were calculated assuming up to 10% addition of ^{14}C -free carbon. The estimated MTTs of groundwater were between 120 and 5690 years (Table 2). The relative uncertainties on these estimates are similar to those discussed above. Groundwater within a few 10s to 100s meters of the river, such as at locality I and J in Fig. 1, had MTTs of up to 5690 years and the ^{14}C and ^3H activities show little evidence of mixing (Fig. 5), implying that there is limited recharge of regional groundwater by stream water even when the river is losing. The large contrast between the MTTs of groundwater and river water also implies that the regional groundwater flow system is distinct from local near-river flow system.

5.4 Comparison with perennial streams

In southeast Australia, the ^3H activities at low flows in the upper Wimmera River and other intermittent streams are higher than in perennial streams of comparable size from catchment with similar geology and landuse (Fig. 9). Perennial streams elsewhere in Australia and New Zealand also locally have low ^3H activities at low flows (Stewart et al., 2010; Duvert et al., 2016). This

implies that intermittent streams at low streamflows are sustained by much younger water than perennial streams. This is concluded to be caused by a much weaker connection between intermittent streams and deeper older regional groundwater than is the case for perennial streams. Because evapotranspiration rates, local vegetation types and rainfall influence both how much of rainfall is exported via the stream and the MTTs. ^3H activities in perennial streams from southeast Australia correlate with the runoff coefficient (Fig. 9a). There is a broad correlation ($R^2=0.58$) between ^3H and runoff coefficients from multiple perennial catchments in southeast Australia (including the Ovens, Latrobe, Gellibrand, and Yarra catchments: Fig. 9a) and the correlations in individual catchment are higher (R^2 of 0.72 to 0.94: Cartwright et al., 2020). By contrast, the ^3H activities in the Wimmera and other intermittent streams are much higher at comparable runoff coefficients and are poorly correlated (Fig. 9a). This may be due to the alternating gaining and losing conditions in intermittent streams.

The volumes of the stores of water in the catchment that contributes to streamflow in the upper Wimmera River ($3.2 \times 10^5 \text{ m}^3$ to $2.6 \times 10^8 \text{ m}^3$: Fig. 9b) are 1-2 orders of magnitude smaller at similar streamflows than those in perennial streams from southeast Australia (up to $8.3 \times 10^9 \text{ m}^3$ in the Ovens catchment) (Fig. 9b) but are similar to other intermittent streams (Deep Creek and Gatum catchments). These differences are also due to the intermittent streams being less well-connected to the deeper groundwater, which has larger volumes.

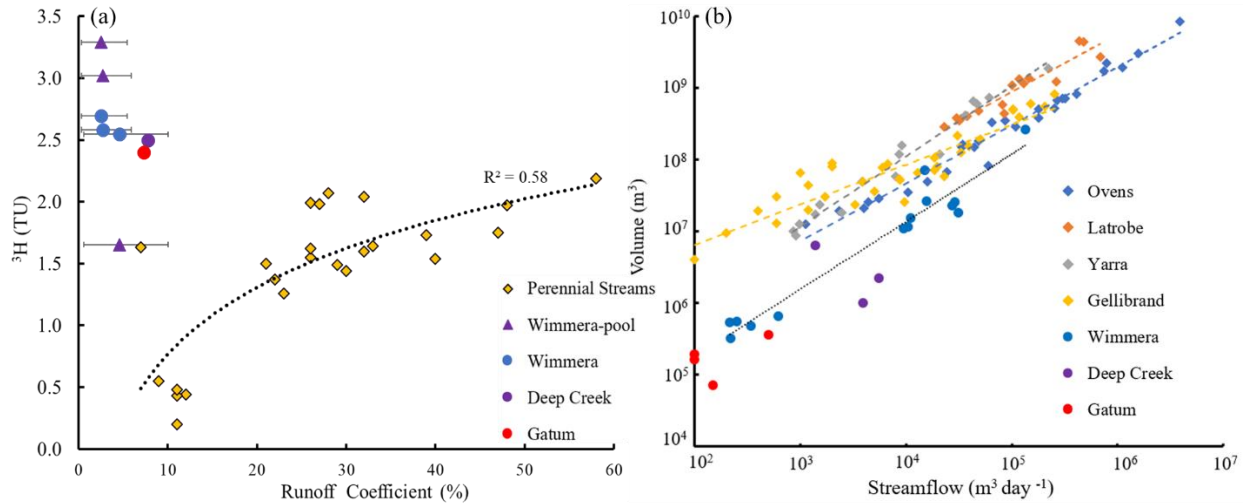

555 Figure 9. (a) Comparison of ^3H activities and runoff coefficients at low and zero flow conditions and (b)
 560 volumes of water sustaining streamflows between the upper Wimmera River and other intermittent and
 perennial streams in southeast Australia. Error bars represent the uncertainty of annual rainfall in the upper
 Wimmera Catchment. Perennial streams are the Ovens, Latrobe, Yarra, and Gellibrand (data from
 Cartwright et al., 2020); intermittent streams are Deep Creek and Gatum (data from Cartwright and
 Morgenstern, 2016 and Barua et al., 2022).

6 Conclusions

Intermittent streams commonly occur in semi-arid regions with scarce surface water resources and they are vital for sustaining ecosystems. However, our understanding of the functioning of
 565 intermittent catchments remains incomplete (e.g., Datry et al., 2014; Shanafield et al., 2020, 2021),
 which hinders our ability to predict their response to future stresses. The upper Wimmera River
 and other intermittent streams in southeast Australia are connected to younger stores of near-river
 water with limited connections to deeper regional groundwater. Because those stores are smaller,
 intermittent rivers will be more vulnerable to short-term variability of rainfall than comparable
 570 perennial rivers. This is evident in the Wimmera River where flow has decreased and intermittency
 has increased following the onset of the Millennium drought in the mid-1990s. In comparison,
 most of the perennial rivers summarised in Cartwright et al. (2021) currently have similar flow
 regimes as prior to the Millennium drought. The fact that intermittent streams receive inputs from

near-river water stores also has implications for their protection and management. They are probably less vulnerable to contamination via inputs of regional groundwater; however, protection of the near-river environment is crucial to maintain river health. The pools at zero flow conditions in the Wimmera and other intermittent streams have some groundwater inputs (Lamontagne et al., 2014, 2021; Cartwright and Morgenstern, 2016). Even where these are not substantial, connection with the regional groundwater is important for preventing the stream from drying up completely. Reduction in groundwater elevations due to climate change or pumping may have serious impacts on these pools that are commonly important water sources for local ecosystems in dry summers. Currently about 51 to 60% of global rivers have ceased to flow at least one day per year and intermittency of streams is forecasted to increase due to climate change and rising water usage (Messenger et al., 2021). Documenting the sources of water in these rivers and the mean transit times is thus essential in predicting how they will function. Major ion geochemistry and stable isotopes may be able to discern the sources of river water; however, in many catchments, this is not possible. This study has illustrated the use of mean transit time estimates in understanding the stores of water that contribute to the rivers as well as the timescales of flow within catchments. In the southern hemisphere, ^3H allows mean transit times to be readily estimated in relatively large catchments and this will be the case in the northern hemisphere in the near future (Morgenstern et al., 2010). Integrating mean transit time estimates into studies of intermittent catchments will allow a better general understanding of this important group of rivers.

595

Data availability. All analytical data are presented in the Supplement.

Author contributions. ZZ and IC conducted the sampling. ZZ and carried out the analysis of the geochemical parameters at Monash University and the MTT calculations. UM was responsible for
600 the ^3H and ^{14}C analysis. All authors were involved in writing the article.

Competing interests. The authors declare that they have no conflict of interest.

Acknowledgements. This work was supported by ARC Special Research Initiative 0800001 and Monash University. Dr. Massimo Raveggi and Rachelle Pierson are thanked for help with the analyses at Monash University.

605

610

615 **References**

- Barua, S., Cartwright, I., Dresel, P. E., Morgenstern, U., McDonnell, J. J., and Daly, E.: Sources and mean transit times of intermittent streamflow in semi-arid headwater catchments, *J. Hydrol.*, 604, 127208, <https://doi.org/10.1016/j.jhydrol.2021.127208>, 2022.
- Benettin, P., J. W. Kirchner, A. Rinaldo, and G. Botter.: Modeling chloride transport using travel
620 time distributions at Plynlimon, Wales, *Water Resour. Res.*, 51, 3259-3276, <https://doi.org/10.1002/2014WR016600>, 2015.
- Beyer, M., Jackson, B., Daughney, C., Morgenstern, U., and Norton, K.: Use of hydrochemistry as a standalone and complementary groundwater age tracer, *J. Hydrol.*, 543, 127-144, <https://doi.org/10.1016/j.jhydrol.2016.05.062>, 2016.
- 625 Birkel, C., Soulsby, C., Tetzlaff, D.: Conceptual modelling to assess how the interplay of hydrological connectivity, catchment storage and tracer dynamics controls nonstationary water age estimates, *Hydrol. Process.*, 29, 2956-2969, <https://doi.org/10.1002/hyp.10414>, 2015.
- Birks, S. J., Fennell, J. W., Gibson, J. J., Yi, Y., Moncur, M. C., and Brewster, M.: Using regional
630 datasets of isotope geochemistry to resolve complex groundwater flow and formation connectivity in northeastern Alberta, Canada, *Appl. Geochem.*, 101, 140-159, <https://doi.org/10.1016/j.apgeochem.2018.12.013>, 2019.
- Blavoux, B., Lachassagne, P., Henriot, A., Ladouche, B., Marc, V., Beley, J. J., and Olive, P.: A
635 (France) glacial aquifers, *J. Hydrol.*, 494, 116-133, <https://doi.org/10.1016/j.jhydrol.2013.04.029>, 2013.

Bureau of Meteorology Australian landscape water balance: Commonwealth of Australia, available at: <http://www.bom.gov.au/water/landscape/>, last access: 20 July 2021.

640 Cartwright, I. and Morgenstern, U.: Using tritium and other geochemical tracers to address the “old water paradox” in headwater catchments. *J. Hydrol.*, 563, 13-21, <https://doi.org/10.1016/j.jhydrol.2018.05.060>, 2018.

Cartwright, I. and Morgenstern, U.: Constraining groundwater recharge and the rate of geochemical processes using tritium and major ion geochemistry: Ovens catchment, southeast Australia. *J. Hydrol.*, 475, 137-149, <https://doi.org/10.1016/j.jhydrol.2012.09.037>, 2012.

645 Cartwright, I. and Morgenstern, U.: Transit times from rainfall to baseflow in headwater catchments estimated using tritium: The Ovens River, Australia, *Hydrol. Earth Syst. Sci.*, 19, 3771-3785, <https://doi.org/10.5194/hess-19-3771-2015>, 2015.

Cartwright, I. and Morgenstern, U.: Using tritium to document the mean transit time and sources of water contributing to a chain-of-ponds river system: implications for resource protection. *Appl. Geochem.*, 75, 9-19, <https://doi.org/10.1016/j.apgeochem.2016.10.007>, 2016.

650 Cartwright, I., Fifield, L. K., and Morgenstern, U.: Using ^3H and ^{14}C to constrain the degree of closed-system dissolution of calcite in groundwater, *Appl. Geochem.*, 32, 118-128, <https://doi.org/10.1016/j.apgeochem.2012.10.023>, 2013.

655 Cartwright, I., Hofmann, H., Currell, M. J., and Fifield, L. K.: Decoupling of solutes and water in regional groundwater systems: The Murray Basin, Australia, *Chem Geol.*, 466, 466-478, <https://doi.org/10.1016/j.chemgeo.2017.06.035>, 2017.

Cartwright, I., Irvine, D., Burton, C., and Morgenstern, U.: Assessing the controls and uncertainties on mean transit times in contrasting headwater catchments, *J. Hydrol.*, 557, 16-29, <https://doi.org/10.1016/j.jhydrol.2017.12.007>, 2018.

- 660 Cartwright, I., Morgenstern, U., Howcroft, W., Hofmann, H., Armit, R., Stewart, M., and Irvine, D.: The variation and controls of mean transit times in Australian headwater catchments. *Hydrol. Process*, 34, 4034-4048, <https://doi.org/10.1002/hyp.13862>, 2020.
- Clark, I.D. and Fritz, P.: *Environmental Isotopes in Hydrogeology*, Lewis, New York, p. 328, 1997.
- Clark, I.D.: *Groundwater geochemistry and isotopes*, CRC Press Boca Raton, FL, USA, 2015.
- 665 Cook, P. G. and Bohlke, J. K.: Determining timescales for groundwater flow and solute transport. In *Environmental tracers in subsurface hydrology*, Springer, Boston, MA, p. 1-30, 2000.
- Cook, P.G.: Estimating groundwater discharge to rivers from river chemistry surveys, *Hydrol. Processes.*, 27, 3694-3707, <https://doi.org/10.1002/hyp.9493>, 2013.
- Coplen, T. B.: Normalization of oxygen and hydrogen isotope data, *Chem Geol.*, 72, 293-297, 670 [https://doi.org/10.1016/0168-9622\(88\)90042-5](https://doi.org/10.1016/0168-9622(88)90042-5), 1988.
- Costigan, K.H., Jaeger, K.L., Goss, C.W., Fritz, K.M., and Goebel, P.C.: Understanding controls on flow permanence in intermittent rivers to aid ecological research: integrating meteorology, geology and land cover, *Ecohydrol.*, 9, 1141-1153. <https://doi.org/10.1002/eco.1712>, 2015.
- Datry, T., Larned, S.T., and Tockner, K.: Intermittent rivers: a challenge for freshwater 675 ecology. *BioSci.*, 64, 3, 229-235, <https://doi.org/10.1093/biosci/bit027>, 2014.
- Department of Environment Land Water and Planning: State Government Victoria, available at: <http://data.water.vic.gov.au/monitoring.htm>, last access: 20 August 2021.
- Department of Jobs, Precincts and Regions, Energy and Earth Resources: State Government Victoria, available at: <http://www.energyandresources.vic.gov.au/earth-resources/maps-reports-and-data/geovic>, 680 last access: 20 August 2021.

- Duvert, C., Stewart, M.K., Cendón, D.I., and Raiber, M.: Time series of tritium, stable isotopes and chloride reveal short-term variations in groundwater contribution to a stream, *Hydrol. Earth Syst. Sci.*, 20, 257-277, <https://doi.org/10.5194/hess-20-257-2016>, 2016.
- Edmunds, W.M.: Geochemistry's vital contribution to solving water resource problems. *Appl. Geochem.* 24, 1058-1073, <https://doi.org/10.1016/j.apgeochem.2009.02.021>, 2009.
- 685 Fletcher, G.: Environmental Water Management Plan-Wimmera River System. Government of Victoria Wimmera Catchment Management Authority. <http://wcma.vic.gov.au>, 2015.
- Gleeson, T., Befus, K.M., Jasechko, S., Luijendijk, E., and Cardenas, M.B.: The global volume and distribution of modern groundwater, *Nat. Geosci.*, 9, 161-167, <https://doi.org/10.1038/ngeo2590>, 2016.
- 690 Gonfiantini, R.: Environmental isotopes in lake studies, *Handbook of environmental isotope geochemistry*, 2, 113-168, 1986.
- Gusyev, M. A., Morgenstern, U., Stewart, M. K., Yamazaki, Y., Kashiwaya, K., Nishihara, T., and Iwami, Y.: Application of tritium in precipitation and baseflow in Japan: a case study of groundwater transit times and storage in Hokkaido watersheds, *Hydrol. Earth Syst. Sci.*, 20(7), 3043-3058, <https://doi.org/10.5194/hess-20-3043-2016>, 2016.
- 695 Gutiérrez-Jurado, K.Y., Partington, D., Batelaan, O., Cook, P., and Shanafield, M.: What triggers streamflow for intermittent rivers and ephemeral streams in low-gradient catchments in Mediterranean climates, *Water Resour. Res.*, 55, 9926-9946, <https://doi.org/10.1029/2019WR025041>, 2019.
- 700 Hare, D. K., Helton, A. M., Johnson, Z. C., Lane, J. W., and Briggs, M. A.: Continental-scale analysis of shallow and deep groundwater contributions to streams. *Nat. commun.*, 12, 1-10, <https://doi.org/10.1038/s41467-021-21651-0>, 2021.

- 705 Herczeg, A. L., Dogramaci, S. S., and Leaney, F. W.: Origin of dissolved salts in a large, semi-arid groundwater system: Murray Basin, Australia. *Marine and Freshwater Resour.*, 52, 41-52. <https://doi.org/10.1071/MF00040>, 2001.
- Hollins, S. E., Hughes, C. E., Crawford, J., Cendón, D. I., and Meredith, K. T.: Rainfall isotope variations over the Australian continent—Implications for hydrology and isoscape applications, *Sci. Total Environ.*, 645, 630-645, <https://doi.org/10.1016/j.scitotenv.2018.07.082>, 2018.
- 710 Howcroft, W., Cartwright, I., and Cendón, D.I.: Residence times of bank storage and return flows and the influence on river water chemistry in the upper Barwon River, Australia. *Appl. Geochem.*, 101, 31-41, <https://doi.org/10.1016/j.apgeochem.2018.12.026>, 2019.
- Howcroft, W., Cartwright, I., and Morgenstern, U.: Mean transit times in headwater catchments: insights from the Otway Ranges, Australia, *Hydrol. Earth Syst. Sci.*, 22, 635-653, 715 <https://doi.org/10.5194/hess-22-635-2018>, 2018.
- Hrachowitz, M., C. Soulsby, D. Tetzlaff, I. A. Malcolm, and G. Schoups.: Gamma distribution models for transit time estimation in catchments: Physical interpretation of parameters and implications for time-variant transit time assessment, *Water Resour. Res.*, 46, W10536, <https://doi.org/10.1029/2010WR009148>, 2010.
- 720 Hrachowitz, M., Savenije, H., Bogaard, T. A., Tetzlaff, D., and Soulsby, C.: What can flux tracking teach us about water age distribution patterns and their temporal dynamics?, *Hydrol. Earth Syst. Sci.*, 17, 533-564, <https://doi.org/10.5194/hess-17-533-2013>, 2013.
- Hrachowitz, M., Soulsby, C., Tetzlaff, D., Dawson, J. J. C., and Malcolm, I. A.: Regionalization of transit time estimates in montane catchments by integrating landscape controls, *Water Resour. Res.*, 45, <https://doi.org/10.1029/2008WR007496>, 2009. 725

- Hughes, C. E. and Crawford, J.: A new precipitation weighted method for determining the meteoric water line for hydrological applications demonstrated using Australian and global GNIP data, *J. Hydrol.*, 464, 344-351, <https://doi.org/10.1016/j.jhydrol.2012.07.029>, 2012.
- 730 Jung, Y. Y., Koh, D. C., Yoon, Y. Y., Kwon, H. I., Heo, J., Ha, K., and Yun, S. T.: Using stable isotopes and tritium to delineate groundwater flow systems and their relationship to streams in the Geum River basin, Korea, *J. Hydrol.*, 573, 267-280, <https://doi.org/10.1016/j.jhydrol.2019.03.084>, 2019.
- Jurgens, B. C., Bohkle, J. K., and Eberts, S. M.: TracerLPM (Version 1): An Excel® workbook for interpreting groundwater age distributions from environmental tracer data, United States Geological Survey, Techniques and Methods Report 4- F3, United States Geological Survey, 735 Reston, USA, 60 pp., <https://doi.org/10.3133/tm4F3>, 2012.
- Kirchner, J. W., Feng, X., and Neal, C.: Fractal stream chemistry and its implications for contaminant transport in catchments. *Nature*, 403, 524-527, <https://doi.org/10.1038/35000537>, 2000.
- 740 Kirchner, J. W., Feng, X., Neal, C., and Robson, A. J.: The fine structure of water-quality dynamics: the (high-frequency) wave of the future, *Hydrol. Process.*, 18, 1353-1359, <https://doi.org/10.1002/hyp.5537>, 2004.
- Kirchner, J. W.: A double paradox in catchment hydrology and geochemistry, *Hydrological processes*, 17, 871-874, <https://doi.org/10.1002/hyp.5108>, 2003.
- 745 Kirchner, J. W.: Aggregation in environmental systems–Part 1: Seasonal tracer cycles quantify young water fractions, but not mean transit times, in spatially heterogeneous catchments, *Hydrol. Earth Syst. Sci.*, 20 (1), 279-297, <https://doi.org/10.5194/hess-20-279-2016>, 2016a.

- Kirchner, J. W.: Aggregation in environmental systems–Part 2: Catchment mean transit times and young water fractions under hydrologic nonstationarity, *Hydrol. Earth Syst. Sci.*, 20, 299-328, <https://doi.org/10.5194/hess-20-299-2016>, 2016b.
- 750
- Kirchner, J. W.: Quantifying new water fractions and transit time distributions using ensemble hydrograph separation: theory and benchmark tests, *Hydrol. Earth Syst. Sci.*, 23, 303-349, <https://doi.org/10.5194/hess-23-303-2019>, 2019.
- Knapp, J. L., Neal, C., Schlumpf, A., Neal, M., and Kirchner, J. W.: New water fractions and transit time distributions at Plynlimon, Wales, estimated from stable water isotopes in precipitation and streamflow, *Hydrol. Earth Syst. Sci.*, 23, 4367-4388, <https://doi.org/10.5194/hess-23-4367-2019>, 2019.
- 755
- Lamontagne, S., Kirby, J., and Johnston, C.: Groundwater–surface water connectivity in a chain-of-ponds semiarid river, *Hydrol. Process.*, 35, e14129, <https://doi.org/10.1002/hyp.14129>, 2021.
- 760
- Lamontagne, S., Taylor, A.R., Cook, P.G., Crosbie, R.S., Brownbill, R., Williams, R.M., and Brunner, P.: Field assessment of surface water–groundwater connectivity in a semi-arid river basin (Murray – Darling, Australia). *Hydrol. Process.*, 28, 1561-1572. <https://doi.org/10.1002/hyp.9691>, 2014.
- 765
- Małoszewski, P. and Zuber, A.: Determining the turnover time of groundwater systems with the aid of environmental tracers: 1. Models and their applicability, *J. Hydrol.*, 57, 207-231, [https://doi.org/10.1016/0022-1694\(82\)90147-0](https://doi.org/10.1016/0022-1694(82)90147-0), 1982.
- Maloszewski, P.: Lumped-parameter models as a tool for determining the hydrological parameters of some groundwater systems based on isotope data, in: *Tracer and Modelling in*

- 770 Hydrogeology – Proceedings of the TraM'2000 Conference, IAHS Publ. no. 262, Liege, Belgium, 271-276, 2000
- McCallum, J. L., Cook, P. G., and Simmons, C. T.: Limitations of the use of environmental tracers to infer groundwater age, *Groundwater*, 53, 56-70, <https://doi.org/10.1111/gwat.12237>, 2015.
- McCormac, F. G., Hogg, A. G., Blackwell, P. G., Buck, C. E., Higham, T. F., and Reimer, P. J.: SHCal04 Southern Hemisphere calibration, 0-11.0 cal kyr BP, *Radiocarbon*, 46, 1087-1092, 775 <https://doi.org/10.1017/S0033822200033014>, 2004.
- McDonnell, J. J., McGuire, K., Aggarwal, P., Beven, K. J., Biondi, D., Destouni, G., and Wrede, S.: How old is streamwater? Open questions in catchment transit time conceptualization, modeling and analysis, *Hydrol. Process.*, 24, 1745-1754, <https://doi.org/10.1002/hyp.7796>, 780 2010.
- McGuire, K. J. and McDonnell, J. J.: A review and evaluation of catchment transit time modelling, *J. Hydrol.*, 330, 543-563, <https://doi.org/10.1016/j.jhydrol.2006.04.020>, 2006.
- Meredith, K.T., Han, L.F., Hollins, S.E., Cendón, D.I., Jacobsen, G.E., and Baker, A.: Evolution of chemical and isotopic composition of inorganic carbon in a complex semi-arid zone 785 environment: consequences for groundwater dating using radiocarbon. *Geochim. Cosmochim. Acta.*, 188, 352-367, <https://doi.org/10.1016/j.gca.2016.06.011>, 2016.
- Messenger, M. L., Lehner, B., Cockburn, C., Lamouroux, N., Pella, H., Snelder, T., and Datry, T.: Global prevalence of non-perennial rivers and streams, *Nature*, 594, 391-397, <https://doi.org/10.1038/s41586-021-03565-5>, 2021.
- 790 Morgenstern, U. and Taylor, C.B.: Ultra low-level tritium measurement using electrolytic enrichment and LSC. *Isotopes in Environmental and Health Studies*, 45, 96-117. <https://doi.org/10.1080/10256010902931194>, 2009.

- Morgenstern, U., Daughney, C. J., Leonard, G., Gordon, D., Donath, F. M., and Reeves, R.: Using groundwater age and hydrochemistry to understand sources and dynamics of nutrient contamination through the catchment into Lake Rotorua, New Zealand, *Hydrol. Earth Syst. Sci.*, 19, 803-822, <https://doi.org/10.5194/hess-19-803-2015>, 2015.
- Morgenstern, U., Stewart, M.K., and Stenger, R.: Dating of stream water using tritium in a post nuclear bomb pulse world: continuous variation of mean transit time with streamflow, *Hydrol. Earth Syst. Sci.*, 14, 2289-2301, <https://doi.org/10.5194/hess-14-2289-2010>, 2010.
- 800 Peters, N. E., Burns, D. A., and Aulenbach, B. T.: Evaluation of high-frequency mean streamwater transit-time estimates using groundwater age and dissolved silica concentrations in a small forested watershed, *Aqua. Geochem.*, 20, 183-202, <https://doi.org/10.1007/s10498-013-9207-6>, 2014.
- Radke, L. C. and Howard, K. W. F.: Influence of groundwater on the evaporative evolution of saline lakes in the Wimmera of south-eastern Australia, *Hydrobiologia*, 591, 185-205, <https://doi.org/10.1007/s10750-007-0797-0>, 2007.
- 805 Reimer, P. J., Bard, E., Bayliss, A., Beck, J. W., Blackwell, P. G., Ramsey, C. B., and Van Der Plicht, J.: IntCal13 and Marine13 radiocarbon age calibration curves 0-50,000 years cal BP. *radiocarbon*, 55, 1869-1887, https://doi.org/10.2458/azu_js_rc.55.16947, 2013.
- 810 Rice, K. C. and Hornberger, G. M.: Comparison of hydrochemical tracers to estimate source contributions to peak flow in a small, forested, headwater catchment, *Water Resour. Res.*, 34, 1755-1766, <https://doi.org/10.1029/98WR00917>, 1998.
- Rinaldo, A., Benettin, P., Harman, C. J., Hrachowitz, M., McGuire, K. J., Van Der Velde, Y., and Botter, G.: Storage selection functions: A coherent framework for quantifying how

815 catchments store and release water and solutes, *Water Resour. Res.*, 51, 4840-4847,
<https://doi.org/10.1002/2015WR017273>, 2015.

Robinson, N., Rees, D., Reynard, K., Imhof, M., Boyle, G., Martin, J., and Giles, S.: A land resource assessment of the Wimmera region. Victoria Department of Jobs, Precincts and Regions. <http://vro.agriculture.vic.gov.au/>, 2006.

820 Rozanski, K., Araguás-Araguás, L., and Gonfiantini, R.: Isotopic Patterns in Modern Global Precipitation, in: *Climate Change in Continental Isotopic Records*, edited by: Swart, P. K., Lohmann, K. C., Mckenzie, J., and Savin, S., 1–36, American Geophysical Union, Washington, D.C., USA, 1993

Segura, C., Noone, D., Warren, D., Jones, J.A., Tenny, J., and Ganio, L.M.: Climate, landforms, and geology affect baseflow sources in a mountain catchment, *Water Resour. Res.*, 55, 5238-5254, <https://doi.org/10.1029/2018WR023551>, 2019.

Shanafield, M., Bourke, S.A., Zimmer, M.A., and Costigan, K.H.: An overview of the hydrology of non-perennial rivers and streams. *Wiley Interdisciplinary Reviews: Water*, 8, e1504, <https://doi.org/10.1002/wat2.1504>, 2021.

830 Shanafield, M., Godsey, S., Datry, T., Hale, R., Zipper, S. C., Costigan, K., Krabbenhoft, C. A., Dodds, W. K., Zimmer, M., Allen, D. C., Bogan, M., Kaiser, K. E., Burrows, R. M., Hammond, J. C., Busch, M., Kampf, S., Mims, M. C., Burgin, A., and Olden, J. D.: Science gets up to speed on dry rivers, *Eos*, 101, <https://doi.org/10.1029/2020EO139902>, 2020.

Sophocleous, M.: Interactions between groundwater and surface water: the state of the science, *Hydrogeol. J.*, 10, 52-67, <http://dx.doi.org/10.1007/s10040-014-1215-0>, 2002.

835 Soulsby, C., Malcolm, R., Helliwell, R., Ferrier, R. C., and Jenkins, A.: Isotope hydrology of the Allt a'Mharcaidh catchment, Cairngorms, Scotland: implications for hydrological pathways

and residence times, *Hydro. Process.*, 14, 747-762, [https://doi.org/10.1002/\(SICI\)1099-1085\(200003\)14:4<747::AID-HYP970>3.0.CO;2-0](https://doi.org/10.1002/(SICI)1099-1085(200003)14:4<747::AID-HYP970>3.0.CO;2-0), 2000.

840 Soulsby, C., Tetzlaff, D., Rodgers, P., Dunn, S., and Waldron, S.: Runoff processes, stream water residence times and controlling landscape characteristics in a mesoscale catchment: An initial evaluation, *J. Hydrol.*, 325, 197-221, <https://doi.org/10.1016/j.jhydrol.2005.10.024>, 2006.

Stewart, M. K. and Morgenstern, U.: Importance of tritium-based transit times in hydrological systems, *Wiley Interdisciplinary Reviews: Water*, 3, 145-154, 845
<https://doi.org/10.1002/wat2.1134>, 2016.

Stewart, M. K., Morgenstern, U., and McDonnell, J. J.: Truncation of stream residence time: how the use of stable isotopes has skewed our concept of streamwater age and origin, *Hydro. Process.*, 24, 1646-1659, <https://doi.org/10.1002/hyp.7576>, 2010.

Stewart, M. K., Morgenstern, U., Gusyev, M. A., and Małoszewski, P.: Aggregation effects on 850 tritium-based mean transit times and young water fractions in spatially heterogeneous catchments and groundwater systems, *Hydro. Earth Syst. Sci.*, 21, 4615-4627, <https://doi.org/10.5194/hess-21-4615-2017>, 2017.

Stewart, M. K., Thomas, J. T., Norris, M., and Trompetter, V.: Paleogroundwater in the Moutere gravel aquifers near Nelson, New Zealand. *Radiocarbon*, 46, 517-529, 855
<https://doi.org/10.1017/S0033822200035578>, 2004.

Suckow, A.: The age of groundwater—Definitions, models and why we do not need this term, *Appl. Geochem.*, 50, 222-230, <https://doi.org/10.1016/j.apgeochem.2014.04.016>, 2014.

Tadros, C.V., Hughes, C.E., Crawford, J., Hollins, S.E., and Chisari, R.: Tritium in Australian precipitation: A 50-year record, *J. Hydrol.*, 513, 262-273, 860
<https://doi.org/10.1016/j.jhydrol.2014.03.031>, 2014.

- Tsujimura, M., Abe, Y., Tanaka, T., Shimada, J., Higuchi, S., Yamanaka, T., Oyunbaatar, D.: Stable isotopic and geochemical characteristics of groundwater in Kherlen River basin, a semi-arid region in eastern Mongolia, *J. Hydrol.*, 333, 47-57, <https://doi.org/10.1016/j.jhydrol.2006.07.026>, 2007.
- 865 Unland, N. P., Cartwright, I., Daly, E., Gilfedder, B. S., Atkinson, A. P.: Dynamic river-groundwater exchange in the presence of a saline, semi-confined aquifer, *Hydrol. Process.*, 29, 4817-4829, <https://doi.org/10.1002/hyp.10525>, 2015.
- Van Dijk, A.I., Beck, H.E., Crosbie, R.S., de Jeu, R.A., Liu, Y.Y., Podger, G.M., and Viney, N.R.: The Millennium Drought in southeast Australia (2001–2009): Natural and human causes and
870 implications for water resources, ecosystems, economy, and society, *Water Resour. Res.*, 49, 1040-1057, <https://doi.org/10.1002/wrcr.20123>, 2013.
- Weissmann, G. S., Zhang, Y., LaBolle, E. M., and Fogg, G. E.: Dispersion of groundwater age in an alluvial aquifer system, *Water Resour. Res.*, 38, 16-1, <https://doi.org/10.1029/2001WR000907>, 2002.
- 875 Western, A.W., O'Neill, I.C., Hughes, R.L., Nolan, J.B.: The behavior of stratified pools in the Wimmera River, Australia. *Water Resour. Res.*, 32, 3197-3206. <https://doi.org/10.1029/96WR01336>, 1996.
- Wimmera Waterway Strategy 2014-2022: Government of Victoria Wimmera Catchment Management Authority, available at: <http://wcma.vic.gov.au>, 2013.
- 880 Zhou, Z. and Cartwright, I.: Using geochemistry to identify and quantify the sources, distribution, and fluxes of baseflow to an intermittent river impacted by climate change: The upper Wimmera River, southeast Australia, *Sci. Total Environ.*, 149725, <https://doi.org/10.1016/j.scitotenv.2021.149725>, 2021.

Zimmer, M. A. and McGlynn, B. L.: Ephemeral and intermittent runoff generation processes in a
885 low relief, highly weathered catchment, *Water Resour. Res.*, 53, 7055-7077,
<https://doi.org/10.1002/2016WR019742>, 2017.

Zuber, A. and Maloszewski, P.: Lumped parameter models, in: chap. 2, vol 6: *Modelling in
Environmental Isotopes in the Hydrological Cycle: Principles and Applications*, Technical
Documents in Hydrology, edited by: Mook, W. G. and Yurtsever, Y., UNESCO, Paris, France,
890 39, 5-35, 2001.

Zuber, A., Weise, S. M., Motyka, J., Osenbrück, K., and Róžański, K.: Age and flow pattern of
groundwater in a Jurassic limestone aquifer and related Tertiary sands derived from combined
isotope, noble gas and chemical data, *J. Hydrol.*, 286, 87-112,
<https://doi.org/10.1016/j.jhydrol.2003.09.004>, 2004.

Table 1. ^3H activities and calculated mean transit times (MTTs) from pool water and stream water of upper Wimmera River

Site number ¹	Sample ID	Streamflow m ³ day ⁻¹	^3H	MTTs (years)				
			TU	DM (0.05)	DM (0.5)	EPM (0.33)	EPM (1.0)	EMM
March 2019								
1	Elmhurst	0	1.65	nc ²	nc	nc	nc	nc
4	Ever 1	0	0.88	nc	nc	nc	nc	nc
5	CE1	0	1.00	nc	nc	nc	nc	nc
6	CE2	0	2.28	nc	nc	nc	nc	nc
7	Joel 1	0	2.76	nc	nc	nc	nc	nc
8	Joel 2	0	0.64	nc	nc	nc	nc	nc
16	Campbell	0	3.02	nc	nc	nc	nc	nc
18	Glenorchy	0	3.29	nc	nc	nc	nc	nc
July 2019								
1	Elmhurst	10500	2.69	2.8	3.1	3.0	2.9	3.1
5	CE1	14919	1.85	10.9	14.9	13.0	11.3	16.8
8	Joel 2	28949	2.76	2.4	2.5	2.4	2.4	2.5
16	Campbell	91617	3.00	0.1	0.1	0.1	0.1	0.1
18	Glenorchy	135000	2.41	4.8	5.7	5.3	5.0	5.8
September 2019								
1	Elmhurst	9500	2.67	3.0	3.3	3.1	3.0	3.3
5	CE1	10898	2.58	3.6	4.0	3.8	3.6	4.0
8	Joel 2	15698	2.48	4.3	5.0	4.6	4.4	5.1
16	Campbell	27077	2.78	2.2	2.4	2.3	2.2	2.4
18	Glenorchy	31110	2.88	1.6	1.7	1.6	1.6	1.7
November 2019								
1	Elmhurst	220	2.55	3.8	4.3	4.0	3.9	4.3
5	CE1	250	2.34	5.4	6.5	6.0	5.6	6.7
8	Joel 2	215	2.26	6.0	7.6	6.9	6.3	7.8
16	Campbell	343	2.58	3.6	4.0	3.8	3.6	4.0
18	Glenorchy	620	2.69	2.8	3.1	2.9	2.8	3.1

1. Sites on Fig. 1.

2. nc = not calculated

Table 2. ³H, ¹⁴C activities, and calculated MTTs by EPM (ratio=0.33) of groundwater from the upper Wimmera River

Site letter ¹	Bore ID	Depth m	³ H TU	¹⁴ C pMC	MTTs- ³ H years	MTTs- ¹⁴ C years	MTTs- ¹⁴ C ² years
C	5242	23	0.16	92.3	197	nc ³	nc
	5243	18	0.25	92.0	176	nc	nc
F	5227	28	0.04	82.8	nc	1591	691
	5228	14	0.06	84.2	nc	1436	551
H	5229	37	0.03	66.8	nc	3826	2671
	5230	14	0.25	89.5	176	nc	nc
I	5232	32	0.02	73.8	nc	2726	1681
J	5234	43	0.02	57.1	nc	5691	4421
	5235	30	bd ⁴	78.4	nc	2111	1141
	5236	12	0.45	102.9	121	nc	nc
L	5379	7	bd	88.4	nc	1016	221
	2542	17	0.02	80.5	nc	1851	921

905

1. Sites on Fig. 1
2. MTTs estimated by ¹⁴C activities with 10% calcite dissolutions
3. nc= not calculated

910