# UNCERTAINTY ESTIMATION OF REGIONALISED DEPTH-DURATION-FREQUENCY CURVES IN

2 GERMANY

3 Bora Shehu¹-², Uwe Haberlandt¹

- 4 <sup>1</sup> Institute of Hydrology and Water Resources Management, Leibniz University of Hannover, Hannover, Germany
- 5 2 Institute of Environmental Sciences and Geography, University of Potsdam, Potsdam, Germany
- 6 Correspondence to: Bora Shehu (bora.shehu@iww.uni-hannoverpotsdam.de)

#### ABSTRACT:

1

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21 22

23

24

25

26

27

28

29 30

31

32

33

34

35

The estimation of rainfall depth-duration-frequency (DDF) curves is necessary for the design of several water systems and protection works. These curves are typically estimated from observed locations, but due to different sources of uncertainties, the risk may be underestimated. Therefore, it becomes crucial to quantify the uncertainty ranges of such curves. For this purpose, the propagation of different uncertainty sources in the regionalisation of the DDF curves for Germany is investigated. Annual extremes are extracted at each location for different durations (from 5mins up to 7days), and local extreme value analysis is performed according to Koutsoyiannis et al. (1998). Following this analysis, five parameters are obtained for each station, from which four are interpolated using external drift kriging, while one is kept constant over the whole region. Finally, quantiles are derived for each location, duration and given return period. Through a non-parametric bootstrap and geostatistical spatial simulations, the uncertainty is estimated in terms of precision (width of 95% confidence interval) and accuracy (expected error) for three different components of the regionalisation: i) local estimation of parameters, ii) variogram estimation and iii) spatial estimation of parameters. First two methods were tested for their suitability in generating multiple equiprobable spatial simulations: sequential Gaussian simulations (SGS) and simulated annealing (SA) simulations. Between the two, SGS proved to be more accurate and was chosen for the uncertainty estimation from spatial simulations. Next, 100 realisations were run at each component of the regionalisation procedure to investigate their impact on the final regionalisation of parameters and DDFs curves, and later combined simulations were performed to propagate the uncertainty from the main components to the final DDFs curves. It was found that spatial estimation is the major uncertainty component in the chosen regionalisation procedure, followed by the local estimation of rainfall extremes. In particular, the variogram uncertainty had very little effect in the overall estimation of DDFs curves. We conclude that the best way to estimate the total uncertainty consisted of a combination between local resampling and spatial simulations, which resulted in more precise estimation at long observation locations, and a decline in precision at un-observed locations according to the distance and density of the observations in the vicinity. Through this combination, the total uncertainty was simulated by 10,000 runs in Germany, and indicated, that depending on the location and duration level, tolerance ranges from  $\pm 10$ -30% for low return periods (lower than 10 years), and from  $\pm 15$ -60% for high return periods (higher than 10 years) should be expected, with the very short durations (5min) being more uncertain than long durations.

### KEYWORDS:

Depth-Duration-Frequency Curves, external drift kriging, local uncertainty, variogram uncertainty, spatial uncertainty, sequential Gaussian simulation

Formatiert: Standard, Abstand Vor: 0 Pt., Zeilenabstand: einfach, Rahmen: Oben: (Kein Rahmen), Unten: (Kein Rahmen), Links: (Kein Rahmen), Rechts: (Kein Rahmen), Zwischen: (Kein Rahmen)

**Formatiert:** Schriftart: Liberation Serif, Schriftfarbe: Schwarz

#### 1. Introduction

36

37

38

39

40

41 42

43

44

45

46

47

48

49

50 51

52 53

54

55

56

57

58 59

60

61

62

63

64

65

66

67 68

69

70

71

72

73

74

75

76

77

Design precipitation volumes at different duration and frequencies, also known as Depth-Duration-Frequency (DDF) Curves, are necessary for the design of many water-related systems and facilities. These curves are typically generated by fitting a theoretical distribution to the rainfall extremes (either annual extremes - AMS or extremes above a threshold - POT) derived for specific duration intervals at observed locations. Mostly, a Generalised Extreme Value distribution with three parameters (location, scale and shape) is preferred for such applications (Koutsoyiannis, 2004a, 2004b). An adjustment of the rainfall extremes over different duration intervals is also considered either before fitting the theoretical distribution (as in Koutsoyiannis et al. 1998), or after (as in Fischer and Schumann, 2018). As the fitted theoretical distribution can be used to describe the DDF values only at observed locations, regionalisation techniques are applied to estimate these distributions at unobserved locations. The estimation of a regional distribution based on the index method as proposed by Hosking and Wallis (1997) is one of the most used methods in the literature (Burn, 2014; Forestieri et al., 2018; Perica et al., 2019), followed by the kriging interpolation of the parameters describing these theoretical distributions (Ceresetti et al., 2012; Shehu et al., 2022; Uboldi et al., 2014). Nevertheless, the procedure for the derivation of DDF curves is subjected to different sources of uncertainty which can affect the confidence level of the estimated design values. Such sources of uncertainties include measurement errors, choice of distribution, short observation length, non-representativeness of point measurements for the spatial dependency of extremes, instationarity due to the climate change etc (Marra et al., 2019b). So far for DDF curves in Germany, there is not objective quantification of the uncertainty, but only approximative guessed tolerance ranges between 10-20% (depending on the return period) that should account for the measurement errors, uncertainties in the extreme value estimation and regionalisation, and for the climate variability (Junghänel et al., 2017). So far in Germany, the The tolerance ranges are kept constant throughout duration levels and locations, nevertheless such tolerance ranges are expected to be higher for very short observations and high return periods (Poschlod, 2021) especially for short durations and drier climate (Marra et al., 2017). Therefore, there is a need to perform different simulations in order to quantify the tolerance ranges (uncertainty) dependent on duration, location and return period. In this paper, the focus is on developing a framework that accounts for uncertainties due to short observation lengths and non-representativeness of point measurements for spatial dependencies of extremes. Once a framework is developed, it can be used to investigate the role of distribution choice as in Miniussi and Marra (2021) or the role of future climate as in Poschlod (2021). In the literature, parametric or non-parametric bootstrapping resampling techniques are used to quantify tolerance ranges of DDF curves. Overeem et al., (2008) was one of the first to include the uncertainty of such curves by including only the uncertainty of GEV parameters estimated by a regional bootstrap procedure (sample variability). In their study, extremes from a homogenous region were pooled together to estimate regional probability distribution, which resulted in a narrower uncertainty range at observed locations. Overeem et al. (2009) proposed a bootstrapping technique where same years for all the observed points were resampled together in order to maintain the spatial dependency of the extremes. Uboldi et al. (2014) went a step further and accounted spatial dependency when performing the bootstrapping for each location: extremes from near observations have a higher probability to be resampled at a specific location than the ones from far away. Typically, the bootstrapping procedures are implemented together with the index-based regionalisation as proposed by Hosking and Wallis (1997). Examples in the literature of such applications, are for instance in Burn (2014) and Requena et al. (2019) in Canada where the uncertainty is computed from the confidence intervals of a parametric bootstrap procedure, or in Chaudhuri and Sharma (2020), Notaro et al. (2015), Tfwala et al. (2017), Van de Vyver (2015) where a Bayesian framework is employed to estimate the uncertainty of DDFs curves at different duration levels. Mostly the

uncertainty is derived from bootstrap procedure where the 95% or 90% confidence interval width is used as a measure of

precision: as lower the confidence interval width, the more precise are the estimates. However, the spatial structure of

Formatiert: Nicht Hervorheben

uncertainties is not well considered in the index-based regionalisation: first, no uncertainty of the index itself is considered and propagated, and second, there is no measure how uncertain the locations further away from observations are. Therefore, local resampling of extreme values (to account for sample variability) are not enough to describe the spatial structure of uncertainty, instead spatial simulations are needed. Alternatively, remote sensing data, i.e. satellites or weather radar data, provide spatially continuous indirect measurements of rainfall intensities or volumes (Marra et al., 2019b). However, their shortcomings are related to the short available dataset, the inability of the remote sensing dataset to capture accurately intensities, and lack of a true observed dataset to validate the methods applied. While remote sensing provides a valuable tool and more research is performed in tackling better the uncertainties, at the moment DDF curves from station observations represent still the standard procedure, and hence a method to estimate the spatial structure of uncertainties based on these observations is required.

In kriging, when regionalising from point values, the variance of the estimations can be used as a measure of the

 uncertainty for un-observed locations. This estimation can either be parametric (multi-Gaussian process) or nonparametric (indicator kriging). It is widely accepted that the kriging system can capture only the local uncertainty (providing information at one location at a time conditioned to other observations in the vicinity) and not the spatial one (providing a measure of uncertainty about the un- sampled values taken altogether in space rather than one by one), the estimated uncertainty is dependable on the data configuration rather than on the value itself, and moreover-lastly it fails to preserve the high spatial variability of the target variable (Cinnirella et al., 2005; Deutsch and Journel, 1998; Goovaerts, 1999b, 2001; Lin and Chang, 2000). As stated in Liao et al. (2016) the spatial uncertainty is more important (bigger) than the local uncertainty. Therefore, solutions for the estimation of the spatial uncertainties in geostatistics are stochastic simulations with equiprobable y realisation realisation of the target variable in space. The main assumption of the stochastic simulations is the generation of equiprobable realisations in space while maintaining certain global statistics of the target variable; for instance, the histogram of the observed values and the semi-variogram (herein referred as variogram for simplicity) - which describes the spatial dependency of the variable variance on the distance between the observations. The stochastic simulations present a trade-off: on one side they provide more spatial variable fields than kriging (which is known for its smoothening properties), and on the other side, because the goal is to maintain the global statistics, may suffer from larger errors at the local scale. Another advantage of stochastics simulations is the ability to compute directly the confidence intervals for the target variable, while in kriging interpolation the confidence intervals are computed from the kriging variance assuming a normal distribution of the errors.

Examples of different stochastic simulations are the sequential Gaussian simulations (SGS) (Cinnirella et al., 2005; Emery, 2010; Ersoy and Yünsel, 2009; Gyasi-Agyei and Pegram, 2014; Jang, 2015; Jang and Huang, 2017; Liao et al., 2016; Poggio et al., 2010; Ribeiro and Pereira, 2018; Szatmári and Pásztor, 2019; Varouchakis, 2021; Yang et al., 2018), sequential indicator simulations (SIS) (Bastante et al., 2008; Goovaerts, 1999a, 2001; Luca et al., 2007), simulated annealing (SA) (Goovaerts, 2000; Hofmann et al., 2010; Lin and Chang, 2000), turning bands (TB) (Namysłowska-Wilczyńska, 2015) etc. As seen, the most preferred stochastic simulation in the literature is the SGS due to its simplicity, followed by the SIS and then by SA. Alternatively a stochastic random mixing (as stated in Bárdossy and Hörning, 2016) with spatial dependency modelled by Copulas (Haese et al., 2017) or a collocated cokriging simulation (Bourennane et al., 2007) can also be applied. However, geostatistical simulations remain the preferred choice in the literature for estimating spatial uncertainty, although the main application is in the geosciences field, with very few applications in rainfall modelling, and to authors knowledge no application to the regionalisation of extreme design rainfall. Therefore, geostatistics becomes a useful tool to estimate and analyse the estimation of DDF uncertainties at observed and unobserved locations. The question which of stochastic simulations is more appropriate for extreme design rainfall naturally raises

Feldfunktion geändert

As stated, because of its simplicity the SGS is a very popular method in estimating spatial uncertainty in geostatistics. In the SGS approach each simulation is considered a realisation of the multivariate Gaussian process, and hence it is strictly required for the target variable to be multivariate normal. As discussed in Deutsch and Journel (1998), the testing of the multivariate normality is a difficult task, which depending on the case at hand, can be very time and computational expensive and hence is not usually tested. Typically, studies in literature include a transformation to normal distribution in order to ensure that the target variable is at least univariate normal. Another disadvantage of the normalisation needed for the SGS application, is that the upper and lower tail of the transformed variable will cause an under/over - estimation of these values, and hence an extrapolation to lower and upper bounds is required. Contrary, to the SGS, the sequential indicator simulations (SIS) does not need a prior assumption on the multivariate normality of the target variable and is more suitable for observed values that do not exhibit bivariate normal properties. The SIS is a conditional simulation based on the indicator kriging theory, which provides the probability that a location has to exceed a certain threshold. The number of thresholds considered should be more than 5 but lower than 15 as suggested by Luca et al. (2007). For each of the selected threshold a variogram is fitted to the portion of the data following under this threshold, and it is used for the sequential simulation. A disadvantage of the SIS is that, if many threshold classes are presented, order relationship problems will arise on the obtained realisations (Deutsch and Journel, 1998; Journel and Posa, 1990), which are more emphasized if empty thresholds are included (Luca et al., 2007). Another disadvantage of the SIS is that mainly it has been used together with simple and ordinary kriging theory (Deutsch and Journel, 1998), and no application of the SIS in an external drift or universal kriging has been reported (to authors knowledge) in the literature. Alternative to the SGS and SIS stochastic simulations, the simulated annealing (SA) can be also implemented to alternate and generate conditional images of a continuous target variable. The main idea in the implementation of the SA, is a numerical algorithm which perturbs continuously an image until an objective criterion is reached. The optimization function can include only one criterion (typically the global statistics) or multiple criteria depending on the application at hand. For instance Goovaerts (2000) included three criteria: the local estimation of the variable, the observed histogram and variogram. The advantage of the SA is that no prior assumption of the normality is required (as the observed histogram is reproduced) and that it allows a degree of flexibility for realisations that doesn't exactly match the objective criteria. On the other hand, the disadvantages of the SA include the prior selection of the objective criteria carefully and, depending on the application, the high computational time.

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138 139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

In oura previous study, Shehu et al. (2022) investigated different methods and datasets in Germany for the local estimation of the DDFs from station data, and different regionalisation methods for the estimation of the DDFs at ungauged locations. Theeir study revealed that kriging interpolation of long observation records (more than 460 years) with a denser network of short observations as an external drift delivered best cross-validation results for return periods higher than 10 years. Therefore, apart from the stochastic simulations that account for the spatial uncertainty, more simulations are needed to tackle other sources of uncertainties for the estimation of DDF curves: such as sample variability, variogram estimation and the combination with an external drift. For this purpose, the SGS and SA will be implemented and investigated for their suitability in generating spatial simulations for DDF curves. Once a best method is chosen for this purpose, different experiments are conducted based on non-parametric bootstrapping techniques to investigate how each of the uncertainty component is propagated into the final DDF curves, and if some components are more dominant than others. Lastly, based on the most important components, a framework for estimating the total uncertainty in regionalised DDF curves (both at observed and un-observed locations) is proposed.

The paper is organized as following: First, in Section 2 the data and methods for the estimation and regionalisation of DDF curves is explained (Section 2.1 and 2.2), together with the necessary transformation to normality in Section 2.3 and testing the bi-Gaussian conditions in Section 2.4. Then an introduction to the main uncertainty sources considered here is

given in Section 3, and the main methods to tackle each uncertainty sources are given in Section 3.1 to 3.3. An overview of the experiments and how the uncertainty is measured in terms of both accuracy and precision is described in Section 3.4. The results are summarised in section 4, where first a comparison of the two spatial simulations techniques is investigated (Section 4.1), and later uncertainty results of different experiments for un-observations locations and for the whole German region are shown respectively in Section 4.2 and Section 4.3. Lastly conclusions and the best framework to tackle uncertainties for DDF curves in Germany are discussed in Section 5.

#### 2. Study Area and Data Processing

 The investigation is carried out for Germany, as shown in **Figure 1**, together with the two rainfall measuring networks from the German Weather Service (DWD) used for the uncertainty analysis, grouped in LS (short for long recording stations)—tipping bucket sensors with 1min temporal resolution, 0.1mm accuracy, 2% uncertainty and observation lengths from 40 -80 years, and in SS (short for short recording stations)—digital sensors with 1min temporal resolution, 0.01 accuracy, 0.02-0.04 mm uncertainty and observation length from 10-35 years. An overview of the data from these two networks is given in Shehu et al. (2022). For both networks, the 1min time steps are aggregated to 5min and then Annual Maximum Series (AMS) are extracted for each station for 12 durations levels from 5min to 7 days. To avoid the underestimation of the rainfall depth due to fixed accumulation periods of 5, 10 and 15min, corrections factors of 1.14, 1.07 and 1.04 were used for the AMS of these durations according to the regulations in DWA-531 (DWA, 2012). Next, as described in Shehu et al. (2022) a jump elimination according to sensor changes is performed (DVWK, 1999) in order to ensure the stationarity of AMS at most stations for different duration levels.




Figure 1 The distribution and location of the two rainfall networks used for the uncertainty analysis of Depth-Duration Frequency Curves in Germany: where LS represents the long and SS the short recording stations. DEM is short for digital elevation model (m) from SRTM (NASA Shuttle Radar Topography Mission SRTM, 2013).

#### 2.1 Extreme Value Analysis

The local rainfall extreme value statistics describing the DDF curves for each station, are derived in two steps. First, the intensities of different duration levels are generalised according to the mathematical framework proposed by Koutsoyiannis et al. (1998) also illustrated in Equation (1):

$$i = i_d \cdot (d + \theta)^{\eta},\tag{1}$$

where i is the generalised intensity in mm/h,  $i_d$  is the AMS intensity in mm/h at each duration, d is the duration in hours and  $\Theta$ ,  $\eta$  are the Koutsoyiannis parameters optimised for each station. The optimisation of the Koutsoyiannis parameters is done by minimising the Kruskal-Wallis statistic. Second, a Generalized Extreme Value (GEV) distribution is fitted to the generalised intensities through the methods of the L-Moments (Asquith, 2021). The GEV is described by three parameters: location –  $\mu$ , scale –  $\sigma$ , and shape –  $\gamma$  (with notation according to Coles, 2001) as given in Equation (2). For a robust estimation of extreme values with return periods of 100 years, the shape parameter was fixed at 0.1. The decision to fix the shape parameter at 0.1 was made based on existing literature and previous analysis that we have conducted on the data set in Germany. For more information regarding the choice of generalisation or shape parameter, the reader is directed to our previous study (Shehu et al., 2022).—Keeping the shape parameter as fixed can be a reasonable choice to reduce the high uncertainty that is associated with the extreme values analysis at single stations. As shown in (Shehu et al., 2022), for return period higher than 20 years, the uncertainty from a free shape parameter is much higher than the uncertainty from keeping the shape parameter fixed at 0.1, which will cause the interpolation of extreme rainfall to be less certain.

$$F(x;\mu,\sigma,\gamma) = exp\left\{-\left[1+\gamma\frac{(x+\mu)}{\sigma}\right]^{-\frac{1}{\gamma}}\right\}, \qquad \gamma = 0.1$$

Finally, the local statistics of each station are described by five parameters: three from the GEV distribution  $(\mu, \sigma, \gamma)$  and two from the intensity generalisation over all durations  $(\theta, \underline{\eta}_{H})$ . Since the shape parameter is fixed at 0.1, only 4 parameters are regionalised independently from one another using kriging.

### 2.2 Direct Regionalisation (interpolation)

Here a spherical variogram is employed to describe the increment of the variance between any two points of observation situated at a specific distance h, as per Equation (3). The parameters of the variogram are estimated by of the methods of the least squares and human supervision.

$$\gamma(h) = c_0 + c \cdot \left(\frac{3h}{2a} - \frac{h^3}{2a^3}\right) \text{ for } h \le a \text{ and } \gamma(h) = c \text{ for } h = a , \tag{3}$$

where c<sub>0</sub> is the nugget, c the sill and a the range of the variogram. Once the theoretical variogram is known, it can be used as a basis for regionalising the statistical properties on a 5x5km² grid. The regionalisation (or the interpolation) with kriging is done in two steps, by considering independently the short (SS) and long (LS) recording stations. First, each of the SS parameters are interpolated with ordinary kriging (herein referred to as OK[SS]) based on the theoretical variogram of the SS dataset. Second, each parameter derived from the LS dataset is interpolated with external drift kriging KED[LS|SS] based on the theoretical variogram of LS dataset, whereas the OK[SS] serves as an external drift. The reason for this two-step procedure, is that the short recording stations have too little observation years an inadequate length for estimating extremes of high return period, but still provide useful information about the spatial trends. For more information regarding the choice of this spatial regionalisation, the reader is directed to our previous study (Shehu et al., 2022).

**Formatiert:** Schriftart: (Standard) Liberation Serif, Schriftfarbe: Text 1, Englisch (Vereinigte Staaten)

Formatiert: Schriftfarbe: Text 1

#### 2.3 Data Transformation

217

218

219

220

221

222

223

224

225

226 227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245246

247

A requirement for the spatial simulations (Sequential Gaussian Simulation - SGS), is that the target variable to be interpolated (in this case each of the 4 parameters), should follow a normal distribution. Following the quantile-quantile plot, with sample vs normal quantiles, illustrated in **Figure 2**, it is clear that the dataset (both LS and SS) are not normally distributed, as the extremes (both lower and upper tail) denote deviate clearly from the normal distribution (the dashed continuous lines). Therefore, in case of a Sequential Gaussian Simulation (SGS) for assessing the spatial uncertainty, a transformation to normality is required. Deutsch and Journel (1998) propose a normal score transformation based on the empirical probabilities (Weibull plot position) as indicated in Equation (4).

$$F(x)' = 1 - \left(\frac{k}{n+1}\right) \text{ and } x_{norm} = G^{-1}(F(x)'),$$
 (4)

where F(x)' is the empirical cumulative distributed function calculated based on the descending rank k of input data x, n is the number of available x-observation,  $G^{-1}$  is the inverse function of the gaussian distribution, and  $x_{norm}$  is the normalised input data.




Figure 2 Sample quantiles of the 4 obtained parameters for both <u>long (LS)</u> and <u>short (SS)</u> datasets in comparison with the theoretical quantiles from the normal distribution. The dashed lines represent the normal quantile lines for a perfect fitting between the sample and the normal quantiles.

Respectively a back-transformation algorithm is also available to transform back the dataset from the normal to its original space. However, the back-transformation may be problematic as the tail behaviour will be underestimated by the normal score and back transformation. An alternative approach to the normal score transformation, is the fitting of the theoretical cumulative probability functions (CDF) to the original dataset, and perform the transformation from the chosen theoretical CDF to the normal one. Here, the problem of the choice for tail extrapolation is substituted with the choice of fitting a theoretical CDF. Through the moment method of L-Moments, different theoretical distributions were fitted to the available datasets, for instance the Wakebly distribution (WAK), the Weibull (WEI), the Generalized Normal (GNO) and the Generalized Extreme Value (GEV) probability distribution. For more information about the CDF and the fitting of the parameters, the reader is directed to Asquith (2021), Hosking and Wallis (1997). Afterwards the Cramer von Mises Goodness of Fit test (CSöRgő and Faraway, 1996) is performed to test whether or not the observed data belongs to the chosen theoretical CDF. The p-value statistics is used to compare the empirical CDF with the theoretical one for each dataset, in order to select the most adequate theoretical CDF. The results of the p-value statistics from Cramer von Mises Test are shown in Table 1, and they reveal that the parameters of the long recording stations (LS) are better described by the WAK distribution, while the parameters of the short recording stations from the GNO distribution. All the parameters, except the  $\theta_{[SS]}$ , exhibit a very large p-value (higher than 0.90). Even though the p-value for  $\theta_{[SS]}$  is 0.24, the null hypothesis that the theoretical distribution describes the current dataset can still not be rejected. To keep a consistent choice between the short and the long dataset, the GNO was chosen, as the best theoretical distribution for the SS and the second best for LS (shown in bold letters in Table 1 Table 1).

**Table 1** p-values of Cramer-von-Mises test for testing if the different theoretical distribution fits well to the data. The higher the value, the higher the certainty in accepting the null hypothesis that the chosen CDF describes correctly the data.

Long Station recording stations Dataset					Short Station recording stations				
	(LS)					Dataset (SS)			
CDFs	wak	wei	gno	gev	CDFs	wak	wei	gno	gev
$\mu_{[LS]}$	0.99	0.8	0.94	0.91	$\mu_{[SS]}$	0.77	0.68	0.99	0.99
$\sigma_{[LS]}$	0.96	0.8	0.9	0.85	$\sigma_{[SS]}$	0.85	0.39	0.980	0.95
$\theta_{\text{[LS]}}$	0.91	0.67	0.78	0.76	$\theta_{[SS]}$	0.24	0.15	0.24	0.2
$\eta_{[LS]}$	0.94	0.36	0.36	0.25	$\eta_{[SS]}$	0.52	0.83	0.91	0.27

A comparison of these two transformations, normal score according to Deutsch and Journel (1998) and the quantile-quantile transformation based on fitted theoretical distribution, was performed priory on a cross-validation mode for the SGS runs in ordinary kriging and external drift kriging. The results of such comparison favoured the quantile-quantile transformation based on fitted theoretical distributions.

### 2.4 Data Bi-Normality

An additional precondition to run the SGS and assess the spatial uncertainty is the multivariate normality. However as stated in Deutsch and Journel (1998), the data for checking multivariate normality (the tri-variate, quadrivariate and so on) are hardly enough to allow the interference of the corresponding experimental multivariate frequencies. Thus, they suggest that if the bivariate normality conditions are not violated, one can continue with the SGS experiments. Here the bivariate normality is tested by comparing empirical indicator variograms of the normalised parameters sets with the respective ones from a Bi-Gaussian random function that shares the same variogram with the normalised parameter sets. First, a theoretical variogram is fitted to the normalised observed variograms from dataset LS and SS (separately). Next the analytical relation given at Deutsch and Journel (1998) linking the covariance  $C_y(h)$  with any normal bivariate CDF value (with mean 0 and standard deviation 1).

$$Prob\{Y(u) \le y_p, Y(u+h) \le y_p\} = p^2 + \frac{1}{2\pi} \int_0^{arc \sin C_Y(h)} \exp(-\frac{y_p^2}{1+sin\theta}) d\theta,$$
 (5)

where  $y_p$  in the normal p-quantile of the normal bivariate CDF, and the  $C_y(h)$  is the correlogram obtained from normalised LS and SS dataset. For a given threshold  $y_p$ , the bivariate probability will be:

$$Prob\{Y(u) \le y_p, Y(u+h) \le y_p\} = E\{I(u;p) \cdot I(u+h;p)\} = p - \gamma_I(h;p), \tag{6}$$


with I(u;p) equal to 1 for  $Y(u) \le y_p$  or equal to 0 if otherwise, and  $\gamma_I(h;p)$  is the indicator variogram for the p-quantile (corresponding to threshold  $y_p$ ) of the normal bivariate CDF. Three thresholds were chosen for the computation of the indicator variograms that corresponds to 0.25, 0.5 and 0.75 percentiles. Based on Equation (6), the generation of the Bi-Gaussian functions was performed of each set of data independently (short and long) with the GSLIB package. Lastly, the sample indicator variograms for the three thresholds are computed from the observed normalised datasets. The check consists in comparing for each threshold the empirical indicator variogram and the theoretical indication variogram from the normal bivariate CDF.

The obtained indicator variograms are shown in Figure 3 Figure 3 for empirical data set (in points) and for the Bi-Gaussian functions (in solid lines) of the two datasets (short and long). From Figure 3 Figure 3 it is visible that the Bi-Gaussian indicator variograms described well the empirical data sets for most of the cases. For instance, the  $\theta$  and  $\eta$  parameters show a good agreement for the two types of indicator variograms. For the  $\mu$  and  $\sigma$  parameters the agreement is better for the high thresholds than for the low one (0.25 percentile), where mainly the LS dataset differs more with the Bi-Gaussian indicator variogram than the SS dataset. To a certain degree this is expected, as the LS dataset is much smaller

Formatiert: Zentriert

Formatiert: Mit Gliederung + Ebene: 2 + Nummerierungsformatvorlage: 1, 2, 3, ... + Beginnen bei: 1 + Ausrichtung: Links + Ausgerichtet an: 0,63 cm + Einzug bei: 1,27 cm

than the SS dataset. Overall, the Bi-Gaussian indicator variograms match well with the empirical ones, and the bivariate normality conditions are not violated. Hence, the SGS can be used for spatial simulation of the parameter sets.

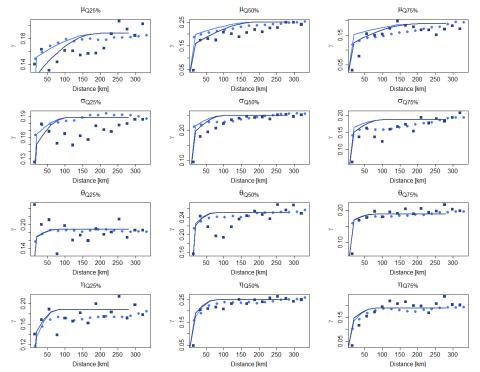

**Figure 3** Experimental indicator variograms for the two datasets (SS in light blue, LS in dark blue) for the 4 parameters and their respective fits of the Bi-Gaussian model derived theoretical curves (shown respectively in solid line).

# 3. Methods for uncertainty estimation

The regionalisation of the <u>four4</u> parameters describing the rainfall extreme value statistics, is performed using kriging, as the best regionalisation method from Shehu et al. (2022). The regionalisation is done primarily with the LS data and using the interpolation of SS parameters as an external drift. In this procedure, there are several sources of uncertainty that one should consider for the overall uncertainty, as illustrated in <u>Figure 4</u>Figure 4, which are respectively:

- Sample uncertainty in estimating local extreme value statistics (<u>four</u>4 parameters), herein referred to as the local uncertainty.
- The uncertainty in the external drift which originates from the uncertainty in the estimation of the variogram
  based on the SS stations, and from the uncertainty in the regionalisation of the SS statistics. Here, only the latter
  is considered, as previous work revealed that this is more relevant than the former.
- The uncertainty in the regionalisation of the LS statistics originating from the estimated variogram from LS stations, and the uncertainty of the spatial regionalisation (herein referred to as spatial uncertainty).

Overall, the methodologies to tackle these uncertainties can be categorised in three main groups: the local estimation, the variogram estimation and the spatial simulation (as illustrated in blocks in <u>Figure 4</u>Figure 4). The methodology for uncertainty estimation on each block is discussed accordingly in the following sections.




Figure 4 The main uncertainty sources in the regionalisation of the rainfall statistics for Germany for the selected methodology. Arrows indicate the calculation flow, and the blocks at the right represent the three main methodologies to tackle the uncertainty at each component.

#### 3.1 Local Non-Parametric Bootstrap

A non-parametric bootstrap approach is implemented in order to quantify the sample uncertainty of the local rainfall extreme value statistics. This means that for each station the AMS are resampled with replacement for the same length of observations and the local statistics are then derived base on the methodology explained in Section 2.1. This resampling procedure is run 100 times for each location (either LS or SS), and for each time the parameters describing the local extreme value statistics are calculated. The resampled parameter-sets are then used as input for the rest of the regionalisation approach to first investigate the effect of the local uncertainty on the regionalisation output (results shown in Section 4.2) or their impact on the overall uncertainty of regionalised DDFs curves in Germany (results shown in Section 4.3).

# 3.2 Variogram Simulations

A non-parametric bootstrap is implemented in the variogram uncertainty, with the precondition that the spatial dependency between stations is maintained. The whole station dataset (both short and long stations recordings) are grouped together, from which 133 stations are sampled randomly 100 times. Only 133 values from all the stations were sampled here, to address the uncertainty in computing the variogram from a small dataset that corresponds with the number of the long recording stations that were used to compute the variogram for the KED interpolation. For each of the sample, first the empirical variogram is calculated and then a theoretical spherical one is fitted automatically. Such sampling of variogram, is indirectly accounting the low station density and the short observation length for the final interpolation of KED[LS|SS]. The obtained variogram simulations are shown in Figure 5 Figure 5. For each of the estimated variogram, the kriging interpolation is performed and in the end its effect on the final regionalisation output is discussed in Section 4.2.




Figure 5 100 variogram realisations obtained from bootstrapping (shown in grey lines) the station datasets, the empirical variograms as observed by the normalised LS (in dark blue points) and SS database (in light blue points), and the respective fitted theoretical spherical variograms used for the interpolation.

#### 3.3 Spatial Simulations

The uncertainty in the spatial regionalisation is assessed by generating 100 equiprobable realisation of the normalised parameter sets, where each realisation is honouring the global statistics of the parameter (the spatial mean value and the variogram). Here a conditional simulation is performed, where these 100 realisations do not only share the global statistics but as well a set of observed values at certain locations. (ecoinciding with the LS locations). In other words, for the known locations where there are observations, either the nodes are not resampled (as in the case of simulated annealing) or the nodes are allowed to vary according to the variogram nugget when compared to the observations (as in the case of the sequential Gaussian simulation). The spatial simulations are conditioned to the location of the 133 long recording stations (LS) since they are the main input for the regionalization are considered the ground truth.

### 3.3.1 Sequential Gaussian Simulation (SGS)

The Sequential Gaussian Simulation (SGS) is the most straight forward algorithm for generating such equiprobable realisation and it is proven to be more robust than other algorithms (Pebesma and Wesseling, 1998). An overview of this procedure, where a normal continuous variable z(u) is modelled by a Gaussian stationary random function Z(u) is described as follows (Deutsch and Journel, 1998):

- 1. A random path is defined that is visiting each node of Germany grid (at 5km² spatial resolution) once. At each node *u*, fix the neighbouring conditional locations (either SS for OK[SS] and LS for KED[LS|SS]) and their observed values *z*, as well as the previously simulated *z* values at the grid node.
- 2. Do either ordinary kriging with the normalised short seriercording stationss (OK[SS]) or kriging with external drift with the normalised long series recording stations (KED[LS|SS]) using the respective variograms to estimate the global statistics (mean as per Equation (7) and variance as per Equation (8)) of the Conditional Cumulative Distribution Function (CCDF) at the random function Z(u) at the location u.

$$\mu(u) = \sum_{i=1}^{n} \lambda_i \cdot Z(u_i),\tag{7}$$

$$\overline{\iota}=1 \qquad (8)$$

$$\sigma^2(u) = C(0) - \sum_{i=1}^n \lambda_i \cdot C(u - u_i),$$

where  $\lambda_i$  are the weights as estimated by ordinary kriging for OK[SS] and kriging with external drift for KED[LS|SS],  $Z(u_i)$  is the conditional value of the target variable at the  $u_i$  location, with i corresponding to conditional values in the neighbourhood (within a maximum radius of 300km and within the range 12 to 24), C(0) is the variance and  $C(u-u_i)$  the covariance of the normalised dataset.

- 3. Draw randomly a value from this CCDF as z'(u) and add this simulated value to the conditional dataset.
- 4. Proceed to the next node, until all nodes are simulated.

Formatiert: Schriftfarbe: Text 1

Formatiert: Schriftfarbe: Text 1

Formatiert: Schriftfarbe: Text 1

The "gstat" package available in R is used to generate such realisation both for the ordinary kriging interpolation of the SS database (OK[SS]) and for the external drift kriging interpolation of the LS database (KED[LS|SS]) (Pebesma, 2004). Note that the spatial simulations are always performed on the normal space (normal transformation of the dataset). For the simulation of the KED[LS|SS] both the input dataset LS and the external drift OK[SS] are as well in the normal space. A back-transform to the original space is done after each spatial simulation only for the final product KED[LS|SS].

### 3.3.2 Simulated Annealing Simulations (SA)

Simulated Annealing is an alternative method for generation conditional stochastic images. New images are created by randomly selected values from the observed histograms, such that global statistics like variogram, marginal distribution, correlation to a secondary variable are maintained. Unlike the SGS method, no prior assumption of normality is needed, and hence the observed data (with no prior transformation) can be directly used. An overview of this procedure is found in (Deutsch and Journel, 1998) and also explained shortly below:

- An initial image is randomly created by the observed histogram. For nodes where data is observed, the random
  values are substituted by the observed ones. Thus, the observed values are exactly reproduced. This image
  matches the observed histogram and conditional data, but not the observed variogram.
- 2. An objective function is calculated, and a conditional simulation is reached when the objective function is as close as possible to zero. For generation of the external drift spatial information (OK[SS]) only the variogram is used as part of the objective function, while for the final parameter estimation (KED[LS|SS]) additionally the correlation with the external drift is preserved.

$$OF_{OK[SS]} = w_1 \sum_{h} \frac{[\gamma'(h) - \gamma(h)]^2}{\gamma(h)^2}, and OF_{KED[LS[SS]} = w_1 \sum_{h} \frac{[\gamma'(h) - \gamma(h)]^2}{\gamma(h)^2} + w_2 [\rho' - \rho]^2$$
(9)

where  $\gamma$ '(h) is the simulated variogram,  $\gamma$ (h) the observed variogram,  $\rho$ ' the simulated correlation and  $\rho$  the observed correlation with the external drift,  $w_1$  and  $w_2$  are weights for the two components (both equal to 5).

- If the value of the objective function is not reached, a new image is created by swapping randomly values of pair nodes (not conditioned nodes), and the objective function in recalculated.
- 4. If the new objective function is better than the previous one (closer to zero), then the swap is accepted, if not the swap is accepted based on an exponential probability distribution. The parameter of the exponential probability distribution is equal to the temperature in simulated annealing.

$$Prob._{accept} = \begin{cases} 1, & \text{if } OF_{new} \le OF_{old} \\ e^{\frac{OF_{old} - OF_{new}}{t}}, & \text{otherwise} \end{cases}$$
(10)


where  $Prob_{accept}$  is the acceptance probability distribution, t is the temperature (which decreases with each iteration),  $OF_{new}$  is the new objective function obtained by swapping a pair of values and  $OF_{old}$  is the previous objective function value. As higher the temperature, the higher the probability to selected such unfavourable swaps.

- Redo step 3-4, until a maximum number of swaps is reached, or if a maximum number of accepted swaps is
  reached. If this is the case, the temperature t is reduced by a reduction multiplicative factor Ωλ (here as 0.1).
- 6. Redo steps 3, 4, and 5 until convergence is reached or if the maximum number of possible swaps is reached S times. The simulation is then completed and the image is frozen.

The "GSLIB" program from (Deutsch and Journel, 1998) was employed to generate 100 random realisation fields for both the external drift and the interpolation. Note two main differences of the SA with SGS: i) no data transformation and back transformation is required, ii) by <u>fixating fixing</u> a seed number, the random path in SGS is same for all the parameters, while for the SA the random path for each parameter depends on how fast the optimum criteria is reached.

#### 3.4 Uncertainty Estimation and Propagation

Based on several simulations, the uncertainty is evaluated only at the locations on the long series-recording stations. (LS) – in total 133 stations. Different experiments are conducted in order to investigate first how the sources of uncertainty are propagating to the final regionalisation of the 4 parameters (experiments 1-4), and how the main sources of uncertainty are interacting with each other to produce the total uncertainty (experiment 5). An overview of these experiments and the sources of uncertainty they consider, is given in <a href="Figure 6-Figure 6-



**Figure 6** Different experiments run for the propagation of the uncertainty. The red bold letters indicate the source of uncertainty investigated for each experiment and how it propagates throughout the regionalisation procedure (in dashed arrows). The number of arrows at the experiment 5 indicate different uncertainty sources combined together.

**Table 2** The description of the uncertainty propagation for each of the experiments shown in <u>Figure 6</u> Figure 6, and the number of realisations considered for each experiment.

Exp.	Explanation	No. of realisations	
1	For each local re-sampled extreme value statistics, the regionalisation procedure is run.	100	
2	For each variogram estimated from LS+SS database, the regionalisation procedure is run.	100	
3	For each spatial realisation of the OK[SS], the regionalisation procedure is run.	100	
4	For each spatial realisation of the KED[LS SS], the regionalisation procedure is run.	100	
5	For each local re-sampled extreme value statistics and spatial realisation of KED[LS SS] the regionalisation procedure is run.	10,000	

For each of these experiments, the final regionalisation step of the 4 parameters (KED[LS|SS]) is run on a cross-validation mode: which means that each of the LS station is left stepwise outside of the database, and the remaining database is used to estimate this LS location. The simulations at the LS stations are then used as a basis for the uncertainty estimation of each parameter separately, and for the final rainfall depth (RD) obtained at specific return periods (T1a, T10a and T100a)

and 12 duration intervals (5, 10, 15, 30, 60, 120, 180, 360, 720, 1440, 2880, 7340 mins). For each LS location, the uncertainty is estimated based on the experiment simulations using the following criteria:

Normalised 95% Confidence Interval Width: 
$$nCI95_{width}$$
 [%] =  $100 \frac{x_{97.5\%} - x_{2.5\%}}{\bar{x}}$ , (11)

where x represents the simulations of the target variable at a specific location,  $x_{97.5\%}$  and  $x_{2.5\%}$  are the respective 97.5% and 2.5% quantile of the x simulations, and  $\bar{x}$  is the expected value of x from the simulations of an experiment. The normalised 95% Confidence Interval Width (nCl95<sub>width</sub>) is a measure of spatial simulations precision: the smaller the value, the more robust or precise is the estimation method for x.

Average Error over all simulations: 
$$Bias \ [\%] = 100 \frac{\sum_{sim=1}^{nsim} \binom{x_{sim} - x_{obs}}{x_{obs}}}{nsim}, \tag{12}$$

where x represents the simulation of the target variable at a specific location from the random simulation sim,  $x_{obs}$  is the local observed target variable at the specific location, and nsim represent the total number of simulations for each experiment. The average error over all the simulations measures the accuracy of the realisation compared to local input data. When rainfall depth (RD) is the target variable, one can go one step further and measure how well the realisations capture the monotonically increase of the RD at different duration intervals for specific return periods, which corresponds to the evaluation criteria in estimating the best regionalisation method for Germany on our previous study (Shehu et al., 2022).

Percentage RMSE: 
$$RMSE_{st,Ta}[\%] = 100 \cdot \frac{\sqrt{\frac{1}{D} \sum_{d=1}^{D} (RD_{regio,d} - RD_{local,d})^2}}{\frac{RD_{local}}{RD_{local}}},$$
 (13)

where Ta and st are the respective selected return period and LS location,  $RD_{regio}$  corresponds to the regionalised rainfall depth (with KED[LS|SS]),  $RD_{local}$  the locally derived rainfall depth from the normalised GEV function (from Equation (1) and (2)), the  $\overline{RD_{local}}$  is the mean local rainfall depth over all duration levels, and the d is an index indicating the iteration from 1st to D=12th duration interval. Through the Equations (12) and (13) and the cross-validation mode, it is possible to compare the performance the simulations with the direct regionalisation (i.e. interpolation) from Shehu et al. (2022), in order to investigate if the simulation methods are appropriate.

# 4. Results and Discussion

### 4.1 Comparison of different models in modelling spatial uncertainty

Before analysing the propagation of different uncertainty sources, the best method for computing the spatial uncertainty is investigated. As discussed in Section 3.3 two methods are employed for the generation of 100 equiprobable realisations both for the drift information (OK) and the interpolation of the long stations recording stations with external drift kriging (KED): the Sequential Gaussian Simulation (SGS) as method 1 and the Simulated Annealing (SA) as method 2. Figure 7Figure 7 illustrates the parameter precision (nCl95width[%]) and accuracy (Bias [%]) of these 100 simulations calculated in cross-validation mode for each of the long recording locations (in total 133) for both methods. Note that the transformation to normality is required only for the SGS and not the SA simulations, as the SA simulations are performed based on observed histograms. The main differences between the two simulation methods are seen in the precision obtained from the 100 realisations (nCl95width – upper row), where the realisations from the SA approach are more precise than the ones from the SGS approach. The difference in the precision is much higher in the KED[LS|SS] than for the OK[SS] for all the 4 parameters. In terms of parameter accuracy, both methods have similar performance for both OK[SS] and KED[LS|SS], with SA having slightly higher errors than the SGS and the direct regionalisation (i.e. interpolation) performance (particularly for the  $\mu$  and  $\theta$  parameter). Overall it seems that the SA is more precise than the SGS, nevertheless as the focus is on Depth-Duration-Frequency curves, the methods should be as well compared in their ability to estimate the DDF curves. For this purpose, for each cross-validation location, the RMSE [%] was first calculated as per Equation (13)

for each simulation, and then the median over the 100 simulations was obtained. The median RMSE [%] performance for different return periods for both methods are shown in Figure 8Figure 8. The median RMSE [%] performance obtained by the SGS method seems to be in accordance with the performance of the direct regionalisation (interpolation) for both OK[SS] and KED[LS|SS]. In contraset, the RMSE [%] performance from the SA simulations are slightly worse than the direct regionalisation for OK[SS], and much worse for the KED[LS|SS] over all return periods (median up to 5-8% higher). Even though the SA produces more precise simulations of parameters, it fails to maintain the inter-relationship between the parameters, causing lower accuracy in the DDF estimation. The SGS on the other hand, keeps the same level of accuracy like the direct regionalisation (interpolation) but with a lower precision. Since the aim is to keep accuracy as in the direct regionalisation (interpolation), SGS was chosen as a more suitable method to model the spatial uncertainty.

Also, since the SGS produces a higher range of simulations, the estimated precision, in the end, is more conservative than the SA procedure.

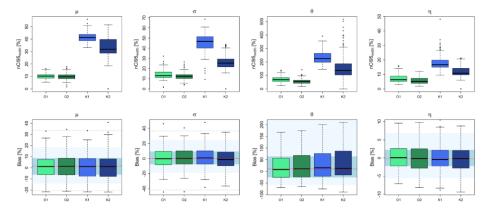


Figure 7 The precision (nC195<sub>width</sub> [%]) and accuracy (Bias [%]) of two different spatial simulations methods (1-SGS and 2-SA) for the drift regionalisation (O) and final regionalisation (K) of the 4 parameters. The boxplots illustrate the performance over the 133 LS locations. The background shades in the lower row illustrate the accuracy of the direct regionalisation (i.e. interpolation) of observed local statistics in a cross-validation mode, where: red dash indicates the median accuracy over all stations, the blue region the inter-quantile range (IQR) of all stations, the light blue region the 95% and 5% quantiles, and the grey dashed lines the maximum and minimum performance over all stations.




Figure 8 The accuracy (RMSE [%]) of two different spatial simulations methods (1- SGS and 2 - SA) for the drift regionalisation (O) and the final regionalisation (K) of the Depth-Duration-Frequency curves. The boxplots illustrate the median RMSE over the 133 LS locations. The background shades illustrate the accuracy of the direct regionalisation (i.e. interpolation) of observed local statistics in a cross-validation mode, where: red dash indicates the median accuracy over all stations, the blue region the inter-quantile range (IQR) of all stations, the light blue region the 95% and 5% quantiles, and the grey dashed lines the maximum and minimum performance over all stations.

#### 4.2 Effect of different uncertainty components for the estimation of the DDF Curves at ungauged locations

457

458

459

460

461

462

463

464

465

466

467

468

469

470

471

472

473

474

475

476

477

478

479

480

481

482 483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

Experiments 1 to 4 were conducted in order to investigate the uncertainty propagation from each component of regionalisation to the final parameter and DDF values, while Experiment 5 considers a propagation of the two main uncertainty sources interacting together in the final regionalisation of the extremes. The parameter uncertainty is calculated from the number of simulations given in Table 2 Table 2 for each experiment, and is illustrated in Figure 9 Figure 9; where the upper rows represents the precision (nCI95<sub>width</sub> [%]), while the lower rows the accuracy (Bias [%]) of estimated parameters in a cross-validation mode. Figure 10 Figure 10 illustrates the DDF uncertainty at duration levels from 5min up to 7 days for three return periods 1, 10 and 100 years: precision (nCI95width [%]) shown in upper row and accuracy (RMSE [%]) at the lower row. The accuracy of the simulations is compared with the direct regionalisation (i.e. interpolation) of the observed parameter sets (see caption for more details). It is worth mentioning that the difference between the different component simulations (Experiment 1 to 4) is visible only at the precision of the simulations and not at the accuracy. As illustrated by Figure 9-lower row and Figure 10-lower row, the accuracy at estimating the parameters (Bias [%]) and the DDF values (RMSE [%]) is not changing considerably from one experiment to the other. Also, when comparing the boxplots with the performance obtained from the direct regionalisation (interpolation - shown with the background colours), the same accuracy more or less is observed. Therefore, the analysis will be focused on the variation of precision (nCI95width [%]) according to different sources of uncertainty. Regarding the parameter uncertainty as shown by Figure 9Figure 9, the spatial KED[LS|SS] simulations (Exp. 4) represent the highest source of uncertainties for all the parameters: the nCl95width [%] ranges from 18% for the  $\eta$  parameter, between 40-50% for the two GEV parameters  $\mu$  and  $\sigma$ , and up to 250% for the  $\theta$ parameter. The parameters are varying greatly in space, and that is why when sampling from space (spatial simulations) the prediction intervals are higher than for the bootstrapping case (or the other cases). For all the parameters, the nCI95width of the KED[LS|SS] simulations are at least 3 times higher than the nCI95width of the other uncertainty sources, concluding that the spatial simulations add to the regionalisation the biggest uncertainty. Second to the KED[LS|SS] simulations, are the resampling of local statistics (Exp. 1) and the OK[SS] simulations (Exp. 3), which seems to produce similar levels of nCI95<sub>width</sub> for most parameters ranging from 10% for the location -  $\mu$ , 90% for the  $\theta$  and only 8% for the  $\eta$  parameter. Only for the scale GEV parameter ( $\sigma$ ) is the nCI95<sub>width</sub> from the local statistics resampling higher ( $\sim$ 20%) than the one from OK[SS] (~15%). It is interesting to see, that the obtained nCI95width from the variogram bootstrapping (Exp. 2) are lower than 5% for almost all parameters (exception  $\theta$  parameter which is lower than 20%). This suggests that the variability between interpolated fields with different variograms is reproducing very similar spatial parameters, even though the variograms differ greatly in terms of nugget, sill and range (see Figure 5Figure 5). The same behaviour is also seen in estimated DDF curves for different return periods (Figure 10 Figure 10 - upper row), where the variability as exhibited by the variogram bootstrapping (Exp. 2) is very low (less than 10%) compared to the other simulations, and as well constant over the duration levels. On the other hand, the simulations from both local resampling (Exp. 1) and OK[SS] simulations (Exp. 2) exhibit similar patterns of nCI95width for the selected DDFs curves (Figure 10Figure 10 – upper row). Unlike the nCI95width exhibited at the parameter simulations, here it is more visible the difference between these two components, as the nCI95% produced by the local resampling (Exp.1) are 1-5% higher than the one produced by the OK[SS] simulations (Exp.3). As seen also in Figure 10 Figure 10 - upper row, the nCI95 width from the KED[LS|SS] (Exp. 4) are the highest compared to the other components, emphasizing that the spatial uncertainty of the KED[LS|SS] is the main source of uncertainty when regionalising the DDF curves. Also, unlike the other types of uncertainties (Exp. 1 to 3), the spatial uncertainty from the KED[LS|SS] depends greatly on the duration level, with nCI9width values of short duration intervals (from 5min up to 2 hours) being considerably higher than the other experiments (reaching on average values of 40%). Moreover, Exp. 4 boxplots are much wider than Exp. 1 to 3, suggesting that the spatial uncertainty is highly dependent on the location. The high uncertainty values in terms of precision for Exp. 4, come with the cost of slightly increased error in RMSE (Figure

501

502

<u>10</u>Figure 10 -lower row), where the median RMSE values are 1-2% higher than those of the direct regionalisation, but still within the Inter-Quantile-Range (IQR) of the direct regionalisation performance.

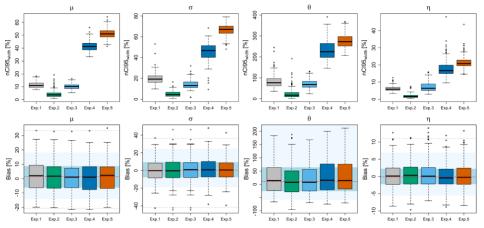


Figure 9 The obtained precision (first row - nCl95<sub>width</sub> [%]) and accuracy (lower row - Bias [%]) from propagating the multiple realisations at different components of the regionalisation procedure to the final parameter sets. The background shades in the lower row illustrate the accuracy of the direct regionalisation (i.e. interpolation) of observed local statistics computed as well in a cross-validation mode, where: red dash indicates the median accuracy over all stations, the blue region the inter-quantile range (IQR) of all stations, the light blue region the 95% and 5% quantiles, and the grey dashed lines the maximum and minimum performance over all stations.

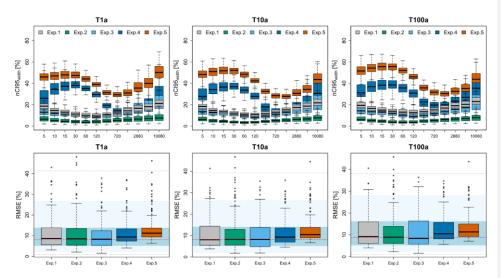


Figure 10 The obtained precision (first row - nC195[%]) and accuracy (lower row - RMSE [%]) from propagating the multiple realisations at each component of the regionalisation procedure to the final DDF values. The background shades in the lower row illustrates the accuracy of the direct regionalisation (i.e. interpolation) of observed local statistics computed as well in a cross-validation mode, where: red dash indicates the median accuracy over all stations, the blue

region the inter-quantile range (IQR) of all stations, the light blue region the 95% and 5% quantiles, and the grey dashed lines the maximum and minimum performance over all stations.

So far, the experiments 1 to 4 considered the propagation of singular uncertainty sources to the final regionalisation of

parameters and DDF curves in Germany. Experiment 5 considers a propagation of the two main uncertainty sources

503

504

505

506 507

508

509

510 511

512513

514

515

516

517

518

519 520

521

522

523

524

525

526

527

528

529

530

531

532

533

534

535

536

537538

539

540

541

interacting together in the final regionalisation of the DDF curves. As stated before, the most important sources are; the local estimation of rainfall extreme statistics, and the spatial uncertainty in regionalisation (KED[LS|SS]). As the variogram and the external drift is calculated for each local resampling dataset, the uncertainty of variogram and external drift is already included in the propagation of uncertainty from local resampling to spatial simulations. For each of the two components, 100 realisations are run, resulting in a total of 10,000 simulations. Overall, the final and total uncertainty from Exp. 5 follows a similar pattern to the uncertainty from KED[LS|SS] simulations, but due to the local uncertainties, it manifests higher values of nCI95width and RMSE (as seen in Figure 9 and 10). The variation of the total nCI95width for almost all parameters is 10-20% higher than those of Exp.4, with the GEV parameters reaching values of 50% ( $\mu$ ) to 70%(σ), the θ parameter up to 270% and the η parameter up to 20%. Consequently, the variation of the total nCI95<sub>width</sub> over the duration levels is between 35-50% for return periods 1 and 10 years and between 40-80% for return period of 100 years. As with the KED[LS|SS] simulations (Exp. 4), the durations shorter than 120min and the ones longer than 3 days, exhibit higher nCI95width values, with the durations from 6 - 48 hours having the highest precision (lowest nCI95width values). Another property seen from experiment 5 is that the variation in space (the wideness of boxplots) is narrower than in Exp. 4 for most of the durations, suggesting that the final spatial uncertainty is more constant in space (inheriting a property from local uncertainty – Exp. 1). In term of accuracy, the RMSE [%] has been increased on average with 3%for 1-year return period, and to 4-5% for 10-100 years return periods, differing slightly from the direct regionalisation (i.e. interpolation) performance, but still within the Inter-Quantile-Range (IQR) of the direct regionalisation. Some outliers are present in the accuracy plot (lower row Figure 10), however expect for one location, these outliers are within the maximum RMSE manifested by the direct regionalisation. The behaviour of these outliers emerges both from parameter outliers and from looking at the quantiles. They are present at locations where parameters are considerably different from the neighbour long observations (as in the case of singular stations in the Black Forest or the Alps), or where a parameter outlier is located (as in the case of Münster City where a very rare extreme event in 2014 causes a high value for the scale σ parameter) and are not geographically clustered. Since the median of the simulations from experiments 5 is increasing slightly the RMSE [%] but still within the IQR of the direct regionalisation, the simulations can be used to quantify the total uncertainty range for the regionalisation of the Depth-Duration-Frequency Curves. Under this context, the nCI95<sub>width</sub> [%] values in Figure 10Figure 10 can be divided by two, to show the tolerance range above or below the predicted values at each node from the direct regionalisation. For instance, if at a specific location, for duration of 5min and return period 100 years, the simulated nCI95[%] is 40%, which means that the regionalised rainfall depth at this location is varying with 720% of its mean value. A parabolic relationship is visible for experiments 1-3, with lower nCI95width values at the mid-duration levels (1 and 2 hours) and increasing values at lower and longer durations. This parabolic behaviour over the different duration levels is attributed to the Koutsoyiannis framework for generalising the intensities over all durations by the two parameters  $\theta$  and  $\eta$ . A particular behaviour is the variation of the nCl95<sub>width</sub> over the DDF values from the KED[LS|SS] simulations (Exp. 4), which is inherited as well at the final uncertainty computation (Exp. 5). The behaviour exhibited by KED[LS|SS] simulations does not follow a parabolic function as in Exp. 1, Exp. 2 and Exp. 3, but more a sinusoidal one. This can be attributed to two main reasons: 1. The effect of the Koutsoyiannis parameters on different durations, and 2. The spatial simulations of the SGS algorithm following the transformation to normality.

543

544

551

555

557

559

560

561

562

563 564 Figure 11 Figure 11 – upper row illustrates the observed empirical and simulated CDF from Exp. 4 for each parameter extracted from the LS dataset. Overall the simulated CDFs agree well with the observed CDFs, however the tails might diverge slightly. This is particularly true for the lower tail of the  $\theta$  and  $\eta$  parameters, and the upper tail of the  $\sigma$  parameter. This occurs as the transformation is done on a continuous CDF, a GNO is first fitted to the data and based on the GNO-CDF the transformation is performed. Nevertheless, this is not negative, as like this, values outside the observed range are simulated, and hence higher or lower values can be simulated as well. As stated in (Marra et al., 2019b), the rainfall stations will not capture the maximum intensities of a storm, and thus is almost certain that they don't represent the high possible intensities. Therefore, generating higher or lower parameter values than observed is crucial in the generation of stochastic simulations. Figure 11 Figure 11 - lower row illustrates the correlation between pairs of LS parameters (shown in red dots), and the corresponding correlations obtained from the 100 KED[LS|SS] simulations run in the cross-validation mode. For the  $\mu$ - $\sigma$  pair the observed correlation is well captured as it coincides with the median of the simulations. To a certain degree, this is also true for the  $\theta$ - $\eta$  pair. The main differences are in the relationships between the GEV and Koutsoyiannis parameters, where the simulated correlation is much higher than observed. In particular the correlation between  $\mu$ ,  $\sigma$ , and  $\theta$  are higher than the correlation between  $\mu$ ,  $\sigma$ , and  $\eta$ . This explains why the precision of the KED[LS|SS] has a sinusoidal behaviour. The fluctuation of the  $\theta$  parameter is affecting the uncertainty of the short durations (mainly from 5 to 60min), while the fluctuation of the η parameter affects the uncertainty at short (5-30min) and very long durations (12hours to 7 days). Since the  $\theta$  parameter is highly correlated with the  $\mu$  and  $\sigma$  parameters, its fluctuations will result in a smaller uncertainty than the  $\eta$  fluctuations, resulting in a slight increase of precision between the duration of 5-30mins.

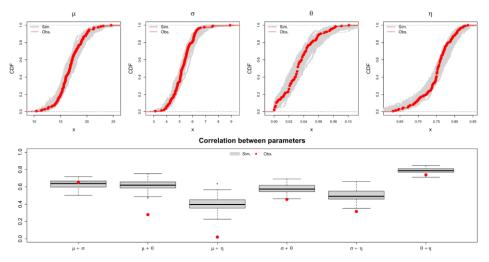


Figure 11 upper row - empirical CDF simulated from Exp.5 (in grey) and from observed paramter values (in red) over the 133 locations; lower row – observed correlations calculated in space between pairs of LS parameters (shown in red dots) and the respective correlations from 100 KED/LS\SS\ simulations (shown in the grey boxplots).

In KOSTRA2010R, which provides design storms for Germany, no objective uncertainty analysis was performed to give the confidence intervals between 10-20% and hence should not be directly compared with the objective uncertainty estimation performed here. The total uncertainty considered here (from Exp. 5) depends not only on the return period, but as well on the duration level. The results from Figure 10 Figure 10 can be used to determine the tolerance above (+) and below (-) the

median for the 95% confidence level. This will result in a median uncertainty range from ±15-25% for low return periods (lower than 10 years), and from ±20-40% for high return periods (higher than 10 years). Moreover, the short durations (5min to 2 hours) are in general 20-30% more uncertain than the longer durations (6hours – 1 day). The behaviour exhibited here is in accordance also with other studies (for instance Marra et al., 2017) where the shorter duration intervals are more uncertain than the ones of 1 day. In this section we compare the uncertainty estimation from two experiments 4 and 5, to see how they distinguish from one another. Uncertainty from experiment 1 is left outside, not only to keep the graphics simple for visualization, but also because it is much narrower than for the other 2 experiments and it is enclosed in Exp. 5. Examples of Depth-Duration-Frequency Curves and tolerance ranges for three stations and three returns periods (T=1,10 and 100 years) are illustrated in Figure 12 Figure 12 for three methods: only spatial KED[LS|SS] simulations (from Exp. 4) in blue, local and spatial simulations (from Exp. 5) in orange, and local derived DDF curves in dashed black line. Note that the results shown here are also obtained in cross-validation mode, which of course overestimate the overall uncertainty at these locations. The first station KO00830 is located in Oberstdorf (a town in the Allgäu Alps of Germany), the second KO000490 in Soltau Lower Saxony, and the third KO00550 in Emmendingen in the Black Forest region. These three stations were selected as representative of different regions and behaviours. Over all the stations, the tolerance range computed by the two experiments are wider at short duration intervals. This is true for all return periods, but the tolerance

Formatiert: Schriftart: Fett

Feldfunktion geändert

ranges get wider with increasing return period. As seen from—first row, the expected rainfall depth in the German Alps is much higher than the two others, followed by the station in Soltau and the one in the Black Forest. Because of the low station density in the Alp region, the tolerance range is bigger than in other locations. Overall the two products are similar with each other, with the main difference present mainly at the durations from 6 to 12 hours, where Exp. 5 exhibits wider tolerance ranges. Regarding the median estimation of DDF from both experiments, the main difference is seen in the Alps, where the Exp. 5 agrees better with the observed values. Lastly, we recommend quantifying the uncertainty based on Exp. 5, since the tolerance ranges are better representing the duration levels from 6-12 hours and its median is matching better with the observation.

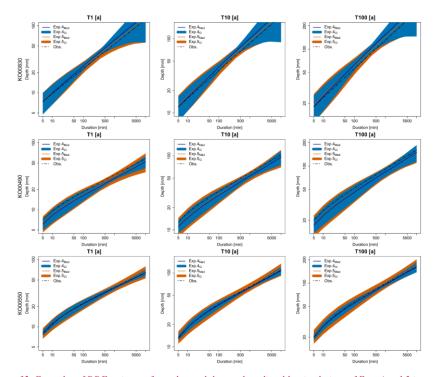


Figure 12 Examples of DDF estimates from observed data and predicted by simulations of Exp. 4 and 5 in a cross-validation mode: as median over all simulations and as 95% tolerance ranges from all simulations: upper row for return period T=1years, middle row for T=10years and lower row for return period T=100years. Three stations are shown here: K000830 located in the German-Alps, K000490 location in Lower Saxony, and K000550 located in Black Forest.

Formatiert: Schriftart: Fett

Formatiert: Beschriftung, Abstand Vor: 0 Pt.,

Zeilenabstand: 1,5 Zeilen

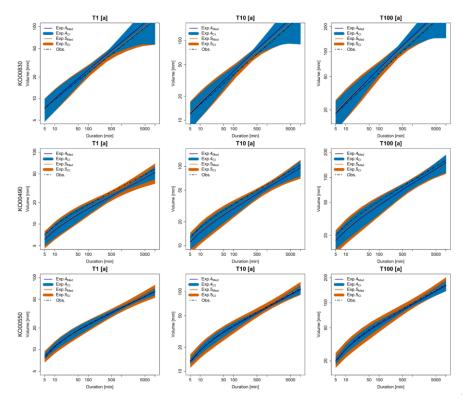


Figure 12 Examples of DDF estimates from observed data and predicted by simulations of Exp. 4 and 5 in a cross-validation mode: as median over all simulations and as 95% tolerance ranges from all simulations: upper row for return period T=1years, middle row for T=10years and lower row for return period T=100years. Three stations are shown here: K000830 located in the German-Alps, K000490 location in Lower Saxony, and K000550 located in Black Forest.

# 4.44.3 Spatial structure of uncertainty for whole Germany

Spatial maps of precision were generated for three experiments (Exp. 1, 4 and 5), by using the whole dataset, in order to investigate the spatial distribution of the precision when generating the DDFs curves for Germany. The precision in terms of  $nCI95_{width}$  [%] for the 4 parameters describing the extreme value statistics are given in Figure 13Figure 13. It can be seen that the different sources of uncertainties exhibit different precision over Germany. For instance, a propagation of the local uncertainty (Exp. 1 showed at the first row), is causing less precision at observed locations (shown in black) than at unobserved location. This is because, the resampling of the target network (LS) proves more uncertainty than resampling the external drift network (SS). Therefore, uncertainty estimated from Exp. 1 is not enough to capture the spatial structure of the uncertainties. On the other hand, Exp. 4 shows a clear spatial structure for uncertainty (mainly for three parameters  $\sigma$ ,  $\theta$ , and  $\eta$ ) with the North-West and South of Germany having higher uncertainty ranges. This follows the precipitation regime and the station density in Germany; the South parts records higher precipitation amounts because of the German Alps (so it is a region with clearly different behaviour than the rest of Germany), while the North-West has a lower station density for both the LS and SS datasets in comparison with the rest of Germany. The uncertainty range at two parameters  $\mu$  and  $\sigma$  is increasing with 30-40% for whole Germany when combining the local with spatial uncertainty (Exp. 5) in

comparison with only spatial uncertainty (Exp. 4). The uncertainty at the parameters  $\theta$  and  $\eta$  remains more or less at similar levels, with similar spatial patterns. Thus, including the local uncertainty mainly influences the parameters of the GEV distributions. It is interesting to see in Exp. 5, that at the location of the long stations recording stations (shown in black squares), the uncertainty of the parameters  $\mu$  and  $\sigma$  is much lower than for the rest of the regions. This is an expected behaviour, as observed locations should be more certain than unobserved ones, and as the station density decreases, so increases the uncertainty. This behaviour, not seen in other experiments, seems to be captured quite well by Exp. 5. This is particularly true for the GEV parameters, while the Koutsoyiannis parameters show an additional spatial variability of uncertainty that follows the main elevation features in Germany (represented by the external drift): with North-West and South Germany having higher uncertainty ranges. Another interesting point is the high uncertainty associated at the  $\sigma$  parameter by Exp. 5 at Münster city (shown in a red circle) which is as well visible at Exp. 1. The high uncertainty of the scale parameters comes mainly from the local resampling bootstrap. As discuss in Shehu et. al (2022) a very rare extreme event has been recorded in 2014 in Münster, which affects the extreme value analysis considerably. Thus, the integration of the local uncertainty becomes mandatory to estimate the uncertainty when including these rare events (with a very high return period) in the estimation of DDF curves for design purposes.

Figure 14Figure 14 illustrates the spatial distribution of uncertainty (computed here in term of precision nCI95width [%]) for the durations 5min, 1hour, and 1 day and return period of 100 years: upper row - only from local uncertainty (Exp. 1), second row - only from spatial uncertainty (Exp. 4) and lower row - from both local and spatial uncertainty (Exp. 5). The uncertainty ranges exhibited by Exp. 1 (only considering the local uncertainty) are very similar throughout all three durations and maintain similar spatial structure as with the parameter uncertainty in Figure 13Figure 13. Here, the difference between observed and unobserved locations is small and, following the parameter precision, the observed locations have higher uncertainty that the unobserved ones (on average 15-20% higher nCI95width values). In Exp. 4 there is a clear difference between the uncertainties of different durations, where the uncertainty of very short and very long durations (5min and 1day) are governed by the spatial structure of  $\theta$  and  $\eta$  parameters. The uncertainty of 1-hour durations are more or less uniformly distributed, but with the North-West region exhibiting higher uncertainties than the rest of Germany. At Exp. 5 the uncertainty for 5min durations has been increased considerably when including the local uncertainty (from 20-55% in Exp. 4 to 80-100%). The uncertainty of 1-hour durations exhibits similar patterns but is increased slightly from 45% to 55% at Exp. 5. For 1-day duration, the uncertainty ranges are as well increased by Exp. 5, with values higher at the southern part of Germany (where the German Alps are located) and at the northern part of Germany near to the North Sea. The extreme event at Münster, influences the uncertainty of all durations but has a higher impact of short durations. Based on such propagation of uncertainty, tolerance ranges between \(\pi 30-60\%\) should be expected in Germany for 5min duration intervals,  $\mp 15$ -45% for 1-hour durations and  $\mp 20$ -50% for 1-day durations. Overall, the combination of local resampling with geostatistical spatial simulations provides the best method for the assessment of uncertainty in regionalisation DDF curves in Germany. First, and most importantly, the precision of these curves is higher at the location of long recording stations, and decreases in ungauged locations according to the distance from the long observations and the density of the observations in the vicinity.

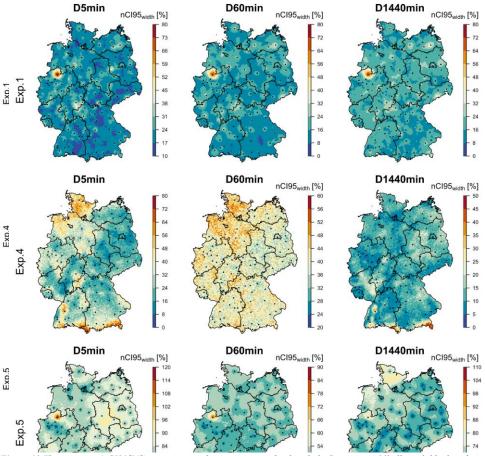


Figure 13 The precision (nC195[%]) in estimating the 4 parameters for the whole Germany with!! all available data for two experiments: upper row – results obtained from the propagation of 100 local resampled data to the final regionalisation (Exp. 1), middle row - results obtained from 100 spatial simulations of KED[LS|SS] (Exp. 4), lower row - results obtained from 10,000 local resampling and spatial simulations of KED[LS|SS] (Exp. 5). The black squares indicate the locations of LS, while the black lines illustrate the boundaries of German Federal states. Note that the ranges for the legend colours are changing for each experiment in order to emphasize the spatial structure of each experiment.

Figure 14 The precision (nCl95[%]) in estimation rainfall depth at different durations and 100 year return period for whole Germany with all available data for three experiments: upper row – results obtained from the propagation of 100 local resampled data to the final regionalisation (Exp. 1), middle row –results obtained from 100 spatial simulations of KED[LS|SS] (Exp. 4), lower row – results obtained from 10,000 local resampling and spatial simulations of KED[LS|SS] (Exp. 5). The black squares indicate the locations of LS, while the black lines illustrate the boundaries of German Federal states. Note that the ranges for the legend colours are changing for each experiment in order to emphasize the spatial structure of each experiment.

### 5. Conclusion and Outlook

In Shehu et al. (2022), a regionalisation based on external drift kriging was employed to calculate Depth-Duration-Frequency (DDF) curves in Germany. Based on these results, an uncertainty analysis was conducted here to estimate the precision of the obtained regionalised DDF curves in Germany. For this purpose, many simulations were performed at the main components of the regionalisation procedure: local estimation of the extreme statistics (by non-parametric bootstrapping), spatial dependency (by variogram bootstrapping) of short and long recording stations statistics, the external drift information (by Sequential Gaussian Simulations) and the interpolation (also with Sequential Gaussian Simulations). Four different experiments were run in order to estimate how the uncertainty at each component propagates to the final regionalisation of the DDF curves, and a last experiment was performed by combing the uncertainty of the two main components in order to assess the total uncertainty. The uncertainty, in terms of precision, was evaluated at each long recording station location (on a cross-validation mode) based on the obtained 95% confidence interval from different simulations. The conclusions from this investigation are summarised below:

- A comparison with Simulated Annealing showed that the SGS is better suitable for the study at hand, as it shows
  higher accuracy by capturing better the inter-relationship between the parameters (despite of the data
  transformation). Further works may include a new SA algorithm that models of the 4 parameters together in
  space in order to keep the inter-relationship between them. A future improved SA algorithm may have the
  potential to decrease the overall uncertainty ranges of DDF curves further on.
- The uncertainty from the variograms, that describes the spatial dependencies within the short and long observation datasets, does not seem to influence much the final regionalisation of parameters and hence the estimation of the DDF curves. Therefore, it was neglected for the total uncertainty propagation. On the other hand, the uncertainty from the regionalisation of the long observations is the biggest source of uncertainty, followed up by the local estimation of extremes and by the drift estimation from short observation. A bootstrapping technique that combines the local estimation of extremes together with different spatial simulations of the long observations, provided the highest uncertainty and was used to quantify the total uncertainty.
- The total uncertainty obtained here follows mainly the behaviour of the spatial uncertainty, but is slightly higher, as it is influenced by the local uncertainty. However, unlike the spatial uncertainty, the total uncertainty is influenced by the very rare extreme events, and considers them as well for the computation of tolerance ranges. Moreover, by combining local resampling with spatial simulations, the modelled uncertainty exhibits a valid behaviour: at observed locations the precision is higher, and it decreases at unobserved locations according to the distance from the observed, and the density of the observed locations in the vicinity. For very short and very long durations, uncertainty ranges are also dependent on different climatological regions in Germany.
- From 10,000 simulation, it is concluded that the durations shorter than 2 hours exhibit a larger uncertainty that
  longer durations, which of course is increasing with the return period considered. Depending on the location and
  duration, tolerance ranges from ±10-30% for low return periods (lower than 10 years), and from ±15-60% for
  high return periods (higher than 10 years) should be expected.
- For the proposed methodology, the uncertainty variation in space (for most locations) seems to be smaller (~10-20%) than the variation across different durations (up to 30%). On the other hand, the uncertainty variation due to the return periods is low, approximately 5 to 10%. The only exception is at Münster, where a very rare extreme events has been observed and causes high uncertainty ranges for the extreme values in the vicinity. Events such at the one in Münster, influence the DDF curves considerably, and hence more research should be done in order to investigate how to treat them when the focus is on DDF curves for return periods up to 100 years.

Overall, the combination of local resampling with geostatistical spatial simulations provides a very suitable method for the assessment of uncertainty in regionalisation DDF curves. As shown here, considering only local resampling for the sample variability will underestimate the total uncertainty especially at very short duration interval and high return periods. Therefore, it becomes crucial to include as well spatial simulations for the computation of uncertainties. In this study, the extreme value analysis based on GEV was investigated, nevertheless it would be interesting to see if a meta-statistical approach, as proposed by Marra et al. (2019a), can result in narrower tolerance ranges while keeping a higher accuracy. So far, only the sample and spatial variability were included for the estimation of the uncertainties. Future works may as well include non-stationarity due to climate change, and the change of uncertainty patterns in the future.

### 6. Data Availability

683

684

685 686

687

688

689

690

691

692

693

694

695

696

697 698

699

700

701 702

703

704

705

706

707

708

709

710

711

712

714

716

717

The daily and the short sub-daily network are made publicly available by the German Weather Service (DWD) and can be accessed at https://opendata.dwd.de/climate\_environment/CDC/. All R-codes can be provided by the corresponding authors upon request.

#### 7. Authors Contribution

Supervision and funding for this research were acquired by UH, the study conception, design and methodology were performed by both authors, while the software, data collection, derivation and interpretation of results were handled mainly by BS. BS prepared the original draft, which was revised by UH.

### 8. Competing Interest

The authors declare that they have no conflict of interest.

### 9. Funding

This research was funded by the German Ministry of Agriculture and Environment Mecklenburg-Vorpommern and the Federal State Funding Programme "Water, Soil and Waste".

### 10. Acknowledgements

Updating the Heavy Rainfall Statistics in Germany (MUNSTAR)", funded by the German Ministry of Agriculture and Environment Mecklenburg-Vorpommern and the Federal State Funding Programme "Water, Soil and Waste" who are gratefully acknowledged. We are also thankful for the provision and right to use the data from the German National Weather Service (Deutscher Wetterdienst DWD), more specific Thomas Deutschländer and Thomas Junghänel, and to Winfried Willems from the Institute of Hydrology, Applied Water Resources and Geoinformatics (IAWG) for their contribution in the local extreme value analysis.

The results presented in this study are part of the research project "Investigating Different Methods for Revising and

### 11. References

713 Asquith, W. H.: Lmomco: L-moments, censoed L-moments, trimmed L-moments, L-comoments, and many distributions., 2021.

Bárdossy, A. and Hörning, S.: Random Mixing: An Approach to Inverse Modeling for Groundwater Flow and Transport Problems,

715 Transp. Porous Media, 114(2), 241–259, doi:10.1007/s11242-015-0608-4, 2016.

Bastante, F. G., Ordóñez, C., Taboada, J. and Matías, J. M.: Comparison of indicator kriging, conditional indicator simulation and

multiple-point statistics used to model slate deposits, Eng. Geol., 98(1–2), 50–59, doi:10.1016/j.enggeo.2008.01.006, 2008.

Bourennane, H., King, D., Couturier, A., Nicoullaud, B., Mary, B. and Richard, G.: Uncertainty assessment of soil water content spatial

patterns using geostatistical simulations: An emperical comparison of a simulation accounting for single attribute and a simulation

accounting for secondary information, Ecol. Modell., 205, 323–335, 2007.
 Burn, D. H.: A framework for regional estimation of intensity-dura

Burn, D. H.: A framework for regional estimation of intensity-duration-frequency (IDF) curves, Hydrol. Process., 28(14),

Feldfunktion geändert

- 722 doi:10.1002/hyp.10231, 2014.
- 723 Ceresetti, D., Ursu, E., Carreau, J., Anquetin, S., Creutin, J. D., Gardes, L., Girard, S. and Molinié, G.: Evaluation of classical spatial-
- 724 analysis schemes of extreme rainfall, Nat. Hazards Earth Syst. Sci., 12(11), 3229–3240, doi:10.5194/nhess-12-3229-2012, 2012.
- 725 Chaudhuri, R. R. and Sharma, P.: Addressing uncertainty in extreme rainfall intensity for semi-arid urban regions: case study of Delhi,
- 726 India, Nat. Hazards, 104(3), doi:10.1007/s11069-020-04273-5, 2020.
- 727 Cinnirella, S., Buttafouco, G. and Pirrone, N.: Stochastic analysis to assess the spatial distribution of groundwater nitrate concentrations
- 728 in the Po catchment (Italy), Environ. Pollut., 133, 569–580, 2005.
- 729 Coles, S.: An Introduction to Statistical Modeling of Extreme., 2001.
- 730 CSöRgő, S. and Faraway, J. J.: The Exact and Asymptotic Distributions of Cramér-Von Mises Statistics, J. R. Stat. Soc. Ser. B, 58(1),
- 731 221–234, doi:10.1111/j.2517-6161.1996.tb02077.x, 1996.
- 732 Deutsch, C. V. and Journel, A. G.: GSLIB: geostatistical software library and user's guide. Second edition., 1998.
- 733 DVWK: Statistische Analyse von Hochwasserabflüssen, Merkblatt 251, Bonn, 62 S, 1999.
- 734 DWA: Arbeitsblatt DWA-A 531: Starkregen in Abhängigkeit von Wiederkehrzeit und Dauer, DWA Arbeitsgruppe HW 1.1e, Hennef,
- 735 Deutschland., 2012.
- 736 Emery, X.: Multi-gaussian kriging and simulation in the presence of an uncertain mean value, Stoch. Enviornmental Res. Risk Assess.,
- 737 24, 211–219, doi:10.1007/s00477-009-0311-5, 2010.
- 738 Ersoy, A. and Yünsel, T. Y.: Assessment of lignite quality variables: A practical approach with sequential Gaussian simulation, Energy
- 739 Sources, Part A Recover. Util. Environ. Eff., 31(2), 175–190, doi:10.1080/15567030701522260, 2009.
- 740 Fischer, S. and Schumann, A. H.: Berücksichtigung von Starkregen in der Niederschlagsstatistik, Hydrol. und Wasserbewirtschaftung,
- 741 62(4), 221-240, doi:10.5675/HyWa, 2018.
- 742 Forestieri, A., Lo Conti, F., Blenkinsop, S., Cannarozzo, M., Fowler, H. J. and Noto, L. V.: Regional frequency analysis of extreme
- 743 rainfall in Sicily (Italy), Int. J. Climatol., 38(January), e698-e716, doi:10.1002/joc.5400, 2018.
- 744 Goovaerts, P.: Geostatistical tools for deriving block-averaged values of environmental attributes, Geogr. Inf. Sci., 5(2), 88-96,
- 745 doi:10.1080/10824009909480518, 1999a.
- Goovaerts, P.: Geostatistics in soil science: state-of-the-art and perspectives, Geoderma, 89, 1-45, 1999b.
- Goovaerts, P.: Estimation or simulation of soil properties? An optimization problem with conflicting criteria, Geoderma, 97(3-4), 165-
- 748 186, doi:10.1016/S0016-7061(00)00037-9, 2000.
- Goovaerts, P.: Geostatistical modelling of uncertainty in soil science, Geoderma, 103, 3-26, 2001.
- 750 Gyasi-Agyei, Y. and Pegram, G.: Interpolation of daily rainfall networks using simulated radar fields for realistic hydrological
- 751 modelling of spatial rain field ensembles, J. Hydrol., 519(PA), 777–791, doi:10.1016/j.jhydrol.2014.08.006, 2014.
- 752 Haese, B., Hörning, S., Chwala, C., Bardossy, A., Schalge, B. and Kunstmann, H.: Stochastic reconstruction and interpolation of
- precipitation fields using combined information of commercial microwave links and rain gauges, Water Resour. Res., 53, 10,740-
- 754 10,756, 2017.
- Hofmann, T., Darsow, A. and Schafmeister, M. T.: Importance of the nugget effect in variography on modeling zinc leaching from a
- 756 contaminated site using simulated annealing, J. Hydrol., 389(1–2), 78–89, doi:10.1016/j.jhydrol.2010.05.024, 2010.
- Hosking, J. R. M. and Wallis, J. R.: Regional Frequency Analysis, Cambridge University Press., 1997.
- 758 Jang, C. S.: Geostatistical analysis for spatially characterizing hydrochemical features of springs in Taiwan, Environ. Earth Sci., 73(11),
- 759 7517–7531, doi:10.1007/s12665-014-3924-z, 2015.
- 760 Jang, C. S. and Huang, H. C.: Applying spatial analysis techniques to assess the suitability of multipurpose uses of spring water in the
- 761 Jiaosi Hot Spring Region, Taiwan, Environ. Monit. Assess., 189(7), doi:10.1007/s10661-017-6029-9, 2017.
- 762 Journel, A. G. and Posa, D.: Characteristic behavior and order relations for indicator variograms, Math. Geol., 22(8), 1011–1025, 1990.
- 763 Junghänel, T., Ertel, H. and Deutschländer, T.: Bericht zur Revision der koordinierten Starkregenregionalisierung und -auswertung des
- Deutsches Wetterdienstes in der Version 2010, Tech. Rep., Offenbach am Main, Germany., 2017.
- 765 Junghänel, T., Bär, F., Deutschländer, T., Haberlandt, U., Otte, I., Shehu, B., Stockel, H., Stricker, K., Thiele, L.-B. and Willems, W.:
- 766 Methodische Untersuchungen zur Novellierung der Starkregenstatistik für Deutschland (MUNSTAR), Synthesebericht., 2022.
- Koutsoyiannis, D.: Statistics of extremes and estimation of extreme rainfall: I. Theoretical investigation, Hydrol. Sci. J., 49(4), 575–
- 768 590, doi:10.1623/hysj.49.4.575.54430, 2004a.

- 769 Koutsoyiannis, D.: Statistics of extremes and estimation of extreme rainfall: II. Empirical investigation of long rainfall records, Hydrol.
- 770 Sci. J., 49(4), 591–610, doi:10.1623/hysj.49.4.591.54424, 2004b.
- 771 Koutsoyiannis, D., Kozonis, D. and Manetas, A.: A mathematical framework for studying rainfall intensity-duration-frequency
- 772 relationships, J. Hydrol., 206(1–2), 118–135, doi:10.1016/S0022-1694(98)00097-3, 1998a.
- 773 Koutsoyiannis, D., Kozonis, D. and Manetas, A.: intensity-duration-frequency relationships, J. Hydrol., 206, 118–135, 1998b.
- Liao, K., Lai, X., Lv, L. and Zhu, Q.: Uncertainty in predicting the spatial pattern of soil water temporal stability at the hillslope scale,
- 775 Soil Res., 54(6), 739–748, doi:10.1071/SR15059, 2016.
- 776 Lin, Y.-P. and Chang, T.-K.: Simulated annealing and kriging method for identifying the spatial patterns and variability of soil heavy
- 777 metal, J. Environ. Sci. Heal. Part A, 35(7), 1089–115, 2000.
- 778 Luca, C., Si, B. C. and Farrell, R. E.: Assessing spatial distribution and joint uncertainty of TPH-fractions: Indicator kriging and
- 779 sequential indicator simulation, Can. J. Soil Sci., 87(5), 551–563, doi:10.4141/CJSS07003, 2007.
- 780 Marra, F., Morin, E., Peleg, N., Mei, Y. and Anagnostou, E. N.: Intensity-duration-frequency curves from remote sensing rainfall
- 781 estimates: Comparing satellite and weather radar over the eastern Mediterranean, Hydrol. Earth Syst. Sci., 21(5), 2389-2404,
- 782 doi:10.5194/hess-21-2389-2017, 2017.
- 783 Marra, F., Zoccatelli, D., Armon, M. and Morin, E.: A simplified MEV formulation to model extremes emerging from multiple
- 784 nonstationary underlying processes, Adv. Water Resour., 127, doi:10.1016/j.advwatres.2019.04.002, 2019a.
- 785 Marra, F., Nikolopoulos, E. I., Anagnostou, E. N., Bárdossy, A. and Morin, E.: Precipitation frequency analysis from remotely sensed
- 786 datasets: A focused review, J. Hydrol., 574(March), 699-705, doi:10.1016/j.jhydrol.2019.04.081, 2019b.
- Miniussi, A. and Marra, F.: Estimation of extreme daily precipitation return levels at-site and in ungauged locations using the simplified
- $788 \qquad \text{MEV approach, J. Hydrol., } 603 (PB), 126946, \\ \text{doi:} 10.1016 \text{/j.jhydrol.} 2021.126946, 2021.$
- 789 Namysłowska-Wilczyńska, B.: Application of turning bands technique to simulate values of copper ore deposit parameters in Rudna
- 790 mine (Lubin-Sieroszowice region in SW part of Poland), Georisk, 9(4), 224–241, doi:10.1080/17499518.2015.1104363, 2015.
- 791 NASA Shuttle Radar Topography Mission (SRTM)(2013). Shuttle Radar Topography Mission (SRTM) Global.
- 792 <u>Distributed by OpenTopography. https://doi.org/10.5069/G9445JDF. Accessed: 2023-02-09</u>
- Notaro, V., Liuzzo, L., Freni, G. and Loggia, G. La: Uncertainty analysis in the evaluation of extreme rainfall trends and its implications
- on urban drainage system design, Water (Switzerland), 7(12), doi:10.3390/w7126667, 2015.
- 795 Overeem, A., Buishand, A. and Holleman, I.: Rainfall depth-duration-frequency curves and their uncertainties, J. Hydrol., 348(1-2),
- 796 124–134, doi:10.1016/j.jhydrol.2007.09.044, 2008.
- 797 Overeem, A., Buishand, T. A. and Holleman, I.: Extreme rainfall analysis and estimation of depth-duration-frequency curves using
- 798 weather radar, Water Resour. Res., 45, W10424, doi:10.1029/2009WR007869, 2009.
- 799 Pebesma, E. J.: Multivariable geostatistics in S: The gstat package, Comput. Geosci., 30(7), 683–691, doi:10.1016/j.cageo.2004.03.012,
- 800 2004.
- Pebesma, E. J. and Wesseling, C. G.: Gstat: A program for geostatistical modelling, prediction and simulation, Comput. Geosci., 24(1),
- 802 17-31, doi:10.1016/S0098-3004(97)00082-4, 1998.
- Perica, S., Pavlovic, S., St. Laurent, M., Trypaluk, C., Unruh, D., Martin, D. and Wilhite, O.: NOAA Atlas 14 Volume 10: Precipitation-
- Frequency Atlas of the United States, NOAA, Natl. Weather Serv. Silver Spring, MD, 1, 2019.
- Poggio, L., Gimona, A., Brown, I. and Castellazzi, M.: Soil available water capacity interpolation and spatial uncertainty modelling at
- 806 multiple geographical extents, Geoderma, 160(2), 175–188, doi:10.1016/j.geoderma.2010.09.015, 2010.
- Poschlod, B.: Using high-resolution regional climate models to estimate return levels of daily extreme precipitation over Bavaria, Nat.
- 808 Hazards Earth Syst. Sci., 21(11), 3573–3598, doi:10.5194/nhess-21-3573-2021, 2021.
- Requena, A. I., Burn, D. H. and Coulibaly, P.: Pooled frequency analysis for intensity-duration-frequency curve estimation, Hydrol.
- 810 Process., 33(15), doi:10.1002/hyp.13456, 2019.
- Ribeiro, M. C. and Pereira, M. J.: Modelling local uncertainty in relations between birth weight and air quality within an urban area:
- combining geographically weighted regression with geostatistical simulation, Environ. Sci. Pollut. Res., 25(26), 25942-25954,
- 813 doi:10.1007/s11356-018-2614-x, 2018.
- 814 Shehu, B., Willems, W., Stockel, H., Thiele, L.-B. and Haberlandt, U.: Regionalisation of Rainfall Depth-Duration-Frequency curves

- 815 in Germany, Hydrol. Earth Syst. Sci., [preprint], 2022.
- 816 Szatmári, G. and Pásztor, L.: Comparison of various uncertainty modelling approaches based on geostatistics and machine learning
- $817 \qquad \text{algorithms, Geoderma, } 337 (September 2018), 1329-1340, \\ \text{doi:} 10.1016/\text{j.geoderma.} 2018.09.008, 2019.$
- 818 Tfwala, C. M., van Rensburg, L. D., Schall, R., Mosia, S. M. and Dlamini, P.: Precipitation intensity-duration-frequency curves and
- $819 \qquad \text{their uncertainties for Ghaap plateau, Clim. Risk Manag., } 16, \\ \text{doi:} 10.1016/\text{j.crm.} 2017.04.004, \\ 2017.$
- 820 Uboldi, F., Sulis, A. N., Lussana, C., Cislaghi, M. and Russo, M.: A spatial bootstrap technique for parameter estimation of rainfall
- 821 annual maxima distribution, Hydrol. Earth Syst. Sci., 18(3), 981–995, doi:10.5194/hess-18-981-2014, 2014.
- 822 Varouchakis, E. A.: Median polish kriging and sequential gaussian simulation for the spatial analysis of source rock data, J. Mar. Sci.
- 823 Eng., 9(7), doi:10.3390/jmse9070717, 2021.
- 824 Van de Vyver, H.: Bayesian estimation of rainfall intensity-duration-frequency relationships, J. Hydrol., 529,
- 825 doi:10.1016/j.jhydrol.2015.08.036, 2015.

830

- 826 Watkins, D. W., Link, G. A. and Johnson, D.: Mapping regional precipitation intensity duration frequency estimates, J. Am. Water
- 827 Resour. Assoc., 41(1), doi:10.1111/j.1752-1688.2005.tb03725.x, 2005.
- 828 Yang, Y., Tian, Q., Yang, K., Meng, C. and Luo, Y.: Using Sequential Gaussian Simulation to Assess the Spatial Uncertainty of PM 2.5
- 829 in China, Int. Conf. Geoinformatics, 2018-June(41761084), 1–5, doi:10.1109/GEOINFORMATICS.2018.8557167, 2018.