

1 Quantifying the trade-offs in re-operating dams for the environment 2 in the Lower Volta River

3 Afua Owusu^{a,b}, Jazmin Zatarain Salazar^b, Marloes Mul^a, Pieter van der Zaag^{a,c}, Jill Slinger^{b,d}

4 ^a Land and Water Management Department, IHE Delft Institute for Water Education, Westvest 7, 2611
5 AX Delft, The Netherlands

6 ^b Faculty of Technology, Policy and Management, TU Delft, Jaffalaan 5, 2628 BX Delft, The Netherlands

7 ^c Faculty of Civil Engineering and Geosciences, TU Delft, Stevinweg 1, 2628 CN Delft, The Netherlands

8 ^d Institute of Water Research, Rhodes University, Drostdy Rd, Grahamstown, 6139, South Africa

9 **Abstract**

10 The construction of the Akosombo and Kpong dams in the Lower Volta River Basin in Ghana changed
11 the downstream riverine ecosystem and affected the lives of downstream communities, particularly
12 those who lost their traditional livelihoods. In contrast to the costs borne by those in the vicinity of
13 the river, Ghana has enjoyed vast economic benefits from the affordable hydropower, irrigation
14 schemes and lake tourism that developed after construction of the dams. Herein lies the challenge;
15 there exists a trade-off between water for river ecosystems and related services on the one hand, and
16 anthropogenic water demands such as hydropower or irrigation on the other. In this study, an
17 Evolutionary Multi-Objective Direct Policy Search (EMODPS) is used to explore the multi-sectoral
18 trade-offs that exist in the Lower Volta River Basin. Three environmental flows, previously determined
19 for the Lower Volta are incorporated separately as environmental objectives. The results highlight the
20 dominance of hydropower production in the Lower Volta but show that there is room for providing
21 environmental flows under current climatic and water use conditions if firm energy requirement from
22 Akosombo Dam reduces by 12% to 38% depending on the environmental flow regime that is
23 implemented. There is uncertainty in climate change effects on runoff in this region, however multiple
24 scenarios are investigated. It is found that climate change leading to increased annual inflows to the
25 Akosombo Dam reduces the trade-off between hydropower and the environment as this scenario
26 makes more water available for users. Furthermore, climate change resulting in lower annual inflows
27 provides the opportunity to strategically provide dry season environmental flows, that is, reduce flows
28 sufficiently to meet low flow requirements for key ecosystem services such as the clam fishery. This
29 study not only highlights the challenges in balancing anthropogenic water demands and
30 environmental considerations in managing existing dams, but also identifies opportunities for
31 compromise in the Lower Volta River.

32 **Keywords:** Environmental flows, Multi-objective evolutionary optimization, Direct policy search, Volta
33 River, Akosombo Dam

34 **Corresponding author:** Afua Owusu, IHE Delft Institute for Water Education, Westvest 7, 2611 AX
35 Delft, Netherlands, email: a.owusu@un-ihe.org

36 1 Background

37 Freshwater resources are under increasing pressure worldwide (WWF, 2018; He et al., 2019). As global
38 population and standards of living have gone up, the capacity of many river basins to meet social,
39 economic and environmental water demands has declined (Best, 2019; Fitzhugh and Richter, 2004;
40 Postel and Richter, 2003). In the mid-20th century, many dams were built with ambitious goals for
41 hydropower generation, flood control and irrigation among others and dam construction is seeing a
42 resurgence in recent years (Grill et al., 2015; Best, 2019). This phenomenon is occurring, despite the
43 fact that even the economic justification for many existing dams is being called into question (Ansar
44 et al., 2014; Flyvbjerg and Bester, 2021), the life cycle emissions of some dams is above the median
45 emissions for fossil fuel plants (Schlömer et al., 2014; Almeida et al., 2019) and the negative social and
46 environmental impacts of dams on riparian ecosystems and communities have been established for
47 some time (WCD, 2000; Stone, 2011; Duflo and Pande, 2007; Richter et al., 2010). Proponents of dam
48 construction argue that in developing regions, particularly in Africa, the large energy deficit (Hafner et
49 al., 2018) coupled with high inter-annual rainfall variability and the fact that 75% of the population
50 live in semi-arid or arid regions (Vörösmarty et al., 2005; Smith, 2004), makes multipurpose dams
51 important infrastructures for energy and food security. Evidently, tools are required for investigating
52 operation policies for managing and maximising the benefits of dams and the water resources they
53 control.

54 Multi-objective evolutionary algorithms (MOEAs) are one such tool for assessing the trade-offs
55 between water users in a river basin. MOEAs use stochastic search tools to simultaneously find the
56 Pareto approximate set across multiple objectives (Reed et al., 2013; Matrosov et al., 2015; Hurford
57 et al., 2020; Zatarain Salazar et al., 2016; Kiptala et al., 2018). The Pareto approximate or non-
58 dominated set of solutions are the suite of solutions for which increasing the water allocation to one
59 user leads to a reduction in the benefit to others. The advantage of MOEAs is that they do not require
60 pre-specifying preferences across objectives, thereby supporting unbiased *a posteriori* decision
61 making (Reed et al., 2013; Hurford et al., 2014). Furthermore, MOEAs allow for heterogeneous and
62 non-linear problem formulations with incommensurable objectives and different risk attitudes across
63 objectives. Accordingly, non-market objectives can be evaluated alongside conventional economic
64 objectives. This is particularly useful for including environmental flows (e-flows) and ecosystem
65 services for which monetary valuation is often difficult and contested (Bingham et al., 1995; Costanza
66 et al., 1997, 2014; Luisetti et al., 2011). The capability of MOEAs to find Pareto approximate strategies
67 for a suite of water systems applications has been thoroughly assessed by Reed et al. (2013), and for
68 multi-purpose reservoir operations by Zatarain Salazar et al. (2016). In this paper, an Evolutionary

69 Multi-Objective Direct Policy Search (EMODPS) framework is applied to map the states of a system, in
70 this case, reservoir levels and time of the year, to actions, the release of water for different water uses
71 (Giuliani et al., 2016; Zatarain Salazar et al., 2017). This approach has been applied to find Pareto
72 approximate operating policies for multi-objective, multi-reservoir systems (Quinn et al., 2017; Wild
73 et al., 2019). The motivation to use EMODPS was informed by the fact that for the selected case study,
74 multi-objective reservoir operating policies had to be found under uncertainty. Traditional approaches
75 for optimal control, such as stochastic dynamic programming, do not permit finding the Pareto
76 approximate policies across multiple objectives in a single run, requiring instead that the Pareto front
77 is constructed by testing different weights for each of the system's objectives. Such a method
78 increases the computational burden and yields a sparse Pareto front thereby potentially missing
79 regions of suitable policies. The use of EMODPS overcomes this challenge by generating the trade-offs
80 across all the system's objectives simultaneously in a single algorithmic run, creating a diverse and
81 more accurate Pareto front (Giuliani et al., 2016). This motivates the use of direct policy search, in
82 which radial basis functions are used to find a flexible shape to map storage levels and time to release
83 decisions for multiple objectives.


84 In many of the studies where MOEAs have been applied, the e-flow objective in the simulation
85 component of the model either meets a minimum flow release (Zatarain Salazar et al., 2017; Gonzalez
86 et al., 2021; Kiptala et al., 2018; Hurford et al., 2020) or minimizes the deviation of flow from the
87 natural, unregulated flow regime (Hurford and Harou, 2014). The former objective, minimum flow
88 releases, fails to thoroughly capture the essence of e-flows which are the "quantity, timing, and quality
89 of freshwater flows and levels required to sustain aquatic ecosystems" (Brisbane Declaration, 2018).
90 The latter, the objective of returning fully to the natural flow regime, is an unlikely objective in many
91 highly modified and utilized river basins (Acreman et al., 2014; Horne et al., 2017b). In this study, a
92 multi-objective analysis of the trade-offs between key water users and the environment in the heavily
93 modified Lower Volta River Basin in Ghana is carried out. The environmental objectives include
94 designer e-flows (Acreman et al., 2014) developed for different ecosystem services in the basin. In
95 contrast to the aim of restoring a river to a near natural state, designer e-flows define and construct
96 parts of the flow hydrograph of a river to meet certain desired ecological and social outcomes
97 (Acreman et al., 2014; Horne et al., 2017a). Three e-flows, defined for the Lower Volta River in previous
98 studies, are investigated and compared: one to support the Volta clam (*Galatea paradoxa*) (Owusu et
99 al., 2022b) and the other two to support multiple ecosystem services including fisheries, aquatic weed
100 control, flood recession agriculture and sediment transport (Mul et al., 2017). In addition, future
101 climatic scenarios are investigated. This study highlights the challenges faced by dam operators in
102 balancing environmental and anthropogenic water demands for existing dams in heavily modified and

103 utilized river basins, and simultaneously investigates the room for compromise in the case of the
104 Lower Volta River under uncertainty. The main contribution of the paper is twofold: First, it explores
105 the room for compromise in the Lower Volta by the quantifying the Pareto approximate trade-offs
106 when e-flows previously prescribed for the basin are implemented. Secondly this paper is a new
107 application of the EMODPS under high uncertainty where only the system goals and direction of
108 preference are specified in the multi-objective decision problem.

109 In the following section, a description of the Lower Volta River Basin is given, followed by the methods
110 section in which (i) the simulation model for the lower Volta is described, (ii) the multi-objective
111 evolutionary optimization set up is explained, (iii) the objective functions are formulated, and (iv)
112 relevant climate-induced effects on discharge are specified. Next is the results section where we
113 present the trade-off analysis between e-flows and other water uses in the Lower Volta for the current
114 baseline scenario and possible future scenarios. We conclude with a discussion on the implications of
115 implementing e-flows in the Lower Volta and draw lessons for the application of EMODPS in other
116 heavily modified basins under uncertain future conditions.

117 2 Lower Volta River Basin

118 The Lower Volta River, located in Ghana is one of four sub-basins in the Volta River Basin in West Africa
119 (Figure 1). It is located furthest downstream, flowing into the Gulf of Guinea and covering an area of
120 66700 km², approximately 16% of the Volta Basin. The most important hydraulic infrastructure in the
121 Lower Volta is the Akosombo Dam, which was built in 1965 for hydropower production with an
122 installed capacity of 1038 MW (1,020MW Akosombo Hydro Electric Power Plant, 2021). In 1981, a
123 smaller 160 MW run-of-the-river dam, the Kpong Dam, also began operation downstream. The lake
124 created by the Akosombo Dam is the largest man-made lake by surface area at about 8500 km². It has
125 an average depth of 18.8 m and holds approximately 148 km³ of water at maximum capacity
126 (1,020MW Akosombo Hydro Electric Power Plant, 2021).

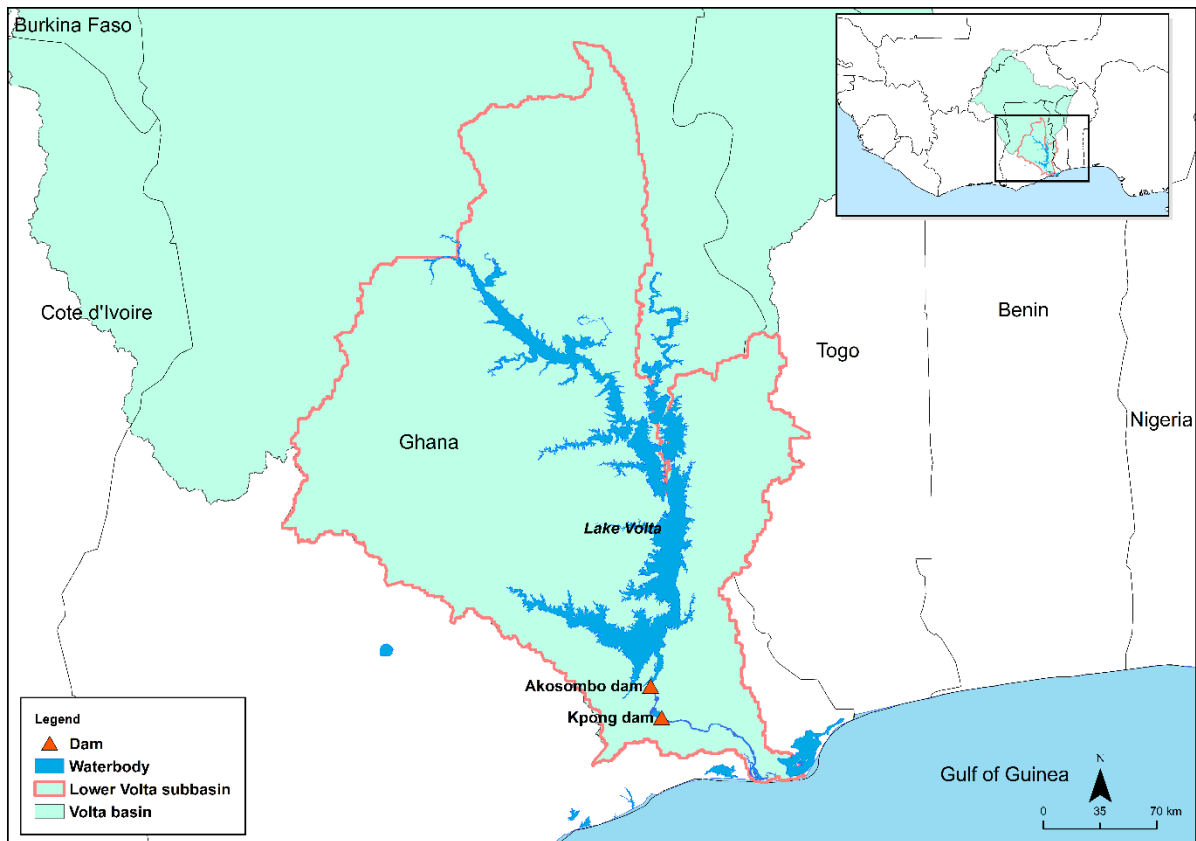

127

128 *Figure 1: The Akosombo and Kpong Dams located in the Lower Volta River Basin, which discharges into the Gulf of Guinea*

129 Construction of the Akosombo Dam led to the resettlement of over 80,000 people (Darko and Tsikata,
 130 2019; Alhassan, 2009) and also changed the dynamic flow regime downstream from one with average
 131 low and high flows of approximately 36 m³/s in March and 5,100 m³/s in September-October
 132 respectively, to a steady flow of about 1,000 m³/s per month all year round with no account taken of
 133 seasonality (Ntiamoa-Baidu et al., 2017). Consequently, the riverine ecosystem changed and so did
 134 the lives of downstream communities. Creek fishing, floodplain agriculture and the clam fishing
 135 industries, which together made up three-quarters of total real income of the Lower Volta riparian
 136 population in 1954, collapsed (Moxon, 1969; De-Graft Johnson, 1999; Tsikata, 2008; Lawson, 1972).
 137 In addition, invasive aquatic weeds proliferated, providing habitat for disease vectors including
 138 mosquitoes and snails and thereby increasing the prevalence of waterborne and water related
 139 diseases such as malaria and schistosomiasis (Akpabey et al., 2017; Gyau-Boakye, 2001). Other
 140 environmental costs include changes to the sediment load leading to erosion along the coastline of
 141 Ghana, as well as Togo and Benin (Bollen et al., 2011; Roest, 2018; Appeaning Addo et al., 2020), as
 142 well as a reduction in salt water intrusion (Beadle, 1974; People and Rogoyska, 1969; Nyekodzi et al.,
 143 2018). Among the population in the Lower Volta, perceptions of the Akosombo Dam and the run-of-
 144 the-river Kpong Dam downstream, are still overwhelmingly negative: in a survey of over 400 citizens

145 older than 50 years in 2016, approximately 92% considered their socio-economic conditions to be
146 better under pre-dam natural flows (Baah-Boateng et al., 2017).

147 The costs borne by the river ecosystem and the communities in the vicinity of the dams in the Lower
148 Volta is in strong contrast to the vast economic benefits that Ghana as a whole has enjoyed from the
149 relatively affordable hydropower, irrigation schemes and tourism that developed after construction
150 of the dams (Eshun and Amoako-Tuffour, 2016; Alhassan, 2009). After construction, the Akosombo
151 Dam provided over 70% of Ghana’s electricity and is credited with powering Ghana’s industrialization
152 and making it one of the most developed countries in West Africa (Alhassan, 2009). The dam currently
153 makes up about 20% of the installed electricity generating capacity in Ghana (Dye, 2020) and is
154 operated by the Volta River Authority (VRA).

155 The local-national mismatch in benefits deriving from the operation of the Akosombo dam has been
156 investigated in previous studies, notably in 2016 by Ntiamao-Baidu et al. (2017). The 2016 study
157 adopted a simulation-based approach using the Water Evaluation and Planning (WEAP) tool to
158 compare the current flow regime with the natural flow regime and two other scenarios for re-
159 operating the Akosombo dam (Annor et al., 2017; Mul et al., 2017). The alternative dam operation
160 scenarios were found to reduce power generation by 45% to 74%, and were deemed undesirable
161 (Annor et al., 2017). This was at a time when Akosombo and Kpong dams made up about 40% of
162 installed capacity and Ghana was experiencing power rationing due to low water levels in the Volta
163 River and a shortfall in gas supply to other power plants (Dye, 2020). The present energy context of
164 Ghana is very different and is characterized by an “overabundance” of electricity generation potential
165 - almost twice the peak load demand and therefore a reduced dependence on power generation at
166 Akosombo and Kpong dams. (Dye, 2020; Kumi, 2017). While installed capacity does not directly
167 translate into power delivery, it is worth re-examining the trade-offs between water users in the Lower
168 Volta under this changed situation given that it is as a result of ‘take-or-pay’ power purchase
169 agreements with private power companies whereby 90% of the power made available by these
170 companies has to be paid for irrespective of whether it is used or not (Dye, 2020). In 2018, the cost of
171 this extra capacity was approximately 5% of the country’s gross domestic product (GDP) (The World
172 Bank, 2018; Dye, 2020).

173 3 Methods


174 The simulation model for this study was developed using the mass balance of inflows, net evaporation
175 rates and releases from the Akosombo Dam from 1981 to 2012 (data obtained from VRA). In addition
176 to net evaporation and inflows, additional input data to the model consisted of downstream water
177 levels and physical characteristics of the dam such as the storage-area-level relationships. The model

178 was initially set up using the current baseline dam operation policy for hydropower, flood control and
179 irrigation over a wet (2010), dry (2006) and normal (1985) year. The choice to calibrate for years with
180 specific conditions as against the full historical time series was a practical one to expedite the
181 calibration phase of the study. The Nash-Sutcliffe model efficiencies of 0.89, 0.91 and 0.90 respectively
182 were obtained when the modelled and observed reservoir volumes were compared for each of the
183 wet, dry and normal years, thus indicating a good model fit (Figure S1-S3, Supplementary material).

184 Radial Basis Functions (RBF) were used to parameterize the control policies for mapping reservoir
185 levels and the time into daily release decisions (Zatarain Salazar et al., 2016, 2017). RBFs are non-linear
186 approximating networks that allow the time dependent operating decisions to depend on more than
187 a single variable and most importantly can accommodate multiple objectives simultaneously (e.g.,
188 hydropower, irrigation, flood prevention, and e-flows). By providing alternative Pareto approximate
189 solutions, it is possible to visualise trade-offs between the objectives and thereby inform policy
190 decisions. In a comparative analysis, (Giuliani et al., 2016) found that RBF solutions performed better
191 in terms of convergence, consistency and diversity of solutions as compared to another widely used
192 universal approximator, Artificial Neural Networks (ANN). Indeed, using such a non-linear
193 approximating network avoids “restricting the search for the optimal policy to a subspace of the
194 decision space that does not include the optimal solution” (Giuliani et al. 2018).

195 3.1 Multi-objective problem formulation for the Lower Volta system

196 When the storage volume in the reservoir is known at time t , and the decision time step is set to 1,
197 the downstream releases can be determined for the time interval $[t, t + 1]$. The release from
198 Akosombo Dam (r_{t+1}^{Ak}) is determined by the irrigation, hydropower, environmental and flood control
199 demands (r_{t+1}^{IHEF}) (Eq. (1)) (Figure 2). Kpong Dam is operated as a run-of-the-river hydropower system
200 by VRA after water is diverted for irrigation (Eq. (2)).

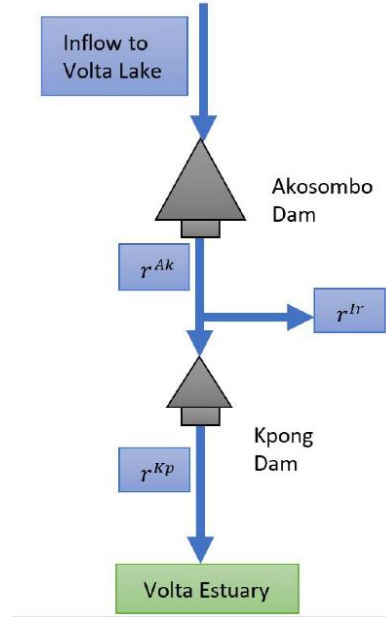

201

202 *Figure 2: Topology of reservoir system in the Lower Volta. r^{Ak} , r^{Kp} and r^{Ir} are the flow releases from Akosombo, Kpong and*
 203 *for irrigation respectively.*

204 The release from Kpong Dam (r_{t+1}^{Kp}) is therefore calculated as the difference between the release from
 205 Akosombo Dam and irrigation (r_{t+1}^{Ir}), and represents the downstream releases for hydropower, e-
 206 flows and floods (r_{t+1}^{HEF}).

$$r_{i+1}^{Ak} = r_{i+1}^{IHEF} \quad (1)$$

$$r_{i+1}^{Kp} = r_{i+1}^{Ak} - r_{i+1}^{Ir} = (r_{i+1}^{HEF}) \quad (2)$$

207

208 The operating policy is commonly parametrised as a function of the reservoir storage volume at a
 209 particular time. The parameterized operating policy f is then defined as a mapping between the
 210 decisions \mathbf{u}_t and the policy inputs z_t comprising the time t and system state, or storage volume, x_t ,
 211 Eq. (5), namely:

$$\mathbf{u}_t = f(z_t) \quad (3)$$

212 The k th decision variable in the vector \mathbf{u}_t (with $k = 1, \dots, n$) is therefore defined as a weighted sum
 213 of radial basis functions, as specified in Eq. (4):

$$u_t^k = \sum_{i=1}^N w_{i,k} \phi_i(z_t) \quad (4)$$

214 where N is the number of radial basis functions $\phi_i(\cdot)$, and $w_{i,k}$ is the non-negative weight of the i th
 215 radial basis function, and the N weights sum to unity. The i th Gaussian radial basis function is then
 216 given by Eq. (5):

$$\varphi_i(z_t) = \exp \left[- \sum_{j=1}^M \left(\frac{(z_t - c_{j,i})^2}{b_{j,i}^2} \right) \right] \quad (5)$$

217 Where $j = 1, \dots, M$ is the number of input variables, z_t is the policy input (e.g. time t , reservoir level
 218 x_t) and $c_{j,i}$ and $b_{j,i}$ are the centres and radii respectively of the i th Gaussian radial basis function for
 219 the j th input variable. The parameter vector θ is defined as $\theta = (c_{i,j}, b_{i,j}, w_{i,k})$ with $i = 1, \dots, N$; $j =$
 220 $1, \dots, M$; $k = 1, \dots, n$, where the centre and radius are normalized with $c_{i,j} \in [-1, 1]$ and $b_{i,j} \in (0, 1]$.
 221 The policy parameters θ are determined by simulating the system over the time horizon H under the
 222 policy $f = \{f(t, x_t, \theta): t = 0, \dots, H - 1\}$. In this way the inputs to the RBF policy (time index and
 223 reservoir storage volume) are mapped to the outputs (release decisions). The policy parameters are
 224 evaluated by solving the multi-objective problem function, f , specified in Eq. (6) in the objective space
 225 using an informed search algorithm θ^* . The objective functions J are the operating objectives of the
 226 reservoir as defined in Eq.s (7) to (12) with any maximization objectives multiplied by -1 to
 227 reformulate all the objectives as minimizations.

$$f\theta^* = \arg \min_{\theta} J(\theta) \quad (6)$$

228 The number of RBFs used in this study was four (i.e. $n = 4$). Thus, the total number of parameters (θ)
 229 for the control policy in this study is 24. A daily decision timestep, representative of “real operations”
 230 of the two dams by VRA was used (Annor et al., 2017). The simulation time horizon, H , of 29 years
 231 using historical data starting from January 1984, was constrained by the low availability of data. This
 232 period however encompasses key dry and wet periods. In 1997-2000 and 2006-2007, there was power
 233 rationing in Ghana as water levels in the Akosombo reservoir fell to 73.01 m (July 1999) and 72.16 m
 234 (August 2006) respectively; both lower than the minimum operating level of 73.15 m (VRA, 2021). On
 235 the other hand, in 1991 and 2010, extremely high inflows caused the reservoir water level to rise to
 236 83.90 m and 84.42 m, respectively, close to the maximum operating level of 84.73 m, and necessitated
 237 the opening of the spillways. The 2010 reservoir level remains the highest point ever recorded at
 238 Akosombo. The four objectives considered in this study are described in more detail below,

- 239 1. Annual hydropower: Maximization of the annual hydropower generated at Akosombo and Kpong
 240 dams as defined in Eq. (7). While the annual firm energy requirement from Akosombo Dam is
 241 4415 GWh/year, the amount of electricity generated has typically exceeded this target in the past
 242 due to high national dependence on power generation from this dam. As such, operations at
 243 Akosombo has generally been to maximise power considering the reservoir volume and inflows to
 244 the dam (Annor et al., 2017). There is no firm energy target at Kpong which is a run-of the river
 245 dam and generates power with releases from Akosombo after the diversion for irrigation.

$$J_H = \sum_{t=1}^I HP_t \quad (7)$$

246 where energy production (HP_t) in GW is given by Eq. (8):

$$HP_t = \eta g \rho_w h_t q_t^{turb} \cdot 10^{-9} \quad (8)$$

247 where $t \in I$ are the days in a year, η is the turbine efficiency (dimensionless), g is acceleration due
 248 to gravity (9.81 m/s^2), ρ_w is water density (1000 kg/m^3), h_t is net hydraulic head (m) and q_t^{turb} is
 249 flow through the turbines (m^3/s). The hydropower objective at Akosombo is subject to constraints
 250 on the minimum daily firm energy requirement of 6 GWh/day for system stability and the
 251 maximum possible power production due to turbine capacity ($1,603 \text{ m}^3/\text{s}$) at the maximum safe
 252 operating level of 84.12 m.

253 2. Irrigation: Maximization of the volumetric reliability of water supply to meet irrigation demand as
 254 described in Eq. (9).

$$J_I = \frac{1}{H} \sum_{t=1}^H \frac{q_t}{V_t} \quad (9)$$

255 subject to the constraint in Eq. (10):

$$0 \leq q_t \leq Q_t \quad (10)$$


256 where V_t , q_t and Q_t are the irrigation demand, the diverted water and the flow at diversion point
 257 at time t , a day within the simulation horizon H . The current irrigation demand is $10 \text{ m}^3/\text{s}$ but there
 258 have been plans since 2009 for this to be increased to $38 \text{ m}^3/\text{s}$ for the Accra Plain Irrigation Project
 259 and the expansion of the Kpong left bank irrigation project (GIDA, 2009). These projects are yet to
 260 be fully realized however, and in this study the anticipated irrigation demand of $38 \text{ m}^3/\text{s}$ is used as
 261 the baseline value.

262 3. Flood control: Minimization of flood occurrences defined by the average number of days where
 263 downstream flow releases from Kpong, r_{t+1}^{Kp} , exceed $2300 \text{ m}^3/\text{s}$, the bank full capacity of the river
 264 (Q_F) (Eq. (11)). Opening of the spillways of the Akosombo and Kpong dams is quite rare and has
 265 occurred only twice, in 1991 and 2010. Consequently the riparian communities are ill-prepared for
 266 flood releases and incur high losses whenever floods are released (Ayivor and Ofori, 2017).

$$J_F = \frac{1}{H} \sum_i^H \left(\frac{\max (r_{i+1}^{Kp} - Q_F, 0)}{Q_F} \right) \quad (11)$$

267 4. E-flows: The trade-off between the three objectives defined above and three different e-flows
 268 (Figure 3) are investigated in separate runs in this study. As such, three different configurations of
 269 the trade-off problem are investigated.

- 270 a. Clam e-flows (Figure 3a): This e-flow was designed for the Lower Volta River using the Volta
271 clam, a stenotopic, freshwater bivalve, as an indicator species (Owusu et al., 2022b). The
272 recommended flow is a low flow range of 50 - 330 m³/s from November to March to support
273 the clam's veliger larvae stage, a key life stage in its lifecycle. An 80% reliability of this flow
274 occurring in the stipulated months is an acceptable compromise for the survival of the clam
275 veliger larvae (Owusu et al., 2022b). While only a low flow is prescribed for five months in this
276 e-flow recommendation, this necessarily implies that flow releases at other times of the year
277 will be higher, although the magnitude, duration and timing of this such flow is not defined
278 and thus does not form a constraint for clam e-flows. The historical minimum for high flows in
279 September and October under pre-dam flows was 1052 m³/s.
- 280 b. Natural flow dynamics considering bank full flows (e-flows 2) (Figure 3b): This e-flow reinstates
281 natural flow dynamics in the Lower Volta to support multiple ecosystem services including
282 fisheries, aquatic weed control, flood recession agriculture and sediment transport (Mul et al.,
283 2017). The minimum discharge for the high flow period in September to October is 2,300 m³/s,
284 (which is the bank full flow rate) to ensure that river overtopping and thus some minimum
285 flooding of pre-dam floodplains occurs. The maximum dry season discharge for the rest of the
286 year is 700 m³/s.
- 287 c. Natural flow dynamics considering future dry season irrigation (e-flow 3) (Figure 3c): This e-
288 flow also re-instates natural flow dynamics of the Lower Volta while providing water for future
289 dry season irrigation demands (Mul et al., 2017). The minimum high flow in September and
290 October is 3000 m³/s, which inundates an area of approximately 156 km², to support creek
291 fishing and flood recession agriculture. The maximum dry season flow rate is 500 m³/s.

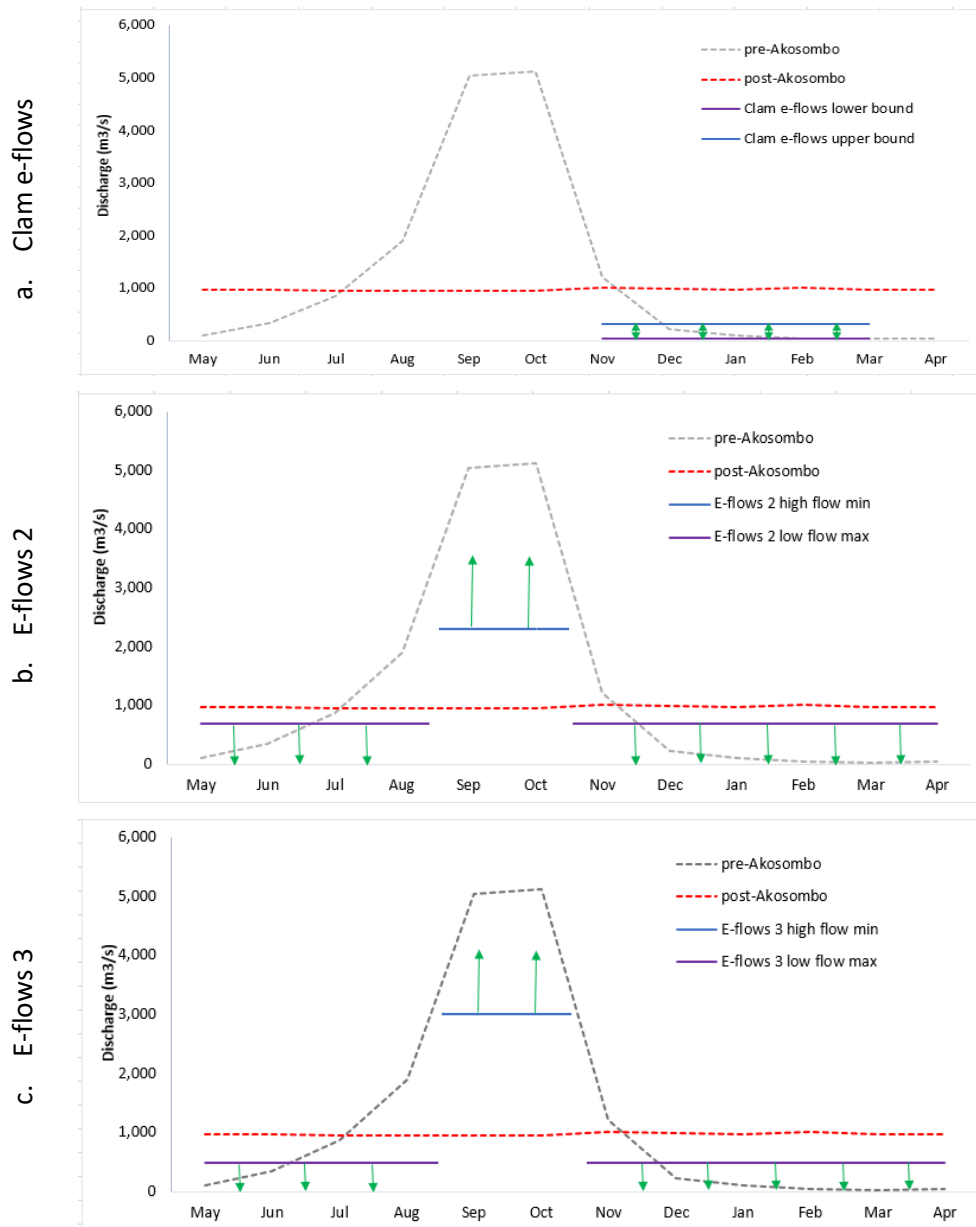

292
293
294
295
296
297
298

Figure 3: E-flow configurations considered in this study with pre-dam (natural) and current post dam flow regime in the Lower Volta provided for comparison (using monthly average flow data from Volta River Authority, Ghana) for a hydrological year which starts in May in the Lower Volta. For clam e-flows the green arrows show the range of low flows recommended from November to March. For e-flows 2 and 3, the prescribed flow for September and October are a minimum threshold while for the other ten months, this flow is a maximum threshold. The green arrows begin at these thresholds and point in the direction of where the flows should be per the e-flow recommendation.

299 The three alternative e-flow objectives (clam e-flows, e-flows 2 and e-flows 3) were modelled as a
300 maximization of the reliability of the recommended flow rates occurring (Eq. (12)):

$$J_E = 1 - \frac{n_E}{n_T} \quad (12)$$

301 where n_E is number of days when downstream flow falls outside the e-flow range and n_T is the
302 total number of days when the recommended e-flows are required.

303 3.2 Future climate scenarios

304 In addition to a baseline scenario optimizing the trade-offs between hydropower, irrigation, flooding
305 and e-flows under the present climate, future scenarios representing different climate futures were
306 analysed. The recent Sixth Assessment Report of Working Group I of the Intergovernmental Panel on
307 Climate Change (IPCC) projects that mean temperature in West Africa will increase 1.5 °C by 2040 and
308 projects with high confidence that monsoon rainfall over West Africa will increase in the mid (2041-
309 2060) to long term (2081-2100) but have a delayed start (IPCC, 2021). Future projections made with
310 medium confidence relate to the delayed retreat of the monsoon rains and an increase in the
311 frequency and duration of droughts in the latter part of the 21st century (IPCC, 2021).

312 These latest climate projections draw a mixed picture of future climate in the West African sub-region.
313 A further review of the anticipated impacts of climate change specifically on runoff in the Lower Volta
314 was carried out with the goal of identifying studies that focussed on the entire Volta basin, either as a
315 whole or all sub-basins. A search was conducted in Scopus using the search string: TITLE-ABS-KEY
316 (Volta AND climate AND (change OR impact), AND (flow OR discharge OR water) AND (availability OR
317 resources)). From the 60 papers returned, a review by (Roudier et al., 2014) on climate change impacts
318 on runoff in West African Rivers provided the first point of reference. From this review by (Roudier et
319 al., 2014), four studies meeting the search criteria were identified. An additional four papers from the
320 Scopus search results, not reviewed by (Roudier et al., 2014), were also retained for analysis.

321 Four papers (Kunstmann and Jung, 2005; Aerts et al., 2006; Jung et al., 2012; Abubakari, 2021) found
322 that annual runoff in the Volta will increase (by 4% to 65%), and of these papers, three (with the
323 exclusion of Aerts et al. (2006)) also presented monthly trends which generally showed an increase in
324 wet season flow from June to October and a decrease in dry season flow. The findings on only monthly
325 trends of (Jin et al., 2018) are also in line with these predictions. (McCartney et al., 2012) and (Sood et
326 al., 2013), in contrast, find that there will be a decrease in annual runoff (ranging from -13% to -45%)
327 while (Amisigo et al., 2015) find that the results across the various scenarios are inconsistent. Table S1
328 in the supplementary materials provides further details on the papers, the climate change scenarios
329 considered and the models used. It is important to note that using a combination of models, i.e.: global
330 and regional climatic models and then hydrological models, introduces uncertainty in the findings of
331 climate projections for runoff (McCartney et al., 2012) and the wide-ranging results from the reviewed
332 papers show that particularly in the case of the Volta the direction of change in runoff is still unclear.

333 The climate-runoff studies, just as the latest IPCC report, present a mixed picture for the Lower Volta.
334 Therefore, bearing the high level of uncertainty in mind, five scenarios indicative of the range of
335 climate-induced changes predicted for the Volta discharge for the mid to long term are investigated

336 (Table 1). These include both increases and decreases in annual runoff as well as seasonal variations
 337 in runoff into the Lake Volta.

338 *Table 1: Design of future scenarios encompassing climate-induced changes in the Lower Volta discharge*

Scenario	Annual decrease	Annual increase		Seasonality		
	Decrease -45%	Increase +12%	Increase +65%	Dry season decrease (Nov to May) -10%	Wet season increase (Jun to Oct) +10%	Wet season increase (Jun to Oct) +55%
1	x	-	-	-	-	-
2	-	x	-	-	-	-
3	-	-	x	-	-	-
4	-	-	-	x	x	-
5	-	-	-	x	-	x


339 4 Results

340 The relationship between different water users in the Lower Volta is presented using parallel axis plots
 341 (Figure 4 and Figure 5). Every line crossing the axes is a Pareto approximate (non-dominated) solution
 342 and shows the performance of each water user under an alternative dam operation policy for the
 343 Lower Volta system. The range of values for each water user has been normalized using its maximum
 344 and minimum values with the best performance featuring at the top of each axis. For irrigation and
 345 the environmental objectives, the highest value is interpreted as a dam operation policy whereby
 346 100% of irrigation demand and e-flows are provided, while for the flood control objective, this is
 347 interpreted as there being no downstream flow releases above the flooding flow threshold of 2300
 348 m³/s over the simulation horizon. For hydropower at Akosombo and Kpong dams, the maximum and
 349 minimum values used in the normalization encompass the maximum and minimum annual
 350 hydropower generated across all the scenarios considered: at Akosombo Dam these are 5,100 and
 351 845 GWh/year respectively and at Kpong Dam, 1,000 and 130 GWh/year respectively. The trade-offs
 352 between the three e-flow objectives and other water users are shown with the ‘best’ or highest
 353 performing operation policy for each objective highlighted. Additionally, room for compromise,
 354 characterised in this study as operation policies meeting the firm hydropower demand of 4,415
 355 GWh/year for Akosombo Dam (“fair hydropower”) and e-flow demands at least 80% of the time (‘fair
 356 environment’), have also been highlighted. It is important to note that, the terms ‘best’ and ‘fair’ as
 357 used here, are not qualifying adjectives but solution descriptors in the Pareto approximate space with
 358 the latter used to denote ‘reasonable’ or ‘satisfactory’ rather than ‘equitable’ solutions. Cumulative
 359 distribution graphs showing the function values for the baseline and future scenarios are presented in
 360 Figure S4 in the supplementary materials.


361 4.1 Baseline scenario

362 For the baseline scenario (Figure 4), the highest performing dam operation policies for hydropower
363 trade-off sharply with the provision of e-flows (all configurations) in the Lower Volta such that there
364 is no overlap even among fair solutions for either objective for all e-flow configurations considered in
365 this study. To meet the current firm energy requirement of 4,415 GWh/year at Akosombo, e-flows can
366 only be released about 60%, 49% and 47% of the required time for the clam e-flows, e-flows 2 and e-
367 flows 3, respectively. From the environmental perspective, the results show that hydropower demand
368 from Akosombo and Kpong have to fall to approximately 3,903 GWh/year and 760 GWh/year
369 respectively for the release of clam e-flows; or approximately 3000 GWh/year and 563 GWh/year for
370 the release of e-flows 2; or alternatively approximately 2711 GWh/year and 508 GWh/year for the
371 release of e-flows 3 to become possible 80% of the recommended time under current climatic
372 conditions. The solutions for clam e-flows generally lead to higher hydropower generation compared
373 to the other e-flows because for seven months of the year there is no constraint on water releases in
374 the Lower Volta for the environment, hence hydropower generation can be maximised in these
375 months. Comparing the dynamic e-flow configurations, e-flows 2 yields higher hydropower generation
376 because its dry season flow recommendation is higher at 700 m³/s as compared to that of e-flow 3
377 which is 500 m³/s thus allowing for higher power generation in the dry season.


378 Considering the relatively low water demand for irrigation as compared to hydropower, marginal
379 increases in hydropower generation at Kpong lead to significant reduction in the amount of irrigation
380 demand that is met in the baseline scenario. The solutions for all e-flow configurations perform well
381 for the flood control objective even though e-flow 2 and 3 prescribe flood releases for two months of
382 the year. As such, comparing clam e-flows to e-flows 2 and 3, there is a reduction (0.99 for clam e-
383 flows vs. 0.83 for e-flows 2 and 3) in the performance of the 'best environment' solution for the latter
384 two, as expected, showing that the requirement for floods for two months in a year in those e-flow
385 configurations are not met.

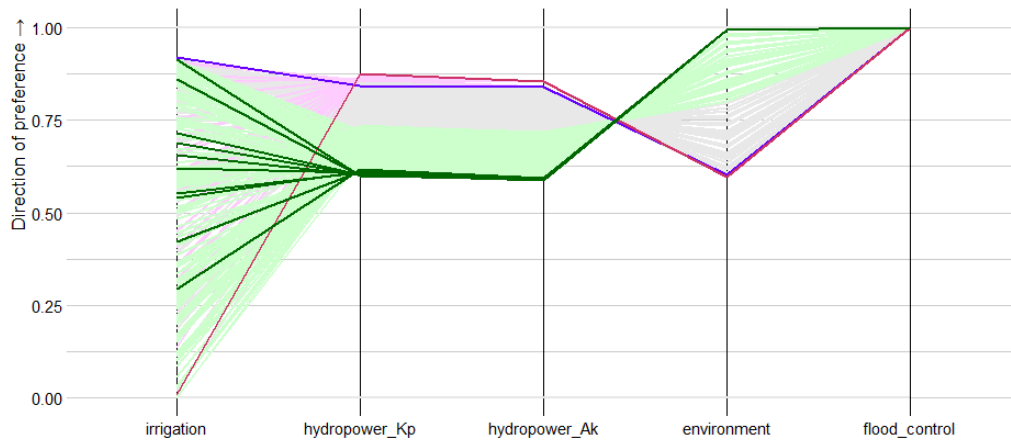

a: Clam e-flows

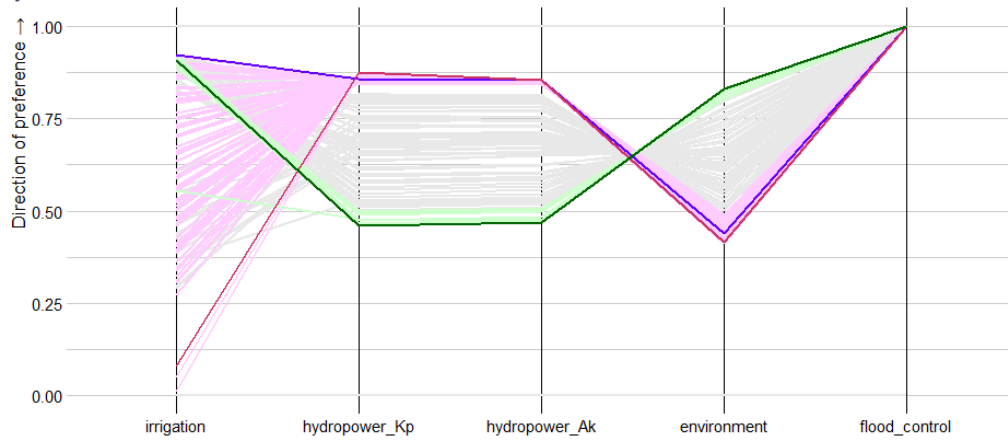

b: E-flows 2

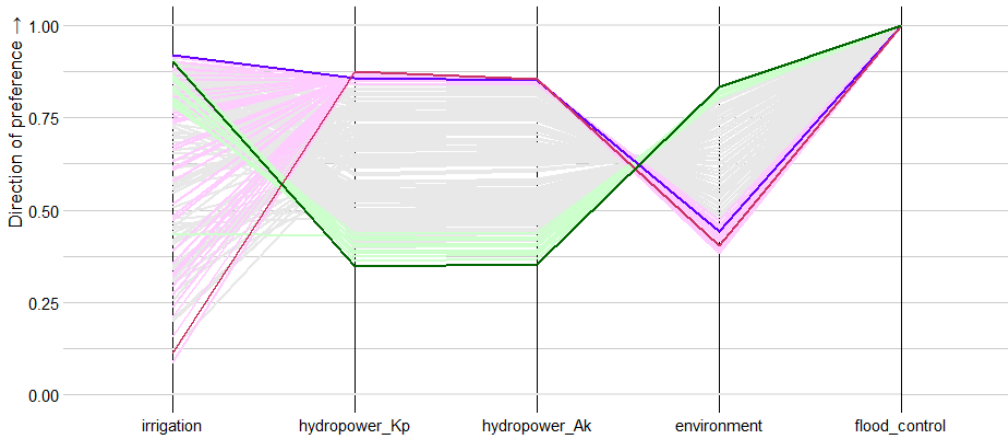

c: E-flows 3




Figure 4: Full set of non-dominated solutions in the baseline scenario with the 'best' solution for each water user and 'fair' solutions for hydropower and environment highlighted. The objective values for each water user have been normalised using the minimum and maximum values over all simulations with the highest performance for each objective placed at the top of the axes. The order in which water users are presented has been chosen to highlight trade-offs between them.

386 4.2 Future scenarios

387 The effects of different climate futures on the Pareto approximate solutions for the Volta basin are
388 presented in Figure 5. Scenario 1, where there is 45% decrease in annual inflows to Akosombo dam
389 stands out as the system becomes water stressed so that the best performing operation policies even
390 for hydropower lead to only about 2776 GWh and 550 GWh annual power generation at Akosombo
391 and Kpong respectively for all e-flow configurations. The best operating policies for the environment
392 however improve slightly from 0.99 to 1 for clam e-flows and remain unchanged at 0.83 for e-flows 2
393 and 3 relative to the baseline. This is because these solutions, even in the baseline scenario are those
394 for which only dry season low flows are released. In contrast to Scenario 1, under Scenario 3 and to a
395 lesser extent Scenario 2, where annual flows to the Akosombo Dam increase by 65% and 12%
396 respectively, the solutions move up on the two hydropower axes and some fair solutions for the
397 environment lead to higher annual hydropower production of up to 4,242; 3,392 and 2,926 GWh/year
398 for clam e-flows, e-flows 2 and e-flows 3 respectively at Akosombo.

399 Seasonal climate change effects on the Lower Volta system under scenarios 4 and 5 are comparable
400 to annual climate change effects. As a result, the solutions for Scenario 4 are similar to Scenario 2
401 while those for Scenario 5 are similar to Scenario 3 save for the slightly lower hydropower generation
402 values for Scenario 5 and hence fewer 'fair hydropower' solutions in line with its relatively lower
403 inflows (+65% annual inflows for Scenario 3 vs 55% wet season inflows for Scenario 5). This is due to
404 the high residence time of water in the Lake Volta (3.9 years) and the fact that the Lower Volta has
405 highly seasonal inflows naturally so that an annual inflow increase applied to inflows across the year,
406 as applied in Scenario 2 and 3, results in a minimal increase in the absolute values of inflows to the
407 dam in the dry season but a relatively significant increase in the absolute values of wet season inflows,
408 thus amplifying seasonality.

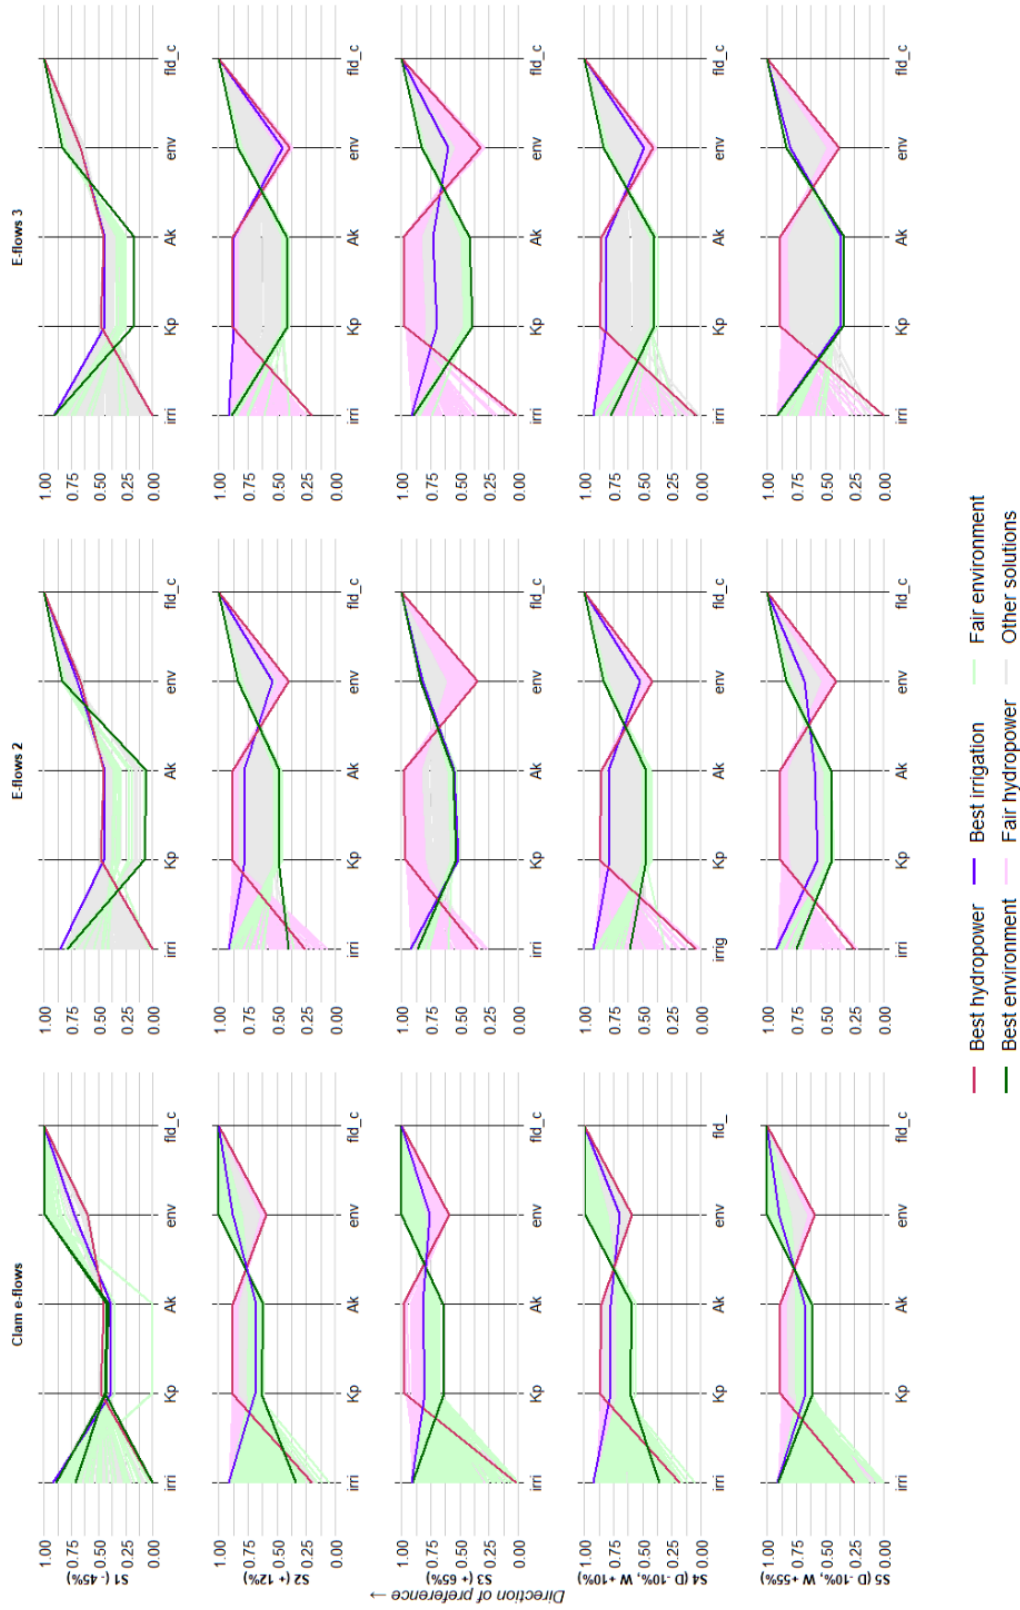


Figure 5: Full set of non-dominated solutions in the future scenarios with the 'best' solution for each water user and 'fair' solutions for hydropower and environment highlighted. The objective values for each water user have been normalised using the minimum and maximum values over all simulations with the highest performance for each objective placed at the top of the axes. The order in which water users are presented has been chosen to accentuate the trade-offs. Notation- water users: Irri- irrigation, Kp- hydropower from Kpong Dam, Ak- hydropower from Akosombo Dam, env- environment (clam e-flows, e-flows 2 or e-flows 3), fld_c- flood control. Notation- scenarios: S1 to S5- Scenario 1 to 5, D- dry season flow, W- wet season flow.

410 5 Discussion

411 The Lower Volta River System is characterized by the dominance of hydropower generation for Ghana
412 and its neighbouring countries. This has come at a high cost to downstream ecosystem services and
413 communities (Tsikata, 2008; Lawson, 1972; Ntiamoah-Baidu et al., 2017). The results from this study
414 show that likewise, some cost to hydropower production would have to be borne for e-flows
415 implementation and the restoration of some of these ecosystem services under current climatic
416 conditions. For the implementation of clam e-flows 80% of the time, i.e., a fair environmental solution,
417 the country would forfeit at least 11.6% of the firm annual power demand from Akosombo Dam. For
418 the implementation of only the dry season flow recommendations of e-flows 2 and 3, about 32% and
419 38% respectively of current firm energy requirement would have to be supplemented with power
420 generation from other sources. The release of floods as recommended in the dynamic e-flow
421 configurations (e-flows 2 and 3) is not a Pareto approximate operation policy within the current
422 operating constraints of the Akosombo Dam because in addition to flooding pre-dam floodplains
423 which are now permanently inhabited (Ayivor and Ofori, 2017), releasing flows above the maximum
424 turbine capacity of 1,603 m³/s at Akosombo means that these water volumes are lost to power
425 generation. Flood releases also far exceed irrigation water demands.

426 While the majority of climate predictions for the Volta River generally point to an increase in annual
427 water availability (Kunstmann and Jung, 2005; Aerts et al., 2006; Jung et al., 2012; Abubakari, 2021;
428 Jin et al., 2018; Sylla et al., 2018), based on this study, an argument can be made that both an increase
429 or a decrease in inflows to the Lower Volta enhance the potential for e-flows implementation
430 compared to the current baseline. On the one hand, an increase in inflows to the Akosombo dam as
431 applied in scenario 3, reduces the amount of the firm energy requirement that would have to be
432 supplemented by other sources for the implementation of 'fair environmental solutions' to about
433 3.9% (vs 11.6%) for clam e-flows, and then 23.2% (vs 32%) for e-flows 2 and 33.7% (vs 38%) for e-flows
434 3. On the other hand, a decrease in inflows to the Akosombo Dam, whereby at best only 2,774
435 GWh/year of hydropower can be generated, provides opportunity to strategically release
436 recommended dry season e-flows to reap some environmental benefits out of a 'bad' situation where
437 annual flow releases from the dam will be low anyway. This operation policy under dry climate
438 scenarios could also be adopted in dry years, in essence modelling the Episodic E-flows
439 Implementation approach, which is an opportunistic approach to dam re-operation that takes
440 advantage of prevailing hydrological conditions (Warner et al., 2014; Yang and Yang, 2014; Owusu et
441 al., 2021). This contrasts with the alternative approaches, Adaptive Management and Blanket

442 Operation which represent more structural inclusion of e-flows in the dam operation policy (Warner
443 et al., 2014).

444 Only future climate scenarios were modelled in this study; however, inferences can also be made on
445 the effect of simple energy and water demand futures on the Lower Volta system. For instance, an
446 increase in irrigation demand will trade-off against hydropower production at Kpong Dam and an
447 increase in the firm energy requirement or the continuation of the *de-facto* policy of hydropower
448 maximisation at Akosombo Dam, despite the availability of alternative power generation sources
449 (Dye, 2020; Kumi, 2017), will weaken the potential for re-operation of the dam for the riverine
450 environment. Changes in upstream water consumption as well as the construction of new dams such
451 as the Pwalugu Dam in northern Ghana will also affect inflows to the Akosombo Dam. Gonzalez et al.
452 (2021), however, show that practical coordination of the operation of major infrastructure in the Volta
453 Basin, as compared to the current approach whereby dam operators fail to consider downstream built
454 infrastructure, reduces the impact on inflows to the Akosombo Dam in particular, and also maximises
455 basin-wide benefits. Undoubtedly this coordination should extend beyond the Volta Basin to include
456 the entire electricity generation portfolio of Ghana and neighbouring countries to further reduce the
457 impact of e-flows implementation in the Lower Volta on power supply.

458 Expanding on the current electricity generation portfolio of Ghana, the contribution of other
459 renewable energy sources besides hydropower to the power mix has remained under 1% since 2000,
460 despite an on-grid target of 10% by 2020 (now extended to 2030) (Acheampong et al., 2021; Energy
461 Commission Ghana, 2022). The alternative sources of electricity in Ghana use carbon fuels for thermal
462 power generation, accounting for approximately 65% of the electricity generation portfolio in 2020
463 (Dye, 2020; Acheampong et al., 2021; Energy Commission Ghana, 2022). It is expected that these
464 alternative carbon-based power sources contribute more to climate change compared to power
465 generation from Akosombo and Kpong dams due to the fact greenhouse gas emissions from
466 hydropower dams is negatively correlated with dam age and even the more recent dam, Kpong, has
467 been in operation for over 35 years (dos Santos et al., 2006; Barros et al., 2011). As such, dam re-
468 operation in Ghana may have the long-term environmental and economic consequences of higher
469 greenhouse gases emissions if it results in a higher reliance on the existing carbon-based power
470 generation options, rather than other renewables like solar and wind power. Furthermore, in Ghana,
471 hydropower has traditionally been a cheaper source of electricity compared to fossil fuel-based power
472 generation and as Ghana has increased its reliance on the latter, electricity generation costs have
473 increased resulting in higher tariffs for consumers (Energy Commission Ghana, 2022; Public Utilities
474 Regulatory Commission, 2015). Finally, any reduction in hydropower production from Akosombo and
475 Kpong dams due to re-operation may result in reduced overall electricity supply in Ghana as

476 experienced during periods of drought in the past (Dye, 2020). It is estimated that the negative
477 economic impacts of power shortages and load shedding, such as decreased productivity in industries,
478 loss of revenue for businesses, and increased costs for backup power sources led to a GDP reduction
479 of about 1.8-2% during the 2014-2016 power crisis (Acheampong et al., 2021). Considering these
480 potential adverse impacts of dam re-operation, it is recommended that future studies encompass a
481 deeper analysis of the energy landscape of Ghana and investigate carbon emissions and the path to
482 greener energy in the country, as well as energy pricing and economic implications.

483 By exploring the room for compromise in the Lower Volta with respect to e-flows implementation this
484 research has taken a first step towards a comprehensive assessment of the trade-offs involved at a
485 national and local level. The potential re-operation of the Akosombo and Kpong dams can also benefit
486 from (i) the groundwork laid by research on the pre- and post-dam river system (Lawson, 1972;
487 Tsikata, 2008; De-Graft Johnson, 1999; Nyekodzi et al., 2018; Obirikorang et al., 2013; Adjei-Boateng
488 et al., 2012; Owusu et al., 2022b), (ii) insights deriving from interviews and extensive stakeholder
489 engagement (Ayivor and Ofori, 2017; Ohemeng et al., 2017; Nukpezah et al., 2017), and (iii) existing
490 supporting legislation for e-flows implementation (L.I.1692 Water Use Regulations, Ghana, 2001).
491 Indeed, research on successful and stalled cases of dam re-operation indicates that stakeholder
492 engagement and supporting legislation enhance the chances of successful e-flows implementation
493 (Owusu et al., 2022a, 2021) .

494 Finally, the successful application of the EMODPS framework in exploring trade-offs inherent to e-
495 flows implementation in a heavily modified river under uncertainty holds promise for similar
496 applications elsewhere. In order to find a policy for multiple objectives in such cases, a flexible
497 structure to map states to actions is needed. With traditional control optimization techniques, the
498 uncertainties need to be modelled explicitly, which creates a high computational burden and limits
499 the ability to evaluate a large set of uncertainties (Giuliani et al, 2016). EMODPS overcomes this
500 challenge by directly conditioning the decisions to exogenous information without requiring an explicit
501 probabilistic model. With EMODPS, only the goals and direction of preference are required in setting
502 up the multi-objective decision problem, making the use of this method feasible even in data scarce
503 conditions. This study therefore concurs with Herman et al. (2020) who argue that direct policy search
504 methods are a promising technique to enable adaptivity in water resources assessment by allowing
505 the flexible integration of new information about the system into management decision making.

506 6 Conclusion

507 A dam is designed with future uses in mind – this provides the justification for its construction. The
508 future, however, can turn out differently from that envisaged in the dam design. Therefore, re-

509 operation of the dam to meet changing demands is a likely necessity. This study investigates current
510 and future trade-offs between water users in the Lower Volta River Basin and specifically explores the
511 potential to deliver environmental flows to support various ecosystem services that have been
512 negatively impacted by the current operation of the Akosombo and Kpong dams. The results highlight
513 the dominance of hydropower production in the Lower Volta; if this relaxes there is more opportunity
514 for restoration of the riverine environment under current climate and water use conditions and even
515 more so under future scenarios where inflows to the Lake Volta increase. In future scenarios whereby
516 inflows to the Lake Volta decrease, it is still possible to strategically manage and time water releases
517 to provide dry season low flows which will support the clam fishery and help control aquatic weeds
518 and some water borne diseases in the Lower Volta. This study applied advanced optimisation
519 techniques to identify and analyse dam operation policies for e-flows under discrete climatic
520 scenarios. Future studies should focus on the robustness and limits of these policies under
521 multitudinous future climatic and water use scenarios. Such robustness studies, together with flow
522 experimentation, will reveal dam operation policies that may be adopted with some confidence
523 presently. It will also build on groundwork already laid, through e-flows legislation and extensive
524 collaborative scientific studies, for the successful re-operation of the Akosombo and Kpong dams for
525 the environment and other water users.

526

527 **Acknowledgement**

528 This research is part of the EuroFLOW project (EUROpean training and research network for
529 environmental FLOW management in river basins) funded by the European Union's Horizon 2020
530 Research and Innovation Programme under the Marie Skłodowska-Curie grant Agreement (MSCA) No.
531 765553.

532 J.Z.S and J.S. are supported by the Multi-Actor Systems Research Programme of TU Delft.

533 **Data availability**

534 The hydrological and hydraulic data associated with this manuscript, specifically, historical water
535 levels, dam releases, and storage-area equations for the Akosombo and Kpong dams, will be made
536 available upon consultation with the national organisation, Volta River Authority (VRA), that owns the
537 data. Requests for these data may be made to the corresponding author.

538 The model code for the running the Evolutionary Multi-Objective Direct Policy Search for the
539 Akosombo and Kpong dams is available on Github at: https://github.com/Afua-O/Vol_Opt.git

540

541 **Declaration of interests**

542 Some authors are members of the editorial board of Hydrology and Earth Systems Sciences journal.
543 The authors declare that they have no other known competing financial interests or personal
544 relationships that could have influenced the work reported in this paper.

545 **Author contribution**

546 AO: Conceptualization, Methodology, Data collection, Formal analysis, Interpretation, Writing-
547 original draft preparation.

548 JZS: Methodology, Formal analysis, Writing-review and editing.

549 MM: Conceptualization, Data collection, Writing-review and editing, Supervision, Project
550 administration.

551 PvdZ: Conceptualization, Writing-review and editing, Supervision, Funding acquisition.

552 JS: Conceptualization, Methodology, Writing-review and editing, Supervision, Funding acquisition

553 **References**

- 554 Abubakari, S.: Assessing impacts of climate change on hydrology in data-scarce Volta River Basin using
555 downscaled reanalysis data, *International Journal of Hydrology Science and Technology*, 12, 176–201,
556 <https://doi.org/10.1504/IJHST.2021.116667>, 2021.
- 557 Acheampong, T., Menyeh, B. O., and Agbevivi, D. E.: Ghana's Changing Electricity Supply Mix and Tariff
558 Pricing Regime: Implications for the Energy Trilemma, *Oil, Gas & Energy Law*, 19, 2021.
- 559 Acreman, M., Arthington, A. H., Colloff, M. J., Couch, C., Crossman, N. D., Dyer, F., Overton, I., Pollino,
560 C. A., Stewardson, M. J., and Young, W.: Environmental flows for natural, hybrid, and novel riverine
561 ecosystems in a changing world, *Front Ecol Environ*, 12, 466–473, <https://doi.org/10.1890/130134>,
562 2014.
- 563 Adjei-Boateng, D., Agbo, N. W., Agbeko, N. A., Obirikorang, K. A., and Amisah, S.: The Current State of
564 the Clam, *Galatea paradoxa*, Fishery at the Lower Volta River, Ghana, IIFET 2012 Tanzania Proceedings,
565 1–12, 2012.
- 566 Aerts, J. C. J. H., Renssen, H., Ward, P. J., De Moel, H., Odada, E., Bouwer, L. M., and Goosse, H.:
567 Sensitivity of global river discharges under Holocene and future climate conditions, *Geophys Res Lett*,
568 33, 19401, <https://doi.org/10.1029/2006GL027493>, 2006.
- 569 Akpabey, F. J., Addico, G., and Amegbe, G.: Flow Requirements for Aquatic Biodiversity and Aquatic
570 Weeds, in: *Dams, development and downstream communities : implications for re-optimising the*
571 *operations of the Akosombo and Kpong Dams in Ghana*, edited by: Ntiamao-Baidu, Y., Ampomah, B.
572 Y., and Ofosu, E. A., Digibooks Ghana Ltd, Tema, Ghana, 97–116, 2017.
- 573 Alhassan, H. S.: Viewpoint - Butterflies vs. Hydropower: Reflections on large dams in contemporary
574 Africa, *Water Alternatives*, 2, 148–160, 2009.
- 575 Almeida, R. M., Shi, Q., Gomes-Selman, J. M., Wu, X., Xue, Y., Angarita, H., Barros, N., Forsberg, B. R.,
576 García-Villacorta, R., Hamilton, S. K., Melack, J. M., Montoya, M., Perez, G., Sethi, S. A., Gomes, C. P.,
577 and Flecker, A. S.: Reducing greenhouse gas emissions of Amazon hydropower with strategic dam
578 planning, *Nature Communications* 2019 10:1, 10, 1–9, <https://doi.org/10.1038/s41467-019-12179-5>,
579 2019.
- 580 Amisigo, B. A., McCluskey, A., and Swanson, R.: Modeling impact of climate change on water resources
581 and agriculture demand in the Volta Basin and other basin systems in Ghana, *Sustainability*
582 (Switzerland), 7, 6957–6975, <https://doi.org/10.3390/su7066957>, 2015.
- 583 Annor, F. O., Boateng-Gyimah, M., Mul, M., Padi, P., Adwubi, A., Darkwa, K., and Addo, C.: Trade-offs
584 between hydropower production and downstream flow requirements, in: *Dams, Development and*

585 Downstream Communities. Implications for re-optimising the operations of Akosombo and Kpong
586 dams in Ghana, edited by: Ntiamoa-Baidu, Y., Ampomah, B. Y., and Ofosu, E. A., Digibooks Ghana Ltd,
587 Tema, Ghana, 211–230, 2017.

588 Ansar, A., Flyvbjerg, B., Budzier, A., and Lunn, D.: Should we build more large dams? The actual costs
589 of hydropower megaproject development, *Energy Policy*, 69, 43–56,
590 <https://doi.org/10.1016/J.ENPOL.2013.10.069>, 2014.

591 Appeaning Addo, K., Brempong, E. K., and Jayson-Quashigah, P. N.: Assessment of the dynamics of the
592 Volta river estuary shorelines in Ghana, *Geoenvironmental Disasters*, 7, 19,
593 <https://doi.org/10.1186/s40677-020-00151-1>, 2020.

594 Ayivor, J. S. and Ofori, B. D.: Impacts of Hydrological Changes of the Volta River on Local Livelihoods:
595 Lessons for Re-Operation and Re-Optimisation of the Akosombo And Kpong Dams, in: *Dams,
596 development and downstream communities : implications for re-optimising the operations of the
597 Akosombo and Kpong Dams in Ghana*, edited by: Ntiamoa-Baidu, Y., Ampomah, B. Y., and Ofosu, E. A.,
598 Digibooks Ghana Ltd, Tema, Ghana, 63–93, 2017.

599 Baah-Boateng, W., Twum-Barimah, R., Sawyerr, L. M., and Ntiamoa-Baidu, Y.: Perceptions of the
600 Effects of Re-Operation of The Akosombo and Kpong Dams on the Livelihoods of Downstream
601 Communities, in: *Dams, development and downstream communities : implications for re-optimising
602 the operations of the Akosombo and Kpong Dams in Ghana*, edited by: Ntiamoa-Baidu, Y., Ampomah,
603 B. Y., and Ofosu, E. A., Tema, Ghana, 233–256, 2017.

604 Barros, N., Cole, J. J., Tranvik, L. J., Prairie, Y. T., Bastviken, D., Huszar, V. L. M., Del Giorgio, P., and
605 Roland, F.: Carbon emission from hydroelectric reservoirs linked to reservoir age and latitude, *Nat
606 Geosci*, 4, 593–596, <https://doi.org/10.1038/ngeo1211>, 2011.

607 Beadle, L. C.: *The inland waters of tropical Africa. An introduction to tropical limnology.*, Longman
608 Group, London, 365 pp., 1974.

609 Best, J.: Anthropogenic stresses on the world’s big rivers, [https://doi.org/10.1038/s41561-018-0262-](https://doi.org/10.1038/s41561-018-0262-x)
610 [x](https://doi.org/10.1038/s41561-018-0262-x), 2019.

611 Bingham, G., Bishop, R., Brody, M., Bromley, D., Clark, E., Cooper, W., Costanza, R., Hale, T., Hayden,
612 G., Kellert, S., Norgaard, R., Norton, B., Payne, J., Russell, C., and Suter, G.: Issues in ecosystem
613 valuation: improving information for decision making, *Ecological Economics*, 14, 73–90,
614 [https://doi.org/10.1016/0921-8009\(95\)00021-Z](https://doi.org/10.1016/0921-8009(95)00021-Z), 1995.

615 Bollen, M., Trouw, K., Lerouge, F., Gruwez, V., Bolle, A., Hoffman, B., Leysen, G., De Kesel, Y., and
616 Mercelis, P.: Design of a Coastal Protection Scheme for Ada at the Volta River Mouth (Ghana), Coastal
617 Engineering Proceedings, 1, 36–48, <https://doi.org/10.9753/icce.v32.management.36>, 2011.

618 Costanza, R., D'Arge, R., De Groot, R., Farber, S., Grasso, M., Hannon, B., Limburg, K., Naeem, S.,
619 O'Neill, R. V., Paruelo, J., Raskin, R. G., Sutton, Paul., and Van Den Belt, M.: The value of the world's
620 ecosystem services and natural capital, *Nature*, 387, 253–260, <https://doi.org/10.1038/387253a0>,
621 1997.

622 Costanza, R., de Groot, R., Sutton, P., van der Ploeg, S., Anderson, S. J., Kubiszewski, I., Farber, S., and
623 Turner, R. K.: Changes in the global value of ecosystem services, *Global Environmental Change*, 26,
624 152–158, <https://doi.org/10.1016/J.GLOENVCHA.2014.04.002>, 2014.

625 Darko, D. and Tsikata, D.: The context and politics of decision making on large dams in Ghana: an
626 overview, Manchester, 2019.

627 De-Graft Johnson, K. K.: Overview of the weed problems in the Volta basin, in: The sustainable
628 integrated development of the Volta Basin in Ghana, edited by: Gordon, C. and Amatekpor, J., Volta
629 Basin Research Project, University of Ghana, Legon, Accra, iii, 159 pages :, 1999.

630 Duflo, E. and Pande, R.: Dams, *Quarterly Journal of Economics*, 122, 601–646,
631 <https://doi.org/10.1162/qjec.122.2.601>, 2007.

632 Dye, B. J.: Structural reform and the politics of electricity crises in Ghana: tidying whilst the house is
633 on fire?, Manchester, 2020.

634 Energy Commission Ghana: 2022 National Energy Statistics, Accra, 2022.

635 Eshun, M. E. and Amoako-Tuffour, J.: A review of the trends in Ghana's power sector,
636 <https://doi.org/10.1186/s13705-016-0075-y>, 8 April 2016.

637 Fitzhugh, T. W. and Richter, B. D.: Quenching urban thirst: Growing cities and their impact on
638 freshwater ecosystems, *Bioscience*, 54, 741–754, [https://doi.org/10.1641/0006-](https://doi.org/10.1641/0006-3568(2004)054[0741:QUTGCA]2.0.CO;2)
639 [3568\(2004\)054\[0741:QUTGCA\]2.0.CO;2](https://doi.org/10.1641/0006-3568(2004)054[0741:QUTGCA]2.0.CO;2), 2004.

640 Flyvbjerg, B. and Bester, D. W.: The Cost-Benefit Fallacy: Why Cost-Benefit Analysis Is Broken and How
641 to Fix It, *J Benefit Cost Anal*, 12, 395–419, <https://doi.org/10.1017/BCA.2021.9>, 2021.

642 Ghana: L.I. 1692 Water Use Regulations, Ghana, 2001.

643 GIDA: Detailed feasibility study of Accra Plains Irrigation project, 200,000 ha. Final, Accra, 431 pp pp.,
644 2009.

645 Giuliani, M., Castelletti, A., Pianosi, F., Mason, E., and Reed, P. M.: Curses, Tradeoffs, and Scalable
646 Management: Advancing Evolutionary Multiobjective Direct Policy Search to Improve Water Reservoir
647 Operations, *J Water Resour Plan Manag*, 142, 04015050, [https://doi.org/10.1061/\(asce\)wr.1943-](https://doi.org/10.1061/(asce)wr.1943-)
648 5452.0000570, 2016.

649 Gonzalez, J. M., Matrosov, E. S., Obuobie, E., Mul, M., Pettinotti, L., Gebrechorkos, S. H., Sheffield, J.,
650 Bottacin-Busolin, A., Dalton, J., Smith, D. M., and Harou, J. J.: Quantifying Cooperation Benefits for
651 New Dams in Transboundary Water Systems Without Formal Operating Rules, *Front Environ Sci*, 9,
652 107, <https://doi.org/10.3389/fenvs.2021.596612>, 2021.

653 Grill, G., Lehner, B., Lumsdon, A. E., Macdonald, G. K., Zarfl, C., and Reidy Liermann, C.: An index-based
654 framework for assessing patterns and trends in river fragmentation and flow regulation by global dams
655 at multiple scales, *Environmental Research Letters*, 10, 015001, <https://doi.org/10.1088/1748->
656 9326/10/1/015001, 2015.

657 Gyau-Boakye, P.: Environmental Impacts of the Akosombo Dam and Effects of Climate Change on the
658 Lake Levels, *Environ Dev Sustain*, 3, 17–29, <https://doi.org/10.1023/A:1011402116047>, 2001.

659 Hafner, M., Tagliapietra, S., and De Strasser, L.: *Energy in Africa: Challenges and Opportunities*,
660 Springer Nature Switzerland AG, Cham, Switzerland, 125 pp., 2018.

661 He, F., Zarfl, C., Bremerich, V., David, J. N. W., Hogan, Z., Kalinkat, G., Tockner, K., and Jähnig, S. C.: The
662 global decline of freshwater megafauna, *Glob Chang Biol*, 25, 3883–3892,
663 <https://doi.org/10.1111/GCB.14753>, 2019.

664 Herman, J. D., Quinn, J. D., Steinschneider, S., Giuliani, M., and Fletcher, S.: Climate Adaptation as a
665 Control Problem: Review and Perspectives on Dynamic Water Resources Planning Under Uncertainty,
666 *Water Resour Res*, 56, e24389, <https://doi.org/10.1029/2019WR025502>, 2020.

667 Horne, A., Kaur, S., Szemis, J., Costa, A., Webb, J. A., Nathan, R., Stewardson, M., Lowe, L., and Boland,
668 N.: Using optimization to develop a “designer” environmental flow regime, *Environmental Modelling*
669 *& Software*, 88, 188–199, <https://doi.org/10.1016/J.ENVSOF.2016.11.020>, 2017a.

670 Horne, A. C., Webb, J. A., McClain, M., Richter, BrianStewardson, M. J., Poff, N. L., Hart, B., Acreman,
671 M., O’Donnell, E., Bond, N., and Arthington, A. H.: Research Priorities to Improve Future Environmental
672 Water Outcomes, *Front Environ Sci*, 5, 89, <https://doi.org/10.3389/fenvs.2017.00089>, 2017b.

673 Hurford, A., Huskova, I., and Harou, J. J.: Using many-objective trade-off analysis to help dams promote
674 economic development, protect the poor and enhance ecological health, *Environ Sci Policy*, 38, 3259–
675 3277, <https://doi.org/http://dx.doi.org/10.1016/j.envsci.2013.10.003>, 2014.

676 Hurford, A. P. and Harou, J. J.: Balancing ecosystem services with energy and food security- Assessing
677 trade-offs from reservoir operation and irrigation investments in Kenya's Tana Basin, *Hydrol Earth Syst*
678 *Sci*, 18, 3259–3277, <https://doi.org/10.5194/hess-18-3259-2014>, 2014.

679 Hurford, A. P., McCartney, M. P., Harou, J. J., Dalton, J., Smith, D. M., and Odada, E.: Balancing services
680 from built and natural assets via river basin trade-off analysis, *Ecosyst Serv*, 45, 101144,
681 <https://doi.org/10.1016/j.ecoser.2020.101144>, 2020.

682 IPCC: Climate Change 2021: The Physical Science Basis. Contribution of Working Group I to the Sixth
683 Assessment Report of the Intergovernmental Panel on Climate Change, edited by: Masson-Delmotte,
684 V., P., Zhai, A., Pirani, S. L., Connors, C., Péan, S., Berger, N., Caud, Y. Chen, L., Goldfarb, M. I., Gomis,
685 M., Huang, K., Leitzell, E., Lonnoy, J. B. R., Matthews, T. K., Maycock, T., Waterfield, O., Yelekçi, R. Y.,
686 and Zhou, B., Cambridge University Press, 2021.

687 Jin, L., Whitehead, P. G., Appeaning Addo, K., Amisigo, B., Macadam, I., Janes, T., Crossman, J., Nicholls,
688 R. J., McCartney, M., and Rodda, H. J. E.: Modeling future flows of the Volta River system: Impacts of
689 climate change and socio-economic changes, *Science of The Total Environment*, 637–638, 1069–1080,
690 <https://doi.org/10.1016/J.SCITOTENV.2018.04.350>, 2018.

691 Jung, G., Wagner, S., and Kunstmann, H.: Joint climate–hydrology modeling: an impact study for the
692 data-sparse environment of the Volta Basin in West Africa, *Hydrology Research*, 43, 231–248,
693 <https://doi.org/10.2166/NH.2012.044>, 2012.

694 Kiptala, J. K., Mul, M. L., Mohamed, Y. A., and van der Zaag, P.: Multiobjective Analysis of Green-Blue
695 Water Uses in a Highly Utilized Basin: Case Study of Pangani Basin, Africa, *J Water Resour Plan Manag*,
696 144, 05018010, [https://doi.org/10.1061/\(ASCE\)WR.1943-5452.0000960](https://doi.org/10.1061/(ASCE)WR.1943-5452.0000960), 2018.

697 Kumi, E. N.: *The Electricity Situation in Ghana: Challenges and Opportunities*, Washington DC, 2017.

698 Kunstmann, H. and Jung, G.: Regional Hydrological Impacts of Climatic Variability and Change, in:
699 *Proceedings of symposium S6 held 1 during the Seventh IAHS Scientific Assembly at Foz do Iguaçu*,
700 Brazil, 2005.

701 Lawson, R. M.: The changing economy of the Lower Volta 1954-67: A study in the dynamics of rural
702 economic growth, 1–127 pp., <https://doi.org/10.4324/9780429490637>, 1972.

703 Luisetti, T., Bateman, I. J., and Kerry Turner, R.: Testing the fundamental assumption of choice
704 experiments: Are values absolute or relative?, *Land Econ*, 87, 284–296,
705 <https://doi.org/10.3368/LE.87.2.284>, 2011.

706 Matrosov, E. S., Huskova, I., Kasprzyk, J. R., Harou, J. J., Lambert, C., and Reed, P. M.: Many-objective
707 optimization and visual analytics reveal key trade-offs for London's water supply, *J Hydrol (Amst)*, 531,
708 1040–1053, <https://doi.org/10.1016/j.jhydrol.2015.11.003>, 2015.

709 McCartney, M., Forkuor, G., Sood, A., Amisigo, B., Hattermann, F., and Muthuwatta, L.: The water
710 resource implications of changing climate in the Volta River Basin, *IWMI Research Report*, Colombo,
711 Sri Lanka, 1–33 pp., <https://doi.org/10.5337/2012.219>, 2012.

712 Moxon, J.: *Man's greatest lake: The story of Ghana's Akosombo dam.*, Andre Deutsch, London, 1969.

713 Mul, M. L., Ofosu, E. A., Mante, Y., Ghansah, B., Annor, F. O., and Boateng-Gyimah, M.: Defining
714 Restoration flow targets to restore ecological functions and livelihoods in the Lower Volta Basin, in:
715 *Dams, Development and Downstream Communities: Implications for Re-optimising the Operations of*
716 *the Akosombo and Kpong Dams in Ghana*, edited by: Ntiamo-Baidu, Y., Ampomah, B. Y., and Ofosu,
717 E. A., Digibooks Ghana Ltd, Tema, Ghana, 185–209, 2017.

718 Ntiamo-Baidu, Y., Ampomah, B. Y., and Ofosu, E. A.: *Dams, development and downstream*
719 *communities : implications for re-optimising the operations of the Akosombo and Kpong Dams in*
720 *Ghana*, Digibooks Ghana Ltd, Tema, Ghana, xv, 466 pages : pp., 2017.

721 Nukpezah, D., Sawyerr, L. M., Twum-Barimah, R., and Ntiamo-Baidu, Y.: *Re-Optimisation and Re-*
722 *Operation Study of Akosombo and Kpong Dams: Voices from the Downstream Communities*, in: *Dams,*
723 *development and downstream communities : implications for re-optimising the operations of the*
724 *Akosombo and Kpong Dams in Ghana*, edited by: Ntiamo-Baidu, Y., Ampomah, B. Y., and Ofosu, E. A.,
725 Digibooks Ghana Ltd, Tema, Ghana, 27–42, 2017.

726 Nyekodzi, G., Lawson, E. T., and Gordon, C.: Evaluating the impacts of dredging and saline water
727 intrusion on rural livelihoods in the Volta Estuary, *International Journal of River Basin Management*,
728 16, 93–105, <https://doi.org/10.1080/15715124.2017.1372445>, 2018.

729 Obirikorang, K. A., Amisah, S., and Adjei-Boateng, D.: Habitat Description of the Threatened
730 Freshwater Clam, *Galatea paradoxa* (Born 1778) at the Volta Estuary, Ghana, *Current World*
731 *Environment Journal*, 8, 331–339, <https://doi.org/10.12944/cwe.8.3.01>, 2013.

732 Ohemeng, F., Nartey, N. N. A., Sawyerr, L. M., Twum-Barimah, R., and Ntiamo-Baidu, Y.: *Re-Operation*
733 *and Re-Optimisation of Akosombo and Kpong Dams - Engaging Downstream Communities in Re-*
734 *Operation Scenario Options*, in: *Dams, development and downstream communities : implications for*
735 *re-optimising the operations of the Akosombo and Kpong Dams in Ghana*, edited by: Ntiamo-Baidu,
736 Y., Ampomah, B. Y., and Ofosu, E. A., Digibooks Ghana Ltd, Tema, Ghana, 257–275, 2017.

737 Owusu, A., Mul, M., van der Zaag, P., and Slinger, J.: May the Odds Be in Your Favor: Why Many
738 Attempts to Reoperate Dams for the Environment Stall, *J Water Resour Plan Manag*, 148,
739 [https://doi.org/10.1061/\(asce\)wr.1943-5452.0001521](https://doi.org/10.1061/(asce)wr.1943-5452.0001521), 2022a.

740 Owusu, A., Mul, M., Strauch, M., van der Zaag, P., Volk, M., and Slinger, J.: The clam and the dam: A
741 Bayesian belief network approach to environmental flow assessment in a data scarce region, *Science*
742 *of The Total Environment*, 810, 151315, <https://doi.org/10.1016/J.SCITOTENV.2021.151315>, 2022b.

743 Owusu, A. G., Mul, M., Zaag, P. van der, and Slinger, J.: Re-operating dams for environmental flows:
744 From recommendation to practice, *River Res Appl*, 37, 176–186, <https://doi.org/10.1002/rra.3624>,
745 2021.

746 People, W. and Rogoyska, M.: The effect of the Volta River Hydroelectric Project on the salinity of the
747 Lower Volta River, *Ghana Journal of Science*, 9, 9–20, 1969.

748 Postel, S. and Richter, B.: *Rivers for Life- Managing Water for People and Nature*, Island Press,
749 Washington, 2003.

750 Public Utilities Regulatory Commission: Public Utilities Regulatory Commission Press Release:
751 Approved Electricity and Water Tariffs Effective 14th December 2015 , 2015.

752 Quinn, J. D., Reed, P. M., Giuliani, M., and Castelletti, A.: Rival framings: A framework for discovering
753 how problem formulation uncertainties shape risk management trade-offs in water resources
754 systems, *Water Resour Res*, 53, 7208–7233, <https://doi.org/10.1002/2017WR020524>, 2017.

755 Reed, P. M., Hadka, D., Herman, J. D., Kasprzyk, J. R., and Kollat, J. B.: Evolutionary multiobjective
756 optimization in water resources: The past, present, and future, *Adv Water Resour*, 51, 438–456,
757 <https://doi.org/10.1016/j.advwatres.2012.01.005>, 2013.

758 Richter, B. D., Postel, S., Revenga, C., Scudder, T., Lehner, B., Churchill, A., and Chow, M.: Lost in
759 development’s shadow: The downstream human consequences of dams, *Water Alternatives*, 3, 14–
760 42, 2010.

761 Roest, L. W. M.: The coastal system of the Volta delta , Ghana: Strategies and opportunities for
762 development. TU Delft Delta Infrastructures and Mobility Initiative (DIMI), 40 pp., 2018.

763 Roudier, P., Ducharne, A., and Feyen, L.: Climate change impacts on runoff in West Africa: a review,
764 *Hydrology and Earth System Sciences Earth Syst. Sci*, 18, 2789–2801, [https://doi.org/10.5194/hess-](https://doi.org/10.5194/hess-18-2789-2014)
765 [18-2789-2014](https://doi.org/10.5194/hess-18-2789-2014), 2014.

766 dos Santos, M. A., Rosa, L. P., Sikar, B., Sikar, E., and dos Santos, E. O.: Gross greenhouse gas fluxes
767 from hydro-power reservoir compared to thermo-power plants, *Energy Policy*, 34, 481–488,
768 <https://doi.org/10.1016/J.ENPOL.2004.06.015>, 2006.

769 Schlömer, S., Bruckner, T., Fulton, L., Hertwich, E., McKinnon, A. U., Perczyk, D., Roy, J., Schaeffer, R.,
770 Hänsel, G., de Jager, D., Bruckner, T., Fulton, L., Hertwich, E., McKinnon, A., Perczyk, D., Roy, J.,
771 Schaeffer, R., Sims, R., Smith, P., Wisser, R., Pichs-Madruga, R., Sokona, Y., Farahani, E., Kadner, S.,
772 Seyboth, K., Adler, A., Baum, I., Brunner, S., Eickemeier, P., Kriemann, B., Savolainen, J., Schlömer, S.,
773 von Stechow, C., Zwickel, T., and Minx, J.: Annex III: Technology-specific cost and performance
774 parameters. In: *Climate Change 2014: Mitigation of Climate Change. Contribution of Working Group
775 III to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change*, 2014.

776 Smith, L. E. D.: Assessment of the contribution of irrigation to poverty reduction and sustainable
777 livelihoods, *Int J Water Resour Dev*, 20, 243–257, <https://doi.org/10.1080/0790062042000206084>,
778 2004.

779 Sood, A., Muthuwatta, L., and McCartney, M.: A SWAT evaluation of the effect of climate change on
780 the hydrology of the Volta River basin, *Water Int*, 38, 297–311,
781 <https://doi.org/10.1080/02508060.2013.792404>, 2013.

782 Stone, R.: Hydropower. The legacy of the Three Gorges Dam., *Science*, 333, 817,
783 [https://doi.org/10.1126/SCIENCE.333.6044.817/ASSET/B2DB26CA-E76D-4AA5-A9BB-
784 5B1A0AEA74A7/ASSETS/SCIENCE.333.6044.817.FP.PNG](https://doi.org/10.1126/SCIENCE.333.6044.817/ASSET/B2DB26CA-E76D-4AA5-A9BB-5B1A0AEA74A7/ASSETS/SCIENCE.333.6044.817.FP.PNG), 2011.

785 Sylla, M. B., Faye, A., Klutse, N. A. B., and Dimobe, K.: Projected increased risk of water deficit over
786 major West African river basins under future climates, *Clim Change*, 151, 247–258,
787 <https://doi.org/10.1007/s10584-018-2308-x>, 2018.

788 The World Bank: International Development Association Project Appraisal Document for the Ghana
789 Energy Sector Transformation Initiative Project. Project Document PAD2576., Washington DC, 2018.

790 Tsikata, D.: Living in the Shadow of the Large Dams. Long Term Responses of Downstream and Lakeside
791 Communities of Ghana’s Volta River Project, Brill, 685–685 pp.,
792 <https://doi.org/10.1080/03056240802574250>, 2008.

793 Vörösmarty, C. J., Douglas, E. M., Green, P. A., and Revenga, C.: Geospatial indicators of emerging
794 water stress: An application to Africa, *Ambio*, 34, 230–236, [https://doi.org/10.1579/0044-7447-
795 34.3.230](https://doi.org/10.1579/0044-7447-34.3.230), 2005.

796 1,020MW Akosombo Hydro Electric Power Plant:
797 https://vra.com/our_mandate/akosombo_hydro_plant.php#, last access: 4 February 2021.

798 Warner, A. T., Bach, L. B., and Hickey, J. T.: Restoring environmental flows through adaptive reservoir
799 management: planning, science, and implementation through the Sustainable Rivers Project,
800 Hydrological Sciences Journal, 59, 770–785, <https://doi.org/10.1080/02626667.2013.843777>, 2014.

801 WCD: Dams and Development: A new framework for decision-making, 1st Editio., Earthscan
802 Publications Ltd, London, <https://doi.org/10.1097/GCO.0b013e3283432017>, 2000.

803 Wild, T. B., Reed, P. M., Loucks, D. P., Mallen-Cooper, M., and Jensen, E. D.: Balancing hydropower
804 development and ecological impacts in the Mekong: Tradeoffs for Sambor Mega Dam, J Water Resour
805 Plan Manag, 145, 05018019, [https://doi.org/10.1061/\(ASCE\)WR.1943-5452.0001036](https://doi.org/10.1061/(ASCE)WR.1943-5452.0001036), 2019.

806 WWF: Living Planet Report - 2018: Aiming higher., Environmental Conservation, Gland, Switzerland,
807 1–144 pp., 2018.

808 Yang, W. and Yang, Z.: Effects of long-term environmental flow releases on the restoration and
809 preservation of Baiyangdian Lake, a regulated Chinese freshwater lake, Hydrobiologia, 730, 79–91,
810 <https://doi.org/10.1007/s10750-014-1823-7>, 2014.

811 Zatarain Salazar, J., Reed, P. M., Herman, J. D., Giuliani, M., and Castelletti, A.: A diagnostic assessment
812 of evolutionary algorithms for multi-objective surface water reservoir control, Adv Water Resour, 92,
813 172–185, <https://doi.org/10.1016/j.advwatres.2016.04.006>, 2016.

814 Zatarain Salazar, J., Reed, P. M., Quinn, J. D., Giuliani, M., and Castelletti, A.: Balancing exploration,
815 uncertainty and computational demands in many objective reservoir optimization, Adv Water Resour,
816 109, 196–210, <https://doi.org/10.1016/j.advwatres.2017.09.014>, 2017.

817