



Hydrological regime of Sahelian small water bodies from combined Sentinel-2 MSI and Sentinel-3 SRAL data

Mathilde de Fleury¹, Laurent Kergoat¹, and Manuela Grippa¹

¹Géosciences Environnement Toulouse (GET), UMR 5563, Université Toulouse 3, CNRS, IRD, 14 avenue Edouard Belin, OMP, 31400 Toulouse cedex 9, France

Correspondence: Mathilde de Fleury (mathilde.de-fleury@get.omp.eu), Laurent Kergoat (laurent.kergoat@get.omp.eu), Manuela Grippa (manuela.grippa@get.omp.eu)

Abstract. In the Sahelian semi-arid region, water resources, especially small water bodies such as ponds, small lakes and reservoirs in rural areas, are of vital importance. However, because of their high number and the scarce in situ monitoring networks, these resources and their spatio-temporal variability are poorly known at the regional scale. This study investigates the hydrological regime of 37 small water bodies, located in Mali, Niger and Burkina Faso, in Central Sahel. We propose a method based on remote sensing data only, which consists of combining water height data from Sentinel-3 SAR Radar Altimeter (SRAL) with water area data obtained with Sentinel-2 Multispectral Instrument (MSI) to create dense water height time series. Water height variations are then compared to evaporation estimated by the Penman–Monteith method using ERA5 reanalysis by the European Centre for Medium-Range Weather Forecasts (ECMWF) to infer water regimes during the dry season. Three main regimes stand out: a net water loss, mainly resulting from anthropogenic withdrawals, a net water supply occurring after the end of the rainy season through river network or water table exchange, and a balanced behaviour, where water losses during the dry season closely correspond to evaporation rates. Spatial patterns have been identified: in central Burkina Faso, most of the reservoirs show a net dry season water loss, which is explained by frequent irrigation, while reservoirs in northern Burkina Faso, generally show little water loss, indicating that water withdrawal is not significant in this area. Lakes located in the Inner Niger Delta in Mali and connected to the Niger river network generally show an important water supply, particularly at the beginning of the dry season. Lakes in Niger tend to show a weak signal toward water inflow that could be explained by exchange processes with the groundwater. These results show that satellite data are effective in estimating hydrological regimes as well as the anthropogenic impact on water resources, at the large scale, including resources found in small water bodies.

Key-words: small water bodies, hydrological regime, remote sensing, Sentinel-2, Sentinel-3, Central Sahel, Burkina Faso, Mali, Niger, evaporation, water loss, water supply.

1 Introduction

In the Sahel and more generally in West Africa, small water bodies are critical resources for the inhabitants, who use them on a daily basis to meet vital needs: drinking water, livestock watering, irrigation, fishing, and bathing among others (Cecchi et al., 2009; Frenken, 2005). These water bodies are widespread all over the region and include numerous small reservoirs, for



25 which dams have been built, small natural lakes and ponds, and intermediate situations where existing lakes are more or less developed. Burkina Faso, for example, built many reservoirs, whose number increased from about 200 in 1974 to about 1650 in 2008 (Cecchi et al., 2009). The aim of such actions was to address food security issues (Douxchamps, 2014) after severe droughts (Sally et al., 2011). The central Sahelian region also hosts a large number of small temporary water bodies (Haas et al., 2009; Gardelle et al., 2010; Papa et al., 2022) whose number is still not well known. There is a clear need to better survey
30 surface water resources in this region. Monitoring and understanding lake hydrological regimes is therefore an important step toward better management of these water resources.

Since ground-based monitoring of water bodies in this area is usually restricted to some large lakes (mainly those supplying water to capital cities or used for electricity production), remote sensing data such as those provided by the Copernicus Sentinel
35 missions give an interesting tool to derive useful information. Radar altimetry monitors water heights (Birkett, 1994; Morris and Gill, 1994) by calculating the return time of a radar pulse emitted by the sensor onboard and reflected by the water surface. The Sentinel-3A and B satellites launched in 2016 and 2018 respectively carry a SAR Radar Altimeter (SRAL) on board. Their performance in measuring inland water levels has already been assessed, as in the Inner Niger Delta, resulting in an average Root Mean Square Error (RMSE) of 0.67 m (Normandin et al., 2018, Suppl. Table S5). The technology offered by Sentinel-3
40 provides a significant step forward with a much better resolved footprint than previous altimeters, allowing for the observation of smaller water bodies (Shu et al., 2020). Time series can be obtained from databases such as: DAHITI (Schwatke et al., 2015), G-REALM (Cooley et al., 2021) and HYDROWEB (Crétaux et al., 2011). Laser altimetry with ICESat-2 (Cooley et al., 2021) is also a technique currently used to measure water levels. Optical imagery is a powerful tool to detect surface water areas in cloud-free conditions, and recently several algorithms have been developed to map water bodies at the global scale (Pekel et al.,
45 2016; Messenger et al., 2016; DeVries et al., 2017; Cordeiro et al., 2021). However, the conditions required by these algorithms are not always met in Central Sahel. This is due to the variability of water optical reflectances of these water bodies in time and space (e.g., Touré, 2016), caused by the common presence of aquatic vegetation (Gardelle et al., 2010), different levels of water turbidity, including extremely turbid and bright lakes (Robert et al., 2017), and by the seasonal variability of water body characteristics. The Modified Normalized Difference Water Index (MNDWI) is frequently used to differentiate water from soil
50 (Xu, 2006), usually with automatic or supervised thresholding methods. Using this index Reis et al. (2021) found that optimal thresholds still varied over time and space in the Sahel whereas Ji et al. (2009) showed that a fairly stable MNDWI threshold over time gives good results, even in the presence of mixed water and vegetation pixels.

Studies combining surface water areas and heights estimated by remote sensing and/or a combination of remote sensing and
55 field measurements have been increasingly published during the last 5 to 10 years. Several works have been focused on large lakes. For example, Pham-Duc et al. (2020) developed a method based on remote sensing data to measure surface water extent and water volume variations in Lake Chad, the fourth largest lake in Africa. Sun et al. (2021) used remote and gauged data to estimate the water balance and water fluxes of Lake Poyang, China, over 20 years. Fewer studies focused on smaller water bodies in Europe and America (Baup et al., 2014; Schwatke et al., 2020; Gourgouletis et al., 2022). In Central Sahel, Gal et



60 al. (2016) estimated lake water inflow of Agoufou lake based on remote sensing data and evaporation modelling and validated
the method with in situ measurements. Also in Central Sahel, Fowe et al. (2015) studied the water balance of a small reservoir
in southern Burkina Faso, highlighting the variations caused by anthropogenic water withdrawal. Other studies assessed lakes
topography through bathymetry (Arsen et al., 2013) or Digital Elevation Model (DEM, Avisse et al., 2017) to retrieve lakes
storage. The variability of reservoirs at the global scale has been addressed by some recent works. For example, Cooley et al.
65 (2021) showed the great seasonal variability of reservoirs worldwide, drawing attention to the anthropogenic impacts on water
resources, and Hou et al. (2022) highlighted the important role of precipitation in the observed variabilities. However, these
global studies do not include a precise quantification of water fluxes over small water bodies in the Sahel, and several questions
remain unanswered: What is the hydrological regime of these small water bodies? What are the dominant water exchanges
in this region? How can their contribution be quantified? Is there a major anthropogenic impact on these water resources?
70 This work develops a methodology based on remote sensing data to quantify the hydrological regime of small water bodies
in Central Sahel and derives information about their seasonal and interannual variability. It allows us to better understand the
major processes at play in this region and identify human impact on these water resources.

2 Materials

2.1 Study site and lake selection

75 The study area is located in Central Sahel and includes water bodies in Mali, Burkina Faso and Niger. It covers arid, semi-arid
(Sahelian) and sub-humid (Soudanian) areas according to Andam-Akorful et al. (2017) classification, with well-defined rainy
and dry seasons enforced by a tropical monsoon system. The rainy season starts in June and ends in October, with variations
due to latitude (Frappart et al., 2009; Panthou et al., 2018). The North's rainy season is shorter and annual rainfall ranges from
around 200 mm.yr⁻¹ to 900 mm.yr⁻¹ from the North to South area. Four regions of interest can be defined based on different
80 geomorphology and development policies: the Inner Niger Delta, the centre of Burkina Faso around the capital Ouagadougou,
which is densely populated and has a large number of reservoirs, the western area of Niger, and the Burkina Faso northern
borders with Mali and Niger. Numerous water bodies are located in the study area, but the Sentinel-3 satellite orbits constrain
selection of water bodies. The inter-track distance of 104 km for one satellite and 52 km for a combination of the two (Fig.
1), with a footprint of 300 m below the track, reduces the observable surface. Due to a potential track shifting of ± 1 km at
85 maximum (Crétaux et al., 2018) lakes located between 0 and 0.3 km from the nominate altimeter track have been included in
the potential lakes to be studied. Using the maximum water extent of the Global Surface Water dataset (Pekel et al., 2016), 150
lakes were detected below the tracks. Among them, 42 had suitable altimeter data to provide long and consistent time series
for the analysis. This amounts to 26.2 % of the lakes initially detected (Fig. 1 and Table 1): 21 are located in Burkina Faso,
including 19 reservoirs, 12 in Mali and 9 in Niger, including 1 reservoir.

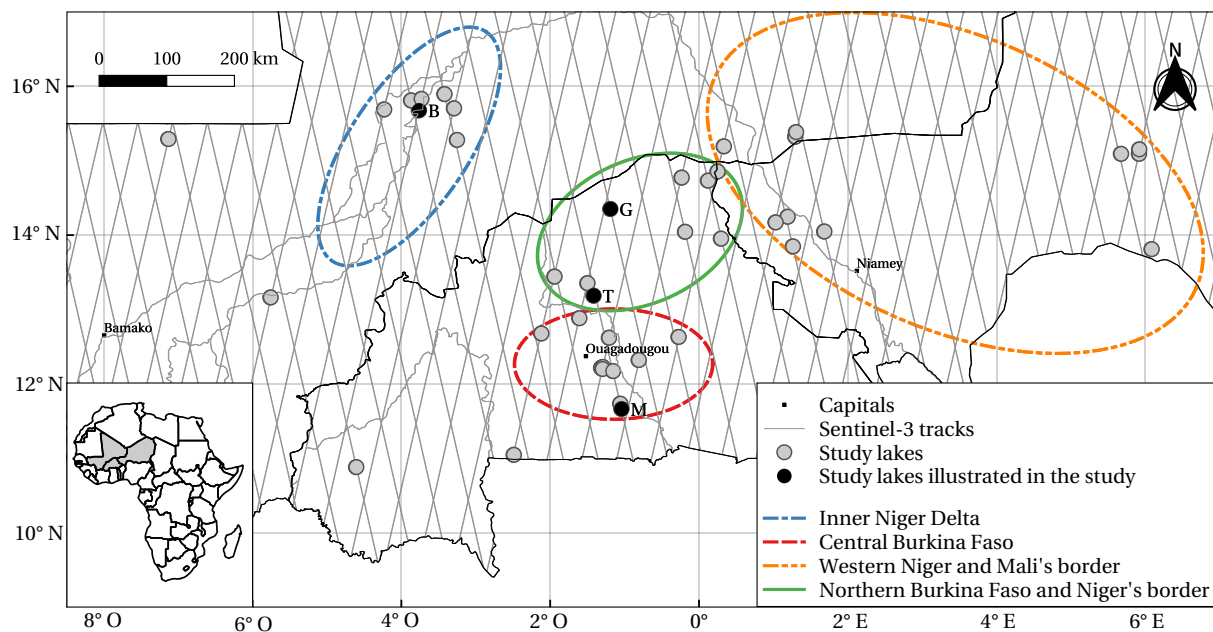


Figure 1. Study site and lakes in Central Sahel (Mali, Burkina Faso and Niger).

90 2.2 Data

Water areas and water albedos are derived from the freely available Sentinel-2 (S2) Multispectral instrument (MSI) images using the top-of-atmosphere reflectance products from the dataset "Sentinel-2 MSI: MultiSpectral Instrument, Level-1C", provided by Google Earth Engine (Gorelick et al., 2017). Measurements are made in 13 optical bands from VNIR to SWIR at a resolution of 10, 20 or 60 m depending on the band. In this study we used the blue band (B2) at 0.490 μm , the green band (B3) at 0.560 μm , the red band (B4) at 0.665 μm , all at 10 m resolution, and two SWIR bands (B11 and B12) at 1.610 and 2.190 μm with a 20 m resolution. Images are acquired from 2015 to present, with a revisit frequency of 10 days before the launch of Sentinel-2B in 2017 and five days afterwards, which allows good temporal monitoring, except when it is cloudy. Water heights are obtained from Sentinel-3 SRAL data (S3), provided by the Centre de Topographie des Océans et de l'Hydrosphère (CTOH, Frappart et al., 2021), referenced with a EGM2008 geoid model. The temporal frequency of measurements is 27 days, with a spatial resolution of 300 m (along-track) \times 1.64 km (across-track), from 2016 to present. Precipitation is estimated by the Integrated Multi-satellite Retrievals algorithm of the international satellite mission Global Precipitation Measurement (IMERG-GPM, Huffman et al., 2019). The data are provided by Google Earth Engine, through the "GPM: Global Precipitation Measurement (GPM) v6" collection, with a spatial resolution of $0.1^\circ \times 0.1^\circ$ and a temporal resolution of 30 min. Other meteorological data are provided by the "ERA5 reanalysis hourly data on single levels from 1959 to present" database (Hersbach et al., 2018) produced by the European Centre for Medium-Range Weather Forecasts (ECMWF) within the Copernicus Climate Change Service (C3S). The data are provided at the resolution $0.25^\circ \times 0.25^\circ$. Evaporation rate data provided by the



Global Lake Evaporation Volume (GLEV) dataset (Zhao et al., 2022) and Colorado pan evaporation data over a small reservoir (Boura) from Fowe et al. (2015), are used for validation over the April 2012–April 2014 period.

3 Method

110 3.1 Lake water balance estimation

The water balance approach defines the different fluxes controlling a water body regime (Winter, 1995). In this paper, we adapt the equation developed by Fowe et al. (2015), who propose a water balance equation expressed as the variations of water volumes applied to a small reservoir in Burkina Faso (Boura). All terms can be also expressed in water height, which fits our data better. The water height variation between two dates t_0 and t_1 can be written as the sum of precipitation and evaporation
115 over the same period minus a residual term, referred to as "residual water balance" (R). This term is the net results of different hydrological fluxes: water inflow from the watershed into the lake, groundwater inflow, water losses due to overflow, infiltration losses, and withdrawals due to anthropogenic uses and can be expressed in millimetre per day as:

$$R = \frac{1}{t_1 - t_0} \left[\Delta H_{t_0, t_1} - \sum_{i=t_0}^{t_1} (P_i + E_i) \right] \quad (1)$$

where P_i (mm) and E_i (mm) respectively indicate the daily precipitation over the lake and the daily evaporation from the
120 lake. During the dry season, precipitation (P_i) is null. Evaporation (E_i) is estimated using available meteorological data. Water height variation ($\Delta H_{t_0, t_1}$) is estimated using altimetric data. As the altimeter offers data with a temporal resolution of 27 days, the time series are completed by other water heights estimations derived from water areas through an area-height relationship, called A-H curve, or sometimes hypsometric curve.

3.2 Lake water height estimation

125 Water height time series are extracted through the Altimetric Time Series Software (AITiS, version 2.0, Frappart et al., 2021), which is an open-source software developed by CTOH. The process of extracting the time series is partially manual and has to be done for each lake. Among the Geophysical Data Record (GDR) variables proposed, the backscatter coefficient having a very high value for surface water is appropriate to distinguish water from soil (Taburet et al., 2020). The backscatter coefficient is extracted for data within the lake polygon. Samples that do not correspond to water are removed by thresholding. Following
130 an empirical analysis, a threshold of 40 dB is retained. This is in line with Kittel et al. (2021) and Taburet et al. (2020) who propose thresholds of 30 and 45 dB respectively. Kittel et al. (2021) also state that changes in data processed from 2020 onwards result in a drop in the backscatter coefficient of 18 dB: the threshold has been therefore set to 22 dB for acquisition dates posterior to 2020. To reduce the influence of remaining outliers on the resulting time series, the median values are extracted (Fig. 2) as suggested by Frappart et al. (2021) and a threshold of 0.25 m is applied on the associated median absolute
135 deviations (MAD). Water-like echoes created by wet sand, that may appear when the water body is empty, may also lead to



Table 1. Information and key results on study lakes. Lakes with a bold label are also shown in Sect. 4. Country abbreviations are: BF for Burkina Faso, M for Mali, N for Niger. The "nan" values indicates that conditions for five-year average residual water balance calculation have not been met.

Lake label ^a	Country	Coordinates	MNDWI threshold	Average albedo	Average water area (km ²)	Average water height variation ^b (m)	Five-year average residual water balance (mm.d ⁻¹)
Arzuma	BF	12.218,-1.298	-0.10	0.11	2.54	2.67	-3.11
B1	BF	12.171,-1.160	0.20	0.12	0.13	2.27	-10.11
Babou	BF	12.882,-1.613	-0.20	0.17	0.43	1.74	nan
Bakafé	M	15.678,-3.771	-0.05	0.13	2.34	1.51	1.63
Bam	BF	13.353,-1.504	-0.20	0.11	22.31	1.69	nan
Barkea	BF	14.044,-0.191	0.00	0.15	10.89	2.18	-1.30
Bokoko	M	15.891,-3.431	0.00	0.15	0.39	1.59	2.79
Boura	BF	11.041,-2.486	-0.25	0.10	1.44	2.95	-1.20
Dyaloub	M	15.292,-7.137	-0.30	0.15	5.73	0.89	nan
Galigel	M	15.194,0.324	-0.10	0.13	2.25	2.38	0.16
Gidan	N	13.813,6.082	0.20	0.17	1.29	0.90	0.86
Gomde	BF	14.351,-1.197	0.00	0.19	28.22	1.71	-1.54
Hagoundou	M	15.716,-3.295	0.00	0.09	37.91	1.13	9.71
Iribakat	N	15.091,5.910	0.00	0.14	0.27	2.00	-1.10
Kaboukoga	N	14.047,1.678	0.10	0.22	0.24	1.21	-0.09
Koankin	BF	11.733,-1.063	0.00	0.18	0.02	1.60	nan
Korarou	M	15.280,-3.258	-0.30	0.13	36.27	1.33	2.46
Kormou	M	15.689,-4.237	-0.20	0.13	3.65	2.80	-2.29
Koumaira	M	15.810,-3.874	-0.20	0.11	1.22	1.74	2.96
M3	M	15.383,1.303	0.10	0.13	0.30	2.33	0.82
M42	M	15.323,1.289	-0.10	0.17	0.56	2.12	0.58
Manga	BF	11.663,-1.047	-0.15	0.11	0.48	1.96	-8.28
Mogtedo	BF	12.332,-0.804	0.20	0.13	2.36	1.54	-6.49
N10	N	15.149,5.924	0.00	0.11	0.55	2.63	0.19
N4	N	14.246,1.165	0.00	0.20	4.98	1.74	0.00
Nabitenga	BF	12.618,-1.213	-0.20	0.13	0.74	2.97	-11.87
Nazounga	BF	12.675,-2.126	-0.20	0.16	0.15	1.89	-1.93
Northern Tanvi	BF	12.230,-1.303	0.00	0.11	0.13	3.09	-12.45
OuroDaka	BF	13.955,0.297	0.00	0.15	3.13	2.02	-1.48

^aLabels can be defined by: Cecchi (2014) nomenclature or nearby villages or a letter representing the country associated with a number.

^bCalculated from seasonal variations.



Lake label ^a	Country	Coordinates	MNDWI threshold	Average albedo	Average water area (km ²)	Average water height variation ^b (m)	Five-year average residual water balance (mm.d ⁻¹)
Seguenega	BF	13.441,-1.952	-0.20	0.13	1.44	2.00	-2.18
Southern Tanvi	BF	12.199,-1.302	0.20	0.18	0.22	1.98	-3.42
Tabalakh	N	15.063,5.651	-0.10	0.14	6.98	1.90	-0.39
Tambao	BF	14.733,0.117	0.05	0.13	0.15	1.39	-2.50
Tamou	N	13.848,1.257	0.00	0.21	0.04	1.50	-3.06
Tibin	BF	13.163,-1.391	0.10	0.14	15.99	1.93	-1.35
Timba	M	15.832,-3.735	-0.20	0.12	2.62	3.23	-10.85
Toussiana	BF	10.880,-4.612	0.00	0.10	1.26	2.85	-12.04
Yakouta	BF	14.772,-0.242	-0.10	0.17	0.28	1.25	-1.60
Yaongo	BF	12.619,-0.271	-0.10	0.17	0.95	1.97	-3.26
Yumban	N	14.861,0.246	0.00	0.18	19.28	2.15	-6.57
Zandela	M	13.162,-5.757	0.00	0.12	0.60	1.76	-1.81
Zoribi	N	14.170,1.021	-0.25	0.17	1.26	0.98	nan

^aLabels can be defined by: Cecchi (2014) nomenclature or nearby villages or a letter representing the country associated with a number.

^bCalculated from seasonal variations.

outliers. To best prevent the use of such erroneous height values, data corresponding to periods when the water area is zero are removed.

3.3 Surface water area estimation

140 Sentinel-2 water optical reflectance (ρ) are firstly pre-processed to mask clouds using the Sentinel-2 QA band at 60 m (QA60) and an additional blue band threshold so that only values with $\rho_{B2} < 0.2$ are retained. Water detection (Fig. 2) is performed by applying a thresholding on the Modified Normalized Difference Water Index (MNDWI, Xu, 2006):

$$\text{MNDWI} = \frac{\rho_{\text{SWIR1}} - \rho_{\text{green}}}{\rho_{\text{SWIR1}} + \rho_{\text{green}}} \quad (2)$$

The MNDWI threshold (Table 1) is chosen ad hoc for each lake and kept constant over the study period. Highly negative thresholds are mostly used for lakes with vegetation.

145 3.4 Area-height curve estimation and water height time series densification

To estimate the A-H curve (Fig. 3), water heights and water areas are combined. We select quasi-simultaneous data in a ± 3 days interval, which follows Gao et al. (2012) work with MODIS and altimetry data. Based on Crétaux et al. (2016), a two degree polynomial curve is fitted to the data. Data outside the 95 % prediction interval (area within the dotted lines in Fig.

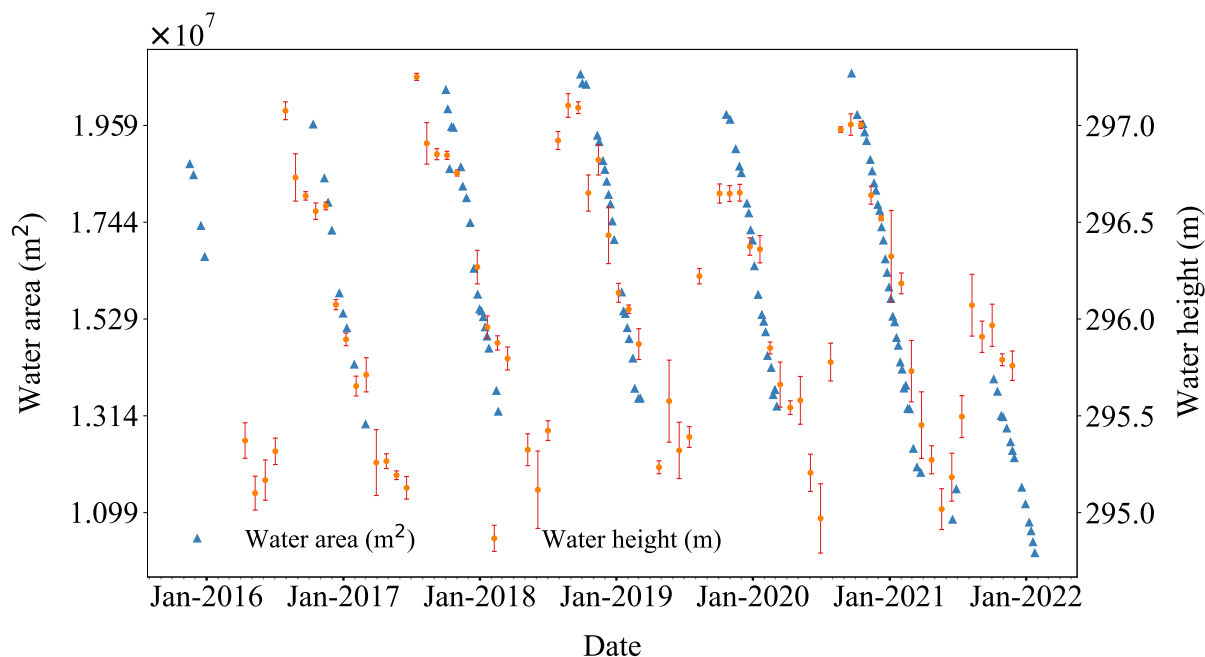


Figure 2. Time series of water areas (left y-axis) and water heights (right y-axis) with their associated median absolute deviation, for the Tibin reservoir (see Table 1), located in the center north of the Burkina Faso.

3) are considered outliers and are removed to obtain the final A-H curve, in line with Busker et al. (2019). The Root Mean Squared Error (RMSE) and the R-squared (R^2) values are calculated to evaluate the accuracy of the regression.

Water heights are then estimated from water areas via the A-H curve, within the limits of the polynomial regression, i.e. without extrapolating the A-H curve. A filter is further applied to remove data with inconsistent variation (significant and rapid variations in the dry season for example) caused mainly by occasional mismatch between areas and heights. The final water height time series (Fig. 4) is composed of a combination of water heights directly obtained from the Sentinel-3 altimeter. It includes both data used to estimate the A-H curve and data with no corresponding water area data, so not employed in the A-H curve, and water heights estimated through the A-H curve from water areas (from Sentinel-2).

3.5 Evaporation estimation

Gal et al. (2016) estimated the evaporation of a shallow lake (Agoufou) in Mali with the Penman equation (Penman and Keen, 1948). The context of this study being similar in climate, environment, and type of lakes, the same approach is used to estimate evaporation using the Penman–Monteith equations and the methods by McMahon et al. (2013) (Suppl. S11). It requires the following meteorological data from the ERA5 dataset: downward surface solar radiation ($J.m^{-2}$), downward surface thermal radiation ($J.m^{-2}$), daily air temperature (K), daily dew point temperature (K), 10 m u-component and 10 m v-component of wind ($m.s^{-1}$) and altitude of wind speed measurement (m). It also requires altitude (m) derived from the Shuttle Radar

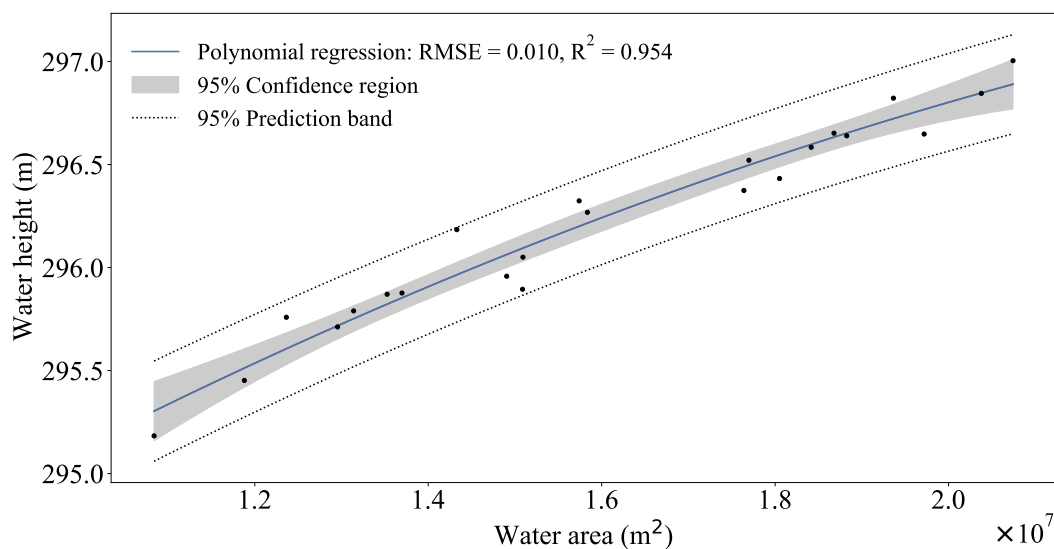


Figure 3. Water area-height curve (A-H) for the Tibin reservoir.

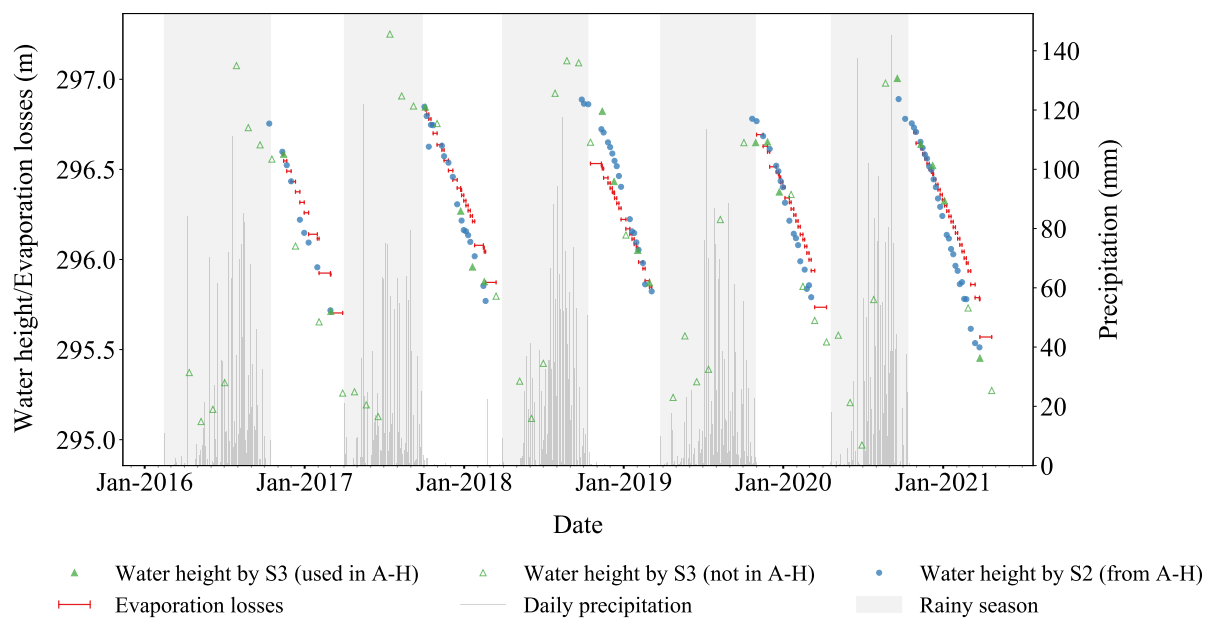


Figure 4. Water height time series from Sentinel-3 (S3) and Sentinel-2 (S2) data, along with the cumulated evaporation losses, daily rainfall and rainy season for Lake Tibin. The starting point to calculate evaporation losses is fixed to the water height at the first date in the dry season. The length of the red lines in the x-axis corresponds to the time between two successive water height samples.



Topography Mission (SRTM) DEM and the average albedo of the lake surface (α), which is derived following Naegeli (2017)
165 as:

$$\alpha = 0.356\rho_{\text{red}} + 0.130\rho_{\text{NIR}} + 0.373\rho_{\text{SWIR1}} + 0.072\rho_{\text{SWIR2}} \quad (3)$$

from Sentinel-2 water reflectance (ρ). The start of the rainy season is taken as the day with rainfall exceeding 5 mm with
rainfall in the following thirty days as well. The end of the rainy season is taken as the first day with rainfall below 5 mm also
followed by sixty consecutive dry days.

170 4 Results

Over the whole study period, including the dry and the rainy season, the average water areas of the 42 lakes vary from 0.02
km² (Koankin) to 37.91 km² (Hagoundou) and averages to 5.28 km². We have identified that 69 % of the lakes turned out to
be temporary lakes. Height seasonal variations vary from 4.86 m for the Boura reservoir in Burkina Faso in 2018, to 0.28 m
for Lake Hagoundou in Mali in 2017, and averages to 1.94 m. Evaporation shows spatial variability which follows a latitude
175 gradient, with higher values in the North (with -7.04 mm.d^{-1}) than in the South (with -4.12 mm.d^{-1}) and averages -5.66
mm.d⁻¹ over the study period. The average albedo observed is 0.14 with a minimum value of 0.09 and a maximum value of
0.22.

4.1 Five-year averaged residuals water balance during the dry season

Of the 42 lakes studied, 37 have complete time series between 2016 and 2021 for which a five-year averaged residual water
180 balance, i.e. the difference between dry season water height changes rate and evaporation (Eq. 1), is estimated (Fig. 5 and Table
1). The five-year averaged residual water balance shows contrasted situations with values ranging from gains of 9.71 mm.d^{-1}
to losses of -12.45 mm.d^{-1} . 24 lakes, of which 75.0 % are located in Burkina Faso, have a residual water balance below -1
mm.d⁻¹. The Central Burkina Faso (red zone in Fig. 1) contains only lakes with a negative residual water balance of which
88.9 % have a highly negative residual water balance below -3 mm.d^{-1} . In northern Burkina Faso and near the western Niger
185 border (green zone in Fig. 1), 87.5 % of the lakes have a weak negative residual water balance, such as the Tibin reservoir
illustrated previously (Fig. 4). Five lakes, all located in the Inner Niger Delta (blue zone in Fig. 1), have a positive residual
water balance greater than 1 mm.d^{-1} . Finally, eight lakes display a residual water balance close to zero. They are located near
the Niger River in the Tillabéry region of Niger, in southern Mali on the border with Niger and in the eastern part of the study
area (orange zone in Fig. 1).

190

An example of water losses is given by a reservoir located in southern Burkina Faso (Manga in Table 1), close to the large
lake of Bagré. The 2017–2018 dry season (Fig. 6) starts in late October 2017, when the lake water height is at 264.19 m and
ends in February, when the water height is 262.60 m, i.e. a variation of 1.58 m. The evaporation losses are about twice as small
as the height decrease, meaning that a significant part of the water losses is not due to evaporation. The residual water balance

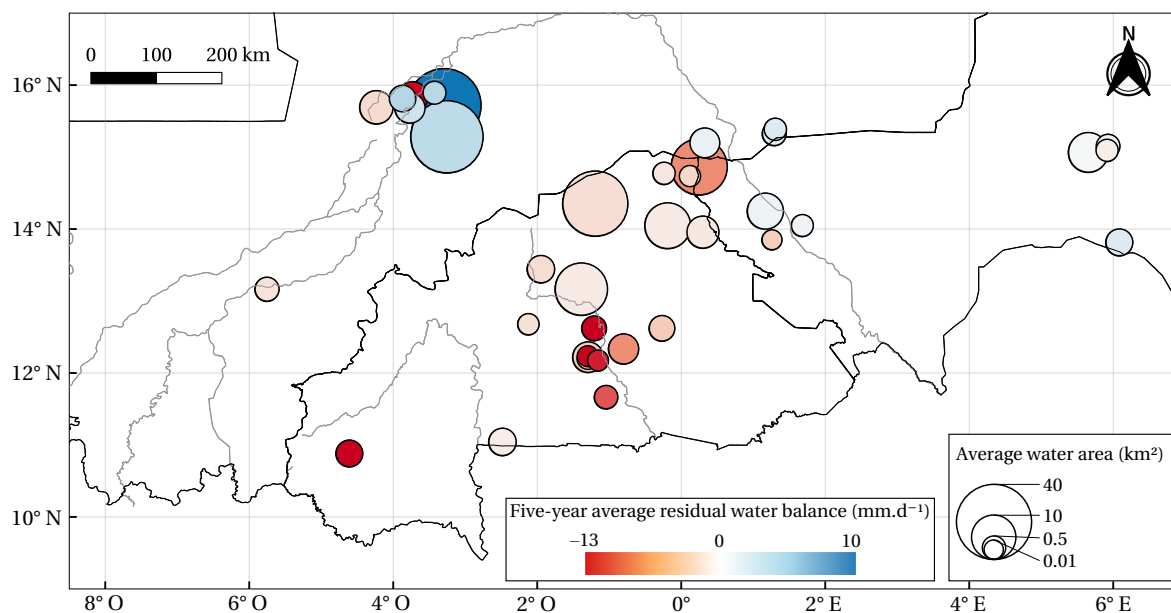


Figure 5. Five-year average residual water balance of each lake studied in Central Sahel from 2016 to 2021.

195 for 2017–2018 is -8.54 mm.d^{-1} and averages -8.28 mm.d^{-1} over the five years. False color images, during the dry season, show that the lake is surrounded by irrigated fields, which occupy an area similar to the lake's area. This suggests that most water losses are due to irrigation in this case (Fig. 7a and b).

The water supply behaviour (positive residual water balance) is illustrated by a lake located in the Inner Niger Delta, where the Niger river splits in multiple reaches (lake Bakafé in Table 1, Fig. 8a, b and c). The 2019–2020 dry season illustrates this case well (Fig. 9). Between October and May, water heights change from 262.14 m to 260.92 m, resulting in a 1.22 m decrease. However, the maximum height is reached about two months after the start of the dry season, indicating that precipitation is not the main cause of lake filling. Visual analysis of the Sentinel-2 images shows a connection between the lake and the river network, which is flooded from late October onwards (as in Fig. 8c). Once the peak of water height is reached, the lake empties approximately at the same rate as the estimated evaporation losses, since the two curves are parallel. The residual water balance for 2019–2020 is 2.03 mm.d^{-1} and averages 1.63 mm.d^{-1} over the five years, which means that there is a regular dry season water inflow.

4.2 Interannual variability

The residual water balance can vary from year to year (Fig. 11) as a result of variability in anthropogenic management of resources, rainfall, length of the dry season, changes in inflow or outflow etc. Overall, the lakes do not show any trend in residual water balance throughout the study period. About half of the reservoirs in Central Burkina Faso show greater losses in


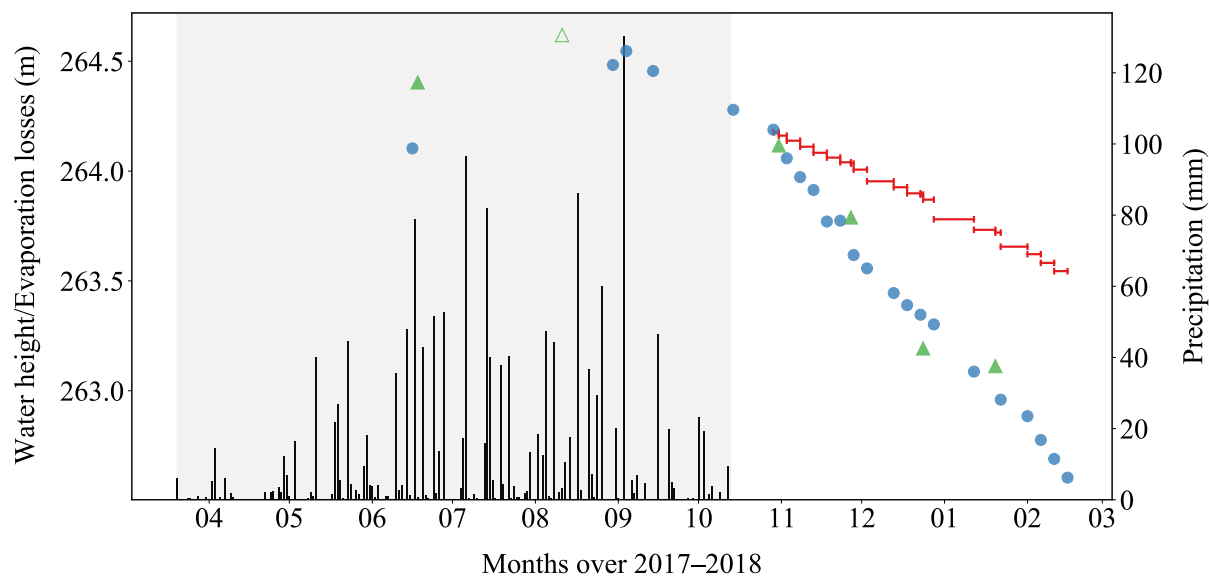


Figure 6. Water height time series for a lake with water loss behaviour (Manga), along with the cumulated evaporation losses, daily rainfall and rainy season.

(a) 3 November 2017

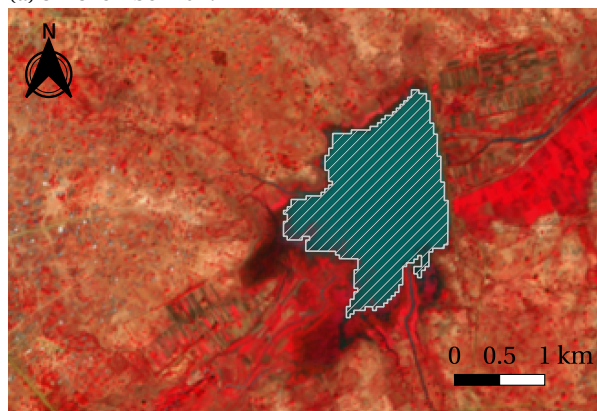

(b) 6 February 2018

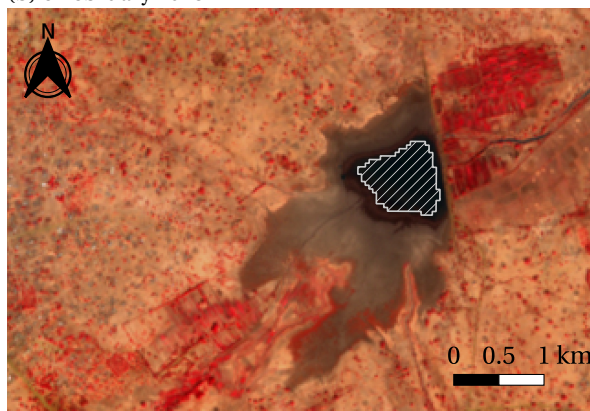


Figure 7. Sentinel-2 False Color images (NIR/Red/Green) of Manga reservoir surroundings with the lake contours obtained by thresholding on the MNDWI at (a) 27 November 2020 and (b) 21 January 2021. Wet vegetation is represented in red.

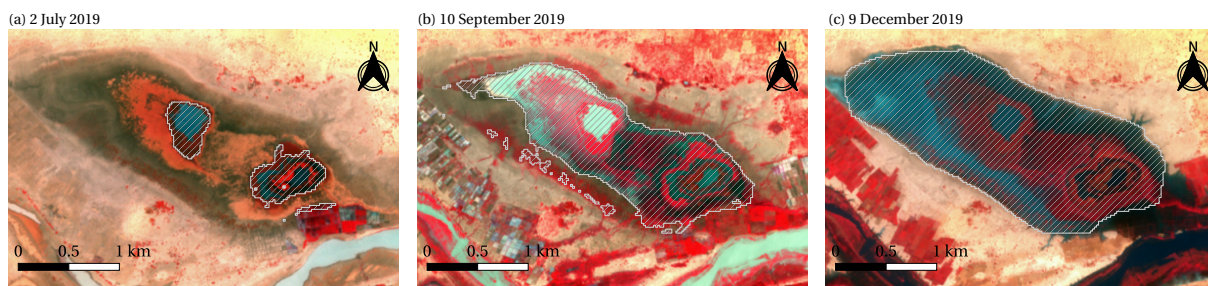


Figure 8. Sentinel-2 False Color images (NIR/Red/Green) of lake Bakafé surroundings with the lake contours obtained by thresholding on the MNDWI at (a) 2 July 2019, (b) 10 September 2019 and (c) 4 November 2019

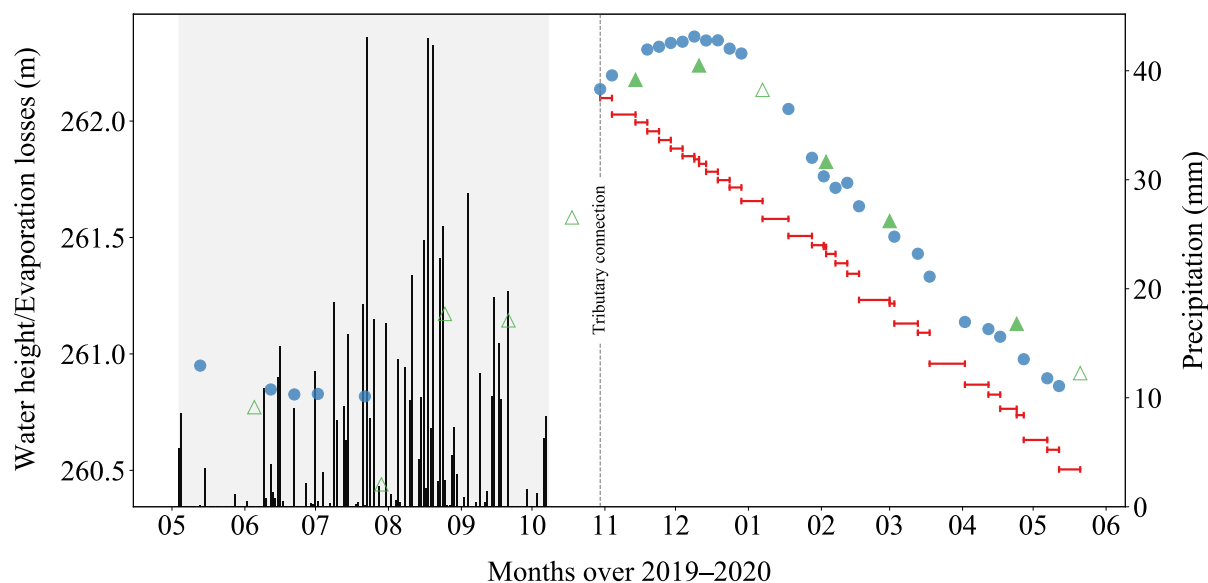


Figure 9. Same as Fig. 6 but for a lake with a water supply behaviour (Bakafé)

2020–2021 than the other years. The standard deviation (std) over five years has a minimum value of 0.27 mm.d^{-1} (Lake N4) and a maximum value of 5.00 mm.d^{-1} (Lake Yumban) and is equal to 1.86 mm.d^{-1} on average over all lakes. Twenty-nine water bodies have a std greater than 1 mm.d^{-1} and six lakes show a regime change switching between positive and negative values. Evaporation rate is quite constant over the five years for all lakes and its maximum standard deviation is equal to 0.42 mm.d^{-1} . Interannual water balance variability is sometimes caused by changes in dam functioning, like for the Gomde, a reservoir located in northern Burkina Faso. This reservoir was built to supply water needed by a gold mine, which is located to the southeast of the reservoir (Fig. 12), similar to the Tibin reservoir, created in 2012 for the Bissa gold mine (Newall, 2012; Ba, 2012). The standard deviation of the residual water balance over the five years is equal to 2.10 mm.d^{-1} but the first two years show a residual water balance close to zero, while the last three years show important losses, with an average of -3.48



220 $\text{mm}\cdot\text{d}^{-1}$, a drastic change which is seen also on the water height time series (Fig. 12). The maximum water height variation is obtained in 2020–2021 with 2.49 m and the minimum is in 2016–2017 with 0.84 m.

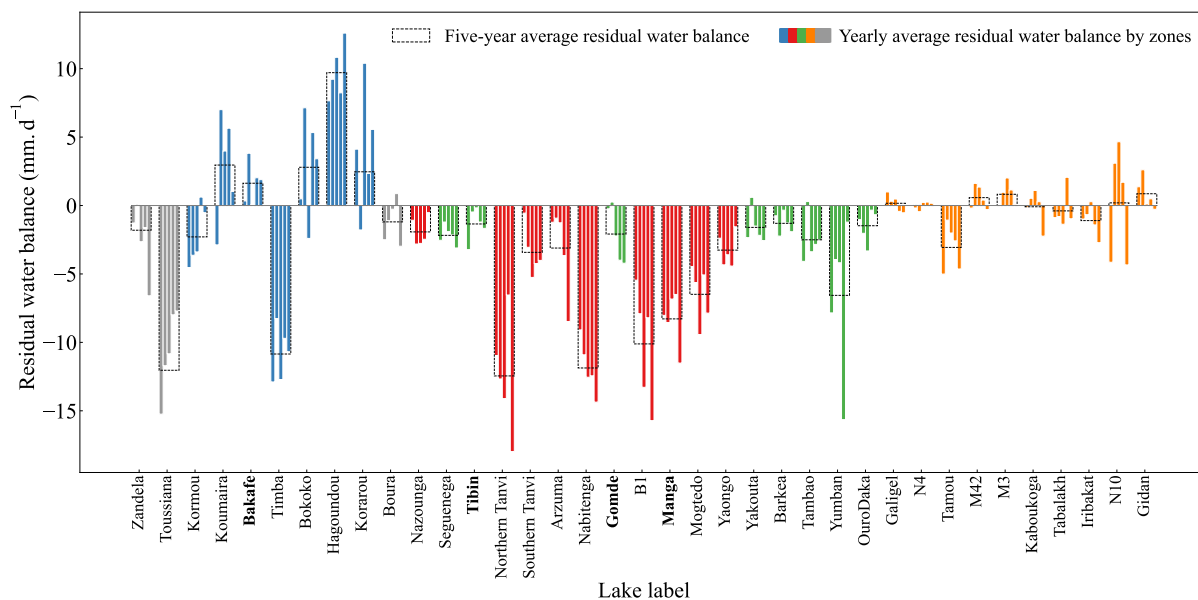


Figure 10. Yearly average of lake residual water balance from 2016 to 2021. Colored zones are defined in Fig. 1 and unclassified lakes are represented in grey. The labels on the x-axis in bold correspond to the lakes illustrated in this study.

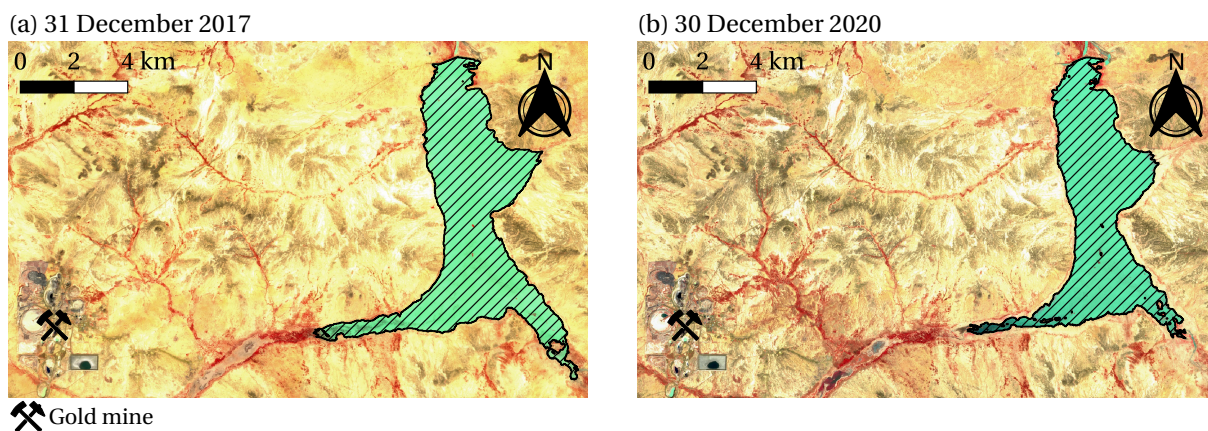


Figure 11. Sentinel-2 False Color images (NIR/Red/Green) of Gomde reservoir surroundings with the lake contours obtained by thresholding on the MNDWI at (a) 31 December 2017 and (b) 30 December 2020.

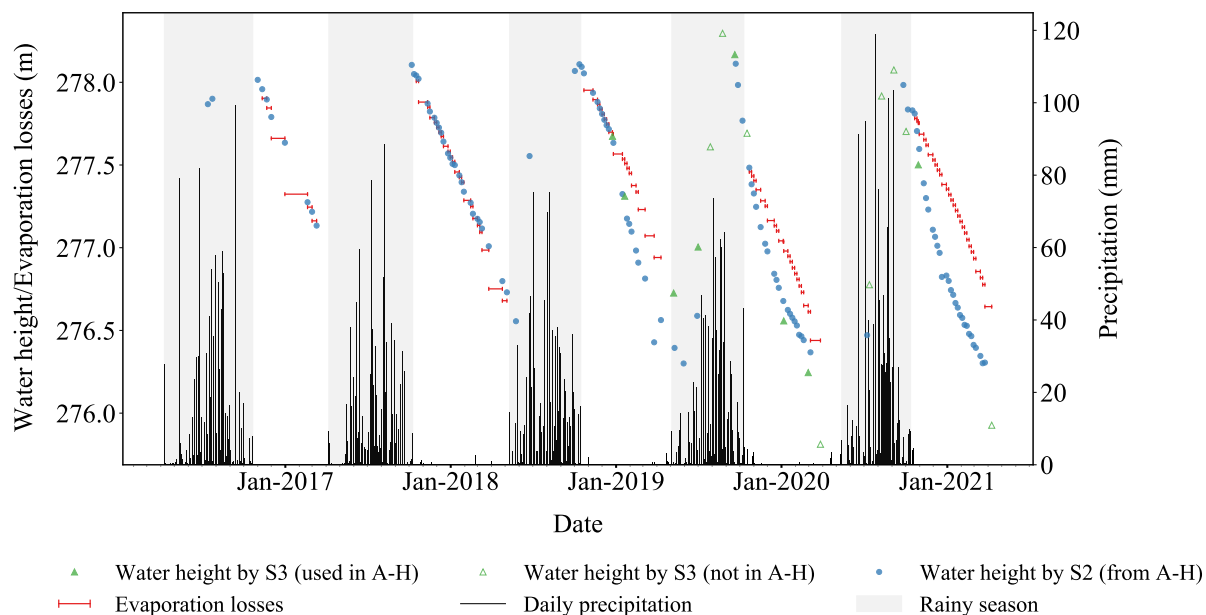


Figure 12. Water height time series from Sentinel-3 (S3) and Sentinel-2 (S2) data, along with the cumulative evaporation losses, daily rainfall, and rainy season for Lake Gomde. The starting point to calculate evaporation losses is fixed to the water height at the first date in the dry season. The length of the red lines in the x-axis corresponds to the time between two successive water height samples.

5 Discussion

The combination of altimetry, time series of optical images, and evaporation modelling reveals a large variety of situations and different hydrological regimes. The studied lakes are located in diverse environments. For instance, watersheds are dominated by rainfed or irrigated crops or natural vegetation, growing on sandy or rocky soils. Lakes also differ in terms of their characteristics, such as whether they are open water or harboring dense aquatic vegetation, if there are trees growing in the flooded areas, or if the water is clear or extremely turbid, which is associated with very high water albedo. This complexity results in uncertainties in water regime calculation (Eq. 1). First, aquatic vegetation leads to radiometric variability of water pixels which makes it difficult to use automatic algorithms for water detection. Moreover, lakes drying up may also affect classification. These water detection difficulties were recently pointed out by Reis et al. (2021) and in the same line, Ogilvie et al. (2018) showed that in central Tunisia, the Global Surface Water dataset (Pekel et al., 2016) had an omission error rate of 41 % on shallow lakes, mostly due to pixels with vegetation or algae. Moreover, the albedo values (Table 1) highlight the diversity of water colour with values ranging from 0.09 for dark clear surface water, to 0.22 for bright turbid surface water, which is higher than the albedo values generally found in lake studies. McMahon et al. (2013) for instance suggest a default value of albedo of 0.08 to compute the evaporation of open water.



240 This variability challenges the determination of an optimum MNDWI threshold. In this work, the threshold is chosen ad hoc
for each lake (Sect. 3.3) as recommended by Reis et al. (2021) and a constant threshold throughout the study period proved to
be efficient for our study. However, the method developed here is not very sensitive to systematic errors in water body surface
area detection. Since areas are used to interpolate water heights, via hypsometric relationships, there is no need to derive an
estimation of water area for the whole lake and part of lake can be discarded, provided this is systematic. This situation is
encountered for some lakes without a well identified connection to a river or with another lake or lakes that overflow, for ex-
ample downstream of a dam, which can be truncated to avoid misclassifications. Similarly, as long as the threshold applied to
the MNDWI consistently detects water pixels even in the presence of vegetation, the time series of water areas has consistent
245 variations even if the absolute value of the water area may not be correct. Despite of this, water area classification remains a
source of error in the calculation of the residual water balance, occasionally creating outliers in the water area time series. A
close inspection of these cases points to misclassification of aquatic vegetation for some images. As a result, 19 lakes under
the altimeter tracks could not be included in the study because non-systematic detection problems in water areas made the time
series too noisy.

250

In addition, several other lakes were discarded because of noisy or inaccurate water height time series. This is caused by
the radar altimeter resolution along-track of 300 m that only allows detection of lakes larger or similar to its resolution. The
retracking algorithm failures (the retracking being designed for ice surface, Crétaux et al., 2018) or the prolonged drying of
certain lakes for entire years also do not allow to have enough data to construct the hypsometric curve (ephemeral lakes or
255 ponds). Moreover, other water-like sources in the altimeter footprint sometimes contaminate the signal (Jiang et al., 2020),
which is possible due to the across-track resolution of 1.64 km and shifting of the track up to 1 km. The different filtering
processes allow for the elimination of remaining outliers.

260 The seasonal amplitude, averaged over the period 2015–2021 for all lakes, ranges between 0.89 m and 3.23 m with a median
value of 2.06 m. This is higher than the value found by Cooley et al. (2021), who estimated a median of 1.60 m with a 1.49
m, 1.71 m range for 127 lakes in the Niger basin using two years of ICESat-2 data. The temporal resolution of ICESat-2 time
series of about 91 days may miss the maximum and minimum heights of most lakes, even if the larger lakes may cross several
ICESat-2 tracks, pointing to the importance of having finer temporal resolution. In addition, our study samples a larger variety
of hydrological behaviours and analyses lakes that are not found in the global database employed by Cooley et al. (2021) and
265 other global studies.

Evaporation is an important term of the lake water balance. We have compared results obtained with the Penman–Monteith
method with the evaporation derived from pan observations available for the Boura reservoir and with the GLEV method.
Multi annual averages, from 2012 to 2014, were equal to 5.33 mm.d⁻¹ by our estimation, 5.40 mm.d⁻¹ by derived evaporation
270 (Fowe et al., 2015) and 5.38 mm.d⁻¹ by GLEV (Zhao et al., 2022). Evaporation differences by these three methods are lower



than an evaporation uncertainty of $\pm 1 \text{ mm.d}^{-1}$ considered by Gal et al. (2016) for the Penman method.

Finally, the calculation of the dry season annual residual water balance is impacted by the first and last data at the beginning and end of the dry season. A correct estimation of these values is therefore important, otherwise some fluxes may be over-
275 seen, like early dry season filling by rivers. Overall, we consider that the residual water balance variations above 1 mm.d^{-1} are unlikely to be caused by errors, but rather indicates water inflows in the dry season, whereas a residual water balance below -1 mm.d^{-1} would point towards water losses. The five-year averaged residual water balance shows consistent spatial patterns. In the Inner Niger Delta, waters bodies show a predominantly water supply behaviour. Indeed, in this area lakes are connected to the river network, and they are filled initially by rainfall and then to a greater extent by river waters coming from
280 the upper Niger watershed, causing dry season flooding of the delta (Olivry, 1995). Sometimes two processes successively dominate a lake water regime, such as a water supply at the beginning of the dry season and a water loss afterwards. Lakes in the eastern part of the study region (from about 0° E) show a weak positive residual water balance. Even if these low values are below the uncertainty that we estimate, a limited water supply during the dry season would be in line with water supplied by groundwater in this region (Favreau et al., 2009). In Burkina Faso, and more importantly in the centre, a water loss signal
285 prevails. These observations are in line with Fowe et al. (2015) and Venot and Krishnan (2011), who show that the variations of small reservoirs in this region are due to water withdrawn for small scale irrigation, which is usually detected by the growth of surrounding crops during the dry season. Exchanges with groundwater (Sophocleous, 2002) could also lead to losses due to infiltration through the lake bottom. This is more likely to occur at the beginning of the dry season, when lakes area is high and banks are flooded, whereas later on water losses are less significant because lake bottoms are usually silted. Further north
290 in Burkina Faso, near the border with Mali and Niger, water bodies show little or no residual water balance loss, which is consistent with limited anthropogenic actions over these reservoirs. The fact that several reservoirs in this area show residual water balance close to zero moderates the conclusions of Cooley et al. (2021) on the substantial influence exerted by humans on surface water storage variability. Our results show very different regimes within the same catchment, so it is complicated to apply variations at a catchment scale to lakes within that catchment. The reservoirs in our study area are sometimes reported to
295 have low performance (Venot and Cecchi, 2011), mainly due to limited funding and human resources put into reservoir management (Frenken, 2005). Some of these reservoirs were built for gold mining, so the absence of anthropogenic withdrawals may seem inconsistent. However, this area suffers from serious security issues. Since 2015, the number of armed conflicts has been increasing and is now spreading to the whole region. Discussions with colleagues in Burkina Faso (J.M. Dipama, pers. comm.) and search of the local press, lead to the hypothesis that part of the population living near these reservoirs has moved to
300 avoid conflicts, leaving reservoirs with little manpower and limited irrigation projects. Another example of the possible impact of conflicts in this area is the Gomde reservoir, which shows a significant change in the residual water balance after 2018 (close to zero before 2018 and significantly negative afterwards). In this case, attacks by armed groups interested in the gold mines (Assanvo et al., 2019) are the probable cause of damages to the dykes, leading to dam leakage since 2019.



305 This study illustrates the potential of recent remote sensing sensors to explore the hydrological behaviour of lakes in semi-
arid areas. Although it is not yet possible to identify and quantify all fluxes, the residual water balance approach provides
very valuable information on surface water resources at the regional scale. The spatio-temporal resolution of current satellites
allows monitoring of small water bodies. The methodology developed here, based on freely available data and tools, is easily
transposable to other regions with similar climate. Currently, the water balance estimation is restricted to lakes below the
310 altimeters tracks, which may be around 1 % or less of the total number of lakes in this region. For example, of 1650 reservoirs
analysed by Cecchi et al. (2009) in Burkina Faso, only 21 are surveyed in this study. Only one among the lakes studied is found
in the DAHITI database and none in the HYDROWEB and G-REALM databases, and all three are usually employed in global
studies. A common approach to address water bodies for which water level estimations are not available is to apply the same
hypsometric curve for all lakes in a given region (Cooley et al., 2021; Hou et al., 2022), assuming that in similar geological
315 situations their shapes are not very different. For the method developed here it is however essential to derive A-H curves for
each lake since applying a general one for all water bodies in our study region would result in misleading quantification of
water fluxes. With the arrival of the Surface Water and Ocean Topography (SWOT), which will be launched at the end of 2022,
the number of lakes that can be monitored to assess water height changes will greatly increase (Grippa et al., 2019).

6 Conclusions

320 In this study, a method to estimate the hydrological regime of 37 small water bodies from 0.04 km² to 37.91 km² in Central
Sahel was proposed based on remote sensing data from 2016 to 2021. The method combines Sentinel-3 and Sentinel-2 for the
water height and water area respectively, with meteorological variables from ERA5, and ancillary data from multiple sensors.
A dry season water balance is estimated over five years for each lake by comparing evaporation and water height changes,
which characterizes lake hydrological regime. This method allows for a large-scale study of many ungauged water bodies,
325 including small ones and lakes with aquatic vegetation cover, that are frequently overlooked in large scale studies. Lakes show-
ing dry season water losses (where water depletion is greater than evaporation) were mainly found in central Burkina Faso.
This behaviour also concerns lakes in the north of the country, but to a lesser extent. In the Inner Niger Delta, lakes mostly
show dry season water supply, caused by water inflow from multiple river networks during flooding of the delta, and filling the
lakes generally at the start of the dry season. Other lakes display a balanced behaviour, where water height closely follows the
330 evaporation rate. The limited water supply observed for lakes in Niger may be caused by exchanges with groundwater, which
has been observed in this region. Interannual variations of lake hydrological regimes have been observed, with some significant
changes attributed to changes in the anthropogenic use of water resources.

Data availability. The Sentinel-2 data MultiSpectral Instrument (MSI) are available on Google Earth Engine (GEE, Gorelick et al., 2017)
335 through the "Sentinel-2 MSI: MultiSpectral Instrument, Level-1C" collection (<https://developers.google.com/earth-engine/datasets/catalog/>)



COPERNICUS_S2_HARMONIZED). The Sentinel-3 Sar Radar Altimeter (SRAL) data and the Altimetric Time Series Software (ALTiS, Frappart et al., 2021) are obtained from the Centre de Topographie des Océans et de l'Hydrosphère (CTOH, <http://ctoh.legos.obs-mip.fr/data/offline-request-form>). Meteorological data are obtained from the European Centre for Medium-Range Weather Forecasts (ECMWF) of the Copernicus Climate Change Service (C3S) through the "ERA5 reanalysis hourly data on single levels from 1959 to present" database (Hersbach et al., 2018). The results contain modified Copernicus Sentinel and C3S information (2022). Neither the European Commission nor ECMWF is responsible for any use that may be made of the Copernicus information or data it contains. Precipitations are available on GEE through the "GPM: Global Precipitation Measurement (GPM)v6" collection (Huffman et al., 2019, https://developers.google.com/earth-engine/datasets/catalog/NASA_GPM_L3_IMERG_V06). Evaporation rate data are retrieved from the Global Lake Evaporation Volume dataset (GLEV, Zhao et al., 2022, <https://doi.org/10.5281/zenodo.4646621>) and from Fowe et al. (2015).

345 *Author contributions.* All authors contributed to the writing and design of the study.

Competing interests. The authors declare that they have no conflict of interest.

Acknowledgements. We acknowledge Frédéric Frappart and Fabien Blarel for their involvement in the processing of data through the ALTiS software, Jean-François Crétaux for advice on the area-height curve derivation, and Félix Girard for discussion of our water detection and altimetry methods. We thank Hedwige Nikiema and Jean-Marie Dipama for their information on the region and lakes, and Yasmin Fitts for her valuable proof-reading of the manuscript.

350 *Financial support.* This work was supported by CNES, focused on the prelaunch activities in the framework of SWOT mission.



References

- Abdourhamane Touré, A., Tidjani, A., Guillon, R., Rajot, J.L., Petit, C., Garba, Z. and Sebag, D.: Teneur en matières en suspension des lacs sahéliens en liaison avec les variations piézométrique et pluviométrique : cas des lacs Bangou Kirey et Bangou Bi, Sud-Ouest Niger, *Afrique Science*, 12, 384-392, <https://hal.archives-ouvertes.fr/hal-02555703/document>, last access: 22 September 2022, 2016.
- Andam-Akorful, S.A., Ferreira, V.G., Ndehedehe, C.E. and Quaye-Ballard, J.A.: An investigation into the freshwater variability in West Africa during 1979-2010, *Int. J. Climatol.*, 37, 333-349, <https://doi.org/10.1002/joc.5006>, 2017.
- Arsen, A., Crétaux, J.-F., Berge-Nguyen, M. and Del Rio, R.A.: Remote Sensing-Derived Bathymetry of Lake Poopó, *Remote Sens.*, 6, 407-420, <https://doi.org/10.3390/rs6010407>, 2013.
- Assanvo, W., Dakono, B., Théroux-Bénoni, L.A. and Maïga I.: Extrémisme violent, criminalité organisée et conflits locaux dans le Liptako-Gourma, Report, Institut d'Etudes de Sécurité, 28 pp., <https://issafrica.s3.amazonaws.com/site/uploads/war-26-fr.pdf>, last access: 22 September 2022, 2019.
- Avisse, N., Tilmant, A., Müller, M.F. and Zhang, H.: Monitoring small reservoirs' storage with satellite remote sensing in inaccessible areas, *Hydrol. Earth Syst. Sc.*, 21, 6445-6459, <https://doi.org/10.5194/hess-21-6445-2017>, 2017.
- Ba, M.: Diagnostic environnemental d'un site minier en construction : cas de la mine d'or Bissa Gold, M.S. thesis, International Institute for Water and Environmental Engineering, 59 pp., http://documentation.2ie-edu.org/cdi2ie/opac_css/doc_num.php?explnum_id=177, last access: 22 September 2022, 2012.
- Bader, J.-C., Lemoalle, J., and Leblanc, M.: Modèle hydrologique du Lac Tchad, *Hydrolog. Sci. J.*, 56:3, 411-425, <https://doi.org/10.1080/02626667.2011.560853>, 2011.
- Baup, F., Frappart, F. and Maubant, J.: Combining high-resolution satellite images and altimetry to estimate the volume of small lakes, *Hydrol. Earth Syst. Sc.*, 18, 2007-2020, <https://doi.org/10.5194/hess-18-2007-2014>, 2014.
- Birkett, C.M.: Radar altimetry: A new concept in monitoring lake level changes, *Eos, Transactions American Geophysical Union*, 75, 273-275, <https://doi.org/10.1029/94EO00944>, 1994.
- Busker, T., de Roo, A., Gelati, E., Schwatke, C., Adamovic, M., Bisselink, B., Pekel, J.-F. and Cottam, A.: A global lake and reservoir volume analysis using a surface water dataset and satellite altimetry, *Hydrol. Earth Syst. Sc.*, 23, 669-690, <https://doi.org/10.5194/hess-23-669-2019>, 2019.
- Cecchi, P., Meunier-Nikiema, A., Moiroux, N. and Sanou, B.: Towards an Atlas of Lakes and Reservoirs in Burkina Faso, Small reservoirs toolkit, IWMI, Colombo, Sri Lanka, 23, https://horizon.documentation.ird.fr/exl-doc/pleins_textes/divers16-05/010046819.pdf, last access: 22 September 2022, 2009.
- Cecchi, P.: Qualité des eaux et risques sanitaires associés aux lacs et réservoirs du Burkina Faso : opération FasoTour 2014, Mission Report, IRD, 35 pp., https://horizon.documentation.ird.fr/exl-doc/pleins_textes/divers16-01/010065652.pdf, last access: 22 September 2022, 2014.
- Cooley, S.W., Ryan, J.C. and Smith, L.C.: Human alteration of global surface water storage variability, *Nature*, 591, 78-81, <https://doi.org/10.1038/s41586-021-03262-3>, 2021.
- Cordeiro, M.C.R., Martinez, J.-M. and Peña-Luque, S.: Automatic water detection from multidimensional hierarchical clustering for Sentinel-2 images and a comparison with Level 2A processors, *Remote Sens. Environ.*, 253, 112209, <https://doi.org/10.1016/j.rse.2020.112209>, 2021.



- Crétaux, J.-F., Arsen, A., Calmant, S., Kouraev, A., Vuglinski, V., Bergé-Nguyen, M., Gennero, M.-C., Nino, F., Abarca Del Rio, R., Cazenave, A. and Maisongrande, P.: SOLS: A lake database to monitor in the Near Real Time water level and storage variations from remote sensing data, *Adv. Space Res.*, 47, 1497–1507, <https://doi.org/10.1016/j.asr.2011.01.004>, 2011.
- Crétaux, J.-F., Abarca-del-Río, R., Bergé-Nguyen, M., Arsen, A., Drolon, V., Clos, G. and Maisongrande, P.: Lake Volume Monitoring from Space, *Surv. Geophys.*, 37, 269–305, <https://doi.org/10.1007/s10712-016-9362-6>, 2016.
- Crétaux, J.-F., Bergé-Nguyen, M., Calmant, S., Jamangulova, N., Satylkanov, R., Lyard, F., Perosanz, F., Verron, J., Samine Montazem, A., Le Guilcher, G., Leroux, D., Barrie, J., Maisongrande, P. and Bonnefond, P.: Absolute Calibration or Validation of the Altimeters on the Sentinel-3A and the Jason-3 over Lake Issykkul (Kyrgyzstan), *Remote Sens.*, 10, 1679, <https://doi.org/10.3390/rs10111679>, 2018.
- CTOH: Available online, <http://ctoh.legos.obs-mip.fr/>, last access: 19 November 2021.
- DeVries, B., Huang, C., Lang, M.W., Jones, J.W., Huang, W., Creed, I.F. and Carroll, M.L.: Automated Quantification of Surface Water Inundation in Wetlands Using Optical Satellite Imagery, *Remote Sens.*, 9, 807, <https://doi.org/10.3390/rs9080807>, 2017.
- Douxchamps, S., Ayantunde A. and Barron J.: Taking stock of forty years of agricultural water management interventions in smallholder systems of Burkina Faso, *Water Resources and Rural Development*, 3, 1-13, <https://doi.org/10.1016/j.wrr.2013.12.001>, 2014.
- Favreau, G., Cappelaere, B., Massuel, S., Leblanc, M., Boucher, M., Boulain, N. and Leduc, C.: Land clearing, climate variability, and water resources increase in semiarid southwest Niger: A review, *Water Resour. Res.*, 45, W00A16, <https://doi.org/10.1029/2007WR006785>, 2009.
- Fowe, T., Karambiri, H., Paturel, J.-E., Poussin, J.-C., and Cecchi, P.: Water balance of small reservoirs in the Volta basin: A case study of Boura reservoir in Burkina Faso, *Agr. Water Manage.*, 152, 99–109, <https://doi.org/10.1016/j.agwat.2015.01.006>, 2015.
- Frappart, F., Hiernaux, P., Guichard, F., Mougin, E., Kergoat, L., Arjounin, M., Lavenu, F., Koité, M., Paturel, J.-E. and Lebel, T.: Rainfall regime across the Sahel band in the Gourma region, Mali, *J. Hydrol.*, 375, 128–142, <https://doi.org/10.1016/j.jhydrol.2009.03.007>, 2009.
- Frappart, F., Blarel, F., Fayad, I., Bergé-Nguyen, M., Crétaux, J.-F., Shu, S., Schreggenberger, J., and Baghdadi, N.: Evaluation of the Performances of Radar and Lidar Altimetry Missions for Water Level Retrievals in Mountainous Environment: The Case of the Swiss Lakes, *Remote Sens.*, 13, 2196, <https://doi.org/10.3390/rs13112196>, 2021.
- Frenken, K.(Eds.): Irrigation in Africa in figures, AQUASTAT survey - 2005, Food and Agriculture Organization of the United Nations Water Reports, 29, 649 pp., https://www.researchgate.net/profile/Karen-Frenken/publication/235704388_Irrigation_in_Africa_in_figures_AQUASTAT_survey_2005/links/554f6bb708ae956a5d245b31/Irrigation-in-Africa-in-figures-AQUASTAT-survey-2005.pdf, last access: 22 September 2022, 2005.
- Gal, L., Grippa, M., Hiernaux, P., Peugeot, C., Mougin, E., and Kergoat, L.: Changes in lakes water volume and runoff over ungauged Sahelian watersheds, *J. Hydrol.*, 540, 1176–1188, <https://doi.org/10.1016/j.jhydrol.2016.07.035>, 2016.
- Gao, H., Birkett, C., and Lettenmaier, D.P.: Global monitoring of large reservoir storage from satellite remote sensing, *Water Resour. Res.*, 48, <https://doi.org/10.1029/2012WR012063>, 2012.
- Gao, H.: Satellite remote sensing of large lakes and reservoirs: From elevation and area to storage, *WIREs Water*, 2, 147-157, <https://doi.org/10.1002/wat2.1065>, 2015.
- Gardelle, J., Hiernaux, P., Kergoat, L., and Grippa, M.: Less rain, more water in ponds: a remote sensing study of the dynamics of surface waters from 1950 to present in pastoral Sahel (Gourma region, Mali), *Hydrol. Earth Syst. Sci.*, 14, 309–324, <https://doi.org/10.5194/hess-14-309-2010>, 2010.
- Gorelick, N., Hancher, M., Dixon, M., Ilyushchenko, S., Thau, D., and Moore, R.: Google Earth Engine: Planetary-scale geospatial analysis for everyone. *Remote Sens. Environ.*, 202, 18-27, <https://doi.org/10.1016/j.rse.2017.06.031>, 2017.



- Gourgouletis, N., Bariamis, G., Anagnostou, M.N. and Baltas, E.: Estimating Reservoir Storage Variations by Combining Sentinel-2 and 3 Measurements in the Yliki Reservoir, Greece, *Remote Sens.*, 14, 1860, <https://doi.org/10.3390/rs14081860>, 2022.
- Grippa, M., Rouzies, C., Biancamaria, S., Blumstein, D., Cretaux, J.-F., Gal, L., Robert, E., Gosset, M. and Kergoat, L.: Potential of SWOT for Monitoring Water Volumes in Sahelian Ponds and Lakes, *IEEE J. Sel. Top. Appl.*, 12, 2541–2549, <https://doi.org/10.1109/JSTARS.2019.2901434>, 2019.
- 430 Haas, E.M., Bartholomé, E. and Combal, B.: Time series analysis of optical remote sensing data for the mapping of temporary surface water bodies in sub-Saharan western Africa, *J. Hydrol.*, 370, 52–63, <https://doi.org/10.1016/j.jhydrol.2009.02.052>, 2009.
- Hersbach, H., Bell, B., Berrisford, P., Biavati, G., Horányi, A., Muñoz Sabater, J., Nicolas, J., Peubey, C., Radu, R., Rozum, I., Schepers, D., Simmons, A., Soci, C., Dee, D. and Thépaut, J.-N.: ERA5 hourly data on single levels from 1959 to present, Copernicus Climate Change Service (C3S) Climate Data Store (CDS), <https://doi.org/10.24381/cds.adbb2d47>, 2018.
- 435 Hou, J., van Dijk, A.I.J.M., Beck, H.E., Renzullo, L.J. and Wada, Y.: Remotely sensed reservoir water storage dynamics (1984–2015) and the influence of climate variability and management at a global scale, *Hydrol. Earth Syst. Sc.*, 26, 3785–3803, <https://doi.org/10.5194/hess-26-3785-2022>, 2022.
- Huffman, G.J., E.F. Stocker, D.T. Bolvin, E.J. Nelkin, Jackson Tan: Global Precipitation Measurement, Greenbelt, MD, Goddard Earth Sciences Data and Information Services Center (GES DISC), GPM IMERG Final Precipitation L3 Half Hourly 0.1 degree x 0.1 degree V06, 10.5067/GPM/IMERG/3B-HH/06, 2022.
- 440 Ji, L., Zhang, L. and Wylie, B.: Analysis of Dynamic Thresholds for the Normalized Difference Water Index, *Photogramm. Eng. Rem. Sens.*, 75, 1307–1317, <https://doi.org/10.14358/PERS.75.11.1307>, 2009.
- Jiang, L., Nielsen, K., Dinardo, S., Andersen, O.B. and Bauer-Gottwein, P.: Evaluation of Sentinel-3 SRAL SAR altimetry over Chinese rivers, *Remote Sens. Environ.*, 237, 111546, <https://doi.org/10.1016/j.rse.2019.111546>, 2020.
- 445 Kittel, C. M. M., Jiang, L., Tøttrup, C., and Bauer-Gottwein, P.: Sentinel-3 radar altimetry for river monitoring – a catchment-scale evaluation of satellite water surface elevation from Sentinel-3A and Sentinel-3B, *Hydrol. Earth Syst. Sci.*, 25, 333–357, <https://doi.org/10.5194/hess-25-333-2021>, 2021.
- 450 Messenger, M.L., Lehner, B., Grill, G., Nedeva, I. and Schmitt, O.: Estimating the volume and age of water stored in global lakes using a geo-statistical approach, *Nat. Commun.*, 7, 13603, <https://doi.org/10.1038/ncomms13603>, 2016.
- McMahon, T. A., Peel, M. C., Lowe, L., Srikanthan, R., and McVicar, T. R.: Estimating actual, potential, reference crop and pan evaporation using standard meteorological data: a pragmatic synthesis, *Hydrol. Earth Syst. Sci.*, 17, 1331–1363, <https://doi.org/10.5194/hess-17-1331-2013>, 2013.
- Morris, C.S. and Gill, S.K.: Evaluation of the TOPEX/POSEIDON altimeter system over the Great Lakes, *J. Geophys. Res.-Oceans*, 99, 24527–24539, <https://doi.org/10.1029/94JC01642>, 1994.
- 455 Naegeli, K., Damm, A., Huss, M., Wulf, H., Schaeppman, M. and Hoelzle, M.: Cross-Comparison of Albedo Products for Glacier Surfaces Derived from Airborne and Satellite (Sentinel-2 and Landsat 8) Optical Data, *Remote Sens.*, 9, 110, <https://doi.org/10.3390/rs9020110>, 2017.
- Newall, P.: High River Gold Mines LTD, The Bissa Asset, Tech. Report, Wardell Armstrong, Burkina Faso, 200 pp., https://www.miningdataonline.com/reports/Bissa_2012_TR.pdf, last access: 22 September 2022, 2012.
- 460 Normandin, C., Frappart, F., Diepkilé, A.T., Marieu, V., Mougin, E., Blarel, F., Lubac, B., Braquet, N., and Ba, A.: Evolution of the Performances of Radar Altimetry Missions from ERS-2 to Sentinel-3A over the Inner Niger Delta, *Remote Sens.*, 10, 833, <https://doi.org/10.3390/rs10060833>, 2018.



- Ogilvie, A., Belaud, G., Massuel, S., Mulligan, M., Le Goulven, P., and Calvez, R.: Surface water monitoring in small water bodies: potential and limits of multi-sensor Landsat time series, *Hydrol. Earth Syst. Sci.*, 22, 4349–4380, <https://doi.org/10.5194/hess-22-4349-2018>, 2018.
- 465 Olivry, J.-C.: Fonctionnement hydrologique de la Cuvette Lacustre du Niger et essai de modélisation de l'inondation du Delta intérieur, in: Grands bassins fluviaux périatlantiques : Congo, Niger, Amazone (Colloques et Séminaires), edited by: Olivry J.-C. and Boulègue J., ORSTOM Editions, Paris, France, 267-280, https://horizon.documentation.ird.fr/exl-doc/pleins_textes/pleins_textes_6/colloques2/42682.pdf, last access: 22 September, 1995.
- 470 Panthou, G., Lebel, T., Vischel, T., Quantin, G., Sane, Y., Ba, A., Ndiaye, O., Diongue-Niang, A. and Diopkane, M.: Rainfall intensification in tropical semi-arid regions: the Sahelian case, *Environ. Res. Lett.*, 13, 064013, <https://doi.org/10.1088/1748-9326/aac334>, 2018.
- Papa, F., Crétaux, J.-F., Grippa, M., Robert, E., Trigg, M., Tshimanga, R.M., Kitambo, B., Paris, A., Carr, A., Fleischmann, A.S., de Fleury, M., Gbetkom, P.G., Calmettes, B., and Calmant, S.: Water Resources in Africa under Global Change: Monitoring Surface Waters from Space, *Surv. Geophys.*, <https://doi.org/10.1007/s10712-022-09700-9>, 2022.
- 475 Pekel, J.-F., Cottam, A., Gorelick, N., and Belward, A.S.: High-resolution mapping of global surface water and its long-term changes, *Nature*, 540, 418–422, <https://doi.org/10.1038/nature20584>, 2016.
- Penman, H.L. and Keen, B.A.: Natural evaporation from open water, bare soil and grass, *P. Roy. Soc. Lond. A. Mat.*, 193, 120–145, <https://doi.org/10.1098/rspa.1948.0037>, 1948.
- Pham-Duc, B., Sylvestre, F., Papa, F., Frappart, F., Bouchez, C., and Crétaux, J.-F.: The Lake Chad hydrology under current climate change, *Sci. Rep.-UK*, 10, 5498, <https://doi.org/10.1038/s41598-020-62417-w>, 2020.
- 480 Robert, E., Kergoat, L., Soumaguel, N., Merlet, S., Martinez, J.-M., Diawara, M. and Grippa, M.: Analysis of Suspended Particulate Matter and Its Drivers in Sahelian Ponds and Lakes by Remote Sensing (Landsat and MODIS): Gourma Region, Mali, *Remote Sens.*, 9, 1272, <https://doi.org/10.3390/rs9121272>, 2017.
- Reis, L.G. de M., Souza, W. de O., Ribeiro Neto, A., Fragoso, C.R., Ruiz-Armenteros, A.M., Cabral, J.J. da S.P. and Montenegro, S.M.G.L.: Uncertainties Involved in the Use of Thresholds for the Detection of Water Bodies in Multitemporal Analysis from Landsat-8 and Sentinel-2 Images, *Sensors*, 21, 7494, <https://doi.org/10.3390/s21227494>, 2021.
- 485 Sally, H., Léville, H. and Cour, J.: Local Water Management of Small Reservoirs: Lessons from Two Case Studies in Burkina Faso, *Water Altern.*, 4, 365-382, <https://dlc.dlib.indiana.edu/dlc/bitstream/handle/10535/7729/Art4-3-6.pdf?sequence=1&isAllowed=y>, last access: 22 September 2022, 2011.
- 490 Schwatke, C., Dettmering, D., Bosch, W. and Seitz, F.: DAHITI – an innovative approach for estimating water level time series over inland waters using multi-mission satellite altimetry, *Hydrol. Earth Syst. Sc.*, 19, 4345–4364, <https://doi.org/10.5194/hess-19-4345-2015>, 2015.
- Schwatke, C., Dettmering, D. and Seitz, F.: Volume Variations of Small Inland Water Bodies from a Combination of Satellite Altimetry and Optical Imagery, *Remote Sens.*, 12, 1606, <https://doi.org/10.3390/rs12101606>, 2020.
- 495 Shu, S., Liu, H., Beck, R.A., Frappart, F., Korhonen, J., Xu, M., Yang, B., Hinkel, K.M., Huang, Y. and Yu, B.: Analysis of Sentinel-3 SAR altimetry waveform retracking algorithms for deriving temporally consistent water levels over ice-covered lakes, *Remote Sens. Environ.*, 239, 111643, <https://doi.org/10.1016/j.rse.2020.111643>, 2020.
- Sophocleous, M.: Interactions between groundwater and surface water: the state of the science, *Hydrogeol. J.*, 10, 52–67, <https://doi.org/10.1007/s10040-001-0170-8>, 2002.
- 500 Sun, F., Ma, R., Liu, C. and He, B.: Comparison of the Hydrological Dynamics of Poyang Lake in the Wet and Dry Seasons, *Remote Sens.*, 13, 985, <https://doi.org/10.3390/rs13050985>, 2021.



- Taburet, N., Zawadzki, L., Vayre, M., Blumstein, D., Le Gac, S., Boy, F., Raynal, M., Labroue, S., Crétaux, J.-F., and Femenias, P.: S3MPC: Improvement on Inland Water Tracking and Water Level Monitoring from the OLTC Onboard Sentinel-3 Altimeters, *Remote Sens.*, 12, 3055, <https://doi.org/10.3390/rs12183055>, 2020.
- 505 Venot, J.-P. and Cecchi, P.: Valeurs d'usage ou performance techniques: comment apprécier le rôle des petits barrages en Afrique subsaharienne ?, *Cah. Agric.*, 20, 112-117, <https://doi.org/10.1684/agr.2010.0457>, 2011.
- Venot, J.-P. and Krishnan, J.: Discursive Framing: Debates over Small Reservoirs in the Rural South, *Water Altern.*, 4, 316-324, <https://www.water-alternatives.org/index.php/alldoc/articles/vol4/v4issue3/144-a4-3-3/file>, last access: 22 September 2022, 2011.
- Winter, T.C.: Hydrological Processes and the Water Budget of Lakes, in: *Physics and Chemistry of Lakes*, edited by: Lerman, A., Imboden, D.M. and Gat, J.R. (Eds.), Springer, Berlin, Heidelberg, New York, 37-62, https://doi.org/10.1007/978-3-642-85132-2_2, 1995.
- 510 Xu, H.: Modification of normalised difference water index (NDWI) to enhance open water features in remotely sensed imagery, *Int. J. Remote Sens.*, 27, 3025-3033, <https://doi.org/10.1080/01431160600589179>, 2006.
- Zhao, G., Li, Y., Zhou, L. and Gao, H.: Evaporative water loss of 1.42 million global lakes, *Nat. Commun.*, 13, 3686, <https://doi.org/10.1038/s41467-022-31125-6>, 2022.