

1 Exploring the provenance of information across
2 Canadian hydrometric stations: Implications for
3 discharge estimation and uncertainty quantification

4 Shervan Gharari¹, Paul H. Whitfield², Alain Pietroniro³, Jim Freer², Hongli
5 Liu⁴, Martyn P. Clark^{3,5}

6 ¹Centre for Hydrology, University of Saskatchewan, Saskatoon, Saskatchewan, Canada.

7 ²Centre for Hydrology, University of Saskatchewan, Canmore, Alberta, Canada.

8 ³Schulich School of Engineering, University of Calgary, Calgary, Alberta, Canada.

9 ⁴Department of Civil and Environmental Engineering, University of Alberta, Edmonton, Alberta, Canada.

10 ⁵Department of Geography and Planning, University of Saskatchewan, Saskatchewan, Canada.

11 **Key Points:**

- 12 • The Water Survey of Canada’s standard operating procedures in estimating dis-
13 charge from stage values are explored and explained.
- 14 • Given standard operating procedures, four major discharge and uncertainty es-
15 timation categories were identified ~~using a standalone Python workflow~~.
- 16 • ~~67.69~~67.69% of the reported discharge values in the operational database could be ex-
17 plained following the concept of rating curves and temporary shifts.
- 18 • Users of hydrometric datasets are encouraged to understand the provenance of that
19 data, and its fitness for purpose, alongside spatial and temporal differences in un-
20 certainty.

Corresponding author: Shervan Gharari, shervan.gharari@usask.ca

Abstract

Accurate discharge values play a critical role in form the foundation of effective water resource planning and management. However, it is common for ~~Unfortunately, these data are often perceived as absolute and deterministic by~~ users, modelers, and decision-makers ~~to consider these values as true and deterministic~~, despite the ~~subjective and uncertain nature of the estimation process.~~ To address the issue, this study was conducted to identify ~~inherent subjectivity and uncertainty in the data preparation processes.~~ This study is undertaken to examine the discharge estimation methods and associated uncertainties of hydrometric measurements in Canada. The study involved an exploration of multiple operating procedures for rating curve construction and discharge estimation across 1800 active ~~used by the~~ Water Survey of Canada (WSC) hydrometric stations using an independent workflow. The first step involved understanding the discharge estimation process used by the WSC and ~~the and their impacts on reported discharge values.~~ First, we explain the hydrometric station network, essential terminologies, and fundamental concepts of rating curves. Subsequently, we examine WSC's standard operating procedures (SOP) ~~for inferring discharge from stage measurements.~~ During the implementation of the workflow, it was observed that manual intervention and interpretation by hydrographers were required for time-series sequences labeled as "override" and /or "temporary shift". The workflow demonstrated that ~~67 SOPs~~, including shift, temporary shift, and override in discharge estimation. Based on WSC's records of 1800 active hydrometric stations, we evaluated sample rating curves and their correlation to stage and discharge measurement. We investigate under-ice measurements, ice condition periods and frequency, and extreme values in contrast to rating curves. Employing an independent workflow, we demonstrate that 69% of existing records ~~could be adequately recreated following~~ align with the rating curve and temporary shift concept, while 33% ~~followed the other~~ the remaining 31% follow alternative discharge estimation methods (override). ~~Novel methods for discharge uncertainty estimation should be sought given the practices~~ Selected example stations illustrate discharge estimation methods over time. We also demonstrate the impact of override and temporary shift by the WSC. This study attempts to reconcile the significant issue of estimating uncertainty in published discharge values, particularly in the context of open science and Earth System modeling. By collaborating with the WSC, this research aims to improve the understanding of the processes used for discharge estimation and promote wider access to metadata and measurements for more accurate uncertainty quantifications ~~shifts on commonly assumed uncertainty models.~~ Given the practices of override and temporary shifts within WSC, there is a need to explore innovative methods for discharge uncertainty estimation. We hope our research helps in the critical challenge of estimating and communicating uncertainty in published discharge values.

58

Plain Language Summary

59

60

61

62

63

64

This study provides insight into the practices that are incorporated into discharge estimation across the national Canadian hydrometric network operated by the Water Survey of Canada, WSC. The procedures used to estimate and correct discharge values are not always understood by end-users. Factors such as ice cover, and sedimentation limit the ability of accurate discharge estimation. Highlighting these challenges sheds light on difficulties in discharge estimation and associated uncertainty.

1 Introduction

River discharge or streamflow ~~has significant importance for planning, impact and sustainability assessment, and Earth System modeling is the fundamental data upon which hydrology and water management depend~~ (McMillan et al., 2017; Shafiei et al., 2022). River discharge is the integration of other fluxes such as precipitation, evaporation, and soil moisture level at catchment- and basin-scale and hence carries important information about the natural and anthropogenic processes. Given this importance, the national gathering of river discharge data is typically a data product that governments provide as basic national infrastructure to support decision-making, planning, and water management objectives of governments, industry, and private sectors.

River discharge values are typically obtained by using a relationship called a rating curve (Rantz, 1982) to convert measurements of stage values (water level) ~~to~~ into estimates of discharge (water volume over time). ~~The direct~~ Direct discharge measurements are made using ~~velocity measurement~~ techniques such as velocity/flow meters, Acoustic Doppler systems, or other ~~techniques~~ methods. Each measurement technique, device, frequency, and ~~rule result~~ protocol results in various error magnitudes (Pelletier, 1989), ~~contributing to discharge measurement uncertainties (Whalley et al., 2001; Cohn et al., 2013)~~. Rating curves are developed through occasional ~~discharge measurement activities in the field~~ field discharge measurements, where hydrographers relate ~~those~~ these direct measurements to river stages. The structure of the residuals model for rating curves can then be characterized by comparing ~~measurements to~~ these measurements to the rating curves. ~~The~~ This residuals model can ~~then subsequently~~ be used, often ~~in a straightforward way following established methods~~, to estimate discharge uncertainty from continuous stage ~~measurement (Whalley et al., 2001; Cohn et al., 2013; Coxon et al., 2015; Huang, 2018; Kiang et al., 2018) measurements (Coxon et al., 2015; Kiang et al., 2018)~~.

In addition, errors in discharge values also stem from the (limited) capability of rating curves to represent time-dependent changes in stage-discharge relationships. Such time-dependent changes in river conditions come from local hydrodynamics and environmental conditions. This includes time-dependent changes in river conditions that introduce backwater effects due to sedimentation, and vegetation growth or ice formation, amongst others. The stage-discharge relationships defined by rating curves are generally functional forms (single curve) while in reality, they may be hysteretic due to the dynamic nature of water movement in the channel (Tawfik et al., 1997; Wolfs & Willems, 2014; Lloyd et al., 2016; Gharari & Razavi, 2018). For example, the rising limb and falling limb of a flood hydrograph may exhibit different discharge values for the same stage. This difference between the assumed stage-discharge relationship and the dynamic nature of the stage-discharge relationship is a source of uncertainty (among many other sources of discharge uncertainty).

Lastly, *standard operating procedures* or SOPs that are developed and used by hydrometric agencies for translating water level to discharge are often established for constant re-assessment. In many instances, the stage-discharge relationship can be subject to the hydrographers' intervention. As an example, the process of creating a rating curve from observational discharge measurement may need to follow agreed-upon institutional or organizational procedures. In addition, updating rating curves over time, to try to maintain the accuracy of relationships, may result in more challenges in uncertainty quantification associated with the rating curve.

Given the differences in operating procedures, separating the above sources of uncertainty quantitatively is challenging and needs an extensive understanding of the operating procedures to determine the magnitude of each of the sources of uncertainty. Despite this difficulty, the communication of the discharge uncertainty is becoming increasingly important as hydrological, water quality, and water management models, which are often used for decision-making, are based on these published and approved estimates of river discharge.

~~The study's ultimate goal is to assist with the quantification of uncertainty in the discharge measurements taken at Canadian hydrometric stations. The study~~ This study

120 seeks to identify critical decisions ~~at the WSC's quality assurance and management system~~
121 ~~(QMS) to aid in this process~~ on discharge estimation processes at the Water Survey of Canada
122 (WSC). The study ~~is a necessary step in diagnosing the issue of discharge uncertainty~~
123 ~~estimation in Canadian hydrometric stations. The study seeks to answer~~ tries to address
124 the following questions:

- 125 • What are the standard operating procedures followed by hydrographers ~~at the WSC~~
126 for discharge estimation?
- 127 • What are the critical decisions ~~at the WSC~~ that affect discharge estimation and
128 associated uncertainties and how ~~they can~~ can they be categorized?
- 129 • How can access to metadata and measurements be improved to aid in the estima-
130 tion of discharge uncertainty for Canadian hydrometric stations?

131 The response and investigation of the aforementioned questions serve as the foundation
132 for the overarching objectives of standardizing uncertainty quantification and communication
133 within the quality assurance and management system, QMS, of WSC.

134 This paper is organized as follows. First, the terminologies are introduced to fa-
135 miliarize readers with the institutions, SOPs, concepts used in this study, and the work-
136 flow from data acquisition to river discharge estimation. This is followed by the results
137 section where examples of rating curves and their relationship to observations of stage-
138 discharge values are discussed. The estimated discharge values by WSC are reproduced
139 using the available stage values and information in the production system. The paper
140 concludes by discussing the findings and suggestions for essential data acquisition and
141 archiving that will allow for better uncertainty estimation for Canadian hydrometric sta-
142 tions.

143 2 Data, Terminologies, and Methodologies

144 2.1 Canada's hydrometric monitoring program

145 Canada like many other nations has invested heavily in its national hydrometric
146 monitoring program through the Water Survey of Canada, WSC, and in the publicly avail-
147 able national service and historic discharge records (refer to Table-A1 for terminologies
148 that are used in this work). WSC is a unit of the National Hydrological Service for Canada
149 which is housed within the Canadian Government and is part of the Federal Department
150 of Environment, known as Environment and Climate Change Canada (ECCC). WSC,
151 an ISO 9001-certified organization, oversees the collection, harmonization, and standard-
152 ization of discharge information in a cost-shared partnership with provincial and terri-
153 torial governments across Canada. WSC divides its data into 5 regional entities: (1) Pa-
154 cific and Yukon Region (British Columbia and Yukon), (2) Prairie and Northern Region
155 (Alberta, Manitoba, Saskatchewan, Northwest Territories, and Nunavut) (3) Ontario Re-
156 gion, (4) Québec Region, (5) Atlantic Region (New Brunswick, Newfoundland ~~, and Labrador~~
157 and Labrador, Nova Scotia, and Prince Edward Island). The Ministère de l'Environnement
158 et de la Lutte contre les changements climatiques operates the majority of the Quebec
159 hydrometric stations and contributes these data to the national database under the cost-
160 share agreements and partnerships. Other provinces, also operate their stations and con-
161 tribute to the network. WSC monitoring stations include measurements in real-time of
162 water levels in lakes and rivers and real-time river discharge estimation for the major-
163 ity of its active stations. WSC, currently, operates approximately 1800 active stations
164 across Canada with its partner for discharge estimation. The number of active stations
165 has changed over time while some historical stations are discontinued (not active cur-
166 rently). Detailed descriptions of the history of the WSC, its partnership, and technical
167 evolution are documented (Halliday, 2008; Kimmett, 2022).

2.2 Overview of Current Production System

WSC uses the Aquarius™ operation system maintained and operated by Aquatics Aquatic Informatics. Aquarius™ is used for interaction with the operational database and manipulation of values for discharge estimation. This system was tailored to the WSC SOPs and QMS, and has been in use since 2010. The Aquarius™ system allows for real-time water level reporting and flow data estimations for most WSC stations equipped with telemetry systems. ~~These stage values go through automated checks to account for faulty readings. Meanwhile, WSC hydrographers may perform discharge activity and enter the measured discharge values into the system. The estimated discharge may then be used to correct based on discharge measurements, depending on conditions. The hydrographer might decide to apply or change previously estimated discharge values based on discharge measurements and other environmental factors or move on with testing a new rating curve.~~ Aquarius™ Aquarius™, including its graphical user interface or GUI, provides many options to hydrographers to revise the discharge values, smooth discontinuities, and fill gaps among others. ~~These provisional data are later quality assured and approved using a rigorous approval process. The aggregated discharge values at daily temporal resolution are disseminated publicly through the National Water Data Archive of Canada called HYDAT.~~

The most important ~~and easily measured~~ variable in hydrometry is *stage* or *water level*. The accurate measurement of stage values is crucial as it is the main variable used in combination with the rating curve to estimate discharge. The recorded stage values are at temporal resolutions programmed into the field-based logger system and are typically in the order of minutes. It is noteworthy to mention that ~~the stage logger time steps are currently set at 5 minutes, although~~ in the past ~~, the observation of the stage values~~ the stage observation temporal resolution would vary between sites and ~~be recorded as daily, half-daily, hourly, span from daily, hourly, half-hourly~~ or quarter-hourly ~~depending on the station. Therefore the stage time series might have various temporal resolutions over the long-term historical record.~~

~~Discharge values are also reported at temporal logger resolution in the production database. The, the stage logger time steps are currently set at 5 minutes. The collected stage values go through automated checks to account for faulty readings and are used, with the help of rating curves, to estimate discharge values. These provisional discharge data are later quality-assured and approved using a rigorous approval process. The approval process, among others, includes the repeatability of estimated discharge values by other hydrographers. The reported discharge values are accompanied by quality assurance flags that identify the condition under which the river discharge is estimated (explained in Table-A1). The aggregated discharge values at daily temporal resolution are disseminated publicly through the National Water Data Archive of Canada called HYDAT.~~

There is information in the production database regarding ~~field visits which include checking of the instruments or and stage-discharge measurements that includes the direct measurement of river discharge.~~ Field visits are activities that are designed to ensure the operational integrity of instruments at station. Stage-discharge measurements encompass activities using techniques such as *mid-section*, using standard flow-meters, or *Acoustic Doppler* equipment for river discharge measurement. In practice, multiple discharge measurements are made to determine a consistent flow estimate, particularly when the measured discharge deviates substantially from the expected discharge estimate derived from the rating curve (stage-discharge relationship). The discharge measurement activities are essential to confirm or adjust rating curves. Based on new discharge measurements or environmental factors such as the presence of ice, the hydrographer may decide to apply or change previously estimated discharge. Additionally, based on new stage-discharge measurements, hydrographers may decide to design and test new rating curves.

The earliest records of stage values, in the current WSC operational database, are from the mid-1990s. These data were transferred from the previous newleaf production system when Aquarius™ was first introduced. The reader should note what is contained in the operational database is only a fraction of the existing historical time series that

exists in various forms at WSC regional offices or earlier database systems. For example, for the Bow River at Banff station located in the province of Alberta, the stage and associated estimated discharge records start from 1995 in the operational database while the reported discharge in the HYDAT dataset goes back to 1909. Similarly, the earliest records of observational field discharge measurements and the earliest rating curve recorded for each station in the operational database extend mostly to the 1970s and 1980s. For the same station, the existing rating curves in the operational database system ~~begin~~ began in 1990, despite over 100 years of record. Earlier rating curves cannot be accessed from the operational database as they have not been transferred into this system, however, all records are available, many in hard copies in the WSC regional offices. This is a similar story for historical field discharge measurements; not all the earlier historical observations have been carried over to the current operational database. ~~Again, for~~ For the Bow River at Banff station, the earliest observational discharge in the operational database is from 1986. The difference between the period of the digital operational database accessible by Aquarius™ and records that exist at WSC regional offices needs to be emphasized since the present analysis is limited to data that is contained in the current operational database.

The focus of this study is only on active stations. Each station is defined by a *station ID*. The station ID is a unique identifier for each hydrometric station and its approximate location using a standard WSC naming convention. In this convention, the first two digits define the major drainage basin in which the station is located (01-11, see Figure-1). The two digits are followed by two letters that define the location of sub-basins ordered from headwaters to the mouth in each major drainage basin (AA, BA, BB, BC, etc). The ID ends with a three-digit sequential number of the station in sub-basins. As an example, the station ID of Bow River at Banff, 05BB001, indicates it was the first station in sub-basin BB that is located in Saskatchewan/Nelson River basin identified by the leading code of 05.

~~General definitions~~

2.3 Rating Curves

Rating Curves are perhaps the most commonly used method for river discharge estimation derived from stage observations. Rating curves are functional hydraulic relationships that relate river stage values to discharge values. In the WSC operational database, each rating curve is tied to an effective period, from a start to an end date, where the rating curve is considered the valid expression to estimate discharge values from stage records. Rating points are pairs of stage and discharge values that define the form of the rating curve functions (red points on Figure-2a,b). For the interpolation between the two consecutive rating curve points, the Water Survey of Canada uses two major approaches: (1) *linear table* (2) *logarithmic table*. In a linear table, a linear relationship is assumed between the rating points (Figure-2a), while in a logarithmic table, a logarithmic relationship is used instead (Figure-2b). The logarithmic relationship is defined by the form of $Q_t = a(H_t - O)^b$ with parameters a and b and an offset value of O . The offset values are archived alongside the rating points in the production system database while a and b can be inferred using the position, read stage, and discharge, of the consecutive rating curve points. H_t is the measured stage and Q_t is estimated discharge at time t . The logarithmic expression of rating ~~curved~~ curve resembles the hydraulic equations relating water elevation to discharge. The offset, O , can also be referred to as reference elevation or H_0 and alongside parameter a and b can reflect "hydraulic" characteristics (Reitan & Petersen-Øverleir, 2011).

~~Rating curve and discharge estimation definitions p0.20p0.80p0.1~~
~~Definition-Description~~
~~Rating curve Rating curve is a function that relates an observed stage expressed in the unit of meters or length to discharge in volume per time such as cubic meter per second or volume per time. A rating curve and its rating curve points are decided by hydrographers based on various factors and past discharge activities (refer to Figure-2). Rating curve~~

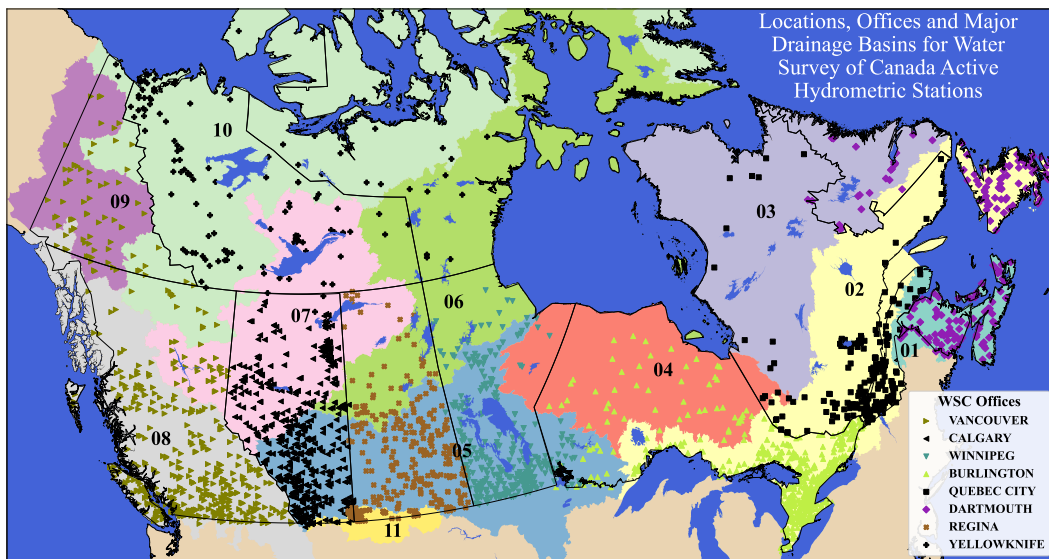


Figure 1: Location of active hydrometric stations across Canada. The eleven major drainage basins are (01) Maritime Provinces, (02) St. Lawrence, (03) Northern Quebec and Labrador, (04) Southwestern Hudson Bay, (05) Nelson River, (06) Western and Northern Hudson Bay, (07) Great Slave Lake, (08) Pacific, (09) Yukon River, (10) Arctic, and (11) Mississippi River. These digits are the first two characters in station IDs. The province of Quebec stations that are operated by Ministère de l'Environnement et de la Lutte contre les changements climatiques of the Province of Québec are not included in the WSC production database, nor are stations operated by other government agencies, crown or private corporations.

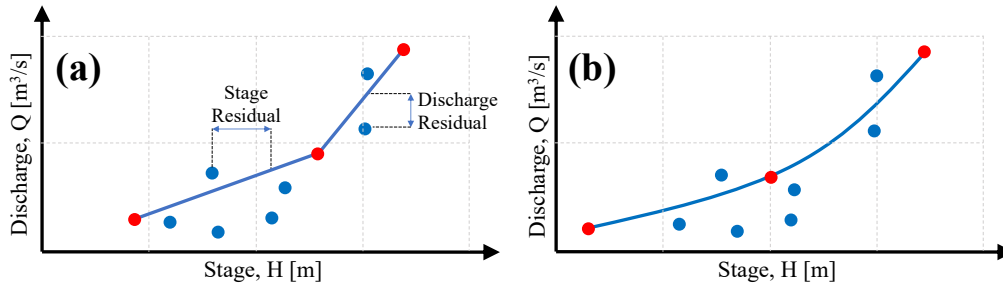


Figure 2: Examples for (a) linear table, and (b) logarithmic table rating curves. The blue points are the observation points of the measured stage and discharge during discharge activities measurement; the rating points that define the rating curve are shown in red. In practice, these are not equations describing curves but lookup tables that record stage and discharge values.

points Rating curve points are the points that define the rating curve functions. The function between the rating points is defined in two ways based on rating curve types. Observational or gauging points Stage and discharge pair of values that are collected/measured during discharge activity and are used for rating curve creation or temporary shift and override estimation. Rating curve tables or types The type of functions between the rating curve points. Water Survey of Canada uses either linear or logarithmic tables to define the form of function between consecutive rating curve points Linear Table Linear relationship is assumed between the two consecutive rating curve points Logarithmic Table Logarithmic relationship is assumed between the consecutive curve points that follow formulation in form of $Q_t = a(H_t - O)^b$ in which O is the offset (similar to intercept) and is archived in the operational database while a, b must be inferred based on the provided starting and ending points of the logarithmic rating curve segment. H_t is the measured stage and Q_t is estimated discharge for time t Offset Offset identifies the logarithmic function between the two consecutive rating points and accompanies the rating points information in the operational database. The two consecutive rating points and offset are needed to calculate a and b parameters for logarithmic tables. Rating curve shift Rating curve shifts are permanent shifts of entire or parts of the rating curve to accommodate the systematic changes of observational or gauging points over time Rating curve temporary shift Rating curve temporary shifts are the time dependent values in units of length such as meters that the rating curve is shifted for (hence an identical stage value and rating curve result in different discharge given different shift values). Temporary shift values are assigned on a specified date. The temporary shift is then assumed to linearly change between the temporary shift values at two consecutive dates of temporary shift application. Override Override is a process of correcting the discharge values. Override will result in discharge values being different from what is calculated using stage values, rating curves, and temporary shift values.

2.4 Managing Rating Curves Changes

The process of managing changes that affect a rating curve can be broken down into three major practices, which are defined in the Water Survey of Canada (WSC) Standard Operating Procedures (SOPs). These changes can include non-functional relationships such as hysteresis, or non-stationary relationships over time due to physical and environmental factors. The processes are itemized below.

- **[Re]construction of rating curves:** New observations that indicate a change to the local hydraulic realities may require an establishment of a new rating curve.

308 A new rating curve is required when part or all of the historic stage-discharge ob-
309 servations does not fit new discharge measurements and cannot easily be accom-
310 modated by historical rating curve manipulations. Large changes to a water body
311 or structural influences on local hydraulics may warrant this reconstruction. An-
312 other example would be the construction of a rating curve beyond the maximum
313 observed stage-discharge using various types of modeling techniques or a change
314 of rating curve from linear table to logarithmic table.

- 315 • **Shift:** The shift of a rating curve happens when the entire or part of the rating
316 curve needs to be adjusted based on new discharge measurements (but not entirely
317 reconstructed). These shifts can have various forms; the simplest form is a con-
318 stant or single point shift in which the new observational points show a single value
319 shift in comparison to earlier observations and the rating curve (constant over the
320 range of the rating curve). The other types of shift can be used to accommodate
321 part of the rating curve shift, called knee bend, or more local accommodation of
322 changes in the rating curve by truss shift (Figure-3). Readers are encouraged to
323 refer to earlier works to read a more extensive elaboration of rating curve shift (Rainville
324 et al., 2002; Mansanarez et al., 2019; Reitan & Petersen-Øverleir, 2011).
- 325 • **Temporary shift:** The concept of the temporary shift of rating curves is not widely
326 known or explored in the literature. The temporary shift is the movement of a ra-
327 ting curve along its stage axis to adjust for the short-term presence of environmen-
328 tal disturbances such as backwater and ice conditions. Figure-4a-c shows an ex-
329 ample of how the temporary shift is applied over time and how the application of
330 temporary shift affects the inferred discharge compared to the case when no tem-
331 porary shift is used for ice cover condition. Figure-5 illustrated the effect of ap-
332 plied temporary shift on the rating curve. Initially, the temporary shift is set to
333 zero before the time t_1 meaning that the stage-discharge relationship follows the
334 original rating curve. There is a field measurement during this period. The newly
335 obtained stage and discharge values during the field measurement do not conform
336 with the rating curve (residuals are not zero). In the next discharge [activity measurement](#)
337 during the freeze-up period, the hydrographer, based on environmental conditions
338 and discharge [activity measurement](#) at t_2 , will apply a negative shift. The neg-
339 ative shift can be either summed with stage values or can be represented by a rat-
340 ing curve temporary shift to the positive stage direction (and another way around
341 for positive temporary shift values). In this example, the rating curve is shifted
342 to the right along the stage axis, which implies that during the freezing-up period,
343 identical stage values will result in a smaller discharge estimation in comparison
344 to the original rating curve (when the temporary shift of zero - open water). The
345 magnitude of this negative shift is applied as such so that the observed stage and
346 discharge at time t_2 coincides with the temporarily shifted rating curve (obser-
347 vation is given more weight which results in zero residuals). The temporary shift
348 magnitude is increased at time t_3 based on the development of ice cover over the
349 river. At the time t_4 another discharge [activity measurement](#) is performed. The
350 hydrographer decides to adjust the temporary shift value at this time, t_4 , to match
351 the observational stage and discharge (again giving more weight to observation
352 and setting the residuals to be minimum). And finally, during a field visit after
353 the ice breaks up, the hydrographer reduces the shift magnitude to be set to zero
354 at t_6 after which the original rating curve is used. The temporary shift changes
355 linearly between the date and time of application of each temporary shift value.
356 This linear change over time essentially means that between times of t_1 and t_6 there
357 is effectively a new rating curve for every logger reading of stage values. The tem-
358 porary shift values and their time and date of application are recorded in the op-
359 erational database.

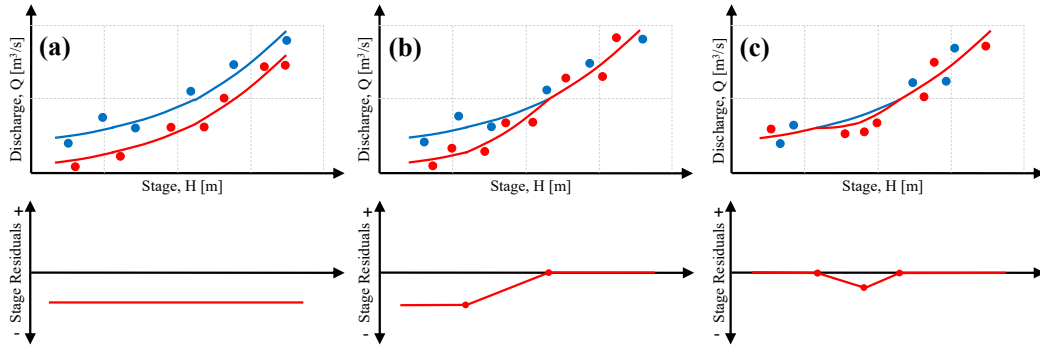


Figure 3: The shift of rating curve segments to accommodate new observation points based on stage residuals for various types from a base [original] rating curve: (a) constant or single point shift in which the rating curve is shifted with a constant value over its entire range, (b) knee bend in which part of rating curve is shifted with a constant value, and (c) truss in which more local shift is applied on a rating curve.

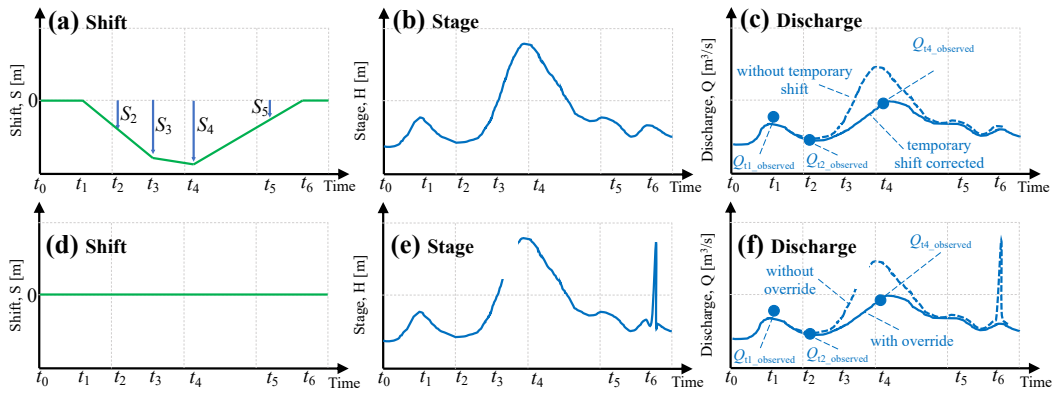


Figure 4: Above panels provide an example of discharge estimation using the concept of temporary shift. The bottom panels provide an example of discharge estimation using the concept of override (while temporary shift is set to zero). (a) The evolution of temporary shifts over time, (b) measured stage time series, (c) estimated discharge time series with and without temporary shift, (d) temporary shift time series, set to zero, (e) stage values record that has a gap and faulty reading, and (f) the estimated discharge values using override techniques that are corrected for the gap, discharge [activity measurement](#), and faulty reading. The effect of temporary shift time series on the rating curve is illustrated in Figure-5

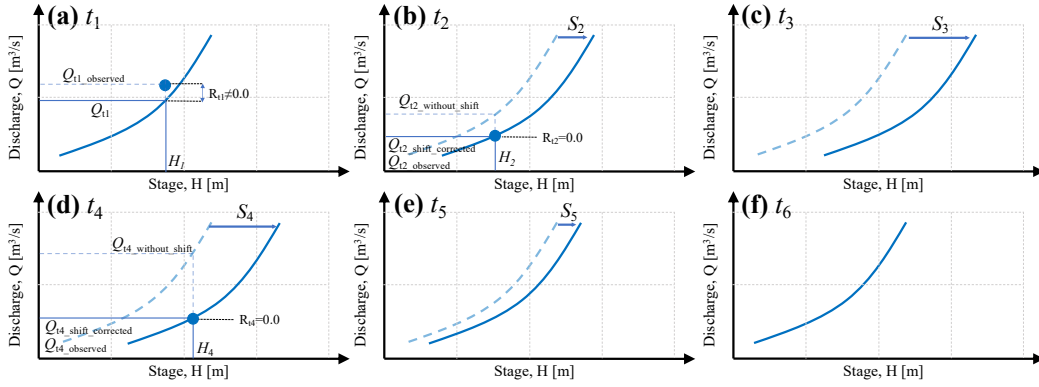


Figure 5: Temporary shifted rating curves at (a) t_1 , (b) t_2 , (c) t_3 , (d) t_4 , (e) t_5 , (f) t_6 from shift time series illustrated in Figure-4-a applied based on the environmental condition during ice over, hydrographer experience and discharge [activities measurements](#).

360

2.5 Overrides

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

In addition to the temporary shift of the rating curve, WSC uses other methods outside the manipulation of rating curves to report an updated discharge estimation. These updates follow WSC SOP rules and are based on a multitude of factors such as discharge measurements, and the hydrographer's judgment as to the state of changes in the river. The collective title of these efforts is *override* in which WSC hydrographers use various techniques and sources of information to manually correct discharge values. Overrides may include adjustments based on upstream or downstream station readings, linear interpolation of missing values, reconstruction of peak discharge by [hydraulic] modeling, falling limb using decay functions, or under-ice discharge variations among others. The override practices can sometimes vary between the WSC offices. Although the hydrographers at WSC follow SOP guidelines and their experience for this estimation, given that our efforts were limited to data available from the API, it is challenging to easily recreate estimated discharge values reported in the operational database. Figure-4d-f illustrates a very simplified example of an override in which the temporary shift is not used (and hence zero). The discharge values are manipulated to fill the gap between time t_3 and t_4 in the stage record for the rising limb of a flood event. The discharge values are also changed to reduce the estimated peak flow to better match the observational discharge at time t_4 . Finally, the hydrographer decides that the stage reading values at t_6 are faulty and should not be used for discharge estimation. The discharge values for this faulty reading are then interpolated using the past and future readings of this station and possible existing upstream and/or downstream stations.

382

2.6 Developing an independent Workflow

383

384

385

386

387

388

389

390

391

392

An independent Python workflow is designed to evaluate the reported discharge values in the operational WSC database. The designed workflow uses the application programming interface or API to extract data directly from the database. The main aim of the workflow is to replicate the reported discharge in the operational database, [Discharge.Historical.Working](#), using the recorder stage values, identified by [Stage.Historical.Working](#), [Stage.Historical.Working](#), and other available information, such as rating curves, and temporary shift from the operational database. The workflow is designed into five steps: step-1 is the interrogation of the metadata from the production database. This includes downloading the metadata for available time series at logger resolution such as stage, and other parameters such as pressure, voltage, or any parameter that reflect on the functionality of instruments

393 or environmental factors. Information about the rating curves (their IDs) and the dates
394 of their applications are also extracted. In the second step, step-2, rating curves, and time
395 series are downloaded from the production database. These data are the rating curve
396 tables, including the offset for the logarithmic table, and the effective shift at a given date
397 and time (specified in the shift metadata, from step-1). Step-3 is the adjustment of the
398 variables to common scales. This includes refining the rating curves to increments of 1
399 millimeter for finer interpolation along the stage axis and also re-sampling, interpolat-
400 ing continuous or discrete information such as temporary shift values, and rating curves
401 ID to temporal stage resolutions. This step provides the needed information for estimat-
402 ing the discharge from stage values. Step-4 mainly focuses on estimating discharge from
403 the stage based on the files created from the adjustment step and the time series of stage
404 values used to recreate discharge within the production system. Finally, step-5 of the work-
405 flow focuses on evaluating and interpreting the reproduced discharge and comparison with
406 reported values from the production database. The difference between the reported dis-
407 charge values in the production database, which includes override practices and values,
408 and reconstructed discharge based on the above-mentioned workflow can shed light on
409 the level of possible intervention by override or other methods on reported discharge.

410 3 Results

411 3.1 Rating Curves Construction and Characteristics

412 Rating curves are characterized by rating points, and in the case of a logarithmic
413 table, they are accompanied by offset values (O , refer to Table-?? and Figure-2). Our
414 findings, contrasting the rating curves and observational points, indicate that the crea-
415 tion of rating curves from observational points does not always follow a unified statisti-
416 cal approach. Rather, it is sometimes based on hydrographers' judgment and field ob-
417 servations. Additionally, it is not apparent, when extracting data from the API system,
418 which stage-discharge measurement points are used to update the current rating. A few
419 of the limitations in reproducing rating curves are described below. (Figure-6):

- 420 • **Rating curve extrapolation/extension beyond the largest stage-discharge**
421 **in the operational database record:** The rating curves might be extended be-
422 yond the largest stage and discharge observed values in the operational database.
423 The method for the extension of the rating curves is not provided through the API
424 in the operational database. ~~Very old observational points~~ Earlier observational
425 discharges that are not recorded in the operational database may be used in cre-
426 ating more recent rating curves or the extrapolation is done using hydraulic mod-
427 eling or other procedures. For example, the difference in the rating curves for sta-
428 tion 02YR004 is perhaps due to extrapolation outside the range of maximum ob-
429 servation using SOPs. For earlier rating curves that use linear tables this extrap-
430 olation is linear while for more recent rating curves expressed in the logarithmic
431 table, the extrapolation is done in logarithmic space. (Figure-6a).
- 432 • **Extrapolation of rating curve for out-of-bank conditions:** one of the dif-
433 ficulties is to construct the rating curve for the out-of-bank condition with lim-
434 ited observational points at high water conditions (Figure-6b).
- 435 • **Removal of ice-conditioned stage-discharge points:** The formation of an
436 ice cover causes increased friction and generates a backwater effect where the wa-
437 ter level has a different relationship to discharge than in open water conditions.
438 Under ~~ice observational points have much lower river discharge in comparison to~~
439 ~~open water flow for the same stage values and therefore are not used in the construction~~
440 ~~of rating curves, instead a winter ice cover, discharges are much lower than during~~
441 ~~open water and measurements often do not fall on the stage-discharge curve. Instead,~~
442 ~~while ice is present, the observations~~ are used to adjust the estimated ~~discharge~~
443 ~~using override values~~ discharges using overrides or temporary shifts ~~during the ice~~

444 ~~condition~~ (Figure-6c). This, in turn, results in fewer observational points being
 445 available for the construction of rating curves.

- 446 • **Emphasis on one observational point:** A rating curve is often created or changed
 447 based on one gauging measurement. Observational points with very high discharge
 448 values can affect the higher end of the rating curve. This can be due to high dis-
 449 charge values only occurring for brief periods resulting in one observation in the
 450 high discharge period being the only observation. In the example provided for sta-
 451 tion 01FF001, an observational point with stage and discharge of approximately
 452 1.75 m and 40 m³/s is given very high weight in creating the immediate rating curve
 453 update after the aforementioned field activity while in later rating curves, this high
 454 emphasis is not followed (Figure-6d).
- 455 • **Event-based erosion, flood, or long-term channel erosion:** River section
 456 may change over time and therefore observational stage and discharge points fol-
 457 low these changes accordingly. Sediment transport occurs gradually and over longer
 458 periods than a flood event, but can result in complex changes in the measurement
 459 section as sediment is deposited or removed or as dunes proceed through the sec-
 460 tion. These changes require a new rating curve or shifts in the existing rating curve
 461 (Figure-6e). Similarly, floods or high water levels can also result in a substantial
 462 change in river section or removal of stations. In these cases, a new rating curve
 463 is needed.
- 464 • **Changes in rating curve benchmark stage or instrument stage reading**
 465 **change:** A benchmark is a fixed point that is used to link the observed water level
 466 to an actual elevation. The local benchmark that is used as a datum may change
 467 over time with the landscape or administrative change. Alternately instrument
 468 replacement, after a flood event for example, in a new location can also change
 469 the reading in comparison to historical readings compared to the benchmark (Figure-
 470 6f).

471 Given the above, it is important to emphasize that the use of rating curves within
 472 the Water Survey of Canada does not allow for a more classic statistical approach for
 473 uncertainty analysis where the curve would be the best fit through the series of observed
 points (as it is for other institutions such as UK environmental agency

?
 ?00
 , 00

474). The actual process used is deterministic and much effort is invested in making
 475 the rating curve pass through or close to each measurement, or stage and discharge point,
 476 which has been a long-standing practical approach (Rantz, 1982). ~~This, however, means
 477 that the residual structure may not follow a known statistical model, may change from
 478 location to location, and is subjected to hydrographers' experience and judgment. This
 479 is elaborated further in the following subsection about the structure of residuals. Observed
 480 stage-discharge records are not random samples since they have a time sequence and a
 481 measurement bias. For example, high discharges only occur for brief periods and are less
 482 frequent than lower discharges. Conducting discharge activities might be dangerous and
 483 challenging during high water, and many rivers in a region peak simultaneously in time,
 484 so there is a systematic under-representation of high discharge values. This lack of stage-discharge
 485 observations might be particularly important for the stations that are located on sections
 486 that are not stable (Whitfield & Pomeroy, 2017).~~

487 Seasonality and ice ~~condition~~ conditions are other factors that can complicate the
 488 use of existing stage-discharge observations. When there is ice cover, the stage-discharge
 489 relationship will vary substantially from the expected open-water rating curves. Figure-
 490 ~~??~~ 7 indicated that the stage-discharge measurements during cold months of the year

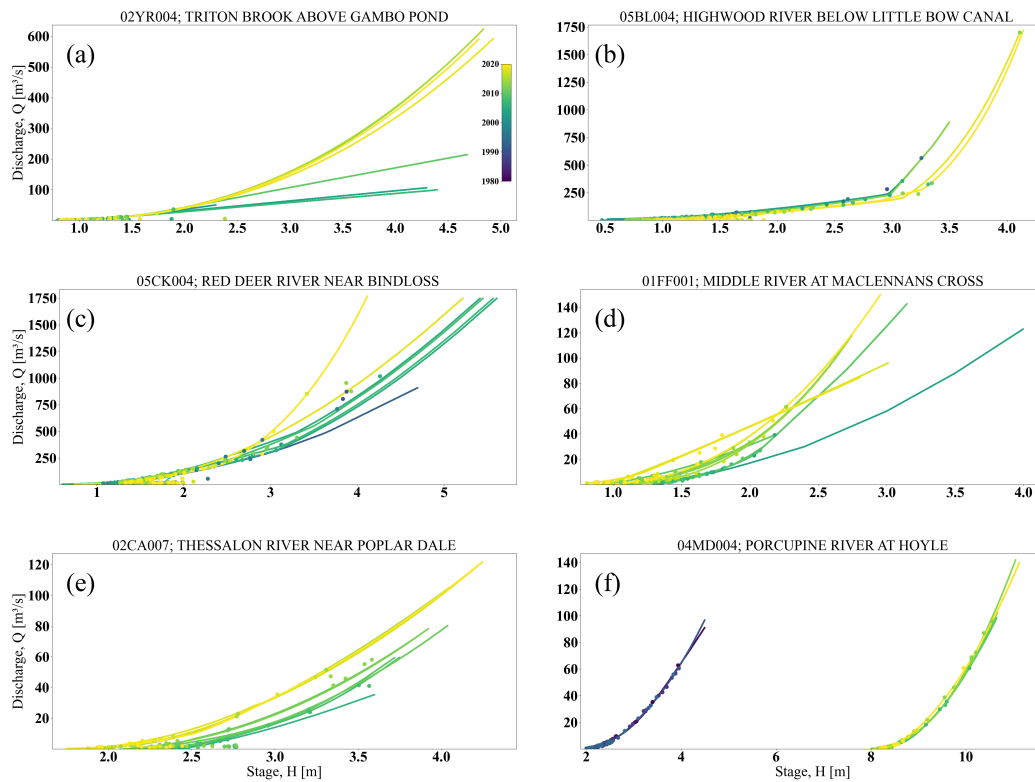


Figure 6: Example of rating curves and observations available in Aquarius illustrating rating curves over time where (a) curves are extended outside of the highest discharge observation extrapolation (b) sharp breaks in rating curves when the river flows out of bank (c) under ice stage-discharge observations are not used in rating curve creation, (d) emphasis on one point of observation results in a change to the rating curve, (e) long or short term river bed erosion, and (f) change in rating curve benchmark for reporting stage values.

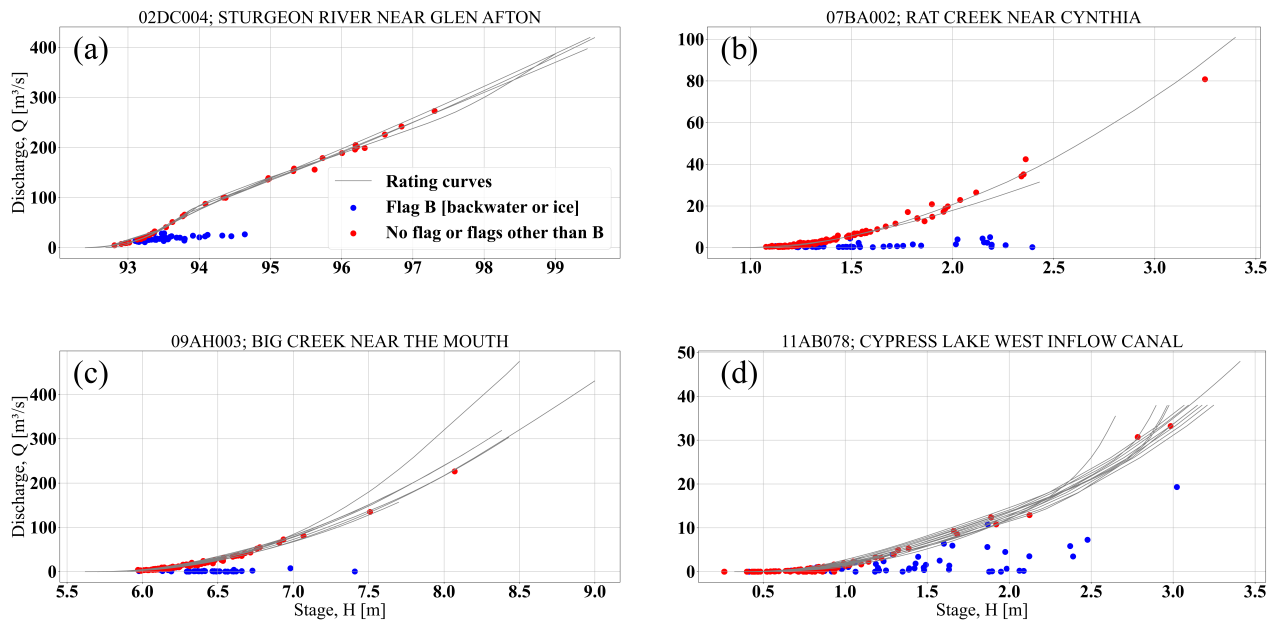


Figure 7: The contrast between the stage-discharge measurements with and without the B flag for stations (a) 2DC004, Sturgeon River Near Glen Afton, (b) 07BA002, Rat Creek Near Cynthia, (c) 09AH003, Big Creek Near The Mouth, and (d) 11AB078, Cypress Lake West Inflow Canal. The blue points are stage-discharge measurements that have the B flag in the operational database. The red points do not have flags while the gray-blue points are observational stage-discharge measurements that are outside the range of discharge B flag, ice or stage time-series from backwater, in the operational database and their possible flags are not known.

491 were identified by flag B, or backwater due to ice, in contrast to those without any or
 492 other with other or no flags. As it is clear from panels of Figure-???, the winter period
 493 often has smaller discharge values for a similar stage to those in summer, therefore, re-
 494 sulting in a smaller pool of stage-discharge observation that could be used for rating curve
 495 creation. Additionally, the presence of ice, similar to sedimentation, can result in the river
 496 bank and morphology changing over time and during an ice jam event which in turn may
 497 result in a change of rating curve over time (similar to Figure-6c). This process of shaping
 498 the river morphology is hypothesized by Smith (1979) to result in less frequent bankfull
 499 events which in turn result in less frequent peak flow measurement. The importance of
 500 river ice processes and their impact on stage and discharge values is reflected in the Canadian
 501 River Ice Database (CRID, de Rham et al., 2020).

502 Additionally, Figure-8 provides fractions of discharge activities measurement activities,
 503 field inspection activities, discharge values, and ice flags for each specific month of the
 504 year for the entire hydrometric network and 11 major drainage basins in Canada. The
 505 red dashed line indicates the change over the year for the percent of each month's field
 506 in situ discharge measurements from total discharge measurements while the blue line
 507 provides an understanding of the magnitude of the discharge values over the month of
 508 a year. The shaded blue for each month provides the comparison between the fraction
 509 of time that the stations time series for that month are identified by flag B (which is
 510 used to identify backwaters due to ice conditions). The number of discharge field mea-
 511 surement activities during the summer months is larger than in the winter months. This
 512 is due to the spring and summer variability in discharge being much greater than in win-

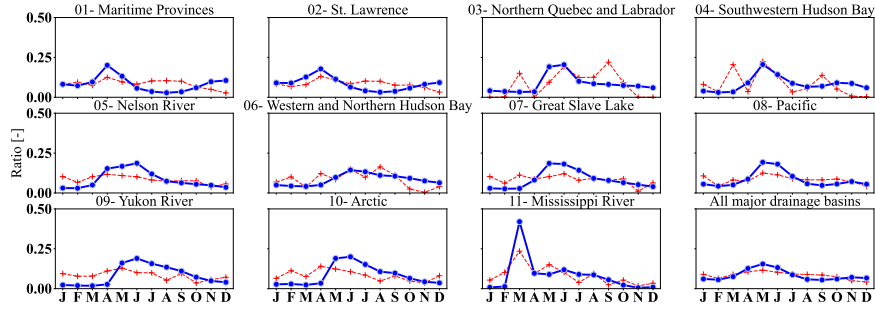


Figure 8: The ~~blue and red dotted~~ lines indicate the monthly fraction of annual discharge in blue and of annual discharge activity respectively stage-discharge measurements in red, for each major drainage basin and for all drainage basins (the total of existing stations in the WSC operational database). The blue shading identifies the fraction of time series that are identified by flag B or backwater that is used to identify ice conditions. The darker the shade the more dominant flag B or ice cover is for the major drainage basin.

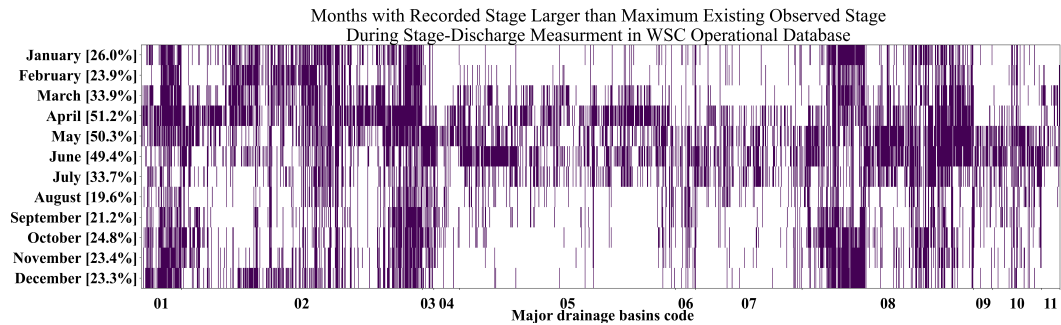


Figure 9: Months where the recorded stage values exceed the maximum observed stage during any discharge activities measurements archived in the operational database. A solid bar in the month in the figure indicates, for a station and during its available record, there is at least one event in that month across all years, with recorded stage values exceeding the maximum observed stage value. The percentage for each month indicates the fraction of stations where the recorded stage is exceeding exceeds the maximum observed stage and discharge.

513 ter and because ice discharge measurements are expensive and labor-intensive in com-
 514 parison to open-water measurements.

515 Evaluating the recorded stage greater than the maximum observed stage in the op-
 516 erational database provides an understanding of how often discharge estimates are in the
 517 portions of extrapolated rating curves beyond the observed stage-discharge points that
 518 are archived in the operational database. Figure-9 indicates that there are stations in
 519 which the stage higher than the maximum observed stage during discharge activity measurement
 520 can occur in any month of the year. One example of this is 02YR004; Triton Brook above
 521 Gambo Pond in the province of Newfoundland and Labrador (Figure-6a). This could hap-
 522 pen because the operational database might not include earlier stage-discharge measure-
 523 ments with the highest stage values or systematic backwater from increased water level
 524 in Gambo pond. In general, Figure-9 highlights the existence of numerous events when
 525 discharge values are estimated using extrapolated segments which can have significant

526 impacts on estimates of discharge and its uncertainty in flood modeling and flood fore-
527 casting.

528 The temporary shift of rating curves to account for environmental conditions is a
529 common practice at the regional offices of WSC. Figure-10 identified three major char-
530 acteristics of temporary shift application across the Canadian hydrometric stations. First
531 is the average number of days per year in which temporary shift is applied (Figure-10a).
532 For the prairie regions, especially stations operated by the Calgary office in the province
533 of Alberta, the temporary shift can be applied all year long (length of temporary shift
534 application larger than 300 days per year). As presented in Figure-10, using the tem-
535 porary shift to adjust for environmental conditions is most common in Prairie and North-
536 ern regions. The use of temporary shifts is less common in Eastern and Western Canada.
537 In those regions, direct manipulation of discharge values rather than the rating curves
538 is more common (following override). The second panel, Figure-10b, indicates the mag-
539 nitude of temporary shift applied in meters. There are stations with temporary shift mag-
540 nitude of more than 1 meter; this means during various environmental conditions such
541 as the presence of thick ice cover, stage values that are as different as one meter or more,
542 under the temporary shift application, may result in similar discharge estimation. Lastly,
543 Figure-10c, identified the range of applied temporary shift to the range of stage values.
544 This comparison indicates how relative intervention by temporary shift is compared to
545 the changes in recorded stage values. Interestingly, there are stations over the Canadian
546 domain in which the range of temporary shift ~~surpass~~ surpasses the range of recorded
547 stage values (ratio of close or more than one).

548 3.2 Time series reconstruction

549 In steps 3 & 4 of the independent workflow, river discharge values are reconstructed
550 and compared with the reported discharge values from the WSC operational database.
551 This comparison of discharge values indicates four categories for discharge estimation:

- 552 1. **Rating curve:** in which the estimated discharge values strictly follow the stage-
553 discharge relationship or rating curves and can be reconstructed using stage val-
554 ues.
- 555 2. **Temporary shift:** in which the discharge follows the temporarily shifted rating
556 curves and can be reconstructed using stage values.
- 557 3. **Override:** The period in which the discharge is estimated using override meth-
558 ods and techniques (not following rating curve and temporary shift).
- 559 4. **Temporary shift and override:** in which both temporary shift of rating curve
560 and override methods are applied at the same time.

561 Table-1 indicates the four categories of discharge estimation, and their reproducibil-
562 ity using the independent Python workflow, given the data that was retrievable from the
563 API system.

564 To provide clear examples of each of the categories, four stations are examined. Figure-
565 ~~12-11~~ illustrates the recorded stage for ~~01AF009, Iroquois River at Moulin Morneault~~
566 08GA079, Seymour River Above Lakehead located in the province of ~~New Brunswick~~British
567 Columbia, in the top panel, ~~the applied shift,~~. The applied temporary shift and the date
568 of field or discharge ~~activities measurements are~~ shown in the second panel from the top.
569 The third panel from the top compares the recreated discharge, using the workflow de-
570 scribed in this study, and the reported discharge from the operational database. The shaded
571 areas in this panel indicate the quality assessment symbol (flag) from the operational
572 dataset. ~~The temporary shift values applied for the year 2003 are zero. However, the~~ There
573 is no application of temporary shift and override for this station in the year 2002 and
574 therefore estimated discharge follows the rating curve concept (presented by green in the
575 bottom panel).

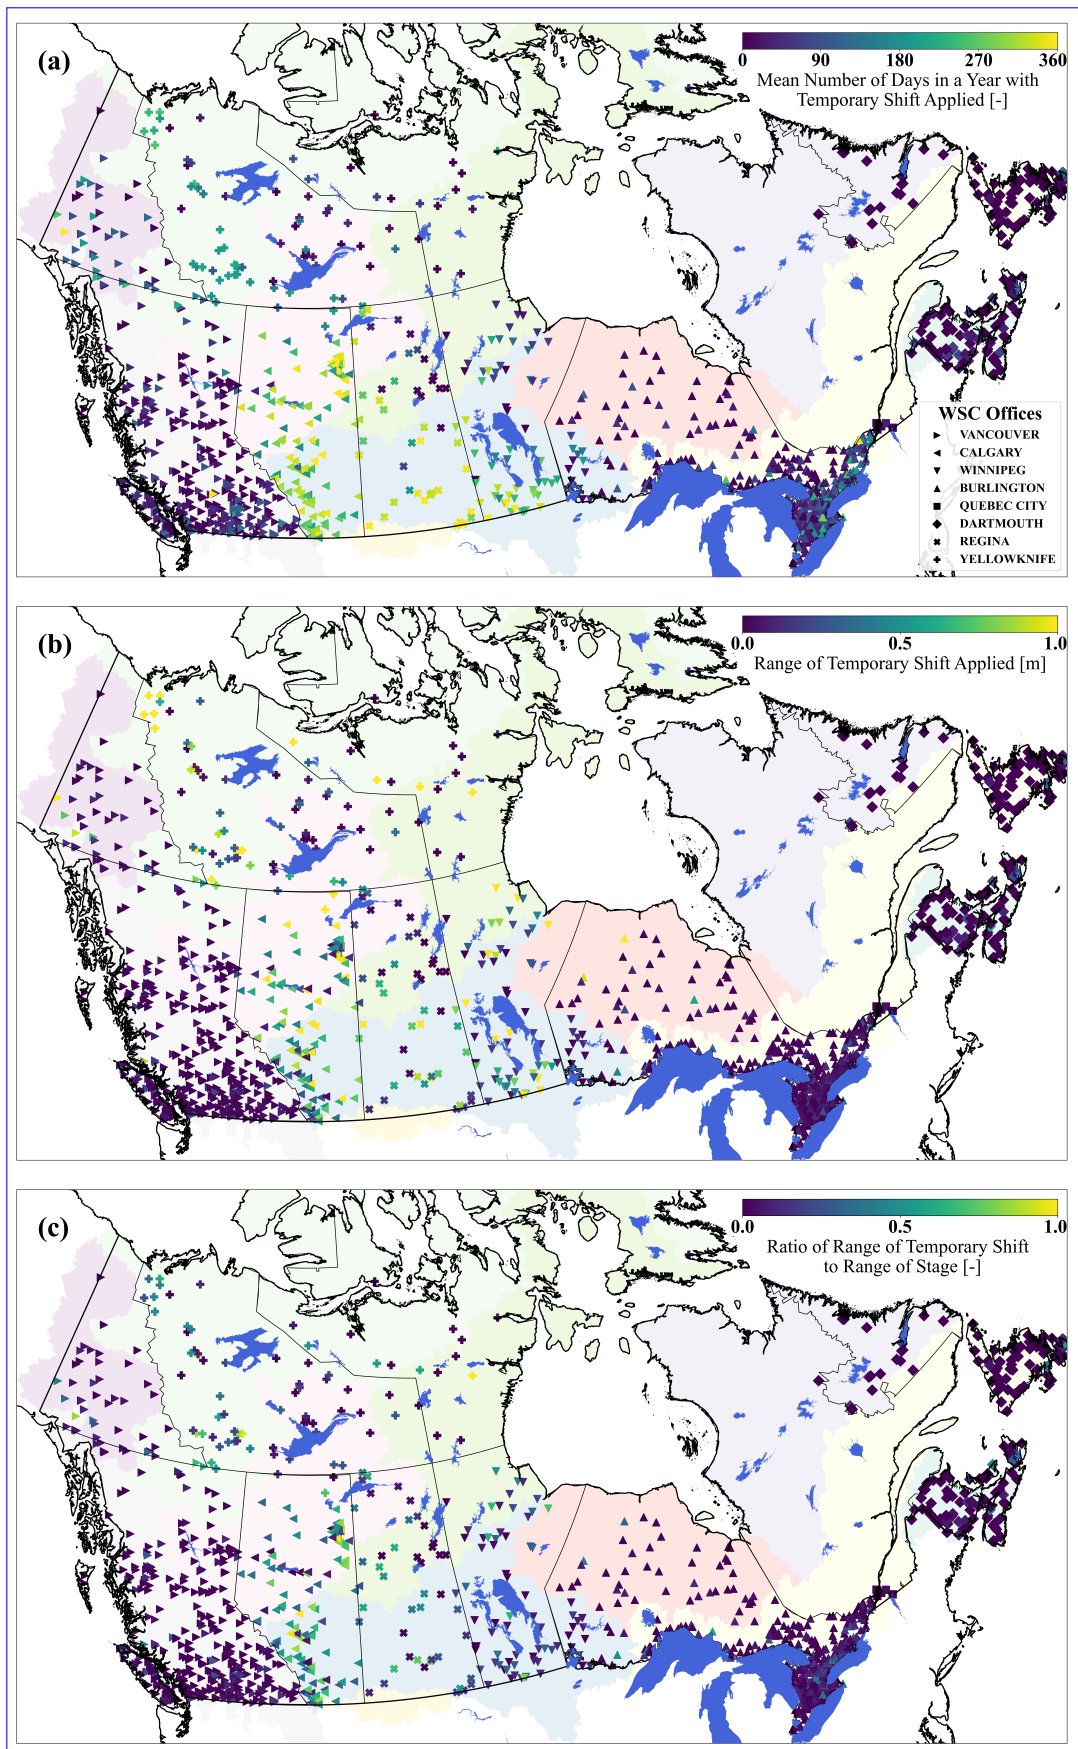


Figure 10: (a) Temporal application of temporary shift, (b) range of applied temporary shift, and (c) the ratio of temporary shift range to stage range across hydrometric stations of Water Survey of Canada. The orange and red colors in the background colors indicate the major drainage basins (refer to Figure-1).

Table 1: Types of discharge estimation

Discharge estimation categories	Condition of application	Reproducibility <u>and repeatability</u>	Uncertainty
Rating curve	Open water condition. Environmental conditions are not significant enough to result in deviation from the stage-discharge relationship or rating curve.	Fully reproducible discharge values following the stage and rating curve.	The discharge uncertainty estimation can be attributed to rating curve uncertainty (type A).
Temporary shift	Backwater, under ice conditions, temporarily changes to the channel. The rating curve is temporarily adjusted to accommodate environmental conditions affecting the stage-discharge relationship.	Fully reproducible discharge values following the stage, temporary shift, and rating curve. However, the magnitude of shift values and their time of applications are based on hydrographer judgment and may not be easily reproducible.	Often a magnitude of the temporary shift is applied, resulting in the highest agreement between observed discharge and estimated discharge (using temporary shift). The residuals are therefore suppressed to small values. Uncertainty estimation methods should be sought to handle the uncertainty estimation of temporary shift practice, type B, in addition to the rating curve uncertainty, type A, resulting in a composite uncertainty model (type A+B)
Override	Stable backwater or under ice conditions, correction of the erroneous values, gap filling of missing data, estimation of freeze up or ice break up transition or ice jams.	Not reproducible following the stage and rating-curve concept; Greatly reproducible <u>Repeatable</u> using the Aquarius™ and available techniques, standard operating procedures by trained WSC hydrographers.	Estimation of discharge using override gives higher weight to discharge observation that suppresses the residuals (similar to temporary shift). The various methods that are used for override may have various levels of uncertainties which are also dependent on the hydrographers' skills. New uncertainty methods are needed to account for these complexities (type C).
Temporary shift and override (mixed)	All the conditions for temporary shift and override. In this case, the discharge is estimated using a temporary shift and override simultaneously to correct the discharge values further.	Not reproducible following the stage and rating-curve concept. Greatly reproducible <u>Repeatable</u> using the Aquarius™ and available techniques, standard operating procedures by trained WSC hydrographers.	The challenges of uncertainty estimation under temporary shift and override can be addressed by developing uncertainty methods for override and temporary shift (type A+B+C).

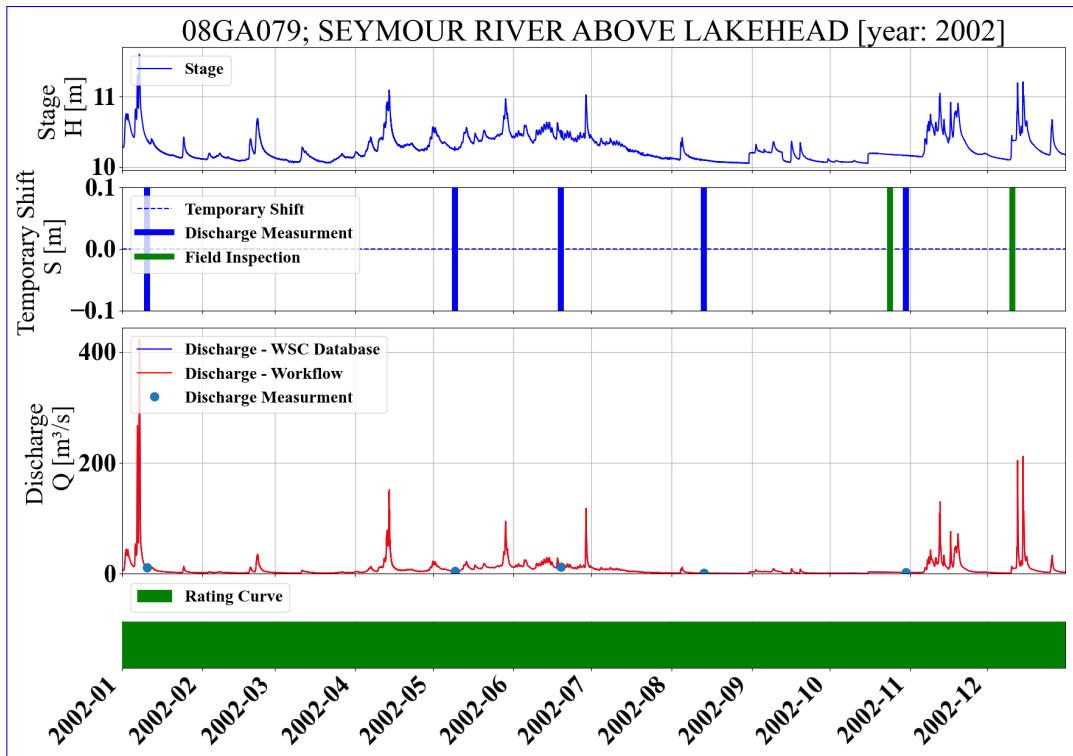


Figure 11: (Top panel) the recorded stage, (second panel from top) the applied temporary shift, (third panel from top) reproduced discharge values based on workflow and comparison to reported discharge values from operational database and discharge measurements, and (bottom panel) dominated method of discharge estimation for 08GA079; Seymour River Above Lakehead in the province of British Columbia. The colors in the lower bar link to the descriptions in Table-1: rating curve (green).

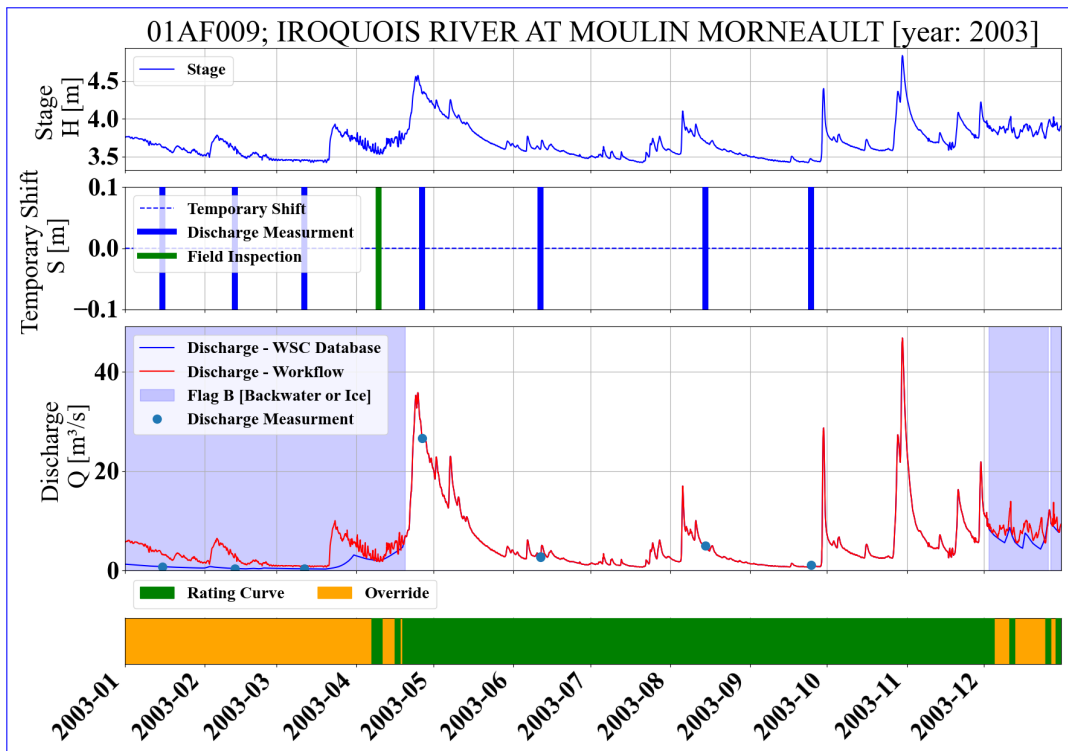


Figure 12: (Top panel) the recorded stage, (second panel from top) the applied temporary shift, (third panel from top) reproduced discharge values based on workflow and comparison to reported discharge values from operational database and discharge [activities measurements](#), and (bottom panel) dominated method of discharge estimation for 01AF009; Iroquois River at Moulin Morneault located in the province of New Brunswick. The colors in the lower bar link to the descriptions in Table-1: rating curve (green), and override (gold).

576 [Figure-12 illustrates the stage, temporary shift, and reported and reconstructed discharge](#)
 577 [values and time series for station 01AF009, Iroquois River at Moulin Morneault located](#)
 578 [in the province of New Brunswick. The](#) under-ice condition in the reported discharge val-
 579 [ues from the operational database is significantly lower than the reconstructed discharge](#)
 580 [values from the stage using the rating curves and temporary shift of zero values while](#)
 581 [the applied temporary shift values for the years 2003 are zero.](#) The under-ice discharge
 582 estimate is an override applied using various methods at the regional offices. It can be
 583 seen that override discharge values pass through the observational points under ice con-
 584 ditions, these observations of discharge are the basis for the winter flow record and not
 585 the recorded stage and the rating curve, while the variation is also recreated following
 586 established logic at the regional office such as under ice peak flows (in this example, late
 587 March and early April). This is reflected in the bottom panel in which two major dis-
 588 charge estimation categories are depicted: the green is when rating curves are followed
 589 without temporary shift and the gold is when the override methods are applied.

590 Discharge values for station 05BL004; Highwood River Below Little Bow Canal is
 591 provided in Figure-13. The hydrographers have applied negative temporary shifts for this
 592 station. For the year 2012, the temporary shift was applied during winter with larger
 593 shifts (-0.25 to -0.50) and during summer with rather small shifts (<-0.20). The winter
 594 shift is presumed to be correcting for ice conditions and the summer shift, in June, is likely
 595 for the backwater correction over the high discharge period (while there is no associated

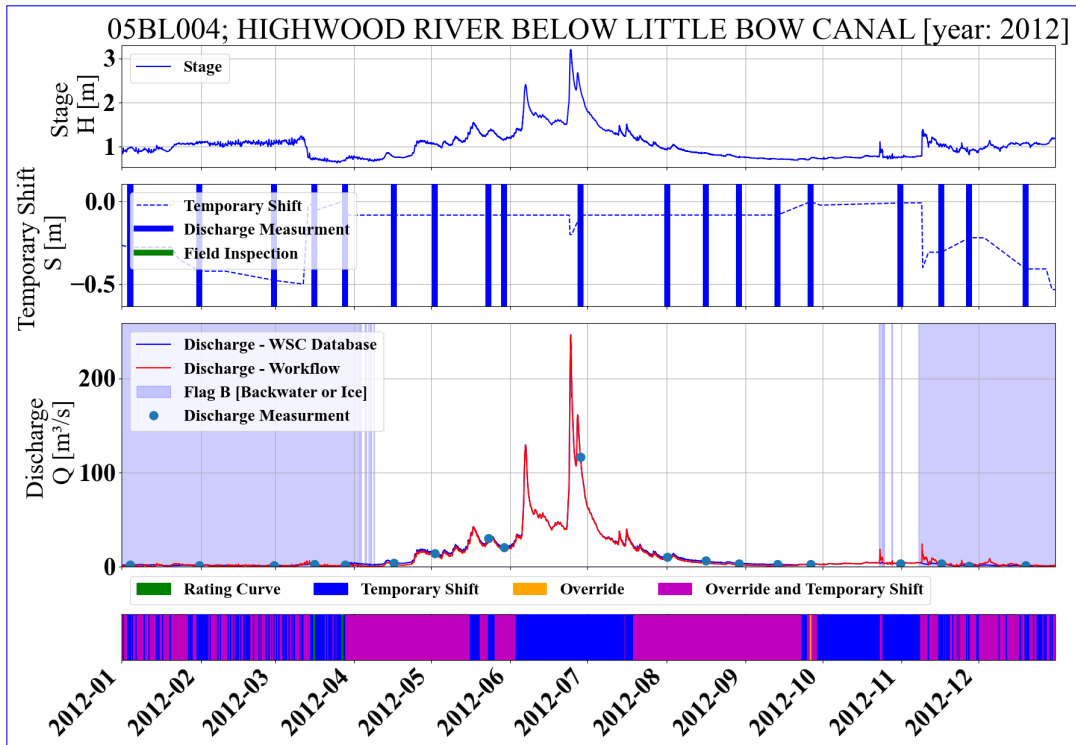


Figure 13: (Top panel) the recorded stage, (second panel from top) the applied temporary shift, (third panel from top) reproduced discharge values based on workflow and comparison to reported discharge values from operational database and discharge [activities measurements](#), and (bottom panel) dominated method of discharge estimation for 05BL004; Highwood River Below Little Bow Canal located in the province of Alberta. The colors in the lower bar link to the descriptions in Table-1: [rating curve \(green\)](#), temporary shift (blue), override with temporary shift, and override (magenta).

596 flag with this event). Temporary shifts are sometimes applied on dates that coincide with
 597 discharge [activities measurements](#) or site visits, presumably to match the observed discharge
 598 with the rating curve with temporary shifts. Shift values can be changed on other
 599 dates that might correspond with temperature changes or video recordings from on-site
 600 monitoring cameras or upstream and downstream station field visits and observations.
 601 The bottom panel indicated that for this station and the year of interest, there are two
 602 major discharge estimation categories: the blue is the rating curve and temporary shift
 603 and the magenta is rating curve and temporary shift which is corrected by override ([slightly](#)
 604 [in this case](#)).

605 [Discharge values for station 08GA079; Seymour River Above Lakehead is given in](#)
 606 [Figure-11. There is no application of temporary shift and override for this station in the](#)
 607 [year 2002 and therefore estimated discharge follows the rating curve concept \(presented](#)
 608 [by green in the bottom panel\).](#)

609 [\(Top panel\) the recorded stage, \(second panel from top\) the applied temporary shift,](#)
 610 [\(third panel from top\) reproduced discharge values based on workflow and comparison](#)
 611 [to reported discharge values from operational database and discharge activities, and \(bottom](#)
 612 [panel\) dominated method of discharge estimation for 08GA079; Seymour River Above](#)
 613 [Lakehead in the province of British Columbia. The colors in the lower bar link to the](#)
 614 [descriptions in Table-1: rating curve \(green\), infilled or missing data \(white\).](#)

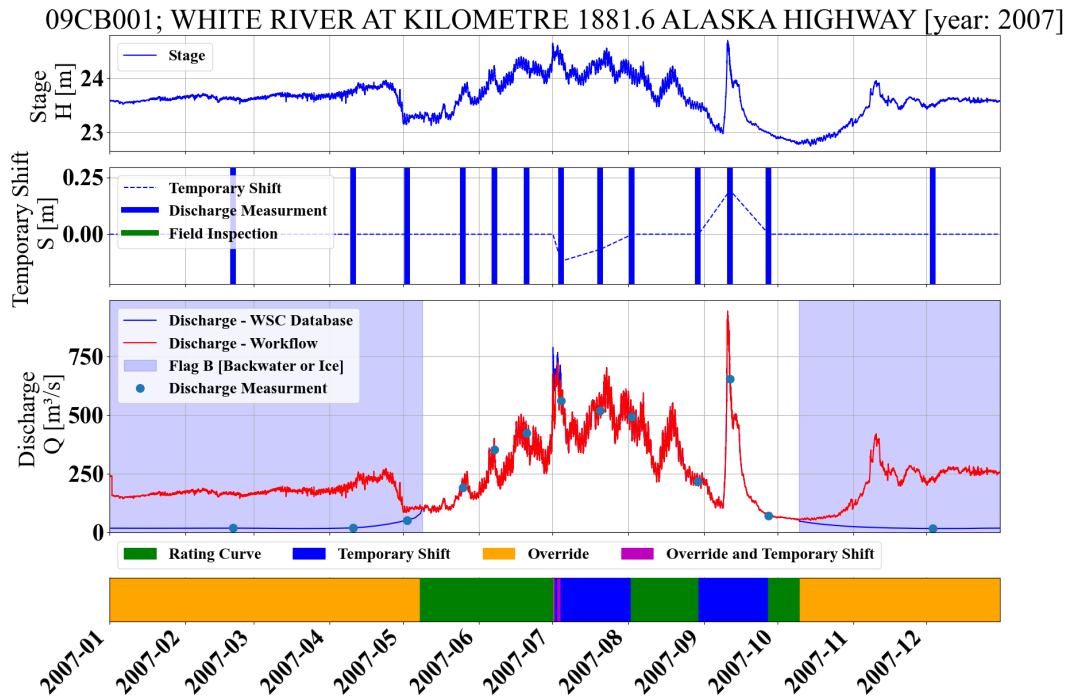


Figure 14: (Top panel) the recorded stage, (second panel from top) the applied temporary shift, (third panel from top) reproduced discharge values based on workflow and comparison to reported discharge values from operational database and discharge [activities measurements](#), and (bottom panel) dominated method of discharge estimation for 09CB001; White River at Kilometer 1881.6 Alaska Highway in Yukon Territory. The colors in the lower bar link to the descriptions in Table-1: rating curve (green), override (gold), temporary shift (blue), and, override with temporary shift and override (magenta).

615 The last example focuses on station 09CB001; White River at Kilometer 1881.6 Alaska
 616 Highway in Yukon Territory (Figure-14). This is an example of a station in which a variety of discharge estimation methods are used. In part of summer, the discharge can be
 617 fully reproduced by rating curves. There are also periods that the temporary shift is applied over summer and discharge estimation follows the rating curve and temporary shift.
 618 In part of the summer, in addition to the temporary shift concept, the override is also applied to correct the estimated discharge. For the winter period, there is no applica-
 619 tion of temporary shift, however, the override is used by emphasizing the observation, perhaps under ice observation, to estimate discharge (similar to Figure-13).
 620
 621
 622
 623

624 Given the difference between the reproduced and reported discharge values in the
 625 operational database, similar to stations 01AF009, in the following, the agreement between the reported discharge in the operational database was evaluated using the inde-
 626 pendent workflow for all the hydrometric stations that have a complete yearly record. [Figure-15a illustrates the overall categories for discharge estimation for stations with complete](#)
 627 [yearly discharge values \(not seasonal\). For example, as expected, this panel shows that the rating curve category is more dominant in regions of the Maritime Provinces and St.](#)
 628 [Lawrence basins during the summer period followed by override categories mostly applied in winter. In contrast, for Saskatchewan and Nelson River, the temporary shift is more](#)
 629 [dominant in winter time together with mixed of temporary shift and override. The estimation of discharge values with independent workflow can be compared with the reported discharge](#)
 630 [in the operational database.](#) Figure-15b depicts this agreement in a fraction of the period in which reconstructed discharge is within 5% of the discharge reported in the op-
 631
 632
 633
 634
 635
 636

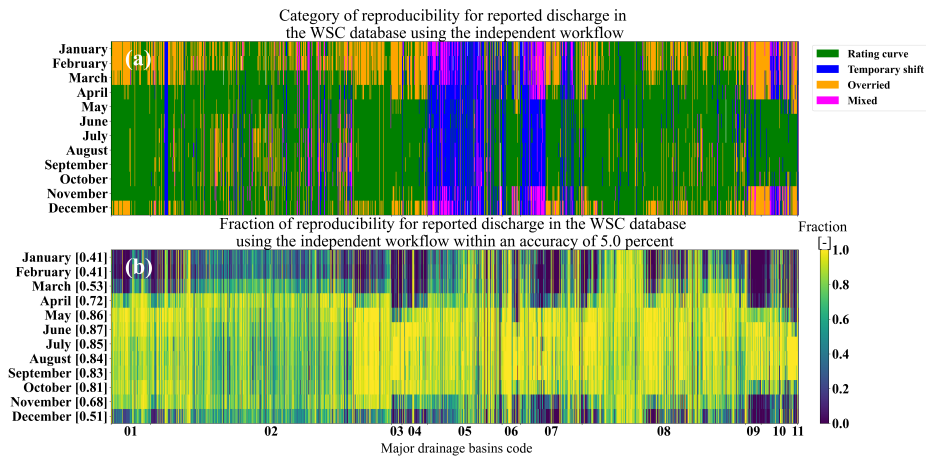


Figure 15: (a) The dominant category of discharge estimation over month of the year; these categories are (1) rating curve in which the discharge estimation fully follows the concept of rating curve, (2) temporary shift, when the discharge estimation conforms with the concept of temporarily shifted rating curve, (3) override when the discharge is altered outside of the concept of [temporarily shifted] rating curve, and (4) mixed categories in which a combination of temporary shift and override are used. (b) The fraction of agreement for estimated discharge values from the proposed workflow described in this study (within 5% of reported discharge values from the WSC operational database). The agreement fraction is not always to its maximum, 1.00, and varies seasonally and geographically. The overall average agreement between the recreated discharge values and what is reported in the operational database is 0.670.69, with winter months having lower agreement than the summer months.

637 erational database. The overall overlap is around 0.670.69. This level of agreement from
 638 the independent workflow can be attributed to discharge estimation from rating curves
 639 and rating curves combined with the temporary shift. On the other hand, the lack of agree-
 640 ment can be heavily attributed to the override values which are more pronounced dur-
 641 ing the winter period. This lack of agreement can be ~~also~~ partly attributed to the types
 642 of data that are not available from the WSC operational database via the API (that is
 643 used for the workflow). Trained and experienced WSC hydrographers can ~~reproduce-repeat~~
 644 discharge values, with great similarities if not identical, using the Aquarius™, documented
 645 comments in the operational database. This is also checked and confirmed during the
 646 approval process. Therefore the ~~reproducibility~~repeatability, in practice, will be much
 647 higher than the ~~general agreement which is stated here.~~ As an example, if the discharge
 648 values under ice are given higher priority and the discharge for the ice cover period is
 649 interpolated using a linear interpolation technique the overall reported agreement from
 650 the workflow to reported discharge values of the operational database increases to 74%
 651 (~~from 67%~~)reproducibility reported based on the independent workflow stated here.

652 3.2.1 Implication for Uncertainty Estimation

653 The ~~procedures and practices at WSC, namely override and temporary shift,~~ will
 654 result in different residual structures than those often expected to represent the structure
 655 of residuals in the literature. Figure-12 to 14, indicate that observational processes of
 656 temporary shift and override affect the residual values that are the foundation of uncertainty
 657 estimation models. In this section, we examine how different discharge estimation methods,
 658 such as the rating curve, temporary shift, and override, alter the stage-discharge measurements

are weighted heavily in discharge estimation. To investigate, the reported discharge values from the WSC operational database, which includes override and shift, in pair with observational discharge are compared with the case of Gaussian distribution with heteroscedastic errors. Figure-?? illustrates this contrast for four stations (01AJ004, 04AB001, 05AA008, and 07AH003). The reported discharge in the operational database matches the measured discharge (very close to the line of perfect agreement) while the structure of the expected residuals, represented as grey points, is far more scattered. This hints at deficiencies of existing models for residual estimation, assuming that the observations are without error, across the Canadian hydrometric stations due to override and temporary shift among other SOPs. relationship and subsequently the residuals.

The comparison between discharge values reported in the WSC operational database at logger resolution and measured discharge during discharge activity in blue dots, for stations (a) 01AJ004; Big Presque Isle Stream at Tracey Mills, New Brunswick, (b) 04AB001; Hayes River Below Gods River, Manitoba, (c) 05AA008; Crowsnest River at Frank, Alberta, and (d) 07AH003; Sakwatamau River Near Whitecourt, Alberta. In contrast, the gray dots are the hypothetical case of the normal distribution with a heteroscedastic standard deviation of 10% of discharge magnitude. The blue line, 1:1, is the best-expected fit for these two series.

A closer examination of the interaction of the stage and reported discharge values to observational points depicts two relationships for each of the stations mentioned in Figure-?. In-16a depicts the discharge time series based on the rating curve for station 01AJ004, Big Presque Isle Stream at Tracey Mills, New Brunswick, for each day of the year alongside the discharge measurements. Figure-?, the right panels indicate the rating curves while the left panels depict the time-series relationship between all reported stage and discharge values from the WSC operational database, which include temporary shifts and overrides, in contrast to observational stage-discharge points. Comparing the right and left panels indicates that the stage-discharge relationships or rating curves may not incorporate stage-discharge observation points while 16b illustrates the stage-discharge relationship compared to the discharge measurement values. Due to the strict adherence to the rating curve, the stage-discharge space, left panels, conform with observational stage-discharge. This highlights to some degree why shifts and overrides need to be applied since the classical curve fitting technique to all available observational stage-discharge points would not reflect the local hydraulic realities at the time of measurement. The observational points have a much more complicated relationship with the rating curves than standard curve fitting practice (is confined to rating curves only. Figures-16c depicts the residuals for each discharge measurement compared to the estimated discharge from the workflow following rating curves only (no temporary shift or override). The grey background points represent a hypothetical case of residuals with a normal distribution with 10% of discharge magnitude heteroscedasticity. Station 01AJ004 is in the region where override is more commonly used for discharge estimation than temporary shift, thus, Figure-?).

The comparison of stage-discharge rating curves (left panels) and observed stage and reported discharge and stage values from the WSC operational database (right panels) contrasting observational stage-discharge points obtained during discharge activities for stations (a,b) 01AJ004; Big Presque Isle Stream at Tracey Mills, New Brunswick, (c,d) 04AB001; Hayes River Below Gods River, Manitoba, (e,f) 05AA008; Crowsnest River at Frank, Alberta, and (g,h) 07AH003; Sakwatamau River Near Whitecourt, Alberta.

High Flows are critical data points in annual maxima time-series analysis. The flood of June 2013 for station 05AA035, Oldman River at Range Road No. 13A, Alberta, is selected to assess both discharge estimation practices and implications for uncertainty analysis. The comparison presented in 16d, e, and f, which are based on discharge estimation using the rating curve and temporary shift, closely resemble Figure-?? indicates that the reported discharge values from the operational database are as high as 1000 cubic meters

per second and conform with 16a, b, and c (indicating no major temporary shift is applied). The same analysis was repeated using the discharge reported by the WSC operation database, which includes override processes. As shown, the override results in lower discharge values during the colder months of the year in Figure-16g compared to Figure-16a and d. This reduction leads to a closer agreement between the reported discharge time series and the discharge measurements. Additionally, Figure-16h indicates that due to the override intervention, the stage-discharge measurement at approximately 10:00 AM local time (residual of zero). Stage values are not continuously measured at 5-minute intervals during the flood period (relationship is no longer restricted to the rating curve. The winter streamflow override corrections minimize the residuals between the discharge measurements and reported values, as seen in Figure-??). This result in the flag "P" partial being applied; there is only a partial stage available for days for 20th, 21th, and 22th June. The estimated/filled discharge values at logger resolution are smoothed, and there is less variation, while for the time when the stage is available, discharge exhibits more variation given the variability in the stage. The stage values are fully missing for 23th June and therefore the entire discharge values for that day are identified with the flag "E" estimated. The override metadata file, extracted from the operational database, reports that the gap filling during this period is performed using meteorological information, comparison with other stations, and linear approximation under the general procedure of *multi-points drift correction* at the regional office (but does not provide quantitative values for this approximation). In general, it should be noted that the sub-daily variability which can be significantly important is lost due to this temporal aggregation, and the instantaneous maximum yearly flow communicated in the HYDAT dataset may not be sufficient to reconstruct sub-daily variability or residuals. The reported daily values for 20th of June 2013 is 655A m³/s which is 345 m³/s lower than the measured discharge in the field and also what the operational database reports. Care should be taken when using daily discharge values for modeling and decision-making, and residual evaluation for uncertainty estimation. 16i, compared to Figures-16c and f.

Given the WSC SOPs on residuals, each discharge estimation category mentioned in Table-1 should have its suitable discharge uncertainty models. For example, when the rating curve is used for discharge estimation, rating curve uncertainty, which has been heavily studied in the literature, can be used (type A from Table-1). However, WSC hydrometric stations do require a more tailored method than what is often suggested in the literature due to temporary shift and override as part of SOPs. When the temporary shift concept is followed, a new method, in which both the rating curve and temporary shift uncertainty are estimated is needed and an uncertainty model to account for temporary shifts needs to be formulated, type B, in addition to rating curve uncertainty, type A. The discharge uncertainty would then be the interaction of the two models (type A+B). This becomes even more challenging when the override is used for discharge estimation; more sophisticated uncertainty estimation techniques may be essential to be developed (type C). Additionally, the fact that the discharge estimation technique may change throughout each season adds to this complexity as well (translation between uncertainty models across time). Furthermore, reproducibility can be seen as the cornerstone of the uncertainty models. For example, to be able to create a model for uncertainty type C, perhaps a discharge estimation model with associated parameters should be formulated during override periods. The discharge estimation model then can be used for perturbation and uncertainty analysis (similar to uncertainty estimation of rating curves, type A) As the next example, we examine station 05CK004, Red Deer River near Bindloss, located in Alberta.

Finally, a simple experiment is designed to generate an ensemble of discharge estimations for evaluating the impact of decisions such as rating curve creations, temporary shift application, and override, on estimated discharge. For this analysis, stations are selected for which changes in rating curves over time cannot be differentiated from observational stage-discharge points. Two stations, 05BA002; Pipestone River Near Lake Louise, Alberta, and 03OA012; Luce Brook Below Tinto Pond, Newfoundland and Labrador are considered for this analysis. The workflow is slightly changed to generate ensemble discharge values: (1) the rating

The comparison between the reported discharge and stage values at logger temporal resolution from the operational database, measured discharge at the flood peak, and HYDAT reported daily discharge and flags for Station 05AA035, Oldman River at Range Road No. 13A, Alberta.

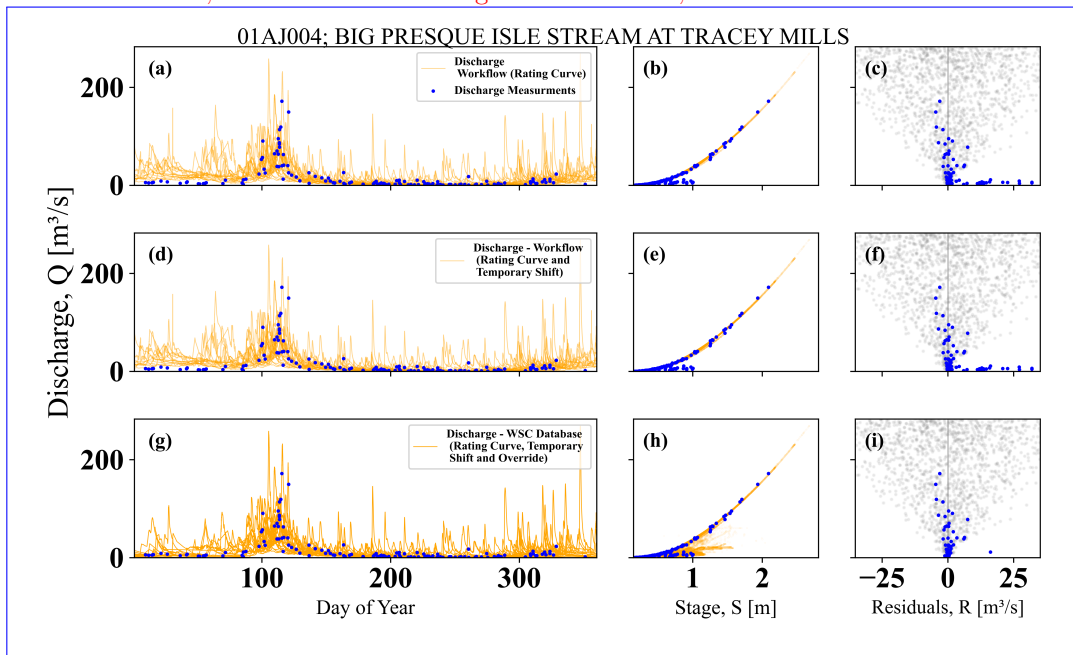


Figure 16: The comparison between discharge values for estimated discharge for each day of the model, stage-discharge relationships, and residuals for three difference cases respectively for station 01AJ004, Big Presque Isle Stream at Tracey Mills, located in the province of New Brunswick; (a, b, c) when the discharge estimation strictly follows the rating curve, (d, e, f) when the discharge estimation follows both rating curve and temporary discharge and (g, h, i) for WSC operational database that includes rating curve, temporary shift, and override. In contrast, the gray dots are the hypothetical case of the normal distribution with a heteroscedastic standard deviation of 10% of discharge magnitude.

767 curves are given equal probability and replace each other in their effective period of applicability
 768 and (2) the discharge estimation is done considering temporary shift and without temporary
 769 shift (or temporary shift set to zero). The ensemble members are then compared to the
 770 reported discharge values by commonly used performance metrics in Earth System modeling
 771 (runoff ratio, E_{RR} , Root Mean Square Error, E_{RMSE} , Nash-Sutcliffe Efficiency, E_{NSE} ,
 772 and Kling-Gupta Efficiency, E_{KGE} (for further explanation refer to Appendix A).-

773 The dark blue area in Figure-??a indicates This station is managed by the Calgary
 774 office, where the temporary shift is more prevalent than the override in discharge estimation
 775 processes. The contrast between Figures-17a and d highlights the impact of lack of temporary
 776 shift while reshuffling the rating curves (the effect of choice of rating curve construction
 777 and lack of rating curve manipulation by temporary shift). The dark red area indicates
 778 the effect of temporary shift on inferred dischargetime series while reshuffling the rating
 779 curves (the effect of choice of rating curve construction and presence of temporary shift).
 780 the temporary shift on estimated discharge, especially during the colder months or under
 781 ice conditions. This use of the temporary shift causes the stage-discharge space depicted
 782 in Figure-??b illustrates these effects for station 03OA012. Due to the absence of shift
 783 values (zero shift), the dark red and blue areas are coinciding and exhibit similar performance
 784 metrics compared to the reported database discharge values (no effect of temporary shift
 785 for this station). The comparison between 17e to extend beyond the rating curve and
 786 pass through the observational points shown as blue dots, indicating a higher emphasis
 787 on discharge measurement values. Similarly, the residuals for low flow or ice conditions
 788 are minimized in Figure-??a and b indicate that the impact of rating curve construction
 789 is more pronounced for station 05BA002 in comparison to station 03OA012 due to the
 790 spread of ensemble members.-

791 The mean performance metrics for the ensembles and also discharge values from
 792 the WSC operational database in comparison to HYDAT values are presented in Table-??.
 793 For the station that temporary shift is not used, 03OA012, the difference between the
 794 shift corrected and not shifted rating curves are identical (as expected). However, the
 795 impact of override, in this case, is much more pronounced, and performance increases
 796 from negative or closer to zero values up to the perfect agreement with HYDAT discharge
 797 values for this station. This drastic change in performance metrics is done by choice of
 798 rating curves and override. In contrast, and for the station where temporary shiftpractice
 799 is applied, such as 05BA002, the inclusion of temporary shift can improve the performance
 800 in the scale of E_{NSE} or E_{KGE} while the impact of the choice of rating curve seems to
 801 be more pronounced than the case for station 03OA012 (based on comparison of 17f compared
 802 to Figure-??a and b)17c. In addition to the temporary shift, override processes further
 803 reduce the residuals, as shown in Figure-17i, in contrast to Figures-17c and f.

804 The mean performance of ensemble members with and without shift and discharge
 805 values reported in WSC operational database in comparison to HYDAT discharge values.
 806 E_{RMSE} E_{KGE} E_{NSE} E_{ERR} E_{RMSE} E_{KGE} E_{NSE} E_{ERR} 4.890 0.535 0.589 1.048 0.548 0.336
 807 -0.702 0.747 2.516 0.672 0.862 0.974 0.548 0.336 -0.702 0.747 0.016 0.999 0.999 0.784 0.002
 808 0.999 0.999 0.642 0.000 1.000 1.000 0.785 0.000 1.000 1.000 0.642-

809 4 Discussion and ConclusionsDiscussions

810 This work presents discharge estimation methods used by the Water Survey of Canada
 811 (WSC) following an independent Python workflow. The study explores the Standard Op-
 812 eration Procedures (SOPs) for creating rating curves, manipulating them over time, and
 813 estimating discharge. The study focuses on two major discharge estimation SOPs, namely
 814 temporary shift, and override. The impact of these SOPs on discharge estimation and
 815 uncertainty evaluation, specifically in terms of residuals, is discussed. By examining the
 816 SOPs and their possible impact on discharge estimation and associated uncertainties,
 817 the study aims to highlight the need for new discharge uncertainty methods.

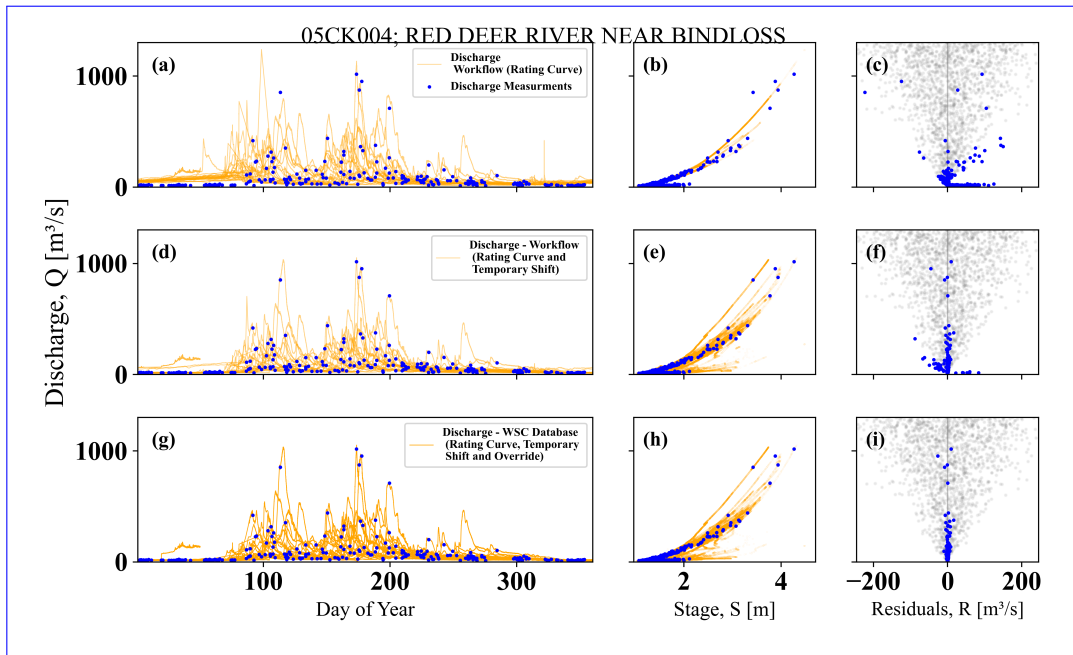


Figure 17: The comparison for the effect of decisions on between discharge estimation without shift value, with shift values, reported Aquarius for estimated discharge value for each day of the model, stage-discharge relationships, and reported HYDAT discharge alongside the flags residuals for three difference cases respectively for station 05CK004, Red Deer River near Bindloss, located in the province of Alberta: (a, b, c) 05BA002; Pipestone River Near Lake Louise when the discharge estimation strictly follows the rating curve, Alberta (d, e, f) when the discharge estimation follows both rating curve and temporary discharge and (bg, h, i) 03OA012; Luce Brook Below Tinto Pond for WSC operational database that includes rating curve, Newfoundland temporary shift, and Labrador override. In contrast, the gray dots are the hypothetical case of the normal distribution with a heteroscedastic standard deviation of 10% of discharge magnitude.

818 The relationship between the rating curves and observational stage-discharge mea-
819 surements is explored. The WSC SOPs differ from more commonly used practices in other
820 parts of the world (McMillan et al., 2010; Coxon et al., 2015), largely due to the hydro-
821 logical regimes and conditions faced by the Survey in Canada. Temporary shifts and over-
822 ride processes, while giving the observational stage-discharge a high weight in discharge
823 estimation, resulting in a more complex relationship between the rating curve and ob-
824 servations than a standard curve fitting exercise (Figure-??16,17). This complexity does
825 not lend itself well to more traditional uncertainty approaches. New methods must be
826 explored to evaluate the rating curve uncertainties over and above the already existing
827 methods that rely on the specific nature of residuals, such as heteroscedastic Gaussian,
828 in literature (e.g. methods suggested by Clarke, 1999; Jalbert et al., 2011; Le Coz et al., 2014; Kiang et al., 2018,
829 (e.g. methods suggested or applied by Clarke, 1999; Jalbert et al., 2011; Le Coz et al., 2014; Kiang et al., 2018, a

830 .
831 Following the available information in the WSC operational database accessible by
832 the API and independent Python workflow the agreement level between the two discharge
833 estimations, from the workflow and operational database, is explored. This agreement
834 is significantly lower during the colder months which in turn indicates the complication
835 of the discharge estimation under ice conditions and their backwater effect. To account
836 for this environmental factor, different regional offices may follow different procedures
837 rather than rating curves. In parts of Canada, the override procedure is used, while the
838 Prairie and Northern regions rely heavily on the temporary shift of rating curves (Figure-
839 10).

840 This study, given the complexity of the production system and updating of rating
841 curve information, encourages the community to consider the provenance of discharge
842 data and evaluate its fitness for its intended use. The discharge values are more than just
843 a true or deterministic value disseminated from the HYDAT dataset. This dataset is often
844 used in large sample hydrology, Gupta et al. (2014), and carried over to the larger datasets
845 without its error and uncertainties being communicated (as an example, Addor et al., 2017; Arsenault et al., 2020
846). These discharge values are then used for scientific purposes, model development, and
847 model inter-comparison alongside recently used machine learning techniques. If uncertainty
848 and errors in discharge are ignored, the use of large sample datasets may result in misleading
849 or strong conclusions. For example, it has been communicated that machine learning can
850 predict the discharge values with 99% percent accuracy or can predict discharge superior
851 to traditionally used mechanistic Earth System models (in literature or blog posts). These
852 comments and conclusions should be taken with care as the hydrographers' decisions in
853 estimating discharge can significantly change a hydrograph (refer to Figure ?? and Table ??).
854 Instead, the efforts should be focused on re-assessing those claims with an ensemble of
855 discharge values. Using an ensemble of discharge time-series alongside an ensemble of
856 forcing variables of precipitation and temperature can provide a much more robust analysis
857 of scientific methods, decisions, and claims for Earth System models (Cornes et al., 2018; Wong et al., 2021; Tang
858)

859 This work provides the basis for future uncertainty analysis of discharge values re-
860 ported by the Water Survey of Canada. For better estimation of discharge values as an
861 outside user and associated uncertainties, however, more information is needed to be added
862 to the WSC operational database and more capabilities are needed to be developed for
863 Aquarius™ system. This information does exist in WSC offices on paper, field notes, and
864 local computer systems but is not fully transferable to the operational database. As an
865 example, during the preparation of this work and from the API system, it was not possi-
866 ble to find out which observational stage-discharge points are used for rating curve crea-
867 tion by hydrographers. Additionally, the information that might help on observational
868 stage-discharge uncertainty was not available through API to the best of the authors'
869 knowledge. The inclusion of rationale behind the magnitude and date of application of
870 temporary shift or override methods can be a great asset for the operational database.
871 This reflects on the concept of *repeatability* and *reproducibility*. A trained hydrographer
872 at the Water Survey of Canada can repeat, based on SOPs, the work and decisions of

873 other colleagues with a high degree of repeatability. As mentioned earlier, this is a routine
874 practice for quality assurance. However, a fully reproducible workflow based on an agreed-upon
875 model is missing, which is essential for the uncertainty analysis of discharge values. This
876 is critical in trend analysis to separate the impact of discharge estimation processes and
877 natural variability over time (refer to Figure-5 and 6 by Hamilton & Moore, 2012). The
878 recommendations transcend the WSC operational procedures and agencies that follow
879 similar approaches to WSC. As an example, The Water Survey of Canada, WSC, and
880 the United State-States Geological Survey, USGS, have a long history of collaboration
881 going back to the beginning of the WSC mandate in 1908. The chief hydrographer for
882 Canada spent his early years training with USGS staff in Montana and since then both
883 organizations have developed shared common practices. Both the USGS and WSC use
884 Aquarius™ as their primary data production platform and the practices of overrides and
885 temporary shifts are used by the two organizations. Additional effort is still needed to
886 better-access-assess the similarities and implications of procedural practices on discharge
887 estimation and uncertainty quantification between the two countries.

888 In a broader perspective, this study, given the complexity of the production system
889 and updating of rating curve information, encourages the community to consider the provenance
890 of discharge data and evaluate its fitness for its intended use (Whitfield, 2012). The discharge
891 values are more than just a true or deterministic value disseminated from the HYDAT
892 dataset by WSC. This dataset is often used in large sample hydrology, Gupta et al. (2014)
893 , and carried over to the larger datasets without its error and uncertainties being communicated
894 (as an example, Addor et al., 2017; Arsenault et al., 2020; Kratzert et al., 2023, do not carry discharge uncertain
895 . These discharge values are then used for scientific purposes, model development, and
896 model inter-comparison alongside recently used machine learning techniques. If uncertainty
897 and errors in discharge are ignored, the use of large sample datasets may result in misleading
898 or strong conclusions. For example, it has been communicated that machine learning can
899 predict the discharge values with 99% percent accuracy or can predict discharge superior
900 to traditionally used mechanistic Earth System models (in literature or blog posts). These
901 comments and conclusions should be taken with care as the hydrographers' decisions in
902 estimating discharge can significantly change a hydrograph (visually shown in Figure-5 and 6 by Hamilton & Mo
903 . Instead, the efforts should be focused on re-assessing those claims with an ensemble
904 of discharge values. Using an ensemble of discharge time series alongside an ensemble
905 of forcing variables of precipitation and temperature can provide a much more robust
906 analysis of scientific methods, decisions, and claims for Earth System models (Cornes et al., 2018; Wong et al., 20

907 ~

908 5 Conclusions

909 We summarize our major ~~finding as follow~~findings as follows:

- 910 • The Water Survey of Canada's standard operating procedures in estimating discharge from stage values, particularly temporary shift, and override are explored and explained by an independent ~~Pythe~~Python workflow.
- 911 • There is no single approach for estimating the rating curve from past observational (stage and discharge) points at the Water Survey of Canada. This is perhaps due to the complex relationship between the stage-discharge relationships accounting for the complexity and diversity of discharge values over the range of environmental conditions for Canadian hydrometric stations. Additionally, given SOPs such as override and temporary shift, relationships between rating curves and observational stage-discharge points are more complex than just a curve-fitting exercise.
- 912 • Given the knowledge of discharge estimation processes, the reported discharge values in Aquarius can be reproduced for a fraction of ~~0.67~~0.69 (within 5% accuracy). The other ~~0.33~~0.31 non-reproducible fraction can be heavily attributed to the override.

- 925 • The standard operating procedures, or SOPs, of temporary shift and override re-
926 sult in the residuals being suppressed to minimal values. These will not follow the
927 often assumed statistical distributions for residuals or fundamental basis for rat-
928 ing curve uncertainty estimation methods. Additional uncertainty models for rat-
929 ing curves that do not have structured residuals in comparison to stage and dis-
930 charge measurements, temporary shift, and override techniques should be constructed
931 and evaluated for Canadian hydrometric stations (uncertainty models of type A,
932 B, and C from Tabel-1).
- 933 • ~~Additionally, the impact of SOPs on discharge estimation for often used performance~~
934 ~~metrics in Earth System modeling, refer to Appendix A, is significant. Hence scientific~~
935 ~~and decision-making choices based on those metrics for reported discharge should~~
936 ~~be evaluated with care.~~

937 Finally, we encourage knowledge mobilization and further collaboration between
938 the Water Survey of Canada, WSC, the private sector, and universities and research in-
939 stitutes, similar to this work, which will open opportunities for the evaluation of orga-
940 nizational processes and constant improvement and stimulate the need for science im-
941 provement.

942 Acknowledgments

943 The authors would like to thank Xu Yan, Muluken Yeheyis, François Rainville, and André
944 Bouchard from WSC ECCC for their generous and valuable help during the preparation
945 of this work. This work was made possible through funding from Environment and Climate
946 Change Canada titled "Pilot study on stage-discharge uncertainty evaluation" by contract
947 number GCXE21M013. Shervan Gharari, Martyn P. Clark, Jim Freer, Hongli Liu, and
948 Paul H. Whitfield were partly or fully funded by Global Water Futures (GWF) during
949 the preparation of this work.

950 Code and data availability

951 Data is in the possession of the Water Survey of Canada, WSC, and any access should
952 be arranged by the WSC. Based Codes can be shared accordingly based on the arrange-
953 ment and agreement with WSC; ~~codes can be shared accordingly.~~

954 Author contribution

955 SG: Manuscript, coding for data extraction ~~and processing and~~, processing, figure
956 preparation, and conceptualization. PHW: Significant help in writing the manuscript,
957 improvement of figures, and conceptualization. AP: Significant contribution to the manuscript,
958 conceptualization. JF: Initial idea of exploring Canadian hydrometric stations, concep-
959 tualization, data ~~and code~~ review, and team management. HL: Contribution to the manuscript
960 and figures and code review. MPC: Contribution to the manuscript and team manage-
961 ment.

962 Competing interests

963 ~~The authors declare that they have no conflict of interest.~~ At least one of the (co-)authors
964 is a member of the editorial board of Hydrology and Earth System Sciences.

965 Appendix A Description of Performance Metrics

966
967
968

The performance metrics used in this study to evaluate the difference between reconstructed discharge values using the proposed standalone Python workflow in this study and reported discharge values in the WSC operational database are:-

969
970

1. Runoff ratio, E_{RR} , is calculated based on the amount of precipitation that falls over the period of interest:-

$$E_{RR} = \frac{V_Q}{V_P}$$

971
972
973
974
975
976
977

in which V_Q and V_P are the volume of the discharge for the station of interest and precipitation for the upstream area of the station of interest in cubic meters m^3 . The precipitation volume is based on the ERA5 dataset (Hersbach et al., 2020) and the upstream area is based on the basin shapefile provided by WSC for active hydrometric stations. The remapping of the precipitation to the basin is done using the EARYMORE python package (Gharari & Knoben, 2021).-

2. Nash-Sutcliffe Efficiency, E_{NSE} is calculated based on:-

$$E_{NSE} = 1 - \frac{\sum_{t=1}^N (Q_{d,t} - Q_{w,i})}{\sum_{t=1}^N Q_{d,t} - \bar{Q}_d}$$

978

3. Root mean square error, E_{RMSE} , is calculated based on:-

$$E_{RMSE} = \sqrt{\frac{\sum_{t=1}^N (Q_{d,t} - Q_{w,t})^2}{N}}$$

979
980
981
982
983

in which the subscript d represents the discharge from the WSC operational database and the subscript w represents the discharge that is reconstructed based on the proposed workflow in this study.-

4. Kling-Gupta Efficiency, E_{KGE} is calculated based on:-

$$E_{KGE} = 1 - \sqrt{O_1 + O_2 + O_3}$$

983

in which the components are:-

$$O_1 = (1 - \beta)^2$$

$$O_2 = (1 - \alpha)^2$$

$$O_3 = (1 - r)^2$$

984
985
986
987

where β is the ratio of the mean values ($\beta = \mu_w / \mu_d$), α is the ratio of standard deviation values ($\alpha = \sigma_w / \sigma_d$), and r is the cross-correlation coefficient value of discharge from WSC operational database to reconstructed discharge from the workflow respectively.

988

References

989
990
991

Addor, N., Newman, A. J., Mizukami, N., & Clark, M. P. (2017, October). The CAMELS data set: catchment attributes and meteorology for large-sample studies. *Hydrology and Earth System Sciences*, 21(10), 5293–5313. Retrieved

Table A1: General terms and their descriptions

Term	Description
Active stations	The stations that are currently in operation and collect data (in contrast to discontinued stations).
API or application programming interface	The system which allows reading and interrogation of the operational database, outside of Aquarius™, using requests and responses from the server where the operational database is located.
Aquarius™	The system that facilitates the interactions with operational databases such as collection and archiving of data for hydrometric stations and associated workflows and standard operating procedures, SOPs, for discharge estimation. Aquarius™ is developed and maintained by Aquatic Informatics.
Discharge measurement or [field] discharge activity	Refers to an activity in which hydrographers measure discharge and its associated stage.
Environment and Climate Change Canada (ECCC)	Environment and Climate Change Canada is the department of the Government of Canada responsible for coordinating environmental policies and programs
Field visits or inspections	Any type of field activity that involves a visit to the station by operators or hydrographers. This may include reporting the current technical parameters such as equipment, batteries, and power, or observation of the condition of the river section such as the presence of ice, backwater, etc (while excluding stage-discharge measurements).
Flags	Flags (SYM or symbol in HYDAT dataset, grade code in operational database) that define the condition of inferred reported discharge. The flags are E - Estimate, A - Partial Day, B - Backwater conditions including ice condition, D - Dry, and R - Revised
HYDAT	Publicly available dataset that includes historical daily discharge values for Canadian hydrometric stations.
Linear Table	Linear relationship is assumed between the two consecutive rating curve points
Logarithmic Table	Logarithmic relationship is assumed between the consecutive curve points that follow formulation in the form of $Q_t = a(H_t - O)^b$ in which O is the offset (similar to intercept) and is archived in the operational database while a , b must be inferred based on the provided starting and ending points of the logarithmic rating curve segment. H_t is the measured stage and Q_t is the estimated discharge for time t
Major drainage basins	Major drainage basins are described by a code from 01 to 11; these basins are (01) Maritime Provinces, (02) St. Lawrence, (03) Northern Quebec and Labrador, (04) Southwestern Hudson Bay, (05) Nelson River, (06) Western and Northern Hudson Bay, (07) Great Slave Lake, (08) Pacific, (09) Yukon River, (10) Arctic, and (11) Mississippi River.
Observational or gauging points	Stage and discharge pair of values that are collected/measured during discharge measurement activity and are used for rating curve creation or temporary shift and override estimation.
Offset	Offset identifies the logarithmic function between the two consecutive rating points and accompanies the rating points information in the operational database. The two consecutive rating points and offset are needed to calculate a and b parameters for logarithmic tables.
Operational or production database	The database that includes the time series of various variables and their metadata.
Override	Override is a process of correcting the discharge values. Override will result in discharge values being different from what is calculated using stage values, rating curves, and temporary shift values.
Rating curve	Rating curve is a function that relates an observed stage expressed in the unit of meters [or length] to discharge in volume per time such as cubic meter per second [or volume per time]. A rating curve and its rating curve points are decided by hydrographers based on various factors and past discharge measurement activities (refer to Figure-2).
Rating curve points	Rating curve points are the points that define the rating curve functions. The function between the rating points is defined in two ways based on rating curve types.
Rating curve shift	Rating curve shifts are temporary or permanent shifts of entire or parts of the rating curve to accommodate the systematic changes of observational or gauging points over time
Rating curve tables or types	The type of functions between the rating curve points. Water Survey of Canada uses either linear or logarithmic tables to define the form of function between consecutive rating curve points
Rating curve temporary shift	Rating curve temporary shifts are the time-dependent values in units of length such as meters that the rating curve is shifted for (hence an identical stage value and rating curve result in different discharge given different shift values). Temporary shift values are assigned on a specified date. The temporary shift is then assumed to linearly change between the temporary shift values at two consecutive dates of temporary shift application.
Regions	The Water Survey of Canada is divided into five regions (1) Pacific and Yukon Region (British Columbia and Yukon), (2) Prairie and Northern Region (Alberta, Manitoba, Saskatchewan, Northwest Territories, and Nunavut) (3) Ontario Region, (4) Québec Region, (5) Atlantic Region (New Brunswick, Newfoundland, and Labrador Nova Scotia, and Prince Edward Island).
River discharge or streamflow [$\text{m}^3 \text{s}^{-1}$]	The flow of water at a cross-section of a river. Normally reported in cubic meters per second which is the product of a velocity [m s^{-1}] and a cross-sectional area [m^2].
Stage [meters]	Stage is the measured water level height of the free surface of a river. Stage values are reported at the given time based on the frequency such as daily, hourly, or quarter-hourly, etc.
Standard operating procedures or SOPs	The agreed-upon procedures followed at WSC for discharge estimation and other operations.
Station ID	The Station ID is encoded based on the major drainage basins in which it is located (01 to 11) and the basins and sub-basins (e.g. AA - AZ approximately from head to mouth) and a sequential number (001 - 999) resulting in a Station ID such as 01AA001.
Water Survey of Canada (WSC)	The Water Survey of Canada, part of ECCC, is responsible for maintaining hydrometric stations across Canada and reporting the discharge values for each hydrometric station.
WSC [regional] offices	Offices of the Water Survey of Canada, also known as regional offices, are responsible for nearby stations and house hydrographers and equipment.

- 992 2022-09-18, from <https://hess.copernicus.org/articles/21/5293/2017/>
993 doi: 10.5194/hess-21-5293-2017
- 994 Arsenault, R., Brissette, F., Martel, J.-L., Troin, M., Lévesque, G., Davidson-
995 Chaput, J., ... Poulin, A. (2020, July). A comprehensive, multisource
996 database for hydrometeorological modeling of 14,425 North American
997 watersheds. *Scientific Data*, 7(1), 243. Retrieved 2022-09-18, from
998 <https://www.nature.com/articles/s41597-020-00583-2> doi: 10.1038/
999 s41597-020-00583-2
- 1000 Clarke, R. T. (1999, September). Uncertainty in the estimation of mean annual
1001 flood due to rating-curve indefinición. *Journal of Hydrology*, 222(1), 185–
1002 190. Retrieved 2023-01-27, from [https://www.sciencedirect.com/science/
1003 article/pii/S0022169499000979](https://www.sciencedirect.com/science/article/pii/S0022169499000979) doi: 10.1016/S0022-1694(99)00097-9
- 1004 Cohn, T. A., Kiang, J. E., & Mason, R. R. (2013, May). Estimating discharge
1005 measurement uncertainty using the interpolated variance estimator. *Jour-
1006 nal of Hydraulic Engineering*, 139(5), 502–510. Retrieved 2022-03-22, from
1007 <http://ascelibrary.org/doi/10.1061/%28ASCE%29HY.1943-7900.0000695>
1008 doi: 10.1061/(ASCE)HY.1943-7900.0000695
- 1009 Cornes, R. C., van der Schrier, G., van den Besselaar, E. J. M., & Jones, P. D.
1010 (2018, September). An Ensemble Version of the E-OBS Temperature and Pre-
1011 cipitation Data Sets. *Journal of Geophysical Research: Atmospheres*, 123(17),
1012 9391–9409. Retrieved 2022-09-19, from [http://doi.wiley.com/10.1029/
1013 2017JD028200](http://doi.wiley.com/10.1029/2017JD028200) doi: 10.1029/2017JD028200
- 1014 Coxon, G., Freer, J., Westerberg, I. K., Wagener, T., Woods, R., & Smith, P. J.
1015 (2015, July). A novel framework for discharge uncertainty quantification ap-
1016 plied to 500 UK gauging
1017 stations. *Water Resources Research*, 51(7), 5531–5546. Retrieved 2022-03-22,
1018 from <https://onlinelibrary.wiley.com/doi/abs/10.1002/2014WR016532>
1019 doi: 10.1002/2014WR016532
- 1020 de Rham, L., Dibike, Y., Beltaos, S., Peters, D., Bonsal, B., & Prowse, T. (2020,
1021 August). A Canadian River Ice Database from the National Hydrometric
1022 Program Archives. *Earth System Science Data*, 12(3), 1835–1860. Retrieved
1023 2024-05-09, from [https://essd.copernicus.org/articles/12/1835/2020/
1024 doi: 10.5194/essd-12-1835-2020](https://essd.copernicus.org/articles/12/1835/2020/)
- 1025 Gharari, S., & Knoben, W. (2021, April). *ShervanGharari/EASYMORE*. Zen-
1026 odo. Retrieved 2022-03-05, from <https://zenodo.org/record/4702613> doi:
1027 10.5281/ZENODO.4702613
- 1028 Gharari, S., & Razavi, S. (2018, November). A review and synthesis of hysteresis in
1029 hydrology and hydrological modeling: Memory, path-dependency, or missing
1030 physics? *Journal of Hydrology*, 566, 500–519. Retrieved 2020-04-09, from
1031 <http://www.sciencedirect.com/science/article/pii/S0022169418304591>
1032 doi: 10.1016/j.jhydrol.2018.06.037
- 1033 Gupta, H. V., Perrin, C., Blöschl, G., Montanari, A., Kumar, R., Clark, M., &
1034 Andréassian, V. (2014). Large-sample hydrology: a need to balance depth with
1035 breadth. *Hydrology and Earth System Sciences*, 18(2), p463.
- 1036 Halliday, R. (2008). *Water Survey of Canada - a history* (Tech. Rep. No. En37-
1037 436/2008E-PDF). Retrieved 2023-01-15, from [https://publications.gc.ca/
1038 site/eng/9.898745/publication.html](https://publications.gc.ca/site/eng/9.898745/publication.html)
- 1039 Hamilton, A. S., & Moore, R. D. (2012). Quantifying uncertainty in stream-
1040 flow records. *Canadian Water Resources Journal - Revue canadienne des
1041 ressources hydriques*, 37(1), 3-21. Retrieved from [https://doi.org/10.4296/
1042 cwrj3701865](https://doi.org/10.4296/cwrj3701865) doi: 10.4296/cwrj3701865
- 1043 Hersbach, H., Bell, B., Berrisford, P., Hirahara, S., Horányi, A., Muñoz-Sabater, J.,
1044 ... Thépaut, J. (2020, July). The ERA5 global reanalysis. *Quarterly Journal
1045 of the Royal Meteorological Society*, 146(730), 1999–2049. Retrieved 2022-11-
1046 22, from <https://onlinelibrary.wiley.com/doi/10.1002/qj.3803> doi:

- 1047 10.1002/qj.3803
- 1048 Huang, H. (2018, December). A unified theory of measurement errors and uncertain-
- 1049 ties. *Measurement Science and Technology*, 29(12), 125003. Retrieved 2022-
- 1050 03-22, from [https://iopscience.iop.org/article/10.1088/1361-6501/](https://iopscience.iop.org/article/10.1088/1361-6501/aae50f)
- 1051 [aae50f](https://iopscience.iop.org/article/10.1088/1361-6501/aae50f) doi: 10.1088/1361-6501/aae50f
- 1052 Jalbert, J., Mathevet, T., & Favre, A.-C. (2011, January). Temporal uncertainty
- 1053 estimation of discharges from rating curves using a variographic analysis.
- 1054 *Journal of Hydrology*, 397(1), 83–92. Retrieved 2023-01-05, from [https://](https://www.sciencedirect.com/science/article/pii/S0022169410007274)
- 1055 www.sciencedirect.com/science/article/pii/S0022169410007274 doi:
- 1056 10.1016/j.jhydrol.2010.11.031
- 1057 Kiang, J. E., Gazoorian, C., McMillan, H., Coxon, G., Le Coz, J., Westerberg, I. K.,
- 1058 ... Mason, R. (2018, October). A Comparison of Methods for Streamflow Un-
- 1059 certainty Estimation. *Water Resources Research*, 54(10), 7149–7176. Retrieved
- 1060 2022-03-22, from [https://onlinelibrary.wiley.com/doi/abs/10.1029/](https://onlinelibrary.wiley.com/doi/abs/10.1029/2018WR022708)
- 1061 [2018WR022708](https://onlinelibrary.wiley.com/doi/abs/10.1029/2018WR022708) doi: 10.1029/2018WR022708
- 1062 Kimmett, D. R. (2022). *history of the Water Survey of Canada*. Canadian Water
- 1063 Resource Association.
- 1064 Kratzert, F., Nearing, G., Addor, N., Erickson, T., Gauch, M., Gilon, O., ...
- 1065 Matias, Y. (2023, January). Caravan - A global community dataset for
- 1066 large-sample hydrology. *Scientific Data*, 10(1), 61. Retrieved 2024-05-
- 1067 29, from <https://www.nature.com/articles/s41597-023-01975-w> doi:
- 1068 10.1038/s41597-023-01975-w
- 1069 Le Coz, J., Renard, B., Bonnifait, L., Branger, F., & Le Boursicaud, R. (2014).
- 1070 Combining hydraulic knowledge and uncertain gaugings in the estimation
- 1071 of hydrometric rating curves: A bayesian approach. *Journal of Hydrol-*
- 1072 *ogy*, 509, 573-587. Retrieved from [https://www.sciencedirect.com/](https://www.sciencedirect.com/science/article/pii/S0022169413008329)
- 1073 [science/article/pii/S0022169413008329](https://www.sciencedirect.com/science/article/pii/S0022169413008329) doi: [https://doi.org/10.1016/](https://doi.org/10.1016/j.jhydrol.2013.11.016)
- 1074 [j.jhydrol.2013.11.016](https://doi.org/10.1016/j.jhydrol.2013.11.016)
- 1075 Lloyd, C. E. M., Freer, J. E., Johnes, P. J., & Collins, A. L. (2016, February).
- 1076 Using hysteresis analysis of high-resolution water quality monitoring data,
- 1077 including uncertainty, to infer controls on nutrient and sediment transfer in
- 1078 catchments. *Science of The Total Environment*, 543, 388–404. Retrieved
- 1079 2022-03-22, from [https://www.sciencedirect.com/science/article/pii/](https://www.sciencedirect.com/science/article/pii/S0048969715310093)
- 1080 [S0048969715310093](https://www.sciencedirect.com/science/article/pii/S0048969715310093) doi: 10.1016/j.scitotenv.2015.11.028
- 1081 Mansanarez, V., Renard, B., Coz, J. L., Lang, M., & Darienzo, M. (2019). Shift
- 1082 Happens! Adjusting Stage-Discharge Rating Curves to Morphological Changes
- 1083 at Known Times. *Water Resources Research*, 55(4), 2876–2899. Retrieved
- 1084 2020-10-09, from [https://agupubs.onlinelibrary.wiley.com/doi/abs/](https://agupubs.onlinelibrary.wiley.com/doi/abs/10.1029/2018WR023389)
- 1085 [10.1029/2018WR023389](https://agupubs.onlinelibrary.wiley.com/doi/abs/10.1029/2018WR023389) doi: 10.1029/2018WR023389
- 1086 McMillan, H., Freer, J., Pappenberger, F., Krueger, T., & Clark, M. (2010). Im-
- 1087 pacts of uncertain river flow data on rainfall-runoff model calibration and
- 1088 discharge predictions. *Hydrological Processes*, 24(10), 1270-1284. Retrieved
- 1089 from <https://onlinelibrary.wiley.com/doi/abs/10.1002/hyp.7587> doi:
- 1090 <https://doi.org/10.1002/hyp.7587>
- 1091 McMillan, H., Seibert, J., Petersen-Overleir, A., Lang, M., White, P., Snelder, T.,
- 1092 ... Kiang, J. (2017). How uncertainty analysis of streamflow data can
- 1093 reduce costs and promote robust decisions in water management applica-
- 1094 tions. *Water Resources Research*, 53(7), 5220-5228. Retrieved from [https://](https://agupubs.onlinelibrary.wiley.com/doi/abs/10.1002/2016WR020328)
- 1095 agupubs.onlinelibrary.wiley.com/doi/abs/10.1002/2016WR020328 doi:
- 1096 <https://doi.org/10.1002/2016WR020328>
- 1097 Pelletier, P. M. (1989, August). Uncertainties in streamflow measurement un-
- 1098 der winter ice conditions a case study: The Red River at Emerson, Mani-
- 1099 toba, Canada. *Water Resources Research*, 25(8), 1857–1867. Retrieved
- 1100 2022-12-12, from <http://doi.wiley.com/10.1029/WR025i008p01857> doi:
- 1101 [10.1029/WR025i008p01857](http://doi.wiley.com/10.1029/WR025i008p01857)

- 1102 Rainville, F., Hutchinson, D., Stead, A., Moncur, D., & Elliott, D. (2002, July).
 1103 *Hydrometric manual - data computations : stage-discharge model development*
 1104 *and maintenance*. Retrieved 2022-09-14, from [https://publications.gc.ca/](https://publications.gc.ca/site/eng/9.898971/publication.html)
 1105 [site/eng/9.898971/publication.html](https://publications.gc.ca/site/eng/9.898971/publication.html)
- 1106 Rantz, S. E. (1982). *Measurement and computation of streamflow* (USGS Numbered
 1107 Series No. 2175). U.S. G.P.O. Retrieved 2022-03-25, from [http://pubs.er](http://pubs.er.usgs.gov/publication/wsp2175)
 1108 [.usgs.gov/publication/wsp2175](http://pubs.er.usgs.gov/publication/wsp2175)
- 1109 Reitan, T., & Petersen-Øverleir, A. (2011, February). Dynamic rating curve
 1110 assessment in unstable rivers using Ornstein-Uhlenbeck processes: DY-
 1111 NAMIC RATING CURVES. *Water Resources Research*, 47(2). Retrieved
 1112 2022-03-22, from <http://doi.wiley.com/10.1029/2010WR009504> doi:
 1113 10.1029/2010WR009504
- 1114 Shafiei, M., Rahmani, M., Gharari, S., Davary, K., Abolhassani, L., Teimouri,
 1115 M. S., & Ghahresifard, M. (2022). Sustainability assessment of water man-
 1116 agement at river basin level: Concept, methodology and application. *Jour-*
 1117 *nal of Environmental Management*, 316, 115201. Retrieved from [https://](https://www.sciencedirect.com/science/article/pii/S0301479722007745)
 1118 www.sciencedirect.com/science/article/pii/S0301479722007745 doi:
 1119 <https://doi.org/10.1016/j.jenvman.2022.115201>
- 1120 Smith, D. G. (1979, April). Effects of channel enlargement by river ice processes
 1121 on bankfull discharge in Alberta, Canada. *Water Resources Research*, 15(2),
 1122 469–475. Retrieved 2024-05-08, from [https://agupubs.onlinelibrary.wiley](https://agupubs.onlinelibrary.wiley.com/doi/10.1029/WR015i002p00469)
 1123 [.com/doi/10.1029/WR015i002p00469](https://agupubs.onlinelibrary.wiley.com/doi/10.1029/WR015i002p00469) doi: 10.1029/WR015i002p00469
- 1124 Tang, G., Clark, M. P., & Papalexiou, S. M. (2022, April). EM-Earth: The Ense-
 1125 mble Meteorological Dataset for Planet Earth. *Bulletin of the American Meteo-*
 1126 *rological Society*, 103(4), E996–E1018. Retrieved 2022-07-26, from [https://](https://journals.ametsoc.org/view/journals/bams/103/4/BAMS-D-21-0106.1.xml)
 1127 journals.ametsoc.org/view/journals/bams/103/4/BAMS-D-21-0106.1.xml
 1128 doi: 10.1175/BAMS-D-21-0106.1
- 1129 Tawfik, M., Ibrahim, A., & Fahmy, H. (1997, July). Hysteresis sensitive neural net-
 1130 work for modeling rating curves. *Journal of Computing in Civil Engineering*,
 1131 11(3), 206–211. Retrieved 2022-03-22, from [http://ascelibrary.org/doi/](http://ascelibrary.org/doi/10.1061/(ASCE)0887-3801(1997)11:3(206))
 1132 [10.1061/\(ASCE\)0887-3801\(1997\)11:3\(206\)](http://ascelibrary.org/doi/10.1061/(ASCE)0887-3801(1997)11:3(206)) doi: 10.1061/
 1133 (ASCE)0887-3801(1997)11:3(206)
- 1134 Whalley, N., Iredale, R. S., & Clare, A. F. (2001, January). Reliability and
 1135 uncertainty in flow measurement techniques - some current thinking.
 1136 *Physics and Chemistry of the Earth, Part C: Solar, Terrestrial & Plan-*
 1137 *etary Science*, 26(10), 743–749. Retrieved 2022-03-22, from [https://](https://www.sciencedirect.com/science/article/pii/S1464191701950196)
 1138 www.sciencedirect.com/science/article/pii/S1464191701950196 doi:
 1139 10.1016/S1464-1917(01)95019-6
- 1140 Whitfield, P. H. (2012, January). Why the Provenance of Data Matters: Assess-
 1141 ing Fitness for Purpose for Environmental Data. *Canadian Water Resources*
 1142 *Journal / Revue canadienne des ressources hydriques*, 37(1), 23–36. Re-
 1143 trieved 2022-12-12, from [https://www.tandfonline.com/doi/full/10.4296/](https://www.tandfonline.com/doi/full/10.4296/cwrj3701866)
 1144 [cwrj3701866](https://www.tandfonline.com/doi/full/10.4296/cwrj3701866) doi: 10.4296/cwrj3701866
- 1145 Whitfield, P. H., & Pomeroy, J. W. (2017, October). Assessing the quality of the
 1146 streamflow record for a long-term reference hydrometric station: Bow River at
 1147 Banff. *Canadian Water Resources Journal / Revue canadienne des ressources*
 1148 *hydriques*, 42(4), 391–415. Retrieved 2022-03-25, from [https://doi.org/](https://doi.org/10.1080/07011784.2017.1399086)
 1149 [10.1080/07011784.2017.1399086](https://doi.org/10.1080/07011784.2017.1399086) doi: 10.1080/07011784.2017.1399086
- 1150 Wolfs, V., & Willems, P. (2014, May). Development of discharge-stage curves
 1151 affected by hysteresis using time varying models, model trees and neural
 1152 networks. *Environmental Modelling & Software*, 55, 107–119. Retrieved
 1153 2022-03-22, from [https://www.sciencedirect.com/science/article/pii/](https://www.sciencedirect.com/science/article/pii/S1364815214000310)
 1154 [S1364815214000310](https://www.sciencedirect.com/science/article/pii/S1364815214000310) doi: 10.1016/j.envsoft.2014.01.021
- 1155 Wong, J. S., Zhang, X., Gharari, S., Shrestha, R. R., Wheeler, H. S., & Famigli-
 1156 etti, J. S. (2021, June). Assessing Water Balance Closure Using Multi-

1157 ple Data Assimilation- and Remote Sensing-Based Datasets for Canada.
1158 *Journal of Hydrometeorology*, 22(6), 1569–1589. Retrieved 2021-09-
1159 22, from [https://journals.ametsoc.org/view/journals/hydr/aop/
1160 JHM-D-20-0131.1/JHM-D-20-0131.1.xml](https://journals.ametsoc.org/view/journals/hydr/aop/JHM-D-20-0131.1/JHM-D-20-0131.1.xml) doi: 10.1175/JHM-D-20-0131.1