

5 **Multi-variable parameter estimation for a global hydrological model: Comparison and evaluation of three ensemble-based calibration methods for the Mississippi River basin**
Leveraging multi-variable observations to reduce and quantify the output uncertainty of a global hydrological model: Evaluation of three ensemble-based approaches for the Mississippi River basin

Formatiert: MS title, Abstand Vor: 0 Pt., Nach: 0 Pt.

Formatiert: Schriftart: 17 Pt.

Formatiert: Englisch (USA)

10 Petra Döll^{1,2}, H.M. Mehedi Hasan³, Kerstin Schulze⁴, Helena Gerdener⁴, Lara Börger⁴, Somayeh Shadkam¹, Sebastian Ackermann¹, Seyed-Mohammad Hosseini-Moghari¹, Hannes Müller Schmied^{1,2}, Andreas Güntner^{3,5}, Jürgen Kusche⁴

¹Institute of Physical Geography, Goethe University Frankfurt, Frankfurt am Main, Germany

²Senckenberg Leibniz Biodiversity and Climate Research Centre Frankfurt (SBIK-F), Frankfurt am Main, Germany

³Helmholtz Centre Potsdam GFZ German Research Centre for Geosciences, Potsdam, Germany

15 ⁴Institute of Geodesy and Geoinformation, University of Bonn, Bonn, Germany

⁵Institute of Environmental Science and Geography, University of Potsdam, Potsdam, Germany

Correspondence to: Petra Döll (p.doell@em.uni-frankfurt.de)

20 **Abstract.** Global hydrological models enhance our understanding of the Earth system and support the sustainable management of water, food and energy in a globalized world. They integrate process knowledge with a multitude of model input data (e.g., precipitation, ~~land cover~~ and soil properties and location and extent of surface water bodies) ~~to that~~ describe the state of the Earth. However, they do not fully utilize observations of model output variables (e.g., streamflow and water storage) to ~~decrease~~ **reduce and quantify** model output uncertainty ~~through processes like by, e.g.,~~ parameter estimation. For the pilot region, ~~the~~ Mississippi River basin, we assessed the suitability of three ensemble-based multi-variable calibration approaches: [Pareto-optimal calibration \(POC\)](#), [the ensemble Kalman filter calibration and data assimilation \(EnCDA\)](#), and [the Generalized Likelihood Uncertainty Estimation \(GLUE\)](#). ~~This assessment aimed to identify for identifying~~ both optimal and behavioral parameter sets for the global hydrological model WaterGAP, utilizing observations of streamflow (Q) and ~~total-terrestrial~~ water storage anomaly (TWSA). The common first steps in all approaches are 1) the definition of spatial units for which calibration parameters are uniformly adjusted (CDA units), combined with the selection of observation data, 2) the identification of potential calibration parameters and their a-priori probability distributions and 3) sensitivity analyses to select the most influential model parameters per CDA unit that will be adjusted by calibration. In the estimation of model output uncertainty, we considered the uncertainties of the Q and TWSA observations. ~~We~~ found that the ~~Pareto-optimal calibration (POC)~~ **POC** approach, which utilizes the Borg multi-objective evolutionary search algorithm to find Pareto-optimal parameter sets, is best suited for identifying a single “optimal” parameter set for each CDA unit. This parameter set leads to an improved fit to the monthly time series

25
30
35

of both Q and TWSA as compared to the standard WaterGAP variant, which is only calibrated against mean annual Q, and can be used to compute the best estimate of WaterGAP output. ~~While the Generalized Likelihood Uncertainty Estimation (GLUE) approach is less suitable than POC to identify in enhancing WaterGAP performance, in identifying the optimal parameter set it also allows, but additionally enables, with a comparable computational effort,~~ the estimation of model output uncertainties that are due to the equifinality of parameter sets ~~and given the observation uncertainties.~~ Our experiment reveals that the ~~The potential advantages of the~~The ensemble Kalman filter calibration and data assimilation (EnCDA) approach, in which both parameter sets and water storages are updated, ~~is presently unsuitable for calibrating global hydrological models is currently not suitable for global hydrological modeling, as its potential advantages remain unrealized could not be realized,~~ likely due to ~~the its~~ high computational burden ~~of this approach that severely limited the ensemble size.~~ This limited the EnCDA ensemble size to 32, while 20,000 ensemble members could be evaluated in the case of POC and GLUE. Partitioning the whole Mississippi River basin into five CDA units (sub-basins) instead of only one improved model performance during the calibration and validation periods. ~~Very diverse parameter sets achieved comparable fits to observations, narrowing the range for at least three parameters. Diverse parameter sets were found to lead to similarly good fits to observations, but at least the range of values of three parameters could be narrowed by calibration. Low coverage of observation uncertainty bands by GLUE-derived model output bands is attributed to model structure uncertainties, especially regarding in man-made reservoir operations, the location and extent of small wetlands, and the (lack of) representation of losing river conditions in WaterGAP. These uncertainties are also likely responsible for significant trade-offs between optimal fits to Q and TWSA. Model structure uncertainties, in particular regarding the operation of man-made reservoirs, the location and extent of small wetlands, and the (lacking) representation of losing river conditions in WaterGAP, are suspected to be the main reasons for the low coverage of the observation uncertainty bands by the GLUE-derived model output uncertainty bands. Model structure uncertainties are also the likely reason for major trade-offs between optimal fit to Q and TWSA. Calibration against GRACE-TWSA only, in regions without Q observations, may worsen the Q simulation as compared to the uncalibrated model variant. We plan recommend that modelers improve the realism of their GHM output by calibrating the GHM against observations of multiple output variables, including at least Q and TWSA. to add additional remotely sensed observations in the multi-variable calibration of WaterGAP and suggest considering parameter uncertainty in multi-model ensemble studies of the global freshwater system.~~

1 Introduction

By quantifying water flows and storages on the Earth's continents, global hydrological models (GHMs) contribute to our understanding of the functioning of the Earth system. GHMs ~~(including land surface models)~~ are indispensable for assessing past and future impacts of human activities on the global freshwater system in the Anthropocene, including water abstractions, dam construction and greenhouse gas emissions. In our globalized world, where local decisions affect freshwater systems worldwide, GHMs support sustainable water use by enabling the globally consistent computation of indicators of water availability and water stress. ~~These indicators~~

can inform the decisions of private or corporate water consumers (e.g., by water footprints and life cycle analysis) and water managers (e.g., by drought monitoring of climate change risk assessments).

To generate informative model output such as streamflow, groundwater recharge and soil water content, GHMs integrate a large amount of spatially distributed climatic and physiographic input data (including data on land cover, data on soil characteristics, and the deeper subsurface, land cover, surface water bodies and human water use). However, they draw insufficient benefit from in-situ and remote-sensing observations of model output variables to improve the quality of their output or determine its uncertainty.

Like all hydrological models, GHMs (including land surface models) suffer from uncertainty due to uncertain model structure, model input (in particular climate forcing) and model parameters (Döll et al., 2016). To reduce the uncertainty of model output, models can be calibrated by adjusting the model in a way that simulated values of a model output variable optimally match observations of this variable. In basin-scale hydrological modeling, the estimation of model parameters by calibration against time series of observed streamflow time series is standard. This is not the case for GHMs, which is not only due to the limited availability of suitable streamflow observations for many regions and the large effort required to exploit them. In global-scale hydrological modeling, model structure and input are more uncertain than in typical basin-scale modeling for large parts of the global model domain, and the density of available streamflow observations is lower. In particular due to equifinality (Beven, 1993), uncertainty reduction by parameter estimation for GHMs is best done by utilizing not only observations of streamflow but also of other model output variables (multi-variable parameter estimation: Yassin et al., 2017; Stisen et al., 2018; Dembélé et al., 2020).

Equifinality or its synonym non-uniqueness means that different combinations of model parameters (and also of model structures and inputs) may lead to a similarly good agreement between simulated and observed values of a model output variable so that it is not possible to determine an optimal (unique) parameter set (Beven, 1993). Equifinality implies that multiple model simulations, generated by, e.g., running the model with multiple parameter sets, are acceptable and informative for the model user if they 1) cannot be easily rejected as infeasible representations of the system given in particular the uncertainty of the observations and 2) support the specific modeling purpose, e.g., to project either low flows or floods (Beven and Smith, 2015). The ensemble of such model runs or parameter sets is referred to as "behavioral" (Beven and Binley, 1992). While the equifinality problem can be reduced by utilizing various streamflow signatures (Gupta et al., 1998; Arheimer et al., 2020) for parameter estimation, it is preferable to utilize, in addition to streamflow observations, observations of one or more additional model output variables (multi-variable calibration, Yassin et al., 2017; Stisen et al., 2018; Dembélé et al., 2020). The concept of behavioral parameters can be applied for quantifying the uncertainty of the model output that stems from the uncertainty of the observations of model output variables. However, methodological knowledge on how to best reduce and quantify model output uncertainty by multi-variable parameter estimation is lacking, in particular in global-scale hydrological modeling.

To do a multi-variable parameter estimation and related uncertainty quantification with GHMs, observations of both streamflow (Q) and soil coverage and the large effort required to exploit them but also to a lack of methodological knowledge about how to best use observations for GHM adjustment.

So how can observations of model output variables be best used for estimating parameters of a GHM, given model complexity, the large number of model parameters, the large spatial extent and heterogeneity of the model

Formatiert: Schriftart: Kursiv

Formatiert: Schriftart: Kursiv

Formatiert: Schriftart: Kursiv

Formatiert: Schriftart: Kursiv

Formatiert: Schriftart: Kursiv

Formatiert: Schriftart: Kursiv

domain, the interdependence of the calibration of sub-basins due to their connection by lateral streamflow as well as the problem of equifinality? And how can such observations be best used for determining not only the best estimate but also the uncertainty of GHM model output?

Equifinality or its synonym non-uniqueness means that different combinations of model input, structure and parameters may lead to a similarly good agreement between simulated and observed values of a model output variable so that it is not possible to determine an optimal (unique) combination (Beven, 1993). It is related to epistemic uncertainty about model structure, input and parameters (Beven and Smith, 2015), which can be expected to be larger in global-scale modeling than in basin-scale modeling. Equifinality is exacerbated by observation errors, which are difficult to quantify comprehensively, and include non-random errors and biases (e.g., see Di Baldassarre and Montanari, 2009, regarding errors of in-situ streamflow observations derived via the commonly applied rating-curve method). In addition, comparisons between simulated and observed values often suffer from incommensurability due to different spatial (e.g., groundwater head from groundwater wells, Reinecke et al., 2020) or temporal (e.g., instantaneous water table elevation of surface water bodies from radar altimetry, Berry et al., 2005) scales. Equifinality implies that multiple model simulations, generated by, e.g., running the model with multiple parameter sets, are acceptable and informative for the model user if they 1) cannot be easily rejected as infeasible representations of the system given the level of the diverse uncertainties (in particular regarding climate forcing, model structure and observations) and 2) support the specific modeling purpose, e.g., to project either low flows or floods (Beven and Smith, 2015). The ensemble of such model runs or parameter sets is referred to as "behavioral" (Beven and Binley, 1992).

Equifinality increases with the number of parameters to be estimated. The identifiability of parameters can be increased by utilizing more than one calibration objective, e.g., minimizing both the root-mean-square error of 1) all streamflow observations and 2) the low flow observations. It has been suggested from experience that no more than 5-6 parameters can be estimated for each calibration objective (Efstratiadis and Koutsoyiannis, 2010). While the equifinality problem can be reduced by utilizing various streamflow signatures (Gupta et al., 1998; Arheimer et al., 2020) for parameter estimation, it is preferable to utilize, in addition to streamflow observations, observations of one or more additional model output variables (multi-variable calibration, Yassin et al., 2017; Stisen et al., 2018; Dembélé et al., 2020). ~~The additional observation variable of choice for GHM parameter estimation is terrestrial~~total water storage anomaly (TWSA) ~~should be used. TWSA from GRACE (The Gravity Recovery and Climate Experiment) GRACE) TWSA over the continents from GRACE satellites, as is they provided offers with~~ spatially uninterrupted global coverage and almost ~~continuous uninterrupted~~ monthly time series since 2003 (some missing months before 2016 and a gap until the start of GRACE-Follow-on mission in May 2018). TWSA observations integrate over all water storage compartments on the continents (glacier, snow, soil, groundwater and surface water bodies) and thus also depend on all water flows on the continents. This is similar ~~to to streamflow~~ (Q), which is the integrative result of upstream flow and storage processes. Thus, TWSA observations complement Q observations. The coarse spatial resolution of TWSA observations of about 100,000 km² (Vishwakarma et al., 2021) is less problematic for GHMs than for basin-scale hydrological models.

Currently, most GHMs do not use observed Q (or any other observations) to estimate parameters in the upstream basin, i.e. GHMs are not calibrated in a basin-specific manner (Bierkens, 2015). One exception is the GHM WaterGAP (Alcamo et al., 2003; Döll et al., 2003), which is calibrated in a simple manner by adjusting one

to three parameters in each of 1319 large drainage basins (Müller Schmied et al., 2014, 2021) such that simulated long-term average annual Q is close to observations. For the standard version of WaterGAP, adjustment of a larger set of model parameters is currently not done due to the equifinality problem and computational simplicity. While this limited calibration leads to a reduction of the Q bias and thus more realistic estimates of renewable water resources as compared to the uncalibrated version (and the results of other GHMs that are not calibrated in a basin-specific manner), it does not significantly improve simulated seasonality and interannual variability of Q (Hunger and Döll, 2008). Discrepancies with time series of observed monthly Q (Müller Schmied et al., 2014) or TWSA (Döll et al., 2014; Scanlon et al., 2019) can be high even after the standard WaterGAP calibration. It is therefore desirable to adjust parameters that affect the seasonality of simulated Q or TWSA as well as their interannual variability and potential trends. ~~Multi-variable parameter estimation based on observations of both Q and TWSA may enable the adjustment of such parameters. In the following, “calibration” is used synonymously with “parameter estimation”.~~

Multi-variable parameter estimation can be ~~achieved~~ done by various ensemble-based approaches such as 1) Pareto-optimal calibration using an optimization algorithm (POC) (Werth and Güntner, 2010), 2) the Generalized Likelihood Uncertainty Estimation (GLUE) approach for identifying behavioral parameter sets (Beven and Binley, 1992) and 3) data assimilation with the ensemble Kalman filter in which model states and parameters are jointly updated (Eicker et al., 2014), hereafter called EnCDA. With each of these approaches, an ensemble of optimized parameter sets is generated. ~~While parameter estimation using an optimization algorithm (POC) is expected to be more efficient in finding (Pareto) optimal parameter sets than a GLUE approach using a random sampling of the parameter space (Blasone et al., 2008), the GLUE approach is required to determine behavioral parameter sets that enable a quantification of the model output uncertainty given the observation uncertainty. With EnCDA, we explore whether the ensemble Kalman Filter approach, which is well established for data assimilation (adjustment of model states), can also estimate at the same time model parameters if Q and TWSA observations are assimilated.~~

Werth and Güntner (2010) developed a multi-variable POC scheme for WaterGAP and applied it to adjust six to eight parameters homogeneously in each of 28 large river basins (e.g., Amazon, Mississippi and Lena), using both Q and TWSA observations. A similar approach was applied by Xie et al. (2012) to calibrate the SWAT model for 10 large basins in Sub-Saharan Africa, using observed TWSA time series and monthly mean Q values. The GLUE approach has not yet been applied with WaterGAP or other GHMs. First EnCDA efforts of assimilating GRACE TWSA into WaterGAP for the Mississippi River basin in the US and the Murray-Darling basin in Australia were made by Eicker et al. (2014) and Schumacher et al. (2016a, b, 2018). While EnCDA with more than one observation variable (Q and remote-sensed soil moisture) has already been done in large-scale hydrological modeling of the Upper Danube basin (Wanders et al., 2014), joint EnCDA of Q and TWSA has not yet been reported.

~~So how can observations of model output variables be best used for estimating parameters of a GHM, given model complexity, the large number of model parameters, the large spatial extent and heterogeneity of the model domain, the interdependence of the calibration of sub-basins due to their connection by lateral streamflow as well as the problem of equifinality? And how can such observations be best used for determining not only the best estimate but also the uncertainty of GHM model output?~~

Formatiert: Fett

The objective of this paper is to analyze how the uncertainty of the output of GHMs can be reduced and quantified by parameter estimation that utilizes observations of multiple output variables and their uncertainties. For the example of the Mississippi River basin (MRB), the paper shows how Q and TWSA observations can be utilized to obtain one optimal parameters set (the “compromise solution”) as well as ensembles of (Pareto)-optimal and behavioral parameter sets for the GHM WaterGAP, by evaluating the applicability of the three multi-variable calibration approaches POC, GLUE and EnCDA. The objective of this- It presents a method for defining performance thresholds for behavioral parameter sets based on observations and their uncertainties as well as the initial GLUE ensemble. In each approach, model parameters of all grid cells within so-called calibration-data assimilation (CDA) units, either the whole MRB or five sub-basin CDAs, were uniformly adjusted. We derive conclusions for multi-variable parameter estimation and quantification of model output uncertainty in global-scale hydrological modeling, answering the following research questions: paper is to assess the suitability of the three multi-variable calibration approaches POC, GLUE and EnCDA for identifying ensembles of optimal and behavioral parameter sets of the GHM WaterGAP by model calibration against observations of Q and TWSA, taking into account observation uncertainties. In addition, an approach for taking into account the observations errors for the definition of performance thresholds for behavioral parameter sets is presented. In each calibration approach, model parameters of all WaterGAP grid cells within so-called calibration-data assimilation (CDA) units were uniformly adjusted. Based on calibration exercises either for the whole Mississippi River basin (MRB) as one CDA unit or for its five sub-basins (four upstream basins and one downstream basin) as alternative CDA units, we will answer the following research questions:

1. What are the strength and weaknesses/advantages and disadvantages of each of the three multi-variable calibration approaches?
2. What is the added value of the multi-variable calibration parameter estimation as compared to the standard WaterGAP calibration for identifying one “optimal” parameter set?
3. How and how well can WaterGAP model output uncertainty be quantified?
4. How large are the trade-offs between the optimal simulation of Q and TWSA? As TWSA observations are available with a global coverage while Q observations are not. To what extent is Q simulation improved by calibration against TWSA only?
5. What is the added value of individually calibrating sub-basin CDAs instead of one basin CDA?
6. What are the characteristics of the identified optimal and behavioral parameter sets? How large is the equifinality of parameter sets? Can optimal values be identified for some parameters?

The paper is structured as follows. Section 2 describes and compares the three calibration approaches. Section 3 provides a short description of the GHM WaterGAP and explains the setup of the calibration study, including the calibration parameter selection of the parameters by an initial sensitivity analysis. In Section 4, we present the results of our calibration study, and in Section 5, we discuss results the research questions are discussed, and we draw and conclusions are drawn in Section 6.

2 Approaches for multivariable calibration parameter and uncertainty estimation in global hydrological modeling based on observation of multiple model output variables of global hydrological models

Formatiert: Fett, Schriftart: 10 Pt., Nicht Fett

Formatiert: Fett, Schriftart: 10 Pt., Nicht Fett

Formatiert: Fett, Schriftart: 10 Pt., Nicht Fett

Formatiert: Fett, Schriftart: 10 Pt., Nicht Fett

Formatiert: Fett, Schriftart: 10 Pt., Nicht Fett

Formatiert: Fett, Schriftart: 10 Pt., Nicht Fett

Formatiert: Fett

230 While model calibration can encompass adjustments of model structure, initial conditions, input variables and parameters, model calibration in hydrology focuses on the identification of optimal or suitable parameter sets. The focus on parameter adjustment in hydrological modeling is justified by the necessity of using many parameters that cannot be measured independently or derived from first principles. Water flows in the hydrology domain are largely dominated by the local geometry and local boundary resistances of the individual flow pathways, different from the water flows in the meteorology and oceanography domain (Beven, 2002). In hydrological models, water flows are expressed as a function of water storage or potential gradients as well as parameters that represent the highly uncertain average effects of local geometries and boundary resistances. In comprehensive hydrological models that distinguish various compartments, about 10-50 model parameters result per spatial unit. In the case of distributed models in which spatial heterogeneity of land and water is accounted for by distinguishing a large number of spatial units such as sub-basins or grid cells, each computational unit is described by its parameters set, leading to a very large number of model parameters. GHMs covering the whole land area of the globe typically represent spatial heterogeneity on the continents by distinguishing more than 60,000 0.5° grid cells, with more than 1 million model parameters whose values need to be set to enable computation.

245 In the GLUE approach, an ensemble of behavioral parameter sets is derived, each of which leads to an acceptable model performance given uncertainties and model purpose; the ensemble is in most studies defined by model simulations exceeding certain performance thresholds. In the POC approach, an ensemble of Pareto-optimal parameter sets is generated that does not take into account model or observation uncertainties but the trade-off that occurs between the fit to various performance metrics. A parameter set is called Pareto-optimal or non-dominated if it results in a better simulation performance than any other Pareto parameter set for at least one of the objectives; none of the objective functions can be further improved without degradation of some of the other objective functions (Khu and Madsen, 2005; Werth and Güntner, 2010). In EnCDA, an initial ensemble of parameter sets is updated at each intake of observations, and parameters ideally converge with increasing intake of observations; there is a single objective function, in which multiple objectives are implicitly weighted by considering model and observation uncertainties.

255 It is computationally challenging to work with an ensemble of parameter sets, e.g., in the context of climate impact studies or seasonal forecasting. Therefore, we also identified (pseudo-)optimal parameter sets for each CDA unit. In this section, the three multi-variable calibration approaches POC, GLUE and EnCDA are first described, while a comparison between them can be found in Appendix A, and then compared to each other.

Formatiert: Absatz_mit_Einzug

2.1 POC

POC aims at identifying Pareto-optimal parameter sets. While the ensemble of Pareto-optimal parameter sets determined by POC is optimal only under the assumption that there are no observation, input and model structure uncertainties, they take into account that there is rarely a parameter set that leads to a simulation of different output variable that is equally optimal with respect to all observational variables. POC as applied in this study implements an optimization algorithm such as the Borg multi-objective evolutionary search algorithm (Hadka and Reed, 2013). Based on an initial small ensemble of parameter sets derived from a-priori parameter distributions, the parameter sets are updated according to the value of the objective functions (performance metrics) to achieve improved performance. Then, the model is re-run; based on the new values of the objective function, parameter sets are updated again in an iterative fashion for a pre-selected number of iterations and thus model runs to identify Pareto-optimal parameter sets. Due to model, input and observation errors, it is unlikely that any parameter set will lead to the highest values of all objective functions. Without additional subjective preference information on what objective function is most important, all Pareto-optimal parameter sets are considered to be equally good. From the often large number of Pareto-optimal parameter sets, a “preferred” set can be selected using a variety of approaches (Khu and Madsen, 2005). The so-called “compromise parameter set” leads to values of the applied objective functions OF (or performance metrics) such that the overall performance deficit D_p regarding all OF is minimized (Yu, 1973). D_p is the distance between the utopia point, where all OF values are at their optimal values OF^* , and the OF values of the Pareto-optimal parameters sets x . According to Yu (1973),

$$D_p(OF(x)) = \left[\sum_{i=1}^n (OF_i^* - OF_i(x))^p \right]^{1/p} \quad (1)$$

where n is the number of objective functions and p is a parameter that is larger or equal to 1 and needs to be selected. By minimizing D_p with $p=2$, the Euclidean distance is selected to determine the compromise parameter set.

Applying a POC approach, Werth and Güntner (2010) used monthly time series of in-situ observed Q and GRACE for 28 large river basins to adjust WaterGAP parameters individually for each basin, after first determining the most influential basin-specific parameters. Calibration parameters included multipliers of cell-specific parameters such as rooting depth as well as parameters that were assigned to each cell in the basin such as a groundwater outflow coefficient. Werth and Güntner (2010) found that improved simulations of TWSA and Q were achieved for most basins after calibration, but calibrated Q was still poor compared to the observed values in some basins; a better fit to GRACE TWSA did not necessarily lead to a better fit of simulated to observed Q . The disadvantage of the POC approach is that it is computationally much more expensive than the simple calibration approach for standard WaterGAP such that PCO was only performed for 28 instead of 1319 CDA units. Thus, spatial variability of calibration parameters within the large basins could not be taken into account by Werth and Güntner (2010), and differences in model performance after calibration by either POC or the standard calibration approach were not analyzed.

2.2 GLUE

295 In the GLUE approach, a large number of different model parameter sets is generated first, based on assumed a-priori distributions of parameter values. In the next step, a subset of so-called behavioral parameter sets is identified from this initial set. This is done by running the model alternatively with each parameter set and then computing the values of a model performance metric using observations of model output variables, which is called likelihood measure in GLUE (Beven and Binley, 2014). In the next step, a threshold for the performance metric is identified below which model performance is so low that these parameter sets are considered to have a likelihood of zero.
300 Likelihood measures and thresholds for behavioral parameter sets are subjectively selected also based on the expertise of the modeler and should take into account the uncertainty of model structure, climate forcing and observations as well as the specific modeling purpose.

Multiple observation variables can be combined for determining behavioral parameter sets, by selecting the subset of parameter sets for which all performance metrics are better than their different thresholds. The selection
305 of the metric-specific thresholds implies a type of weighting between fits to the different variables. As a subset of all behavioral parameter sets, Pareto-optimal parameter sets can be identified; the pseudo-optimal parameter set can be determined using Eq. 1. Furthermore, the likelihood of each behavioral parameter set can be derived from the performance metric such that a probability distribution of model output can be quantified.

2.3 EnCDA

310 In the EnCDA approach, parameter sets of each CDA unit are optimized together with water storages in the various storage compartments and grid cells by data assimilation with the ensemble Kalman filter (EnKF; Evenson, 1994), by including both the water storages and the parameters in the state vector. The basic idea of data assimilation with the Kalman filter approach, as done in EnCDA, is to optimally combine observations with simulation results at the time of the observations according to estimates of model and observation errors (Clark et al., 2008). In EnCDA,
315 an ensemble of model runs with different parameter sets and perturbed climate inputs serves to estimate the model error. **EnCDA aims at minimizing a weighted RMSE:** t The higher the ratio of model error to observation error, the more weight is given to the observations and the larger is the adjustment of water storages and model parameters. Water volumes and parameters, all of which are state variables, are updated in each ensemble member whenever observations are available (e.g., once per month). State update depends on the information contained in the
320 covariance matrices of simulated states (water storages and parameters), simulated Q and observations. Covariance matrices of states and simulated Q are derived from differences between the estimates of each ensemble member and the ensemble mean. The ensemble mean of all updated water storages and Q is assumed to be the best estimator (Evensen, 2003). In the case of models with many grid cells and various storage compartments (10 in WaterGAP), the number of updated states strongly exceeds the number of observations.

325 EnCDA has a high potential for improving parameter estimation as the stepwise updates of water storage in the diverse storage compartments can help to compensate for model structure and input uncertainties, e.g., for underestimation of the precipitation input by adding mass/water to the system during the update. EnCDA was applied in some studies (e.g., DeChant and Moradkhani, 2012; Wanders et al., 2014), also for assimilating GRACE TWSA into WaterGAP (Eicker et al., 2014; Schumacher et al., 2016a,b, 2018) for the Mississippi River basin in

330 the US and the Murray-Darling basin in Australia. However, EnCDA for GHMs using GRACE TWSA is still in
an exploratory phase. Updating parameters in addition to updating water storages might increase the chance of
spurious Q simulation due to the highly non-linear relations between Q and storages as well as parameters (De
Chant and Moradkhani, 2012; Xie and Zhang, 2013; Schumacher et al., 2018). To achieve plausible and stable
EnCDA results regarding parameters and model output variables in complex distributed hydrological models in
335 which the number of states exceeds by far the number of observations, the degrees of freedom may have to be
reduced and rapid changes in parameters from one time step to the next need to be avoided (Xie and Zhang, 2013).
Schumacher et al. (2018) found that EnCDA with only TWSA observations is limited in constraining individual
model parameters even if the number of calibration parameters is very small as the calibration/data assimilation
system is highly underdetermined. This is why adding Q observations is promising.

340 The output of EnCDA regarding parameters can be viewed as a time series of recursive estimates for the
parameter sets for each ensemble member, even if these parameters are modeled as stationary in time (as in this
study). The parameter sets of each ensemble member at the end of the calibration/data assimilation (CDA) period
can then be used to generate ensemble predictions. The studies of Wanders et al. (2014) and Eicker et al. (2014),
which did not utilize Q observations, showed that with this approach, the ensemble means of model output values
345 during the validation period fit better to observations of Q and TWSA than uncalibrated model output.

2.4 Comparison of the three calibration approaches

POC, GLUE and EnCDA approaches share some characteristics and differ in others (Table 1). All three start with
a large number of parameter sets that are derived from a priori assumptions on the probability distribution of
calibration parameters and generate an ensemble of optimized parameter sets. EnCDA differs from POC and
350 GLUE by simultaneously modifying model parameters and model states. EnCDA and GLUE are regarded as
Bayesian approaches as they aim at deriving probability distributions of parameter sets and thus model output. In
POC, the ensemble of Pareto optimal parameter sets represents the uncertainty that is caused by the fact that due
to model structure and input uncertainty, different parameter sets lead to optimal performance for different
calibration objectives. Information from observations is used in all three approaches to update an a priori belief
355 about the probability distribution of parameters. However, parameter set selection is done in very different ways
and based on different assumptions. Both POC and GLUE compare the model output over the complete calibration
period with all observations to determine performance metrics. While the evolutionary search algorithm of POC
starts with a small number of parameters sets, runs the model, and then generates new parameter sets with ever-
improved performance metrics, in GLUE the large initial ensemble generated from a priori parameter distributions
360 is evaluated regarding performance metrics and the behavioral members among the initial ensemble are identified.
In POC and GLUE, parameters are temporally constant. In EnCDA, an ensemble of model runs is performed in a
stepwise fashion from the time of one observation to the time of the next. EnCDA updates the parameters
sequentially (in our study each month) such that time series of recursive parameter estimates are computed. It is
assumed that updates are informed by an ever increasing amount of information from observations so that the
365 parameter sets after the last update, i.e., at the end of the calibration period, are the best estimate. However, this
can be disputed. A study on EnCDA using GRACE TWSA for the Australian Murray-Darling basin showed that

parameter values vary in time with changes in climatic conditions within the river basin, probably due to an inappropriate model structure that does not allow the correct translation of precipitation variability into model output variability (Schumacher et al., 2018). The capability to reveal such dynamics may be advantageous for improving our understanding of model deficiencies. It needs to be investigated whether and how EnCDA can be used to determine optimal parameter sets that are suitable for model runs without adjustment of states.

In EnCDA, quantified errors of both the model and the observations are required to update water storages and parameters in each of the ensemble members (Table 1). The ensemble serves to estimate the model error, which includes parameter and climate forcing uncertainty and is calculated as the variance of the differences between each ensemble member and the ensemble mean. The EnKF applied in EnCDA represents an optimal and unbiased estimator only under the assumption that errors are Gaussian, unbiased and well known, neither of which is the case (Wang et al., 2020; Moradkhani et al., 2005; Beven and Binley, 1992). In GLUE, the model error due to parameter uncertainty (but not due to climate forcing uncertainty) is indirectly taken into account as the a priori ensemble depends on assumptions of parameter distribution, similar to POC. Observation errors may be considered quantitatively but in most applications they are not (Beven and Binley, 2014). In Section 3.4.2, we describe a way for taking into account the observation uncertainties in GLUE. Werth and Güntner (2010) suggested a way to include observation errors in POC. First, they determined an error ellipse around the compromise solution (defined in Eq. 1) by first generating an ensemble of observations from perturbing the observation time series with the observation errors and then determining the range of performance values of the compromise solution for this ensemble of perturbed observations. By considering all the non-dominated and dominated parameter sets inside the error ellipse, they identified an ensemble of likely parameter sets that was informed by both observations and observation uncertainty. In this case, POC can, like EnCDA and GLUE, be used to estimate uncertainties of parameter sets and model outputs. Nevertheless, it should be noted that this approach does not incorporate observational uncertainty directly into multi-objective parameter calibration in a rigorous way. Therefore, we did not take this approach in our study.

Table 1. Comparison of the main characteristics of the calibration approaches POC, GLUE and EnCDA as applied in this study:

	POC Pareto optimal calibration	GLUE Generalized likelihood uncertainty estimation	EnCDA Ensemble Kalman filter calibration and data assimilation
Use of a priori parameter ensembles	Yes	Yes	Yes
Direct modification of water storages	No	No	Yes
Bayesian approach	No	Yes	Yes
Estimation of model output uncertainty	Uncertainty only due to multiple objectives	Yes	Yes
Selection of parameter sets	Once, based on all observations	Once, based on all observations at once	Recursive, parameter sets updated at each observation time step
Quantitative information on parameter uncertainties considered	Indirectly via an a-priori range of parameter values	Indirectly via an a-priori ensemble of parameter sets	Directly as a factor of model uncertainty
Quantitative information on climate forcing uncertainties considered	No	No	Yes, as a factor of model uncertainty
Quantitative information on observation uncertainties considered	Possible in post-processing, by limiting Pareto optimal parameter sets to thresholds selected using GLUE ensemble	Possible, by selecting thresholds for behavioral solutions according to observation uncertainties	Yes
Rigorous consideration of uncertainty	No	No	Partly
Various objective functions including signatures can be selected	Yes	Yes	No
Weighting between different objective functions	Subjective weighting to identify a parameter set that is optimal in a specific context	Subjective weighting to identify parameter set(s) that is (are) optimal in a specific context	Implicit weighting based on model and observation uncertainties
Determination of Pareto optimal parameter sets under the assumption that there is only parameter uncertainty	Yes, determined by search algorithm	Yes, selected from a-priori ensemble	No (due to the small ensemble size)
Complexity	Medium	Low-medium	High
Computational effort for a specific objective function	Medium	Medium	Very high
Computational effort for analyzing alternative objective functions	High	Medium	Not applicable
Risk of spurious model behavior	Low	Low	High due to modifying water volume in multiple storage compartments

395 Different from EnCDA with its rigorous handling of uncertainties, GLUE is an informal Bayesian approach
that is much simpler than EnCDA (Table 1). Likelihood is here understood in a very general sense, as a fuzzy
measure of belief of how well the model conforms to the observed behavior of the system, and not in the sense of
maximum likelihood theory which is the basis of EnCDA (Beven and Binley, 1992). In EnCDA, the likelihood of
a parameter set is a product of model errors, observation errors and the differences between observed and simulated
400 variables (and other factors) (Section 3.2 in Schumacher, 2016). The informal and subjective treatment of

uncertainty in the GLUE approach has caused controversy because the different error sources are not distinguished (Vrugt et al., 2008). This can mean that non-maximum likelihood solutions might be accepted as parameter estimates. However, the GLUE approach can be defended against formal Bayesian methods as these require a priori knowledge about errors that is lacking in most hydrological modeling applications (Beven and Binley, 2014). In addition, formal Bayesian methods (e.g., DREAM) are difficult to implement and much less computationally efficient but may lead to similar outcomes (Vrugt et al., 2008). In GLUE, the likelihood measure can be freely chosen by the modeler. She could choose a formal likelihood measure like the one applied for EnCDA, a measure that relates the deviation of model output from observations to the observation error or just any model performance metric for comparing observations to simulations (Beven and Binley, 2014, their Table 3). Given the large epistemic uncertainty about hydrological systems, GLUE relies on the subjective expertise of the modeler to define a suitable likelihood measure given her often only qualitative knowledge about uncertainties of model structure, model input, model parameters and observations. There is a multitude of likelihood measures that can be used to identify parameter sets that fit better to observations than the a-priori ensemble (or the standard deterministic parameter set) and are therefore more likely than others. A likelihood of zero is assigned to all parameter sets that are not "behavioral", i.e., if the likelihood measure is below a threshold that is set subjectively by the modeler. For the example of the popular likelihood measure Nash-Sutcliffe efficiency (NSE), behavioral parameter sets may be defined as those that result in an NSE larger than 0.7 if the behavior of the hydrological system can be easily simulated; if not, the threshold will have to be lowered to get any behavioral parameter sets. To obtain the a-posteriori probability distribution of parameter sets, only the behavioral parameter sets are considered and their probability is derived from the NSE obtained with them.

Objective functions (= likelihood measures = performance metrics) can be freely chosen in the case of POC and GLUE. This allows the selection of diverse hydrological signatures of the observables, e.g., those that focus on high or low flows in the case of streamflow. EnCDA minimizes the root mean squared error, and it is very difficult to apply another objective function (Table 1). In addition, the likelihood function in EnCDA considers only the deviations between the model output and observations at one point in time as the ensemble Kalman filter and not the ensemble Kalman smoother was applied in this study. In contrast, performance measures used in POC and GLUE evaluate model performance (and calibrate model parameters) over the whole calibration period. EnCDA differs from POC and GLUE in that weighting between the performance metrics for the multiple objectives/variables is implicitly done given the model and observation errors (Table 1). In POC and GLUE, subjective weighting needs to be done for selecting one "optimal" parameter set. POC and GLUE also have in common that they can serve to identify Pareto-optimal parameter sets or one compromise parameter set that can then be used to quantify in a computationally efficient way in, e.g., climate change studies or seasonal forecasting, where hydrological models are driven by an ensemble of climate data sets.


The complexity of the three calibration approaches differs (Table 1). The computational burden is much higher for EnCDA than for POC and GLUE. Therefore, only a very small number of ensemble members can be used in the analysis; ensemble sizes typically are between 30 and 100. These low-rank ensembles may fail to correctly convey the covariance information between model states and parameters or between different parameters. Localization techniques can be applied to mitigate this effect but with the trade off that long distance covariance information is neglected or down-weighted. For the same number of evaluated parameter sets, the computational

440 effort of POC and GLUE is approximately the same, for evaluating a specific objective function. However, as the
parameter ensemble generated by the search algorithm in POC depends on the objective function (unlike in the
case of GLUE), the computational burden of POC becomes, for example, twice as high as that of GLUE if one
445 alternative objective function is taken into account. Finally, EnCDA is prone to spurious results as the modification
of water storages to improve the fit to TWSA observations might lead to little constrained changes in individual
storages, with impacts on simulated water flows. In the EnCDA study of Schumacher et al. (2018), river storage
was adjusted in WaterGAP based on TWSA observations, leading to spurious increases in Q not seen in WaterGAP
runs without water storage updates or in the observations.

3 Methods and data

3.1 The global water resources and use model WaterGAP

450 In this study, we applied WaterGAP 2.2d, which is comprehensively described in Müller Schmied et al. (2021).
With a spatial resolution of 0.5° latitude by 0.5° longitude (55 km by 55 km at the equator), WaterGAP computes
both water resources, i.e., water flows and storages, and human water use on all land areas of the globe except
Antarctica. Water withdrawals and consumptive water use in the sectors households, manufacturing, cooling of
455 thermal power plants, livestock, and irrigation are computed by five water use models. From the output of the
water use models, the linking model GWSWUSE computes potential net water abstractions from groundwater
(NA_g) and surface water (NA_s) as the difference between all withdrawals from and all return flows to groundwater
and surface water, respectively. Time series of monthly NA_g and NA_s are inputs of the WaterGAP Global
Hydrology Model (WGHM), together with time series of daily climate variables (Müller Schmied et al., 2021).
460 WGHM computes various water flows (e.g., evapotranspiration, groundwater recharge and Q) as well as water
storage variations in ten compartments: canopy, snow, soil, groundwater and the surface water bodies local and
global wetlands, local and global lakes, global man-made reservoirs and rivers (boxes in Fig. 1). The term “local”
means that the surface water bodies are fed only by the runoff produced in the same 0.5° cell, while “global”
wetlands, lakes and reservoirs are also fed by inflows from the upstream cells. The runoff generated in a cell from
465 the “vertical” water balance (Fig. 1) is transported through the groundwater and, if existing, through the various
types of surface water bodies before reaching the river. Outflow from the river compartment is Q. Glaciers are not
simulated in this WaterGAP version; while there are some glaciers in the most upstream parts of the Arkansas and
Missouri river basins, these are not expected to strongly impact mean TWSA of the large CDA units or streamflow
at the outlet of the CDA units (Fig. 2). To calculate TWSA time series, the sum of all ten compartmental water
storages is computed and normalized by its mean value over a reference period.

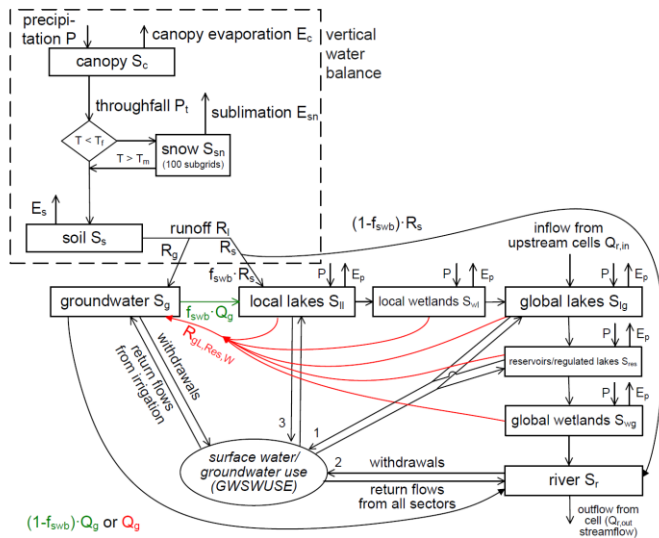

470

Figure 1. Schematic of WGHM in WaterGAP2.2d. For each 0.5° grid cell, daily water balances of a maximum of ten water storage compartments (boxes) are computed from their respective inflows and outflows (arrows) (Fig. 2 of Müller Schmied et al. (2021)). Green and red colors indicate processes that occur only in grid cells with humid and (semi)arid climate, respectively. E_s : soil evapotranspiration, E_p : potential evapotranspiration, R_g : groundwater recharge from soil, R_s : fast surface runoff and subsurface runoff, $R_{g,Res,W}$: groundwater recharge from surface water bodies, Q_g : groundwater discharge to surface water bodies and the river, F_{swb} : area fraction of surface water bodies. Net groundwater abstracts are taken from the groundwater storage compartment, while net surface water abstractions are taken from global lakes or reservoirs in the cell (priority 1), the river (priority 2) or local lakes (priority 3).

475

In the ordinary differential equations describing the dynamics of the individual water storage compartment, outflows are parameterized as a function of compartmental water storage (Müller Schmied et al., 2021). Other important model parameters determine the maximum values of compartmental water storage, such as the maximum soil water storage in the effective rooting zone (soil compartment) or active lake depth, which defines the maximum height of the water table of local and global lakes above the outflow level. Parameters affecting potential evapotranspiration govern the simulated atmospheric demand for water. Temperature-related parameters are important for snow processes.

485

As a standard, WGHM is calibrated against observed mean annual Q by adjusting one model parameter, the runoff coefficient, and if necessary, two correction factors (Müller Schmied et al., 2021). In the equation that describes the soil water dynamics, the runoff coefficient determines, together with soil water saturation, the amount of runoff from the land R_L ; it varies between 0.1 and 5. The larger the runoff coefficient, the smaller the runoff

490

becomes. If the adjustment of the runoff coefficient is not sufficient for not exceeding a maximum discrepancy between simulated and observed mean annual Q of 10%, a multiplicative areal correction factor for runoff from land is introduced that also corrects evapotranspiration (range of 0.5 to 1.5). If this is still not sufficient to match observed Q within 10%, the Q in the grid cell where the gauging station is located is multiplied by a station correction factor. This violates the mass balance but is done to avoid error propagation to the downstream basins. In the standard WaterGAP, the calibration period was 1980-2009 if stream data are available for the station otherwise the most recent earlier period. The runoff coefficient in basins without Q observations is determined by a regression approach, where calibrated runoff coefficients are related to various characteristics of the drainage basins (Müller Schmied et al., 2021). With this calibration and regionalization approach, a median Nash-Sutcliffe efficiency of 0.52 and a median Kling-Gupta efficiency of 0.61 is achieved for the fit of the time series of monthly Q at the 1319 calibration stations. The median correlation coefficient of 0.79 indicates an often poor simulation of the timing of monthly Q both seasonally and inter-annually. WaterGAP 2.2d tends to underestimate the variability of monthly Q in northern snow-dominated river basins (Müller Schmied et al., 2021). It underestimates the mean annual TWSA amplitude in 66% of the 143 investigated river basins by more than 10%. TWSA trends, in particular positive trends, are often underestimated (Müller Schmied et al., 2021; Scanlon et al., 2018).

3.2 Calibration setup for the Mississippi River basin

3.2.1 Study period and CDA units

Due to TWSA and climate input data availability, the study period was limited to January 2003 to December 2016. The study area excludes the most downstream part of the Mississippi River basin (MRB) due to a lack of Q observations. The Q gauging station at Vicksburg in the lower MRB is the most downstream station with a long-term record (Fig. 2). Hereafter, we refer to the upstream area of Vicksburg as the whole MRB. We study two variants of the spatial configuration of CDA units, in which calibrated parameters were uniformly adjusted. Either the whole MRB is treated as one CDA unit, or the MRB is subdivided into five CDA units. In the latter variant, four of the five CDA units (Arkansas River basin, Missouri River basin, Upper MRB and Ohio River basin) are upstream river basins that are defined as the drainage basin of four gauging stations for which data for the study period 2003-2016 are available (Fig. 2). The fifth CDA unit is the Lower MRB, which receives inflow from the four upstream CDA units. We divided our study period into a calibration period for parameter estimation from 2003 to 2012 and a validation period, in which the model is run with the estimated parameters, from 2013 to 2016. Q is additionally validated at six gauging stations that were not used for calibration (Fig. 2).

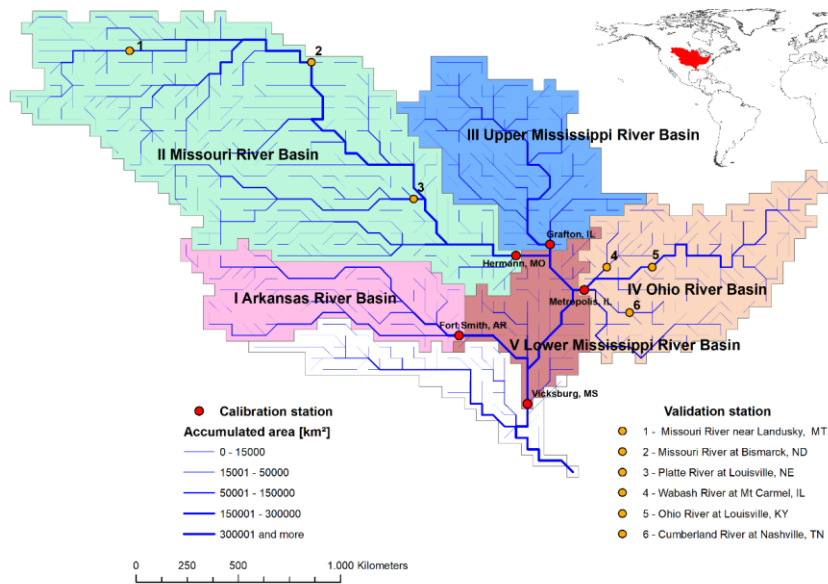


Figure 2. The Mississippi River basin as represented by the $0.5^{\circ} \times 0.5^{\circ}$ grid cells in WaterGAP, with delineation of the five CDA units. The CDA units were defined as the upstream cells of the five indicated calibration stations (streamflow gauging stations, shown in red). The stream network implemented in WaterGAP is shown, indicating the upstream areas of each grid cell by the line width. In addition, the locations of the six streamflow validation stations are plotted, shown in orange.

3.2.2 Observation data

Q data were obtained from the Global Runoff Data Centre (<https://www.bafg.de/GRDC/>) and the US Geological Survey (<https://maps.waterdata.usgs.gov/mapper/>). For monthly Q observations, a random error of 10% is assumed, based on the review of McMillan et al. (2012) and the study of Westerberg et al. (2016) for the UK, who determined a median error for the mean flow of 12%. Actual percent errors are extremely variable, depending on temporal aggregation, the Q value itself and various local conditions (Di Baldassarre and Montanari, 2009). In the EnCDA approach, an additional error of 10% of the temporal average of the Q observation time series was applied as this led to more stable EnCDA results.

To obtain TWSA observations for this study, level-2 GRACE data (spherical harmonic coefficients, SHC) from TU Graz (ITSG Grace2018; Mayer-Gürr et al., 2018) were evaluated over the CDA units. These data represent the Earth's time-variable gravity field as observed by the GRACE satellites via K-band ranging (KBR) and GNSS tracking. We derived TWSA from SHCs up to degree and order 96, applying the DDK3 filter (Kusche et al., 2009) and corrections for low-degree terms and effects such as glacial isostatic adjustment following

Gerdener et al. (2020). As the temporal mean value of GRACE-derived terrestrial water storage is unknown, it is a widely followed approach to normalize the monthly TWSA values relative to a constant mean over a certain reference period, here taken from 2003 to 2012. Uncertainties (1-sigma errors) were propagated to TWSA maps based on the full variance-covariance matrix of the TU Graz data; this accounts for orbital effects and the generally meridional behavior of errors. To investigate the influence of different level-2 GRACE products, we compared the unit-averaged TWSA time series from ITSG-Grace2018 with TWSA derived from the Release-06 version of the Center for Space Research (CSR) and the Geoforschungszentrum (GFZ). For the whole MRB, 42% of the CSR and 35% of the GFZ monthly values were found within 1 standard deviation, and 76% of the CSR and 61% of the GFZ monthly values were within 2 standard deviations of the TU Graz solution. Unexpectedly, the values are even higher for all sub-basin CDA units. Therefore, we decided to use ± 2 standard deviations of the propagated GRACE uncertainties for quantifying the TWSA observation error in this study. [Information on the uncertainty of GRACE TWSA data is provided in the supplementary text S1.](#)

GRACE TWSA estimates for spatial units are affected by leakage errors that are caused by the need for spectral truncation and the need to filter the solutions, which, for averages of different spatial units, may lead to an under- or overestimation of TWSA, thus affecting model calibration using GRACE TWSA. Therefore, when consistently comparing simulated to GRACE TWSA, it is advised to filter the simulated grid cell data with the same filter that was used to process the GRACE data (Döll et al., 2014). However, given the large number of simulations required in ensemble based calibration, this approach is computationally impractical. To roughly estimate the leakage effect, a re-scaling factor for GRACE TWSA was estimated for each CDA unit using Eq.1 of Swenson and Landerer (2012). The GRACE TWSA time series for CDA units can be multiplied with such a re-scaling factor to (ideally) reduce the leakage error and in this way make it better comparable to the simulated TWSA time series. First, the monthly time series of gridded TWSA as simulated by standard WaterGAP was filtered with the DDK3 filter, and then both the filtered and the unfiltered TWSA values were aggregated over all grid cells with a CDA unit. The re-scaling factor was then derived by minimizing the misfit between filtered and unfiltered TWSA time series through a simple least square regression. The re-scaling factors are between 1.00 and 1.03 for the CDA units MRB, Missouri and Upper MRB. They are 0.90 and 0.93 for the Ohio and Arkansas River basins, respectively, and 1.41 for the Lower MRB. As the re-scaling factors are close to 1 in all CDA units except the Lower MRB and we suspect that the large re-scaling for the MRB is due to an overestimation of the TWSA trend in the Lower MRB by WaterGAP, we did not apply re-scaling factors to GRACE TWSA.

The GRACE mission relies on accelerometers to measure non-gravitational forces. However, since August 2007, battery cell failures onboard the GRACE satellites led to increasing power supply problems, especially during orbital eclipses. As a result, the thermal control of the accelerometers was deactivated in April 2011 such that thermal variations would directly increase the measurement noise. To mitigate this problem, thermal variations and their impact on the GRACE instruments are modeled during the processing at TU Graz and the accelerometer data are calibrated (Klinger and Mayer-Gürr, 2016). This reduces the noise of the monthly gravity field solutions by an estimated 20-40% compared to solutions without accelerometer calibration (Klinger et al., 2016), but on balance, all GRACE solutions are deemed noisier from April 2011 onwards, the estimation of the noise floor is more uncertain, and the number of months without observations increases towards the end of the study period.

580 **3.2.3 Climate forcing**

Climate forcing required for both the irrigation water use model and WGHM encompasses time series of daily near-surface air temperature, total precipitation, downward shortwave radiation and downward longwave radiation. In this study, we applied the 0.5° GPCC-WFDEI data set where ERA-Interim reanalysis data of ECMWF have been bias-corrected by monthly precipitation time series of the Global Precipitation Climatology Centre and by other observations (Weedon et al., 2014). Monthly precipitation was corrected for wind-induced undercatch (Weedon et al., 2014).

3.2.4 Calibration parameters

590 Experience suggests that no more than 5-6 parameters can be estimated for each calibration objective (Efstratiadis and Koutsoyiannis, 2010). Many parameters in WaterGAP are spatially distributed, such as the parameter maximum soil water storage in the effective root zone S_{max} , which is computed as the product of soil water storage between field capacity and wilting point from a data set that provides a different value for each 0.5° cell and a rooting depth that is a fixed assigned value for each class of land cover, with one dominant land cover per cell. Other parameters are set globally to the same value, e.g., the groundwater discharge coefficient. To enable an adjustment of the cell-specific value of a distributed parameter like S_{max} , one may choose to either adjust the land cover-specific rooting depth in each CDA unit or to introduce a multiplier of cell-specific S_{max} as a calibration parameter. As the number of free (calibration) parameters should be limited given limited observations and equifinality, the second approach was chosen. For all spatially distributed parameters, multipliers were introduced that serve as calibration parameters, while globally uniform parameters are directly calibrated.

600 In Table 12, information about the 24 potential calibration parameters that were investigated in this study is provided, including their estimated a-priori uncertainty range. They are ordered mainly according to the water storage compartment (Fig. 1) that they immediately impact due to inclusion in the respective water balance equation. In addition, multipliers for precipitation and net radiation are included as calibration parameters, which were found to be the parameters that TWSA of the 33 largest river basins worldwide are most sensitive to (Schumacher et al., 2016b). The two multipliers for the net abstraction of groundwater and surface water are allowed to become negative as, e.g., an initially simulated positive net abstraction from groundwater (where water is removed from the ground due to pumping) may in reality be negative. The latter is the case if infiltration of irrigation water that was taken from surface water sources dominates groundwater abstractions in the grid cell. For some parameters, the selected range was influenced by previous analyses of the WaterGAP model performance. 605 Uniform distributions were assumed for all parameters.

610

Formatiert: Schriftart: (Standard) Times New Roman, 10 Pt.

Table 12. WGHM parameters, the range of assumed uniform a-priori distribution used for sensitivity analysis and calibration as well as the CDA units in which parameter was adjusted in this study. The parameters are categorized according to the processes or water storage compartments that they directly affect. P: precipitation, EP: potential evapotranspiration, CA: canopy, SN: snow, SL: soil, GW: groundwater, SW: surface water, NA: net abstraction of water by humans.

Compartment	Parameter [units if not unitless]	Abbreviation	Standard WGHM value	Range	Selected for adjustment in CDA units
P	Precipitation multiplier	P-PM	1	0.5-2	=
EP	Net radiation multiplier	EP-NM	1	0.5-2	=
EP	PT coeff. humid ¹	EP-PT _h	1.26	0.885-1.65	All
EP	PT coeff. (semi)arid ²	EP-PT _a	1.74	1.365-2.115	=
CA	MCWH ³ [mm]	CA-MC	0.3	0.1-1.4	=
CA	LAI multiplier	CA-LAIM	1	0.2-2.5	=
SN	Snow freeze temp. [°C]	SN-FT	0	-1-3	=
SN	Snow melt temp. [°C]	SN-MT	0	-3.75-3.75	All
SN	Degree-day factor multiplier	SN-DM	1	0.5-2	=
SN	Temp. gradient [°C/m]	SN-TG	0.006	0.001-0.01	=
SL	S _{max} multiplier ⁴	SL-MSM	1	0.5-3	All
SL	Runoff coefficient	SL-RC	Variable	0.3-3	All
SL	Maximum EP (mm/d)	SL-MEP	15	6-22	I
GW	GW recharge factor mult. ⁵	GW-RFM	1	0.3-3	V
GW	Max. GW recharge mult. ⁵	GW-MM	1	0.3-3	I, III, IV
GW	Critical precip. ⁶ [mm/d]	GW-CP	12.5	2.5-20	=
GW	GW discharge coeff. [1/d]	GW-DC	0.01	0.001-0.02	IV
SW	River roughness coeff. mult.	SW-RRM	3 ⁷	1-5	IV, V, MRB
SW	Active lake depth [m]	SW-LD	5	1-20	All
SW	Active wetland depth [m]	SW-WD	2	1-20	All
SW	SW discharge coeff. ⁸ [1/d]	SW-DC	0.01	0.001-0.1	All
SW	Evapo. red. factor mult. ⁹	SW-ERM	1	0.33-1.5	=
NA	NA from GW multiplier ¹⁰	NA-GM	1	-2-2	I, II, V, MRB
NA	NA from SW multiplier ¹¹	NA-SM	1	-2-2	II

¹ Priestley-Taylor coefficient in humid grid cells

² Priestley-Taylor coefficient in (semi)arid grid cells

³ Maximum water storage on canopy per Leaf Area Index (LAI)

⁴ Multiplier for maximum soil water storage in the effective root zone

⁵ Groundwater recharge is capped at 95% of total runoff from land R_i

⁶ In (semi)arid grid cells, there is only GW recharge if daily precipitation exceeds the value of the parameter critical precipitation. Otherwise, the potential GW recharge remains in the soil

⁷ For most river basins, including MRB

⁸ For lakes and wetlands

⁹ To take into account the impact of temporally varying areas of lakes, reservoirs, and wetlands on evaporation

¹⁰ Multiplier for net abstraction from groundwater

¹¹ Multiplier for net abstraction from surface water (reservoirs, lakes, and rivers)

The Q of larger rivers in the MRB is strongly impacted by the management of the many man-made reservoirs.

The water balance of large (i.e. “global”) reservoirs is simulated in WGHM with an algorithm that distinguishes reservoirs with the main purpose of irrigation from others; different equations are used for reservoirs with a large storage capacity to mean annual Q ratio and those with a small ratio. With any globally applied algorithm, human decisions on reservoir management are very difficult to simulate, and adaptation of some parameters is not likely to lead to better simulation results unless each reservoir would be dealt with individually. Therefore, no parameter of the reservoir algorithm was adjusted in this study. This limits the ability of the calibrated model to achieve a

good fit to observations in river basins with many reservoirs such as the Missouri river basin (Fig. BA1a in the appendix).

From the potential calibration parameters, a small number of calibration parameters were selected for each CDA unit by a sensitivity analysis, to limit equifinality. The sensitivities of four output variables (simulated Q, TWSA, snow storage and water storage in local lakes) to all 24 parameters were analyzed separately for each of the six CDA units, using the standard version of WGHM. For the sensitivity analysis, the Elementary Effect Test (EET) method of Morris (1991) was applied where the average of the elementary effects, i.e., the amount of change in the simulated variable due to a change in a parameter value, is used as the sensitivity measure or sensitivity index. The change in the variable is computed as the root mean square difference between a reference simulation and the simulation of the variable after deviating the parameter from its reference value. The EET method is computationally inexpensive and recommended for parameter ranking and screening (Pianosi et al., 2016). 1000 random parameter sets were generated by Latin Hypercube Sampling and used as the reference parameter values. Then, each reference parameter set was perturbed ~~One-at-a-Time (OAT)~~ for each of the 24 parameters following a radial design proposed by Campolongo et al. (2011), which resulted in a total number of 25,000 (i.e., 1,000 x (1+24)) parameter sets. Parameters were ranked separately for each of the four output variables.

The precipitation multiplier P-PM and the net radiation multiplier EP-NM can correct biases of the climate forcing. P-PM was excluded from calibration even though it ranked first in all six CDA units for almost all four test variables, for various reasons. First, the precipitation input is perturbed in EnCDA, and an additional multiplier would lead to a double-counting of precipitation uncertainty. Second, mean annual precipitation in the CDA units of WaterGAP climate forcing does not differ much from the values derived from the high-resolution (4 km) PRISM dataset for the USA (Table S1). Potential evapotranspiration is a function of both net radiation and the Priestley-Taylor coefficient. Even though EP-NM ranked somewhat higher in all CDA units than the Priestley-Taylor coefficient for humid areas EP-PTh, we decided to adjust only EP-PTh (Table 12), as it is an actual model parameter and not a climate forcing correction factor (the MRB is mainly humid).

Then, we selected, for each variable, those top-ranking parameters among the remaining 22 parameters that together contribute at least 50% of the combined total effect, i.e. the sum of elementary effect for all parameters. Application of this threshold ensures that only the most influential parameters of a given variable are selected and the total number of selected parameters remains rather small, and the most influential parameters for each variable were chosen. We found that in each of the six CDA units, the snow melt temperature SN-MT accounts for more than half of the total effect for the variable snow storage and the variable local lake storage is most sensitive to the parameters active lake depth SW-LD and discharge coefficient for surface water bodies SW-DC (Table S2). SN-MT is also much more important than the other three snow parameters for Q and TWSA. TWSA and Q are strongly influenced by more parameters than snow and local lake storage; 3-5 parameters cover at least 50% of the total effect in the case of TWSA, and 4-5 in the case of Q. The three most influential parameters for both TWSA and Q are, in almost all CDA units, the runoff coefficient SL-RC, the S_{max} multiplier SL-MSM and the PT coefficient for humid¹ areas EP-PTh. Exceptions are the downstream Lower MRB (EP-PTh and SL-RC not influential for TWSA), where the inflow into the CDA unit, which is prescribed based on the POC compromise solution parameter sets, dominates streamflow, and the driest basin Arkansas (EP-PTh not influential for TWSA) (Table

S2). For each CDA unit, 8-10 calibration parameters were selected (Table 2). As a result, altogether 47 parameters were adjusted if the five sub-basin CDA units were used for model calibration.

Table 2. WGHM parameters, the range of assumed uniform a-priori distribution used for sensitivity analysis and calibration as well as the CDA units in which parameter was adjusted in this study. The parameters are categorized according to the processes or water storage compartments that they directly affect. P: precipitation, EP: potential evapotranspiration, CA: canopy, SN: snow, SL: soil, GW: groundwater, SW: surface water, NA: net abstraction of water by humans.

Compartment	Parameter (units if not unitless)	Abbreviation	Standard WGHM value	Range	Selected for adjustment in CDA units
P	Precipitation multiplier	P-PM	±	0.5-2	-
EP	Net radiation multiplier	EP-NM	±	0.5-2	-
EP	PT-coeff. humid [†]	EP-PTh	±2.6	0.885-1.65	All
EP	PT-coeff. (semi)arid [‡]	EP-PTa	±7.4	1.265-2.115	-
CA	MCWH [‡] [mm]	CA-MC	0.3	0.1-1.4	-
CA	LAI multiplier	CA-LAIM	±	0.2-2.5	-
SN	Snow freeze temp. [°C]	SN-FT	0	-1-3	-
SN	Snow melt temp. [°C]	SN-MT	0	-3.75-3.75	All
SN	Degree-day factor multiplier	SN-DM	±	0.5-2	-
SN	Temp. gradient [°C/m]	SN-TG	0.006	0.001-0.01	-
SL	S _{max} multiplier [‡]	SL-MSM	±	0.5-3	All
SL	Runoff coefficient	SL-RC	Variable	0.3-3	All
SL	Maximum EP (mm/d)	SL-MEP	±5	6-22	I
GW	GW recharge factor mult. [‡]	GW-RFM	±	0.3-3	V
GW	Max. GW recharge mult. [‡]	GW-MM	±	0.3-3	I, III, IV
GW	Critical precip. [‡] [mm/d]	GW-CP	±2.5	2.5-20	-
GW	GW discharge coeff. [1/d]	GW-DC	0.01	0.001-0.02	IV
SW	River roughness coeff. mult. [‡]	SW-RRM	±3 [‡]	1-5	IV, V, MRB
SW	Active lake depth [m]	SW-LD	5	1-20	All
SW	Active wetland depth [m]	SW-WD	2	1-20	All
SW	SW discharge coeff. [‡] [1/d]	SW-DC	0.01	0.001-0.1	All
SW	Evapo. red. factor mult. [‡]	SW-ERM	±	0.23-1.5	-
NA	NA from GW multiplier ^{††}	NA-GM	±	-2-2	I, II, V, MRB
NA	NA from SW multiplier ^{††}	NA-SM	±	-2-2	II

[†] Priestley-Taylor coefficient in humid grid cells

[‡] Priestley-Taylor coefficient in (semi)arid grid cells

[‡] Maximum water storage on canopy per Leaf Area Index (LAI)

[‡] Multiplier for maximum soil water storage in the effective root zone

[‡] Groundwater recharge is capped at 95% of total runoff from land R_i

[‡] In (semi)arid grid cells, there is only GW recharge if daily precipitation exceeds the value of the parameter critical precipitation. Otherwise, the potential GW recharge remains in the soil

[‡] For most river basins, including MRB

[‡] For lakes and wetlands

[‡] To take into account the impact of temporally varying areas of lakes, reservoirs, and wetlands on evaporation

^{††} Multiplier for net abstraction from groundwater

^{††} Multiplier for net abstraction from surface water (reservoirs, lakes, and rivers)

Seven parameters were selected as calibration parameters in all CDA units (Table 2). For each CDA unit, an additional one to three calibration parameters were selected as they had a particularly high sensitivity rank due to the specific characteristics of the CDA unit. For example, the multiplier for net abstractions from groundwater (Fig. A1d), NA-GM, was selected in four CDA units where these abstractions are high (Fig. B1d) and groundwater withdrawals lead to groundwater depletion, which strongly affects TWSA. The while the multiplier for net

700 abstractions from surface water (Fig. A1e), NA-SM, was only selected for the Missouri River basin, with the
 highest net abstractions from surface water (Fig. B1e). The maximum groundwater recharge multiplier GW-MM,
 which affects the soil texture-specific maximum amount of daily groundwater recharge, was selected in three CDA
 units, while the multiplier for the fraction of groundwater recharge GW-RFM was selected for one other CDA
 unit. The calibration parameter maximum potential evapotranspiration SL-MEP, which limits actual
 evapotranspiration, was found to be influential in the driest CDA unit Arkansas River basin. Altogether, 14 out of
 705 the 24 parameters in Table 2-1 were selected as calibration parameters in the study on MRB.

3.3 Performance and uncertainty metrics

In this study, we only consider performance metrics for the simulated monthly time series of Q and TWSA as they
 form the basis for calculating hydrological signatures such as drought or flow indicators that are used in global-
 scale water resources assessments. While the mean is an important characteristic in the case of Q, this is not true
 710 for TWSA, which is an anomaly with a zero temporal mean during the reference period. The Nash-Sutcliffe
 efficiency is a traditional performance metric in hydrological modeling. It provides an integrated measure of model
 performance concerning mean values and variability and is computed as

$$NSE = 1 - \frac{\sum_1^n (sim_{(t)} - obs_{(t)})^2}{\sum_1^n (obs_{(t)} - \mu_{obs})^2} \quad (2)$$

where μ_{obs} is the mean of observations; $sim_{(t)}$ and $obs_{(t)}$ refer to the simulated and observed values respectively at
 715 time-step t of a total number of time steps n . The Kling-Gupta efficiency together with its three components enables
 distinguishing model performance regarding correlation, bias and variability (Kling et al. 2012), with

$$KGE = 1 - \sqrt{(CC - 1)^2 + (RBias - 1)^2 + (RVar - 1)^2} \quad (3)$$

where CC is the correlation coefficient and

$$RBias = \frac{\mu_{sim}}{\mu_{obs}} \quad (4)$$

$$720 \quad RVar = \frac{\sigma_{sim} / \mu_{sim}}{\sigma_{obs} / \mu_{obs}} \quad (5a)$$

where σ is the standard deviation and μ is the mean; the subscript sim and obs refer to simulated variate and
 observations of that variate respectively. Expressing variability as the ratio of the coefficients of variation (Eq.5a)
 ensures that bias and variability are not cross-correlated (Kling et al. 2012). In the case of TWSA, the bias is set
 to 1 in the computation of KGE, and

$$725 \quad RVar = \frac{\sigma_{sim}}{\sigma_{obs}} \quad (5b)$$

The optimal value of all the above performance metrics is one.

The uncertainty of model output as derived from the model output ensemble can be quantified by two
 uncertainty metrics. In the case of Q, the average uncertainty bandwidth (AUBW) is expressed as a fraction of the
 ensemble mean (modified from Jin et al. 2010), with

$$730 \quad AUBW_Q = \frac{1}{n} \sum_1^n \frac{UpperLimit(t) - LowerLimit(t)}{EnsembleMean(t)} \quad (6)$$

where t refers to the month and n is the total number of months. In the case of TWSA,

$$AUBW_{TWSA} = \frac{1}{n} \sum_1^n UpperLimit(t) - LowerLimit(t). \quad (7)$$

AUBW_Q can be expressed in %, while the unit of AUBW_{TWSA} is mm. Here, the highest and lowest values among all ensemble members (32 in the case of EnCDA, values for POC and GLUE listed in Table 63) are used as upper and lower limits in each month and make up the uncertainty bounds of the simulation. The metric “coverage of observations by model output” (CO) is calculated as the percentage of monthly observations including their uncertainty bounds (derived from observation errors described in Section 3.2.2) that are contained within the uncertainty bounds of the model output. A large CO value and a small AUBW value indicate a low model output uncertainty.

740 3.4 Implementation of calibration approaches in this study

3.4.1 POC

The state-of-the-art optimization algorithm Borg-MOEA (Borg Multiobjective Evolutionary Algorithm; Hadka and Reed, 2013) was applied to search the parameter space to find Pareto-optimal parameter sets. Borg MOEA not only amalgamates search operators (i.e., algorithms to generate a new generation of solutions from their parents) and strategies from benchmark optimization algorithms like NSGA-II, ϵ -NSGA-II, ϵ -MOEA and GDE3 but also has the capability of exploiting these operators based on their performance of producing better off-springs for the optimization problem at hand. Apart from the auto-adaptive operator recombination strategy, Borg MOEA includes a restart mechanism upon the occurrence of a search stagnation and strategies like population resizing and adaptive archive sizing. The NSE of monthly time series of Q and TWSA in the calibration period, NSE_Q and NSE_{TWSA}, were chosen as the two objective functions. For all CDA units, the initial population size was 400 and the improvement threshold ϵ (i.e., the side length of the ϵ -box) was set to 0.005 for all objectives. All other parameters of the algorithm were set to their recommended values (Hadka and Reed, 2013). ~~Due to the high computational demand of WHGM, we restricted each calibration to a maximum of 20,000 model runs. The POC application was run in parallel using openmpi 4.0.1 on 401 nodes of a Linux cluster machine with a Scientific Linux 7 environment.~~

All WHGM model runs for the six CDA units started in 1991. Calibration of the five sub-basin CDA units was done sequentially as follows. First, the four upstream CDA units (Fig. 2) were calibrated independently from each other. Q and ~~total water storage~~TWSA in the downstream CDA unit V Lower MRB depends on inflow from the four upstream CDA units. For each upstream CDA unit, the parameter set resulting in the highest NSE_Q at the respective calibration station was selected to transfer the best estimate of monthly Q to the downstream CDA unit. These parameter sets were then used in the calibration of the downstream CDA unit, which required running the model for the whole MRB. ~~Due to the high computational demand of WHGM, we restricted each calibration to a maximum of 20,000 model runs. The POC application was run in parallel using openmpi-4.0.1 on 401 nodes of a Linux cluster machine with a Scientific Linux 7 environment. The total runtime for the six CDA units was 72 hours.~~

3.4.2 GLUE

For each of the six CDA units, a random ensemble of 20,000 parameter sets was generated by Latin Hypercube Sampling (Campolongo et al., 2011), only varying the 8-10 influential parameters indicated in Table 21. Then, individual WGHM model runs were performed for the MRB and the four upstream CDA units (Fig. 2). Similar to the POC approach, all ensemble runs for the downstream CDA unit V Lower MRB were performed using, for each of the four upstream CDA units, the GLUE parameter sets that resulted in the highest NSE_Q at the upstream calibration station. ~~Like in the POC approach, all~~ GLUE runs started in 1991 and were done ~~on the same in parallel on 401 nodes of a~~ Linux cluster machine ~~as the POC runs.~~ The total runtime for the six CDA units was 53 hours, 26% less than for POC with the same amount of model runs.

Monthly time series of spatially averaged TWSA as well as Q at the calibration and validation stations during both the calibration and validation period were written as output, and the performance metrics (Section 3.3.) were computed. To identify behavioral and Pareto-optimal parameter sets as well as the compromise parameter sets (Eq. 1), NSE_Q and NSE_{TWSA} were used as likelihood measures.

To assess the impact of observation errors of Q and TWSA on model performance, the monthly time series of observed Q and TWSA were perturbed based on the observation errors described in Section 3.2.2. A uniform distribution of errors with the ranges of $\pm 10\%$ was assumed for Q and ± 2 standard deviations of the computed GRACE error distribution for TWSA (see Section 3.2.2). 1,000 realizations of observations of Q and TWSA were generated. Then, NSE_Q and NSE_{TWSA} values for each of the 1,000 perturbed observation time series compared to each of the 20,000 WaterGAP time series were computed. Finally, the Pareto-optimal parameter sets for each of the 1000 realizations of observations were identified. This approach for taking into account observation uncertainty for selecting behavioral parameter sets is similar to the approach taken by Blazkova and Beven (2009).

3.4.3 EnCDA

EnCDA was performed by coupling the Parallel Data Assimilation Framework (PDAF; Nerger and Hiller, 2013), which implements an EnKF approach, to WGHM. ~~32 ensemble members were generated by perturbing forcing data and calibration parameters.~~ Regarding the forcing data, an additive error of plus/minus 2°C for the temperature (with a triangular distribution around 0) and a multiplicative error of plus/minus 10% regarding the precipitation perturbation (with a triangular distribution around 1) (Eicker et al., 2014) was used. For each ensemble member, this error was set individually for each month and grid cell and applied to the daily forcing values. A spin-up phase run over 1991-2002 was performed to generate initial conditions for the calibration period. The EnKF is used to simultaneously update model parameters and storages during the calibration period 2003-2012 following Eicker et al. (2014) and Schumacher et al. (2016a, b) but considering Q observations in addition to GRACE TWSA. For this, the state vector is augmented by CDA unit-specific calibration parameters. To avoid the system being underdetermined, TWSA in 4° grid cells instead of TWSA averages over the CDA units were assimilated. Calibration parameters and water storages were adjusted with monthly time steps.

~~In the case of the CDA unit covering the whole MRB, the EnCDA was performed by the parameters indicated in Table 1 while assimilating GRACE TWSA 4° grids over the whole basin as well as Q at the Vicksburg gauge station. For the sub-basin calibration, the EnCDA was applied separately to the four upstream CDA units first. Then, the parameter sets of each ensemble member of the four upstream CDA units were set to the values obtained~~

Formatiert: Einzug: Erste Zeile: 0.5 cm

Formatiert: Absatz_mit_Einzug, Links, Zeilenabstand: einfach

805 for December 2012. For calibrating the downstream CDA unit V by EnCDA, the 32 parameter sets in each of the
810 four upstream CDA units were held constant, and states in these CDA units were not updated by DA. Parameters
were perturbed independently per CDA unit without generating spatial correlations as different parameters are
considered for the different CDA units (Table 1). An attempt to simultaneously calibrate all five CDA units was
not successful. Different from POC and GLUE, the performance metric NSE was not used to generate the
optimized parameter set ensemble but only to determine behavioral parameter sets and the compromise parameter
sets as well as for model output validation. Due to the very high computational demand of EnCDA, only 32
ensemble members could be generated.

815 Simulations for the validation period 2013-2016 were done by continuing the 32 model runs of the calibration
period with the 32 parameter sets estimated for December 2012, without any data assimilation. The ensemble mean
of the simulated output variables of the 32 ensemble runs during the validation period is assumed to be the best
estimate of the time series of output variables. The EnCDA application was run in parallel using openmpi-3.1.4
on a Linux cluster machine with a Linux CentOS 7.9 environment and 70 nodes. The total runtime for the six CDA
units was 72 hours.

820 In the case of the CDA unit covering the whole MRB, the EnCDA was performed by the parameters indicated
in Table 2 1 while assimilating GRACE TWSA 4° grids over the whole basin as well as Q at the Vicksburg gauge
station. For the sub-basin calibration, the EnCDA was applied separately to the four upstream CDA units first.
Then, the parameter sets of each ensemble member of the four upstream CDA units were set to the values obtained
for December 2012. For calibrating the downstream CDA unit V by EnCDA, the 32 parameter sets in each of the
825 four upstream CDA units were held constant, and states in these CDA units were not updated by DA. Parameters
were perturbed independently per CDA unit without generating spatial correlations as different parameters are
considered for the different CDA units (Table 21). An attempt to simultaneously calibrate all five CDA units was
not successful. Different from POC and GLUE, the performance metric NSE was not used to generate the
calibrated parameter ensemble but only to determine behavioral parameter sets and the compromise parameter sets
as well as for model output validation.

4 Results

830 Multi-objective parameter estimation may be aimed at determining 1) an optimal model parameter set that is
identified by weighting the multiple calibration objectives, e.g., the compromise solution (Eq. 1), 2) Pareto-optimal
parameter sets or 3) an ensemble of behavioral parameter sets that leads to model output that fits reasonably well
to observations given observation and other uncertainties. In any case, the calibrated parameter sets are specific to
835 the applied model structure and input, including climate forcing, net abstractions of surface water and groundwater
as well as physiographic characteristics such as the existence of surface water bodies or soil properties per grid
cell.

4.1 Model performance during the calibration period 2003-2012

Multi-objective parameter estimation may be aimed at determining 1) an optimal model parameter set that is identified by weighting the multiple calibration objectives, e.g., the compromise solution (Eq. 1), 2) Pareto-optimal parameter sets or 3) an ensemble of behavioral parameter sets that leads to model output that fits reasonably well to observations given observation and other uncertainties. In any case, the calibrated parameter sets are specific to the applied model structure and input, including climate forcing, net abstractions of surface water and groundwater as well as physiographic characteristics such as the existence of surface water bodies or soil properties per grid cell.

840

845 4.1.1 Optimal parameter sets

Differences between calibration approaches. Table 23 and Fig. 3 show the performance of the (Pareto-)optimal parameter sets as measured by NSE_Q and NSE_{TWSA} . ~~Due to the applied search algorithm As expected,~~ the POC approach is superior to the GLUE approach in identifying Pareto-optimal parameter sets ~~due to the applied search algorithm~~. In all six CDA units, the POC parameter sets lead to higher NSE values than the GLUE parameter sets, for the compromise parameter set as well as for the parameter sets that lead to either the highest NSE_Q or the highest NSE_{TWSA} . In the case of GLUE, the 20,000 ensemble members are randomly distributed in the parameter space, while the evolutionary Borg-MOEA optimization algorithm applied in POC creates many more parameter sets that are close to the Pareto front while also requiring 20,000 model runs (Fig. S1 in the supplement). For the example of the CDA unit Arkansas River basin, the POC compromise parameter set leads to NSE values of 0.74 and 0.85 for Q and TWSA, respectively, while the corresponding values in the case of GLUE are, with 0.69 and 0.83, slightly lower. ~~In all six CDA units, the NSE values of the GLUE compromise parameter set are only slightly lower than those for the POC compromise set.~~ Except in the Upper MRB, the performance of EnCDA-derived parameter sets is lower than ~~that~~ of those derived by POC and GLUE. ~~EnCDA for the MRB as one CDA unit leads to very poor results in particular regarding TWSA. This is surprising as not only parameters but also water storages are modified each month during the calibration period to obtain a better fit to observed TWSA and Q. However, a weighted RMSE and not NSE is optimized in EnCDA, which may cause the lower NSE values. The weaker calibration success of EnCDA may also be due to the small ensemble size of only 32. The EnCDA compromise solution as well as the EnCDA ensemble mean perform better than POC and GLUE in the CDA unit that is characterized by many small wetlands, the Upper MRB, where WaterGAP shows the worst performance regarding TWSA. EnCDA for the MRB as one CDA unit leads to very poor results in particular regarding TWSA, with NSE values below 0.25 for both the compromise solution and the ensemble mean and even for the ensemble member leading to the largest NSE_{TWSA} .~~

850

855

860

865

Table 23. Performance of optimal parameter sets quantified by NSE_Q and NSE_{TWSA} in the different CDA units. NSE of parameter sets achieving the highest NSE_Q or the highest NSE_{TWSA} , and of the compromise solution are listed as well as the NSE values of the EnCDA ensemble mean, the standard WaterGAP 2.2d model and an uncalibrated version of the WaterGAP 2.2d model. Results are provided for the calibration period 2003-2012. The compromise solutions were identified from Eq. 1 using $p = 2$. The best-performing calibration approach per CDA

870

unit, with the highest average NSE, is indicated in bold. The 77 CDA units of the standard calibration are shown in Figs. S2 and S3.

	NSE _Q /NSE _{TWSA}					
	Arkansas	Missouri	Upper MRB	Ohio	Lower MRB	MRB
POC: highest NSE _Q	0.74/0.85	0.83/0.50	0.82/0.27	0.89/0.82	0.90/0.69	0.90/0.51
POC: highest NSE _{TWSA}	0.63/0.89	-0.82/0.81	0.14/0.65	0.73/0.90	0.85/0.93	0.28/0.84
POC: compromise	0.74/0.85	0.73/0.71	0.67/0.48	0.87/0.86	0.87/0.91	0.83/0.73
GLUE: highest NSE _Q	0.70/0.79	0.77/0.21	0.78/0.18	0.88/0.81	0.87/0.26	0.88/0.19
GLUE: highest NSE _{TWSA}	0.24/0.88	-0.68/0.76	0.01/0.61	0.68/0.90	0.80/0.90	0.33/0.81
GLUE: compromise	0.69/0.83	0.65/0.71	0.61/0.46	0.86/0.84	0.84/0.89	0.85/0.65
EnCDA: highest NSE _Q	0.61/0.51	0.69/0.59	0.70/0.49	0.79/0.91	0.83/0.88	0.54/0.13
EnCDA: highest NSE _{TWSA}	0.59/0.84	0.40/0.66	0.07/0.67	0.63/0.94	0.74/0.91	0.44/0.23
EnCDA: compromise	0.59/0.84	0.62/0.65	0.68/0.60	0.79/0.91	0.83/0.88	0.51/0.19
EnCDA: ensemble mean	0.61/0.78	0.55/0.57	0.70/0.61	0.73/0.88	0.76/0.90	0.49/0.14
Standard calibration ¹	0.59/0.55	0.53/0.38	0.54/0.18	0.86/0.77	0.79/ -0.04	0.79/0.35
Uncalibrated ²	0.18/0.67	-1.02/0.38	0.56/0.17	0.85/0.72	0.71/0.06	0.71/0.38

¹ SL-RC and two correction factors are adjusted in 77 CDA units within the MRB, using observations of mean annual Q; calibration period 1980-2009

² SL-RC = 2, correction factors equal to 1

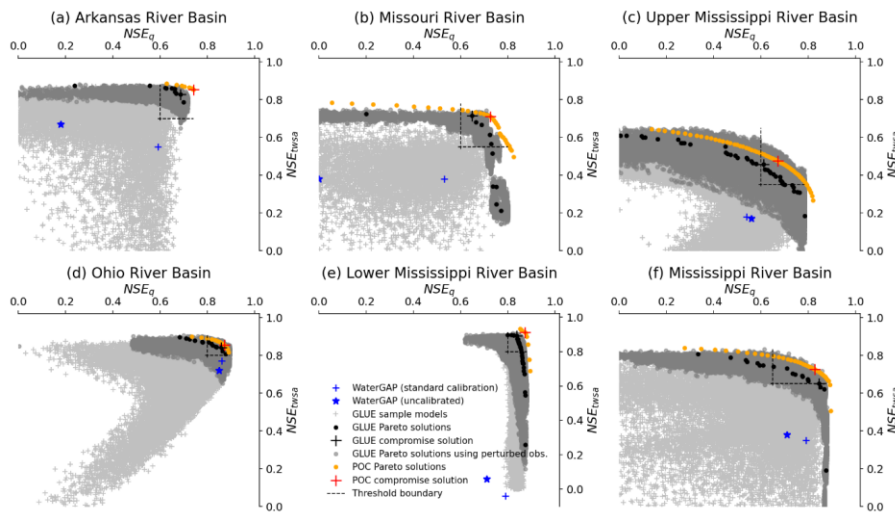


Figure 3. Performance of 1) Pareto-optimal solutions derived by an evolutionary optimization algorithm (POC) (orange dots), 2) the GLUE ensemble (light grey pluses), and 3) the Pareto-optimal subset of the GLUE ensemble (black dots), in all cases neglecting observation error when computing NSE. In addition, the performance of 4) the Pareto-optimal GLUE parameter subset for 1,000 realizations of perturbed observations are shown (dark grey dots), which shows the impact of observation errors on NSE_{KGE} . Compromise solutions of both POC and GLUE approaches are shown, too, together with the model performance after standard calibration and without calibration,


consistent with Table 23. The thresholds for behavioral parameter sets (Table 63) are indicated by the grey dashed lines.

890 *Differences between CDA units.* Optimal performance strongly varies between the CDA units. The best performance with optimized parameter sets is achieved for the humid and hilly Ohio River basin and the downstream Lower MRB, with NSE values exceeding 0.85 for both Q and TWSA in the POC compromise solution (Table 32). Q in the Lower MRB is heavily determined by inflow from the four upstream CDA units. In the relatively dry Arkansas River basin, model performance regarding TWSA is similar to the two best-performing CDA units but, with 0.74, somewhat worse regarding Q. In the Missouri River basin and, in particular, in the Upper MRB, TWSA fit to GRACE observations is worse than in the other three sub-basins. Inadequate modeling of both man-made reservoirs and wetlands is suspected to cause the low performance regarding TWSA in both basins. The Missouri River basin is the basin that is most strongly impacted by man-made reservoirs (Fig. B-A1a) and: the No-parameters of the reservoir algorithm were not were-calibrated (see Section 3.2.4). The northern parts of both basins (dark blue areas of Fig. B-A1c) are characterized by the existence of a high number of small wetlands whose location and extent are poorly quantified in WaterGAP. This stems from the classification of this whole area, in the Global Lakes and Wetland Database GLWD (Lehner and Döll, 2004), as a “wetland complex with a 25-50% coverage” with wetlands at maximum extent. This coarse information is included in WaterGAP by assigning a maximum extent of local wetlands of 35% of the cell area (Döll et al., 2020). Thus, it is not only the WaterGAP algorithms for simulating the water balance of wetlands but very likely also the poor localization of wetlands that prevent parameter adjustment to result in good fits to observations. We speculate that for these conditions, modification of water storages in EnCDA leads to an improved simulation of TWSA, and, to a smaller degree, of Q (Table 32). In the case of CDA unit MRB, where all grid cells of the whole MRB are assigned the same value of the calibration parameters (Table 32), NSE_Q is, with a value of 0.83 for POC and GLUE, very similar to the two best-performing sub-basins Ohio and Lower MRB. With a value of -0.73, NSE_{TWSA} is within the range of the respective values of all sub-basin CDA units.

915 *Benefits of multi-variable calibration.* The performance of the compromise solutions is compared to the performance of the WaterGAP variant that is calibrated in the standard way (Sect. 3.1) and of an uncalibrated WaterGAP variant. In the standard calibration, the runoff coefficient SL-RC and potentially two correction factors are adjusted individually for each of 77 sub-basins (CDA units) using only observations of mean annual Q at the sub-basin outlet (Figs. S2 and S3). In the uncalibrated variant, SL-RC is set to 2 and the correction factors to 1 throughout the MRB. For all CDA units, POC and GLUE compromise parameter sets result in higher NSE values for both Q and TWSA as compared to both the uncalibrated and the standard model variant (Table 3-2 and Fig. 3). This is also true for EnCDA except for the CDA unit MRB, where both NSE_Q and NSE_{TWSA} are worse than in both the uncalibrated and standard WaterGAP variants, and the Ohio River basin, where NSE_{TWSA} is increased but NSE_Q decreased by EnCDA. In the case of the Ohio River basin, neither the standard calibration nor the POC/GLUE compromise solutions achieve a significant improvement of the already high NSE_Q of the uncalibrated model, and even the improvement of TWSA simulation is rather small. As can be expected, the fit to observed TWSA is improved more strongly in comparison to the standard calibration than the fit to observed Q, with the strongest improvement in the small downstream Lower MRB.

Analysis of the KGE components CC, RBias and RVar (Eqs. 3-5) (Tables B1 and B2) shows that the improved NSE_Q and NSE_{TWSA} of the compromise solutions of POC, GLUE and EnCDA as compared to the standard WaterGAP results are, in all CDA units, mainly due to an improvement of the correlation (CC), the exception being NSE_Q in case of EnCDA. Thus, calibration mainly leads to improved timing of monthly streamflow and TWSA. Standard calibration only improves the bias of Q compared to the uncalibrated variant, mostly leading to an RBias value close to 1 (Table C-B1). The multi-variable approaches decrease the overestimation of mean annual Q by the uncalibrated model except in the Upper MRB and the Ohio River basin, where the overestimation by the uncalibrated model is already very small. However, as compared to the standard and uncalibrated model variants, none of the three calibration approaches improves the strong underestimation of Q variability by WaterGAP. Q variability in the compromise solutions becomes even more strongly underestimated, in the Upper and Lower MRB and for the whole MRB. TWSA variability in the Arkansas and Missouri River basins and the Lower MRB is improved as compared to the standard and uncalibrated WaterGAP but worsened in the case of the wetland-rich Upper MRB (Table C-B2).

Overestimation of observed seasonal low flows prevails in all CDA units, not only in the compromise solutions (Figs. 4-3 and S4) but also in the solutions showing the highest NSE_Q , while simulation of high flows was improved by the multi-variable calibration. The improved correlation but stronger underestimation of Q variability as compared to the standard calibration can be seen in the hydrograph of observed and simulated Q for the CDA Unit MRB, for POC and GLUE compromise solutions (Fig. 4a); the seasonal low flows are better captured with the standard calibration than with the compromise solutions. Correlation of simulated and observed TWSA is improved by achieving a small phase-of-seasonal-dynamics-shift (towards later in the year) by POC/GLUE, but in some years (e.g., 2008 and 2009), the TWSA rise still occurs too early (Fig. 4b). In addition, the relatively high water storage at the end of the years 2010 and 2011 cannot be captured by any simulation. These discrepancies in average TWSA over the MRB can be traced back to the Missouri and Upper MRB sub-basins where in many years, simulated TWSA increases too quickly and too much in the first half of the year (Figs. S4b, d).

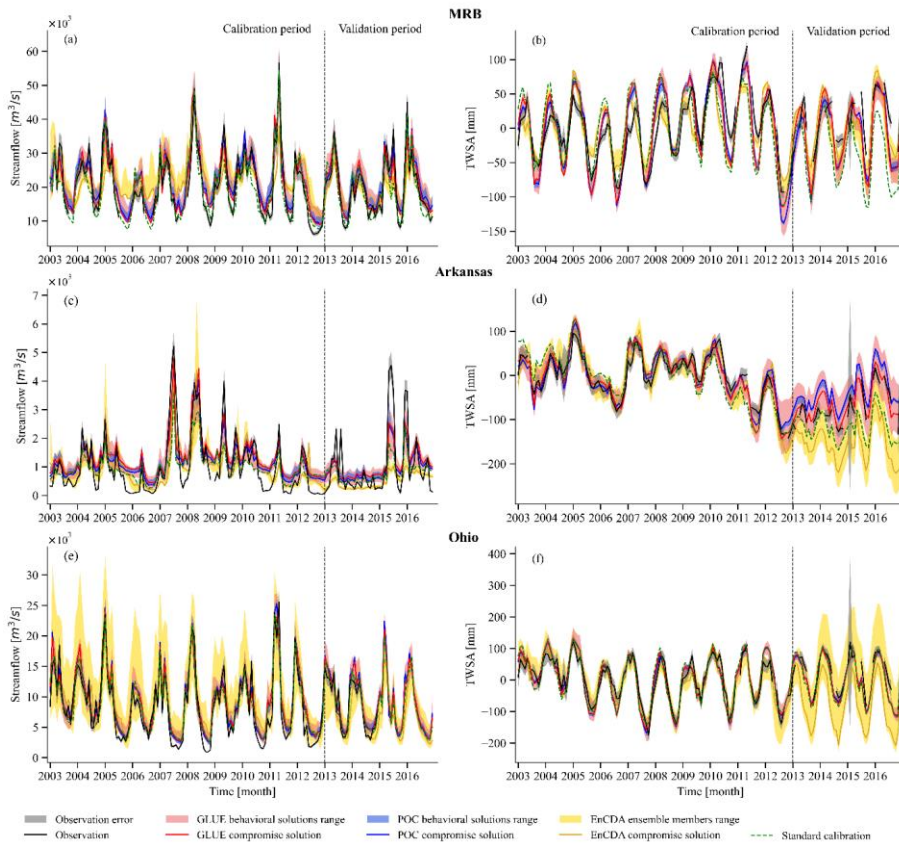

950 **Figure 4.** Monthly time series of simulated and observed Q (a, c, e) and TWSA (b, d, f) during calibration period 2003-2012 and validation period 2013-2016 for MRB (a, b), Arkansas River basin (c, d) and Ohio River basin (e, f). Observations and their assumed errors are shown together with simulated GLUE, POC, and EnCDA compromise solutions, with the range of GLUE and POC behavioral solutions (maximum and minimum monthly values of the behavioral solutions, Table 36) and the range of all 32 EnCDA ensemble members, as well as with the WaterGAP variant with standard calibration.

955

960 *In the dry Arkansas River basin, all simulations overestimate summer low flows particularly strongly (Fig. 4 c) while Q is temporally more variable in the Arkansas River basin than in the MRB (Fig. 4e). The seasonal low flows in the Arkansas River basin are extremely overestimated by all WaterGAP model variants, with EnCDA sometimes reaching observed low values but not simulating the temporal dynamics and POC achieving a slightly lower overestimation than GLUE. Simulation of high flows was improved by multi-variable calibration (Fig. 4c). TWSA performance of the compromise solutions is much better than that of the standard WaterGAP (Fig. 4d). The Ohio River basin is the CDA unit with the best model performance and little change due to any calibration,*

965 except a slight improvement of TWSA correlation (Fig. 4e, f). However, also here an overestimation of seasonal
low flows in about half of the calibration years cannot be improved by parameter adjustment (Fig. 4e). Altogether,
the visual inspection of the hydrographs of all six CDA units reveals that even if multi-variable calibration leads
to improved performance metrics, fit to observations can only be slightly improved (*mainly with respect to timing*)
970 as compared to the standard calibration (Figs. 4.3 and S4), except for the much-improved fit to TWSA in the Lower
MRB (Fig. S4f).

Trade-offs between optimal fit to Q and TWSA. Trade-offs are large for all three calibration approaches, as
quantified by the NSE values for the model runs achieving the highest NSE_Q and NSE_{TWSA} , except in the two CDA
units with an already satisfactory NSE_{TWSA} in the uncalibrated model variant (Arkansas and Ohio River basins).
The optimal fit to observed TWSA then results in very poor fits to observed Q, in particular for the Missouri River
975 basin and the Upper MRB (Table 32). Considering POC, optimal TWSA performance leads to a stronger
overestimation of mean Q of 27-73% as compared to 1-18% in the case of optimal Q performance (excluding the
downstream Lower MRB) (Table CB1). While the ratio of simulated to observed variability of TWSA decreases
and thus improves, the corresponding ratio for Q decreases, too, but thus becomes worse. $RVar_Q$ ranges from 0.80
to 0.88 in the case of maximum NSE_Q and decreases to the range of 0.53-0.84 in the case of maximum NSE_Q
980 (except for the Arkansas River basin). Considering POC in the Missouri River basin as an example, the parameter
set with the best fit to observed TWSA results in NSE_{TWSA} of 0.81 but a negative NSE_Q ; the parameter set with
the best fit to Q achieves an NSE_Q of 0.83 but NSE_{TWSA} deteriorates to 0.50 (Table 32). The parameter set with
optimal fit to TWSA leads to an even higher overestimation of mean Q ($RBias = 1.73$) and an even higher
underestimation of Q variability ($RVar = 0.61$) as compared to the ensemble member with the best fit to observed
985 Q ($RBias = 1.08$, $RVar = 0.80$), while correlation slightly decreases (Table CB1). KGE components regarding
TWSA for the same CDA unit reveal that the correlation of observed and simulated TWSA strongly decreases
from 0.91 to 0.77 if optimization is done for Q instead of TWSA, while variability is overestimated somewhat
more ($RVar = 1.09$ instead of 1.03) (Table CB2). Similar patterns are observed for the CDA units MRB and Upper
MRB. In the case of the Arkansas River basin and the Lower MRB, trade-offs between optimal fits to Q and
990 TWSA observations identified by POC are lower than those identified by GLUE, which shows the advantage of
the search algorithm applied in POC.

4.1.2 Behavioral parameter sets

We identified behavioral parameter sets using thresholds for minimum acceptable performance in terms of NSE_Q
and NSE_{TWSA} , taking into account the observation uncertainties of Q and TWSA. To do this, we evaluated the
995 performance of the 20,000 simulated GLUE ensemble members with respect to uncertainty-perturbed observations
(Fig. 3 and S1), as described in Sect. 3.4.2. For GLUE and EnCDA, all parameter sets within the thresholds were
selected as behavioral, while for POC, the behavioral parameter sets are the subset of Pareto-optimal parameter
sets above the thresholds. The Pareto-optimal GLUE model runs for 1,000 perturbed observation time series (dark
grey dots in Fig. 3) served to assess the impact of observation uncertainty on performance. Not each dark grey dot
1000 represents a different parameter set because the NSE for the same parameter set varies with the perturbed
observation time series. The width of the band of the Pareto-optimal model runs in case of perturbed observations

close to the compromise solution helped to identify the thresholds for NSE_Q and NSE_{TWSA} . In the case of the poorly simulated Upper MRB, we decided to keep the thresholds above those indicated by the observation error analysis to avoid calling very poorly performing parameter ensembles behavioral (Fig. 3). We chose the compromise solution as the point of departure as we wish to give equal weight to performance for Q and TWSA. Thresholds for behavioral parameter sets vary between the CDA units due to the different optimal performances that can be achieved, in the different CDA units, by varying parameters, given a fixed model structure and the model input. The selected thresholds for behavioral solutions are indicated in Fig. 3 and Table 43, while Table 43 also provides the number of behavioral POC and GLUE parameter sets as well as of the behavioral EnCDA ensemble members.

Table 43: Number of identified behavioral parameter sets (or ensemble members) for each CDA unit that result lead to simulation results that exceed both the NSE_Q and NSE_{TWSA} thresholds. Listed are the number of behavioral parameter sets in the GLUE approach (out of 20,000 per CDA unit), the number of behavior Pareto-optimal parameter sets in the POC approach (out of 20,000) and the number of behavioral EnCDA ensemble members (out of 32).

	Thresholds for behavioral ensemble members NSE [Q, TWSA]	Number of behavioral GLUE parameter sets	Number of behavioral Pareto-optimal POC parameter sets	Number of behavioral EnCDA ensemble members
I Arkansas	[0.60, 0.70]	668	8	5
II Missouri	[0.60, 0.55]	72	24	3
III Upper MRB	[0.60, 0.35]	156	30	19
IV Ohio	[0.80, 0.80]	196	11	0
V Lower MRB	[0.80, 0.80]	1517	7	6
IV MRB	[0.65, 0.65]	138	26	0

In the case of POC and GLUE, an uncertainty band is delineated by the minima and maxima of monthly Q or TWSA values when considering all behavioral parameter sets (Figs. 34 and S4). For EnCDA, these figures show the range of all 32 ensemble members, also because there are no behavioral EnCDA members in the case of CDA units Ohio and MRB. AUBW and coverage of observations (including their uncertainty) by the uncertainty band of the model output can be expected to correlate (Section 3.3). Both AUBW and the coverage are smaller for POC and EnCDA than for GLUE (Table 54) due to their smaller number of behavioral ensemble members. When extending the considered EnCDA ensemble members to the whole ensemble of 32 members, the coverage increases slightly, but at the same time, the width of the uncertainty bands increases strongly (Table 54). Comparing the six CDA units, neither AUBW nor coverage correlates with the number of behavioral ensemble members.

Table 54. Coverage of monthly observations by model output (CO), in % of monthly observations contained in uncertainty band of observations, and average uncertainty bandwidth AUBW during the calibration period 2003-2012 for both Q and TWSA, considering only the behavioral parameter sets (Table 43). In the case of EnCDA, also the values for the whole ensemble of 32 members are shown in parentheses. AUBW for Q is listed in %, AUBW for TWSA in mm.

	Q/TWSA					
	Arkansas	Missouri	Upper MRB	Ohio	Lower MRB	MRB
POC: Coverage	24/70	55/40	29/42	49/67	48/90	52/37
GLUE: Coverage	46/94	72/57	45/61	72/87	58/95	58/59
EnCDA: Coverage	15/63	36/45	44/75	-/- ¹	57/67	-/- ¹
	(25/67)	(37/48)	(53/74)	(55/91)	(60/65)	(36/35)
POC: AUBW	22/6	26/12	16/8	17/10	7/23	19/8
GLUE: AUBW	60/49	41/28	35/29	43/43	21/82	32/26
EnCDA: AUBW	20/19	17/10	51/50	-/- ¹	16/27	-/- ¹
	(63/49)	(60/38)	(78/56)	(96/63)	(48/37)	(24/18)

¹No behavioral parameter sets identified

1035 For POC and GLUE, the average width of the uncertainty bands for Q in the six CDA units is 7-26% and 21-60% of the ensemble mean of monthly Q, respectively. For GLUE, the lowest AUBW occurs in the downstream Lower MRB, likely due to the dominance of inflow from upstream, and the highest in the Arkansas River basin (Table 47). However, even the wider GLUE bands do not cover most of the observed seasonal low flows (including the rather small observation error bands) in all CDA units, while high flow months are covered more often (Figs. 4-3 and S4). Coverage in the GLUE approach ranges from 46% to 72% of the observed Q values among the six CDA units, with the lowest values for the two CDA units with the highest underestimation of Q variability, Arkansas and Upper MRB, even though the Arkansas River basin has the widest uncertainty band.

1040 Coverage of observations including their error range by the uncertainty band is, in the case of GLUE and POC, higher for TWSA than for Q except for Missouri and MRB (Table 47). In the case of GLUE, TWSA coverage ranges from 59% to 95%. The Arkansas River basin has a low Q coverage but a very high TWSA coverage, while the Missouri River basin has the highest Q coverage and the lowest TWSA coverage even though for the Missouri River basin, the Q performance of the compromise solution is relatively poor (Tables 32 and 4). The TWSA time series for the Arkansas River basin differs from those of the other CDA units by its high ratio of interannual to seasonal variability (Fig. 4).

1050 4.2 Model performance during the validation period 2013-2016

Model performance of both the POC and GLUE compromise solutions in the validation periods is similar to the calibration periods regarding Q but much worse regarding TWSA (compare Table 6-5 to Table 3-2 for NSE values). For most CDA units and calibration approaches, the performance loss regarding TWSA between the calibration and the validation period is similarly high for the ensemble members that were identified as having the best fit to TWSA. We suspect that the poor fit of simulated TWSA to observed TWSA in the last years of the GRACE mission, where there is also a large fraction of missing monthly GRACE data (Figs. 4-3 and S4), is related to increased observational errors (compare Sect. 3.2.2). This suspicion is supported by the fact that NSE_{TWSA} of the uncalibrated model is lower for the validation period than for the calibration period, which is not the case for NSE_Q in all CDA units except the Arkansas River basin.

1060 **Table 6-5.** Model performance during the validation period 2013-2016 indicated by NSE_Q and NSE_{TWSA} , as achieved by the three calibration approaches POC, GLUE, and EnCDA as well as by the standard WaterGAP 2.2d

and the uncalibrated WaterGAP 2.2d models. The best-performing calibration approach per CDA unit, with the highest average NSE, is indicated in bold. The indication “highest NSE_{TWSA}” refers to the parameter with the best performance during the calibration period. The values in parenthesis in the line “EnCDA compromise” are NSE_{TWSA} values that are computed after normalizing TWSA during the validation period by the mean TWSA of the validation period.

	NSE _Q /NSE _{TWSA}					
	Arkansas	Missouri	Upper MRB	Ohio	Lower MRB	MRB
POC: compromise solution	0.59/-0.04	0.72/-2.76	0.79/-0.05	0.85/0.75	0.87/0.80	0.85/0.31
POC: ensemble mean ¹	0.62/0.17	0.73/-3.18	0.81/-0.09	0.84/0.76	0.86/0.81	0.83/0.32
GLUE: compromise solution	0.61/0.66	0.68/-3.44	0.74/0.02	0.86/0.72	0.84/0.77	0.84/0.11
GLUE: ensemble mean ²	0.49/0.36	0.65/-2.00	0.71/0.02	0.81/0.70	0.83/0.75	0.73/0.28
EnCDA: compromise	0.07/-3.99 (0.11)	0.02/-0.30 (-0.30)	0.68/-0.07 (-0.07)	0.74/-2.60 (0.20)	0.76/-0.66 (0.43)	0.61/-1.72 (-1.00)
EnCDA: ensemble mean ³	0.07/-2.90	-2.71/-0.94	0.62/-0.04	0.75/0.18	0.67/-0.44	0.61/-2.14
POC: highest NSE _{TWSA}	0.64/0.36	-0.45/-1.99	0.53/0.13	0.58/0.80	0.85/0.82	0.31/0.45
GLUE: highest NSE _{TWSA}	0.45/-0.02	-0.35/-0.77	0.46/0.15	0.50/0.80	0.81/0.82	0.38/0.36
EnCDA: highest NSE _{TWSA}	0.07/-3.99	-14.08/-10.60	0.63/0.20	0.75/-0.08	0.66/-1.08	0.56/-2.87
Standard calibration	0.44/-0.85	0.60/-3.70	0.47/-0.40	0.85/0.62	0.76/-6.24	0.76/-2.38
Uncalibrated	0.56/0.22	-0.80/-2.2	0.59/-0.39	0.82/0.52	0.75/-5.60	0.75/-1.58

¹Computed by running WGHM with the ensemble of behavioral Pareto-optimal parameter sets identified using POC (Table 63)

²Computed by running WGHM with the ensemble of behavioral parameter sets identified using GLUE (Table 36)

³Computed by running WGHM with the ensemble of 32 parameter sets identified using EnCDA (Section 4.1.3)

All compromise solutions perform somewhat better than the WaterGAP standard variant, except for EnCDA in the CDA units Missouri, Ohio and MRB (Table 65). Performances of the ensemble mean of the behavioral GLUE parameter sets, of the ensemble mean of the behavioral Pareto-optimal POC parameter sets and of the EnCDA ensemble mean are similar to their respective compromise solutions (Table 65). In all CDA units, POC and GLUE perform better than EnCDA regarding both Q and TWSA. POC results are slightly better than GLUE results, the exception being the Arkansas River basin where POC performance regarding TWSA degrades from its high level during the calibration period due to overestimating mean TWSA (Fig. 4).

The temporal mean value of GRACE-derived TWSA is generally unknown. The standard approach taken in this study of normalizing TWSA values to a constant mean over the reference period, here 2003-2012, may be problematic as it assumes that the mean derived over longer periods than the reference period (here 11 years) remains at the reference period value, which need not be true. Therefore, we additionally calculated, for the example of the EnCDA compromise solution, the NSE_{TWSA} after reducing the TWSA time series by its temporal

1085 mean of the validation period instead of the mean of the calibration period. The resulting NSE_{TWSA} values are, for
| most CDA units, somewhat improved (Table 65).

4.3 Characterization of estimated parameter sets


POC and GLUE identify parameter sets that are assumed to be temporally constant. Here, we compare these two
ensembles of estimated parameter sets. Starting with the CDA unit MRB, we first characterize the parameter sets
1090 of the POC compromise solution and the parameter sets leading to the best fit to either Q or TWSA. We compare
the parameter set of the GLUE compromise solution to the parameter set of the POC compromise solution. Then,
we describe the POC behavioral Pareto-optimal parameter sets as well as the GLUE behavioral parameter sets,
including parameter correlations. Finally, we highlight the most interesting results for the five sub-basin CDA
units. The EnCDA parameter sets are not considered as the EnCDA approach leads to a lower model performance
1095 than POC and GLUE.

4.3.1 CDA unit MRB

Parameter set of the POC compromise solution. In the compromise solution, the runoff coefficient SL-RC is close
to the maximum value of 3, minimizing runoff at a given soil water saturation (Fig. 5f). This SL-RC is in line with
the values obtained by the standard calibration where calibrated SL-RC are also very high (Fig. S3b). While in the
1100 standard calibration, one or two correction factors are needed in most standard calibration CDA units to decrease
mean annual runoff to the observed values, this is achieved in this study by a high value of SL-MSM, the multiplier
for the standard maximum soil water storage, which is adjusted in the POC compromise solution to a high value
of 2.5. A “deeper soil” with higher water storage capacity leads to decreased soil saturation and lower runoff, and
at the same time to higher variability of soil water storage and thus TWSA. EP-PTh, affecting potential
1105 evapotranspiration, is reduced from its standard value of 1.26 to 1.02, which seems to contradict the adjustment of
both SL-RC and SL-MSM as this should lead to a reduction of actual evapotranspiration and thus an increase in
runoff, in particular at high soil saturation values (Eq. 17 in Müller Schmied et al., 2021).

In addition to SL-MSM, three other parameters are adjusted by the calibration in a way that water retention is
increased (improving correlation with both observed Q and TWSA), while at the same time a higher TWSA
1110 variability results (decreasing or at least not improving fit to observed Q and TWSA). Both maximum wetland
(SW-WD) and lake depths (SW-LD) are increased by calibration, from 2 to 5.7 m in the case of wetlands and from
5 m to 8 m in the case of lakes, and the lake and wetland discharge coefficient SW-DC is adjusted to its minimum
value of 0.001/d. In contrast, the adjustment of the river roughness coefficient multiplier (SW-RRM) to 1.5, i.e.,
to half of the value in the uncalibrated model, leads to a doubling of flow velocity in the river as compared to the
1115 standard value and thus lower water retention (reducing correlation with observed Q and TWSA), a higher
variability of Q (improving the fit to observations) and a higher variability of TWSA (worsening the fit to
observations). In addition, the net abstraction from groundwater is decreased by 80% ($NA-GM = 0.2$). Snow melt
temperature SN-MT is lowered from the standard value of 0 °C to -2.6 °C with POC. Overall, most parameters are
adjusted to increase the correlation between observed and simulated TWSA (except SW-RRM) and reduce mean

1120 runoff (except EP-PTh). Unfortunately, the adjusted parameters increase TWSA variability (except SW-RRM),
 1125 leading to an even stronger overestimation than the uncalibrated and standard calibrated variants (Table CB2) and
 a worse underestimation of Q variability (Table CB1).

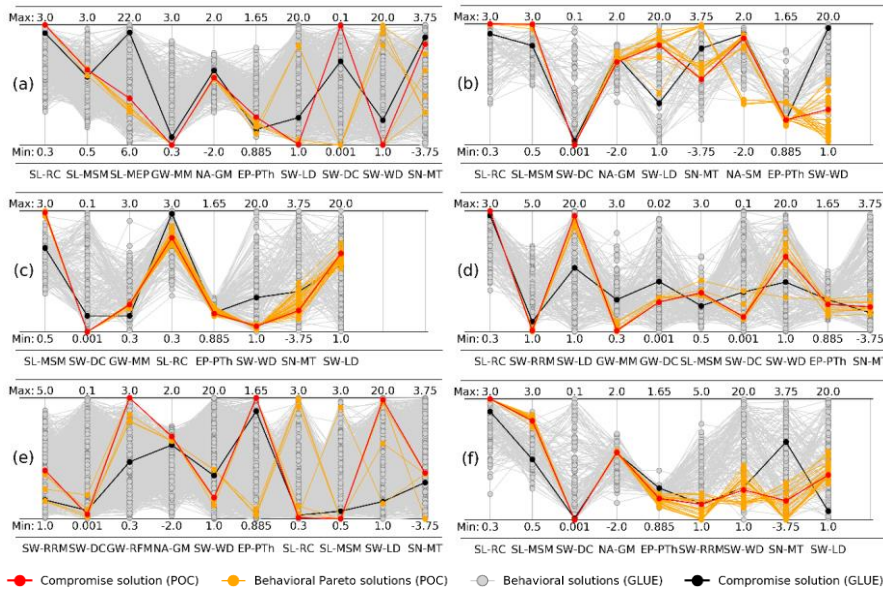

1125 **Figure 5.** Parameter sets determined by POC and GLUE calibration approaches as depicted by parallel coordinate
 1130 plots for CDA units (a) Arkansas, (b) Missouri, (c) Upper MRB, (d) Ohio, (e) Lower MRB, and (f) MRB. The
 parameter abbreviations are given at the bottom of each plot, where the order was selected to show interesting
 relations between parameter values. The numbers at the top and bottom of the plots indicate the a-priori range of
 the calibration parameters listed in Table 21. The number of behavioral solutions is given in Table 63. GLUE
 behavioral solutions are shown in greys, GLUE compromise solution in black, POC Pareto behavioral solutions
 in oranges and POC compromise solution in red.

1135 *Parameter sets with optimal fit to Q or TWSA for POC.* Regarding trade-offs, the POC parameter set that leads
 to the best fit to observed Q is characterized by a higher SW-RRM (2.2 instead of 1.5 in the compromise parameter
 set), a two-third reduction of SW-LD, a higher SN-MT, and a value of NA-GM of approximately 1. The latter
 shows that the net groundwater abstractions estimated by the water use models of WaterGAP lead to a good fit
 for the monthly Q time series. In the POC parameter set leading to the best fit to observed TWSA, SL-MSM
 reaches 3 (the maximum value), while SW-WD attains a value of more than 12 m. This parameter set includes an
 SW-RRM value of only 1 (the lower bound, leading to a minimum flow velocity) and a slightly negative NA-GM.
 1140 The latter parameter value means that the net water abstractions from groundwater, which are dominantly positive
 in the MRB (Fig. BA1e), i.e. more water is withdrawn from the groundwater than recharged by return flows, are

not only decreased but become mostly net groundwater recharge by the parameter adjustment. This could be caused, for example, by an original overestimation of the fraction of the total water abstraction that stems from groundwater and not surface water. Return flow from irrigation with surface water can lead to a net abstraction from groundwater that is negative, i.e., is an artificial groundwater recharge. However, it might also be caused by an underestimation of groundwater recharge, such that groundwater storage loss and the decrease of groundwater outflow to rivers by net groundwater abstractions would be overestimated if NA-GM was not adjusted from its standard value of 1.

1145
1150 *Parameter set of the GLUE compromise solution.* 6 out of the 9 parameters in the GLUE compromise solution are very similar to those of the POC compromise solution (Fig. 5f). The GLUE compromise solution has a slightly higher NSE_Q but a considerably lower NSE_{TWSA} (due to a lower correlation but a similar performance of variability) due to a lower soil moisture capacity and a very minimum lake water storage. In addition, the snow melt temperature is much higher.

1155 *Behavioral Pareto-optimal POC parameter sets.* The 26 behavioral Pareto-optimal parameter sets derived by POC coincide in the four parameters SL-RC, SL-MSM, SW-DC, and NA-GM (Figs. 5f and 6, and Excel file in the supplement). The parameter values of the other five parameters diverge somewhat, indicating conflicts between a good fit to observed Q and TWSA. The fit to Q decreases and the fit to TWSA increases with decreasing EP-PTh, SN-MT, and SW-RRM and with increasing SW-WD. A negative correlation is visible between the values for SW-WD (wetland depth) and the values for SW-LD (lake depth) (see also Fig. S5f); this indicates that the same impact on Q and TWSA is achieved by either a large wetland depth or a large lake depth. The negative correlation between SW-WD and the three parameters EP-PTh, SW-RRM, and SN-MT is not easily interpretable (Fig. S5f).

1165 *Behavioral GLUE parameter sets.* Behavioral GLUE parameter sets are much more diverse than behavioral Pareto-optimal parameter sets (Figs. 5f and 6). The GLUE parameter sets take into account, in an approximate manner, the uncertainty of performance indicators that stems from observation errors (Sections 3.2.2 and 3.4.2), in addition to the conflicting goals of achieving a good fit to observed Q and observed TWSA that is also reflected by the Pareto-optimal parameter sets. The 138 behavioral GLUE parameter sets, which all result in NSE values > 0.65, vary widely and for some parameters cover the whole parameter range (Figs. 5f and 6). In most behavioral sets, the SL-RC values are larger than 2, but there is even a set with a value below 1. SL-MSM ranges between 1 and 2.7, while the parameter value of the POC compromise solution is at the upper end of this range. Different from the Pareto-optimal POC solutions, SW-RRM values do not encompass very small values close to 1 but tend to be higher, mostly between 2 and 3 (Fig. 6). SN-MT as well as the three parameters related to lakes and wetlands, SW-DC, SW-LD, and SW-WD, are not constrained at all by the calibration (Fig. 5f and Fig. 6). Parameter correlations are very low, except negative correlations of EP-PTh with SL-RC, NA-GM and SW-DC (Fig. S5f).

1175

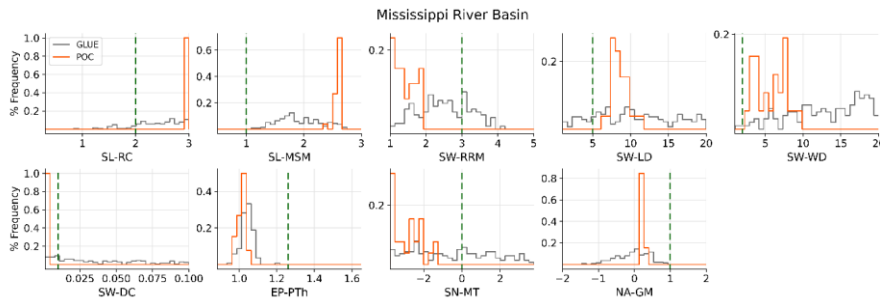


Figure 6. Histogram of parameter values in calibrated parameter sets according to POC and GLUE for the MRB (CDA unit VI). All behavioral parameter sets are considered for GLUE, while the smaller ensemble of behavioral Pareto-optimal parameter sets is shown for POC (Table 3). The total number of parameters set for POC and GLUE is listed in Table 6. The y-axis shows the ratio of the number of parameter values in each class to the total number of behavioral parameter sets, while the x-axis shows the a-priori parameter range listed in Table 2. The green dashed line indicates the parameter values of the uncalibrated WaterGAP model.

4.3.2 The five sub-basin CDA units

1185 For all five sub-basins except the downstream Lower MRB (with $SL-RC = 0.33$), calibrated $SL-RC$ is close to the maximum value of 3 in the POC compromise solution (Fig. 5). $SL-MSM$ is at its lower bound in the Lower MRB, but increases maximum soil water storage in all other CDA units; the multiplier is almost at its maximum value of 3 for the Missouri River basin and the Upper MRB, about 2 for the Arkansas River basin and 1.3 for the Ohio River basin, which is the basin with the best performance of the uncalibrated model. In all CDA units but the

1190 Arkansas River basin, $SW-LD$ reaches very high values between 10 and 20 m, and $SW-WD$ is also higher than the uncalibrated values in all CDA units except Arkansas and Upper MRB. The $SW-DC$ is at its minimum value in the Missouri River basin and the Upper MRB, close to its uncalibrated value in the Arkansas and Ohio River basins and in between in the Lower MRB. Calibrated $SN-MT$ varies strongly among the CDA units. $NA-GM$ is always below 1 to increase groundwater retention. The Lower MRB is the only CDA unit where optimal $EP-PTh$ was

1195 high (1.65) while in all other CDA units, the calibrated value was close to 1.

Overall, there is a particularly high equifinality of parameter sets in the Lower MRB, with strong negative correlations between parameters of the Pareto-optimal POC solutions (Fig. S5e). Among the POC solutions in the Arkansas River basin, the parameters wetland depth ($SW-WD$) and surface water discharge coefficient $SW-DC$ (Fig. 5a, compare POC compromise solution with POC behavioral solutions, and Fig. S5a) are so negatively

1200 correlated that the parameters alternatively take values at the opposite limits of the parameter ranges. A high value of maximum storage in surface water bodies has a similar effect on Q and $TWSA$ dynamics as a low surface water discharge coefficient that keeps water in storage. Parameters may also show very strong correlations within a very small parameter space as in the case of $EP-PTh$ and $SW-WD$ in Upper MRB (Figs. 5c and S5c).

The GLUE behavioral parameter sets cover an even larger range in the Lower MRB and the Arkansas River basin as compared to the MRB (Figs. 5 and S7). Correlations between parameters are generally low (Fig. S6),

1205

except for high negative correlations between EP-PTh and SL-RC in the Missouri River basin and between EP-PTh and SL-MSM in the Ohio River basin. However, low correlations between the calibrated parameters do not indicate a low equifinality.

4.4 Added value of spatially more resolved CDA units

1210 An important decision in model parameter estimation is the choice of CDA units, i.e., the selection of the group
of grid cells for which calibration parameters are assumed to be the same. A higher number of CDA units within
the same geographic domain leads to the adjustment of more parameters, causes a higher computational effort and
is expected to lead to an improved representation of reality. We performed two analyses to evaluate the added
value of dividing the MRB into five sub-basin CDA units.

1215 In the first analysis, we used the compromise solutions obtained for the CDA unit VI (MRB), where the same
calibration parameter values are assigned to all grid cells in the whole MRB, to compute Q and TWSA for each of
the five sub-basin CDA units. Model performance of this calibration variant (“whole basin calibration”) is
compared to the performance that is achieved in the sub-basins if each sub-basin is calibrated individually, i.e., if
1220 five CDA units are used to cover the whole MRB. Analysis for both the calibration period (Table 67) and the
validation period (Table S3+) clearly shows the added value of distinguishing five sub-basin CDA units
(calibration variant “sub-basin calibration”) as overall model performance improves in each of the five sub-basins
as compared to the calibration variant “whole basin calibration. Due to the specific search algorithm, performance
gains are more pronounced with POC than with GLUE. Performance gains are very high in the case of EnCDA
due to the poor performance of the whole-basin calibration. Considering POC and regarding Q, the added value
1225 of more CDA units is highest for the Missouri River basin, followed by the Arkansas River basin and the Upper
MRB. However, for these three sub-basins, there is no added value regarding TWSA. In the always best performing
Ohio River basin, there is a small added value for both Q and TWSA, while in the downstream Lower MRB, where
Q is dominated by inflow from the four upstream sub-basins, Q performance remains essentially unchanged while
TWSA performance improves with more CDA units.

1230

Table 76. Comparison of model performance in the five sub-basins of the MRB between the calibration of MRB as a whole (one CDA unit VI) and calibration of the individual sub-basins (five CDA units I–V). In addition, the performance of the model with standard calibration of 77 CDA units but adjusting only up to three parameters based on observed mean annual Q is shown. Model performance is indicated by NSE_Q and NSE_{TWSA} during the calibration period 2003-2012 as achieved by the compromise solutions of the three calibration approaches POC, GLUE, and EnCDA. The sub-basin calibration NSE values are identical to those in Table 32, except for MRB (see footnote 1).

	NSE_Q/NSE_{TWSA}					
	Arkansas	Missouri	Upper MRB	Ohio	Lower MRB	MRB
POC: whole basin calibration	0.65/0.83	0.38/0.71	0.57/0.48	0.82/0.77	0.83/0.69	0.83/0.73
POC: sub-basin calibration	0.74/0.85	0.73/0.71	0.67/0.48	0.87/0.86	0.81/0.90	0.81/0.79 ¹
GLUE: whole basin calibration	0.67/0.84	0.49/0.64	0.64/0.33	0.85/0.75	0.85/0.74	0.85/0.65
GLUE: sub-basin calibration	0.69/0.83	0.65/0.71	0.61/0.46	0.86/0.84	0.77/0.89	0.77/0.77 ¹
EnCDA: whole basin calibration	-0.41/0.60	-1.69/0.51	0.36/0.26	0.57/0.55	0.51/0.60	0.51/0.19
EnCDA: sub-basin calibration	0.59/0.84	0.62/0.65	0.68/0.60	0.79/0.91	0.83/0.88	0.83/-0.31 ¹

¹based on Q at Vicksburg and TSWA averaged over the whole MRB computed by a WaterGAP run, in which the calibration parameters in the five sub-basins (CDA units I-V) were set to their respective compromise solution values.

An evaluation of the performance regarding the mean of TWSA over the entire MRB using the individual parameter sets of the five sub-basin CDA units shows a small added value of using sub-basin CDA units in the case of POC and GLUE while in the case of EnCDA the already poor fit to TWSA in the whole basin variant is further degraded (column MRB in Table 76). However, EnCDA estimation of Q at Vicksburg is much improved with five CDA units and reaches the high values of GLUE and POC, both of which show a slight degradation of the Q simulation at Vicksburg as compared to the whole-basin calibration.

In the second analysis, we evaluated the ability of the different calibration variants to simulate Q at six Q gauging stations that were not used for model calibration in this study; three are located in the Missouri River basin and three in the Ohio River basin (Fig. 2). Differences between the stations are larger than between the calibration approaches. Good NSE_Q values are only achieved at two stations, Mt. Carmel and Louisville in the Ohio River basin. The best performance at Mt. Carmel is achieved with the whole-basin GLUE approach ($NSE = 0.77$), while the POC sub-basin approach achieves the optimal performance at Louisville, with $NSE = 0.91$. (Table 78). Sub-basin calibration strongly improves NSE as compared to whole basin calibration in the case of the Platte River station at Louisville for both POC and GLUE, by reducing the bias (RBias) but decreasing correlation (CC) and the fit to observed Q variability (RVar) (Table 79) but not during the validation period (Table S2S4). There is some added value of sub-basin calibration regarding Q simulation at the Louisville station on the Ohio River for both the calibration and the validation period. **At this station, sub-basin calibration also leads to higher NSE values as compared to the standard calibration and uncalibrated WaterGAP variants.** For the other four stations, however, sub-basin calibration leads to worse performance than whole-basin calibration during the calibration period. For

the station on the Cumberland, which is not a calibration station in the standard calibration, the standard calibration even leads to a better performance than all the ensemble-based calibrations for both the calibration and validation period. At the Bismarck station on the Missouri River, where model performance is similarly poor as on the Cumberland, even the uncalibrated WaterGAP variant performs better or similar to the calibrated variants due to the highest correlation. During the validation period, the performance of all three calibration approaches becomes very low at the three stations in the Missouri River basin (Table S2S4), while it remains constant or even improves for the three stations in the Ohio River basin. No calibration approach performs consistently better than any other approach; performance rather depends on the period and the station. Overall, calibration using Q observations on downstream stations only leads to apparently random changes in Q simulation at upstream stations that have not been used in the calibration.

Table 78. Comparison of model performance at the six Q validation stations in the Missouri and Ohio sub-basins of the MRB (Fig. 2) between the calibration of MRB as a whole (CDA unit VI) or calibration of the individual sub-basins (CDA units I–V). Model performance is indicated by NSE_Q and the three KGE components during the calibration period 2003–2012 as achieved by compromise solutions of the three calibration approaches POC, GLUE, and EnCDA. In the case of CDA, the performance metrics for the 2003–2012 CDA run are shown and not of a run with the parameter set of December 2012. The best-performing calibration variant for each station is shown in bold. In addition, performances of the standard and uncalibrated WaterGAP model variants are shown.

	NSE _Q /CC/RBias/RVar					
	Missouri near Landusky	Missouri at Bismarck ¹	Platte at Louisville ¹	Wabash at Mt Carmel ¹	Ohio at Louisville	Cumberland at Nashville
POC: whole basin calibration	0.30/0.73/ 0.67/1.10	-0.04/0.38/ 0.68/0.29	-0.56/0.79/ 1.61/0.95	0.74/ 0.91 / 1.24/0.74	0.78/0.91/ 1.11/0.68	0.37/ 0.86 / 1.59/0.46
POC: sub-basin calibration	0.23/0.78/ 0.58/1.45	-0.38/0.41/ 0.41/0.51	0.54/ 0.83 / 0.96/1.26	0.65/0.87/ 1.24/0.81	0.91/0.96 / 1.08/0.84	0.32/0.84/ 1.62/0.54
GLUE: whole basin calibration	0.50 /0.80/ 0.80/1.30	-0.03/0.32/ 0.69/0.40	-0.55/0.76/ 1.57/ 0.98	0.77/0.91 / 1.20/0.80	0.83/0.92/ 1.05/0.80	0.42/0.85/ 1.53/0.49
GLUE: sub-basin calibration	0.41/0.77/ 0.72/1.25	-0.15/0.39/ 0.56/0.41	0.58 /0.80/ 1.00 /1.05	0.67/0.87/ 1.25/0.76	0.87/0.94/ 1.07/0.81	0.31/0.84/ 1.62/0.48
EnCDA: whole basin calibration	0.20/0.56/ 1.00 /0.89	-1.09/-0.32/ 1.42/0.45	-8.98/0.57/ 3.15/0.60	0.66/0.85/ 1.09 /0.58	0.41/0.71/ 0.86/0.55	0.24/0.59/ 1.30 /0.36
EnCDA: sub-basin calibration	0.48/0.74/ 1.12/0.83	0.46/0.89/ 1.47/0.53	-1.8/0.42/ 1.79/0.77	0.59/0.89/ 1.38/0.67	0.65/0.82/ 1.00/0.64	0.13/0.69/ 1.58/0.51
Standard calibration	0.37/ 0.81 / 1.19/ 1.06	0.36/0.64/ 1.03 /0.40	0.04/0.71/ 0.99/1.40	0.70/0.87/ 1.09 /0.97	0.78/0.89/ 1.03/0.79	0.52 /0.84/ 1.42/ 0.56
Uncalibrated	0.40/0.77/ 1.11/1.08	0.47/0.82 / 1.38/0.62	-6.30/0.69/ 2.26/1.21	0.69/0.89/ 1.20/0.88	0.78/0.88/ 0.98/0.86	0.40/0.84/ 1.54/0.48

¹Calibration station of standard calibration

5 Discussion and conclusions

In this study, three ensemble-based methods for estimating optimal and behavioral parameter sets for the global hydrological model WaterGAP using observations of streamflow (Q) and total water storage anomaly (TWSA) are presented and evaluated for the Mississippi River basin. Two spatial calibration set-ups were tested. The whole basin down to the Q observation station Vicksburg was either treated as one CDA unit with spatially uniform calibration parameters, or the basin was divided into five sub-basins that were treated as individual CDA units. In each case, observations are monthly time series of Q at the most downstream grid cell of each CDA unit and of monthly time series of TWSA spatially averaged over the CDA unit (POC and GLUE) or 4° boxes (EnCDA) during the period 2003–2012. Based on a sensitivity analysis for each CDA unit individually, 8–10 calibration parameters were adjusted in each CDA unit. For each CDA unit and calibration approach, an “optimal” compromise parameter set could be determined. A method for taking into account the uncertainty of Q and TWSA observations in the selection of behavioral ensemble members was developed. This method is based on the GLUE ensemble, and the derived performance thresholds, which define which parameter sets can be regarded as acceptable and informative given the observation uncertainties, can be applied to all three calibration approaches.

5.1 Advantages and disadvantages of the three multi-variable calibration approaches

POC is most effective in reducing the uncertainty of GHM model output by identifying (Pareto-)optimal parameter set or one compromise parameter set that leads to the overall best fit to all observation variables. However, we found in our study that GLUE is only slightly less effective in doing this; the differences between the time series of Q and TWSA computed by POC and GLUE are small compared to the discrepancies to the observations (Figs. 3 and S4). The major advantage of GLUE is that without any additional model runs, the GLUE parameter ensemble can also be used to identify behavioral parameter sets and thus quantify the model output uncertainty given the uncertainty of the observations. In addition, GLUE has a smaller computational burden than POC if alternative calibration objectives are to be tested as no new model runs are required in the case of GLUE. The computational burden of POC and GLUE, which is dominated by the number of parameter sets used to compute the alternative model output, is rather similar (Sections 3.4.1 and 3.4.2).

Theoretically, EnCDA is, similar to GLUE, capable of both decreasing and quantifying the uncertainty of GHM model output. However, unlike POC and GLUE, the “best estimate” of model output in ensemble Kalman filter methods is not connected to one specific parameter set but is determined by the mean over the outputs of all ensemble members. Therefore, computations with an EnCDA calibrated model, e.g. for a period without observations, such as the validation period in our study, require that the model is not run only once but, with the parameter values obtained at the end of the calibration period, as many times as the ensemble has members (32 times in our study, Section 3.4.3). These ensemble runs then enable us to compute a best estimate as well as well as an uncertainty band that takes into account the uncertainty of the observations and the model as well as of some climate input. However, as EnCDA does not compute an optimal parameter set, it cannot be efficiently used for many model applications. In the case of POC and GLUE, the model needs to be run only once, with the compromise parameter set, to obtain the best estimate of model output given the observations used for model calibration.

Formatiert: Einzug: Erste Zeile: 0.5 cm

1320 The poorer performance of EnCDA in simulating Q and TWSA during the calibration period as compared to
POC and GLUE is surprising as in EnCDA not only parameters but also water storages are adapted each month.
1325 The low EnCDA performance may be due to the small ensemble size of only 32 (instead of 20,000 in the case of
POC and GLUE) caused by the high computational demand of the EnCDA approach, is
strongly limited by its high computational burden which restricted the number of ensemble members in our study
to 32, as compared to 20,000 in the case of POC and GLUE. This very small ensemble is likely the reason for the
generally lower performance of the EnCDA results as compared to POC and GLUE both during the calibration
and validation periods. In the case of EnCDA, EnCDA calibration and data assimilation using only one CDA unit
for the whole MRB even failed in the sense that it resulted in a worse performance regarding both Q and TWSA
1330 than that of the uncalibrated WaterGAP during the calibration period 2003-2012. Regarding the five sub-basin
CDA units, performance for all but one CDA unit was worse than that of POC and GLUE even though not only
parameters but also water storages are adjusted in EnCDA. Performance was, however, improved over the standard
and uncalibrated model variants for 4 out of 6 CDA units, in particular regarding TWSA. Q simulation by EnCDA
during the calibration period might be improved by using log Q instead of Q (Clark et al., 2008; Paiva et al., 2013),
and in the case of dry world regions, by censoring no flow observations (Wang et al., 2020). Note that we define
1335 performance generally in terms of NSE, while EnCDA unlike POC and GLUE does not optimize NSE but rather
the RMS of model-observation differences.

During the validation period 2013-2016, when EnCDA uses the 32 parameter sets obtained at the end of the
calibration period (December 2012) to compute Q and TWSA without any update of water storages, TWSA and
to a lesser extent Q “drifted off” from the observations, resulting in very poor fits. This may be explained by the
1340 fact that the monthly parameter updates in EnCDA absorb model misrepresentations that generate seasonally
varying errors such that the December 2012 parameter sets were not able to lead to a reasonable simulation during
the whole four years of the validation period. Unlike EnCDA, POC and GLUE decide on optimal parameter sets
based on the overall behavior during the calibration period, based on all simulated and observed calibration
variables.

1345 POC and GLUE show similar performances. However, the search algorithm in POC leads to better
identification of (Pareto-)optimal parameter sets than GLUE, for the same computational burden, even though the
difference between the time series of Q and TWSA computed by POC and GLUE is small compared to the
discrepancies to the observations (Figs. 4 and S4). Therefore, POC is preferable to GLUE if only one optimal
parameter set, e.g., the compromise parameters set, or Pareto optimal parameter sets are to be identified.
1350 Application of GLUE is required for the identification of behavioral parameter sets and thus an estimation of the
uncertainty of simulated WaterGAP output.

5.2 Added value of multi-variable calibration as compared to the standard WaterGAP calibration for identifying one “optimal” parameter set

1355 The optimal or compromise parameter sets identified by multi-variable calibration with all three approaches result
in better simulations of both Q and TWSA during the calibration period as compared to the standard WaterGAP
for all six CDA units, except for EnCDA in the case of the whole MRB (Table 32). However, the added value of

any calibration is very low in the humid and hilly Ohio basin where the performance of the uncalibrated model is already good. As can be expected, the improvement of TWSA simulations is more pronounced than the improvement of Q. Higher NSE_Q values are mostly caused by improved correlation, while Q variability is still underestimated and low flow overestimated in all CDA units, and in three CDA units even more strongly than by the standard and uncalibrated WaterGAP variants. In two CDA units, the mean Q is overestimated by more than 10% (Table [C-B1](#)). The much higher NSE_{TWSA} values of the compromise solutions as compared to standard WaterGAP are also mainly caused by much-improved correlations, with improved or worsened TWSA variabilities depending on the CDA unit (Table [C-B2](#)). The analysis of model performance at the same observation locations for the validation period 2013-2016 confirms the added value of POC and GLUE.

However, visual inspection of the hydrographs for both the calibration and validation periods reveals that the fit to observations can only be improved slightly by the multi-variable calibration. An exception is the simulation of TWSA in the Lower MRB, which is affected by intensive irrigation in the Mississippi Embayment. There, standard WaterGAP simulates a declining TWSA trend due to groundwater depletion, which does not occur anymore with the three multi-variable approaches that make use of observed TWSA (Fig. S4f). The underestimation of seasonal-summer low flows in all six CDA units remains after calibration, not only in the compromise solutions (Figs. 4-3 and S4) but also in the POC and GLUE runs with the highest NSE_Q . Likely reasons for the overestimation of summer low flows are an inaccurate simulation of the release from man-made reservoirs or an actual loss of river water to the subsurface, which cannot be simulated by WaterGAP (and most hydrological models).

An advantage of POC and GLUE over the standard WaterGAP calibration is that by adjusting 8-10 parameters per CDA unit, it is possible to achieve higher NSE values for Q without having to use any correction factors. In the standard calibration, both areal and station correction factors are necessary for many CDA units in the western part of the MRB to reduce simulated mean annual Q to observed values (Calibration status CS3 and CS4 in Fig. S3a). It is particularly beneficial that station correction factors (Fig. S3d) are avoided by the new calibration approach as they lead to abrupt changes in Q and destroy mass conservation (Müller Schmied et al., 2021). Even by adjusting only 9 parameters homogeneously in the whole MRB using monthly time series of observed Q and TWSA, improved model performance is achieved, compared to adjusting more than 100 parameters in 77 CDA units in the standard WaterGAP calibration, except for the Ohio River basin and Q in the Missouri basin. This statement only relates to the Q observations considered in this study, not to the Q at all 77 standard calibration stations.

There appears to be almost no added value of the multi-variable calibration approaches for the simulation of Q at upstream locations within the calibrated CDA unit where Q observations were not used for calibration (Table [7-8](#)). This may be due to the very large and heterogeneous CDA units; the CDA unit MRB covers almost 3 million km^2 , while the largest sub-basin CDA, the Missouri River basin covers 1.35 million km^2 and the smallest, the lower MRB, still 0.25 million km^2 .

5.3 Estimation of WaterGAP output uncertainty

Both GLUE and EnCDA aim at estimating model output uncertainty, but the small ensemble size of EnCDA prevents a meaningful estimation. ~~The presented application of the GLUE approach aims at quantifying the uncertainty of WaterGAP output due to parameter uncertainty, taking into account the uncertainty of model output observations. The estimated uncertainty bands estimated by GLUE underestimate the model uncertainty. The identified 72 to 1517 behavioral parameter sets (Table 43), out of a total of 20,000, result in uncertainty bands that are small compared to the variability of Q and TWSA, in particular seasonal variability (Figs. 4 and S4). Unfortunately,~~ only 46-72% of the monthly Q estimates of the GLUE behavioral model runs fall into the uncertainty band of observed Q, depending on the CDA unit (Table 45). With 59-95%, TWSA coverage is higher, except in the Missouri River basin.

Low coverage values indicate that the model suffers from errors in either model input or model structure. An explanation for the overestimated low flows might be that WaterGAP, like most hydrological models, is not able to simulate water loss from the river into the groundwater, while a recent study has found strong indications for extensive losing river conditions in the MRB (Jasechko et al., 2021). Further model uncertainties that appear particularly relevant for the limited performance of WaterGAP in the different CDA units are related to the modeling of man-made reservoirs, which may be particularly relevant for the Missouri River basin, and the poor specification of location and extent of small wetlands (Prairie potholes) in the Missouri River basin and the Upper MRB.

The relatively thin uncertainty bands indicate the equifinality of the very diverse behavioral parameter sets (Fig. 5) for the study period. The widths of the uncertainty bands of POC and GLUE do not change appreciably between the calibration and the validation period (Figs. 4-3 and S4), which indicates that calibrated parameter sets are transferable between the two periods. The exceptions are the TWSA uncertainty bands in the Arkansas River basin (Fig. 4) and Lower MRB (Fig. S4) which, for unknown reasons, are wider in the validation period, indicating that parameter sets that lead to similar model output in the calibration period might result in more discrepant model output. under changed climatic conditions.

5.4 Trade-offs between optimal simulation of Q and TWSA

Trade-offs between the optimal simulation of Q and TWSA are relevant in all CDA units. POC trade-offs are only slightly smaller than GLUE trade-offs ~~when considering the NSE values achieved by parameter sets that lead to either maximum NSE_Q or maximum NSE_{TWSA} (Table 32).~~ There are particularly large trade-offs between a good fit to Q and TWSA in two sub-basin CDA units with many surface water bodies, i.e., in the Missouri River basin (reservoirs, wetlands and lakes) and the Upper MRB (wetlands and lakes) (Fig. BA1) and, accordingly, also in the CDA unit MRB. In the Missouri River basin, for example, the POC parameter set resulting in an optimal fit to observed Q has an NSE_Q of 0.83 but an NSE_{TWSA} of only 0.5, while the POC parameter set resulting in an optimal fit to observed TWSA improves NSE_{TWSA} to 0.81 but degrades NSE_Q to the very poor value of -0.82 (Table 32). We suspect that the poor knowledge of the location and extent of small wetlands and the difficulty of simulating the operation of man-made reservoirs (without adjustment of parameters) are the main reasons for the strong trade-offs. In most CDA units, an optimal TWSA fit leads to a strong overestimation of mean Q and an even stronger underestimation of Q variability (Table CB1), while a good fit to Q leads to an overestimation of TWSA variability,

in different degrees depending on the CDA unit (Table CB2). We speculate that this trade-off cannot be explained by potential errors of the used-GRACE TWSA time series ~~that due~~ to leakage effects, the impacts of which are not included in the values of GRACE TWSA used in this analysis (see Section 3.2.2). For the Lower MRB, the multiplicative leakage re-scaling factor of 1.41 (see Section 3.2.2) matches the overestimation of TWSA variability (RVar = 1.42 for the POC parameter set with the best fit to Q, Table CB2), but this may be by chance. Besides, the estimated re-scaling factor may be biased by an overestimated negative TWSA trend in the standard WaterGAP run that was used to compute it.

Much smaller trade-offs between the optimal fits to observed Q and TWSA were found with another hydrological model in a calibration study for 83 European river basins, where both Q and TWSA observations were used for adjusting up to 53 parameters in a basin-specific manner (Rakovec et al., 2016). When TWSA was considered in addition to Q in the calibration objective, the correlation of observed and simulated Q decreased slightly while bias and variability remained almost unchanged. However, TWSA correlations that were achieved by calibration ~~in that study~~ were extremely low, with a median ~~CC~~ of 0.56 if only Q observations were used in the calibration, increasing to only 0.67 if in addition TWSA observations were included. In our study, TWSA correlations are much higher; for the calibration period, they vary between the six CDA units from 0.80-0.95 in the case of the POC compromise solution. Even the uncalibrated WaterGAP variant leads to CC values in the range of 0.76-0.93.

Accessible Q observation data are rare in many parts of the globe, while GRACE TWSA observations cover the whole globe and are freely available ~~and could be used to calibrate hydrological models in areas without available Q observations. However, given the tradeoffs between optimal model fits to observed Q and TWSA, one may suspect that calibration using TWSA only may improve the TWSA simulation but degrade the Q simulation. The use of GRACE TWSA observations strongly increased the fit of simulated to observed TWSA during the calibration and validation periods. But is the calibration of WaterGAP against TWSA observations only beneficial for the estimating Q? This question can be answered by~~ analyzing the performance metrics of the GLUE a-priori ensemble of 20,000 parameter sets, ~~we find that in-~~ For both the calibration and the validation period, Q simulation degrades in three of the six CDA units in the variants “highest NSE_{TWSA}” as compared to the uncalibrated WaterGAP. This is the case in the Upper MRB where WaterGAP struggles with uncertain information regarding the location and extent of small wetlands, in the Ohio River basin in which already the uncalibrated WaterGAP variant simulates Q well and in the MRB (Tables 23 and 56). ~~In the Missouri River basin, Q simulation by the uncalibrated model is very poor and remains so after calibration against GRACE TWSA only.~~ In the Murray-Darling basin, EnCDA using GRACE TWSA only resulted in Q overestimation (Schumacher et al., 2018). Thus, a calibration against GRACE TWSA only may degrade or not the Q simulation as compared to an uncalibrated model run, and it is difficult to estimate where such degradation could occur. Further studies are needed to understand under which circumstances calibration against GRACE TWSA does not degrade the simulation of Q.

5.5 Added value of sub-basin CDAs instead of one basin CDA

Considering Q performance at the outlet of the five sub-basin CDA units and the aggregated TWSA, overall model performance is somewhat improved if calibration is done individually for the five CDA units instead of adjusting

1470 parameters homogeneously over the whole MRB, for both the calibration (Table 76) and the validation periods
(Table S1S3). The added value is smaller for the validation period. However, in three CDA units, TWSA
performance during the calibration period ~~is~~ is not affected by the higher number of CDA units, while Q at the
1475 calibration stations was improved if the station ~~is~~ was used in the calibration. In addition, Q performance at gauging
stations inside the two sub-basin CDA units ~~was~~ is not improved by sub-basin calibration (Tables 8-7 and Table
S2S4). Q performance at these gauging stations appears to be unrelated to the type of calibration done (including
no calibration) as the best-performing calibration approach varies randomly among CDA units and periods.
Therefore, to increase the quality of Q simulations with WaterGAP, we suggest using CDA units that are smaller
than the Mississippi River sub-basins selected for this study, i.e., smaller than about 400,000 km². This is also
supported by the study of Mizukami et al. (2017) who selected 531 CDA units for the continental US. However,
for simultaneous calibration against GRACE TWSA, CDA units should not be smaller than 100,000-200,000 km²
, depending on water variations in the unit (Vishwakarma et al., 2021; Longuevergne et al., 2010).
1480 AlternativelyTherefore, the joint calibration against multiple Q observations within a CDA unit should be tested
(Xie et al., 2012; Wanders et al., 2014).

5.6 Characteristics of identified (Pareto-)optimal and behavioral parameter sets

In (Pareto-)optimal parameter sets, the optimized runoff coefficient SL-RC obtains values very close to its upper
bound in all CDA units except the downstream Lower MRB where Q is dominated not by runoff generation within
1485 the CDA unit but by inflows from upstream CDA units. High SL-RC values, which tend to decrease runoff, are
also obtained by the standard WaterGAP calibration (Fig. S3). Further reduction of runoff is achieved in this study,
except for the downstream Lower MRB, by increasing maximum cell-specific soil water storage by multiplication
with optimized SL-MSM values that are larger than 1, ranging between 1.3 for the best-simulated Ohio River basin
to almost 3 for the Missouri River basin and the Upper MRB. A larger maximum soil water storage leads to
1490 decreased soil saturation and lower runoff, and at the same time to higher variability of soil water storage and thus
TWSA. In general, the fit to TWSA is improved if storage capacities are increased, not only in the soil but also in
wetlands and lakes.

It is surprising that EP-PTh, a factor in the equation of potential evapotranspiration, is reduced in all CDA units
(except in the Lower MRB) from its standard value of 1.26 to values around 1, which leads to reduced actual
1495 evapotranspiration and thus increased runoff. The multipliers adjusting grid cell values of human net water
abstraction from groundwater (adjusted in four CDA units) tend to be less than zero, indicating an overestimation
of net groundwater abstractions by the standard model variant. Water abstraction from surface water bodies
(adjusted only in the Missouri River basin) might be underestimated. The optimal values of the other calibration
parameters can differ strongly between POC and GLUE compromise solutions or between the Pareto-optimal POC
1500 solutions (Fig. 5). The correlations between calibration parameters can be high and differ strongly between the
CDA units; general patterns cannot be seen (Fig. S5). For example, SL-RC can correlate positively or negatively
with SL-MSM and EP-PTh.

Formatiert: Einzug: Erste Zeile: 0 cm

Formatiert: Einzug: Erste Zeile: 0.5 cm

~~Regarding the behavioral POC parameter sets, the better the fit to TWSA is, the higher the maximum wetland depth SW-WD, ranging between 1.5 m and 11 m. The same is true for other parameter values that increase water storage capacities, such as SL-MSM, SW-WD, or SW-LD.~~

The ranges of most parameters in the behavioral GLUE parameter sets, which take into account the impact of observation uncertainty on optimized parameter sets, are only slightly narrower than the a-priori parameter ranges (Figs. 5, 6 and S7). This is the case even though behavioral parameter sets are only a very small fraction of 0.04% - 0.76% of the 20,000 a-priori parameter sets of GLUE. We found larger equifinality in TWSA simulation than in Q simulations except for the downstream Lower MRB where simulated Q is dominated by the inflow from upstream as quantified by the compromise parameters sets of the four upstream CDA units (Excel file in supplement). That TWSA observations constrain parameter sets less than Q observations was also discovered in the multi-variable calibration study for ten large basins in Sub-Sahara Africa by Xie et al. (2012).

~~Likely due to the fixed and dominant inflow from upstream, there was hardly any narrowing of the a-priori parameter range for the downstream Lower MRB (Figs. 5 and S7).~~ EP-PTh is the only parameter whose distribution shows a peak (except for the Lower MRB, Figs. 6 and S7). Small peaks are often seen for SL-MSM and the net abstraction multipliers. SL-RC mostly shows a low frequency of values below 1 and increasing frequencies towards the upper parameter bound. ~~Uniform distributions without any significant narrowing are seen for SN-MT, SW-DC, SW-WD, and SW-LD.~~ Parameter correlations among the behavioral parameter sets are mostly low, except for negative correlations that exist, depending on the CDA unit, between EP-PTh and parameters such as SL-RC, SL-MSM, and SN-MT (Fig. S6).

Multi-variable calibration did not lead to improved identifiability of parameters, i.e., the determination of a small range of suitable parameter values, except for the three parameters SL-RC, SL-MSM and EP-PTh. This makes the application of the “optimal” compromise parameters set derived by POC problematic for estimating, e.g., groundwater recharge, groundwater abstractions and surface water abstractions. Examples are the multipliers for net groundwater and surface water abstractions in the Missouri basin, where the POC compromise solution suggests that net groundwater abstractions are 25% lower and net surface water abstractions are 50% higher than estimated without parameter adjustment (Fig. 5b and Excel file in supplement). Even the behavioral Pareto-optimal parameter sets, which are obtained by optimizing the fit to observations that are assumed to be error-free, include severe decreases but also slight increases of net groundwater abstraction as compared to the standard value as well as strong increases of net surface water abstractions but also a reversal from net abstractions to net additions of water to surface water bodies by large return flows from groundwater-sourced water to surface water bodies (Fig. 5b and Excel file in supplement). In the Arkansas basin, the POC compromise solution suggests a strong decrease of both groundwater recharge and net abstractions from groundwater, to 30% and 24% of the standard values, respectively, but very similar performances regarding the assumedly error-free observations can be obtained if both values are decreased much less or even if groundwater recharge is increased (Fig. 5a and Excel file in supplement). The remaining equifinality of the parameter sets of our study even with using two different observation variables is in accordance with the results of a calibration study for flood design in Sweden (Harlin and Kung, 1992). In that study, a large number of sets of twelve parameters were identified by model calibration using a Monte-Carlo approach, and, like in our study, it was for most parameters not the value of the individual

parameter that determined if the simulation of Q was behavioral but the combination of the parameter values within each parameter set.

6 Conclusions 5.7 Outlook

Our pilot study for the MRB has generated new methodological knowledge on how the uncertainty of GHM output can be reduced and quantified by benefiting, with the help of multi-variable parameter estimation, from the information contained in observations of multiple model output variables. Our conclusion on the suitable methods for achieving this and some caveats are summarized in Fig. 7. Model output uncertainty can be reduced by determining, for specific spatial model units (CDA units), one optimal model parameter set. The uncertainty of model output that is arising from due to the equifinality of model parameter sets given the observation uncertainties can be quantified by determining all behavioral parameter sets.

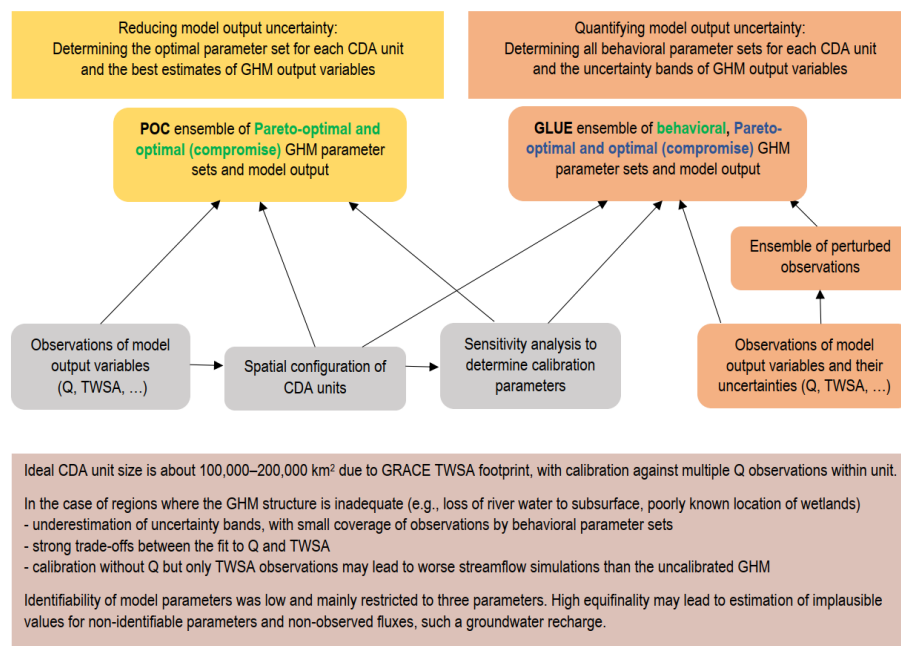


Figure 7. The proposed approach for reducing and quantifying model output uncertainty of GHM by multi-variable parameter estimation and main recommendations and caveats for applying the approach in global hydrological modeling. Green letters indicate for which purpose POC and GLUE are best suited, while blue letters indicate an acceptable capability. A CDA unit is composed of all GHM grid cells to which the same calibration parameter value is assigned.

Formatiert: Absatz_mit_Einzug

Formatiert: Absatz_mit_Einzug, Links, Zeilenabstand: einfach

Formatiert: Zentriert

Formatiert: Absatz_mit_Einzug

1560 Based on this pilot study, we suggest conclude that the multi-variable POC approach that utilizes
observations of both Q and TWSA, combined with the described sensitivity analysis, is best suited for estimating
a CDA unit-specific Pareto-optimal parameter sets for of the global hydrological model WaterGAPGHMs (Fig.
1565 7). that leads to a better fit to observations of both Q and TWSA than the simple standard WaterGAP calibration
approach. Such The derived basin-specific POC-compromise parameter sets can then be used to simulate the best
estimate of past and future water flows and storages, in particular, if various future scenarios, e.g., driven by the
output of multiple climate models, or hydrological seasonal ensemble forecasts are computed by WaterGAPthe
GHMs. While the computational burden for a global-scale model calibration of, for example, 1000 basins is high,
the run times are not prohibitive. However, in our study, mMulti-variable model calibration against both Q and
1570 TWSA allowed constrainingconstrained only three model parameters while a large range of values of all other
calibration parameters can lead to equally good fits to the observations, even if the uncertainty of observations is
neglected, as in the case of Pareto optimal POC parameter sets. Therefore, any identified POC compromise
parameter set should be applied with caution when estimating water flows such as groundwater recharge for which
no observations were considered in the parameter estimation. We suggest that the parameter interdependence of
Pareto-optimal parameter sets should be analyzed.

1575 ~~The identified POC compromise parameter set should be applied with caution.~~

As we found that Q can be simulated reasonably well only at locations where Q observations have been used
in the calibration, the selection of rather small CDA units that are similar in size to the calibration units in the
standard WaterGAP calibration will be pursued for global scale multi-variable calibration. Optimal ways of
addressing GRACE TWSA leakage errors need to be identified to increase the commensurability of simulated and
observed TWSA. Additional observation variables such as snow cover and water storage variations in lakes and
man-made reservoirs will be taken into account to further reduce equifinality. Unfortunately, no information on
groundwater levels is available at the global scale, which is likely required to constrain the parameters related to
surface water and groundwater abstraction (Hosseini-Moghari et al., 2020).

1580 The study results showhas shown that, currently, among the three approaches used, only GLUE, is the only
one of the three approaches POC, GLUE and EnCDA only the GLUE approachthat can be applied enables us
to compute, with WaterGAP, values of water flows and storages that are informed by Q and TWSA observations
and their uncertainties quantify model output uncertainty caused by the observation uncertainties (Fig. 7). All
behavioral parameter sets can be identified by applying the method for defining performance thresholds for
behavioral parameter sets that we developed in this study, which uses both the GLUE ensemble and an ensemble
1590 of perturbed observations. As model performance with the optimal (compromise) parameter set as identified with
GLUE is only slightly less than the performance with the optimal POC parameter set, GLUE can be used efficiently
to compute both the best estimates and the uncertainty bounds of GHM model output. The computational efforts
for calculating best estimates by POC and best estimates with uncertainty bounds by GLUE are similar. WThe
derived model output uncertainty bands approximately represent the impact of equifinality of parameter sets on
1595 model output and take into account the uncertainty of the observations. Such model output uncertainty bands can
be readily computed by the presented methods but wille found that the GLUE-derived model output uncertainty
bands substantially underestimate the total model output uncertainty significantly, as they do not include the impact
effects of model input and structure uncertainties.

Formatiert: Absatz_mit_Einzug, Links, Zeilenabstand:
einfach

1600 Currently, the multi-variable EnCDA approach that we followed in our pilot study is not suitable for application
for by GHM parameter estimation using Q and TWSAs, as 1) its performance is lower during the calibration period
than that of POC and GLUE, or for the large CDA unit MRB even lower than that of the uncalibrated WaterGAP
and 2) its application during the validation period (without observation data) lead to spurious results (Figs. 3 and
S4). Likely because of the ~~One~~Potential of the reasons is likely are the severe computational burden of the EnCDA
approach that only allowed setting up a very small ensemble ~~very small ensemble size that was feasible in EnCDA~~
1605 due to its severe computational burden, parameter sets and model output uncertainties could not be estimated by
EnCDA in this study, neither for the calibration period nor for projections for periods without observation data
and the intrinsic nonlinearity in simulating Q.-

1610 As we found that Q can be simulated reasonably well only at locations where Q observations have been used
in the calibration but not upstream, the selection of rather small CDA units is advised. However, the CDA unit
size cannot be smaller than approx. 100,000-200,000 km² due to the large footprint of GRACE TWSA and
observations from more than one streamflow gauging station within the CDA unit might be utilized in parameter
set optimization (Fig. 7). Additional observation variables such as snow cover and water storage variations in lakes
and man-made reservoirs may be taken into account to further constrain parameter sets. Unfortunately, no
1615 information on groundwater levels is available at the global scale, which is likely required to constrain the
parameters related to surface water and groundwater abstraction (Hosseini-Moghari et al., 2020). Figure 7 lists
further caveats for global-scale reduction and quantification of model output uncertainty by parameter estimation
that were discussed in Section 5. However, the EnCDA approach has the potential to lead to improved parameter
estimates or model structure by, e.g., detecting a seasonal variation of model parameters. Further studies should
1620 investigate the feasibility of including NSE as an optimization metric in the EnCDA approach

— We recommend that in a first step, GHMs are calibrated against observations of multiple variables
including Q and TWSA by determining optimal calibration parameter sets for major basins with available Q
observations as this is expected to improve the realism of the GHM output. To achieve this, an optimization
1625 algorithm similar to the one used for POC in this study should be applied. In a next step, a GLUE approach could
be used to additionally estimate the model output uncertainty.

Climate change impact studies for individual river basins have shown that parameter sets with a similar
performance during the calibration period may provide very different projections of climate change hazards, and
that the impact of parameter uncertainty can be similar to the impact of the selected climate or hydrological model
selection (Mendoza et al., 2016; Her et al., 2019). Therefore, consideration of parameter uncertainty by running
the hydrological model with a number of behavioral parameter sets helps to reduce the underestimation of the
uncertainty of potential climate change impact. However, producing a global-scale ensemble of potential future
changes in hydrological variables by combining not only multiple greenhouse gas emissions scenarios, global
climate models and global hydrological models (as is currently done in ISIMIP) but also model-specific behavioral
1630 parameter sets is currently infeasible. The main reason is that behavioral (or even optimal) parameter sets have not
yet been determined for any global hydrological model in a spatially explicit manner at the global scale. In addition,
the computational effort for such a multi-model/multi-parameter ensemble is likely prohibitive. We recommend

Formatiert: Einzug: Erste Zeile: 0.5 cm

Formatiert: Schriftart: 10 Pt., Nicht Fett

including, in future freshwater related climate change impact studies, a behavioral ensemble of parameter sets as determined by the GLUE approach even though this will require a significant computational effort. This should reduce the underestimation of modeling uncertainty by traditional multi-model studies. As shown in the multi-model/multi-parameter study for the Colorado River basin by Mendoza et al. (2016), parameter sets with a similar performance during the calibration period may provide very different projections of climate change hazards, and the impact of parameter uncertainty is similar to the impact of hydrological model selection.

Appendix A: 2.4 Comparison of the three calibration ensemble-based approaches

POC, GLUE and EnCDA approaches share some characteristics and differ in others (Table A1). All three start with a large number of parameter sets that are derived from a-priori assumptions on the probability distribution of calibration parameters and generate an ensemble of optimized parameter sets. EnCDA differs from POC and GLUE by simultaneously modifying model parameters and model states. EnCDA and GLUE are regarded as Bayesian approaches as they aim at deriving probability distributions of parameter sets and thus model output. In POC, the ensemble of Pareto-optimal parameter sets represents the uncertainty that is caused by the fact that due to model structure and input uncertainty, different parameter sets lead to optimal performance for different calibration objectives. Information from observations is used in all three approaches to update an a-priori belief about the probability distribution of parameters. However, parameter set selection is done in very different ways and based on different assumptions. Both POC and GLUE compare the model output over the complete calibration period with all observations to determine performance metrics. While the evolutionary search algorithm of POC starts with a small number of parameters sets, runs the model, and then generates new parameter sets with ever-improved performance metrics, in GLUE the large initial ensemble generated from a-priori parameter distributions is evaluated regarding performance metrics and the behavioral members among the initial ensemble are identified. In POC and GLUE, parameters are temporally constant. In EnCDA, an ensemble of model runs is performed in a stepwise fashion from the time of one observation to the time of the next. EnCDA updates the parameters sequentially (in our study each month) such that time series of recursive parameter estimates are computed. It is assumed that updates are informed by an ever-increasing amount of information from observations so that the parameter sets after the last update, i.e., at the end of the calibration period, are the best estimate. However, this can be disputed. A study on EnCDA using GRACE TSWA for the Australian Murray-Darling basin showed that parameter values vary in time with changes in climatic conditions within the river basin, probably due to an inappropriate model structure that does not allow the correct translation of precipitation variability into model output variability (Schumacher et al., 2018). The capability to reveal such dynamics may be advantageous for improving our understanding of model deficiencies. It needs to be investigated whether and how EnCDA can be used to determine optimal parameter sets that are suitable for model runs without adjustment of states.

In EnCDA, quantified errors of both the model and the observations are required to update water storages and parameters in each of the ensemble members (Table A1). The ensemble serves to estimate the model error, which includes parameter and climate forcing uncertainty and is calculated as the variance of the differences between each ensemble member and the ensemble mean. The EnKF applied in EnCDA represents an optimal and unbiased estimator only under the assumption that errors are Gaussian, unbiased and well-known, neither of which is the

1675 case (Wang et al., 2020; Moradkhani et al., 2005; Beven and Binley, 1992). In GLUE, the model error due to
parameter uncertainty (but not due to climate forcing uncertainty) is indirectly taken into account as the a-priori
ensemble depends on assumptions of parameter distribution, similar to POC. Observation errors may be considered
quantitatively but in most applications, they are not (Beven and Binley, 2014). In Section 3.4.2, we describe a way
1680 for taking to take into account the observation uncertainties in GLUE. Werth and Güntner (2010) suggested a way
to include observation errors in POC. First, they determined an error ellipse around the compromise solution
(defined in Eq. 1) by first generating an ensemble of observations from perturbing the observation time series with
the observation errors and then determining the range of performance values of the compromise solution for this
ensemble of perturbed observations. By considering all the non-dominated and dominated parameter sets inside
the error ellipse, they identified an ensemble of likely parameter sets that was informed by both observations and
1685 observation uncertainty. In this case, POC can, like EnCDA and GLUE, be used to estimate uncertainties of
parameter sets and model outputs. Nevertheless, it should be noted that this approach does not incorporate
observational uncertainty directly into multi-objective parameter calibration in a rigorous way. Therefore, we did
not take this approach in our study.

1690 **Table A1.** Comparison of the main characteristics of the calibration approaches—POC, GLUE and EnCDA as applied in this study.

	<u>POC</u> <u>Pareto-optimal</u> <u>calibration</u>	<u>GLUE</u> <u>Generalized</u> <u>likelihood uncertainty</u> <u>estimation</u>	<u>EnCDA</u> <u>Ensemble Kalman</u> <u>filter calibration and</u> <u>data assimilation</u>
<u>Use of a-priori parameter ensembles</u>	<u>Yes</u>	<u>Yes</u>	<u>Yes</u>
<u>Direct modification of water storages</u>	<u>No</u>	<u>No</u>	<u>Yes</u>
<u>Bayesian approach</u>	<u>No</u>	<u>Yes</u>	<u>Yes</u>
<u>Estimation of model output uncertainty</u>	<u>Uncertainty only due</u> <u>to multiple objectives</u>	<u>Yes</u>	<u>Yes</u>
<u>Selection of parameter sets</u>	<u>Once, based on all</u> <u>observations</u>	<u>Once, based on all</u> <u>observations at once</u>	<u>Recursive, parameter</u> <u>sets updated at each</u> <u>observation time step</u>
<u>Quantitative information on parameter</u> <u>uncertainties considered</u>	<u>Indirectly via an a-</u> <u>priori range of</u> <u>parameter values</u>	<u>Indirectly via an a-</u> <u>priori ensemble of</u> <u>parameter sets</u>	<u>Directly as a factor of</u> <u>model uncertainty</u>
<u>Quantitative information on climate</u> <u>forcing uncertainties considered</u>	<u>No</u>	<u>No</u>	<u>Yes, as a factor of</u> <u>model uncertainty</u>
<u>Quantitative information on observation</u> <u>uncertainties considered</u>	<u>Possible in post-</u> <u>processing, by</u> <u>limiting Pareto-</u> <u>optimal parameter sets</u> <u>to thresholds selected</u> <u>using GLUE</u> <u>ensemble</u>	<u>Possible,</u> <u>by selecting</u> <u>thresholds for</u> <u>behavioral solutions</u> <u>according to</u> <u>observation</u> <u>uncertainties</u>	<u>Yes</u>
<u>Rigorous consideration of uncertainty</u>	<u>No</u>	<u>No</u>	<u>Partly</u>
<u>Various objective functions including</u> <u>signatures can be selected</u>	<u>Yes</u>	<u>Yes</u>	<u>No</u>
<u>Weighting between different objective</u> <u>functions</u>	<u>Subjective weighting</u> <u>to identify a parameter</u> <u>set that is optimal in a</u> <u>specific context</u>	<u>Subjective weighting</u> <u>to identify parameter</u> <u>set(s) that is (are)</u> <u>optimal in a specific</u> <u>context</u>	<u>Implicit weighting</u> <u>based on model and</u> <u>observation</u> <u>uncertainties</u>
<u>Determination of Pareto-optimal</u> <u>parameter sets under the assumption that</u> <u>there is only parameter uncertainty</u>	<u>Yes, determined by</u> <u>search algorithm</u>	<u>Yes, selected from a-</u> <u>priori ensemble</u>	<u>No (due to the small</u> <u>ensemble size)</u>
<u>Complexity</u>	<u>Medium</u>	<u>Low-medium</u>	<u>High</u>
<u>Computational effort for a specific</u> <u>objective function</u>	<u>Medium</u>	<u>Medium</u>	<u>Very high</u>
<u>Computational effort for analyzing</u> <u>alternative objective functions</u>	<u>High</u>	<u>Medium</u>	<u>Not applicable</u>
<u>Risk of spurious model behavior</u>	<u>Low</u>	<u>Low</u>	<u>High due to</u> <u>modifying water</u> <u>volume in multiple</u> <u>storage compartments</u>

1695 Different from EnCDA with its rigorous handling of uncertainties, GLUE is an informal Bayesian approach that is much simpler than EnCDA (Table A1). Likelihood is here understood in a very general sense, as a fuzzy measure of belief of how well the model conforms to the observed behavior of the system, and not in the sense of maximum likelihood theory which is the basis of EnCDA (Beven and Binley, 1992). In EnCDA, the likelihood of a parameter set is a product of model errors, observation errors and the differences between observed and simulated variables (and other factors) (Section 3.2 in Schumacher, 2016). The informal and subjective treatment of

1700 uncertainty in the GLUE approach has caused controversy because the different error sources are not distinguished
(Vrugt et al., 2008). This can mean that non-maximum likelihood solutions might be accepted as parameter
estimates. However, the GLUE approach can be defended against formal Bayesian methods as these require a-
priori knowledge about errors that is lacking in most hydrological modeling applications (Beven and Binley, 2014).
In addition, formal Bayesian methods (e.g., DREAM) are difficult to implement and much less computationally
1705 efficient but may lead to similar outcomes (Vrugt et al., 2008). In GLUE, the likelihood measure can be freely
chosen by the modeler. She could choose a formal likelihood measure like the one applied for EnCDA, a measure
that relates the deviation of model output from observations to the observation error or just any model performance
metric for comparing observations to simulations (Beven and Binley, 2014, their Table 3). Given the large
epistemic uncertainty about hydrological systems, GLUE relies on the subjective expertise of the modeler to define
a suitable likelihood measure given her often only qualitative knowledge about uncertainties of model structure,
1710 model input, model parameters and observations. There is a multitude of likelihood measures that can be used to
identify parameter sets that fit better to observations than the a-priori ensemble (or the standard deterministic
parameter set) and are therefore more likely than others. A likelihood of zero is assigned to all parameter sets that
are not “behavioral”, i.e., if the likelihood measure is below a threshold that is set subjectively by the modeler. For
the example of the popular likelihood measure Nash-Sutcliffe efficiency (NSE), behavioral parameter sets may be
1715 defined as those that result in an NSE larger than 0.7 if the behavior of the hydrological system can be easily
simulated; if not, the threshold will have to be lowered to get any behavioral parameter sets. To obtain the a-
posteriori probability distribution of parameter sets, only the behavioral parameter sets are considered and their
probability is derived from the NSE obtained with them.


1720 Objective functions (= likelihood measures = performance metrics) can be freely chosen in the case of POC
and GLUE. This allows the selection of diverse hydrological signatures of the observables, e.g., those that focus
on high or low flows in the case of streamflow. EnCDA minimizes the root mean squared error, and it is very
difficult to apply another objective function (Table A1). In addition, the likelihood function in EnCDA considers
only the deviations between the model output and observations at one point in time as the ensemble Kalman filter
and not the ensemble Kalman smoother was applied in this study. In contrast, performance measures used in POC
1725 and GLUE evaluate model performance (and calibrate model parameters) over the whole calibration period.
EnCDA differs from POC and GLUE in that weighting between the performance metrics for the multiple
objectives/variables is implicitly done given the model and observation errors (Table A1). In POC and GLUE,
subjective weighting needs to be done for selecting one “optimal” parameter set. POC and GLUE also have in
common that they can serve to identify Pareto-optimal parameter sets or one compromise parameter set that can
1730 then be used to quantify in a computationally efficient way in, e.g., climate change studies or seasonal forecasting,
where hydrological models are driven by an ensemble of climate data sets.

1735 The complexity of the three calibration approaches differs (Table A1). The computational burden is much
higher for EnCDA than for POC and GLUE. Therefore, only a very small number of ensemble members can be
used in the analysis; ensemble sizes typically are between 30 and 100. These low-rank ensembles may fail to
correctly convey the covariance information between model states and parameters or between different parameters.
Localization techniques can be applied to mitigate this effect but with the trade-off that long-distance covariance
information is neglected or down-weighted. For the same number of evaluated parameter sets, the computational

1740 effort of POC and GLUE is approximately the same, for evaluating a specific objective function. However, as the
parameter ensemble generated by the search algorithm in POC depends on the objective function (unlike in the
case of GLUE), the computational burden of POC becomes, for example, twice as high as that of GLUE if one
alternative objective function is taken into account. Finally, EnCDA is prone to spurious results as the modification
of water storages to improve the fit to TWSA observations might lead to little-constrained changes in individual
storages, with impacts on simulated water flows. In the EnCDA study of Schumacher et al. (2018), river storage
was adjusted in WaterGAP based on TWSA observations, leading to spurious increases in Q not seen in WaterGAP
1745 runs without water storage updates or in the observations.

Appendix BA: Surface water bodies and human water abstractions in the CDA units of the Mississippi River basin

1750 To understand the sensitivity of model output to parameters, the spatial distribution of storages and flows that they
affect is required. Water balances of reservoirs (Fig. BA.1a) are not directly impacted by the calibration parameters
in Table 12, while lake dynamics (Fig. BA.1b) are directly impacted by active lake depth (SW-LD) and wetlands
(Fig. BA.1c, d) by active wetland depth (SW-WD). Please note that knowledge about the wetlands in the northern
parts of the CDA units Missouri River basin and the Upper MRB as well as in the southern part of the Lower MRB
is restricted to the information in these areas that generally 25-50% of the land area are covered by wetlands in the
wet season. In WaterGAP, this information was translated into a maximum extent of local wetlands of 35%. The
1755 surface water discharge coefficient (SW-DC) affects both lakes and wetlands. Potential net abstractions from
groundwater (Fig. BA.1e) and surface water (Fig. BA.1f) are simulated with a monthly time step for each grid cell,
and multipliers for each of them (NA-GM and NA-SM) affect model output differently in the various CDA units
due to different net abstraction patterns.

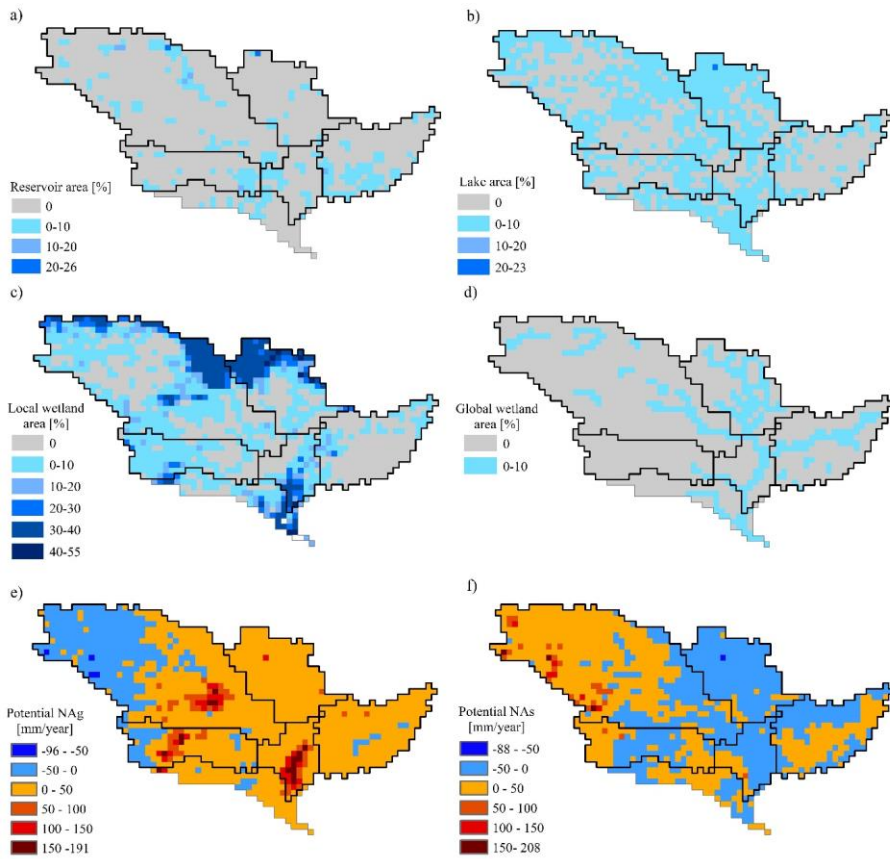

1760 | **Figure BA1.** Man-made reservoirs (a), lakes (b), local wetlands (c), global wetlands (d) as well as potential net abstractions from groundwater (e) and from surface water (f) in the CDA units of MRB, as taken into account in WaterGAP. Maximum areal extents of the surface bodies in percent of the 0.5° cell area are shown, while potential net abstractions in mm/yr are provided for the period 2003-2012.

1765

Appendix CB Performance of different calibration methods during the calibration period 2003-2012: Components of the KGE performance metric for both Q and TWSA

Table CB1. KGE components of model runs of Table 23 regarding Q for the calibration period 2003-2012.

	CC/RBias/RVar					
	Arkansas	Missouri	Upper MRB	Ohio	Lower MRB	MRB
POC: highest	0.90/1.18/0	0.92/1.08/0	0.91/1.03/0	0.95/1.07/0.	0.95/1.04/0	0.95/1.01/0.
NSE _Q	.59	.80	.82	89	.88	88
POC: highest	0.91/1.42/0	0.87/1.73/0	0.84/1.47/0	0.95/1.27/0.	0.94/1.07/0	0.92/1.34/0.
NSE _{TWSA}	.52	.61	.53	71	.84	62
POC: compromise	0.90/1.18/0	0.86/1.06/0	0.89/1.20/0	0.95/1.11/0.	0.95/1.06/0	0.94/1.09/0.
GLUE: highest	0.90/1.21/0	0.91/1.14/0	0.89/1.01/0	0.94/1.07/0.	0.93/1.02/0	0.94/1.02/0.
NSE _Q	.52	.71	.82	88	.86	82
GLUE: highest	0.91/1.74/0	0.88/1.70/0	0.84/1.51/0	0.95/1.30/0.	0.94/1.12/0	0.94/1.33/0.
NSE _{TWSA}	.38	.60	.43	63	.75	64
GLUE: compromise	0.90/1.31/0	0.86/1.18/0	0.88/1.23/0	0.94/1.11/0.	0.93/1.07/0	0.93/1.05/0.
NSE _Q	.55	.68	.57	79	.79	84
EnCDA: highest	0.81/1.18/0	0.86/1.14/0	0.86/1.11/0	0.92/1.13/0.	0.92/1.04/0	0.75/1.06/0.
NSE _Q	.76	.76	.77	69	.78	60
EnCDA: highest	0.77/1.04/0	0.82/1.29/0	0.73/1.34/0	0.89/1.23/0.	0.92/1.13/0	0.71/1.10/0.
NSE _{TWSA}	.66	.77	.86	55	.66	58
EnCDA: compromise	0.77/1.04/0	0.84/1.15/0	0.83/1.07/0	0.92/1.13/0.	0.92/1.04/0	0.73/1.05/0.
NSE _Q	.66	.65	.76	69	.78	60
EnCDA: ensemble mean	0.79/0.97/0	0.82/1.21/0	0.86/1.12/0	0.91/1.17/0.	0.94/1.13/0	0.75/1.11/0.
Standard calibration	0.83/0.98/0	0.74/1.05/0	0.73/0.64/0	0.93/1.05/0.	0.89/0.97/0	0.89/0.97/0.
Uncalibrated	.53	.73	.76	82	.95	95
	0.87/1.76/0	0.84/1.72/0	0.76/1.07/0	0.93/1.07/0.	0.91/1.15/0	0.91/1.15/0.
	.55	.77	.73	87	.92	92

Table CB2. KGE components of model runs of Table 23 regarding TWSA for the calibration period 2003-2012.

	CC/RVar					
	Arkansas	Missouri	Upper MRB	Ohio	Lower MRB	MRB
POC: highest	0.93/1.06	0.77/1.09	0.80/1.42	0.95/1.22	0.95/1.42	0.85/1.30
NSE _Q						
POC: highest	0.95/1.04	0.91/1.03	0.84/1.07	0.95/1.05	0.97/1.05	0.93/1.10
NSE _{TWSA}						
POC: compromise	0.93/1.06	0.87/1.10	0.82/1.26	0.94/1.14	0.96/1.01	0.91/1.22
GLUE: highest	0.89/1.01	0.57/0.91	0.80/1.47	0.92/1.14	0.92/1.67	0.75/1.37
NSE _Q						
GLUE: highest	0.94/0.97	0.89/1.05	0.82/1.05	0.96/1.08	0.95/1.07	0.91/1.07
NSE _{TWSA}						
GLUE: compromise	0.94/1.16	0.87/1.07	0.81/1.26	0.94/1.13	0.94/0.93	0.87/1.20
EnCDA: highest	0.83/1.27	0.78/0.65	0.77/1.11	0.95/0.98	0.94/1.04	0.44/0.71
NSE _Q						
EnCDA: highest	0.94/1.14	0.83/0.65	0.83/0.98	0.97/0.90	0.96/1.00	0.52/0.72
NSE _{TWSA}						
EnCDA: compromise	0.94/1.14	0.82/0.67	0.80/1.03	0.95/0.98	0.94/1.04	0.49/0.72
EnCDA: ensemble mean	0.92/1.16	0.76/0.62	0.80/1.00	0.94/1.02	0.95/0.98	0.45/0.69

Standard calibration	0.83/1.19	0.63/0.76	0.63/1.09	0.91/1.13	0.80/1.63	0.71/1.11
Uncalibrated	0.85/1.09	0.63/0.76	0.62/1.10	0.90/1.21	0.82/1.60	0.73/1.11

Code availability: The WaterGAP 2.2d code is accessible at <https://doi.org/10.5281/zenodo.6902110>.

1775 *Data availability.* All optimal and behavioral parameter sets obtained by the three calibration approaches for the six CDA units together with the resulting performance metrics are listed in an Excel file that is part of the supplement.

1780 *Supplement.* The supplement related to this article [including the \(Excel file\)](#) is available online at URL???

Author contributions. PD designed the study, with contributions from HMMH, KS, SMHM, SS, AG and JK. HMMH, KS and HG performed calibration and data analyses. HMMH and SMHM produced the figures. SA and HMS improved the WaterGAP code. LB and HG processed and analyzed GRACE TWSA data. PD wrote the original draft of the manuscript. All authors contributed to the final draft.

1785 *Competing interests.* The authors declare that they have no conflict of interest.

Acknowledgments. This study was enabled by the financial support of the German Research Foundation for the research unit “Understanding the global freshwater system by combining geodetic and remote sensing information with modelling using a calibration/data assimilation approach (GlobalCDA)”. The authors thank Olga Sydak (née Engels) for first analyses and discussions, ~~and~~ Christoph Niemann for contributing to the generation of figures ~~and two reviewers and the editor for valuable comments and suggestions that helped to improve the manuscript.~~

1790

Review statement. This paper was edited by ~~xxx~~ Ryan Teuling ~~and~~ reviewed by ~~xxx~~ two anonymous referees.

1795

References

- Alcamo, J., Döll, P., Henrichs, T., Kaspar, F., Lehner, B., Rösch, T., and Siebert, S.: Development and testing of the WaterGAP 2 global model of water use and availability, *Hydrol. Sci. J.*, 48(3), 317-338, <https://doi.org/10.1623/hysj.48.3.317.45290>, 2003.
- 1800 ~~Arheimer, B., Pimentel, R., Isberg, K., Crochemore, L., Andersson, J. C. M., Hasan, A., and Pineda, L.: Global catchment modelling using World-Wide HYPE (WWH), open data, and stepwise parameter estimation, *Hydrol. Earth Syst. Sci.*, 24 (2), 535–559, <https://doi.org/10.5194/hess-24-535-2020>, 2020.~~
- ~~Berry, P. A. M., Garlick, J. D., Freeman, J. A., and Mathers, E.L.: Global inland water monitoring from multi-mission altimetry, *Geophys. Res. Lett.*, 32, L16401, <https://doi.org/10.1029/2005GL022814>, 2005.~~
- 1805 Beven, K.: Prophecy, reality and uncertainty in distributed hydrological modeling, *Adv. Water Resour.*, 16 (1), 41–51, [https://doi.org/10.1016/0309-1708\(93\)90028-E](https://doi.org/10.1016/0309-1708(93)90028-E), 1993.

- 1810 Beven, K.: Towards an alternative blueprint for a physically based digitally simulated hydrologic response modelling system, *Hydrol. Process.*, 16 (2), 189–206, <https://doi.org/10.1002/hyp.343>, 2002.
- Beven, K., and Binley, A.: GLUE. 20 years on. *Hydrol. Process.*, 28 (24), 5897–5918, <https://doi.org/10.1002/hyp.10082>, 2014.
- Beven, K., and Binley, A.: The future of distributed models: model calibration and uncertainty prediction, *Hydrol. Process.*, 6, 279–298, <https://doi.org/10.1002/hyp.3360060305>, 1992.
- Beven, K., and Smith, P.: Concepts of information content and likelihood in parameter calibration for hydrological simulation models, *J. Hydrol. Eng.*, 20 (1), A4014010, [https://doi.org/10.1061/\(ASCE\)HE.1943-5584.0000991](https://doi.org/10.1061/(ASCE)HE.1943-5584.0000991), 2015.
- 1815 Bierkens, M. F. P.: Global hydrology 2015. State, trends, and directions, *Water Resour. Res.*, 51 (7), 4923–4947, <https://doi.org/10.1002/2015WR017173>, 2015.
- Blasone, R.-S., Vrugt, J. A., Madsen, H., Rosbjerg, D., Robinson, B. A., and Zyvoloski, G. A. Generalized likelihood uncertainty estimation (GLUE) using adaptive Markov chain Monte Carlo sampling. *Advances in Water Resources*. 31(4), 630-648, <https://doi.org/10.1016/j.advwatres.2007.12.003>. 2008
- 1820 Blazkova, S., and Beven, K.: A limits of acceptability approach to model evaluation and uncertainty estimation in flood frequency estimation by continuous simulation: Skalka catchment, Czech Republic, *Water Resour. Res.*, 45, W00B16, <https://doi.org/10.1029/2007WR006726>, 2009.
- Campolongo, F., Saltelli, A., and Cariboni, J.: From screening to quantitative sensitivity analysis. A unified approach, *Comput. Phys. Commun.*, 182 (4), 978–988, <https://doi.org/10.1016/j.cpc.2010.12.039>, 2011.
- 1825 Clark, M., Rupp, D., Woods, R., Zheng, X., Ibbitt, R., and Slater, A.: Hydrological data assimilation with the ensemble Kalman filter. Use of streamflow observations to update states in a distributed hydrological model, *Adv. Water Resour.*, 31 (10), 1309–1324, <https://doi.org/10.1016/j.advwatres.2008.06.005>, 2008.
- DeChant, C., and Moradkhani, H.: Examining the effectiveness and robustness of sequential data assimilation methods for quantification of uncertainty in hydrologic forecasting, *Water Resour. Res.*, 48 (4), 11, <https://doi.org/10.1029/2011WR011011>, 2012.
- 1830 Dembélé, M., Hrachowitz, M., Savenije, H. H. G., Mariéthoz, G., and Schaeffli, B.: Improving the predictive skill of a distributed hydrological model by calibration on spatial patterns with multiple satellite data sets, *Water Resour. Res.*, 56, e2019WR026085, <https://doi.org/10.1029/2019WR026085>, 2020.
- 1835 Di Baldassarre, G., and Montanari, A.: Uncertainty in river discharge observations: a quantitative analysis, *Hydrol. Earth Syst. Sci.*, 13, 913–921, <https://doi.org/10.5194/hess-13-913-2009>, 2009.
- Döll, P., Trautmann, T., Göllner, M., and Müller Schmied, H.: A global-scale analysis of water storage dynamics of inland wetlands: Quantifying the impacts of human water use and man-made reservoirs as well as the unavoidable and avoidable impacts of climate change, *Ecohydrology*, 13, e2175, <https://doi.org/10.1002/eco.2175>, 2020.
- 1840 Döll, P., Douville, H., Güntner, A., Müller Schmied, H., Wada, Y.: Modelling freshwater resources at the global scale: Challenges and prospects, *Surveys in Geophysics*, 37(2), 195–221, <https://doi.org/10.1007/s10712-015-9343-1>, 2016.

Formatiert: Absatz-Standardschriftart, Schriftart: (Standard) +Textkörper (Calibri), 11 Pt., Englisch (USA)

- Döll, P., Fritsche, M., Eicker, A., and Müller Schmied, H.: Seasonal Water Storage Variations as Impacted by Water Abstractions: Comparing the Output of a Global Hydrological Model with GRACE and GPS Observations, *Surv. Geophys.*, 35 (6), 1311–1331, <https://doi.org/10.1007/s10712-014-9282-2>, 2014.
- Döll, P., Kaspar, F., and Lehner, B.: A global hydrological model for deriving water availability indicators: model tuning and validation, *J. Hydrol.*, 270 (1-2), 105-134. [https://doi.org/10.1016/S0022-1694\(02\)00283-4](https://doi.org/10.1016/S0022-1694(02)00283-4), 2003.
- Efstratiadis, A., and Koutsoyiannis, D.: One decade of multi-objective calibration approaches in hydrological modelling: a review, *Hydrological Sciences Journal*, 55, 58-78, <https://doi.org/10.1080/02626660903526292>, 2010.
- Eicker, A., Schumacher, M., Kusche, J., Döll, P., and Müller Schmied, H.: Calibration/Data Assimilation Approach for Integrating GRACE Data into the WaterGAP Global Hydrology Model (WGHM) Using an Ensemble Kalman Filter: First Results, *Surv. Geophys.* 35 (6), 1285–1309. <https://doi.org/10.1007/s10712-014-9309-8>, 2014.
- Evensen, G.: The ensemble Kalman filter: Theoretical formulation and practical implementation, *Ocean Dynam.*, 53, 343–367, <https://doi.org/10.1007/s10236-003-0036-9>, 2003.
- Evensen, G.: Sequential data assimilation with a nonlinear quasi-geostrophic model using Monte Carlo methods to forecast error statistics, *J. Geophys. Res.: Oceans*, 99(C5), 10143-10162, 1994.
- Gerdener, H., Engels, O., and Kusche, J.: A framework for deriving drought indicators from the Gravity Recovery and Climate Experiment (GRACE), *Hydrol. Earth Syst. Sci.*, 24, 227–248, <https://doi.org/10.5194/hess-24-227-2020>, 2020.
- Gupta, H. V., Sorooshian, S., and Ogou Yapo, P.: Toward improved calibration of hydrologic models: Multiple and noncommensurable measures of information, *Water Resour. Res.*, 34 (4), 751-763, <https://doi.org/10.1029/97WR03495>, 1998.
- Hadka, D. and Reed, P.: Borg: An Auto-Adaptive Many-Objective Evolutionary Computing Framework, *Evol. Comp.*, 21, 231-259, https://doi.org/10.1162/EVCO_a_00075, 2013.
- Harlin, J. and Kung, C.-S.: Parameter uncertainty and simulation of design floods in Sweden, *J. Hydrol.*, 137, 209-230, [https://doi.org/10.1016/0022-1694\(92\)90057-3](https://doi.org/10.1016/0022-1694(92)90057-3), 1992.
- Hosseini-Moghari, S.-M., Araghinejad, S., Tourian, M. J., Ebrahimi, K., and Döll, P.: Quantifying the impacts of human water use and climate variations on recent drying of Lake Urmia basin: the value of different sets of spaceborne and in situ data for calibrating a global hydrological model, *Hydrol. Earth Syst. Sci.*, 24 (4), 1939–1956, <https://doi.org/10.5194/hess-24-1939-2020>, 2020.
- Hunger, M., and Döll, P.: Value of river discharge data for global-scale hydrological modeling, *Hydrol. Earth Syst. Sci.*, 12 (3), 841–861, <https://doi.org/10.5194/hess-12-841-2008>, 2008.
- Jasechko, S., Seybold, H., Perrone, D., Fan, Y., and Kirchner, J.W.: Widespread potential loss of streamflow into underlying aquifers across the USA, <https://doi.org/10.1038/s41586-021-03311-x>, *Nature*, 591, 391-397, 2021.
- Jin, X., Xu, C.-Y., Zhang, Q., and Singh, V. P.: Parameter and modeling uncertainty simulated by GLUE and a formal Bayesian method for a conceptual hydrological model, *J. Hydrol.*, 383 (3-4), 147–155, <https://doi.org/10.1016/j.jhydrol.2009.12.028>, 2010.

1885 Khu, S. T., and Madsen, H.: Multiobjective calibration with Pareto preference ordering: An application to rainfall-runoff model calibration, *Water Resour. Res.*, 41 (3), W03004, <https://doi.org/10.1029/2004WR003041>, 2005.

Kling, H., Fuchs, M., and Paulin, M.: Runoff conditions in the upper Danube basin under an ensemble of climate change scenarios, *J. Hydrol.*, 424-425, 264–277, <https://doi.org/10.1016/j.jhydrol.2012.01.011>, 2012.

1890 Klinger, B., and Mayer-Gürr, T.: The role of accelerometer data calibration within GRACE gravity field recovery: Results from ITSG-Grace2016, *Advances in Space Research*, 58, 1597-1609, <https://doi.org/10.1016/j.asr.2016.08.007>, 2016

Klinger, B., Mayer-Gürr, T., Behzadpour, S., Ellmer, M., Kvas, A., and Zehentner, N.: The new ITSG-Grace2016 release. Presented at: EGU General Assembly 2016, Vienna, Austria, *Geophysical Research Abstracts*, vol. 18. EGU2016-11547. <http://dx.doi.org/10.13140/RG.2.1.1856.7280>, 2016.

1895 Kusche, J., Schmidt, R., Petrovic, S., and Rietbroek, R.: Decorrelated GRACE time-variable gravity solutions by GFZ, and their validation using a hydrological model, *J. Geod.*, 83(10), 903–913, <https://doi.org/10.1007/s00190-009-0308-3>, 2009.

Landerer, F.W., and Swenson, S.C.: Accuracy of scales GRACE terrestrial water storage estimates, *Water Res. Res.*, 48, W04531, <https://doi.org/10.1029/2011WR011453>, 2012.

Lehner, B., and Döll, P.: Development and validation of a global database of lakes, reservoirs and wetlands, *J. Hydrol.*, 296, 1–22, <https://doi.org/10.1016/j.jhydrol.2004.03.028>, 2004.

1900 [Longuevergne, L., Scanlon, B. R., and Wilson, C. R.: GRACE hydrological estimates for small basins: Evaluating processing approaches on the High Plains Aquifer, USA. *Water Resour. Res.* 46, W11517, <https://doi.org/10.1029/2009wr008564>, 2010.](https://doi.org/10.1029/2009wr008564)

1905 Mayer-Gürr, T., Zehentner, N., Strasser, S., Behzadpour, S., Kvas, A., Klinger, B., and Ellmer, M.: ITSG-Grace2018: The new GRACE Time Series from TU Graz, 2018.

McMillan, H., Krueger, T., and Freer, J.: Benchmarking observational uncertainties for hydrology. Rainfall, river discharge and water quality, *Hydrol. Process.*, 26 (26), 4078–4111, <https://doi.org/10.1002/hyp.9384>, 2012.

Mendoza, P.A., Clark, M.P., Mizukami, N., Gutmann, E.D., Arnold, J.R., Brekke, L.D., and Rajagopalan, B.: How do hydrologic modeling decisions affect the portrayal of climate change impacts? *Hydrol. Process.*, 30, 1071-1095, <https://doi.org/10.1002/hyp.10684>, 2016.

1910 Mizukami, N., Clark, M. P., Newman, A. J., Wood, A. W., Gutmann, E. D., and Nijssen, B.: Towards seamless large-domain parameter estimation for hydrologic models, *Water Resour. Res.*, 53 (9), 8020–8040, <https://doi.org/10.1002/2017WR020401>, 2017.

1915 Moradkhani, H., Hsu, K.-L., Gupta, H., and Sorooshian, S.: Uncertainty assessment of hydrologic model states and parameters: Sequential data assimilation using the particle filter, *Water Resour. Res.*, 41 (5), W05012, <https://doi.org/10.1029/2004WR003604>, 2005.

Morris, M. D.: Factorial sampling plans for preliminary computational experiments, *Technometrics*, 33, 161–174, <https://doi.org/10.1080/00401706.1991.10484804>, 1991.

1920 Müller Schmied, H., Cáceres, D., Eisner, S., Flörke, M., Herbert, C., Niemann, C., Peiris, T. A., Popat, E., Portmann, F. T., Reinecke, R., Schumacher, M., Shadkam, S., Telteu, C.-E., Trautmann, T., and Döll, P.:

Formatiert: Schriftart: (Standard) Times New Roman, 10 Pt., Englisch (Großbritannien)

Formatiert: Schriftart: (Standard) Times New Roman, 10 Pt., Englisch (Großbritannien)

Formatiert: Schriftart: (Standard) Times New Roman, 10 Pt., Englisch (Großbritannien)

Formatiert: Schriftart: (Standard) Times New Roman, 10 Pt., Englisch (Großbritannien)

Formatiert: Schriftart: (Standard) Times New Roman, 10 Pt., Englisch (Großbritannien)

- The global water resources and use model WaterGAP v2.2d: Model description and evaluation, *Geosci. Model Dev.*, 14, 1037–1079, <https://doi.org/10.5194/gmd-14-1037-2021>, 2021.
- Müller Schmied, H., Eisner, S., Franz, D., Wattenbach, M., Portmann, F. T., Flörke, M., and Döll, P.: Sensitivity of simulated global-scale freshwater fluxes and storages to input data, hydrological model structure, human water use and calibration, *Hydrol. Earth Syst. Sci.*, 18 (9), 3511–3538, <https://doi.org/10.5194/hess-18-3511-2014>, 2014.
- 1925
- Nerger, L., and Hiller, W.: Software for ensemble-based data assimilation systems—Implementation strategies and scalability, *Comput. and Geosci.*, 55, 110–118, <https://doi.org/10.1016/j.cageo.2012.03.026>, 2013.
- Paiva, R. C. D., Collischonn, W., Bonnet, M.-P., Gonçalves, L. G. G., Calmant, S., Getirana, A., and Santos da Silva, J.: Assimilating in situ and radar altimetry data into a large-scale hydrologic-hydrodynamic model for streamflow forecast in the Amazon, *Hydrol. Earth Syst. Sci.*, 17 (7), 2929–2946, <https://doi.org/10.5194/hess-17-2929-2013>, 2013.
- 1930
- Pianosi, F., Beven, K., Freer, J., Hall, J.W., Rougier, J., Stephenson, D.B., and Wagener, T.: Sensitivity analysis of environmental models: A systematic review with practical workflow, *Environ. Modell. Softw.*, 79, 214–232, <https://doi.org/10.1016/j.envsoft.2016.02.008>, 2016.
- 1935
- Rakovec, O., Kumar, R., Attinger, S., Samaniego, L.: Improving the realism of hydrologic model functioning through multivariate parameter estimation, *Water Resour. Res.*, 52 (10), 7779–7792, <https://doi.org/10.1002/2016WR019430>, 2016.
- 1940
- Reinecke, R., Wachholz, A., Mehl, S., Foglia, L., Niemann, C., and Döll, P.: Importance of Spatial Resolution in Global Groundwater Modeling, *Ground Water*, 58 (3), 363–376, <https://doi.org/10.1111/gwat.12996>, 2020.
- Scanlon, B. R., Zhang, Z., Save, H., Sun, A. Y., Müller Schmied, H., and van Beek, L. P. H.: Global models underestimate large decadal declining and rising water storage trends relative to GRACE satellite data, *Proc. Natl. Acad. Sci. U.S.A.*, 115 (6), E1080–E1089, <https://doi.org/10.1073/pnas.1704665115>, 2018.
- Scanlon, B. R., Zhang, Z., Rateb, A., Sun, A., Wiese, D., and Save, H.: Tracking Seasonal Fluctuations in Land Water Storage Using Global Models and GRACE Satellites, *Geophys. Res. Lett.*, 6 (1), 3, <https://doi.org/10.1029/2018GL081836>, 2019.
- 1945
- Schumacher, M.: Methods for Assimilating Remotely-Sensed Water Storage Changes into Hydrological Models. Ph. D. thesis, University of Bonn, Bonn, 2016.
- Schumacher, M., Forootan, E., van Dijk, A.I.J.M., Müller Schmied, H., Crosbie, R. S., Kusche, J., and Döll, P.: Improving drought simulations within the Murray-Darling basin by combined calibration/assimilation of GRACE data into the WaterGAP Global Hydrology Model, *Remote Sens. Environ.*, 204, 212–228, <https://doi.org/10.1016/j.rse.2017.10.029>, 2018.
- 1950
- Schumacher, M., Kusche, J., and Döll, P.: A systematic impact assessment of GRACE error correlation on data assimilation in hydrological models, *J. Geod.*, 90 (6), 537–559, <https://doi.org/10.1007/s00190-016-0892-y>, 2016a.
- 1955
- Schumacher, M., Eicker, A., Kusche, J., Müller Schmied, H., and Döll, P.: Covariance Analysis and Sensitivity Studies for GRACE Assimilation into WGHM. In Chris Rizos, Pascal Willis (Eds.): IAG 150 Years. Proceedings of the IAG Scientific Assembly in Postdam, Germany, 2013, vol. 143. 1st ed. 2016. Cham,

1960 s.l.: Springer International Publishing (International Association of Geodesy Symposia, 143), 241–247, 2016b.

Stisen, S., Koch, J., Sonnenborg, T. O., Refsgaard, J. C., Bircher, S., Ringgaard, R., and Jensen, K. H.: Moving beyond run-off calibration - Multivariable optimization of a surface-subsurface-atmosphere model, *Hydrol. Process.*, 32 (17), 2654–2668, <https://doi.org/10.1002/hyp.13177>, 2018.

1965 Vishwakarma, B. D., Zhang, J., and Sneeuw, N.: Downscaling GRACE total water storage change using partial least squares regression. *Scientific Data*, 8(1), Article 1, <https://doi.org/10.1038/s41597-021-00862-6>, 2021.

Vrugt, J. A., ter Braak, C. J. F., Gupta, H. V., and Robinson, B. A.: Equifinality of formal (DREAM) and informal (GLUE) Bayesian approaches in hydrologic modeling?, *Stoch Environ Res. Risk Assess*, 23 (7), 1011–1026, <https://doi.org/10.1007/s00477-008-0274-y>, 2009.

1970 Wanders, N., Bierkens, M. F. P., de Jong, S. M., Roo, A., and Karssenber, D.: The benefits of using remotely sensed soil moisture in parameter identification of large-scale hydrological models, *Water Resour. Res.*, 50 (8), 6874–6891, <https://doi.org/10.1002/2013WR014639>, 2014.

Wang, Q. J., Bennett, J. C., Robertson, D. E., and Li, M.: A data censoring approach for predictive error modelling of flow in ephemeral rivers. *Water Resources Research*, 56, e2019WR026128. <https://doi.org/10.1029/2019WR026128>, 2020.

1975 Weedon, G. P., Balsamo, G., Bellouin, N., Gomes, S., Best, M. J., and Viterbo, P.: The WFDEI meteorological forcing data set: WATCH Forcing Data methodology applied to ERA-Interim reanalysis data, *Water Resour. Res.*, 50, 7505–7514, <https://doi.org/10.1002/2014WR015638>, 2014.

Werth, S., and Güntner, A.: Calibration analysis for water storage variability of the global hydrological model WGHM, *Hydrol. Earth Syst. Sci.*, 14 (1), 59–78, <https://doi.org/10.5194/hess-14-59-2010>, 2010.

1980 Westerberg, I. K., Wagener, T., Coxon, G., McMillan, H. K., Castellarin, A., Montanari, A., and Freer, J.: Uncertainty in hydrological signatures for gauged and ungauged catchments, *Water Resour. Res.*, 52 (3), 1847–1865, <https://doi.org/10.1002/2015WR017635>, 2016.

Xie, H., Longuevergne, L., Ringler, C., and Scanlon, B.R.: Calibration and evaluation of a semi-distributed watershed model of Sub-Saharan Africa using GRACE data, *Hydrol. Earth Syst. Sci.*, 16, 3083–3099, <https://doi.org/10.5194/hess-16-3083-2012>, 2012.

1985 Xie, X., and Zhang, D.: A partitioned update scheme for state-parameter estimation of distributed hydrologic models based on the ensemble Kalman filter, *Water Resour. Res.*, 49, 7350–7365, <https://doi.org/10.1002/2012WR012853>, 2013.

1990 Yassin, F., Rzavi, S., Wheeler, H., Sapriza-Azuri, G., Davison, B., and Pietroniro, A.: Enhanced identification of a hydrologic model using streamflow and satellite water storage data: A multicriteria sensitivity analysis and optimization approach, *Hydrol. Process.*, 31 (19), 3320–3333, <https://doi.org/10.1002/hyp.11267>, 2017.

1995 Yu, P.L.: A class of solutions for group decision problems, *Manage. Sci.*, 19 (8), 936-946, <https://doi.org/10.1287/mnsc.19.8.936>, 1973.

Formatiert: Schriftart: (Standard) Times New Roman, 10 Pt., Englisch (Großbritannien)

Formatiert: Schriftart: (Standard) Times New Roman, 10 Pt., Englisch (Großbritannien)

Formatiert: Schriftart: (Standard) Times New Roman, 10 Pt., Englisch (Großbritannien)

Formatiert: Schriftart: (Standard) Times New Roman, 10 Pt., Englisch (Großbritannien)

Formatiert: Schriftart: (Standard) Times New Roman, 10 Pt., Nicht Kursiv, Englisch (Großbritannien)

Formatiert: Schriftart: (Standard) Times New Roman, 10 Pt., Englisch (Großbritannien)

Formatiert: Schriftart: (Standard) Times New Roman, 10 Pt., Englisch (Großbritannien)

Formatiert: Schriftart: (Standard) Times New Roman, 10 Pt., Englisch (Großbritannien)

Formatiert: Schriftart: (Standard) Times New Roman, 10 Pt., Englisch (Großbritannien)