

Check dam impact on sediment loads: example of the Guerbe

River in the Swiss Alps - a catchment scale experiment

Ariel Henrique do Prado¹, David Mair¹, Philippos Garefalakis¹, Chantal Schmidt¹,

Alexander C. Whittaker², Sebastien Castellort³ and Fritz Schlunegger¹

¹ University of Bern, Institute of Geological Sciences, Bern, Switzerland

² Imperial College, Department of Earth Science and Engineering, London, United Kingdom

³ University of Geneva, Department of Earth Sciences, Geneva, Switzerland

Correspondence to: Ariel do Prado (ariel.doprado@geo.unibe.ch)

Abstract

The construction of check dams is a common practice around the world where the aim is to reduce the damage by flooding events through mountain streams. However, quantifying the effectiveness of such engineering structures has remained very challenging and requires well-selected case studies, since the outcome of such an evaluation depends on site specific geometric, geologic, and climatic conditions. Conventionally, the check dams' effectiveness has been estimated using information about how the bedload sediment flux in the stream changes after the check dams are constructed. A permanent lowering of the bedload flux not only points to a success in reducing the probability of sediment transport occurrence but also implies that the sediment input through the system is likely to decrease. Here, we applied a method for data acquisition and two different equations (Meyer-Peter Müller ~~versus~~and Recking approach) to estimate and compare the sediment transport in a mountain stream in Switzerland under engineered and non-engineered conditions. Whereas the first equation is ~~derived from~~ a classical approach that is based on flume experiment data with a slope less than 0.02 m/m, the second equation (Recking) has been deviated based on ~~a~~ bedload ~~field~~ data ~~set acquired from~~comprising active mountain streams under steeper conditions. - We selected the Guerbe River situated in the Swiss Alps as a case study, which has been engineered since the end of the 19th century. This has resulted in more than 110 check dams along a c. 5 km reach where sediment has continuously been supplied from adjacent hillslopes, primarily by landsliding. We measured the riverbed grain size, topographic gradients, and river widths within selected segments along this reach. Additionally, a gauging station downstream of the reach engineered with check dams yielded information to calibrate the hydroclimatic situation for the study reach, thus offering ideal conditions for our catchment-scale experiment. Using the acquired data and the dataset about historical runoff covering the time interval between 2009 and 2021 and considering the current engineered conditions, we estimated a mean annual volume of transported bedload which ranges from 900 to 6'000 m³ yr⁻¹. We then envisaged possible channel geometries before the check dams were constructed. We inferred (1) higher energy gradients which we averaged over the length of several check dams and which we considered as a proxy for the steeper river slope under natural conditions; (2) channel widths that are smaller than those measured today, thereby anticipating that the channel was more confined in the past; and (3) larger grain size percentiles, which we consider to be

similar to the values measured from preserved landslides in the region. Using such potential non-engineered scenarios as constraints, the two equations both point towards a larger sediment flux compared to the engineered state, although the results of these equations differed significantly in magnitude. Whereas the Recking approach returned estimates where the bedload sediment flux is c. 10 times larger in comparison with the current situation, the use of the Meyer-Peter Müller equation predicts an increase of c. 100 times in bedload fluxes for a state without check dams. These results suggest that the check dams in the Guerbe (Gürbe) River are highly efficient not only in regulating sediment transport by decreasing the probability of high sediment flux occurrence during torrential conditions, but also in stabilizing the channel bed by avoiding incision. The most likely consequence is a stabilization of the terrain around such structures by reducing the activation of landslides.

1. Introduction

Engineering structures known as check dams have been constructed in many mountainous streams around the world with the intention to mitigate hazards caused by the transfer of large volumes of sediment in relation to flooding, landsliding and debris flows (Piton et al., 2017; Lucas-Borja et al., 2021). Check dams are transversal structures built across the channel bed and made of wood, rock or concrete. They create space that can initially store sediment derived from farther upstream. Subsequently, this space is filled with material, which diminishes its capacity to store additional sedimentary material. However, even in their filled stages, the check dams seem to remain operational for two reasons. First, they prevent the stream from further incising into substratum, which in turn contributes to the stabilization of landslides and the preservation of soils on the bordering hillslopes; second, they reduce the stream's capacity to evacuate the supplied sedimentary material due to a reduction of the channel's friction slope; and third, they contribute to the regulation of sediment transport by buffering the release of sediment into more frequent and lower discharges of material (Castillo et al., 2014; Piton et al., 2017). Although it is generally appreciated that the construction of check dams is beneficial for reducing risks, it has been a recurring challenge for engineers and the different stakeholders to take decisions about whether or not to install such infrastructure because of the high maintenance costs (e.g., Jackle, 2013; Ramirez, 2022) and also because of bio-environmental concerns (Bombino et al., 2014). Furthermore, in most of these streams, the construction of check dams started before a survey on sediment flux was conducted, with the consequence that information about the pre-engineered conditions on sediment discharge is not available (Piton et al., 2017). Hence, it remains difficult to quantify the efficiency of such infrastructure, and society is left with limited information for taking decisions on whether or not to build new check dams and/or to maintain older ones. Under these circumstances, an indirect method of estimating the contribution of check dams to reduce risks is needed for stakeholders when they have to take evidence-based decisions on how to manage such infrastructure. In the past decade, Castillo et al. (2014) developed a model to estimate the efficiency of check dams. They focussed on exploring how the variations of the friction slope angles, which varied through changing the spacing between the dams, impacted the flow regime. However, since the friction slope is not the only variable that controls the transport of sediment (e.g., Meyer-Peter and Müller, 1948; Wong and Parker, 2006 ; Piton and Recking, 2016; Recking et al., 2016), data on slope changes

72 alone is not sufficient to fully appreciate and predict possible reductions of risks when check dams are set in
place. As an alternative approach, estimates of the sediment volumes transported on the riverbed could be used
74 to predict the efficiency of check dams once the space behind them has been filled (Kaitna et al., 2011; Piton et
al., 2017; Keiler and Fuchs, 2018). Therefore, available bedload equations that were calibrated on data acquired
76 in active streams and flume experiments are potential tools for such an evaluation, and their application depends
on variables that can be measured in the field (e.g., slope, width, and grain size distributions).

78 To do so, we studied the Guerbe River, which is a torrent situated on the northern margin of the Swiss
Alps (Fig. 1). There, the c. 5 km-long headwater reach has experienced a >100-year-long history of check dam
80 construction and maintenance. The first ones were installed during the 19th century and mainly consisted of
structures made of wood and stone (Salvisberg, 2017). Subsequently, they were replaced by reinforced concrete
82 dams in the 20th century, forming steps that are up to 10 m high (e.g., Fig. 1b). However, during several events
along their history, the check dams failed and released a large amount of material to downstream of the channel
84 generating a large loss to the local society (Salvisberg, 2017). After the last failure event, which occurred in
January 2018 with the displacement of the c. 4.5×10^6 m³-large Meierisli landslide that damaged >10 of these
86 check dams (Andres and Badoux, 2019), the local community has been confronted with taking a decision on
how to manage this situation in the future without a-priori, physics-based information on the efficiency of this
88 infrastructure. Therefore, this paper aims to offer such a quantitative evaluation. Here, we estimate the
efficiency regarding the transport of bedload material for a staircase of check dams using the Guerbe River as a
90 natural laboratory. We collect high-resolution data on the channel's metrics (slope, width) and the grain size
distribution in the field, and we combine this data with information about the hydroclimatic properties of the
92 Guerbe River basin. The scope is to estimate the modern bedload sediment flux for the current engineered state.
These results are then compared with the outcome of model runs where pre-engineered conditions regarding
94 channel metrics (slope, width) and grain size distributions are considered.

2. Local setting

96 The studied reach of the Guerbe River (Fig. 1a), which is situated at the northern border of the Swiss
Alps, can be segmented into four parts: (1) The headwater reach, which is the uppermost segment covering an
98 area of c. 5 km², is characterized by a dendritic network made up of first to third-order channels. The stream
originates in the Gantrisch area at an altitude of c. 1800 m a.s.l. where the bedrock is made up of steeply dipping
100 limestones, dolostones and marls that are part of the Penninic Klippen belt (Jäckle, 2013). Towards the lower
part of the headwater reach, the Mesozoic units are covered by several meters-thick glacial till. This headwater
102 reach transitions into a steep segment at an elevation of c. 1200 m a.s.l. where the longitudinal stream profile of
the Guerbe River shows a knickpoint (next to site 1 in Fig. 1 and circle in Fig. 2). The occurrence of such a
104 knickpoint in the stream profile is also seen in the morphology of the bordering hillslopes where slope angles
are c. 20-25° steep. These hillslopes constitute an important sediment source of the Guerbe River. Uphill, these
106 hillslopes mark a sharp transition towards a flatter landscape that was originally formed by glaciers, thereby
defining also a knickzone on the hillslopes (Fig. 2). The second segment occurs downstream of this knickzone
108 area, where the Guerbe River has been fully engineered by > 60 check dams. There, the bedrock comprises a

110 suite of Late Cretaceous to Paleocene Gurnigel Flysch and the Early Oligocene Lower Marine Molasse
112 (L.M.M.) units, both of which are alternations of shales and sandstones. They are dissected by multiple
114 landslides along the entire c. 2 km-long second segment of the Guerbe River (Red segment in Fig. 1). These
116 landslides either originate >1 km upstream of the Guerbe channel and are deep-seated with a decollement
118 horizon up to 20 m below the surface (Thuner Tagblatt, 25th of Mai 2018), or they border the Guerbe trunk
120 stream as a few shallow-seated and < 100 m-long features (decollement < 2 m deep) as own observations have
shown. Along this second reach, the Guerbe River shows a “colluvial” stream pattern as defined by Piton and
Recking (2017). The third segment comprises the reach along which the river then transitions on a c. 4 km²-
large alluvial fan where the apex is located at an elevation of c. 800 m a.s.l (white segment in Fig. 1). The
stream remains channelized and with presence of check dams on the entire fan. In the final segment, the stream
enters the floodplain area, where it flows in a confined channel until its confluence with the Aare River c. 20 km
farther downstream.

122 The climate in the region is typical for a pre-alpine regionsetting with a mean annual precipitation rate
124 that ranges between 2000 mm yr⁻¹ in the mountains and 1100 mm yr⁻¹ at lower elevations (Ramirez et al., 2022).
Accordingly, the mean annual water discharge is c. 1.3 m³ s⁻¹ as recorded by the Burgistein gauging station c. 4
126 km downstream of the source area, and the maximum discharge during the past 22 years has been 84 m³ s⁻¹,
measured on the 29th of July in 1990 (Ramirez et. al, 2022). Peak water flux occurs either during convective
thunderstorms in summer or during periods of extended precipitation in late spring and fall. In addition, a
denudation rate of c. 260 mm/kyr on our surveyed catchment was estimated from ¹⁰Be concentrations obtained
128 from riverine quartz minerals in the Guerbe River (Delunel et al., 2020).


3. Methods and datasets

130 To assess the impact of check dams on bedload fluxes, we compare the results of two different
equations representing the end members of a large panel of bedload equations, which are either based on the
132 results of flume experiments (e.g. Meyer-Peter and Müller, 1948; Einstein, 1950; Bagnold, 1980; Wong and
Parker, 2006; Parker, 2008; Recking et al., 2012) and/or field-based surveys (e.g. Karim and Kennedy, 1990;
134 Recking, 2013; Recking et al., 2016). These equations were calibrated and validated under specific conditions of
grain sizes, slopes, and channel dimensions. They are not expected to provide precise predictions for bedload
136 fluxes under extrapolated boundary conditions. Indeed, all available equations present large uncertainties when
used to estimate bedload flux for single events under the same boundary conditions, showing uncertainties of ±
138 1 order of magnitude in the best scenarios (Rickenmann, 2001; Recking et al., 2012). Despite this limitation,
these equations were adjusted to represent the average bedload flux under the same boundary conditions;
140 proving to be a powerful tool for estimating sediment flux over long-time scales. Therefore, the published and
thus available bedload equations potentially serve as a suitable tool for our study, which focuses on relative
142 changes in sediment transport capacity between engineered and non-engineered conditions in the Guerbe
River.natural conditions. Therefore, they remain valuable tools when used in a relative manner for estimating
144 changes in sediment transport capacity between engineered and non-engineered conditions in the Guerbe River.

146 Among the various bedload equations that have been published in the scientific literature, we chose to
148 consider the Meyer-Peter and Müller (1948) and Recking (2013) equations, as they are representative of the two
families of equations derived from flume and field data, respectively; two equations turn out to be most suitable
for our basin. These are, as argued for below, the Meyer-Peter and Müller (1948) and Recking (2013) formula.
However, their application requires that some geometric requirements regarding the spacing between check
150 dams and the resulting flow conditions are fulfilled. These are described in section 3.1. Following is the
introduction of the selected bedload equations used in this work (section 3.2), and the description of the methods
152 to acquire the data to estimate the sediment fluxes. Finally, we describe the considerations for the non-
engineered conditions in our estimations (section 3.4).

154 3.1. Flow specificities related to check dams

One important functioning of the filled check dams is to reduce the kinetic energy of a mountain
156 stream, which in turn is expected to reduce the sediment load (Castillo et al., 2014). In the reach downstream of
a check dam, the largest energy dissipation occurs when the water that falls from the check dam spillway
158 impacts the ground. The water enters a high-turbulent flow stage, thereby creating a scour and thus a pool just at
the foot of the check dam (e.g. Fig. 3). A second contribution to the energy dissipation derives from the basal
160 friction exerted by the arrangement of clasts along the river bed as the water leaves the pool (Piton and Recking,
2016). The flow is then more uniform, and local turbulences occur less frequently. The spacing between two
162 adjacent check dams can affect this pattern when the distance is shorter than $30h_c$ (where h_c is the critical depth
for which the Froude number is equal to 1; Piton and Recking, 2016), which is not the case for the Guerbe River
164 since the spacing between the check dams is > 20 m and the maximum critical flow depth is 0.43 m at the apex
of the alluvial fan (calculation done by using the measurements presented in the results section). This
166 assumption is key for the application of the bedload equations presented in section 3.2 since it requires the
occurrence of a near-uniform flow.

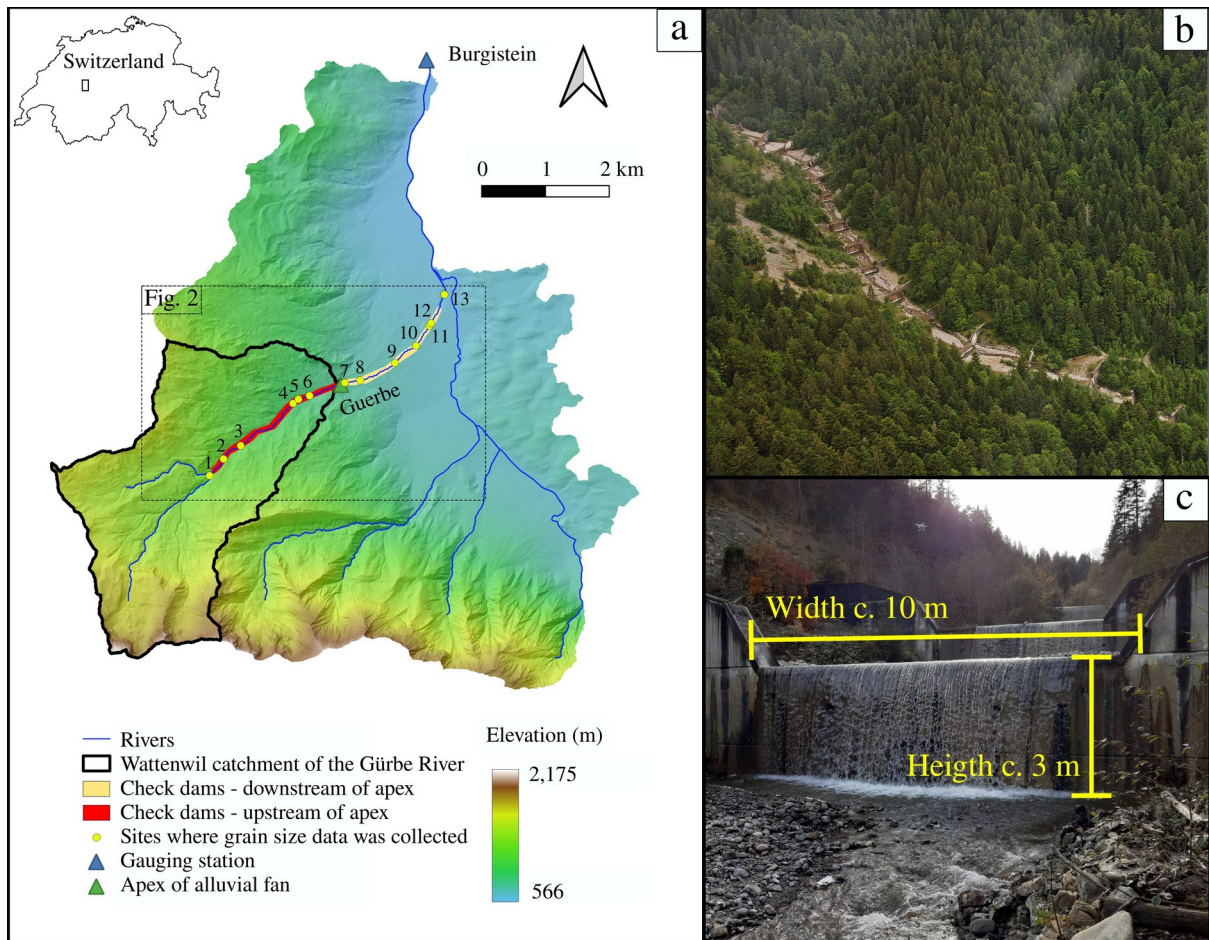

168

Figure 1. (a) DEM of the Guerbe catchment upstream of the Burgistein gauging station, and sub-catchment where sediment has been produced and supplied to the trunk channel (Wattenwil catchment of the Guerbe River). The dashed rectangle limits the area shown in Fig. 2. (b) Aerial picture in the Guerbe River with the staircase check dams. Additionally, the picture shows a steep non-vegetated area where recent hillslope instabilities have prevented a dense vegetation cover to establish (c) Example of check dams with heights of c. 3 m.

3.2. Bedload discharge in mountain streams

Among the various bedload equations that have been published in the scientific literature, two equations turn out to be most suitable for our study. The first, referred to as MP.M., is based on the Meyer-Peter and Müller (1948) formula and was developed using the results of flume experiments in the laboratory. The second equation, proposed by Recking (2013), was developed using the outcome of a combination of flume experiments and surveys in the field.

Flume-based equations to estimate the volumes of bedload transported by streams have generally been developed for rivers with slopes $< 0.02 \text{ m m}^{-1}$ (or 1.2 degrees) and riverbed material composed of grains with sizes that range from coarse sand to coarse gravel (e.g. Meyer-Peter and Müller, 1948; Einstein, 1950; Bagnold, 1980; Wong and Parker, 2006; Parker, 2008; Recking et al., 2012). In mountain streams, where slopes are

usually steep ($> 0.02 \text{ m m}^{-1}$) and where the size of the transported material ranges from gravel to boulders, these equations tends to overestimate the bedload fluxes (Lamb et al., 2008). We selected the MP.M. equation due its simplicity, suitability for the gravel grain size domain, and due its capability of being adapted for slopes steeper than 0.02 m m^{-1} . For such steep reaches, we considered a correction for the critical Shields shear stress (Lamb et al., 2008; Recking et al., 2012; Shvidchenko et al., 2001). Additionally, we employed the Wong and Parker (2006) formulation, which is an updated and corrected version of the Meyer-Peter and Müller (1948) formula. The selected field-based formulation proposed by Recking (2013), reformulated by Recking et al. (2016), considers different channel morphologies and was evaluated and validated for steep and coarse-grained mountain streams similar to the Guerbe River (Piton and Recking, 2017). Therefore, this equation may be better suited for estimating the bedload flux in our study case. Furthermore, it is important to note that in mountain streams, the amount of transported material is influenced by its availability. In this study, we clarify that bedload flux calculations are interpreted as the capacity of the torrent to transport material under specified boundary conditions.

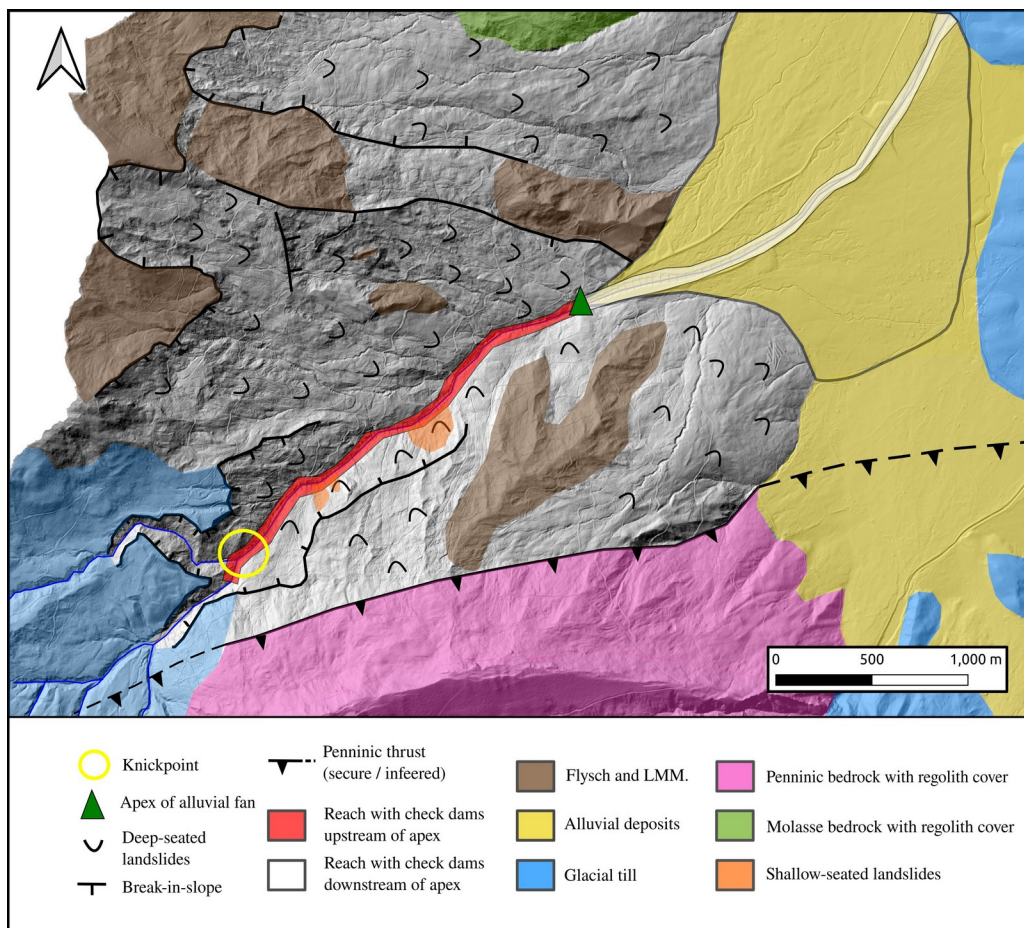


Figure 2. Map of the landslides and incised areas of the Guerbe River together with the bedrock geology underlying the catchment. The position of the knickpoint is marked located inside the yellow circle. See Fig. 1 for the position of this map. Here the LMM denotes the Lower Marine Molasse.

202 For both the MP.M. and Recking approaches we calculated the total bedload sediment flux (Q_s) by
 computing the dimensionless sediment bedload flux, ~~with. Here, this value is computed by using~~ the Einstein
 204 parameter (Φ) (Einstein, 1950):

$$Q_s = \phi \cdot W \cdot \sqrt{g \cdot (\rho_s / \rho_w - 1)} \cdot D_{50}^3 \quad (1)$$

206 Where Q_s is the total bedload sediment flux (m^3/s), W is the active river width (m), g is the gravity
 acceleration (m^2/s), ρ_s and ρ_w (kg/m^3) are the densities of sediment and water, respectively, and D_{50} (m) is the
 208 50th percentile of the riverbed surface grain sizes (b-axis) and here represents the characteristic diameter of the
 transported material. In the following, we present the formulation to calculate Φ using the MP.M. and Recking
 210 approaches.

3.2.1 Dimensionless sediment bedload flux (Φ) based on MP.M. approach

212 For an alluvial stream where water flow is considered uniform, the Einstein parameter (Φ) can be
 calculated by the formulation proposed by Wong and Parker (2006):

$$\phi = A \cdot (\tau^* - \tau_c^*)^{1.5} \quad (2)$$

Where A is a non-dimensional constant, which was set to 3.97 by Wong and Parker (2006) based on a
 216 reanalysis of the dataset obtained by Meyer-Peter and Müller (1948) through flume experiments. In this
 equation, the difference between the dimensionless shear stress (τ^*) and the Shields (1936) parameter (τ_c^*) is
 218 key for estimating how much sediment a stream can entrain from the riverbed if $\tau^* \geq \tau_c^*$. For a non-uniform
 mixture of grains on a riverbed, the choice of the D_{50} in Eq. 1 is justified for near-equal mobility conditions
 220 when grains larger and smaller than the D_{50} are mobilised at nearly the same rate and for the same shear stress
 (Julien, 2010). While Wong and Parker (2006) considered a constant value $\tau_c^* = 0.0495$ for the Shields number,
 222 Lamb et al. (2008) proposed to employ a slope-dependent correction, mainly because the consideration of a
 constant Shields number will overpredict the bedload discharge in Eq. 1 for steep gradients (> 0.02), which is
 224 the case for the Guerbe River. Therefore, we considered the Shields parameter (τ_c^*) to be dependent on the
 channel bed gradient S (in meter per meter) following the results of field and laboratory experiments (Lamb et
 226 al., 2008):

$$\tau_c^* = 0.15 \cdot S^{0.25} \quad (3)$$

228 The dimensionless shear stress (τ^*) is defined following Shields (1936):

$$\tau^* = \frac{\tau}{g \cdot (\rho_s - \rho_w) \cdot D_{50}} \quad (4)$$

230 The shear stress (τ) in a river bed is controlled by the channel depth d (in meters) for streams where the
 river width is $W > 20 d$:

232
$$\tau = \rho_w \cdot g \cdot d \cdot S \quad (5)$$

Here we considered that the channel has a rectangular configuration. In the case of a uniform flow, the friction slope can be considered as being identical to the alluvial riverbed slope ($S = S_{bed}$). The water depth is calculated from the relationship between the unit water discharge ($q = Q \cdot W^{-1}$; $m^2 \text{ s}^{-1}$) and the mean water velocity along the river depth v (expressed in meters per second):

$$d = \frac{q}{v} \quad (6)$$

238 Ferguson (2007) proposed that in a stream, the mean water velocity (v) of a water column can be calculated separately for shallow- and deep-water conditions thereby using the Manning Strickler friction law and a roughness layer (MS/RL) term:

$$v_d = \frac{a_1^{0.6} \cdot g^{0.3} \cdot S^{0.3} \cdot q^{0.4}}{D_{84}^{0.1}} \quad (\text{deep flows}) \quad (7.1),$$

242 and

$$v_s = \frac{a_2^{0.4} \cdot g^{0.2} \cdot S^{0.2} \cdot q^{0.6}}{D_{84}^{0.4}} \quad (\text{shallow flows})$$

244

Here a_1 and a_2 are empirically obtained values and set to 5.5 and 2.5 (Ferguson, 2007), and the D_{84} is the 84th percentile of the riverbed grain sizes (b-axis). The water column is considered as “shallow” if $d / D_{84} < 4$, else it is considered as deep. This formula has the advantage that it can be applied to rivers with a large range of slopes, including those encountered in mountainous streams where the slopes are steep (Zimmermann, 2010).

3.2.2 Dimensionless sediment bedload flux (Φ) based on the empirically calibrated Recking approach

250 A further method for calculating the reach-average bedload flux for gravelly rivers was proposed by Recking (2013). The related equations were empirically adjusted using a large dataset collected in the field, and they were validated by blind tests, which were conducted [infor](#) 15 river reaches. According to this author, the Einstein parameter (Φ) can be calculated through:

$$\phi = \frac{14 \tau^{*2.5}}{1 + \left(\frac{\tau_m^*}{\tau^*}\right)^4} \quad (8)$$

256 Where τ^* is the dimensionless shear stress defined in Eq. 4. The parameter τ_m^* accounts for the transition from the situation where only a fraction of the channel bed material is transported (partial transport) to the condition where all sedimentary material is in transport (full mobility). The original formula presented in

258 | 2013 was subsequently updated by Recking et al. (2016) to account for streams with flatbeds and steep-pool patterns:

$$260 \quad \tau_m^* = 1.5 \cdot S^{0.75} \quad (9)$$

In Eq. 8 the dimensionless shear stress τ^* is defined by Eq. 4, which is dependent on the flow depth (d) to estimate the shear stress (Eq. 5). In the following, we calculated the flow depth using the equation derived by Recking et al. (2016), which itself bases on the flow resistance formula proposed by Rickenmann and Recking (2011):

$$d = 0.015 \cdot D_{84} \frac{q^{*2p}}{p^{2.5}} \quad (10)$$

266 where $q^* = q/\sqrt{g \cdot S \cdot D_{84}^3}$ and $p = 0.24$ if $q^* < 100$, else $p = 0.31$. Therefore, we re-calculated the dimensionless shear stress in the following way:

$$268 \quad \tau^* = \frac{0.015 \cdot q^{2p} \cdot D_{84}^{1-3p} \cdot S^{1-p}}{p^{2.5} \cdot g^p \cdot (\rho_s / \rho_w - 1) \cdot D_{50}} \quad (11)$$

Piton and Recking (2017) used the Recking et al. (2016) formula to calculate the bedload flux considering different states of armouring on the channel bed and various sources of sediment. They compared the suitability of the equation to predict the bedload flux by using two different values as the characteristic diameter of the transported material: the 84th grain size percentile of the bedload material in transport labelled as $D_{84, TraBL}$ and the 84th percentile of the riverbed surface (D_{84} as in Recking et al., 2016), instead of the 50th percentile of the sediments on the riverbed surface (D_{50} in Eq. 11). They concluded that the choice of the characteristic diameter depends on the geomorphological context of the stream. In particular, for a “colluvial” stream pattern, as is the case for the Guerbe River, the use of the $D_{84, TraBL}$ yielded better model predictions than the D_{84} . Since in our work, we can only measure the grain size distribution representing the riverbed surface, we considered the D_{50} as representing the $D_{84, TraBL}$. We propose that this assumption is acceptable for the Guerbe River since streams with a “colluvial” pattern are characterized by similar D_{50} and $D_{84, TraBL}$ values (see Fig. 4 in Rickenmann and Fritschi, 2010 for the Erlenbach stream in the Swiss Alps and Fig. 7 in Piton and Recking, 2017 for the Upper Roize stream).

In summary, both the Meyer-Peter and Müller (1948), here referred to as MP.M, and Recking et al. (2016) formulations require the same key parameters to calculate the transported bedload, which are: the alluvial slope, the D_{50} , and D_{84} grain size percentiles, the channel width, and water discharge.

286 3.3. Data acquisition

3.3.1. Uncrewed aerial vehicle (UAV) surveys and photogrammetry processing

288 We applied a UAV close-range setup in August-September 2021 to measure grain sizes on emerged
gravel bars along the Guerbe River (Figs. 1b and 1c). We designed our surveys (13) and photogrammetric
290 processing based on the workflow of Mair et al. (2022) with the aim of reducing the uncertainties related to the
survey in the field and the processing of the data on the resulting grain sizes. To ensure a sufficient ground
292 sampling distance of < 2 mm/pix in all pictures, we conducted close-range surveys with a nominal flight altitude
between 5 and 9 m above ground. For image acquisition, we used a one-level grid of nadir camera positions as
294 backbone geometry, for which we targeted a lateral and frontal overlap between individual images of 80%. We
complemented this grid with images (5 to 20 per site) taken with oblique angles ~~with~~ with a pitch of $>20^\circ$. The
296 images were taken at the same survey altitude in an effort to minimize systematic errors during the
photogrammetric processing (James and Robinson, 2014; Carbonneau and Dietrich, 2017; James et al. 2020).
298 All images were taken in the JPEG format with a DJI Mavic 2 Pro on-board camera (Hasselblad L1D-20c),
which utilizes a global shutter. For referencing, we distributed 5 to 10 ground control points (GCPs) over each
300 target gravel bars and measured them with a Leica Zeno GG04 Plus GNSS antenna with the real-time online
Swipos-GIS/GEO RTK correction. This setup yields a horizontal precision of 2 cm and a vertical precision of 4
302 cm (2σ) under ideal conditions (Swisstopo, 2022). The subsequent photogrammetric processing followed
standard structure from motion (SfM) workflows (e.g., James and Robson, 2012; Fonstad et al., 2013, Eltner et
304 al., 2016) including recent updates (e.g., James et al, 2017a, b; 2020) to produce high quality orthomosaic and
digital surface models (DSMs) for each gravel bar (e.g. Fig. S1). To do so, we used the Agisoft Metashape (v1.6
306 Pro) software, licensed to the Institute of Geological Sciences, University of Bern. In total, we processed 13
SfM models, with average checkpoint/GCP precision of 26.69 ± 17.72 mm and systematic errors < 10 cm
308 (Table S1).


3.3.2. Grain size measurements

310 We manually measured the size of grains on the orthomosaics that resulted from the field surveys (see
section above) by applying the approach of Woman (1954). Here we used the QGIS 3.22 open-source software
312 to create a grid with a 0.5 m-wide spacing and to measure the sizes of grains. For each grain underneath a grid
intersection, we measured the lengths of the a- and b-axes by fixing four dots at the grains' edges, thereby using
314 these to define the two perpendicular axes (e.g. Fig. S1 and S2 in appendix). Because of the limited resolution of
the images (Table S1 for image resolution), we defined a grain size measurement threshold of 2 cm.
316 Accordingly, all grains smaller than this threshold were considered as equal to 2 cm. This consideration had no
effect on our values of 50th or 84th grain size percentiles since the proportion of grains smaller than 2 cm was
318 never larger than 25%. We then calculated the 50th and 84th percentile values from the grain size dataset to
characterize each gravel bar. Following Mair et al. (2022), we estimated the related 95% confidence intervals
320 using a combined bootstrapping and Monte Carlo modelling approach for which we ~~used~~ employed the survey-
specific SfM uncertainties (Table S1). Here, we assumed that the grains on the gravel bars are characteristic of

322 the material that was transported during equal mobility conditions since during these events the surveyed bars
323 were immersed/flooded.

324 3.3.3. Topographic gradients and river widths

In the Guerbe River, the bedload transport is currently conditioned by the values of the engineered
325 slopes (S_e in Fig. 3), which we measured from the DSMs obtained from the UAV images (Section 3.3.1). For
326 non-engineered conditions, we inferred that the corresponding slopes (S_n in Fig. 3) would have been similar to
327 the gradient of a 300 m-long reach around the site of interest where grain size data was collected (150 m
328 upstream and 150 m- downstream), considering an elevation difference between at least 6 check dams. Here we
329 used the LIDAR DEM swissALTI3D (swisstopo, 2019) with a spatial resolution of 0.5 m² as a basis. The slope
330 values were then calculated by taking the difference in the topography of two points in the water flow direction
331 and dividing this value by the distance between them. For each survey site, we repeated such measurements at
332 least 30 times to calculate the 95% confidence interval of the slope. Also at these sites, we measured the active
333 river's width on orthoimages (SWISSIMAGE, spatial resolution of 10 cm; swisstopo)-. We determined the
334 cross-sectional stream widths by measuring the width of the check dams' spillways downstream of our survey
335 reach, which is considered to represent the engineered river width during flood stages.

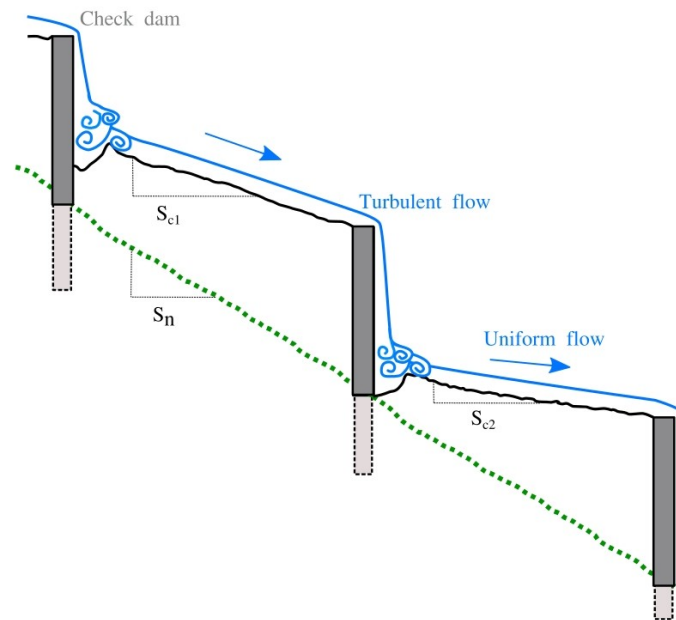

337 **Figure 3.** Topographic gradient S_n along a reach between check dams: From the engineered riverbed (black line)
338 we calculated the engineered slope of the river (S_e). Likewise, we calculated the non-engineered slope (S_n , green
339 dashed line) using a 300 m-long reach around the site of interest.

340

3.3.4. Surface runoff

342 The water discharge is a further key parameter for calculating the sediment bedload flux (Eq. 1 to 11).
The runoff can greatly vary over a short time interval, and such variations are even stronger during the
344 entrainment of sediment particles in mountain streams (Tuset et al., 2016). This implies that information on the
local runoff is necessary to properly calculate the rates of bedload transport. Here, we used the gauging records
346 at Burgistein (Fig. 1a) as a reference, where sensors have measured the water levels every minute since 2009.
These values have then been converted to water discharge based on an empirical relationship in which the
348 related parameters were acquired at Burgistein (Spreafico and Weingartner, 2005). This station has been
operated by the Bau- und Verkehrsdirektion des Kantons Bern (<https://www.bvd.be.ch/>), which offered us the
350 water discharge data acquired between 2009 to 2021.

Since our area of interest is situated upstream of the Burgistein station (Fig. 1a), we downscaled the
352 runoff values measured at Burgistein (Q_b) for our sites of interest (Q_l) by a factor that depends on the ratio
between the size of the upstream catchment of the selected site (A_l) and that of the Burgistein station (A_b). This
354 value was then multiplied by the ratio between the mean annual precipitation rate for the corresponding
catchment contributing to water runoff at the selected site (P_l) and the Burgistein station (P_b):

$$356 \quad Q_l = \frac{A_l}{A_b} \cdot \frac{P_l}{P_b} \cdot Q_b \quad (12)$$

Here, we employed an annual precipitation rate value of $P_l = 1734$ mm for our study reach and $P_b =$
358 1492 mm for the basin (Ramirez et al., 2022), which contributes to the runoff at Burgistein. We then used the
gauging data collected over the past 12 years, based on which we estimated the range of bedload flux and also
360 the total volume of sediment transported during this time, and we did so for engineered and non-engineered
conditions in the Guerbe River. We acknowledge that this formulation deviates from the conventional method
362 for estimating discharge at ungauged sites, which typically involves applying a power exponent to the catchment
area ratio (McMahon et al., 2002). Given the wide range of values for this exponent, we opt for the use of the
364 precipitation ratio. This ratio is grounded in data specific to our catchment and produces similar results as when
applyingis equivalent to a power exponent; produceingwith values within the range of 0.9 to 0.95. We also
366 acknowledge that the estimation of runoff upstream of a gauging station depends on multiple factors such as the
groundwater level, the type of vegetation, and the thickness of the soil (Sriwongsitanon and Taesombat, 2011).
368 However, since our gauging station is only c. 4 km downstream of our area of interest, we inferred that
neglecting these factors will not significantly bias our estimations of the local runoff values.

370 3.3.5. Propagation of uncertainties in estimating the bedload flux

We applied a workflow that uses Monte Carlo simulation and bootstrapping to estimate the
372 uncertainties of the bedload predictions (see S2 for a detailed description of the workflow). We proceeded
through using the uncertainties that occur upon measuring the values of the key variables as input parameters,
374 and through fitting the gamma distributions for the range of uncertainties that are associated with the percentiles

of the grain size datasets (i.e., the 95% CI on the D_{50} and D_{84}). These were obtained with the method proposed
376 by Mair et al. (2022) to simulate the related uncertainties. The scale and shape parameters of the gamma
distributions that we employed for the Monte Carlo simulation are presented in Table S3. We used normal
378 distributions for all engineered and non-engineered slopes, with the standard deviation calculated from the 95%
confidence interval divided by 4. For estimating the uncertainties on the width values we applied a uniform
380 distribution where the length of this distribution was defined using the measured width including a $\pm 10\%$
uncertainty at each site.

382 **3.4. Considerations of non-engineered scenarios**

For the non-engineered scenarios, we considered changes not only in the slope but also in the river
384 width and grain sizes. In particular, in a natural state, the channel widths are expected to be smaller than the
widths of the check dams' spillways as is currently the case. This has been shown in various engineered
386 mountainous streams (Piton et al., 2017; Lucas-Borja et al., 2021) and is likely also valid for the Guerbe torrent.
However, predictions of natural channel widths can be challenging because the hillslope instabilities around the
388 channel can strongly affect this parameter, and information on widths was not available for the time before the
check dams in the Guerbe River were constructed. Therefore, we had to make assumptions and considered three
390 scenarios in which the current widths were shortened by 75%, 50% and 25%. Although we lack constraints to
sustain these inferences, we justify the selection of these values because upstream of site 1 where the Guerbe
392 River is poorly engineered, the channel widths are generally narrower than the width values we get when
applying a 50% shortening. In the same sense, a prediction of grain size patterns for non-engineered conditions
394 is speculative because of a lack of observations. Here, we used the grain size values from the bulk material
upstream of site 1, which we considered as characterizing the source signal. Indeed, mapping shows that the
396 highly active hillslopes just upstream of site 1 have most likely been the primary material source (Figs. 1a and
2). Furthermore, because riverbed grain sizes can also be affected by abrasion during transport in mountainous
398 torrents (Miller et al., 2014), predictions about how the calibre of the bedload material changes downstream are
almost impossible to make particularly for non-engineered states in the past. Therefore, we considered the grain
400 sizes of the inferred supply signal as maximum values, which we kept as a constant parameter along the
surveyed sites for some scenarios. Consequently, the non-engineered scenarios presented in this work will base
402 on conservative assignments of values to the parameters, which control the transport of bedload material.

4. Results

404 **4.1 Grain size, channel slope and width, and water discharge**

We obtained data on ~~grain sizes of sedimentary particles on the riverbed surface~~ bed surface grain sizes
406 and channel slopes for engineered and non-engineered conditions for all 13 surveyed sites (Fig. 4). The D_{50}
values resulting from the measurements show a decreasing trend from c. 8.3 cm to 2.4 cm in the downstream
408 direction (Fig. 4a). In contrast, the sizes of the D_{84} rapidly decay between sites 1 and 2 from > 25 cm to < 20 cm,
after which the values fluctuate between c. 20 and 10 cm (Fig. 4b). The measured slopes for engineered
410 conditions display a similar pattern as the D_{84} in the sense that the energy gradient rapidly decreases from c. 10

to 5 cm m⁻¹ between sites 1 and 2. The gradients then oscillate around a value of c. 3 cm m⁻¹ farther downstream (Fig. 4c). This pattern of alternating slope values is clearly visible for the reaches between all check dams in the dataset obtained from the 0.5 m SwissAlti3D DEM where the data collection was achieved in 2019 (Fig. S3). The non-engineered slopes are substantially different. They are flattest at site 1 and along the downstream portion of the fan (from site 7 onwards) where the values are c. 10 cm /m⁻¹ and less (Fig. 4d). In-between, the energy gradients continuously decrease in the downstream direction, starting with c. 20 cm m⁻¹ at site 2 and ending with a value of 10 cm m⁻¹ on the fan itself (Fig. 4d). This rapid increase in energy gradient between sites 1 and 2 points to the occurrence of a knickpoint in the longitudinal stream profile (see section 5.3 for more details), which is also corroborated by the geomorphological map where several break-in-slopes are visible on the hillslopes bordering the channel system in this area (Fig. 2). The current channel widths (thus during engineered conditions) fluctuate around a value of 15 m without displaying a clear trend in the downstream direction (Table S2). Please see Figures 4e, 7e and 8e for illustrations of the elevation profile and the locations of all surveyed sites.

The pattern of water discharge along the surveyed reach was calculated using Eq. 12 and the records at the Burgistein gauging station as a basis (Figs. S4). Accordingly, at the fan apex, the annual peak ~~annual~~ discharge values vary between 5 and 18 m³ s⁻¹ (Fig. 5). Note that the latter value was registered in 2021 and has been the largest discharge during the surveyed period.

4.2 Bedload flux for engineered and non-engineered scenarios

We calculated the volumes of the instantaneous and mean annual bedload that can be transported along the surveyed sites by applying the MP.M. and Recking formula. Considering the constraints as elaborated in sections 3.4 and 4.1, the results show that for the engineered conditions, the mean annual bedload transport rate at the fan apex ranges from c. 1'000 to 6'000 m³ yr⁻¹ if the MP.M. equation is used, or from 900 to 2'500 m³ yr⁻¹ if the calculations are done with the Recking approach (Fig. 6). For the non-engineered state, we calculated mean annual transport rates that are between c. 10 (Recking formula) and 100 times higher (MP.M. formula). More specifically, the values for bedload transport at the apex vary from 30'000 to 400'000 m³ yr⁻¹ using MP.M.'s equation for all scenarios of channel width shortening and grain sizes (Fig. 6a). Alternatively, the values are smaller if estimated with the Recking equation, and they vary between 1'000 to 150'000 m³ yr⁻¹ (Fig. 6b). See a detailed discussion on these differences in section 5.1.

Along the segment upstream of the apex, the mean annual bedload fluxes calculated for all surveyed sites revealed specific patterns both for engineered and non-engineered conditions and also for the MP.M. and Recking approaches (Fig. 7). For the engineered conditions the use of the MP.M. equation predicts the highest bedload flux, which is c. 10'000 m³ yr⁻¹ for site 1, whereas the fluxes are less than 2'500 m³ yr⁻¹ for all the other surveyed sites (Fig. 7a). In contrast, the application of the Recking equation returns values of mean annual bedload flux that are less than 1'000 m³ yr⁻¹ for all sites upstream of the fan apex (Fig. 7c). For the non-engineered conditions, the application of the MP.M. equation shows a rapid increase in the bedload capacity between sites 1 and 2, after which the values fluctuate around c. 400'000 m³ yr⁻¹ in the downstream direction

until the fan apex (Fig. 7b). In contrast, the application of the Recking approach predicts that sediment flux
448 | continuously increases from $< 1'000 \text{ m}^3 \text{ yr}^{-1}$ in the headwaters to $> 60'000 \text{ m}^3 \text{ yr}^{-1}$ near the fan apex (Fig. 7d). If
the stream's response to peak discharge conditions is considered, then for engineered conditions the MP.M.
450 equation returns a peak sediment flux at site 1 of $0.3 \text{ m}^3 \text{ s}^{-1}$, after which the bedload flux fluctuates around a
constant value that is c. 3 times lower than at site 1 (Fig. 8a). The pattern is similar if the Recking equation is
452 used, but the values are generally 50% lower (Fig. 8c). In addition, also using the Recking equation, site 1 has a
predicted sediment flux that is the same as farther downstream. If the non-engineered states are considered, then
454 the application of the MP.M and Recking equations show both the same pattern for the peak discharge
scenarios, where the bedload fluxes during peak discharge are between 8 (MP.M equation) and 20 times higher
456 (Recking equation) than for engineered conditions (Figs. 8b and 8d).



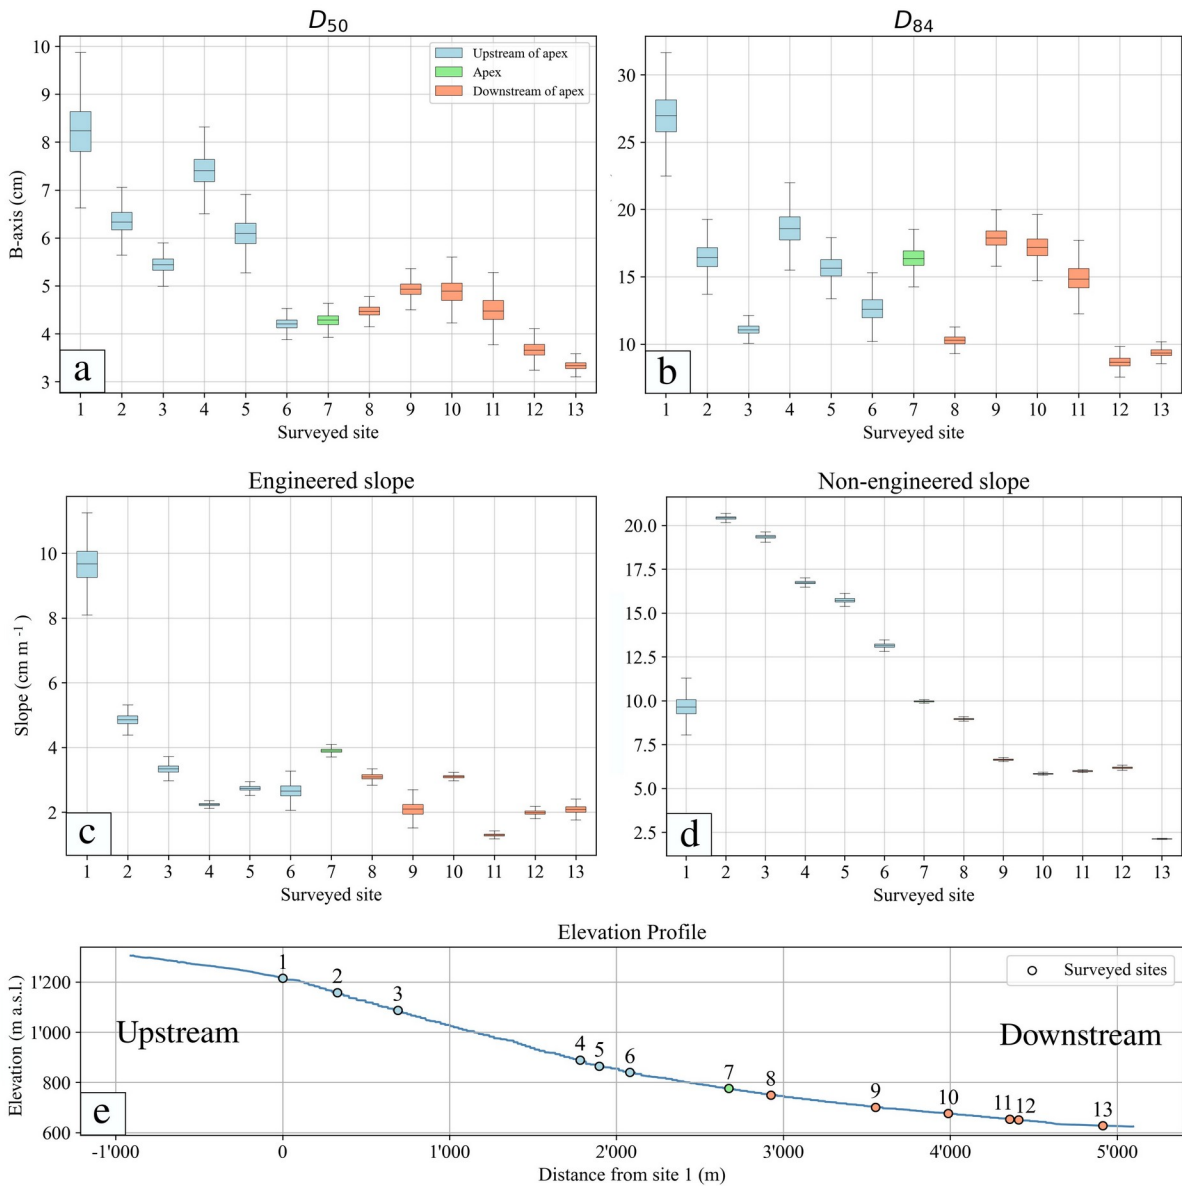


Figure 4. Boxplots representing the measured parameters at the surveyed sites with propagated uncertainties: (a) Bed surface grain size D_{50} , (b) size of the D_{84} of the sediments on the bed surface, (c) alluvial slope for the engineered conditions, and (d) alluvial slope obtained from the DEM for non-engineered conditions. (e) Elevation profile of the Guerbe River. The sites upstream and downstream of the alluvial fan's apex are indicated by the blue and red colours, respectively, and the site on the apex is indicated by the green colour.

462

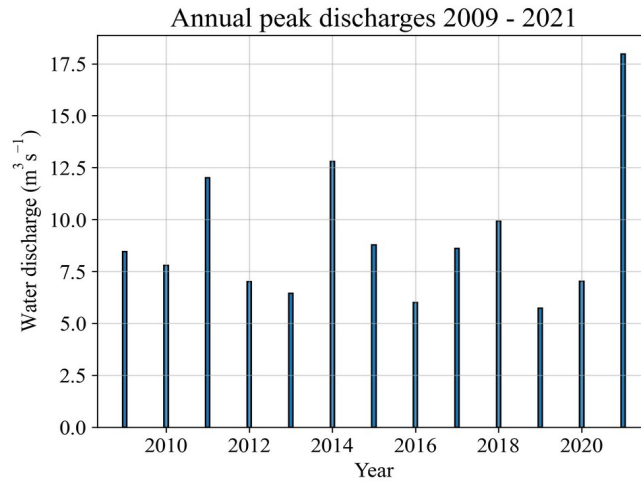

464 **Figure 5.** Calculated values of annual peak discharge for the fan apex of the alluvial fan in the Guerbe River during the period between 2009 and 2021.

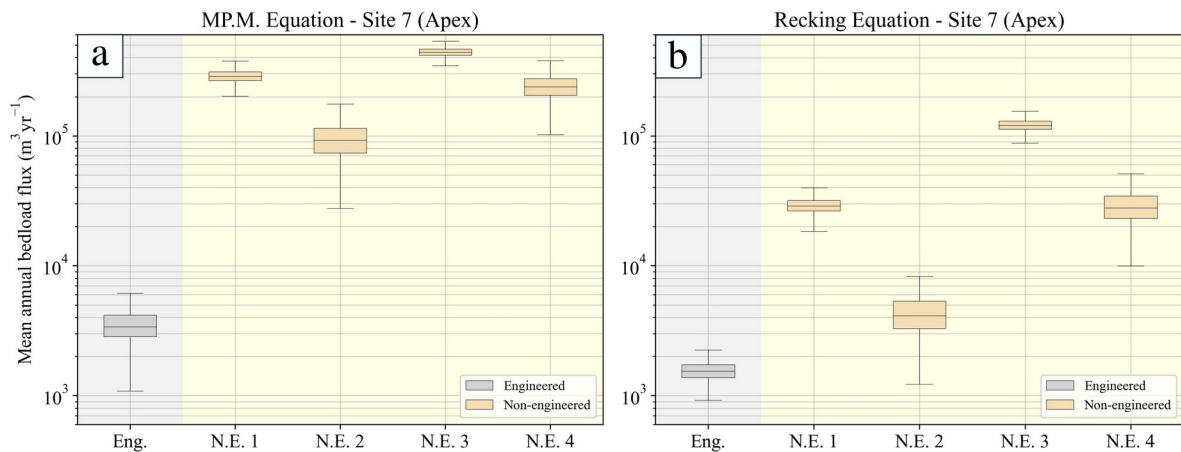

466 **Figure 6.** Boxplot representation of the mean annual bedload estimates using (a) the MP.M. and (b) the Recking
 468 approaches for the Guerbe River catchment. The engineered (Eng.) and the non-engineered (N.E.) scenarios are
 based on using the parameters shown in Fig. 4. Specifically, the engineered scenario is based on the average of
 the engineered slopes, whereas the results for the non-engineered scenarios are based on: (N.E.1) a 75%
 470 reduction of the channel width and grain sizes from site 7; (N.E. 2) a 75% reduction of the channel width
 and grain sizes from site 1; (N.E. 3) a 25% reduction of the channel width and grain sizes from site 7; and (N.E. 4)
 472 25% reduction of the channel width and grain sizes from site 1.

Downstream of the apex, the two equations yield the same pattern where both the peak and mean
 474 annual bedload fluxes have lower values than at the apex for non-engineered conditions (Figs. 7 and 8). Yet, for
 the engineered conditions, we observed that the flux pattern locally reached high values particularly if the
 476 Recking equation is applied. Finally, to identify potential locations of riverbed armour breaking during peak
 discharge, we estimated the bedload flux by applying the Shields equation (Eq. 4) with the D_{84} grain size as a
 478 threshold (Schlunegger et al., 2020). This estimation is a variation of the result presented in Fig. 8 for the peak

482 discharge in 2021, where we considered armour breaking if the calculated bedload flux exceeds $0.001 \text{ m}^3 \text{ s}^{-1}$
484 (Table S4). When armour breaking occurs, we anticipate a substantial material transport and expect changes in
the channel morphology, including slope variations, during and after the event. Under engineered conditions,
our results suggest that such channel bedform reorganization might occur at only a few specific sites (Table S4).
486 Conversely, in a non-engineered scenario, almost all sites are predicted to experience armor-breaking conditions
during a flood with a magnitude comparable to the 2021 peak discharge (Table S4).

488 **5. Discussion**

The application of two different approaches to calculate the bedload transport capacity revealed
490 specific differences, which become more important when considering the non-engineered status. In contrast,
where bedload transport rates are calculated for engineered conditions, the differences resulting from the two
492 formulations are less and within uncertainties. This will further be discussed in section 5.1. Thereafter, we
discuss how the check dams potentially contribute to the regulation of sediment transport (section 5.2) and how
494 the stabilization of the channel bed affects the consolidation of the hillslopes (section 5.3).

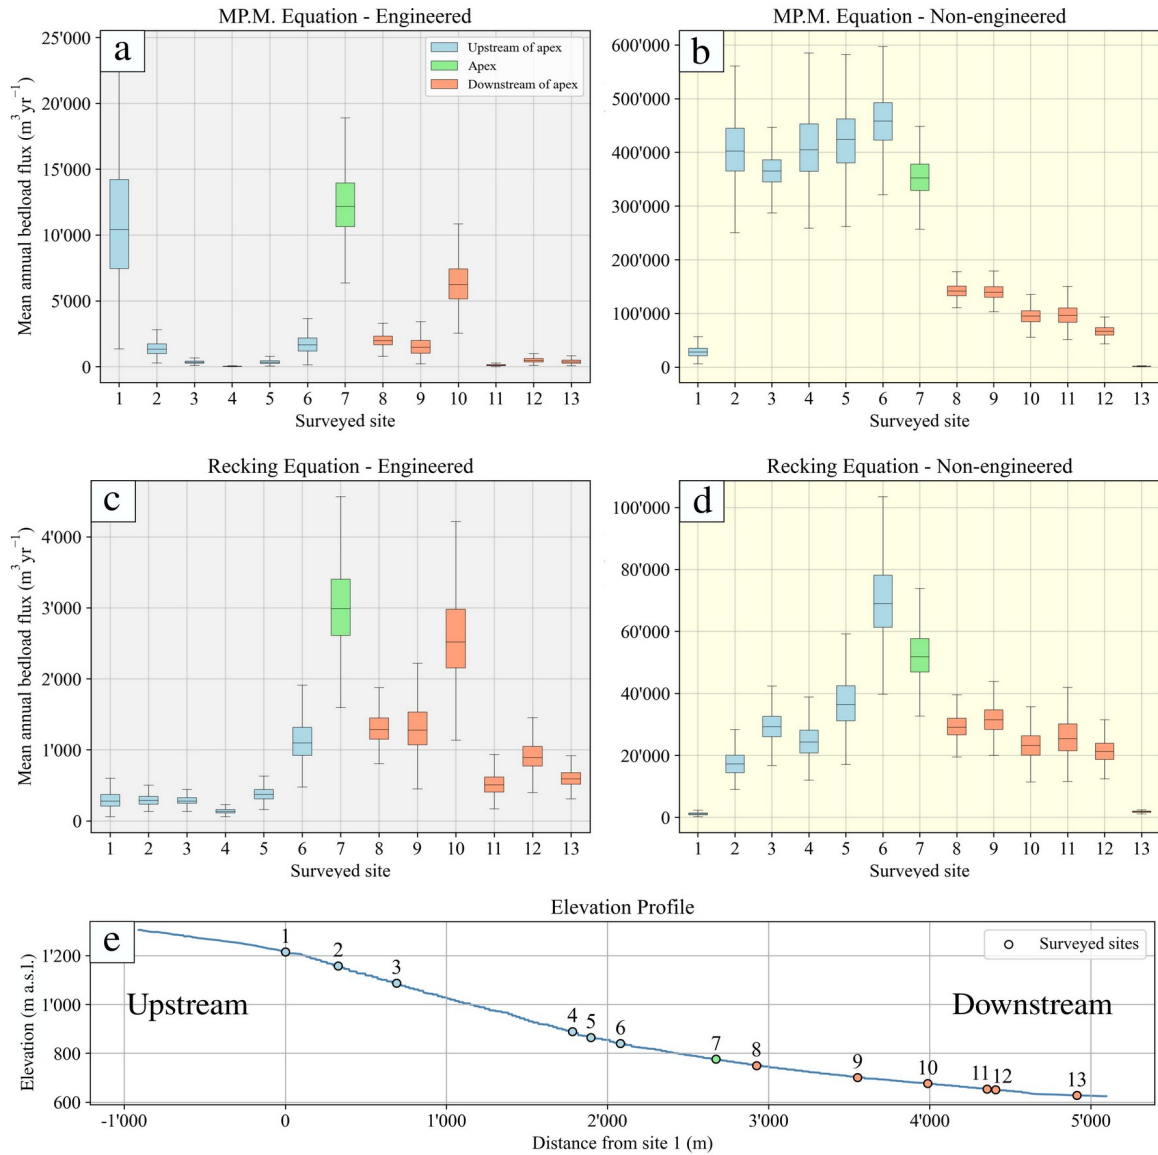


Figure 7. Boxplot representation of the annual mean bedload estimates using the MP.M. and the Recking along all the surveyed sites. For the values of the parameters to compute the sediment flux for engineered (a and c) and non-engineered (b and d) scenarios, please refer to Fig. 4. Specifically, the non-engineered scenario is based on the assumption that the width of the channel is reduced by 50%. The sites upstream and downstream of the alluvial fan apex are indicated by the blue and red colours, respectively, and the site on the apex is indicated by the green colour.

Bedload flux during the maximum water discharge

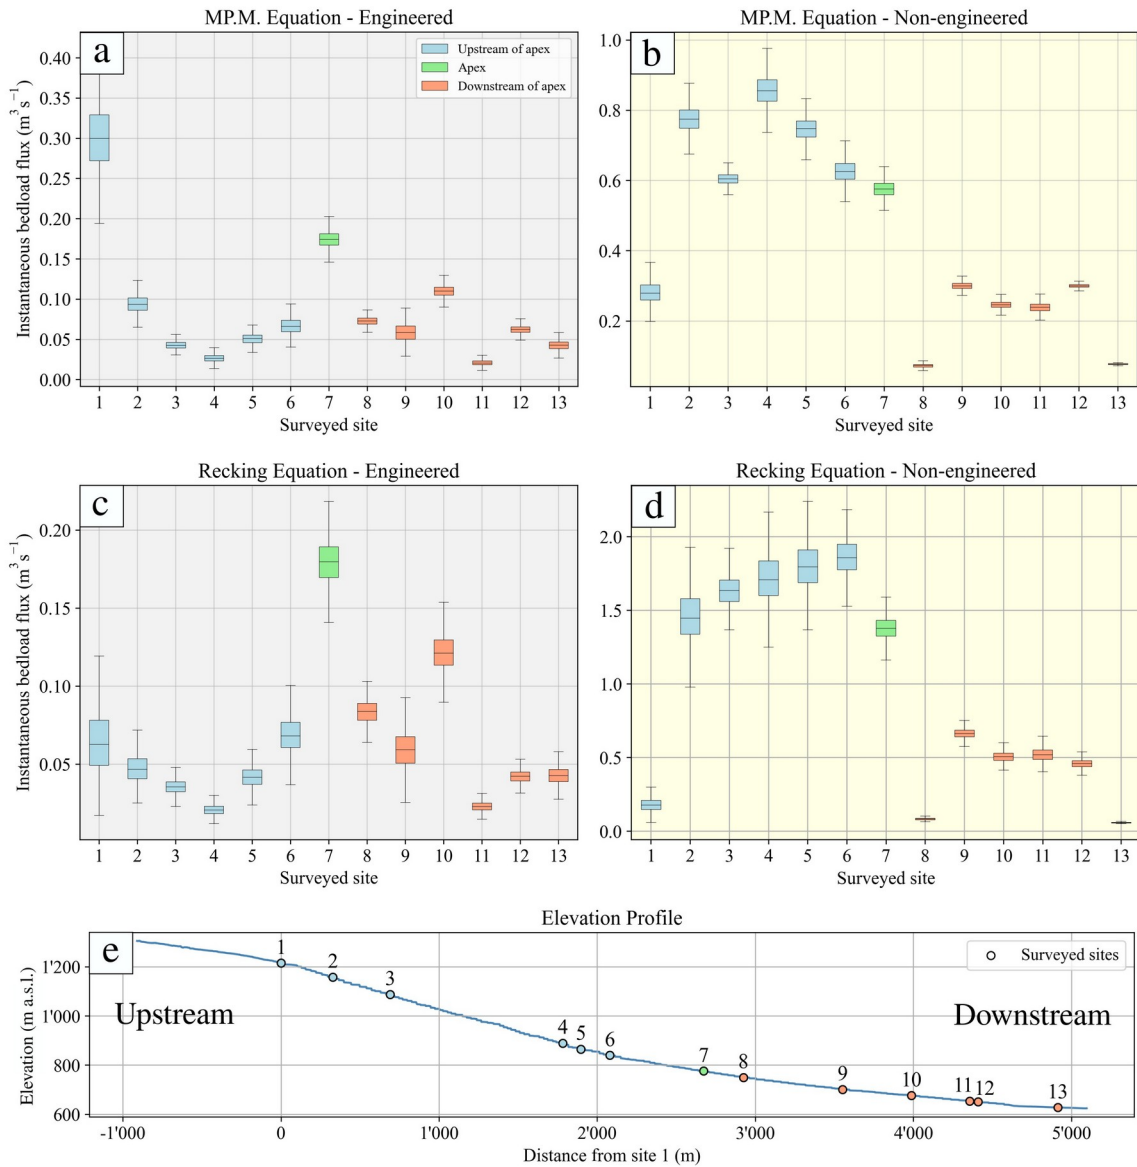



Figure 8. Boxplot representation of the bedload predictions using MP.M. and Recking during the 2021 peak runoff along all the surveyed sites. The engineered (a and c) and the non-engineered (b and d) scenarios are based on the parameters shown in Fig. 4. Specifically, in the non-engineered scenario we show the results where 50% of the current channel width is employed. The sites upstream and downstream of the alluvial fan apex are indicated by the blue and red colours, respectively, and the site on the apex is indicated by the green colour.

5.1. Analysis of the equations' results

For non-engineered conditions, we consider the MP.M. approach to yield a strong overestimation of the mean annual sediment bedload flux if the results of the Recking equation are taken as a reference. We justify the selection of this benchmark because the Recking formula was explicitly validated with data from steep mountainous catchments such as the Guerbe River (see above). Furthermore, a recently published dataset on

sediment load in torrent catchments reveals that for areas below 5 km², the maximum sediment supply is
512 approximately 13'000 m³ yr⁻¹ (Morel et al., 2023). Similar to the Guerbe case, this value is of the same order of
magnitude as the predictions by the Recking equation (N.E. 1 and N.E. 4 in Fig. 6b) and is roughly 10 times less
514 than the predictions from the MP.M. for a non-engineered situation (Fig. 6a). This overestimation of the bedload
transport rates mainly concerns the cases of low water discharge (Fig. 9b). Because low water fluxes occur more
516 frequently during one year than peak discharges, the mean annual bedload transport rates will be higher. For
peak discharges, however, the Recking equation predicts much higher sediment fluxes than the MP.M. equation
518 (Fig. 9b). Since the Recking approach was also validated for peak water flux (see above), we consider the
resulting values for the Guerbe River as realistic. For the engineered conditions, however, both equations predict
520 similar sediment fluxes during low and high runoff (Fig. 9a), thereby explaining why predictions of mean
annual sediment fluxes are nearly the same for both equations.

522 We also compare our outcomes with two available studies in the Guerbe catchment. The first one
estimated the sediment budget from ¹⁰Be concentrations in the catchment (Delunel et al., 2020), where a
524 denudation rate of approximately 260 mm kyr⁻¹ on our surveyed catchment area gives a mean annual sediment
yield of c. 3'000 m³ yr⁻¹. Conventionally, cosmogenic data integrate denudation of times scales of several
526 thousands of years (von Blanckenburg, 2005) and as such this value would correspond to the total sediment flux
prior to the construction of the check dams. However, as will be argued below, the construction of these steps
528 resulted in a partial disconnection between the shallow-seated landslides and the Guerbe River particularly
along the margin of the trunk channel (e.g. the Riselbruch landslide which became stabilized after the check
530 dams were built, see section 5.3). Because the foot of a landslide has been documented to release material with
low ¹⁰Be concentrations (Cruz Nuñez et al., 2015), we anticipate that during pre-engineered conditions the
532 concentrations of cosmogenic ¹⁰Be in riverine quartz would have been lower. Therefore, we consider the
sediment flux of the c. 3'000 m³ yr⁻¹ as representative of the current state. The second study used the CEASAR-
534 Lisflood evolution model to estimate the total sediment load (suspended and bedload) for engineered conditions,
where a mean annual sediment load of 1'222 m³ yr⁻¹ was predicted (Ramirez et al., 2022). Both results can be
536 converted to mean annual bedload fluxes by applying a 60% factor, based on the results of sediment budgets
carried out on mountain streams in the Alps for basins that are c. 10 km² large (Schlunegger and Hinderer,
538 2003). Therefore, applying these corrections for the current engineered state, the ¹⁰Be-based bedload flux is c.
1'800 m³ yr⁻¹, whereas the related value derived with the CEASAR-Lisflood evolution model would be in the
540 range of c. 700 m³ yr⁻¹. Considering the uncertainties that are associated with estimating bedload transport, the
cosmo-based sediment flux and the estimates by Ramirez et al. (2022) are in agreement with the outcome of our
542 calculations based on the Recking formula.

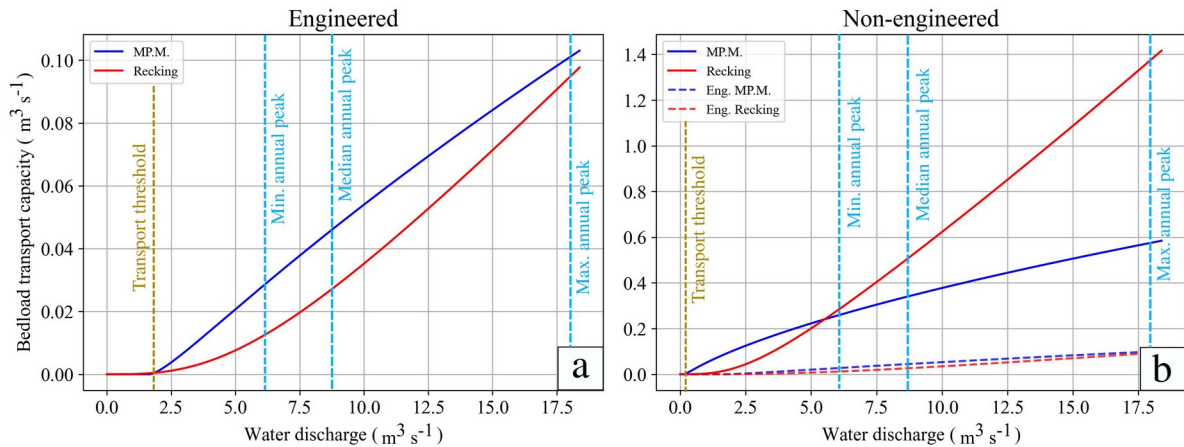

544 **Figure 9.** Predicted bedload versus water discharge patterns using the MP.M and Recking approaches for (a)
 546 engineered and (b) non-engineered conditions. These patterns were determined using data collected at site 7
 (Fig. 4). Specifically, as shown in this figure, the results for the engineered scenario are based on the average of the
 548 engineered slopes. Those of the non-engineered scenario considered a 50% reduction of the channel width at
 site 7, and the grain size data that was also collected at that site.

5.2. Regulation of sediment transport

550 For engineered conditions and considering the last peak water discharge event in 2021, the predictions
 using the MP.M. and Recking approaches reveal site-specific fluctuations in both the transport capacity and the
 552 armour-breaking probability (Fig. 8 and Table S4). This pattern suggests that sediment transport is regulated
 through buffering effects where during a peak discharge event some sites will store a fraction of the supplied
 554 sediment while others will release a large portion of the previously stored material. Such regulation has already
 been described for filled check dams where the concrete structures (such as check dams) create fixed points
 556 along a longitudinal profile of a river, which disconnects the reaches between the dams (Piton et al., 2017). In
 addition, check dams reduce the length of the reach where spontaneous erosion could occur, thereby reducing
 558 the risk where large volumes of sediment are released and transported downstream in a short time (Piton and
 Recking, 2016). We consider that the occurrence of such a regulation is recorded by the downstream
 560 fluctuations of the alluvial slopes (Figure 4 and S3) where segments with flat slopes have the potential to store
 further material, whereas reaches with steep slopes will likely represent a sediment source during a next event
 562 when large water fluxes occur. As an additional consequence of such a regulation, the grain size will rapidly
 fine downstream through selective transport, particularly along the depositional sites. Such a mechanism was
 564 predicted by theory (Paola et al., 1992) and is documented by our data (Fig. 4). Note, however, that besides
 selective transport, the breaking of grains as they fall from the dams into the pool likely also contributes to the
 566 fining of the material (Miller et al., 2014).

568 | 5.3. Bed stabilization and hillslope consolidation

We interpret that the check dams contribute effectively to the bed stabilization of the Guerbe River (Piton et al., 2017; Lucas-Borja et al., 2021). We infer the occurrence of such a mechanism at work using the results of the MP.M. and Recking equations, both of which predict that in the absence of check dams, the mean annual transport capacity would be substantially higher. This is particularly true along the segment between sites 1 and 2 when the predictions of the sediment flux for the non-engineered state is compared to the flux values characterizing the engineered conditions (Fig. 7b and 7d). This is also the region where we mapped a major knickzone on the hillslopes that border the channel network (Fig. 2). Such features are usually considered as evidence for the occurrence of high surface erosion and sediment production rates (Van den Berg and Schlunegger, 2012; Whittaker and Boulton, 2012; Battista et al., 2020), and they would most likely represent the sites of major sediment production in the case that no check dams had been built. It appears that the check dams are stabilizing the bed, thereby reducing the erosional potential along the reach, which otherwise would be an important sediment factory.

In a scenario where the Guerbe riverbed has not been stabilized, fluvial erosion could lead to an increase in sediment supply by activating shallow-seated landslides (Piton et al., 2017; Lucas-Borja et al., 2021). Such a mechanism at work has been documented for the Erlenbach River, which is an Alpine torrent in Central Switzerland (Rickenmann and Fritschi, 2010). For this basin, Molnar et al. (2010) documented an increase in the slip rates of landslides following a period of rapid fluvial dissection. For the case of the Guerbe basin, an inspection of satellite images taken between 1970 and the present from the Guerbe River discloses that between sites 1 and 2 the landslide activity in the Riselbruch (Knickpoint zone in Fig. 2, S5a and S5b) decreased after the construction of the check dams along this reach leading to a reforestation of the area (Fig. S5c and S5d). We use this example to argue that the check dams in the Guerbe River contribute to the consolidation of the hillslopes (Piton et al., 2017; Lucas-Borja et al., 2021). This mechanism results in a stabilisation of the terrain surrounding the channel, which allows the growth of a stable vegetation as the landsliding activities decrease. Furthermore, the application of the Recking equation predicts that in the absence of check dams, such a hillslope deconsolidation will not only occur in the uppermost area surrounding the knickzone but also along the entire reach upstream of the fan apex (Fig. 7d). We base this inference on the predicted downstream increase in the bedload sediment flux.

596 | 5.4. Are check dams really effective in reducing hazard impact?

From our results, we conclude that the presence of check dams in the Guerbe River does reduce the bedload flux outcoming from the sediment production area, thus reducing the potential for hazards in the downstream reaches of the stream. However, this conclusion is only valid if we assume that the check dams will not fail over time, which has indeed not been the case with the Guerbe River during the past hundreds of years (Salvisberg, 2017). In fact, Ramirez et al. (2022) showed that a failure of one or multiple check dams releases a large amount of the material that was originally stored behind the concrete structures. These authors also showed that such failure can initiate a cascade where other dams will break in the downstream direction. It is

604 possible that re-activations of deep-seated landslides can initiate such a failure. Recently, the displacement of
the deep-seated Meierisli landslide has damaged >10 of these structures (Andres and Badoux, 2019), with the
606 consequence that some of them are likely to break and thus to fail in the next years. - It was also found by the
responsible engineers (G. Hunziker, pers. comm. 2022) that the slip of such landslides has not been influenced
608 by the presence of check dams during the past decades, with the consequence that they have constantly applied
lateral stress on the concrete structure, causing them to eventually break. Consequently, in order to guarantee the
610 functioning of the check dams as we described above, it is necessary that such infrastructure will be
continuously maintained and repaired after some damages, and that the deep landslides will eventually be
612 surveyed and engineered if possible. From a broader perspective, the results of our study can be extended to
other steep mountain streams that have already been managed with such infrastructure. In addition, we propose
614 that the outcome of our analysis might be used as guidelines for projects that aim at building a staircase system
along a steep mountainous stream.

616 **6. Conclusions**

The analysis presented above shows that the current presence of check dams in a steep alpine stream
618 (Guerbe River) has a major influence on mitigating the sediment production in the catchment and, consequently,
reducing the risks of hazards related to high sediment fluxes. We applied two different approaches to calculate
620 bedload fluxes, which were based on the Meyer-Peter and Müller (MP.M.) and the Recking equation, and we
applied them for engineered and non-engineered conditions. Both equations resulted in similar predictions
622 regarding mean annual bedload fluxes for the currently engineered state, and they also predict higher transport
rates of bedload material for the non-engineered state. ~~However~~In contrast, models that are based on the
624 Recking solution predict an increase in bedload flux for non-engineered conditions that is c. 10 times higher
than for the engineered state, whereas the MP.M. equation predicts a bedload flux that is even 100 times larger.
626 Since the Recking approach was calibrated with data from mountain streams with a channel floor morphology
characterized by steps and pools, we consider the resulting predictions for non-engineered scenarios as more
628 reliable than those derived from the MP.M. formula. Importantly, we find that the check dams regulate sediment
transport through buffering pulses of sediment during high discharge conditions. In particular, reaches separated
630 by check dams can either function as a sedimentary sink or as a material source. This is observed by the
downstream variations of local energy gradients where segments with a higher slope could potentially act as a
632 sediment source, whereas reaches with flatter slopes have the potential to store some of the supplied material.
As a second function, we considered that check dams contributed to the stabilization of the channel bed. We
634 infer this by our model results, particularly for the uppermost region where check dams were built. There, for
non-engineered conditions, the models predict a large increase in the bedload transport rate where the slope
636 rapidly increases downstream of a knickpoint, as would be expected for a reach characterized by a knickpoint
retreat. For engineered conditions, however, our models predict that the transport rates of bedload material
638 remain stable despite the occurrence of a knickpoint. As a consequence, the retreat of this particular knickpoint
will not occur as long as the check dams are in operation. Finally, we infer that check dams also contribute to
640 the stabilization of the bordering hillslopes, mainly because they prevent the stream from incising into the

substratum. Therefore, we conclude that our approach is a useful and promising tool to evaluate the first-order efficiency of check dams in reducing bedload sediment flux in steep mountain streams.

Notation

The following symbols are used in this paper:

	A	catchment area (m^2);
646	D_{50}	sediment diameter such that 50 % of the bed surface mixture is finer grained (m);
	D_{84}	sediment diameter such that 84 % of the bed surface mixture is finer grained (m);
648	Φ	dimensionless Einstein parameter;
	g	gravity acceleration (m s^{-2});
650	Q_s	bedload ($\text{m}^3 \text{s}^{-1}$);
	q	unit water discharge ($\text{m}^2 \text{s}^{-1}$);
652	Q	water discharge ($\text{m}^3 \text{s}^{-1}$);
	ρ_s	sediment density (2600 kg m^{-3});
654	ρ_w	water density (1000 kg m^{-3});
	S	Energy <u>slopegradient</u> (m m^{-1});
656	τ^*	dimensionless shear stress;
	τ_c^*	Shields number (dimensionless);
658	τ_m^*	Recking equation parameter (dimensionless);
	τ	shear stress (N m^{-2});
660	v	mean water velocity in depth (m s^{-1});
	W	channel width (m);

Acknowledgments. The authors are grateful for the Bau- und Verkehrsdirektion des Kantons Bern (<https://www.bvd.be.ch/>), which kindly offered us the water discharge for the Guerbe River. We greatly appreciate and that the SWISSTOPO made the for the offered DEMs and images available at no costs.

Financial support. This research has been supported by the University of Bern and Innovative Training Network S2S (grant no. 860383).

668 *Author contributions.* AHdP, DM, PG and FS applied the UAV close-range setup in the Guerbe River. DM designed the UAV close-range setup applied in this work. AHdP measured the grain sizes and performed the analyses described in this paper. AHdP wrote the manuscript with support from DM, PG, CS, ACW, SC and FS.

670 *Competing interests.* The contact author has declared that neither they nor their co-authors have any competing interests.

672 **References**

674 Andres, N., and Badoux, A.: Unwetterschäden in der Schweiz im Jahre 2018. Rutschungen, Murgänge, Hochwasser und Sturzereignisse. *Wasser, Energie, Luft*, 111(1), 29–38, 2019.

676 Bagnold, R.A.: An empirical correlation of bedload transport rates in flumes and natural rivers. *Proceedings of the Royal Society of London A372*: 453–473, <https://doi.org/10.1098/rspa.1980.0122>, 1980.

678 Battista, G., Schlunegger, F., Burlando, P., and Molnar, P.: Modelling localized sources of sediment in mountain catchments for provenance studies. *Earth Surf. Process. Landforms* 45 (14), 3475–3487. <https://doi.org/10.1002/esp.v45.1410.1002/esp.4979>, 2020.

680 Bombino, G., Boix-Fayos, C., Gurnell, A.M., Tamburino, V., Zema, D.A., and Zimbone, S.M.: Check dam influence on vegetation species diversity in mountain torrents of the Mediterranean environment. *Ecohydrology* 7 (2), 678–691, <https://doi.org/10.1002/eco.1389>, 2014.

682 Carbonneau, P. E. and Dietrich, J. T.: Cost-effective nonmetric photogrammetry from consumer-grade sUAS: implications for direct georeferencing of structure from motion photogrammetry, *Earth Surf. Proc. Land.*, 42, 473–486, <https://doi.org/10.1002/esp.4012>, 2017

684 Castillo, C., Perez, R., and Gomez, J.A.: A conceptual model of check dam hydraulics for gully control: efficiency, optimal spacing and relation with step-pools. *Hydrol. Earth Syst. Sci* 18, 1705–1721. <http://dx.doi.org/10.5194/hess-18-1705-2014>, 2014.

686 Cruz Nunes, F., Delunel, R., Schlunegger, F., Akçar, N., Kubik, P.W.: Bedrock bedding, landsliding and erosional budgets in the central European Alps. *Terra Nova* 27 (5), 370–378, <https://doi.org/10.1111/ter.12169>, 2015.

688 Delunel, R., Schlunegger, F., Valla, P.G., Dixon, J., Glotzbach, C., Hippe, K., Kober, F., Molliex, S., Norton, K.P., Salcher, B., Wittmann, H., Akçar, N., and Christl, M.: Late-Pleistocene Catchment-wide Denudation Patterns Across the European Alps. <https://doi.org/10.1016/j.earscirev.2020.103407>, 2020.

692 Einstein, H.A.: *The Bed-load Function for Sediment Transportation in Open Channel Flows*. United States Department of Agriculture Soil Conservation Service: Washington, DC; 71, 1950.

694 Eltner, A., Kaiser, A., Castillo, C., Rock, G., Neugirg, F., and Abellán, A.: Image-based surface reconstruction in geomorphometry: merits, limits and developments, *Earth Surf. Dynam.*, 4, 359–389, <https://doi.org/10.5194/esurf-4-359-2016>, 2016.

696 Ferguson, R.I.; Flow resistance equations for gravel- and boulder-bed streams. *Water Resour. Res.* 43, W05427. <http://dx.doi.org/10.1029/2006WR005422>, 2007.

698 Fonstad, M. A., Dietrich, J. T., Courville, B. C., Jensen, J. L., and Carbonneau, P. E.: Topographic structure from motion: A new development in photogrammetric measurement, *Earth Surf. Proc. Land.*, 38, 421–430, <https://doi.org/10.1002/esp.3366>, 2013.

700 Jäckle, S.: *Hydrologischer atlas der Schweiz. Wildbach gürbe gurni-geldwattenwil (Vol. 6.1)*. Berne, Schweiz: Geographisches Institut der Universität Bern, 2013.

James, M. R. and Robson, S.: Straightforward reconstruction of 3D surfaces and topography with a camera: Accuracy and geoscience application, *J. Geophys. Res.-Earth*, 117, F03017, <https://doi.org/10.1029/2011JF002289>, 2012.

James, M. R., and Robson, S.: Mitigating systematic error in topographic models derived from UAV and ground-based image networks, *Earth Surf. Proc. Land.*, 39, 1413–1420, <https://doi.org/10.1002/esp.3609>, 2014.

James, M. R., Robson, S., and Smith, M. W.: 3-D uncertaintybased topographic change detection with structure-from-motion photogrammetry: precision maps for ground control and directly georeferenced surveys, *Earth Surf. Proc. Land.*, 42, 1769–1788, <https://doi.org/10.1002/esp.4125>, 2017a.

James, M. R., Robson, S., d’Oleire-Oltmanns, S., and Niethammer, U.: Optimising UAV topographic surveys processed with structure-from-motion: Ground control quality, quantity and bundle adjustment, *Geomorphology*, 280, 51–66, <https://doi.org/10.1016/j.geomorph.2016.11.021>, 2017b.

James, M. R., Antoniazza, G., Robson, S., and Lane, S. N.: Mitigating systematic error in topographic models for geomorphic change detection: accuracy, precision and considerations beyond off-nadir imagery, *Earth Surf. Proc. Land.*, 45, 2251–2271, <https://doi.org/10.1002/esp.4878>, 2020.

Julien, P. Y.: *Erosion and Sedimentation*. Cambridge Univ. Press 2, Cambridge, UK., 2010.

Kaitna, R., Chiari, M., Kerschbaumer, M., Kapeller, H., Zlatic-Jugovic, J., Hengl, M., and Huebl, J.: Physical and numerical modelling of a bedload deposition area for an Alpine torrent. *Natural Hazards and Earth System Sciences*, 11(6), 1589, <https://doi.org/10.5194/nhess-11-1589-2011>, 2011.

Karim, F., Kennedy, J.F.: Menu of couple velocity and sediment discharge relations for rivers. *Journal of Hydraulic Engineering* 116(8): 978-996, [https://doi.org/10.1061/\(ASCE\)0733-9429\(1990\)116:8\(978\)](https://doi.org/10.1061/(ASCE)0733-9429(1990)116:8(978)) , 1990.

Keiler, M., and Fuchs, S.: Challenges for natural hazard and risk management in mountain regions of Europe. In *Oxford research encyclopedia of natural hazard science*. Oxford, U.K.: Oxford University Press, <https://doi.org/10.1093/acrefore/9780199389407.013.322>, 2018.

Lamb MP, Dietrich WE, Venditti J-G.: Is the critical Shields stress for incipient sediment motion dependent on channel-bed slope? *Journal of Geophysical Research* 113: F02008, <https://doi.org/10.1029/2007JF000831>, 2008.

Lucas-Borja, M. E., Piton, G., Yu, Y., Castillo, C. & Antonio Zema, D. Check dams worldwide: objectives, functions, effectiveness and undesired effects. *Catena* 204, 105390, <https://doi.org/10.1016/j.catena.2021.105390>, 2021.

Mair, D., Do Prado, A.H., Garefalakis, P., Lechmann, A., Whittaker, A., and Schlunegger, F.: Grain size of fluvial gravel bars from close-range UAV imagery-uncertainty in P. Garefalakis, A.H. do Prado, D. Mair et al. *Sedimentary Geology* 446 (2023) 106340 21 segmentation-based data. *Earth Surface Dynamics* 10, 953–973, <https://doi.org/10.5194/esurf-2022-19>, 2022.

McMahon, T.A., Fenton, J., Stewardson, M., Costelloe, J., and Finlayson, B.: Estimating discharge at an ungauged site. *Australian Journal of Water Resources*, 5, 113–117, <https://doi.org/10.1080/13241583.2002.11465197>, 2002.

Meyer-Peter, E., Mueller, R.: Formulas for bed-load transport. *Proceedings, 2nd Meeting IAHR, Stockholm*; 39–64, 1948.

Miller, K.L., Szabo, T., Jerolmack, D.J., and Domokos, G.: Quantifying the significance of abrasion and selective transport for downstream fluvial grain size evolution. *J. Geophys. Res.* 119, 2412–2429, <https://doi.org/10.1002/2014JF003156>, 2014.

Molnar, P., Densmore, A.L., McArdeell, B.W., Turowski, J.M., and Burlando, P.: Analysis of changes in the step-pool morphology and channel profile of a steep mountain stream following a large flood. *Geomorphology* 124(1): 85–94, <https://doi.org/10.1016/j.geomorph.2010.08.014>, 2010.

- 738 Morel, M., Piton, G., Kuss, D., Evin, G., and Le Bouteiller, C.: Statistical modeling of sediment supply in torrent catchments of the northern French Alps, *Nat. Hazards Earth Syst. Sci.*, 23, 1769–1787, <https://doi.org/10.5194/nhess-23-1769-2023>, 2023.
- 740 Paola, C., Parker, G., Seal, R., Sinha, S.K., Southard, S.K., and Wilcock, P.R.: Downstream fining by selective deposition in a laboratory flume, *Science*, 258(5089), 1757–1760, <https://doi.org/10.1126/science.258.5089.1757>, 1992.
- 742 Parker, G.: Transport of gravel and sediment mixtures, in: *Sedimentation Engineering: Processes, Measurements, Modeling, and Practice*. ASCE Manual 54. American Society of Civil Engineers (ASCE): Reston, VA xxi; 1132 pp, 2008.
- 744 Piton, G., and Recking, A.: Effects of check dams on bed-load transport and steep-slope stream morphodynamics. *Geomorphology* 291, 94–105, <https://doi.org/10.1016/j.geomorph.2016.03.001>, 2016.
- 746 Piton, G., and Recking, A.: The concept of ‘travelling bedload’ and its consequences for bedload computation in mountain streams, *EarthSurface Processes and Landforms*42(10): 1505–1519, <https://doi.org/10.1002/esp.4105>, 2017.
- 748 Piton, G., Carladous, S., Recking, A., Tacnet, J., Liebault, F., Kuss, D., Quefféleán, Y., and Marc, O.: Why do we build check dams in Alpine streams? An historical perspective from the French experience. *Earth Surf. Process. Landf.* 42, 91–108, 750 <https://doi.org/10.1002/esp.3967>, 2017.
- Ramirez, J.A., Mertin, M., Peleg, N., Horton, P., Skinner, C., Zimmermann, M., and Keiler, M.: Modelling the long-term geomorphic response to check dam failures in an alpine channel with CAESAR-Lisflood. *Int. J. Sediment Res.* <http://dx.doi.org/10.1016/j.ijsrc.2022.04.005>, 2022.
- 754 Recking, A.: Simple method for calculating reach-averaged bedload transport. *Journal of Hydraulic Engineering* 139: 70–75, [https://doi.org/10.1061/\(ASCE\)HY.1943-7900.0000653](https://doi.org/10.1061/(ASCE)HY.1943-7900.0000653), 2013.
- 756 Recking, A., Liébault, F., Peteuil, C., and Jolimet, T.: Testing bedload transport equations with consideration of time scales, *Earth Surface Processes and Landforms* 37(7): 774–789, <https://doi.org/10.1002/esp.3213>, 2012.
- 758 Recking, A., Piton, G., Vázquez-Tarrió, D., and Parker, G.: Quantifying the morphological print of bedload transport, *Earth Surface Processes and Landforms* 41(6): 809–822, <https://doi.org/10.1002/esp.3869>, 2016.
- 760 Rickenmann, D.: Comparison of bed load transport in torrents and gravel bed streams, *Water Resources Research* 37(12):3295–3305, <https://doi.org/10.1029/2001WR000319>, 2001.
- 762 Rickenmann, D., and Fritschi B.: Bedload transport measurements using piezoelectric impact sensors and geophones. In *Bedload-surrogate monitoring technologies: U.S. Geological Survey Scientific Investigations Report 2010-5091*, Gray JR, Laronne JB, Marr JDG (eds): Reston, VA.; 407–423, 2010.
- 764 Rickenmann, D., and Recking, A.: Evaluation of flow resistance in gravel-bed rivers through a large field dataset. *Water Resources Research* 47: 1–22, <https://doi.org/10.1029/2010WR009793>, 2011.
- 766 Salvisberg, M.: *Die unzählbare Gürbe: Überschwemmungen und hochwasserschutz seit dem 19. Jahrhundert*. Basel, Schweiz: Schwabe AG, 2017.
- 768 Schlunegger, F., and Hinderer, M.: Pleistocene/Holocene climate change, reestablishment of fluvial drainage network and increase in relief in the Swiss Alps. *Terra Nova* 15 (2), 88–95, <https://doi.org/10.1046/j.1365-3121.2003.00469.x>, 2023.
- 770 Schlunegger, F., Delunel, R., and Garefalakis, P.: Short communication: Field data reveal that the transport probability of clasts in Peruvian and Swiss streams mainly depends on the sorting of the grains, *Earth Surf. Dynam.*, 8, 717–728, <https://doi.org/10.5194/esurf-8-717-2020>, 2020.
- 772

- 774 Shields, A.: Application of similarity principles and turbulence research to bed load movement, SCSC Laboratory, California Institute of Technology, USDA, Pasadena, CA, 1936.
- 776 Shvidchenko, A., Pender, G., and Hoey, T.B.: Critical shear stress for incipient motion of sand/gravel streambeds. *Water Resources Research* 37(8): 2273, <https://doi.org/10.1029/2000WR000036>, 2001.
- 778 Spreafico, M., and Weingartner, R.: The hydrology of Switzerland. Selected aspects and results (Reports, Bundesamt f. Wasser u. Geologie (BWG) Water Series No. 7), 2005.
- 780 Sriwongsitanon, N., and Taesombat, W.: Effects of land cover on runoff coefficient, *J. Hydrol.* 410 (3–4), 226–238. <http://dx.doi.org/10.1016/j.jhydrol.2011.09.021>, 2011.
- 782 Swisstopo: Swiss Positioning Service swipos, <https://www.swisstopo.admin.ch/en/geodata/geoservices/swipos.html>, last access: 26 February, 2022.
- 784 Tuset, J., Vericat, D., Batalla, R.: Rainfall, runoff and sediment transport in a Mediterranean mountainous catchment. *Sci. Total Environ.* 540, 114–132, <https://doi.org/10.1016/j.scitotenv.2015.07.075>, 2016.
- 786 Van den Berg, F., and Schlunegger, F.: Alluvial cover dynamics in response to floods of various magnitudes: The effect of the release of glaciogenic material in a Swiss Alpine catchment, *Geomorphology*, 141–142, 112–133, <https://doi.org/10.1016/j.geomorph.2011.12.030>,
788 2012.
- von Blanckenburg, F.: The control mechanisms of erosion and weathering at basin scale from cosmogenic nuclides in river sediment. *Earth and Planetary Science Letters* 237: 462–479, <https://doi.org/10.1016/j.epsl.2005.06.030>, 2005.
- 790 Whittaker, A.C., Boulton, S.J.: Tectonic and climatic controls on knickpoint retreat rates and landscape response times. *Journal of Geophysical Research* 117, F02024, <https://doi.org/10.1029/2011JF002157>, 2012.
- 792 Wong, M., and Parker, G.: Re-analysis and correction of bed load relation of Meyer-Peter and Muller using their own database. *Journal of Hydraulic Engineering* 132(11): 1159–1168, [https://doi.org/10.1061/\(ASCE\)0733-9429\(2006\)132:11\(1159\)](https://doi.org/10.1061/(ASCE)0733-9429(2006)132:11(1159)), 2006.
- 794 Wolman, M. G.: A method of sampling coarse riverbed material, *Trans. Am. Geophys. Union*, 35, 951, <https://doi.org/10.1029/TR035i006p00951>, 1954.
- 796 Zimmermann, A.: Flow resistance in steep streams: an experimental study. *Water Resour. Res.* 46. <http://dx.doi.org/10.1029/2009WR007913>, 2010.
- 798