

Joint optimal operation of the South-to-North Water Diversion Project considering the evenness of water deficit

Bing-Yi Zhou¹, Guo-Hua Fang¹, Xin Li¹, Jian Zhou¹, Hua-Yu Zhong¹

¹College of Water Conservancy and Hydropower Engineering, Hohai University, Nanjing 210098, China

Correspondence to: Guohua Fang. (hhufgh@163.com)

Abstract. Inter-basin water transfer project is the main measure to address the water deficit crisis caused by uneven distribution of water resources. The current water transfer operation mainly tends to be present in areas with small water transfer costs and is prone to encounter the problem of spatial and temporal imbalances in water allocation. To address ~~the aforementioned~~these issues, this paper defines a Water Deficit Evenness Index (WDEI) aimed at minimizing ~~the~~ regional differences in water scarcity and sharing the pressure of water scarcity as a social demand objective. This index is incorporated into a joint optimization model for the Jiangsu Section of the South-to-North Water Diversion project (J-SNWDP) ~~in Jiangsu~~, which comprises both the ecological objective of the total water deficit (TWD) and the economic objective of the pumping water (PW). Further, the Nondominated Sorting Genetic Algorithm III (NSGA-III ~~algorithm~~) and multi-attribute decision-making were applied to solve the model and obtain an optimal operation strategy. The results showed that: (1) The WDEI defined in this paper can mitigate the synchronized water scarcity in certain water users. In typical normal years (wet year and dry year), the ~~Water Deficit Evenness Index~~WDEI shows a reduction of 94.2% (81.8%, 76.7%) compared to the historical operation strategy; (2) The optimized operation strategy can significantly reduce TWD and PW by 82.06% (37.69%, 52.36%) and 45.13% (3.25%, 21.51%) compared with the historical values, respectively, which can improve the water supply satisfaction and reduce the project cost. At the same time, the lake storage capacity of the optimal operation strategy performs well, and the water transfer efficiency of the river is significantly improved. (3) In this paper, targeted optimal operation strategies and potential ways to secure the project tasks are proposed for different natural flow. Overall, it is of great significance to study the water supply equity in the ~~Jiangsu section of the South-to-North Water Diversion Project~~J-SNWDP to alleviate the concentrated water deficit in Jiangsu Province and other similar regions.

Key Words. South to North Water Diversion Project, ~~China~~; Water deficit Evenness index; multi-objective optimization; NSGA-III; Multi-attribute decision-making.

1 Introduction

Influenced by the impacts of global climate change, human activities, and increasing water demand ~~has been increasing rapidly in recent years with economic development and population growth~~. As the demand for water increases, the availability of

29 ~~issues like regional~~ water resources for human use continues to decline, resulting in water scarcity, increased risk of resource
30 ~~deficits~~, flood and drought disasters, and ~~exacerbation of the conflict~~conflicts between water supply and demand ~~are~~
31 ~~progressively intensifying~~ (Florke et al., 2018; Ma et al., 2020; Kato and Endo, 2017; Rossi and Peres, 2023). These social
32 issues have become one of the key factors constraining ~~regional and even global~~ sustainable development and environmental
33 protection (Li et al., 2020; Liu et al., 2021; Tian and Destech Publicat, 2017) ~~worldwide~~. Inter-basin Water transfer (IBWT)
34 projects have been widely constructed worldwide as an effective way to address water ~~scarcity~~deficit issues caused by uneven
35 distribution of water resources, and improve their utilization efficiency (Sun et al., 2021; Wei et al., 2022; Medeiros and
36 Sivapalan, 2020). At least 10 % of the cities worldwide receive water from IBWT projects (McDonald et al., 2014). The birth
37 of the Lancang-Mekong Cooperation promotes the joint development of six countries, namely China, Cambodia, Laos,
38 Myanmar, Thailand and Vietnam (Ghoreishi et al., 2023). The California State Water Project, the Colorado River Aqueduct
39 (Lopez, 2018), the Senqu-Vaal transfer in South Africa and Lesotho (Gupta and Van Der Zaag, 2008), the Snowy Mountains
40 Scheme in southeastern Australia (Pigram, 2000), ~~the IBWD project of the Agrestic region of Pernambuco~~, and other inter-
41 basin water transfer projects have all effectively alleviated water scarcity issues in various regions (Lu et al., 2021). ~~China is~~
42 ~~home to approximately 18% of the global population. However, the country's water resources account for only around 6% of~~
43 ~~the world's total. This imbalance between population and water resources presents China with significant water resource~~
44 ~~challenges. As a result, inter-basin water transfer projects have been more extensively constructed in China, such as the well-~~
45 ~~known South to North Water Diversion Project. The South-to North Water Diversion Project (SNWDP) in China~~ (Guo and Li,
46 2012), ~~Yunnan Central Water Diversion Project~~, and so on. ~~At least 10 % of the cities worldwide receive water from IBWD~~
47 ~~projects~~. Specifically, with an estimated investment of around 78 billion USD, the South to North Water Diversion Project
48 ~~(SNWDP) is regarded as is considered~~ the largest inter-basin water transfer project in the world. The project runs along
49 numerous water users, and the water resources it provides have already benefited hundreds of millions of people, with even
50 more expected to be served in the future (Pohlner, 2016).

51 ~~With the ongoing emergence of issues such as environmental pollution and degradation, global climate change, and population~~
52 ~~growth, the problem of water scarcity has become increasingly prevalent worldwide. Hence, effectively operating inter-basin~~
53 ~~water transfer projects and enhancing the dispatching benefits is a challenging task. Currently, most IBWD projects primarily~~
54 ~~follow various laws, regulations, policy guidelines, and historical experience in dispatching strategies set by the government.~~
55 ~~However, there is a lack of detailed operating rules for different natural scenarios. Leading to an imbalance in water supply~~
56 ~~across regions and putting some water users at high risk of water scarcity. Addressing the aforementioned issues, there are~~
57 ~~considerable studies on the water resources operating strategy of the supply-oriented IBWD~~ There are considerable studies on
58 the water resources operating strategy of the supply-oriented IBWT projects in terms of social, economic, ecological, and
59 environmental (Gan et al., 2011; Zhu et al., 2014; Liu and Zheng, 2002; Xu et al., 2013). In general, meeting the water demand

60 of various users is the main task of the ~~IBWD~~IBWT project, with the consideration of minimizing water deficit in previous
61 studies (Guo et al., 2020; Wang et al., 2008). Rather than the total amount of water deficit, the crux of the problem may actually
62 be the concentration of water deficit in a certain period of time or region, which has not yet received sufficient attention and
63 remains a major challenge. Therefore, both the total and spatial-temporal distribution of water deficit should be considered in
64 the optimization process- (Xu et al., 2013). In addition, users' demands and decision makers' benefits should be considered as
65 priorities (Zhang et al., 2012), so minimizing pumped water (PW) is a direct way to reduce costs. At the same time, the
66 proportion of the amount of abandoned water and the water withdrawn from the river in the process of water diversion should
67 be taken as secondary considerations. (Guo et al., 2018)~~also be considered as secondary considerations. In order to solve the~~
68 ~~above problems and define reasonable objectives, existing studies are mainly carried out from water supply index and cost~~
69 ~~index. Liu and Zheng define the ratio of regional water consumption to water availability as the water pressure to reflect water~~
70 ~~supply reliability . Guo et al., consider social benefits, maximum power generation and environmental flow satisfaction, into~~
71 ~~account . In addition, Ouyang and Iop set the minimum water power loss as a target to support reservoir operation in terms of~~
72 ~~energy conservation -.~~ However, due to the data on natural water and user water demand as the determining factors of the
73 operation strategy, and the obvious regional differences, most of the objectives determined by the existing studies can only
74 solve small-scale projects,~~otherwise it would lead to failure. Xi et al., used the rainfall forecast information from the Global~~
75 ~~Forecast System (GFS) and calculated user water demand by ration, and found that the resulting operation strategy couldn't be~~
76 ~~effectively compared with the historical operation strategy, because it is impractical to apply these objectives to guide~~
77 ~~operation -.~~
78 The China's South to North Water Diversion Project (SNWD), as the world's largest inter-basin water transfer project, has
79 provided 30.6 10⁸m³ of water to the Hai River Basin since its official operation in 2013. This has significantly alleviated the
80 water supply deficit of large and medium sized cities along the Beijing-Tianjin-Hebei-Henan route, accounting for 70 % and
81 90 % of the domestic water in Beijing and Tianjin, respectively, demonstrating remarkable benefits . In recent years, experts
82 and scholars have extensively discussed the impact of the SNWDP on ecological environment, changes in groundwater storage
83 in the North China Plain, project benefits, and water quality , among other issues. However, as the project continues to operate,
84 it is necessary to shift the focus to dispatch management in order to enhance the sustainability of the project. The SNWDP
85 connects China's four major river basins: the Yangtze River, Yellow River, Huai River, and Hai River, involving multiple
86 provinces such as Shandong, Jiangsu, and Anhui, and presentingAs the project continues to operate, the focus of research
87 should be concentrated on the planning of operational strategies to sustain the long-term operation of the project and enhance
88 its comprehensive benefits. For IBWT projects, due to regional differences, improving operational efficiency and benefits
89 while ensuring water supply is a challenging task. Currently, most IBWT projects primarily adhere to various laws and policies
90 established by the government. These projects comply with annual water demand plans submitted by sectors like agriculture,

91 domestic use, and ecology. The water supply principle is based on ‘prioritizing users that are closer in distance, have lower
92 water supply costs, and have larger water demands’ to develop operation strategies. Such method of water diversion results in
93 lower satisfaction levels for users that are farther in distance and have higher costs, leading to an imbalance in water supply
94 and causing some users to face significant pressure from concentrated water deficits. Furthermore, these projects lack annual
95 predictive assessments of local hydrological conditions and fail to develop targeted operational strategies for diverse natural
96 inflows or extreme events. Developing operational strategies without considering the evenness of water deficit and natural
97 inflows is unscientific. This inspires the primary objective of optimization in this paper.

98 The South-to-North Water Diversion Project (SNWDP) presents a highly complex and dynamic water situation, especially in
99 the Jiangsu section (Vogel et al., 2015). ~~The project utilizes regulating reservoirs, sluice stations, and pump stations to connect~~
100 ~~numerous water users along the route, supplying water to various water consuming sectors from both sides of the canal.~~
101 ~~However,~~ Due to differences in the location and timing of natural inflows and water users, and the aforementioned issues in
102 operational strategies, an imbalance in water supply has arisen. ~~The actual operation of the water supply plan is usually~~
103 ~~implemented under the guidance of the government authorities, with reference to historical dispatch strategies. This approach~~
104 ~~may lack objectivity and accuracy, potentially leading to inefficiencies in water resource utilization and the ineffectiveness of~~
105 ~~operation strategies.~~ At present, there have been some studies attempting to address this issue, but they tend to focus on
106 meeting the total water demand and improving the overall benefits (Li et al., 2017; Zhuan et al., 2016), neglecting the fairness
107 of water supply among different regions. ~~As a result,~~ Water supply may become concentrated on a specific user or time period.
108 Therefore, it is of great theoretical significance and practical application value to ~~establish a scientific and systematic~~
109 ~~optimal~~optimize the existing operation ~~model, strategy~~ to ~~quantitatively analyze~~alleviate the concentration of water ~~resources~~
110 ~~allocation in users, deficit so as~~ to ~~reflect the sophisticated water diversion process to guarantee water supply, and to give full~~
111 ~~play to realize~~ the comprehensive benefits of the ~~IBWDIBWT~~ project (Nazemi and Wheeler, 2015; Peng et al., 2015).

112 To address the above problem, this paper studies the Jiangsu section of South-to-North Water Diversion project (J-SNWDP).
113 The three main contributions of this paper are as follows: (1) ~~defines~~The definition of the Water Deficit Evenness Index
114 (WDEI);) and ~~incorporates its incorporation~~ into the ~~optimization joint optimal operation~~ model ~~together of the J-SNWDP,~~
115 along with the Total Water Deficit (TWD) and the Pumped Water (PW), aim to ~~meets~~satisfy the requirements of both decision-
116 makers and users; (2) ~~incorporates~~The incorporation of the amount of abandoned water and the water withdrawn from the
117 Yangtze River into the decision indicator set, ~~and uses~~along with the application of the multi-attribute decision making method
118 ~~to filter for filtering~~ the Pareto front strategies of NSGA-III ~~and finds,~~ results in the identification of the optimal operation
119 strategy that balances ~~the~~ economic and ecological benefits; (3) The ~~paper compares~~comparison of the optimal operation
120 strategy selected in three typical years (wet ~~year,~~ normal ~~year,~~ and dry ~~year~~) with the historical operation strategy under ~~the~~
121 ~~same~~identical natural conditions in the paper serves to verify the superiority of the optimization results, ~~and puts~~

forward offering reasonable optimization suggestions for the SNWD project J-SNWDP and other similar regions.

The paper is structured as follows: Section 2 presents the study area; Section 3 presents materials and methods; Section 4 presents the results and discussion; Section 5 draws conclusions.

2 Materials and methods

2.1 Study area and data

2.1.1 Regional Overview

The Jiangsu section of the South-to-North Water Diversion Project (J-SNWDP) crosses the Yangtze River and Huai River basins. The simplified map of the J-SNWDP is shown in Fig. 1. The Beijing-Hangzhou Grand Canal runs through the north and south of Jiangsu Province, connecting the Yangtze River basin, the Huai River basin and the Yishusi River basin. The total length of the Jiangsu section is 404 km, along which six cities are involved, namely Yangzhou, Huaian, Yancheng, Suqian, Lianyungang and Xuzhou. The J-SNWDP consists of 3 impounded lakes (Hongze Lake, Luoma Lake, Nansi Lake), 6 sluices (e.g., Erhe sluice, Gaoliangjian sluice, etc.), and 13 pumping stations (Huaian Station, Jiangdu Station, etc.), forming a double-route water diversion system including the West Canal Route and the East Canal Route. The water supply scope of the whole J-SNWDP covers three provinces of Jiangsu, Anhui, and Shandong, supplementing the agricultural, industrial and domestic water supply as well as navigation and ecological water supply in the areas along the water transfer route. The scale parameters of the pumping stations and sluices in J-SNWDP are listed in Table 1. The characteristics of the lakes in the J-SNWDP are shown in Table 2.

Table 1: Pumping stations and sluices of the Jiangsu section of the South-to-North Water Diversion Project

	Number	name	Scale (m ³ /s)	Number	name	Scale (m ³ /s)
Pumping station	P1	Jiangdu	100	P8	Sihong	120
	P2	Baoying	400	P9	Suining	110
	P3	Jinhu	400	P10	Zaohe	175
	P4	Huaian	300	P11	Pizhou	110
	P5	Hongze	150	P12	Liushan	125
	P6	Huaiyin	300	P13	Taierzhuang	125
	P7	Siyang	230			
Sluice	S1	Nanyunxi	400	S4	Yangzhuang	500
	S2	Gaoliangjian	500	S5	Yanhe	500
	S3	Erhe	500	S6	Huaiyin	500

Table 2: Lakes of the Jiangsu section of the South-to-North Water Diversion Project

Lake name		Hongze	Luoma	Nansi
Dead lake level (m)		11.30	21.00	31.30
Normal lake level (m)	Flood season	12.50	22.50	32.30
	Non-Flood season	13.50	23.00	32.80
Regulation storage (10^8 m ³)	Flood season	15.30	4.30	4.94
	Non-Flood season	31.35	5.90	8.00
Monthly range lake level for water diversion (m)	Jul - Aug	12.00	22.22-22.10	31.80
	Sep - Oct	12.00-11.90	22.10-22.20	31.50-31.90
	Nov - Mar	12.00-12.50	22.10-23.00	31.90-32.80
	Apr - Jun	12.50-12.00	23.00-22.50	32.30-31.80

142 When the J-SNWDP is supplying water along the water transfer route, users closer to the water source (such as JBHD User,
143 S-S User, LM User, etc.) are generally prioritized. On the other hand, users like the Feihuanghe User, Lianyungang User, and
144 Siyang-Zaohe User, which are located farther from the water source and receive less water from Luoma Lake, often require
145 water to be pumped from the Yangtze River and Hongze Lake for replenishment. Combined with the uneven spatial and
146 temporal distribution of precipitation, these recipient zones are more susceptible to water deficits.

147 In Fig. 2, the complex relationship of the J-SNWDP is generalized into a schematic diagram according to the geographical
148 location. In order to represent the main components of the system and the connection between the backbone rivers, we regard
149 lakes, pumping stations, sluices as the nodes and the backbone river as the connecting line, while the water users are reasonably
150 distributed among the nodes of the water transmission route.

151 The joint-~~optimal~~ operation process of the J-SNWDP is described as follows. In addition to natural precipitation and lake
152 inflow, the Yangtze River is the main water source of water, which is pumped from the river to the West Route and the Canal
153 Route by P1 pumping station (~~see Fig. 2~~). The West Route is pumped step by step from P2, P3, and P4 to Hongze Lake through
154 Sanyang River, and Jinbao Channel, and pumped from P9, P10, and P11 to the north through Xuhong and Fangting Rivers.
155 The Canal Route along the Beijing-Hangzhou Grand Canal route is pumped north from P5, P6, P7, and P8. The two water
156 transmission routes supplement the water demand of users along the routes while pumping to the north, and merge into one
157 line at the intersection of Fangting River and Zhongyun River. It is then pumped further north until P12 and P13 are transported
158 to Nansi Lake via Bulao and Hanzhuangyun Rivers, respectively, thus delivering water outside the Jiangsu province. When
159 the natural inflow is high, the Hongze Lake can be discharged via P1 on the West Route, or through S2, S3, S4, S5, and S6 to
160 the relevant rivers and users. Luoma and Nansi Lakes are discharged through the original water transmission routes.



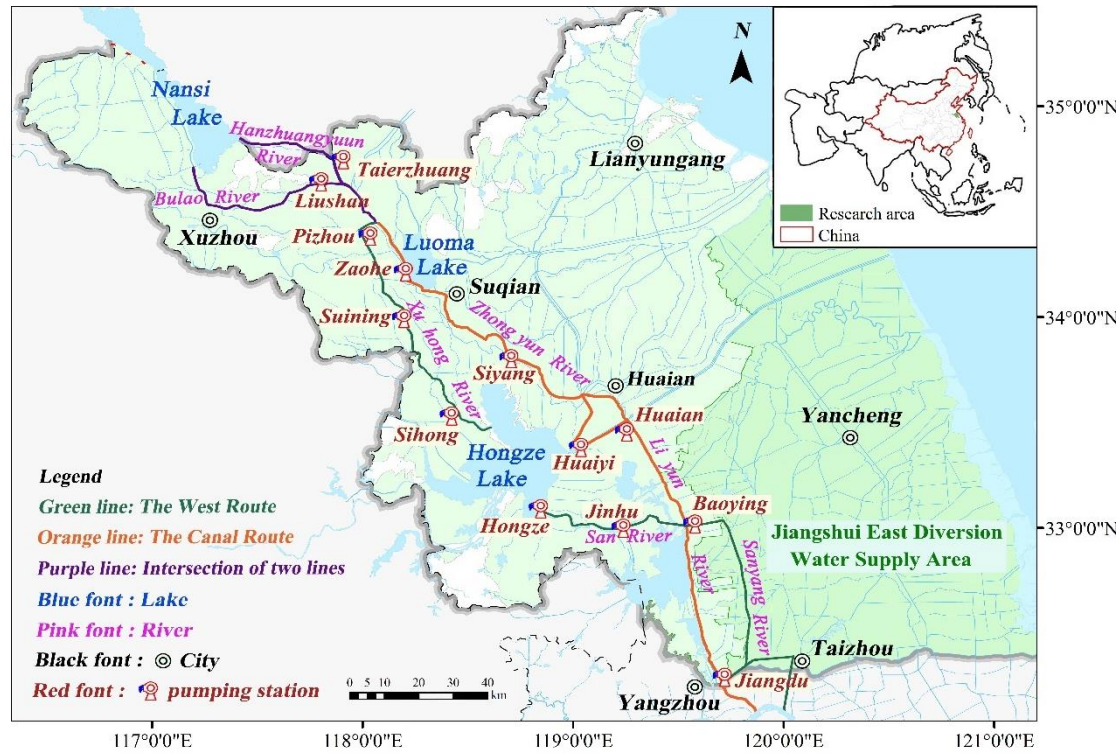


Figure 1: The Jiangsu section of the South-to-North Water Diversion Project- (J-SNWDP). The orange, green and purple lines represent the Canal Route, the West Route, and their intersection of the two routes to transport water outside the province, respectively.

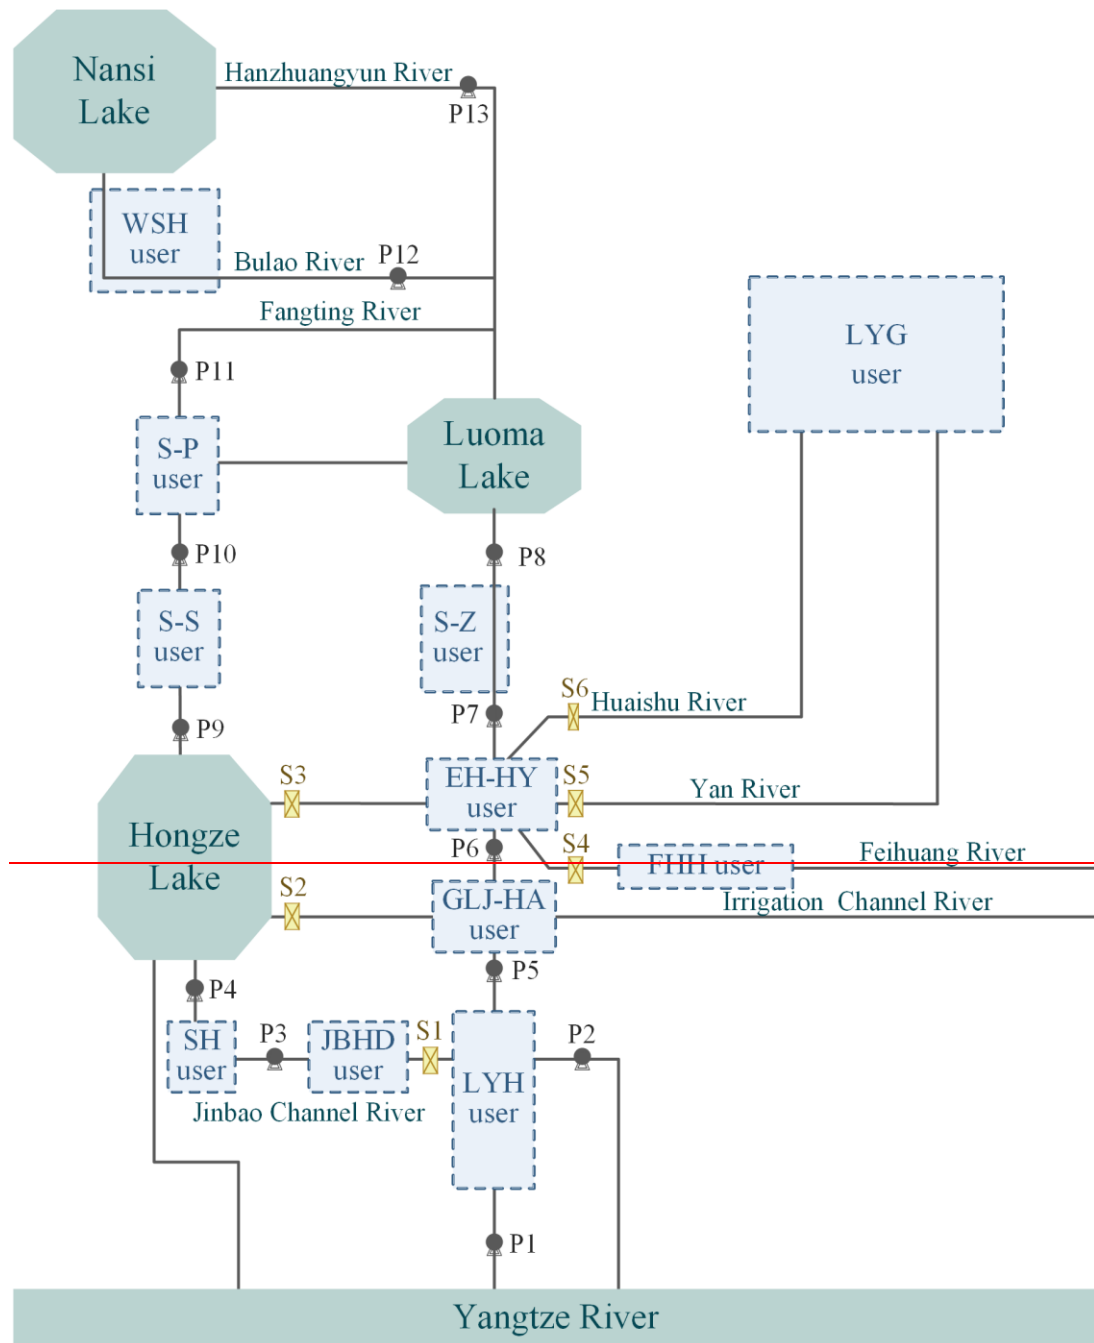

- Lake
 User
 Pumping Station
 Sluice
- | | |
|--|--------------------------------|
| LYH user — Liyunhe user | LMH user — Luomahu user |
| JBHD user — Jinbaohangdao user | LYG user — Lianyungang user |
| SH user — Sanhe user | S-Z user — Siyang-Zaohe user |
| GLJ-HA user — Gaoliangjian-Huaian user | S-S user — Sihong-Suining user |
| FHH user — Feihuanghe user | S-P user — Sihong-Pizhou user |
| EH-HY user — Erhe-Huaiyin user | WSH user — Weishanhu user |
| HZH user — Hongzehu user | |

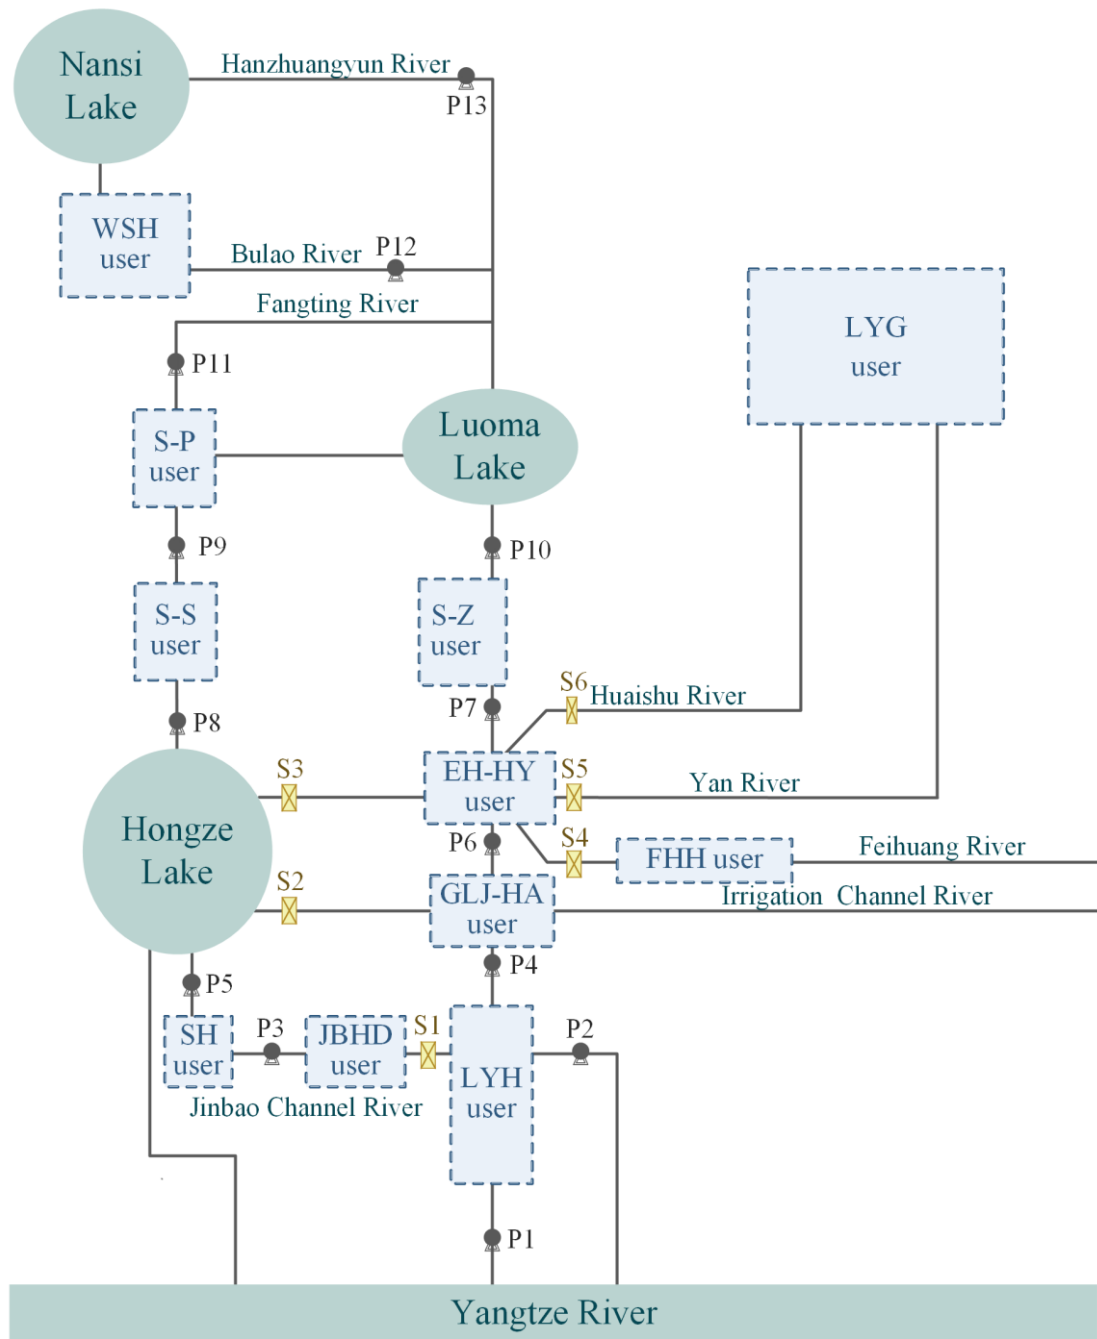

- Lake User ● Pumping Station Sluice
- LYH user —— Liyunhe user
 - JBHD user —— Jinbaohangdao user
 - SH user —— Sanhe user
 - GLJ-HA user —— Gaoliangjian-Huaian user
 - FHH user —— Feihuanghe user
 - EH-HY user —— Erhe-Huaiyin user
 - HZH user —— Hongzehu user
 - LMH user —— Luomahu user
 - LYG user —— Lianyungang user
 - S-Z user —— Siyang-Zaohe user
 - S-S user —— Sihong-Suining user
 - S-P user —— Sihong-Pizhou user
 - WSH user —— Weishanhu user

167

168

Figure 2: Schematic diagram of the Jiangsu section of the South-to-North Water Diversion Project (J-SNWD).


169

2.1.2 Data

170

The joint optimal operating model of the J-SNWD uses a monthly time step. According to the annual natural inflow data of

171 Hongze (HZ), Luoma (LM) and Nansi (NS) Lake since 2013 from Jiangsu Water Resources Bulletin, three hydrological years
 172 were selected to represent wet (2017.10-2018.09, annual mean inflow: $465.12 \times 10^8 \text{ m}^3$), normal (2019.10-2020.09, annual
 173 mean inflow: $172.80 \times 10^8 \text{ m}^3$), and dry (2013.10-2014.09, annual mean inflow: $103.06 \times 10^8 \text{ m}^3$) years, respectively. The
 174 typical annual runoff curves of HZ, LM and NS Lakes are shown in Fig. 3. The water supply area of the J-SNWDP is divided
 175 into 13 receiving areas according to geographical location, and water demand data is provided by the Jiangsu Provincial Water
 176 Resources Department: wet years (2017.10-2018.09, water demand: $171.29 \times 10^8 \text{ m}^3$), normal years (2019.10-2020.09, water
 177 demand: $173.51 \times 10^8 \text{ m}^3$), normal years (2013.10-2014.09, water demand: $181.75 \times 10^8 \text{ m}^3$).

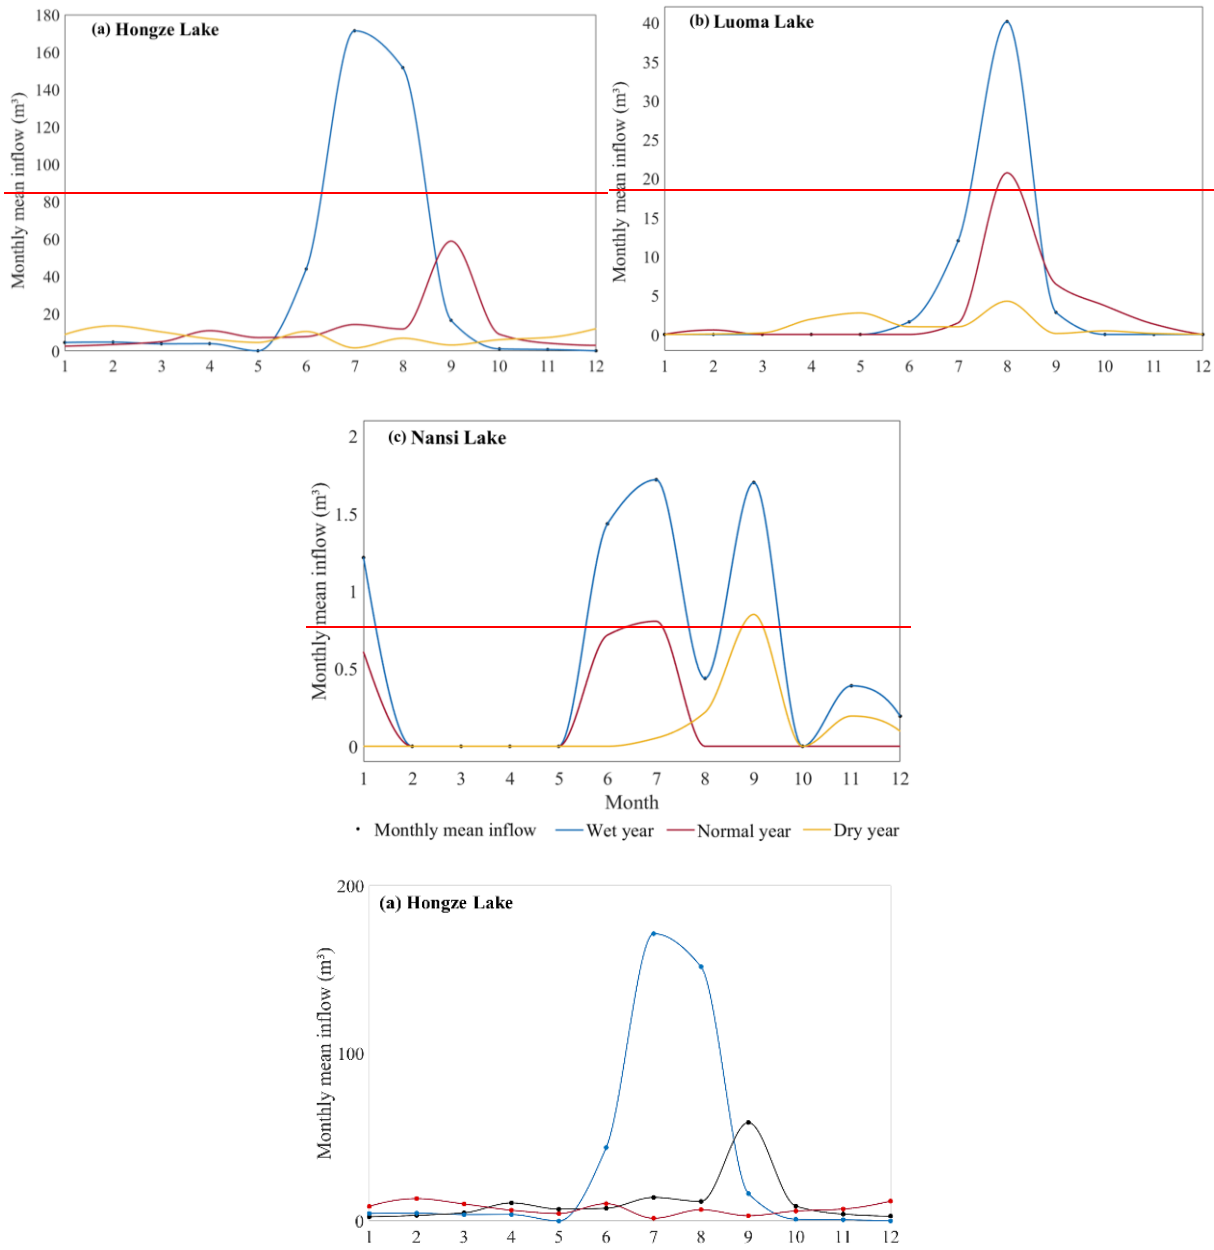

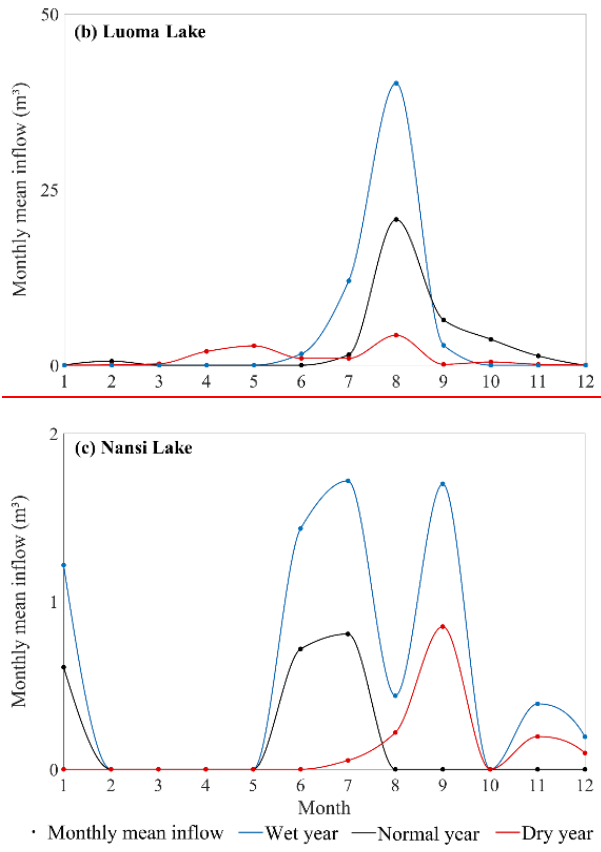


Figure 3: Monthly mean inflow curves of the (a) Hongze, (b) Luoma, and (c) Nansi lakes in typical wet, normal, and dry years.

2.2 Defining Water deficit evenness index

For IBWT projects, issues of equitable water supply often arise, especially for projects like the J-SNWDP, which has 13 water users along its route. ~~The issue is particularly severe here.~~ Different users have significant spatial variations in location, as well as large differences in water supply costs. Consequently, the concentration of water deficits is particularly severe when there are multiple users, which results in some of them being stressed by water deficits.

Luoma Lake, which almost receives no inflow during dry periods yet bears the primary responsibility for out-of-province water supply task, requires multilevel pumping stations to pump water upward (water needs to be pumped from Luoma Lake through two pumping stations, from Hongze Lake through six pumping stations, and from the Yangtze River through nine pumping stations), creating a substantial burden on water supply. In past water supply dispatching of the J-SNWDP, the pursuit of maximum benefit while neglecting this issue would obviously cause certain users to bear severe water deficit risks, resulting in significant damage to the water supply system.

Therefore, considering the fairness of water supply is very important for the practical operation of the project. In this paper, the WDEI (Water Deficit Evenness Index) is defined as an indicator representing the degree of water deficit concentration, and the variance can reflect the difference in water deficits among various recipient zones. By incorporating the WDEI index into the optimization objective and minimizing it, the difference in water deficit can be reduced as much as possible. So the WDEI is below:

$$WDEI = \frac{\sum_{t=1}^n (QR(i,t) - \frac{\sum_{i=1}^n QR(i,t)}{n})^2}{n} \quad (1)$$

where $QR(i, t)$ is the water deficit of the i th user at time step t , $i= 1, 2, \dots, n$, with n being the total number of users ($n= 13$ in this study), $t= 1, 2, \dots, T$, with T being the whole operating period.

2.3 The joint optimal operation model of J-SNWDP

Herein, the joint optimal operating model of the J-SNWDP was constructed with 228 decision variables (13 pumping stations and 6 sluices). The objective function and associated constraints are formulated as follows.

2.3.1 Objectives

(1) Minimizing the total water deficit (TWD)

TWD is a measure of how well the operation strategy completion is being implemented. This objective aims to minimize the total amount of water deficit at the end of a given operation period, potentially improving the satisfaction of water demand for users and increasing the operation strategy completion.

$$TWD = \min \sum_{t=1}^T \sum_{i=1}^n QR(i,t), \quad (2)$$

where $QR(i, t)$ is the water deficit of the i th user at time step t , $i= 1, 2, \dots, n$, with n being the total number of users ($n= 13$ in this study), $t= 1, 2, \dots, T$, with T being the whole operating period.

(2) Minimizing water deficit evenness index (WDEI)

WDEI indicates the degree of concentration of the water deficit and can be used as an indicator of the uniformity of water diversion. The lower the WDEI, the better the strategy is.

$$WDEI = \min \frac{\sum_{t=1}^n (QR(i,t) - \frac{\sum_{i=1}^n QR(i,t)}{n})^2}{n} \quad (3)$$

where $QR(i, t)$ is the water deficit of the i th user at time step t , $i= 1, 2, \dots, n$, with n being the total number of pumping stations ($n= 13$ in this study), $t= 1, 2, \dots, T$, with T being the whole operating period.

(3) Minimizing pumped water (PW)

PW reflects the economy of operation strategy. The lower the PW is, the less the operating costs.

$$PW = \min \sum_{t=1}^T \sum_{p=1}^P QS(p,t), \quad (4)$$

where $QS(p, t)$ is the water pumped by the p th pumping station at time step t , $p= 1, 2, \dots, P$, with P is the total number of pumping stations ($P= 13$ in this study).

225 2.3.2 Constraints

226 Systems operation should obey operating rules and physical constraints, such as water balance, pumping capacity, and lake
227 storage constraints. The mathematical expressions of the constraints are shown as below.

228 (1) Water balance constraint

229 The water balance constraint should be satisfied in the water diversion process.

$$230 V(i, t+1) = V(i, t) + Q(i, t) + DI(i, t) + PC(i+1, t) - DO(i, t) - W_1(i, t) - PR(i, t), \quad (5)$$

231 At time step t , where $V(i, t)$ is the water storage of the i th lake at time step t ; $Q(i, t)$ is the inflow of the i th lake; $W_1(i, t)$ is the
232 water demand of the i th lake (water to be supplemented by SNWD project-SNWDP after deducting the locally available
233 water); $DO(i, t)$ is water diversion to the north from the i th lake; $DI(i, t)$ is the water pumped into the i th lake; $PC(i, t)$ is the
234 water discharged into the i th lake; $PR(i, t)$ is the water discharged from the i th lake.

235 (2) Pumping capacity constraint

$$0 \leq DO(i, t) \leq DO_{max}(i, t)$$

$$236 0 \leq DI(i, t) \leq DI_{max}(i, t) \quad , \quad (6)$$

237 At time step t , where $DO(i, t)$ is water diversion to the north from the i th lake; $DI(i, t)$ is the water pumped into the i th lake;
238 $DO_{max}(i, t)$ is the maximum pumping capacity that is pumped into the i th lake; $DI_{max}(i, t)$ is the maximum pumping capacity
239 that is diverted north from the i th lake.

240 (3) Sluice capacity constraint

$$241 0 \leq PR(i, t) \leq PR_{max}(i, t), \quad (7)$$

242 where $PR(i, t)$ is the water discharged from the i th lake; $PR_{max}(i, t)$ is the maximum sluice capacity at time step t .

243 (4) Lake storage constraint

$$244 V_{min}(i, t) \leq V(i, t) \leq V_{max}(i, t), \quad (8)$$

245 where $V(i, t)$ is the water storage of the i th lake at time step t ; $V_{min}(i, t)$ and $V_{max}(i, t)$ are the minimum and maximum
246 water storage capacities at time step t , respectively. When $V(i, t) < V_{min}(i, t)$ is water deficit, $QR(i, t) = V_{min}(i, t) - V(i, t)$,
247 ensure that the lake level is above the limit level; when $V(i, t) > V_{max}(i, t)$ is abandoned water, ensure that the water storage of
248 the lakes is within a reasonable range.

249 (5) Minimum lake levels for water diversion


$$250 Z_{min}(i, t) \leq Z(i, t) \leq Z_{max}(i, t), \quad (9)$$

251 where $Z(i, t)$ is the level of the i th lake at time step t ; $Z_{min}(i, t)$ and $Z_{max}(i, t)$ are the minimum and maximum level of the i th
252 lake at time step t , respectively.

253 2.4 Model solving and solution selection

254 Fig.4 shows the optimization method and process of the Jiangsu section of the South-to-North Water Diversion Project.

255 Considering the complex objectives and various physical constraints, the NSGA-III algorithm (Deb and Jain, 2014) is used in
 256 this paper to solve the model in this paper. NSGA-III has been widely used to solve various water-resource optimal diversion
 257 problems and to obtain optimal operation strategies with the advantages of fast execution speed and high efficiency (Ni et al.,
 258 2019; Tang et al., 2021; Zhou et al., 2020). The NSGA-III is used to solve the joint optimal operation model of the J-SNWDP
 259 under three typical conditions: wet year, normal year and dry year. The model takes the actual value of the pumped water of
 260 each pumping station as the decision variable. The population size, generation, crossover rate and mutation rate are set to 200,
 261 20000, 0.9 and 0.1, respectively. The application of NSGA-III to the model can be summarized as the following steps: (1)
 262 Take 12 monthly water pumped of a year as the decision variables and initializes the population of size N based on the physical
 263 constraints of operation; (2) Calculate the objectives of TWD, EWD and WP for each chromosome and sort by Nondominated
 264 strategy; (3) Select excellent chromosome from population non-dominated as parent chromosome and create child
 265 chromosome by the cross and mutation operation. (4) Combine the parent chromosome with the child chromosome and update
 266 the population by Nondominated strategy. (5) Repeat the four steps above until the number of iterations is reached.
 267 ~~After obtaining the set of operation strategies using NSGA-III~~After solving the model using NSGA-III, we obtained a set of
 268 optimized running strategies (i.e., strategies based on the Pareto-ranked top 200). In order to measure the operation effect more
 269 comprehensively, more indicators are needed to assist in selecting an optimal operation strategy. Therefore, this paper further
 270 applies multi-attribute decision-making methods to screen and determine the optimal operation strategy. The abandoned water
 271 reflects the regulation and storage capacity of the lakes, and the water withdrawn from the Yangtze River reflects the impact
 272 of the water transferred outside the system on the operation strategy. A multi-attribute decision indicator set is constructed,
 273 which ~~includes the above two indicators and the three~~included five optimization objectives ~~of~~for the total water deficit, the
 274 water deficit evenness index, the model pumped water, the abandoned water and the water withdrawn from the Yangtze River.
 275 Indicators are divided into water use efficiency and cost of water use indicators as shown in Fig. 4. In this paper, we adopt the
 276 Analytic Hierarchy Process (AHP) method to determine the subjective weights and the entropy weighting method to determine
 277 the objective weights, further the combination weights are obtained by linear weighted average.

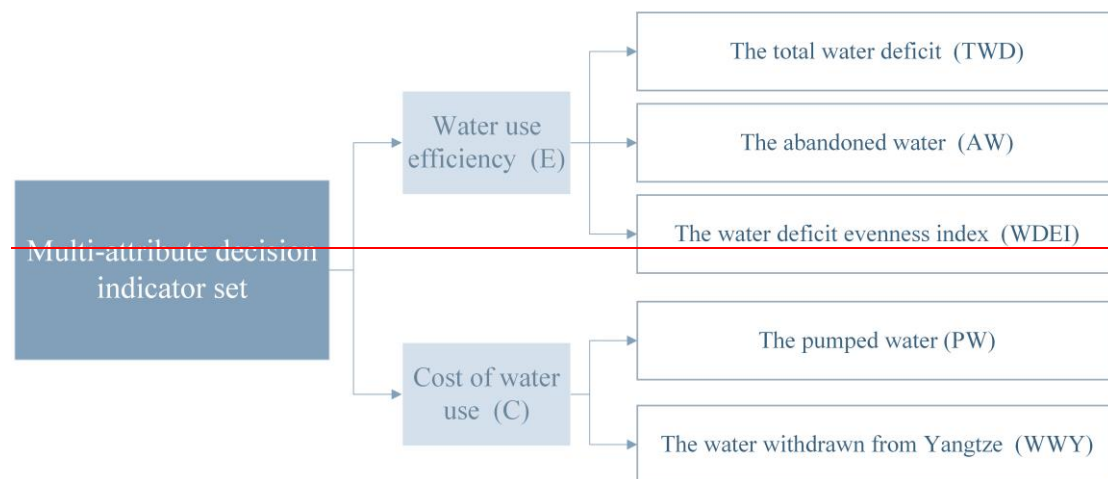

278 **Fig. 4. Determining the set of indicators for selecting optimal operation strategy in typical wet, normal, and dry years.**
 279

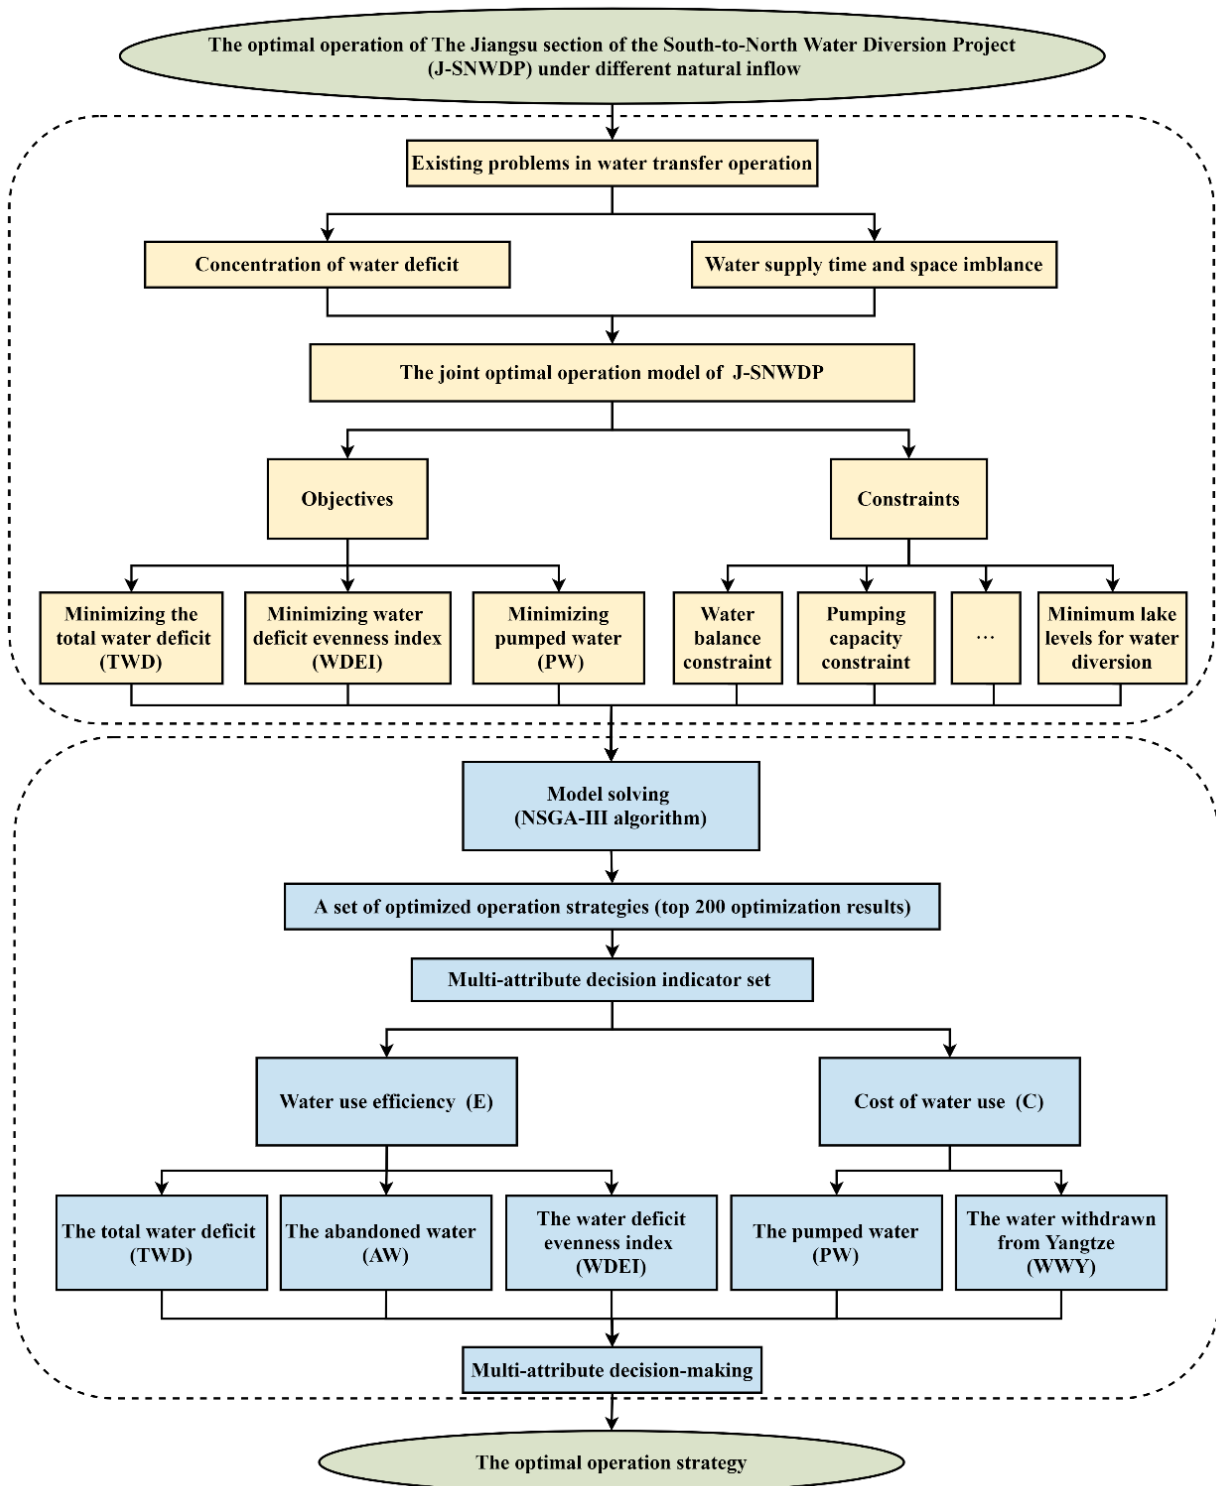



Figure 4: Optimization process of the Jiangsu section of the South-to-North Water Diversion Project (J-SNWDP).

3 Results

3.1 Pareto front strategies of NSGA-III under different years

The historical operation strategy of the J-SNWDP follows the principle of 'replenishing the lake during water deficit, and discharging during water surplus', with the primary goal of ensuring the completion of water supply tasks. Firstly, the

286 simulation of a single lake is carried out, and then the simulation of each storage lake is carried out according to the top-down
 287 order, so as to complete the conventional operation of the engineering system. Such a method is simply "robbing Peter to pay
 288 Paul". The external water transfer is not fully deployed, but increases the operating costs. In contrast, the joint optimal operation
 289 exhibits several advantages, such as controlling the minimum WDEI of each user, ensuring that even if the total water deficit
 290 and the historical operating strategy are the same, the water deficit pressure is evenly distributed to avoid undesirable water
 291 deficit concentration. In addition, the optimal operation process pays more attention to the water storage function of the lake.
 292 In the non-flood season, the water level of the reservoir is kept at the normal water storage level as much as possible, and the
 293 water storage (discharge) is appropriate according to different natural inflow, so that the whole system can realize the lake
 294 storage in the flood season and non-flood season at the same time, and improve the utilization rate of water resources while
 295 fulfilling the water supply task.

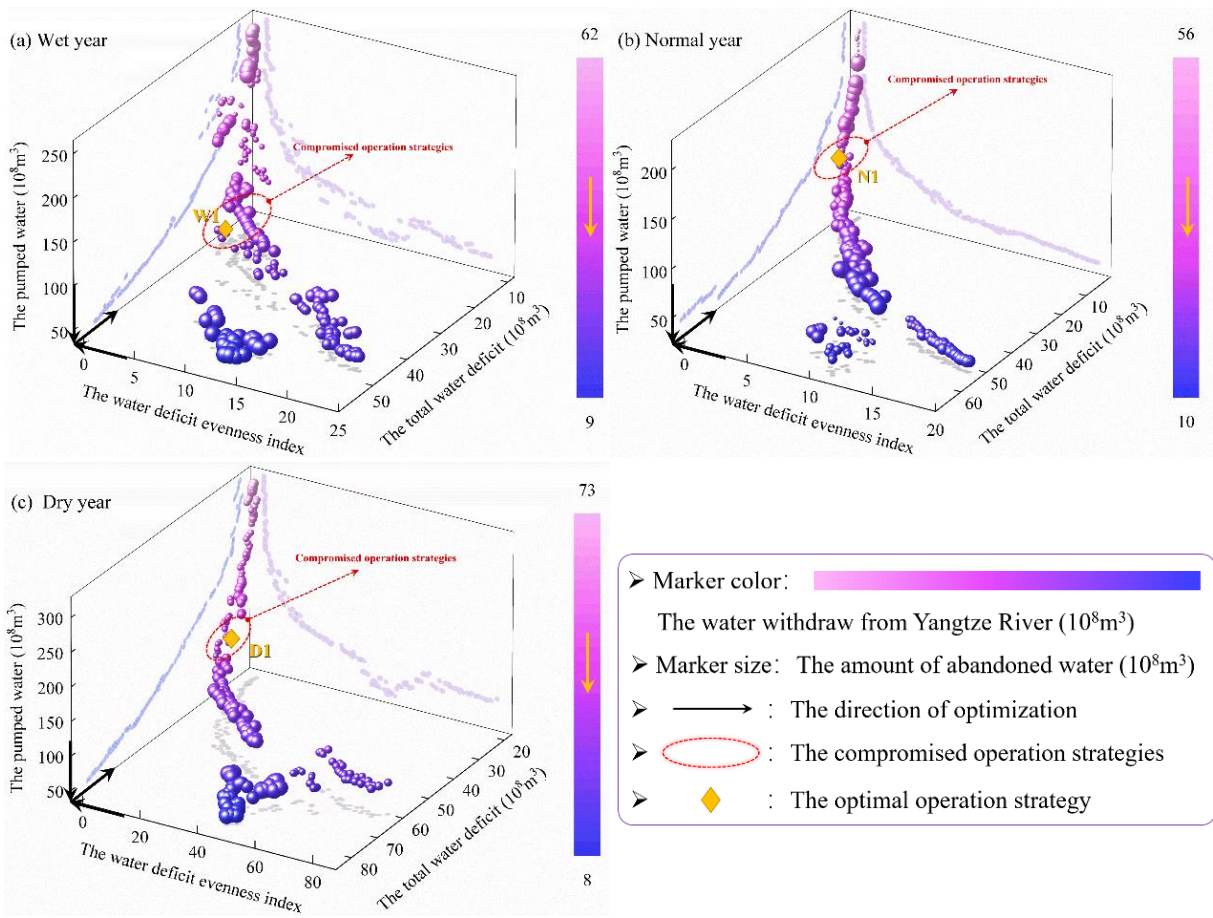

297 **Figure 5: Illustration of Pareto front strategies for (a) wet, (b) normal, and (c) dry years. (W1, N1 and D1 represent the location of**
 298 **the optimal operation strategy in different typical years.)**
 299

300 Fig. 5 provides visualizations of the optimal operation strategy based on Pareto sets in different years. Obviously, the
 301 compromised operation strategies are well distributed in three typical years, and the compromised operation strategies and the
 302 optimal operation strategy are located in the middle of the curve. The relative relationship between the optimization objectives
 303 has been analyzed, the total water deficit has a positive correlation with the water deficit evenness index. In contrast, the total
 304 water deficit and water deficit evenness index have a negative correlation with the pumped water, indicating that the water

305 deficit gradually decreases with the increase of PW. The distribution pattern of the marker is formed under the interaction of
 306 three objectives (see Fig. 5).

307 Fig. 5 (a) shows the competitive relationships between TWD, WDEI and PW in wet years that PW decreases sharply and
 308 WDEI increases slowly at the beginning when TWD increases by $20 \times 10^8 \text{m}^3$, WDEI increases by about $3 \times 10^8 \text{m}^3$, and PW
 309 decreases by about $164 \times 10^8 \text{m}^3$, but when TWD exceeds $31.33 \times 10^8 \text{m}^3$, WDEI increases sharply and PW decreases slowly with
 310 TWD increasing by $20 \times 10^8 \text{m}^3$, WDEI increasing by about $9 \times 10^8 \text{m}^3$, and PW decreasing by about $51 \times 10^8 \text{m}^3$. The above
 311 relationships obey the law of diminishing marginal utility. As a part of PW, the water withdrawn from the Yangtze River
 312 represented by the marker color needs to be appropriately pumped according to the natural flow and water demand of users.
 313 Generally, the proportion of water withdrawn from the Yangtze in PW cannot be too high, affecting the lake storage capacity
 314 and pumping (operating) cost. Therefore, the middle part or the lighter marker color tend to represent better results in the figure.
 315 Meanwhile, to reduce the waste of water resources, the amount of abandoned water represented by the marker size should be
 316 reduced as much as possible. Therefore, the yellow marker point is obtained as the optimal operation strategy to compare with
 317 the historical operation strategy by multi-attribute decision-making. The weights of decision indicators and the results of the
 318 comparison are shown in Table 3 and Table 4. Similarly, the Pareto front strategies in Fig. 5 (b) and (c) also follow the above
 319 rules, but due to the difference in natural inflow, the specific data are also quite different (see Table 4).

320 **Table 3: Determining the weights of indicators for selecting optimal operation strategy in typical wet, normal, and dry years.**

Evaluation indicators	Wet year	Normal year	Dry year
The total water deficit	0.353	0.366	0.402
The abandoned water	0.194	0.203	0.264
The water deficit evenness index	0.207	0.248	0.215
The pumped water	0.134	0.101	0.074
The water withdrawn from Yangtze	0.111	0.080	0.045

321 **3.2 Comparison with historical operation strategy**

322 In order to verify the rationality of the strategies obtained by the joint optimal operation model, this section compares the
 323 optimal operation strategy selected in different typical years with the historical operation strategy.

324 **3.2.1 Comparison of the main operation performance indicators**

325 **Table 4: Comparison of the main operation performance indicators of the historical and optimal operation strategy in typical years.**
 326 **(units: 10^8m^3)**

Typical year	Scenario	The total water deficit	The water deficit evenness index	The pumped water	The amount of abandoned water	The water withdrawn from Yangtze
Wet	Historical	65.77	22.87	119.27	374.56	25.74
	Optimal	31.33	4.16	93.62	310.91	23.65
	Decrement	52.36%	81.82%	21.51%	16.99%	8.12%
Normal	Historical	75.19	26.18	184.06	56.53	42.07
	Optimal	13.49	1.51	100.99	25.17	30.08
	Decrement	82.06%	94.24%	45.13%	55.47%	28.50%
Dry	Historical	63.22	21.54	159.88	13.60	26.62
	Optimal	39.39	5.01	154.68	0.05	37.34
	Decrement	37.69%	76.72%	3.25%	99.63%	-40.27%

327 Table 4 shows the optimal historical operation strategy in typical years. Compared with the optimal operation strategy, the
328 TWD and WDEI of the historical operation strategy are very high, which means that the water deficit concentration in the
329 historical operation strategy leads to the inability to reduce the TWD. Meanwhile, the PW and abandoned water are slightly
330 large, indicating that the historical operation strategy has more disadvantages on economic and ecological benefits. WDEI can
331 directly reflect the difference of water deficit among users. WDEI has sound optimization effects, of which the reduction in
332 the optimal operation strategy was 94.2% (81.8 %, 76.7%) of the historical values in the typical normal year (wet year and dry
333 year). The optimized operation strategy can significantly reduce TWD and PW by 82.06% (37.69%, 52.36%) and 45.13%
334 (3.25%, 21.51%) compared with the historical values, respectively, while maintaining a very low WDEI. It has been
335 demonstrated to be an excellent strategy for inter-basin water diversion, which can make multiple users share the risk of water
336 deficit and alleviate the problem of water deficit concentration. The reduction of the abandoned water and the water withdrawn
337 from the Yangtze River represents an increase in the lake storage capacity. The amount of abandoned water of the operation
338 strategy is greatly reduced, and the amount of abandoned water is only $0.051 \times 10^8 \text{m}^3$ in the dry year. This indicates that the
339 optimal operation can maximize the utilization efficiency of the limited water resources. However, the of amount of water
340 withdrawn from the Yangtze River increased by $10.72 \times 10^8 \text{m}^3$ after optimization in dry years, indicating that the proportion of
341 the water withdrawn from Yangtze River in PW was raised in the optimal operation strategy to ensure uniform distribution of
342 water and higher economic benefits.

343 3.2.2 Comparison of water deficit in water users


344 The comparison of water deficit in water users between the optimal operation strategy and the historical operation strategy in
345 three typical years is illustrated in Table 5, which more intuitively reflects the optimization effect of WDEI. The ‘Variance’
346 and ‘Decrement’ represent the difference between the maximum and minimum values and the percentage reduction,

347 respectively. The study found that after optimization, the variance of the users was reduced by 62.93 % (78.07 %, 54.09 %) in
348 different typical years (i.e., bold font in Table 5). FHH user, S-Z user and HZH user, which have large water deficit in the
349 historical operation strategy, decrease by $14.63 (14.41, 14.69) \times 10^8 \text{m}^3$, $5.61 (9.33, 1.77) \times 10^8 \text{m}^3$ and $0.98 (7.98, 5.26) \times 10^8 \text{m}^3$
350 of the optimal operation strategy, respectively (see Table 5). The possible reason for the large water deficit of users is that they
351 are far away from the main lakes and rivers, or there are many users on the water transmission route that need to be supplied.
352 Users jointly share the water deficit risk in the optimal operation strategy in the case of little natural flow. The difference
353 between the maximum and minimum water deficit is controlled within $8 \times 10^8 \text{m}^3$, where the difference in the normal year is
354 only $3.13 \times 10^8 \text{m}^3$, and the problem of water deficit concentrated in a particular user is alleviated. For example, in the dry year,
355 the water deficit of users under optimal operation strategy ranges from 0 to $7.64 \times 10^8 \text{m}^3$. Although the water deficit of GLH-
356 HA user, LMH user, and WSH user is slightly higher after optimization, the total water deficit is much lower than the historical
357 value and isn't concentrated in FHH user, HZH user, and S-Z user, compared with the results of historical operation. Overall,
358 the optimal operation strategy is more reasonable, and may accord with the aspirations of both the government and the general
359 public.

360 **Table 5: Comparison of water deficit in water users for (a) wet, (b) normal, and (c) dry years.**

Typical years Users	Wet year		Normal year		Dry year	
	Historical	Optimal	Historical	Optimal	Historical	Optimal
LYH user	5.04	0.00	10.94	0.00	2.78	2.68
JBHD user	0.52	0.00	0.00	0.00	0.00	0.00
SH user	1.97	0.92	0.00	0.00	0.52	0.52
GLJ-HA user	3.98	1.78	11.28	1.91	2.69	3.40
HZH user	7.07	6.19	8.35	0.38	8.66	6.70
FHH user	17.22	2.59	14.41	0.00	16.64	1.95
LYG user	7.44	2.15	1.68	0.00	6.10	3.82
EH-HY user	3.11	3.09	1.73	0.50	6.06	4.55
S-Z user	11.28	5.67	12.46	3.13	9.41	7.64
S-S user	1.02	0.32	1.39	0.49	1.34	0.74
S-P user	3.62	1.35	4.15	1.55	5.11	3.08
LMH user	0.58	0.12	2.69	2.37	1.35	2.53
WSH user	2.91	3.21	6.10	3.16	2.55	3.64
Variance	22.87	4.16	26.18	1.51	21.54	5.01
Decrement	81.82%		94.24%		76.72%	

3.2.3 Comparison of the operation water level of the Hongze and Luoma lake

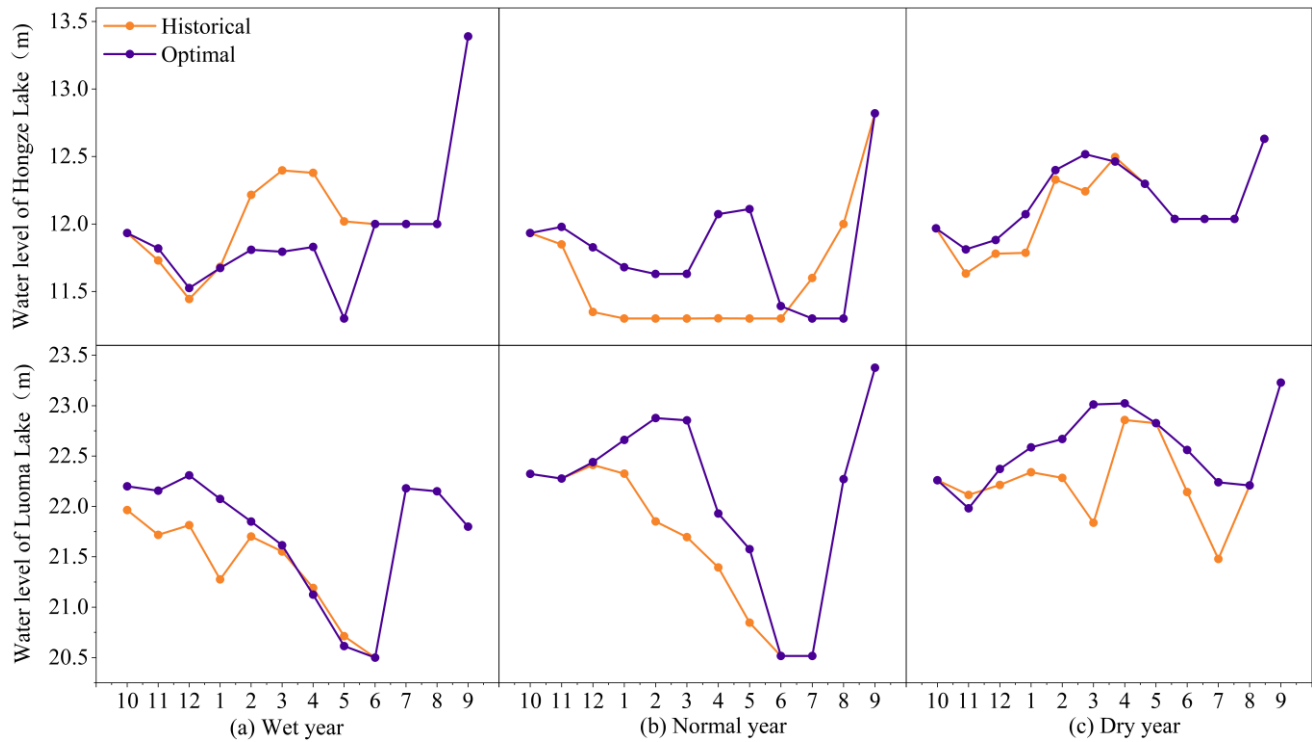

362

363

364

Figure 6: The operation water level of the Hongze and Luoma lake for (a) wet, (b) normal, and (c) dry years under historical (orange line) and optimal (purple line) operation.

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

Fig. 6 shows the water level variations of HZ Lake and LM Lake (two major storage lakes in Jiangsu Province). The water level of HZ Lake and LM Lake is slightly higher than the historical value after optimization for most of the time. Both lakes show a regular trend of change: the lake remains at a high level during the dry season, releases water before the flood season, then remains at a low level throughout the flood season for storing flood, and returns to a high level at the end of the flood season. Therefore, the water transmission system can simultaneously implement lake water storage in the flood and non-flood seasons to ensure the fulfilment of water supply tasks and improve the utilization efficiency of water resources.

The optimized water level of HZ Lake was significantly lower than the historical value from February to June in Fig. 6 (a). This is due to the large amount of natural precipitation with uneven spatial-temporal distribution in the wet year, and the discharge time and discharge volume of HZ Lake are unreasonable in historical operating strategy, resulting in a large amount of water deficit and abandonment. Therefore, in the optimized operation strategy, a certain amount of lake water is discharged during the impoundment period for water supply. Similarly, LM Lake level in April-June below the historical level. In the Fig. 6 (b) and (c), the optimized HZ Lake level is significantly higher than the historical value before the flood season, while the flood season is decreased dramatically, indicating that the lake stores a certain amount of water while supplying water during the impoundment period, and discharges water before the flood season to ensure that the flood season is at a safe level. Similarly, for LM Lake, the water level increased after optimization in typical years, and tended to be consistent after the flood season.

Compared with the historical operation strategy, the water level of HZ Lake and LM Lake is slightly higher than the historical

381 value after optimization for most of the time. Combined with the results of Table 4 and Table 5, the coordinated water diversion
 382 between LM Lake and HZ Lake increased obviously while reducing TWD and PW.

383 **3.2.4 Comparison of the water distribution of different routes between two adjacent lakes**

384 **Table 6: The water distribution of different routes between two adjacent lakes.**

Inflow/ outflow Lake	Inflow/ outflow Route	Multi-year average	
		Historical	Optimal
Outflow LM Lake	The ratio of inflow Hanzhuangyun and Bulao River	19: 8	1: 1
Inflow LM lake	The ratio of outflow Zhongyun and XuhongRiver	7: 9	7: 1
Outflow HZ Lake	The ratio of inflow Xuhong and Zhongyun River	1: 6	1: 14
Inflow HZ Lake	The ratio of outflow Liyun River and Jinbao channel	19: 1	25: 1
Water withdrawn from Yangtze River	The ratio of inflow Jinbao channel and Liyun River	8: 9	2: 9

385 This paper considers that the water distribution of different routes between two adjacent lakes is an important factor affecting
 386 the water deficit in the users. The water transmission capacity of the route is mainly affected by the water demand of users and
 387 the pumping capacity of the pumping station along the way. Table 6 shows the distribution of different water transmission
 388 routes between neighboring lakes in typical years. The ratio of water pumped from LM Lake into Hanzhuangyun River and
 389 Bulao River is decreased from 19: 8 to 1: 1, which is convenient for simultaneous double-route water supply outside the
 390 province and reduces the water supply pressure of Hanzhuangyun River. The ratio of water from the Zhongyun River and the
 391 Xuhong River to the LM Lake increased from 7: 9 to about 7: 1, gradually shifting the focus of the water transmission route
 392 to the Zhongyun River. The reason is that Hongze Lake transports water to the Zhongyun River through the Erhe and
 393 Gaoliangjian Sluice without pumping, which can reduce the pumped water and save project cost. In addition, there are many
 394 users in Zhongyun River, the water demand is higher. When the water supply is sufficient, the drainage through Huaiyin, Yanhe
 395 and Yangzhuang Sluice significantly reducing the water deficit of FHH and LYG users (see Table 5). Similarly, the ratio of
 396 water from HZ Lake to Zhongyun River and Xuhong River increased from 6:1 to 14:1. The ratio of pumping water from Liyun
 397 River and Jinbao Waterway to HZ Lake also increased from 19:1 to 25:1, indicating that the water transport efficiency of
 398 Zhongyun River is higher, and the operation strategy should be based on water transfer from the central canal, with the western
 399 route as the auxiliary support route. Similarly, the ratio of pumping water from the Yangtze River to the Liyun River and the
 400 Jinbao Channel has also increased (see Table 6).

401 4 Discussion

402 Inter-basin water transfer projects are widely used around the world and are also quite costly to construct. For instance, the
403 Colorado River aqueduct cost approximately 3.5 billion dollars (Witcher, 2017), the Australian Snowy Mountains Scheme was
404 completed in 1974 at a cost of about 500 million dollars (Pigram, 2000), and the South-to-North Water Diversion Project in
405 China, as the largest and most expensive inter-basin water transfer system in the world, is projected to cost 62 billion dollars
406 (Markosov, 2014). The installation and operation maintenance costs are also significantly high. Of this, the investment for just
407 the Eastern Route of the project is around 1 billion dollars (Liu et al., 2022), which is a typical example of a vast and complex
408 water transfer system and has certain representativeness. Therefore, the Jiangsu section of the Eastern Route of the South-to-
409 North Water Diversion Project is selected as the study area for this paper.

410 The joint optimal operating model is operated based on ecological (the total water deficit), social demand (the evenness of
411 water deficit) and economic (the pumping water) objectives, focusing on the issue of water deficit concentration. Herein, the
412 limited available water is used to minimize the total water deficit of the system and water deficit differences between users
413 and applies to inter-basin water transfer projects with complex systems and a large number of water users. The multi-attribute
414 decision implemented in this study incorporates ecological (the abandoned water) and the water withdrawn from Yangtze River
415 into the multi-attribute decision indicator set, which can provide optimal operation strategy with preferred weights for decision
416 makers who have different preferences.

417 Evidence from this research suggests that the water extracted from Hongze Lake is much greater than that from other lakes,
418 indicating that Hongze Lake is the main source of water to support water supply and flood control within the system. Therefore,
419 it is important to understand the water storage period. It is important to ensure that the water level of each storage lake reaches
420 the water level at the end of the flood season to complete the water allocation in the non-flood season. If the reservoir water
421 storage is insufficient, the Yangtze River will be pumped in time to ensure the normal operation of the entire water diversion
422 project. The Yangtze River is the main source of water outside the J-SNWDP system. The proportion of pumping water from
423 the Yangtze River in the pumping water volume of the system plays an important regulatory role. The actual operation should
424 follow the following priority rules: When the natural inflow is less, mainly through pumping the Yangtze River to complete
425 the task of water supply; when the natural inflow is large, the water withdrawn from Yangtze River is reduced, and the focus
426 of water allocation is shifted to the mutual replenishment between lakes.

427 ~~In summary, The joint optimal operating model is operated based on social demand (water deficit) and economic (pumped water)~~
428 ~~objectives, focusing on the issue of water deficit concentration. From the historical operation strategy,~~ it can be seen that the
429 water deficit doesn't only occur under less natural inflow conditions, but also there are still serious problems of water deficit
430 and abandonment in wet years. The main reasons for the coexistence of water deficit and water abandonment are lakes' limited
431 water storage capacity and the uneven spatial-temporal distribution of natural inflow. Water deficit and the pumped water are

432 greatly affected by natural inflow; we should not expect to find a general operating strategy optimal in all natural conditions.
433 This paper performs well in water resources allocation and utilization on a monthly time step of three typical years (wet year,
434 normal year and water deficit year), which is representative and universal, and provides a useful guide for IBWDIBWT under
435 future uncertainty. Therefore, in addition to implementing the optimal operation strategy, the flood control limit water level
436 should be appropriately increased according to the natural inflow to improve the lake's storage capacity in the flood season.
437 This is a potential way to effectively ~~protect~~enhance the operational efficiency of inter-basin water diversion function of
438 ~~the transfer~~ project.

439 **5 Sources of Uncertainty**

440 This paper proposes an optimal operation strategy that considers the evenness of water deficit, accounting for the hydrological
441 conditions of three typical years (i.e., wet years, normal years, and dry years). The strategy can generally alleviate the
442 concentration of water deficit under most natural inflow conditions. However, due to the impact of global climate change,
443 future runoff is highly uncertain, necessitating further discussion. Moreover, the Eastern Route of the South-to-North Water
444 Diversion Project is a large-scale inter-basin water transfer project that spans provinces such as Jiangsu and Shandong, and it
445 involves numerous uncertain factors. These include changes in biological communities, hydrological variations, and dynamic
446 changes in water demand caused by extreme events, all of which add complexity to determining the water supply capacity of
447 the project.

448 Regarding the two major regulating reservoirs within Jiangsu, Hongze and Luoma Lakes, the operational control water levels
449 used in this paper were approved and established by the Ministry of Water Resources of China in 1954. Over the years, with
450 socio-economic development, changes in the South-to-North Water Diversion Project, and the flood control capabilities of the
451 lakes themselves, the original flood limit water levels have become inadequate for current development needs. This paper
452 proposes the idea of appropriately raising the flood limit water levels of the lakes during the flood season, but the specific
453 values require further research, incorporating runoff forecasting, flood risk early warning, and other factors into future studies
454 of inter-basin water transfer.

455 Furthermore, this paper places greater emphasis on the positive impacts of inter-basin water transfer on social demands and
456 ecology, with less focus on the analysis of economic costs. Due to the variability in water prices across different regions and
457 the ongoing changes in economic development in recent years, the cost of the project is currently represented by the volume
458 of water pumped and has not been converted into actual cost prices. Future studies will delve into the dynamic adjustment
459 mechanisms of water pricing, subsequently analyzing the economic benefits of the project.

460 5 Conclusions

461 ~~As the largest Scientific operational decisions in~~ inter-basin water transfer ~~project in the world, the South to North Water~~
462 ~~Transfer Project, scientifically operating decisions~~projects are important for improving the water allocation balance and
463 reducing the stress of concentrated water deficits. ~~As the largest and most heavily invested inter-basin water transfer project~~
464 ~~in the world, the South-to-North Water Transfer Project, has been selected as the research area for this paper, focusing~~
465 ~~specifically on the Jiangsu section.~~

466 (1) From the perspectives of social demand, economy and ecology, this paper establishes a joint optimal operation model for
467 the Jiangsu section of the South-to-North Water Diversion Project (J-SNWDP), and further uses a combination of NSGA-III
468 algorithm and multi-attribute decision-making for strategy preference, which has a certain persuasion. This method has a good
469 performance in solving the complex water transfer problems with multiple objectives and engineering units, and is currently
470 less applied.

471 (2) After incorporating the Water Deficit Evenness Index into the ~~joint optimal operation~~ model, the concentration of water
472 deficit is reduced by 94.2% (81.8 %, 76.7%) in typical wet years (normal year and dry year) compared with the historical
473 strategy, which greatly ameliorated the engineering problem of user water deficit concentration. The other two indicators of
474 the model, total water deficit (TWD) and pumping water (PW), were reduced by 82.1% (37.7%, 52.4%) and 45.1% (3.2%,
475 21.5%), respectively, with excellent performance.

476 (3) After optimization, the ~~rising trend of water level in Hongze Lake and Luoma Lake reflects the enhanced~~ storage capacity
477 of the ~~lakes is enhanced~~lake, and the water allocation between different water transmission routes is more balanced, which
478 improves water utilization and water supply efficiency. ~~It puts forward the potential ways to effectively guarantee the water~~
479 ~~diversion task, providing the scientific basis and operating suggestions for the J-SNWDP~~Moreover, this paper proposes water
480 ~~transfer prioritization rules and suggests appropriately increasing the flood control limit water level, aimed at protecting the~~
481 ~~water diversion and enhancing operational efficiency. The sources of uncertainty, such as natural inflow and societal water~~
482 ~~demand, are worthy of further study.~~

483 ~~Overall, the successful application of the optimal operation strategy in the Jiangsu section of the South-to-North Water Transfer~~
484 ~~Project also demonstrates the feasibility of the research. It is hoped that this method can be attempted in other similar~~
485 ~~watersheds worldwide in order to revalidate this method in other circumstances, demonstrate its universality. This would~~
486 ~~provide the scientific basis and operating suggestions for the inter-basin water diversion project.~~

487 Acknowledgments

488 This study was supported by the Jiangsu Province Water Science and Technology Key Projects (2020005).

489 Data availability

490 Data will be made available on request.

491 **Author contribution**

492 Bingyi Zhou: Writing- Original Draft, Validation, Formal analysis, Software, Methodology, Conceptualization, Visualization,
493 Term Definition

494 Guohua Fang: Writing- Review and Editing, Funding acquisition, Resources, Supervision, Project administration

495 Xin Li: Resources, Writing- Review and Editing, Visualization, Investigation.

496 Jian Zhou: Writing- Review and Editing, Supervision, Formal analysis.

497 Huayu Zhong: Resources, Data Curation, Visualization, Investigation.

498 **Competing interests**

499 **The authors declare that they have no known competing financial interests or personal relationships that could have**
500 **appeared to influence the work reported in this paper.**References

501 Deb, K. and Jain, H.: An Evolutionary Many-Objective Optimization Algorithm Using Reference-Point-Based Nondominated
502 Sorting Approach, Part I: Solving Problems With Box Constraints, *Ieee Transactions on Evolutionary Computation*, 18, 577-
503 601, 10.1109/tevc.2013.2281535, 2014.

504 Florke, M., Schneider, C., and McDonald, R. I.: Water competition between cities and agriculture driven by climate change
505 and urban growth, *Nature Sustainability*, 1, 51-58, 10.1038/s41893-017-0006-8, 2018.

506 Gan, Z. G., Zhao, H. L., Jiang, Y. Z., You, J. J., and Kang, J.: River Basin Water Resources Multi- Objective Regulation Theory
507 And Method Research, *International Conference on Green Building, Materials and Civil Engineering (GBMCE 2011)*, 71-78,
508 10.4028/www.scientific.net/AMM.71-78.4721, 2011.

509 Ghoreishi, M., Elshorbagy, A., Razavi, S., Bloeschl, G., Sivapalan, M., and Abdelkader, A.: Cooperation in a transboundary
510 river basin: a large-scale socio-hydrological model of the Eastern Nile, *Hydrology and Earth System Sciences*, 27, 1201-1219,
511 10.5194/hess-27-1201-2023, 2023.

512 Guo, X. Y., Ma, C., and Tang, Z. B.: Multi-Timescale Joint Optimal Dispatch Model Considering Environmental Flow
513 Requirements for a Dewatered River Channel: Case Study of Jinping Cascade Hydropower Stations, *Journal of Water*
514 *Resources Planning and Management*, 144, 10.1061/(asce)wr.1943-5452.0000981, 2018.

515 Guo, Y. C. and Li, J. L.: Practice and Improvement of Agent Construction System in Hydraulic Engineering, *2nd International*
516 *Conference on Civil Engineering and Transportation (ICCET 2012)*, Guilin, PEOPLES R CHINA, Oct 27-28,
517 WOS:000317696001196, 2611-2615, 10.4028/www.scientific.net/AMM.256-259.2611, 2013.

518 Guo, Y. X., Tian, X., Fang, G. H., and Xu, Y. P.: Many-objective optimization with improved shuffled frog leaping algorithm
519 for inter-basin water transfers, *Advances in Water Resources*, 138, 10.1016/j.advwatres.2020.103531, 2020.

520 Gupta, J. and van der Zaag, P.: Interbasin water transfers and integrated water resources management: Where engineering,
521 science and politics interlock, *Physics and Chemistry of the Earth*, 33, 28-40, 10.1016/j.pce.2007.04.003, 2008.

522 Kato, T. and Endo, A.: Contrasting Two Dimensions of Disaster-Induced Water-Shortage Experiences: Water Availability and
523 Access, *Water*, 9, 10.3390/w9120982, 2017.

524 Li, J. H., Lei, X. H., Qiao, Y., Kang, A. Q., and Yan, P. R.: The Water Status in China and an Adaptive Governance Frame for
525 Water Management, *International Journal of Environmental Research and Public Health*, 17, 10.3390/ijerph17062085, 2020.

526 Li, Y. Y., Cui, Q., Li, C. H., Wang, X., Cai, Y. P., Cui, G. N., and Yang, Z. F.: An improved multi-objective optimization model
527 for supporting reservoir operation of China's South-to-North Water Diversion Project, *Science of the Total Environment*, 575,
528 970-981, 10.1016/j.scitotenv.2016.09.165, 2017.

529 Liu, C. M. and Zheng, H. X.: South-to-north water transfer schemes for China, *International Journal of Water Resources*
530 *Development*, 18, 453-471, 10.1080/0790062022000006934, 2002.

531 Liu, D. C., Li, Y., Wang, P. F., Zhong, H. Q., and Wang, P.: Sustainable Agriculture Development in Northwest China Under
532 the Impacts of Global Climate Change, *Frontiers in Nutrition*, 8, 10.3389/fnut.2021.706552, 2021.

533 Liu, Y., Chong, F. T., Jia, J. J., Cao, S. L., and Wang, J.: Proper Pricing Approach to the Water Supply Cost Sharing: A Case
534 Study of the Eastern Route of the South to North Water Diversion Project in China, *Water*, 14, 10.3390/w14182842, 2022.

535 Lopez, J. C.: Interbasin water transfers and the size of regions: An economic geography example, *Water Resources and*
536 *Economics*, 21, 40-54, 10.1016/j.wre.2017.10.005, 2018.

537 Lu, Y., Tian, F. Q., Guo, L. Y., Borzi, I., Patil, R., Wei, J., Liu, D. F., Wei, Y. P., Yu, D. J., and Sivapalan, M.: Socio-hydrologic
538 modeling of the dynamics of cooperation in the transboundary Lancang-Mekong River, *Hydrology and Earth System Sciences*,
539 25, 1883-1903, 10.5194/hess-25-1883-2021, 2021.

540 Ma, T., Sun, S., Fu, G. T., Hall, J. W., Ni, Y., He, L. H., Yi, J. W., Zhao, N., Du, Y. Y., Pei, T., Cheng, W. M., Song, C., Fang,
541 C. L., and Zhou, C. H.: Pollution exacerbates China's water scarcity and its regional inequality, *Nature Communications*, 11,
542 10.1038/s41467-020-14532-5, 2020.

543 Markosov, A. I.: Does Transferring Water Present an Efficient Way of Solving Water Scarcity in China's Northeast?, 2014.

544 McDonald, R. I., Weber, K., Padowski, J., Florke, M., Schneider, C., Green, P. A., Gleeson, T., Eckman, S., Lehner, B., Balk,
545 D., Boucher, T., Grill, G., and Montgomery, M.: Water on an urban planet: Urbanization and the reach of urban water
546 infrastructure, *Global Environmental Change-Human and Policy Dimensions*, 27, 96-105, 10.1016/j.gloenvcha.2014.04.022,
547 2014.

548 Medeiros, P. and Sivapalan, M.: From hard-path to soft-path solutions: slow-fast dynamics of human adaptation to droughts in
549 a water scarce environment, *Hydrological Sciences Journal-Journal Des Sciences Hydrologiques*, 65, 1803-1814,
550 10.1080/02626667.2020.1770258, 2020.

551 Nazemi, A. and Wheatler, H. S.: On inclusion of water resource management in Earth system models - Part 2: Representation
552 of water supply and allocation and opportunities for improved modeling, *Hydrology and Earth System Sciences*, 19, 63-90,

553 10.5194/hess-19-63-2015, 2015.

554 Ni, X. K., Dong, Z. C., Xie, W., Jia, W. H., Duan, C. G., and Yao, H. Y.: Research on the Multi-Objective Cooperative
555 Competition Mechanism of Jinsha River Downstream Cascade Reservoirs during the Flood Season Based on Optimized
556 NSGA-III, *Water*, 11, 10.3390/w11040849, 2019.

557 Peng, Y., Chu, J. G., Peng, A. B., and Zhou, H. C.: Optimization Operation Model Coupled with Improving Water-Transfer
558 Rules and Hedging Rules for Inter-Basin Water Transfer-Supply Systems, *Water Resources Management*, 29, 3787-3806,
559 10.1007/s11269-015-1029-4, 2015.

560 Pigram, J. J.: Options for rehabilitation of Australia's Snowy River: An economic perspective, *Regulated Rivers-Research &
561 Management*, 16, 363-373, 10.1002/1099-1646(200007/08)16:4<363::Aid-rrr610>3.0.Co;2-i, 2000.

562 Pohlner, H.: Institutional change and the political economy of water megaprojects: China's south-north water transfer, *Global
563 Environmental Change-Human and Policy Dimensions*, 38, 205-216, 10.1016/j.gloenvcha.2016.03.015, 2016.

564 Rossi, G. and Peres, D. J.: Climatic and Other Global Changes as Current Challenges in Improving Water Systems Management:
565 Lessons from the Case of Italy, *Water Resources Management*, 37, 2387-2402, 10.1007/s11269-023-03424-0, 2023.

566 Sun, S., Zhou, X., Liu, H. X., Jiang, Y. Z., Zhou, H. C., Zhang, C., and Fu, G. T.: Unraveling the effect of inter-basin water
567 transfer on reducing water scarcity and its inequality in China, *Water Research*, 194, 10.1016/j.watres.2021.116931, 2021.

568 Tang, X. Y., He, Y., Qi, P., Chang, Z. H., Jiang, M., and Dai, Z. B.: A New Multi-Objective Optimization Model of Water
569 Resources Considering Fairness and Water Shortage Risk, *Water*, 13, 10.3390/w13192648, 2021.

570 Tian, H. G. and Destech Publicat, I.: Research on Scientific Development Strategy of Water Conservancy Economy Based on
571 Sustainable Development, 3rd International Conference on Social Science, Management and Economics (SSME), Guangzhou,
572 PEOPLES R CHINA, May 13-14, WOS:000426950600086, 476-481, 2017.

573 Vogel, R. M., Lall, U., Cai, X. M., Rajagopalan, B., Weiskel, P. K., Hooper, R. P., and Matalas, N. C.: Hydrology: The
574 interdisciplinary science of water, *Water Resources Research*, 51, 4409-4430, 10.1002/2015wr017049, 2015.

575 Wang, L. Z., Fang, L. P., and Hipel, K. W.: Basin-wide cooperative water resources allocation, *European Journal of Operational
576 Research*, 190, 798-817, 10.1016/j.ejor.2007.06.045, 2008.

577 Wei, Y. P., Wei, J., Li, G., Wu, S. L., Yu, D., Ghoreishi, M., Lu, Y., Souza, F. A. A., Sivapalan, M., and Tian, F. Q.: A socio-
578 hydrological framework for understanding conflict and cooperation with respect to transboundary rivers, *Hydrology and Earth
579 System Sciences*, 26, 2131-2146, 10.5194/hess-26-2131-2022, 2022.

580 Witcher, T. R.: The Colorado River Aqueduct, *Civil Engineering*, 87, 46-49, 10.1061/ciegag.0001187, 2017.

581 Xu, J. P., Tu, Y., and Zeng, Z. Q.: Bilevel Optimization of Regional Water Resources Allocation Problem under Fuzzy Random
582 Environment, *Journal of Water Resources Planning and Management*, 139, 246-264, 10.1061/(asce)wr.1943-5452.0000248,
583 2013.

584 Zhang, C., Wang, G. L., Peng, Y., Tang, G. L., and Liang, G. H.: A Negotiation-Based Multi-Objective, Multi-Party Decision-
585 Making Model for Inter-Basin Water Transfer Scheme Optimization, *Water Resources Management*, 26, 4029-4038,
586 10.1007/s11269-012-0127-9, 2012.

587 Zhou, B. W., Liu, B. Y., Yang, D. S., Cao, J., and Littler, T.: Multi-objective optimal operation of coastal hydro-electrical energy
588 system with seawater reverse osmosis desalination based on constrained NSGA-III, *Energy Conversion and Management*, 207,
589 10.1016/j.enconman.2020.112533, 2020.

590 Zhu, X. P., Zhang, C., Yin, J. X., Zhou, H. C., and Jiang, Y. Z.: Optimization of Water Diversion Based on Reservoir Operating
591 Rules: Analysis of the Biliu River Reservoir, China, *Journal of Hydrologic Engineering*, 19, 411-421, 10.1061/(asce)he.1943-
592 5584.0000805, 2014.

593 Zhuan, X. T., Li, W., and Yang, F.: Optimal operation scheduling of a pumping station in east route of South-to-North water
594 diversion project, 8th International Conference on Applied Energy (ICAE), 105, 3031-3037, 10.1016/j.egypro.2017.03.623,
595 2016.

596