

Improving the ~~internal~~ hydrological consistency of a process-based solute-transport model by simultaneous calibration of streamflow and stream concentrations

5 Jordy Salmon-Monviola¹, Ophélie Fovet¹, Markus Hrachowitz²

¹ UMR SAS, INRAE, Institut Agro, Rennes, France

² Department of Water Management, Faculty of Civil Engineering and Geosciences, Delft University of Technology, Stevinweg 1, 2628CN Delft, Netherlands

10

Corresponding author to: J. Salmon-Monviola (jordy.salmon-monviola@inrae.fr)

Abstract. ~~Improving~~ The consistency of hydrological models, i.e. their ability to reproduce observed system dynamics, ~~is required~~ needs to be improved to increase their predictive power. As ~~the using of~~ streamflow data ~~alone to~~ calibration models is ~~necessary but~~ not sufficient to constrain ~~model them~~ and ~~warrant render them~~ model consistency, other strategies must be considered, in particular ~~the using of~~ additional types of data sources. The aim of this study ~~is was~~ to test whether simultaneous calibration of dissolved organic carbon (DOC) and nitrate (NO₃⁻) concentrations along with streamflow ~~improves~~ improves the hydrological consistency of a parsimonious solute-transport model. A multi-objective ~~and multi variable~~ approach with four calibration scenarios was used to evaluate the model's ~~predictions for in~~ an intensive agricultural headwater catchment. ~~Our~~ After calibration, results showed ~~the model reasonably reproduced simultaneously~~ simultaneously the dynamics of discharge and DOC and NO₃⁻ concentrations in the stream of the headwater catchment ~~for from 2008-2016 period~~. Evaluation ~~with using independent datasets indicated that the model usually reproduced dynamics of groundwater level and soil moisture in upslope and riparian areas zones were also generally correctly captured by the model for all calibration scenarios~~. The results shows that ~~using daily stream concentrations of DOC and NO₃⁻ together along with streamflow data during to~~ calibration the model did not improve ~~its the model's~~ ability to ~~accurately~~ predict streamflow for calibration or evaluation periods. ~~However, the~~ The approach improved significantly the representation of groundwater storage and to a lesser extent soil moisture in the upslope zone but not in the riparian zone. that included improved both model's ~~the internal consistency of the model was improved for the simulation of low flows, groundwater storage and upstream soil storage, but not for the simulation of riparian soil storage~~. Parameter uncertainty decreased when the model was calibrated using solute concentrations, except for parameters related to fast and slow reservoir flow. This study shows the added value of using multiple types of data sources along with in addition to streamflow data for calibration, in particular DOC and NO₃⁻ concentrations, to constrain hydrological models ~~for a better to improve~~ representation of internal hydrological states and flows. With the increasing availability of solute data from catchment monitoring, this approach provides an objective way to improve the ~~internal~~ consistency of hydrological models that can be used with confidence ~~in to evaluate~~ scenarios evaluation.

Keywords: Hydrological models, Equifinality, Consistency, Multi-objective calibration, Stream DOC and nitrate concentrations, parsimony.

40

1. Introduction

Hydrological models are important tools for short-term forecasting of river flows and long-term predictions for strategic water management planning, as well as for improving understanding of hydrological processes and the complex interactions of water storage and release processes at the catchment scale (Bouaziz et al., 2021; Lan et al., 2020; Minville et al., 2014). In the wide spectrum of modelling, which ranges from simple to complex (Adeyeri et al., 2020; Gharari et al., 2014; Hrachowitz and Clark, 2017), conceptual models, in which only the dominant processes are represented and/or several processes may be lumped into a single expression (Pettersson et al., 2001), are widely used to simulate hydrological dynamics of catchments. Conceptualising the system as a set of storage components connected by ~~fluxes-flows~~ representing the perceived dominant processes of a catchment provides a certain degree of flexibility. The ability to customize these models to the environmental conditions in a given catchment can ensure an appropriate level of complexity to reproduce response patterns of hydrology and water quality (Hrachowitz et al., 2016). Major advantages of conceptual models include their relatively low data and computational requirements, which makes them suitable for studies at different scales or for catchments about which little information is available (Gharari et al., 2014; Huang and Bardossy, 2020). However, ad hoc implementation of conceptual models frequently lacks a plausible theoretical basis and thus a meaningful connection of model structure and parameters to observable quantities when representing integrated system processes (Clark et al., 2016). As such, the ability of models, including conceptual ones, to reproduce a system's dynamics is also undermined not only by random uncertainties in the data, but also by epistemic or ontological uncertainties and thus by limited knowledge of the physical processes that underlie the system's response (Beven, 2013; Beven and Westerberg, 2011; Gupta et al., 2012). These uncertainties and the few observations in a continuous spatial domain make such models ill-posed inverse problems (Beven, 2006; Hrachowitz et al., 2014; Pettersson et al., 2001). In hydrology, frequently referred to as equifinality ((Beven, 2006)~~Beven, 1993~~), these insufficient model constraints thus result in many, equally good alternative model solutions. Hydrological models with many parameters thus tend to adapt to errors and to compensate for inadequate representation of processes through the model parameters (Wang et al., 2012). For example, well-predicted river discharge is often associated with poorly predicted evaporation ~~fluxesflows~~, because evaporation compensates for errors and closes the hydrological balance (Minville et al., 2014). Thus, deceptively high calibration accuracy may reflect mathematical fitting of an often overparameterized model, which may generate undesirable internal dynamics that decrease accuracy in independent evaluation periods (Fovet et al., 2015a; Hrachowitz et al., 2014). Robust model calibration and evaluation procedures are thus needed to address issues of parameter identifiability (Beven, 2006; Guillaume et al., 2019) and transferability (Hartmann and Bárdossy, 2005; Kreye et al., 2019; Minville et al., 2014), and to avoid models that act as “mathematical marionettes” dancing to match the calibration data (Kirchner, 2006) but often fail to reproduce internal system dynamics.

Recently, a trend toward more comprehensive assessment of the structural adequacy of models has emerged during the calibration process (Rakovec et al., 2016; Yen et al., 2014), with the overall goal of improving the representation of multiple hydrological processes in a model (Clark et al., 2011; Euser et al., 2015; Gupta et al., 2012). The rationale behind this goal is the need to obtain the “right answers for the right reasons” (Blöschl, 2001; Kirchner, 2006), which goes beyond simply comparing model predictions to observed streamflow or associated signature measurements (Euser et al., 2013; Fovet et al., 2015a; Rakovec et al., 2016). Indeed, reflecting the results of many studies, (~~Rakovec et al., 2016~~) showed that streamflow data are necessary but not sufficient to warrant constraining model components by dividing incoming ~~rainfall-precipitation~~ among storage, evaporation and drainage (Bouaziz et al., 2021). Thus, multiple strategies have been developed to improve the physical realism of

conceptual models (i.e. model *consistency*) (Efstratiadis and Koutsoyiannis, 2010), including using additional data that represent internal hydrological states and ~~fluxes-flows~~ other than streamflow when estimating parameters.

85 Treating the system more holistically (i.e., forcing models to simulate multiple response variables adequately) has considerable potential to improve model accuracy (Hrachowitz et al., 2014). The value of such multi-variable and/or multi-objective strategies has been demonstrated using groundwater levels (Fenicia et al., 2008; Freer et al., 2004; Giustolisi and Simeone, 2006; Molenat et al., 2005), near-surface soil moisture (Brocca et al., 2010; Kunnath-Poovakka et al., 2016; López López et al., 2017; Rajib et al., 2016; Sutanudjaja et al., 2014), saturated

90 contributing areas (Blazkova et al., 2002; Franks et al., 1998; Güntner et al., 1999), snow cover (Bennett et al., 2019; Gao et al., 2017; Riboust et al., 2019), evaporation (Bouaziz et al., 2018; Demirel et al., 2018; Hulsman et al., 2020), streamflow at subcatchment outlets (Moussa et al., 2007), satellite-based total water storage anomalies (Werth and Güntner, 2010; Yassin et al., 2017) and tracer data (Birkel et al., 2011; Capell et al., 2012; Birkel et al., 2015; Kuppel et al., 2018a; Piovano et al., 2019; Stadnyk and Holmes, 2023). ~~Alternately, one may seek to extract more information from available data, for example by developing signatures that represent different aspects of the data.~~ Alternately, one may seek to extract more information from the available data, for example by developing signatures that represent different aspects of the data (Euser et al., 2013; Fenicia et al., 2018; Gharari et al., 2014), and then compare the signatures of the observed and simulated time series. For streamflow, the hydrological signatures can include quantiles of the streamflow distribution (values of the flow duration curve-

100 (FDC)), the base flow index, the flashiness index and many others (e.g., (Kavetski et al., 2018)).

Simultaneously calibrating hydrological models with streamflow and tracer or other solute concentrations in the stream may decrease their uncertainty and increase their physical plausibility because of the need to reproduce both hydrological and biogeochemical dynamics (Birkel et al., 2017; Fovet et al., 2015b; Pesántez et al., 2023; Pettersson et al., 2001; Strohmenger et al., 2021; Woodward et al., 2013a). The value of this strategy has been

105 demonstrated, for example using concentrations of chloride (Hrachowitz et al., 2013) or nitrate (NO_3^-) and sulphate (Hartmann et al., 2013; Pettersson et al., 2001). As the movement of water and solutes through the landscape is inherently coupled (Knapp et al., 2020), using time series of multiple elements along with streamflow during calibration may provide additional insights into the flow paths of water through the catchment (Strohmenger et al., 2021). This potential may be particularly high when using solutes that differ in their sources and flow paths across

110 spatial and temporal scales in a catchment. Calibration that includes streamflow along with solutes that have distinct dynamics, as frequently observed with dissolved organic carbon (DOC) and NO_3^- (Inamdar and Mitchell, 2006; Taylor and Townsend, 2010), such as in headwater agricultural catchments (Aubert et al., 2013; Strohmenger et al., 2020; Thomas et al., 2016), thus has high potential to constrain models to adequately reproduce water storage dynamics and flow paths.

115 ~~In addition, using water quality data to calibrate hydrological models may provide new insights into water pathways, as the biogeochemical processes that control the turnover and transport of solutes are closely related to water conditions and transport processes in the soil and groundwater (Medici et al., 2012; Pesántez et al., 2023). This potential is particularly important when the spatial distribution of solutes differs significantly from that of the dynamics of stream concentrations (Shafii et al., 2019; Woodward et al., 2013a), as often observed for dissolved organic carbon (DOC) and NO_3^- (Strohmenger et al., 2021; Taylor and Townsend, 2010). Indeed, previous studies have shown that seasonal variations in DOC and NO_3^- are closely related to fluctuations in the groundwater level in groundwater fed catchments. In contrast, short term variations in DOC and NO_3^- have been related to the activation of subsurface and surface flow pathways during storm events and the subsequent hydrological~~

120

~~connection of DOC-rich and NO_3^- -poor riparian soils to the stream, particularly for near-surface soil layers (Dick et al., 2015; Strohmenger et al., 2021).~~

The objective of this study was thus to test the hypotheses that, by including daily in-stream DOC and NO_3^- concentrations simultaneously in a parsimonious conceptual model in a multi-objective and multi-variable calibration and evaluation strategy, we could increase the model's (1) ability to predict streamflow for calibration or evaluation periods [and](#), (2) internal consistency, and (3) reduce the uncertainty in hydrological parameters.

2. Materials and Methods

2.1. Study site

The Kervidy-Naizin catchment is located in western France ($48^\circ 0' \text{ N}$, $2^\circ 5' \text{ W}$) (Fig. 1) and forms part of the [Agro-Hydro Systems \(AgrHyS\) Critical Zone Observatory](#) (Fovet et al., 2018). It is a 4.82 km² headwater catchment of the 12 km² Naizin catchment (Fig. 1), which is drained by a second-Strahler-order intermittent stream that frequently dries up from July to October.


The climate is temperate oceanic, with a mean ~~\pm standard deviations of~~ annual temperature of $11.2 \pm 0.6^\circ\text{C}$, ~~and mean annual cumulative rainfall precipitation of $810\text{--}894 \pm 180\text{--}170 \text{ mm yr}^{-1}$ and specific discharge of $350 \pm 140 \text{ mm yr}^{-1}$ from 2008 to 2016.~~ The topography is relatively flat, with few slopes reaching a gradient of 5%, and an elevation range of 98–140 m above sea level. The soil is a silty loam 0.5–1.5 m deep, with well-drained Cambisols in the upslope zone and poorly drained Epistagnic Haplic Luvisols and Albeluvisols in the downslope riparian zone (FAO classification (WRB, 2006)). [At the global scale, Kervidy-Naizin is representative of headwater catchments underlain by bedrock in temperate climates.](#) The bedrock consists of [impervious, locally fractured Brioverian schists](#) ~~a variety of Brioverian schists of low permeability~~ and lies below a fissured and fractured weathered layer of variable thickness 1–30 m deep (Molenat et al., 2005). A shallow, perennial groundwater body develops in the soil and weathered bedrock. [In the upland domain, consisting of well-drained soils, the water table remains below the soil surface throughout the year, varying in depth from 1 to 5 m \(Molenat et al., 2005\). In the wetland domain, developed near the stream and consisting of hydromorphic soils \(hereafter, “riparian zone”\), the water table is shallower, remaining near the soil surface generally from October to April/May each year. Near the river \(hereafter, “riparian zone”\), the groundwater level fluctuates within 1 m of the surface, while upslope it always remains deeper than 4 m, with an increased seasonal fluctuation that can descend to 6 m in depth \(Molenat et al., 2005\).](#) ~~sy~~ [The seasonal fluctuation of the water table in this catchment has been described as a succession of three hydrological periods \(Aubert et al., 2013; Lambert et al., 2013\): \(i\) rewetting of riparian wetland soils after the dry summer season; \(ii\) rise of groundwater in the upland domain that leads to prolonged waterlogging of wetland soils and establishes a marked hydraulic gradient in groundwater between upland and wetland domains; and \(iii\) drawdown of groundwater that leads to drying of the stream \(Humbert et al., 2015\).](#)

The land use of Kervidy-Naizin consists mainly of agriculture with intensive mixed crop-livestock farming, with maize (36% of the area), cereals (32%) and grasslands (13%), and a high density of livestock (i.e. dairy cattle, pigs

and poultry) of 5 livestock units ha⁻¹ (Benoit and Veysset, 2021) according to farm surveys performed in 2008 and 2013 and to annual land-use surveys (Casal et al., 2018, 2019; Viaud et al., 2018). From 2002–2015, mean N inputs on the catchment equalled 257 kg ha⁻¹ yr⁻¹, coming from slurry and manure fertilization (69%), inorganic fertilization (21%, mainly ammonium nitrate), cattle excretion in pastures (5%) and nitrogen (N) fixation (5%) (Casal et al., 2019). Kervidy-Naizin is representative of intensive agricultural areas that have an excess of reactive N due to the application of livestock waste and inorganic fertilisers in excess of crop requirements.

In this landscape, most DOC and NO₃⁻ accumulate in riparian-zone soils and groundwater, respectively (Aubert et al., 2013; Strohmenger et al., 2020). ~~thus, biogeochemical and hydrological dynamics and processes in this headwater catchment can be analysed in the context of unlimited DOC and N supply. At the global scale, Kervidy-Naizin is also representative of headwater catchments underlain by bedrock in temperate climates. Using end-member mixing analysis to identify DOC sources and quantify their contributions to the DOC stream in Kervidy-Naizin, (Morel et al., 2009) estimated that 64–86% of the DOC that entered the stream during storms, when much of the DOC export from soils to streams and rivers occurs (Lambert et al., 2014), came from riparian wetland soil. This result confirmed previous studies that found that riparian soils are the main source of DOC in most headwater catchments (Lambert et al., 2013). (Morel et al., 2009) also demonstrated that this riparian wetland zone in Kervidy-Naizin behaved as non-limiting storage of DOC during flushing. Hillslope soils in this catchment also contribute to stream DOC export, but dissolved organic matter (DOM) in upland soils is supply-limited and seasonally depleted after groundwater rises. Upland DOC contribution decreases from ca. 30% of the stream DOC flow at the beginning of the high-flow period to < 10% later in this period (Lambert et al., 2013, 2014). In addition, in a high-frequency, multi-solute 10-year monitoring (2000–2010) study of Kervidy-Naizin, (Aubert et al., 2013) identified that NO₃⁻ accumulated in groundwater at a concentration of ca. 20.7 mg N-NO₃ L⁻¹ compared to 1.6 mg N-NO₃ L⁻¹ in riparian wetland. thus, biogeochemical and hydrological dynamics and processes in this headwater catchment can be analysed in the context of unlimited DOC and N supply.~~

~~A~~ Long-term analysis of the dynamics of nutrient concentrations and hydroclimatic variables at multiple time scales in the Kervidy-Naizin catchment, (Strohmenger et al., 2020) highlighted the opposition of dynamics of DOC and NO₃⁻ concentrations due to opposition in their spatial sources. DOC concentrations peaked under wet or stormflow conditions, when NO₃⁻ concentrations were lowest. In contrast, NO₃⁻ concentrations peaked under high-water-table and drier conditions, when DOC concentrations were lowest. This opposition between maxima and minima of daily DOC and NO₃⁻ concentrations can be interpreted as the result of relative mixing contributions of soil-surface riparian flows (i.e. DOC-rich and NO₃-poor) and upslope groundwater flows (i.e. NO₃-rich and DOC-poor) (Morel et al., 2009) (Aubert et al., 2013) (Strohmenger et al., 2020) (Strohmenger et al., 2020). ~~At the global scale, Kervidy Naizin is also representative of headwater catchments underlain by bedrock in temperate climates.~~

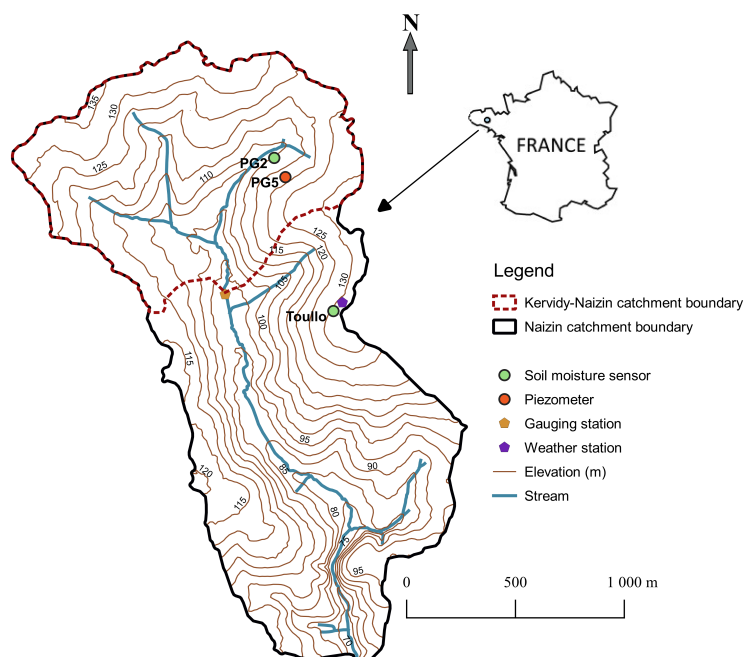

200 **Figure 1.** Map of the nested Kervidy-Naizin and Naizin catchments (4.82 km² and 12.00 km², respectively), in western France. Data from the weather station and the Toullo station, which lie outside the Kervidy-Naizin but inside the Naizin, were used in this study.

2.2. Data monitoring

205 We used daily aggregated meteorological and streamflow measurements collected from 2002-2017. The weather station at-in Kervidy-Naizin (Cimel Enerco 516i), located ca. 1 km from the outlet of the catchment (Fig. 1), records hourly rainfall precipitation, air and soil temperatures, air humidity, global radiation, wind direction and wind speed, which allowed for calculation of potential evapotranspiration using the Penman equation (Penman, 1956). Stream level was recorded every minute at the outlet using a float-operated shaft-encoder level sensor and a data logger (Thalimedes OTT) and then converted to streamflow using a rating curve (Carluer, 1998).

210 Stream water was manually sampled daily at ca. 17:00 at the outlet station. These instantaneous grab samples were immediately filtered (pore size: 0.22 μm) on site and stored in the dark at 4°C in propylene bottles. Analyses were performed within a maximum of two weeks. NO₃⁻ concentrations were measured by ionic chromatography (DIONEX DX 100, (ISO, 1995), precision: ±2.5%). DOC was estimated as total dissolved carbon (C) minus dissolved inorganic C, both measured using a C analyser (Shimadzu TOC 5050A, precision: ±5%).

215 Shallow-groundwater data were collected by a piezometer at mid-slope point (PG5, Fig. 1). The groundwater level at PG5, which has been measured every 15 min (Orpheus OTT) since 2000 using pressure probes, was used because its variations are representative of mean variations in the shallow groundwater in the Kervidy-Naizin. The volumetric soil water content was measured in upland and riparian zones of the catchment using Time Domain Reflectometry (TDR) probes. In the upland zone (Toullo station, Fig.1), it was measured at three depths (i.e. 5, 20 and 50 cm), with three replicates per depth, at 30 min intervals from 1 Jan 2016 to 1 Jan 2019; these data were first averaged by depth and then aggregated into daily values. Although the Toullo station lies outside the Kervidy-Naizin catchment, we assumed that, as Kervidy-Naizin and Naizin are nested, that it could represents the Kervidy-Naizin catchment's soil moisture conditions in the upland zone. In the riparian zone (point PG2, Fig. 1), the volumetric soil water content was measured at a depth of 5 cm, with three replicates, at 30 min intervals from 3
225 Dec 2013 to 1 Jan 2017; these data were also averaged and then aggregated into daily values.

2.3. Rationale for the solute-transport model

We used a parsimonious semi-distributed solute-transport model, implemented in Python, that was iteratively customized and tested within the DYNAMITE modular modelling framework (Fovet et al., 2015a; Hrachowitz et al., 2014, 2021). The processes are represented by linear or non-linear equations that connect the ~~fluxes-flows~~ to model reservoirs (Beven, 2012). This representation of storage-discharge relationships directly connects water ~~fluxes-flows~~ to biogeochemical processes, which facilitates simultaneous simulation of both water and solute ~~fluxes-flows~~ (Birkel et al., 2017).

2.3.1. Hydrology

The model spatially distinguishes two functionally distinct response units: hillslope and riparian zones. It represents them as two parallel suites of reservoirs connected by a common groundwater reservoir (Fig. 2). The hillslopes are represented as two reservoirs: the rooting-zone reservoir (S_U) [L] and a fast-responding reservoir (S_F) [L] (e.g. preferential flow structures). As riparian zones often have a distinct hydrological function (Molénat et al., 2005; Seibert et al., 2003, 2009), the model also represents them as two reservoirs: an unsaturated-zone reservoir (S_{UR}) [L] and a fast-responding reservoir (S_R) [L]. The two parallel suites are connected by a slow groundwater reservoir (S_S) [L], characterized by a threshold from which the groundwater feeds the S_{UR} -reservoir that represents a groundwater mixing volume (S_{S_mix}) [L]. See Table 1 for the relevant model equations. More detailed model description and justifications for the processes modelled can be found in previous studies (Hrachowitz et al., 2013, 2014, 2015).

The rainfall-runoff model uses daily precipitation (P) [$L T^{-1}$] and potential evapotranspiration (E_P) [$L T^{-1}$] to simulate daily specific discharge at the outlet (Q_T) [$L T^{-1}$]. Upon reaching the soil, P is divided into water that infiltrates into S_U (R_U , Table 1) and excess water by a hillslope runoff-generation coefficient ($C_{H,R}$) routed to S_F (R_F) and S_S (R_P). $C_{H,R}$ is estimated by a logistic function representing the catchment-wide soil water holding capacity in the rooting zone (S_{U_max}), which roughly reflects soil water content at field capacity, and a shape factor (β_H). Percolation of water from S_U to S_S (R_{SS}) is estimated by a linear function of the water storage in S_U and a maximum percolation capacity (P_{max}). Evapotranspiration from S_U (E_U) is estimated by a linear function of the relative soil moisture and a transpiration threshold (L_P), which is the fraction of S_{U_max} below which potential evapotranspiration (E_P) is constrained by the water available in S_U .

Fast reservoir S_F receives water (R_F) from S_U (Table 1, Eq. (8)) and drains into reservoir S_{UR} according to a linear storage-discharge relationship that is controlled by parameter k_F . Slow reservoir S_S is recharged by R_{SS} and R_P from S_U and slowly drains according to a linear storage-discharge relationship that is controlled by parameter k_S .

The water drained from S_S is redistributed between S_{UR} and the stream according to parameter f_{SUR} . ~~Additional deep infiltration losses (Q_{L7} , a calibration parameter) from S_S represent groundwater export to adjacent catchments. Deep-infiltration losses from S_S , represented by calibration parameter Q_L , are used to explicitly represent inter-catchment groundwater flows (i.e. groundwater flows that cross topographic divides), implying that precipitation that falls in one catchment influences the streamflow in another catchment (Bouaziz et al., 2018). Analysis of the long-term water balance of a headwater catchment with similar physiography in Brittany revealed a large deficit (Hrachowitz et al., 2014). There is evidence that many catchments have such deficits, which are caused, at least in part, by large inter-catchment groundwater flow (Hrachowitz et al., 2014; Le Moine et al., 2007), although this cannot be verified completely, as highlighted by Beven (2001). In addition, data from 58 catchments in the Meuse basin indicated that large net inter-catchment groundwater flows likely existed, mainly in small headwater catchments underlain by fractured aquifers (Bouaziz et al., 2018), such as Kervidy-Naizin catchment.~~

The parameter for deep-infiltration losses is also used to reproduce the zero flow at the outlet and groundwater dynamics with a long recession observed during the summer, regardless of the piezometer (Humbert et al., 2015). Consequently, we explicitly modelled inter-catchment groundwater flows for Kervidy-Naizin catchment. Common conceptual models rarely include deep-infiltration losses, which may not prevent them from simulating streamflow accurately, but may cause them to misrepresent the natural system, in particular by overestimating actual evaporation rates in the compensation (Bouaziz et al., 2018). In the present study, in the absence of detailed knowledge of the underlying processes, deep-infiltration losses from Kervidy-Naizin were conceptualized as a loss term Q_L from S_S .

Riparian reservoir S_{UR} receives water from S_F , S_S and rainfall-precipitation (Table 1, Eq. (13)). Excess water, estimated using a runoff-generation coefficient ($C_{R,R}$), is routed to S_R (R_R). The water that remains in S_{UR} is available for transpiration (E_{UR} , Table 1, Eq. (14)). S_R drains into the stream according to a linear storage-discharge relationship that is controlled by parameter k_R (Table 1, Eq. (18)). The total simulated stream discharge equals the sum of slow and fast contributions from S_S and S_R , respectively (Table 1, Eq. (19)).

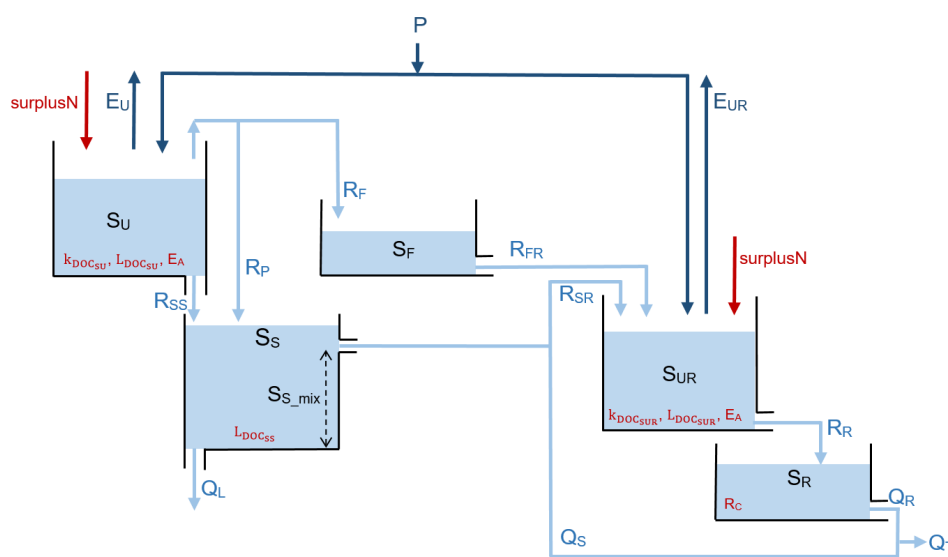


Figure 2. Conceptual model structure used to represent the Kervidy-Naizin catchment. S are storage components, R are recharge flows between reservoirs, Q are liquid flows that leave the system and E are evaporative flows that leave the system. Dark blue and light blue arrows represents water flows and water with solutes, respectively. Biochemical parameters are shown in red for each reservoir. See Table 2 for definitions of the parameters and Table A1 for definitions of the variable abbreviations.

Table 1. State and flux-flow equations of the model. See Table A1 for definitions of the variable abbreviations.

Process	Water balance	Eq.	Flow and state equations, and relationships	Eq.
Unsaturated zone	$dS_U/dt = P - E_U - R_F - R_P - R_{SS}$	(1)	$E_U = E_p \cdot \min\left(1, \frac{S_U}{S_{U,max} L_P}\right)$	(2)
			$R_U = (1 - C_{H,R}) \cdot P$	(3)
			$R_F = C_{H,R} \cdot (1 - C_P) \cdot P$	(4)
			$R_P = C_{H,R} \cdot C_P \cdot P$	(5)
			$R_{SS} = P_{max} \cdot \left(\frac{S_U}{S_{U,max}}\right)$	(6)
			$C_{H,R} = \frac{1}{\left(1 + \exp\left(\frac{-S_U/S_{U,max} + 0.5}{\beta_H}\right)\right)}$	(7)
			Fast reservoir	$dS_F/dt = R_F - R_{FR}$
Slow reservoir	$dS_S/dt = (1 - f) \cdot (R_{SS} + R_P) - Q_S - R_{SR} - Q_L$	(10)	$Q_S = \begin{cases} (S_S - S_{S,mix} - Q_L) \cdot (1 - f_{SUR}) \cdot (1 - e^{-k_S t}) dt^{-1}, & (S_S - S_{S,mix} - Q_L) > 0 \\ 0, & (S_S - S_{S,mix} - Q_L) \leq 0 \end{cases}$	(11)
			$R_{SR} = \begin{cases} (S_S - S_{S,mix} - Q_L) \cdot f_{SUR} \cdot (1 - e^{-k_S t}) dt^{-1}, & (S_S - S_{S,mix} - Q_L) > 0 \\ 0, & (S_S - S_{S,mix} - Q_L) \leq 0 \end{cases}$	(12)
Riparian unsaturated reservoir	$dS_{UR}/dt = P + \frac{R_{FR} \cdot (1 - f)}{f} + \frac{R_{SR}}{f} - E_{UR} - R_R$	(13)	$E_{UR} = E_p \cdot \min\left(1, \frac{S_{UR}}{S_{UR,max} L_P}\right)$	(14)
			$R_R = C_{R,R} \cdot P$	(15)
			$C_{R,R} = \min\left(1, \left(\frac{S_{UR}}{S_{UR,max}}\right)^{\beta_R}\right)$	(16)
Riparian reservoir	$dS_R/dt = R_R - Q_R$	(17)	$Q_R = S_R \cdot (1 - e^{-k_R t}) dt^{-1}$	(18)
Total runoff	$Q_T = Q_S + f \cdot Q_R$	(19)		
Total evaporative flows	$E_A = (1 - f) \cdot E_U + f \cdot E_{UR}$	(20)		

290

2.3.2. Nitrate transfer and transformation

N inputs to reservoirs S_U and S_{UR} are the daily N surplus (kg N ha^{-1}), which correspond to soil N balances. N inputs consist of inorganic and organic fertilisers (i.e. slurry and manure), biological N fixation and atmospheric N deposition. N outputs equal the sum of N exported by each crop type. In this study, the N surplus was considered as a net (N inputs - N outputs) diffuse N source for the catchment (Dupas et al., 2020). Farm surveys performed in 2008 and 2013 led to estimates of a mean annual surplus over the study period (2002–2017) of ca. 90 $\text{kg N ha}^{-1} \text{ yr}^{-1}$ (Casal, 2018). Given the uncertainty in the estimated N surplus, we considered it as a calibration parameter (surplusN, Table 2).

295

300

305

310

Due to the lack of relevant studies, the period with the highest heterotrophic denitrification rate is unknown for Kervidy-Naizin. In agricultural headwaters, denitrification rates are usually low at the end of winter, increase in spring, peak in summer, and decrease in autumn before reaching their lowest in the middle of winter (Anderson et al., 2014). In agricultural landscapes where N availability exceeds plant requirements, denitrification is limited mainly by C availability, O_2 concentration and temperature (Barton et al., 1999). Riparian zones of these landscapes often contain large amounts of C. Thus, denitrification rates are expected to be highest from late spring to early autumn, when temperatures are highest and, as long as soils remain wet, O_2 concentrations are lowest (Anderson et al., 2014). We also had no observations of biological transformation of NO_3^- through consumption by aquatic primary producers, although we assumed that it was greater-highest in spring and summer. Thus, in the absence of detailed knowledge of the temporal pattern of biological NO_3^- removal in the Kervidy-Naizin, we represented biological transformation of NO_3^- as a constant annual amount of NO_3^- removal (R_c) ($\text{kg N ha}^{-1} \text{ yr}^{-1}$) from reservoir S_R (Table 2). We assumed that if this constant overestimated the biological NO_3^- removal usually

observed in agricultural landscapes in winter, it would influence NO_3^- concentration little given the Kervidy-Naizin's high NO_3^- load in winter. Thus, representing biological removal as a constant was assumed to be reasonable in a parsimonious model approach (Fovet et al., 2015b).

315 Biological transformation of NO_3^- , either by denitrification in the riparian zone or by consumption in the stream by aquatic primary producers, was simulated as a constant annual amount of NO_3^- removal (R_e) ($\text{kg N ha}^{-1} \text{yr}^{-1}$) in reservoir S_R . The main factors that limit denitrification are NO_3^- availability, temperature, soil moisture and light (Billen et al., 1994; Oehler et al., 2009). These factors vary seasonally and, to some extent, are likely to compensate for each other; for example, in winter, riparian zone saturation favours anoxic conditions and often higher N concentrations, whereas in summer, temperature and light intensity favour biological activity. Furthermore, even if NO_3^- removal were higher in winter, its effect on NO_3^- concentration would be negligible given the large NO_3^- load. Therefore, representing biological removal as a constant (R_e , Table 2) was assumed to be reasonable in a parsimonious model approach (Fovet et al., 2015b). Denitrification can be a sink for NO_3^- in streams, particularly small (low-order) ones (Böhlke et al., 2009). However, methods for measuring in-stream denitrification are difficult and have high uncertainty, and the controlling variables are not known well enough to make reliable predictions for targeted management decisions (Böhlke et al., 2009). Given the lack of in-stream denitrification observations and the low potential for in-stream NO_3^- removal (estimated at ca. 4% per year; (Salmon-Monviola et al., (2013))) in Kervidy-Naizin, we did not model it and thus assumed zero in-stream denitrification.

2.3.3. Dissolved organic carbon transfer and transformation

330 The conceptualization of biogeochemical processes used to simulate DOC dynamics, similar to that of Birkel et al. (2014), is based on a simple production-loss mass balance and transport along the main flow pathways to the stream. The DOC mass balance ($\Delta mass_{DOC_i}$ [M]), during a time step Δt [T], ($\Delta t = 1$ day, in this study) of each reservoir i (i.e. S_U , S_{UR} and S_S) differs from more complex C-carbon process models by being simplified into a grouped representation of DOC production ($Production_{DOC_i}$ [M]) (processes that transform C-carbon were not distinguished) and loss ($Loss_{DOC_i}$ [M]) (processes that consume, retain, and mineralize DOC were not distinguished) (Di Grazia et al., 2023; Koch et al., 2013), assuming that in stream processes have negligible influence on DOC concentrations (Birkel et al., 2014, 2020):

$$\Delta mass_{DOC_i} = Production_{DOC_i}(t) - Loss_{DOC_i} \quad (21)$$

DOC production ($Production_{DOC_i}$ [M]) of reservoir i are calculated by multiplying DOC concentration ($[DOC]_i$ [M L^{-1}]) with the total water stored (S_i [L]) at the beginning of each time step. DOC production was assumed to increase as temperature and soil water content increased (Birkel et al., 2020):

$$[DOC]_i \frac{d[DOC]_i}{dt} = k_{DOC_i} \cdot \frac{S_i}{S_{i,max}} \cdot E_a^{(T-\bar{T})} \quad (22)$$

345 Where $[DOC]_i$ is the DOC concentration (M L^{-1}) of reservoir i (i.e. S_U and S_{UR}), k_{DOC_i} [$\text{M L}^{-1} \text{d}^{-1}$] determines is the concentration at which DOC is produced daily in a reservoir i , E_a (dimensionless) is a calibrated temperature-dependent activation energy, T ($^{\circ}\text{C}$) is the observed daily air temperature, \bar{T} ($^{\circ}\text{C}$) is

the mean annual air temperature for the study period, \bar{S}_i and $S_{i,max}$ and S_i the capacity [L] and total water stored [L], respectively, of reservoir i . DOC was assumed not to be produced in the groundwater reservoir (S_S), as deeper mineral horizons in soil are considered to be DOC sinks instead (Kalbitz and Kaiser, 2008) and low DOC concentrations have been observed in Kervidy-Naizin's groundwater (mean of ca. 1 mg L⁻¹; (Aubert et al., (2013)). However, DOC can accumulate in S_S due to recharge from the hillslope reservoir (S_U).

Potential DOC losses ($LOSS_{DOC_i}$ [M]) in the form of mineralization (Köhler et al., 2002), absorption or consumption in reservoirs S_U , S_{UR} and S_S are calculated using a loss coefficient (L_{DOC_i}) (dimensionless); (Table 2) applied to the DOC mass of reservoirs at the beginning of each time step.

We assumed that in-stream processes have negligible influence on DOC concentrations. Some studies found that agricultural land use can increase the production of autochthonous DOM in streams (Shang et al., 2018). For example, in an agricultural catchment (Lower Austria, 66 ha), one large DOC source was the stream itself, as in-stream processes caused 37% of the total DOC load measured at the catchment outlet during base flow conditions from November to May (Eder et al., 2022). Nevertheless, end-member mixing analysis of DOC in Kervidy-Naizin found that stream DOC dynamics during winter storm events could be explained by catchment processes, with little contribution from in-stream sources (Morel et al., 2009). These results confirmed that most of the DOC in streams that drain headwater catchments is likely to be of external origin (i.e. allochthonous), resulting from interactions between biogeochemical and hydrological processes in soils, at least during the wet season (Dalzell et al., 2007; Fovet et al., 2020; Lambert et al., 2013, 2014; Raymond and Saiers, 2010). This is also consistent with the theory of DOM transformation along a fluvial continuum (Creed et al., 2015) and the dynamics of DOM fluorescence observed for example by (Shang et al., 2018), who found increasing contribution of protein-like autochthonous DOM, accompanied by decreasing contribution of allochthonous DOM, from low-order to high-order systems. For Kervidy-Naizin, these results are supported by two arguments. First, some processes associated with DOC production in summer are unlikely to occur in Kervidy-Naizin's stream, which frequently dries up from July to October. Second, riparian vegetation is dense and covers the entire length of Kervidy-Naizin's network, which decreases primary production of DOC. Thus, we considered the assumption regarding the negligible influence of in-stream processes on DOC concentrations to be valid for Kervidy-Naizin.

The daily solute (NO_3^- or DOC) concentration at the outlet ($C_{out,solute}$ [M L⁻¹]) is then calculated according to the relative contribution of reservoirs S_S and S_R :

$$C_{out,solute} = \frac{C_{solute,S_S} \cdot Q_S + C_{solute,S_R} \cdot Q_R}{Q_T} \quad (23)$$

Table 2. Definitions and uniform prior distributions of the parameters of the solute-transport model.

Module	Parameter	Unit	Initial Range	Definition
Rainfall- Runoff	S_{U_max}	[mm]	[50-1000]	Storage capacity of the hillslope unsaturated zone
	C_P	[-]	[0.005-1.0]	Preferential recharge coefficient
	β_H	[-]	[0.01-4]	Hillslope runoff coefficient
	P_{max}	[mm d ⁻¹]	[0.1-6]	Percolation capacity
	L_P	[-]	[0.01-0.8]	Transpiration threshold
	k_F	[d ⁻¹]	[0.001-1]	Storage coefficient of the fast reservoir
	k_S	[d ⁻¹]	[0.02-0.06]	Storage coefficient of the slow reservoir
	S_{S_mix}	[mm]	[500-9000]	Groundwater mixing volume in the slow reservoir
	f_{SUR}	[-]	[0.00001-0.2]	Proportion of water flow from reservoir S_S that passes through reservoir S_{UR}
	Q_L	[mm d ⁻¹]	[0.05-1]	Deep infiltration loss
	f	[-]	[0.15-0.30]	Proportion of the catchment covered by the riparian zone
	S_{UR_max}	[mm]	[50,500]	Storage capacity in the riparian unsaturated zone
	β_R	[-]	[1-7]	Riparian runoff coefficient
k_R	[d ⁻¹]	[0.04-2]	Storage coefficient of the riparian reservoir	
Nitrate	surplusN	[kg N ha ⁻¹ year ⁻¹]	[50-95]	Nitrogen surplus
	Rc	[kg N ha ⁻¹ year ⁻¹]	[25-40]	Amount of nitrate removed
Dissolved organic carbon (DOC)	$k_{DOC_{SU}}$	mg L ⁻¹	[15-35]	DOC concentration in unsaturated storage
	$k_{DOC_{SUR}}$	mg L ⁻¹	[15-35]	DOC concentration in riparian storage
	E_A	[-]	[1.0-1.2]	Energy parameter
	$L_{DOC_{SU}}$	[-]	[0-1]	DOC loss in unsaturated storage
	$L_{DOC_{SS}}$	[-]	[0-1]	DOC loss in slow storage
$L_{DOC_{SUR}}$	[-]	[0-1]	DOC loss in riparian storage	

2.3.4. Mixing assumption

Each reservoir in the model is assumed to be completely mixed to simulate solute dynamics. This approach, used in most studies based on conceptual models (Birkel et al., 2020; McMillan et al., 2012; Pesántez et al., 2023), assumes instantaneous and complete mixing of the incoming water and solute masses in each reservoir, according to a solute-balance equation:

$$\frac{d(c_i \cdot S_i)}{dt} = \sum_j c_{I,j} \cdot I_j - \sum_k c_{O,k} \cdot O_k \quad (24)$$

where S_i is the amount of water stored in reservoir i [L], c_i is the associated solute concentration [M L⁻³], I are the j water-inflow [L T⁻¹] to a given reservoir (e.g. R_{SS} and R_P from S_U to S_S) (Fig. 2) with the corresponding solute-inflow concentrations $c_{I,j}$ [M L⁻³], and O are the k water-outflow [L T⁻¹] from a given reservoir with the corresponding solute-outflow concentrations $c_{O,k}$ [M L⁻³] (e.g. R_{SR} and Q_S from S_S) (Fig. 2).

The model tracks the distribution of ages of the water outflow ($p_{Outflow}(T, t)$, where T is the transit time at time t ; (see Benettin et al., 2022)) using a time stamp for each daily incoming and outflowing water flux-flow in reservoirs, similar to the approach of Birkel and Soulsby (2016). The distribution of ages of water in a reservoir ($p_S(T, t)$) can be derived in a similar way to tracking the ages of water in outflow ($p_{Outflow}(T, t)$), as they are related by a StorAge-Selection (SAS) function developed by Botter et al. (2011):

$$\omega_{Outflow}(T, t) = \frac{p_{Outflow}(T, t)}{p_S(T, t)} \quad (25)$$

The SAS function can be considered a statistical summary of the transport behaviour of a hydrological system that quantifies the release of water of different ages from a reservoir to an outflow (Rinaldo et al., 2015). According to the complete mixing assumption of these model, the age distributions of storage and flux-flow are identical to each

other; (i.e. the outflow composition is perfectly representative of the storage composition) (Benettin et al., 2022). Thus, the solute concentration of outflow equals the solute concentration of the reservoir. This “well-mixed” situation corresponds to uniform sampling in which $\omega_{Outflow}(T,t) = 1$ and implies that water storage is uniformly (or randomly)-sampled by an outflow (Benettin et al., 2013).

2.4. Sensitivity analysis of the solute-transport model

A global sensitivity analysis (GSA) was carried out to determine the effect of the model calibration scenarios on the most sensitive hydrological parameters. GSA allows to identify the extent to which changes in different parameters influence changes in the hydrological model output, and to determine the most important parameters (i.e. that need to be calibrated) and the least important parameters (i.e. that can be fixed as constants) (Reusser et al., 2011; Wang and Solomatine, 2019). GSA, which ranks the relative influence of model parameters on model output (Sun et al., 2022), is generally recommended for hydrological models due to its advantages over local sensitivity analysis methods. Indeed, GSA's can, such as its ability to consider the influence of input parameters over their entire range of variation and its suitability for non-linear and non-monotonic models, thus providing results that are independent of modeller bias and a particular site (Song et al., 2015). Among the GSA methods widely applied to hydrological models, we chose a variance-based method as it can provide the most accurate and robust sensitivity indices for complex non-linear models (Reusser et al., 2011; Song et al., 2015; Wang and Solomatine, 2019). Variance-based methods assume that a parameter's influence can be measured by the contribution of the parameter itself or its interactions with two or more other parameters to the variance of the output. The main advantage of variance-based methods is that they can calculate the main and higher-order effects of parameters, which identifies which ones strongly influence the output on their own, and which ones strongly influence the output due to their interactions with other parameters (Wang and Solomatine, 2019). We used the Fourier Amplitude Sensitivity Test (FAST) (Saltelli et al., 1999) from the SPOTPY Python framework (Houska et al., 2015) to calculate variance-based sensitivity indices that ranged from 0-1. FAST calculates a first-order sensitivity index (S_i), which measures the effect of each parameter on the output, and a total sensitivity index (S_{Ti}), which measures the effect of each parameter and its interactions with the other parameters on the output (Shin and Kim, 2017). Because S_{Ti} provides more reliable results than S_i when investigating the overall influence of each parameter on the output (Saltelli et al., 2009), we used it to investigate parameter sensitivity, as defined by Saltelli and Annoni (2010):

$$S_{Ti} = \frac{E_{X_{\sim i}}(V_{X_i}(Y|X_{\sim i}))}{V(Y)} \quad (26)$$

where X_i is the i^{th} parameter, and $X_{\sim i}$ is the vector of all parameters except X_i .

The variance between parentheses in the numerator denotes that the variance of Y , the value of the scalar objective function, is considered over all possible values of X_i while keeping $X_{\sim i}$ fixed. The expectation operator outside the parentheses is considered over all possible values of $X_{\sim i}$, whereas the variance $V(Y)$ in the denominator is the total (unconditioned) variance (Shin and Kim, 2017). The numerator represents the expected variance if all parameters except X_i are fixed (Saltelli and Annoni, 2010).

Calculating S_{Ti} for a single parameter requires $n \times (p+2)$ model runs, where n is the sample size and p is the number of parameters (Saltelli, 2002). To determine an appropriate sample size for this GSA, we relied on the experiment of Nossent et al. (2011), in which the sensitivity index did not converge until $n = 12,000$; thus, with 14 hydrological parameters, we performed 192,000 model runs. In this GSA, the Nash-Sutcliffe model efficiency coefficient (Nash and Sutcliffe, 1970) was used to assess daily streamflow output, as suggested by Nossent et al. (2011).

2.5. Model calibration and evaluation

To limit adverse effects of equifinality and ensure robust posterior parameter distributions to represent processes meaningfully, extensive multi-objective and multi-variable calibration was performed by calibrating hydrological and biogeochemical model predictions simultaneously. When using multi-objective optimization to calibrate a model, the goal is to find a set of solutions that simultaneously optimize several, potentially conflicting, objective functions that measure individual processes. The interaction of multiple objectives leads to a set of compromised solutions, known as Pareto-optimal front (Mostafaie et al., 2018). As none of the solutions can be considered superior when there is more than one objective to optimize, Pareto-optimal solutions (hereafter, “Pareto front”) are also called non-dominated solutions (Yeste et al., 2023) with equally good parameter sets, which provides an uncertainty boundary of the predictive model. The caRamel algorithm (Monteil et al., 2020) used in this approach combines the multi-objective evolutionary annealing-simplex algorithm (Efstratiadis and Koutsoyiannis, 2008) and the non-dominated sorting genetic algorithm II (Reed and Devireddy, 2004). The caRamel algorithm produces an ensemble of parameter sets (i.e. a “generation”) to run the model, downscales the generation to the parameter sets that optimize the objective functions and generates a new parameter set that produces more accurate results. The research hypotheses of this study were tested using a stepwise strategy with four model-calibration scenarios based on different combinations of model-performance metrics (Table 3):

- Scenario 1 (S1): only data on streamflow used for calibration, with six metrics used to describe the predicted streamflow signatures
- Scenario 2 (S2): data on streamflow and stream DOC concentration used for calibration, with two metrics including the mean of the metrics in S1 and the Kling–Gupta efficiency (Gupta et al., 2009) used to assess the predicted DOC concentrations
- Scenario 3 (S3): same as S2, but the solute was NO_3^- instead of DOC
- Scenario 4 (S4): data on streamflow and stream DOC and NO_3^- concentrations used for calibration, with three metrics including the mean of the metrics in S1 and the Kling–Gupta efficiency used to assess the predicted DOC and NO_3^- concentrations.

The calibration period was set from 1 Jan 2013 to 1 Sep 2016, while the evaluation period was set from 1 Aug 2008 to 31 Dec 2011, each simulated after 3 years of initialization. These periods, the same as those of Strohmenger et al. (2021), were chosen to be able to compare model performance to two approaches to solute modelling. The hydrological year 2012 was excluded from these periods due to a problem with laboratory analysis of NO_3^- concentrations that year. The uniform prior parameter distributions were based on previous studies of headwater catchments in similar physiographic contexts (Fovet et al., 2015a; Hrachowitz et al., 2015) (Table 2). The prior distribution of storage coefficient k_S had been narrowly constrained based on previous baseflow-recession analysis using a correlation method (Yang et al., 2018). Three prior parameter constraints (Gharari et al., 2014; Hrachowitz et al., 2014) were added to the calibration algorithm to reduce parameter uncertainties: $k_S < k_F$, $k_F < k_R$ and $S_{UR_max} < S_{U_max}$.

Up to 70,000 model runs were used for each calibration scenario, with several successive optimizations to confirm reproducibility of the results, as recommended by Monteil et al. (2020). All parameter sets that belonged to the final Pareto fronts (hereafter, “envelope”) were retained as feasible solutions for each calibration scenario (Table 3). To illustrate the results for the predicted discharges and solute concentrations, a “best-compromise” set was selected from the Pareto front that minimized the Euclidean distance to the optimal point in the multi-objective

space of each calibration scenario. All simulated discharges and concentrations using all parameter sets of the Pareto front provided information about the uncertainty in the model's output.

490 In the later evaluation step, observed soil water content and groundwater level measurements were used as independent data to assess the consistency of internal processes of the best-compromise model for each scenario. Soil moisture is a key variable for the energy and water balance at the land surface. It affects the partitioning of solar radiation into latent and sensible heat as well as the partitioning of precipitation into direct runoff and catchment storage (Duethmann et al., 2022). Accurate prediction of soil moisture is thus essential for simulating
495 streamflow, evapotranspiration and percolation (Rajat and Athira, 2021; Rajib et al., 2016) and for constraining the parameters of hydrological models. The role of groundwater in the seasonal and multi-year dynamics of streamflow is also essential: in many temperate catchments, groundwater stores water during wet periods and releases it throughout the year, thus contributing greatly to low flows (Pelletier and Andréassian, 2022). These variables are important for characterizing the internal hydrological dynamics of a catchment and are therefore relevant for assessing the internal consistency of the model. ~~Therefore, the model's representation of processes and its accuracy can be improved by evaluating its ability to reproduce the dynamics of these key variables dynamics.~~
500 The data observed for soil water content at Toullo and PG2 were normalized (from 0-1) as a function of their minimum and maximum values over all of the periods studied. All normalized data observed at Toullo station and point PG2 were compared to the normalized simulated water content in the hillslope reservoir (S_U) and riparian reservoir (S_{UR}), respectively. To compare to the observed groundwater level, the simulated groundwater level was
505 estimated from simulated water storage in the groundwater reservoir (S_S) (Seibert, 2000) using the exponential function $z = -e^{A \cdot S_S + B}$, where S_S is water storage in the slow reservoir, and z is the groundwater level. Coefficients A and B were determined by linear regression between the simulated water storage and the observed groundwater level.

510 The non-parametric Mann-Whitney U test was used to test whether model predictions of calibration scenarios S2, S3, and S4 differed significantly ($p < 0.05$) from those of the baseline scenario S1.

515

520

525

Table 3. Signatures for streamflow, dissolved organic carbon (DOC) and nitrate (NO_3^-) and the associated performance metrics used for model calibration scenarios and evaluation. The size of the Pareto front was the number of solutions. NSE: Nash–Sutcliffe model efficiency coefficient, KGE: Kling–Gupta efficiency. [See Appendix C for definitions of the signatures and performance metrics.](#)

Calibration scenario	Variables/Signatures	Abbreviation	Performance metrics	Size of the Pareto front	References
S1: streamflow only	Time series of streamflow	Q	NSE_Q , KGE_Q	280	Nash and Sutcliffe, 1970; Gupta et al., 2009
		$\text{Log}(Q)$	$\text{NSE}_{\text{log}Q}$		
	Flow duration curve	FDC	NSE_{FDC}		
	Runoff ratio	RUNOFF	$\text{NSE}_{\text{RUNOFF}}$		
	Volumetric efficiency	VE	VE_Q		Criss and Winston, 2008
S2: streamflow and DOC	Streamflow	Q	Mean of metrics of S1	180	Gupta et al., 2009
	DOC	DOC	KGE_{DOC}		
S3: streamflow and NO_3^-	Streamflow	Q	Mean of metrics of S1	110	Gupta et al., 2009
	NO_3^-	NO_3^-	KGE_{NO_3}		
S4: streamflow, DOC and NO_3^-	Streamflow	Q	Mean of metrics of S1	270	Gupta et al., 2009
	DOC	DOC	KGE_{DOC}		
	NO_3^-	NO_3^-	KGE_{NO_3}		

3. Results

3.1. Global sensitivity analysis of parameter influence on streamflow

The hydrological parameters that influenced predicted streamflow the most were related to recharge (C_P ; $S_T = 0.59$), deep-infiltration losses (Q_L ; $S_T = 0.25$), percolation capacity (P_{max} ; $S_T = 0.18$), storage capacity of the hillslope unsaturated zone ($S_{U_{\text{max}}}$; $S_T = 0.15$) and storage coefficient of the fast-responding reservoir in riparian zone reservoir (k_R ; $S_T = 0.14$) (Fig. 3). The strong influence of C_P was logical, as it determines the recharge from S_U to S_S and S_{UR} to S_R (i.e., how water from runoff is redistributed between the riparian zone and groundwater). Parameters related to the area of the riparian zone (f) and the transpiration threshold (L_P) had less influence.

3.2. Prediction of streamflow and solutes concentrations

Overall, the model reproduced the main features of the observed hydrological response (Fig. 4) in both the calibration (NSE_Q , $\text{NSE}_{\text{log}Q}$ and $\text{KGE}_Q > 0.8$) and evaluation (NSE_Q , $\text{NSE}_{\text{log}Q}$ and $\text{KGE}_Q > 0.7$) periods for all scenarios. The predicted streamflow reproduced the seasonal dynamics observed during the wetting-up (rising limb of the hydrograph), wet and recession periods. The high flow variations associated with storm events were usually represented relatively well ($\text{NSE}_Q > 0.75$) in calibration and evaluation periods, with good synchronicity, in particular in winter 2010 and 2014. Overall, model performances for the evaluation period were only slightly lower than those for the calibration period for all four scenarios (Figs. 4 and Fig. A1). Performance of the best-compromise model was slightly higher for S1 than for the other scenarios, for both calibration and evaluation periods (e.g. comparing S1 ($\text{NSE}_Q = 0.91$, $\text{NSE}_{\text{log}Q} = 0.95$, $\text{KGE}_Q = 0.92$) to S4 ($\text{NSE}_Q = 0.87$, $\text{NSE}_{\text{log}Q} = 0.92$, $\text{KGE}_Q = 0.84$) for the calibration period) (Fig. 4). The difference in performance between S1 and S2 was smaller.

555 The uncertainty in predicted streamflow estimated from the envelope was low for the calibration and evaluation periods, but appeared to peak during low flow periods. The calibrated model provided similarly reasonable representations of DOC (Fig. 5) and NO_3^- (Fig. 6) concentrations. Predicted DOC concentrations ~~in~~ for the calibration period were slightly more accurate for S2 (Fig. 5aA) (i.e. $\text{KGE}_{\text{DOC}} = 0.78$, $\text{RMSE}_{\text{DOC}} = 2.14 \text{ mg L}^{-1} \text{ mg}^{-1}$) than for S4 (Fig. 5bB) (i.e. $\text{KGE}_{\text{DOC}} = 0.76$, $\text{RMSE}_{\text{DOC}} = 2.28 \text{ mg L}^{-1} \text{ mg}^{-1}$). Predicted NO_3^- concentrations ~~in~~ for the calibration period were slightly more accurate for S3 (Fig. 6aA) (i.e. $\text{KGE}_{\text{NO}_3} = 0.76$, $\text{RMSE}_{\text{NO}_3} = 1.87 \text{ mg N-NO}_3 \text{ L}^{-1} \text{ mg}^{-1}$) than for S4 (Fig. 6bB) (i.e. $\text{KGE}_{\text{NO}_3} = 0.74$, $\text{RMSE}_{\text{NO}_3} = 1.95 \text{ mg N-NO}_3 \text{ L}^{-1} \text{ mg}^{-1}$). The model reproduced the contrasting dynamics of stream DOC and NO_3^- (Aubert et al., 2013; Strohmenger et al., 2020), with maximum DOC and minimum NO_3^- concentrations occurring in autumn. During this period, the median simulated DOC concentration was ca. 8.7 mg L^{-1} , while that of NO_3^- concentration was ca. $11 \text{ mg N-NO}_3 \text{ L}^{-1}$. During the wetting-up period, DOC concentrations decreased to a median of $2.5\text{-}3.5 \text{ mg L}^{-1}$, while NO_3^- concentrations increased to a median level of $14\text{-}16 \text{ mg N-NO}_3 \text{ L}^{-1}$. These concentrations remained relatively stable during the wet and recession periods. At the end of the recession period, DOC concentration increased slightly to a median of ca. $5.5\text{-}6 \text{ mg L}^{-1}$, while NO_3^- concentration decreased to a median of ca. $12 \text{ mg N-NO}_3 \text{ L}^{-1}$. The model simulated high NO_3^- concentrations in summer, when streamflow and NO_3^- concentrations had not been observed. During summer dry periods, the stream effectively dries up and no water flows at the outlet, which made it more difficult to calibrate the model to predict their solute concentrations. The model simulated near-zero water flow during dry periods, but occasionally simulated flow on certain days when zero flow had been observed, which yielded relatively high simulated NO_3^- concentrations. The lack of observed NO_3^- concentrations during dry periods also provided no constraints that could help the model represent NO_3^- concentrations realistically.

560

565

570

575 The simulated hydrological signatures for all solutions on the Pareto front provide evidence that including solute data in the calibration ~~enhances~~ improves the ~~model's~~ ability of the model to reproduce certain streamflow characteristics. While the performance based on median hydrological metrics (NSE_Q , $\text{NSE}_{\log Q}$, KGE_Q , VE_Q , NSE_{FDC}) was lower overall for S2 and S4 than for S1 for both calibration and evaluation periods (Fig. 7), the median $\text{NSE}_{\text{RUNOFF}}$ runoff ratio ($\text{R}_{\text{RUNOFF}} \text{NSE}_{\text{RUNOFF}}$) was significantly higher ($p < 0.05$) for S4 than for S1 ~~in~~ for the evaluation period (Fig. 7b). In contrast, the performance was significantly higher ($p < 0.05$) for S3 than for S1 based on median NSE_Q , $\text{NSE}_{\log Q}$ and VE_Q metrics was higher for S3 than for S1 for the calibration period and on median NSE_Q , $\text{NSE}_{\log Q}$, VE_Q and $\text{NSE}_{\text{RUNOFF}}$ metrics for the evaluation periods. ~~In addition, the runoff ratio (R_{RUNOFF}) was also higher for S3 than for S1 in the evaluation period.~~ These results suggest that simultaneously evaluating model predictions of streamflow and NO_3^- concentration improves the model's ability to reproduce streamflow, especially low flows, due to the improvement in $\text{NSE}_{\log Q}$. Compared to S1, the model's hydrological performance decreased the most for S2 and the least for S3. The hydrological metrics for S2 also had wider ranges than those for the other scenarios.

580

585

~~Including Evaluation using~~ DOC concentration with streamflow in the calibration showed lower performance for S4 than for S2, while that using NO_3^- concentration showed lower performance for S4 than for S3 (Fig. 7). These results, consistent for both calibration and evaluation periods, supported the observations (Figs. 5 and 6), which suggests that calibrating the model with each solute individually with streamflow better reproduced solute concentrations than calibrating the model with all solutes and streamflow simultaneously.

590

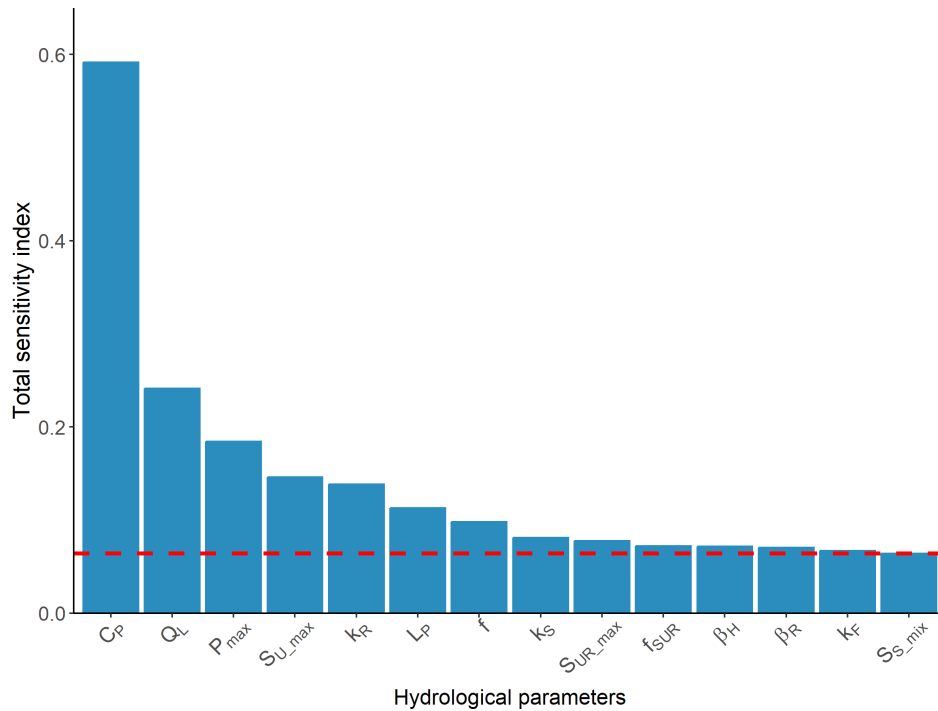


Figure 3.– Total sensitivity indices estimated using the Fourier Amplitude Sensitivity Test of the influence of hydrological parameters on predicted streamflow. The red dashed line represents the minimum total sensitivity index.

3.3. Effects on the distribution of hydrological parameters

Overall, the posterior distribution of hydrological parameters differed among the four calibration scenarios (Fig. 8), except for f_{SUR} and k_R , which were less sensitive to the calibration method (i.e. similar optimal values and distributions), indicating that they had been identified well (Fig. 8i, n). For some parameters, the distributions differed only for one scenario, such as S_{U_max} for S3 (Fig. 8a) and P_{max} for S3 (i.e. smaller values and a narrower range of uncertainties compared to other scenarios, considering both the interquartile range and the total whisker range) (Fig. 8d). The latter suggests that calibration using NO_3^- concentration strongly influenced soil parameters, decreasing percolation of water from S_U to S_S . Similarly, the distribution of S_{UR_max} for S2 differed from other scenarios and had a narrower range of uncertainties, considering both the interquartile range and the total whisker range, and had a range of uncertainties narrower than, those of other scenarios. This suggests that calibration using DOC concentration improved identification of S_{UR_max} (Fig. 8l) and that reservoir S_{UR} needs a lower capacity to reproduce both streamflow and DOC concentrations. In addition, for S4, distributions of the most influential hydrological parameters (i.e. C_P and Q_L) (Fig. 8b and 8j), as well as of groundwater parameters k_{S_and} S_{S_mix} and Q_L , differed from those of the other scenarios. Comparing distributions of the groundwater mixing volume in the slow reservoir (S_{S_mix}) for S2 and S3 showed that its size could be decreased by a factor of ca. 3 when calibrating using NO_3^- concentrations instead of DOC concentrations (Fig. 8h).

Overall, all parameters except for k_F and k_S had lower uncertainty when the model was calibrated using solute concentrations, whether simultaneously or separately (Fig. 8). More specifically, the uncertainty in β_H , f_{SUR} , β_R , S_{S_mix} and k_R decreased for S2, S3 and S4. The uncertainty in C_P , β_R and S_{UR_max} decreased for S2 and S3, while that in P_{max} and L_p decreased for S3 and S4-scenarios. The uncertainty in S_{U_max} and C_P decreased only for S2, while that in f P_{max} decreased only for S3. For deep-infiltration losses (Q_L), only calibration using DOC and NO_3^- concentrations simultaneously (S4) decreased its uncertainty compared to those for other scenarios (Fig. 8j).

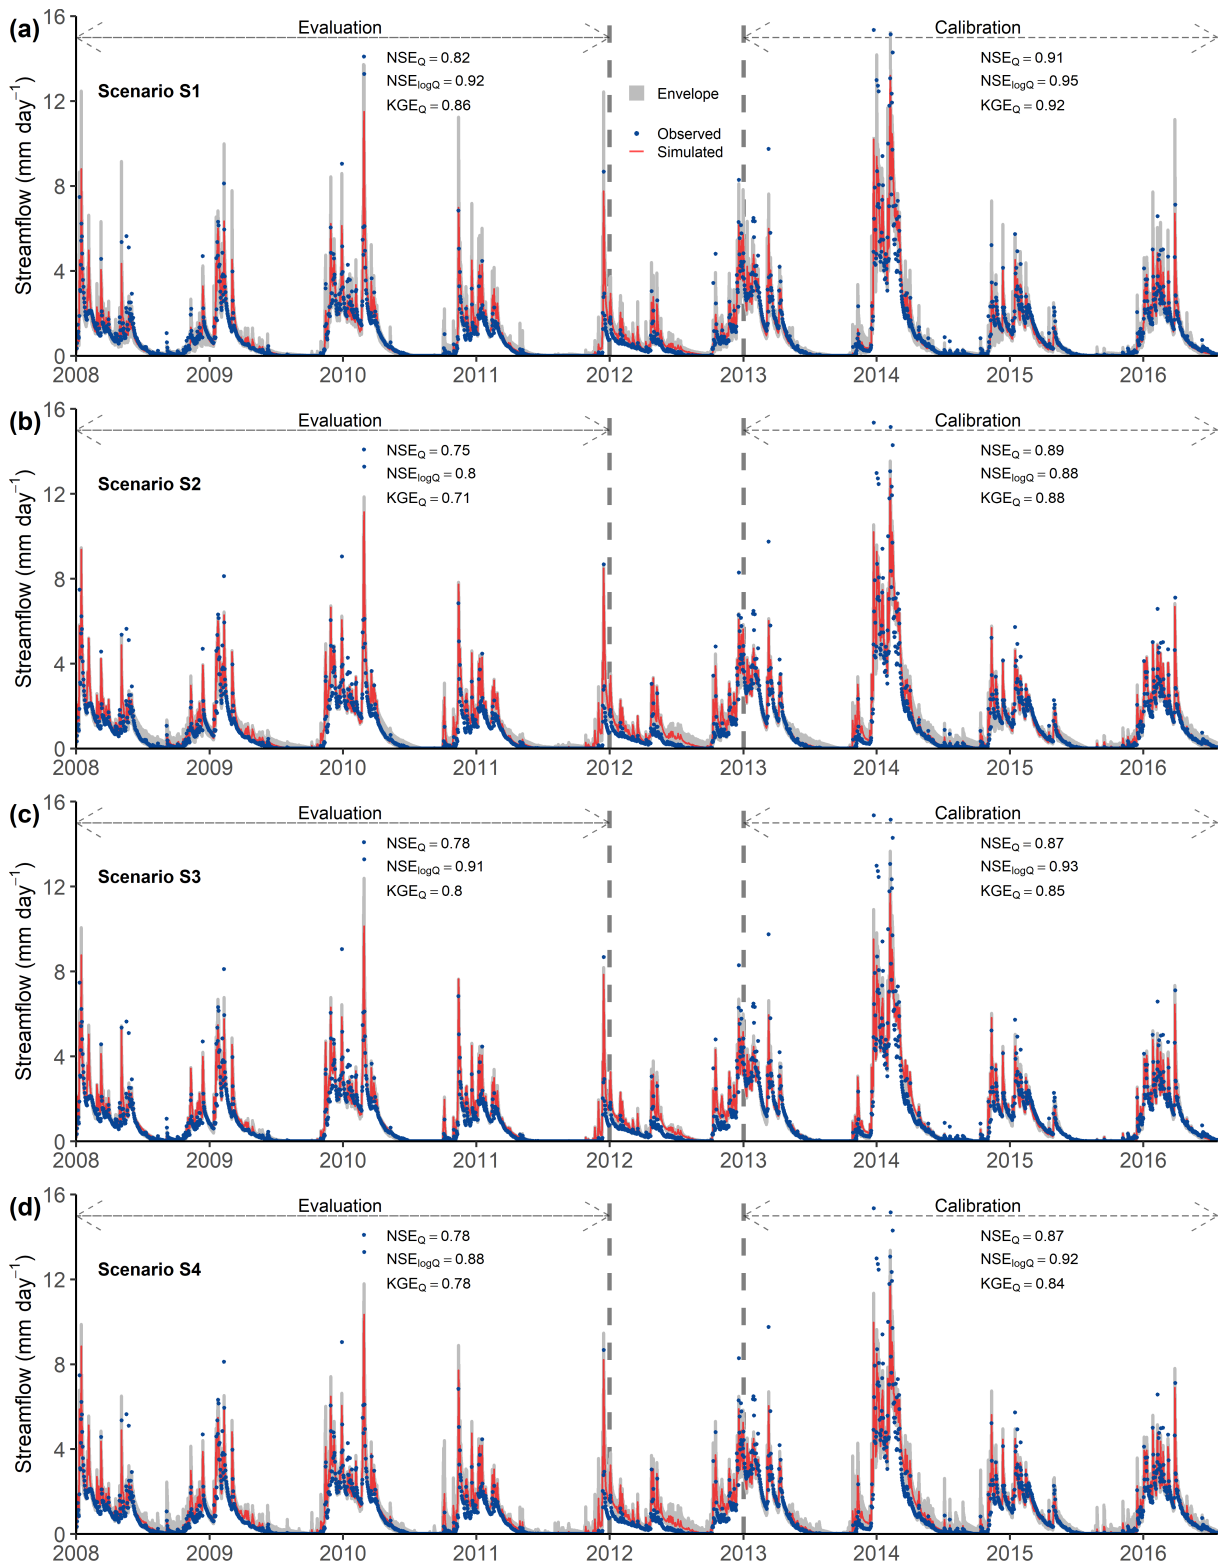


Figure 4. Observed and simulated flows for the calibration and evaluation periods according to the four scenarios: a) S1 (Hydro only), b) S2 (Hydro + dissolved organic carbon (DOC)), c) S3 (Hydro + nitrate (NO_3^-)) and d) S4 (Hydro + DOC + NO_3^-). The simulated data for each scenario correspond to the best-compromise simulated discharge of the set of optimal solutions. “Envelope” refers to the simulated discharge envelope using all parameter sets on the Pareto front. See Table 3 and Appendix C for definitions of model-performance metrics.

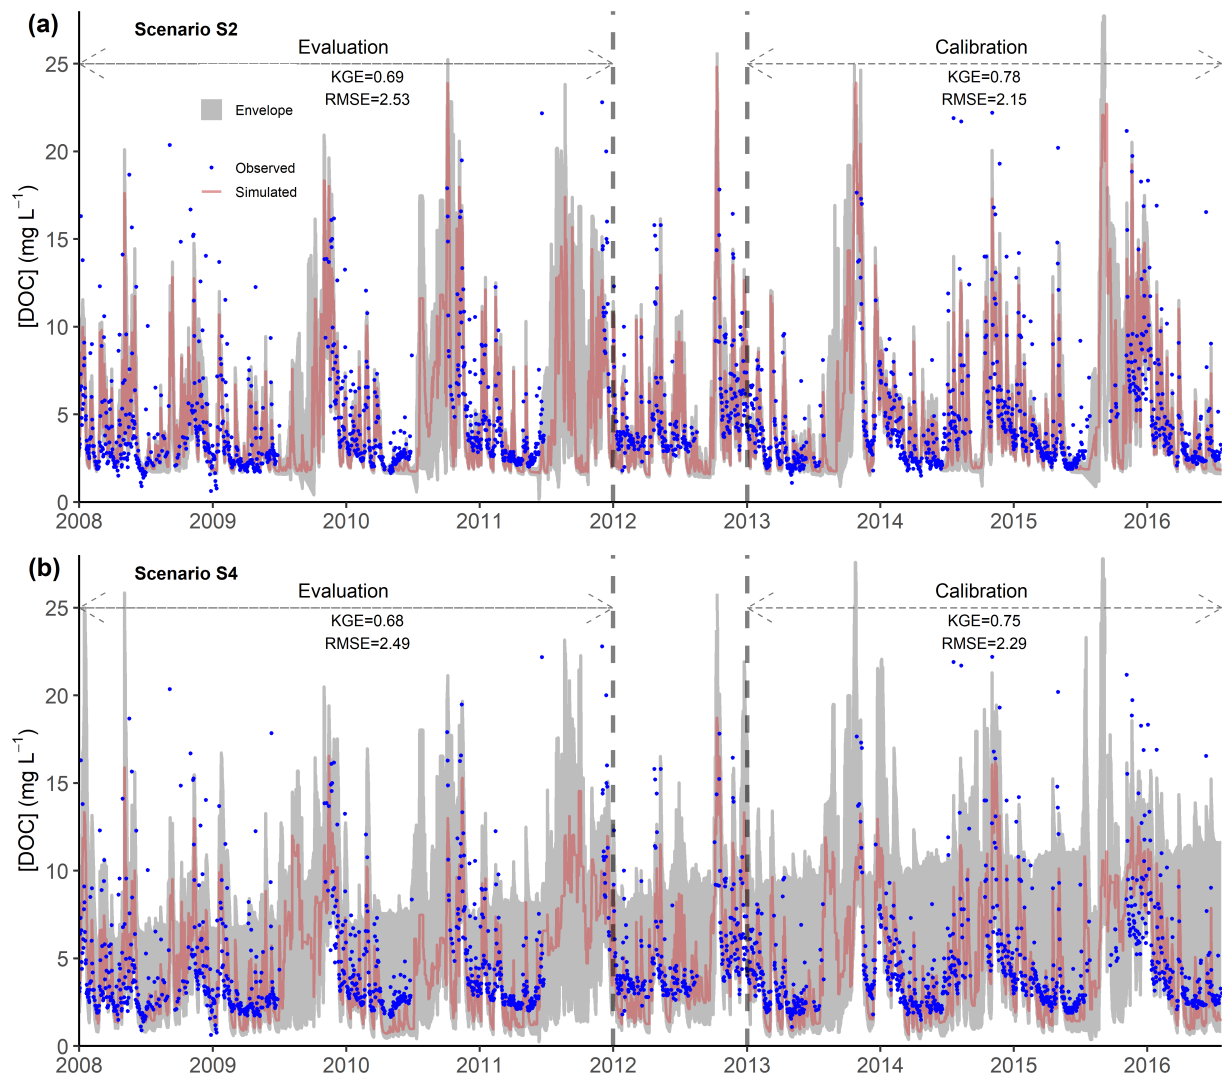


Figure 5. Observed and simulated dissolved organic carbon (DOC) concentrations for the calibration and evaluation periods according to two scenarios: a) S2 (Hydro + DOC) and b) S4 (Hydro + DOC + NO_3^-). The mean (\pm standard deviation) observed DOC concentration was 4.8 ± 3.5 and 4.5 ± 3.1 mg DOC L^{-1} for the calibration and evaluation period, respectively. The simulated data for each scenario correspond to the best-compromise simulated DOC concentration of the set of optimal solutions. “Envelope” refers to the simulated DOC concentration envelope using all parameter sets on the Pareto front. KGE: Kling–Gupta efficiency, RMSE: Root-mean-square error. See Table 3 and Appendix C for definitions of model-performance metrics.

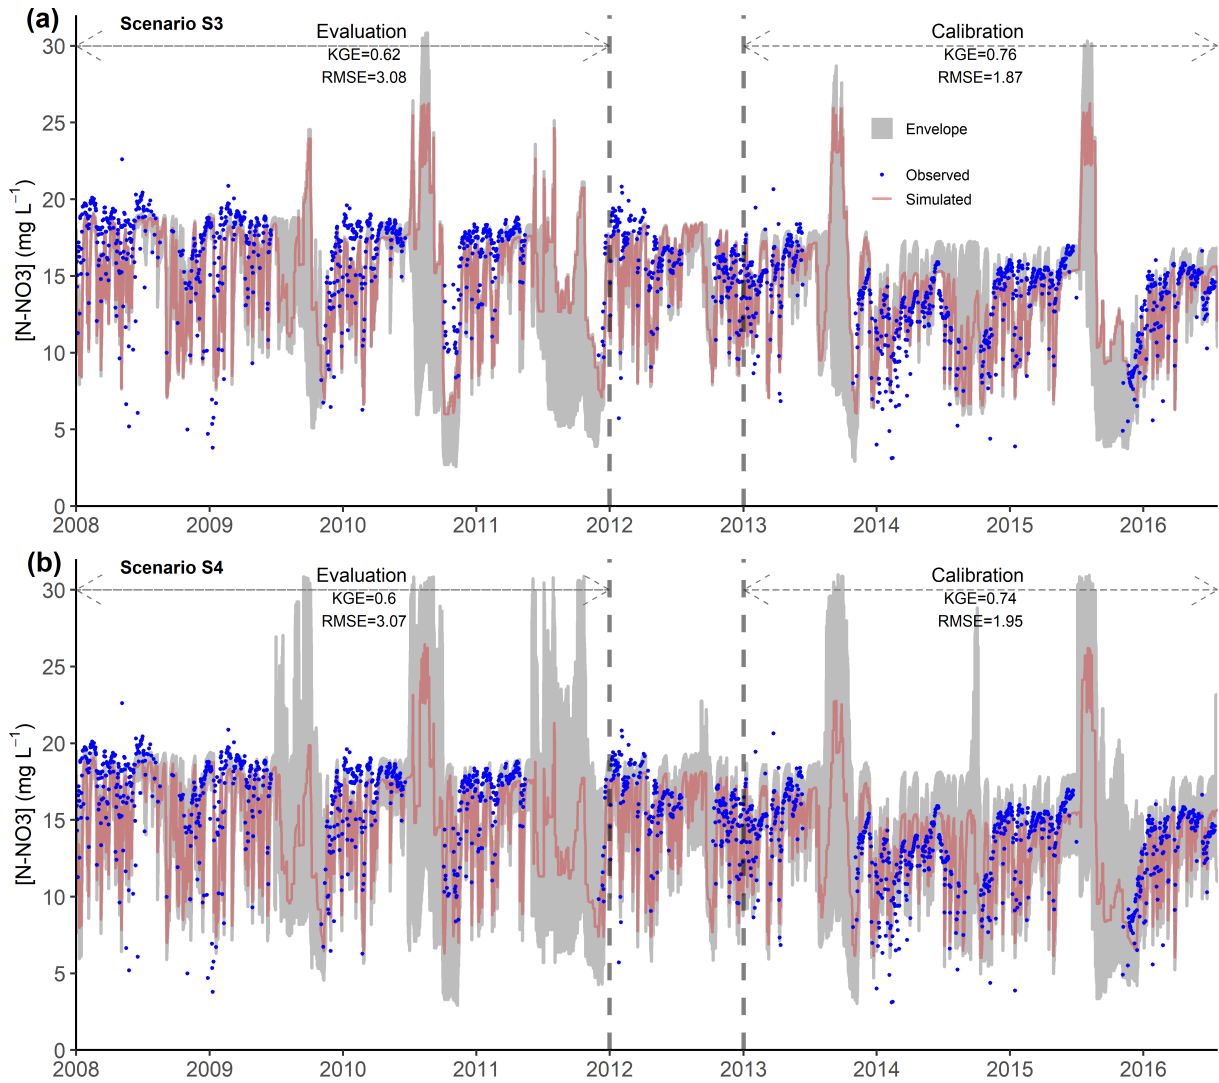


Figure 6. Observed and simulated nitrate (NO_3^-) concentrations for the calibration and evaluation periods according to two scenarios: a) S3 (Hydro + NO_3^-) and b) S4 (Hydro + DOC + NO_3^-). The mean (\pm standard deviation) observed NO_3^- concentration was 13.4 ± 2.7 and 16.6 ± 2.8 mg N- $\text{NO}_3^- \text{L}^{-1}$ for the calibration and evaluation period, respectively. The simulated data for each scenario correspond to the best-compromise simulated NO_3^- concentration of the set of optimal solutions. “Envelope” refers to the simulated NO_3^- concentration envelope using all parameter sets on the Pareto front. KGE: Kling–Gupta efficiency, RMSE: Root-mean-square error. See Table 3 and Appendix C for definitions of model-performance metrics.

645

650

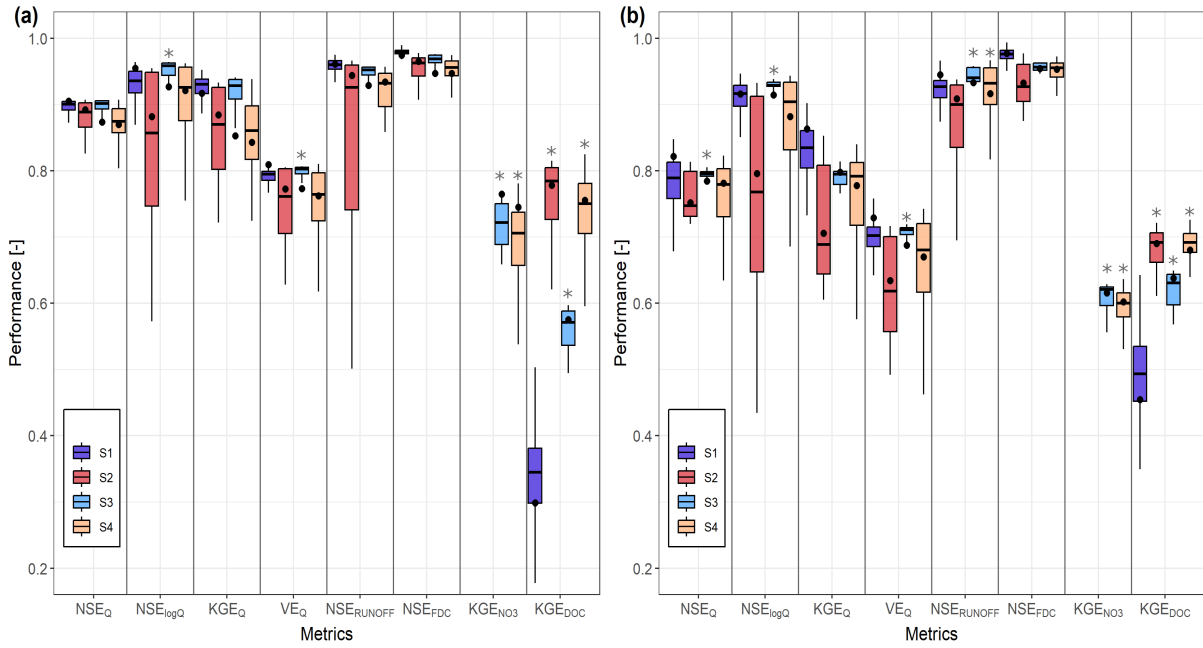


Figure 7. Boxplots of performance metrics for predictions of hydrological and solute concentration according to four scenarios: S1 (Hydro Only), S2 (Hydro + DOC), S3 (Hydro + NO_3^-) and S4 (Hydro + DOC + NO_3^-) for the a) calibration period and b) evaluation period. Whiskers represent 1.5 times the interquartile range. Black circles indicate the best-compromise solution of the Pareto front. The boxplots of KGE_{NO_3} for scenarios S1 and S2 are not shown, as their values were negative (median = -1) because the model was not calibrated to represent NO_3^- concentrations in these scenarios. An asterisk above a boxplot indicates values significantly ($p < 0.05$) larger than those for scenario S1 (one-sided Mann-Whitney test). See Table 3 and Appendix C for definitions of model-performance metrics.

655

660

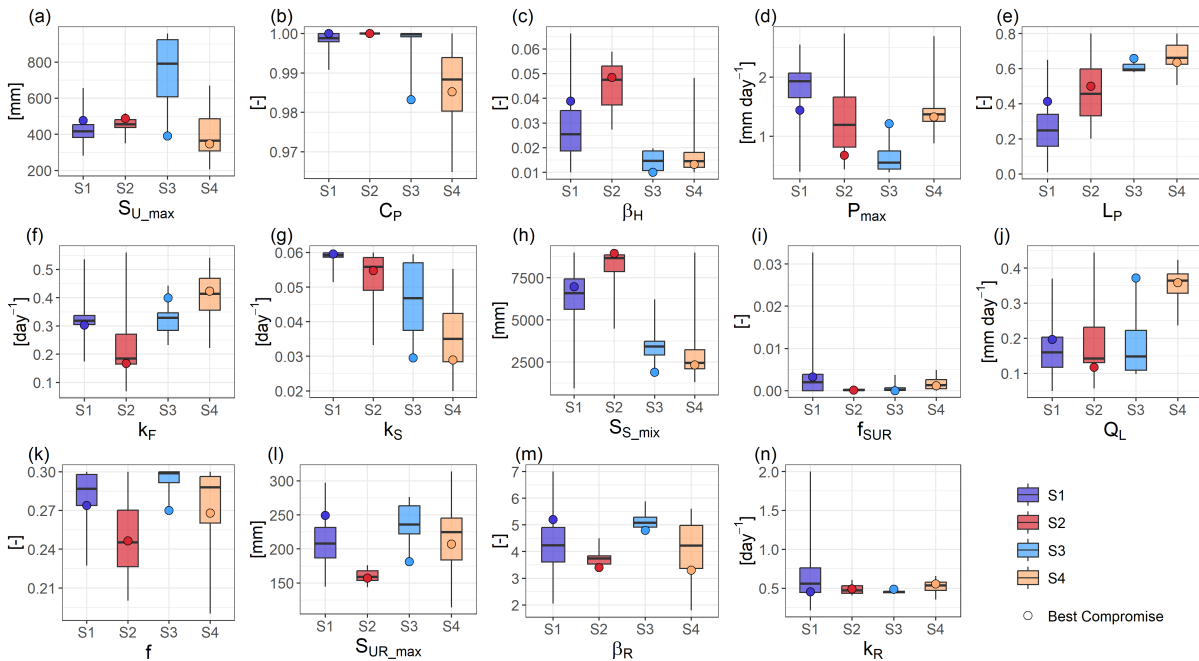


Figure 8. Posterior cumulative distribution functions Boxplots of hydrological parameters values for the four scenarios: S1 (Hydro Only), S2 (Hydro + DOC), S3 (Hydro + NO_3^-) and S4 (Hydro + DOC + NO_3^-). Whiskers represent 1.5 times the interquartile range. The circle on each curve-boxplot indicates the parameter's value in the


665

best-compromise set on the Pareto front for each scenario. ~~Numbers in the graphs show means and standard deviations of each parameter distribution for each scenario. Signs after standard deviations indicate whether the uncertainty in a parameter was lower (-) or higher (+) than that of scenario S1.~~

670 3.4. Internal model states and consistency

3.4.1. Groundwater level

The model reproduced the observed magnitude and seasonality of the groundwater level relatively well (NSE = 0.76-0.93, depending on the scenario) (Fig. 9). Low levels of water table were less accurately reproduced in 2009 and 2013. Overall, the calibration that included solute concentrations with streamflow (S2, S3 and S4) **greatly significantly** improved simulation of groundwater level compared to S1 (Fig. 9). In S1, performance metrics NSE and KGE were indeed the lowest, and PBIAS and RMSE were the highest. S3 and S4 reproduced groundwater levels (NSE = 0.92 and 0.93, respectively) better than S2, while S3 reproduced best the low groundwater levels in 2009, 2011 and 2013. However, for S3 and S4, the model tended to slightly overestimate the low groundwater levels in 2010 and 2015. Globally Overall, the model reproduced the observed magnitude and seasonality of the groundwater level relatively well (NSE = 0.76-0.93, depending on the scenario). Low groundwater levels of water table were less accurately reproduced less accurately in 2009 and 2012. In PBIAS values were negative for all scenarios, indicating that the a tendency of the model tended to underestimate groundwater level.

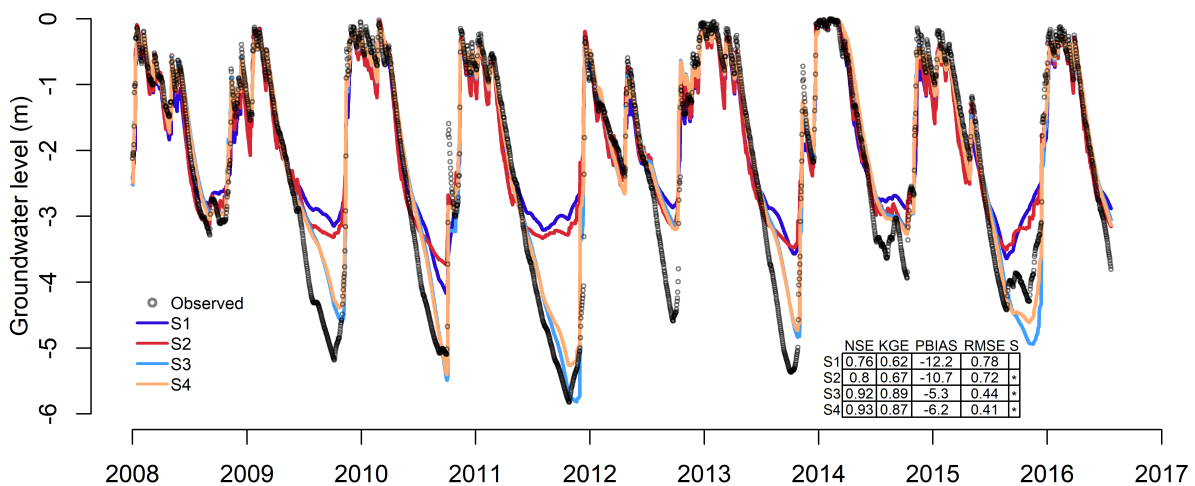


685 **Figure 9.** Observed and simulated groundwater levels for the four scenarios: S1 (Hydro Only), S2 (Hydro + DOC), S3 (Hydro + NO₃⁻) and S4 (Hydro + DOC + NO₃⁻). NSE: Nash–Sutcliffe model efficiency coefficient, KGE: Kling–Gupta efficiency, PBIAS = Percent bias, RMSE: Root-mean-square error. **S: Significance level. An asterisk in the significance level column indicates values that differed significantly ($p < 0.05$) from those for scenario S1 (two-sided Mann-Whitney test). See Appendix C for definitions of the performance metrics.**

3.4.2. Soil moisture

695 The model reproduced major features of the observed dynamics of normalized soil moisture at PG2 (i.e. the riparian zone) (NSE = 0.58-0.79, depending on the scenario) (Fig. 10a). It also reproduced well drying rates at the

end of the summer and wetting rates overall well. However, the model tended to slightly underestimate soil moisture except in summer 2015 and winter 2016, respectively, when it tended to underestimate soil moisture. Overall, evaluating-calibrating the model with streamflow and solute concentrations simultaneously did not improve simulation of soil moisture dynamics in the riparian zone compared to S1 (Fig. 10a). The calibration that included DOC concentrations with streamflow (S2) had significantly lower performance to reproduce normalized soil moisture at PG2 (NSE = 0.58 and KGE = 0.74) compared to S1. The model reproduced observed soil moisture better when it was calibrated using DOC and NO_3^- simultaneously (S4, with NSE = 0.73 and KGE = 0.78) than when using only one solute (S2 or S3, with NSE = 0.58 and 0.69, respectively, and KGE = 0.74 and 0.75, respectively). The model reproduced major features of the observed dynamics of normalized soil moisture at PG2 (i.e. the riparian zone) (NSE = 0.58-0.79, depending on the scenario). It also reproduced drying rates at the end of the summer and wetting rates well overall-well. However, the model tended to slightly underestimate soil moisture in summer 2015 and winter 2016. PBIAS values were negative for all scenarios, indicating that the model tended to underestimate normalized soil moisture at PG2.

Only The model reproduced the observed dynamics of normalized soil moisture at Toullo (i.e. the upslope zone) (NSE = 0.79-0.92, depending on the scenario) (Fig. 1110b). S2 reproduced soil moisture in the upslope zone significantly better than S1 did (NSE = 0.94 and 0.92, respectively) (Fig. 10b). For S3 and S4, the model did not reproduce the wetting rate well at the beginning of 2017, when it overestimated soil moisture. S3 and S4 had significantly lower performance than S1 did. Overall, the model reproduced the observed dynamics of normalized soil moisture at Toullo (i.e. the upslope zone) (NSE = 0.79-0.924, depending on the scenario).

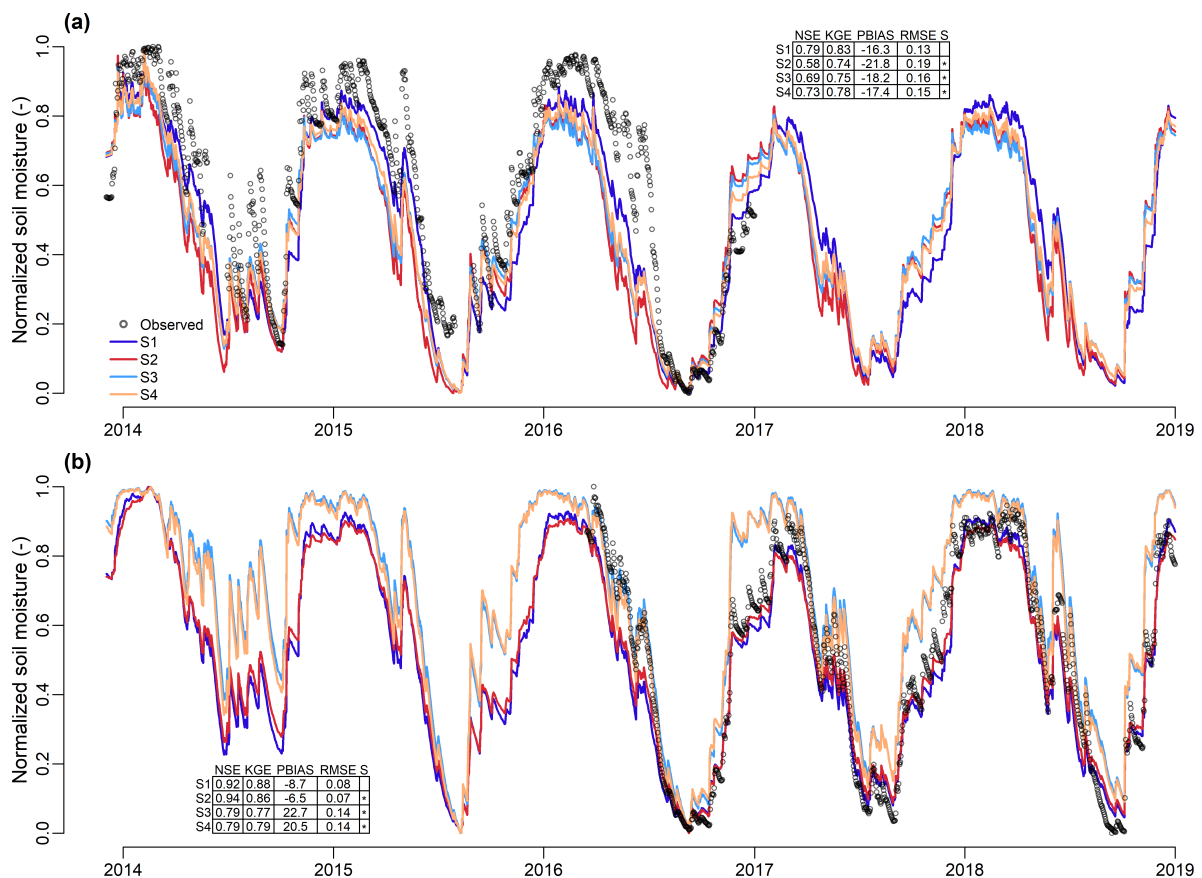

S2 reproduced soil moisture in the upslope zone better than S1 did (NSE = 0.94 and 0.92, respectively). **Figure 10. a) Normalized observed (point PG2) and simulated soil moisture in the S_{UR} reservoir and for the for scenarios:**

S1 (Hydro Only), S2 (Hydro + DOC), S3 (Hydro + NO₃⁻), S4 (Hydro + DOC + NO₃⁻). b) Normalized NSE: Nash-Sutcliffe model efficiency coefficient, KGE: Kling-Gupta efficiency, PBIAS = Percent bias, RMSE: Root-mean-square error.

Figure 11. Observed (Toulo point) and simulated normalized soil moisture in the S_U reservoir storage for four calibration scenarios: S1 (Hydro Only), S2 (Hydro + DOC), S3 (Hydro + NO₃⁻) and S4 (Hydro + DOC + NO₃⁻). NSE: Nash-Sutcliffe model efficiency coefficient, KGE: Kling-Gupta efficiency, PBIAS = Percent bias, RMSE: Root-mean-square error. NSE: Nash-Sutcliffe model efficiency coefficient, KGE: Kling-Gupta efficiency, PBIAS = Percent bias, RMSE: Root-mean-square error. S: Significance level. An asterisk in the significance level column indicates values that differed significantly ($p < 0.05$) from those for scenario S1 (two-sided Mann-Whitney test). See Appendix C for definitions of the performance metrics.

3.5. Water balances

Calibrating the model with DOC and NO₃⁻ concentrations along with streamflow data influenced water-balance components and changed the storage in reservoirs S_U, S_S and S_{UR}. Median simulated total evaporative flux-flow (E_U and E_{UR}) was highest for S1 (470 mm yr⁻¹) and lowest for S4 (372 mm yr⁻¹) (Fig. 12a11a). Median deep-infiltration losses (Q_L) were highest for S4 (128 mm yr⁻¹) and lowest for S1-S3 (57-54 mm yr⁻¹). The median contribution of S_R to discharge (Q_R) was slightly but significantly ($p < 0.05$) higher for S3 and S4 (108 and 109 mm yr⁻¹, respectively) than for S1 (100 mm yr⁻¹), with a significant difference ($p < 0.05$). The median contribution of S_S to discharge (Q_S) was significantly higher for S2 (293 mm yr⁻¹) than for S1 (242 mm yr⁻¹). S_S and S_{UR} stored water during the simulation, while S_U lost water. S_S tended store significantly more water for S4 (2.7 mm yr⁻¹) than it did for S1 (1.2 mm yr⁻¹) (Fig. 11b). S_U lost significantly more water for S3 (-21 mm yr⁻¹) than for S1 (-12 mm yr⁻¹) and lost the least for S4 (-10.6 mm yr⁻¹).

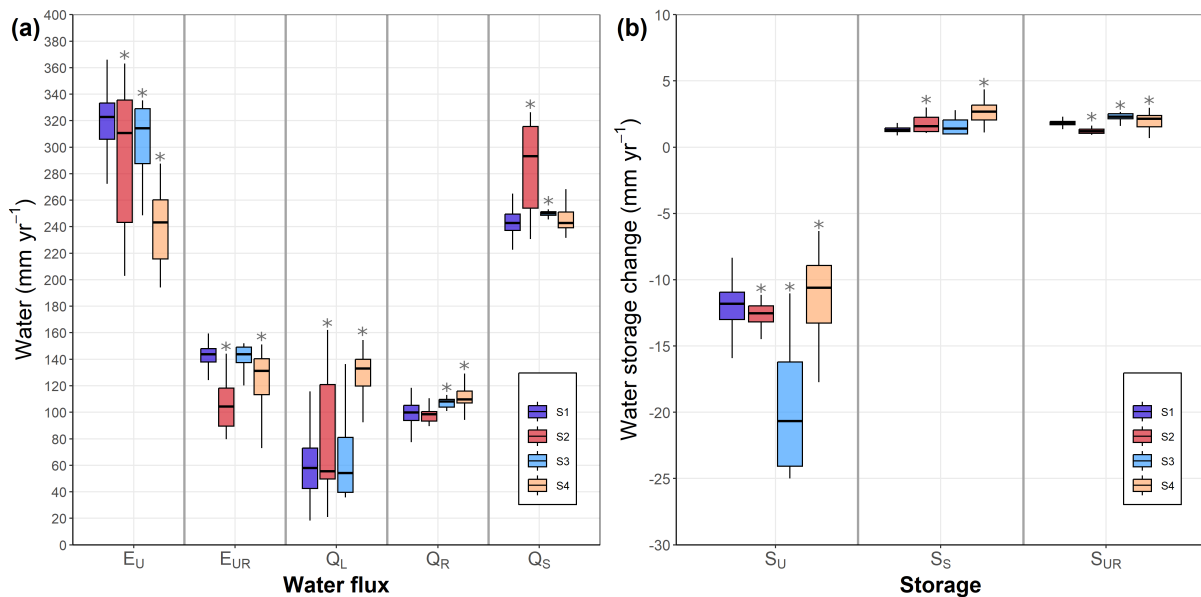


Figure 112. a) Boxplots of simulated annual water budgets for all Pareto fronts of each scenario (S1-S4) during the calibration and evaluation periods combined (1 Aug 2008-1 Sep 2016). Boxplots of changes in simulated storage of the main reservoirs of the model for all Pareto fronts of each scenario during the period. Whiskers represent 1.5 times the interquartile range. An asterisk above a boxplot indicates values that differed significantly ($p < 0.05$) from those for scenario S1 (two-sided Mann-Whitney test).

4. Discussion

4.1. Effect on streamflow, groundwater and soil moisture

The parsimonious solute-transport model reasonably reproduced simultaneously the dynamics of discharge, DOC and NO_3^- concentrations in the stream of the Kervidy-Naizin catchment for all scenarios. Model predictions based on independent data indicated that the model generally reproduced the dynamics of groundwater level and soil moisture in upslope and riparian zones for all scenarios.

Including solute (DOC and NO_3^-) data along with streamflow data in a multi-objective calibration strategy improved the representation of groundwater storage and soil moisture in the upslope zone (Figs. 9 and 10b).

The improvement in the representation of groundwater level was significant and relatively large for scenarios S2, S3 and S4 compared to S1 (Fig. 9). In contrast, the improvement in the representation of soil moisture in the upslope zone was significant but relatively small, only for scenario S2 compared to S1 (Fig. 10b). Thus, only scenario S2 improves the representation of both groundwater and soil moisture in the upslope zone.

Studies have shown that using additional information to constrain hydrological models usually improves spatial and/or temporal patterns of internal state variables and ~~fluxes-flows~~ but does not necessarily improve the accuracy of predicted runoff (López López et al., 2017; Tong et al., 2021). Woodward et al. (2013b) developed a catchment simulation model that predicted streamflow and water chemistry by connecting a model of soil water balance to two groundwater reservoirs. They found that calibrating the model using daily streamflow and monthly NO_3^- data simultaneously from a small lowland milk-production-oriented catchment improved hydrological understanding and estimated catchment NO_3^- ~~fluxes-flows~~ relatively well. In particular, they were able to infer daily contributions of near-surface water, fast shallow groundwater, and slower, deeper groundwater to water and NO_3^- discharge. However, including NO_3^- data in the calibration overpredicted low flows compared to ~~calibrating-calibration~~ using streamflow data alone. Yen et al. (2014) used regional estimates of annual denitrification mass and the percentage of NO_3^- load at the catchment outlet that had come from groundwater as soft data to constrain water-flow partitioning, which yielded realistic internal catchment behaviour but decreased the accuracy of predicted streamflow. In ~~the this present~~ study, when considering only the best-compromise model for each scenario, the use of solute data improved the representation of groundwater storage (S2, S3 and S4, Fig. 9) and soil moisture in the upslope zone (S2, Fig. 10b), internal consistency but slightly decreased the accuracy of predicted streamflow in both calibration and evaluation periods (Fig. 4). In contrast, considering all hydrological signatures for discharge obtained from the envelope, S3 improved the model's ability to reproduce streamflow characteristics, especially low flows (Fig. 7) and groundwater level (Fig. 9).

We included solutes (DOC and NO_3^-) that have opposite dynamics and whose conceptual models had been successfully tested in the literature (Birkel et al., 2014; Fovet et al., 2015b), with the aim of adding useful constraints to the hydrological modelling. However, none of the scenarios that included DOC and/or NO_3^- improved both the model's representation of streamflow dynamics and internal consistency in representing groundwater level and soil moisture in the riparian and upslope zones. Given the limits of this study, it remains

uncertain whether including solutes with streamflow in calibration improved only the representation of hydrological states and flows of specific reservoirs or also improved the model's overall internal consistency. The first limit came from comparing point-scale in-situ observations to simulated soil moisture and groundwater levels that represented catchment-scale storage, as these observations may not have represented the actual dynamics of groundwater and soil storages. Furthermore, although the dynamics of DOC and NO_3^- concentrations in the stream were represented well, the conceptualization of biogeochemical processes and transport of these solutes may still remain too simple to represent internal state variables and flows of solutes. The model represents the hydrological and biogeochemical processes that are assumed to dominate, and these assumptions are limited by our incomplete knowledge. In addition, the representation of reactive solutes increases the number of parameters and the complexity of the model. Consequently, it would be interesting to compare this approach to the use of non-reactive solutes in calibration, such as natural tracers that are assumed to be conservative, including chloride (Cl^-) and stable isotopes of water (^{18}O and ^2H) (Kirchner et al., 2010), to assess whether the model can reproduce the dynamics of both the soil moisture and groundwater better (Kirchner et al., 2010).

The factors that improve internal hydrological consistency when solute data are included are not well understood. Streamflow aggregates information from many catchment-scale processes, but this information is too ambiguous to determine the exact catchment configuration (Kuppel et al., 2018b) or flow pathways that produced the observed signal (Woodward et al., 2017). This is because streamflow aggregates downstream along a convergent network towards a single outlet, but the divergent nature of an upstream network makes it impossible to uniquely backtrack the locations where the flow was generated (Kirchner et al., 2001). Thus, streamflow can be simulated well with many alternative model parameterizations, whether or not they are physically consistent (Kirchner, 2006). Results of the present study thus suggest that if streamflow alone is used for calibration, the model predicts discharge correctly for the wrong reason, as the internal consistency is not guaranteed, especially the representation of groundwater level, is not guaranteed. The model thus simulates water pathways and storage dynamics that do not represent those in the actual catchment. Consequently, it appears that the hydrological behaviour of the catchment required to reproduce the observed DOC and NO_3^- concentrations in the stream is different from that required to reproduce only the observed discharge. This hypothesis is supported by the fact that the calibration scenarios influenced the main components of the water balance differently. For example, S3 yielded better internal consistency representation of the groundwater reservoir, with good reproduction of the groundwater level (Fig. 9), but lower evapotranspiration and higher water loss from the S_U reservoir than S1 (Fig. 12). In comparison, S2 yielded better simulation representation of upslope soil water storage (Fig. 11b) and a higher contribution of S_S to discharge than S1 (Fig. 12). The large amount of information in the solute time series thus constrained internal storage components reservoirs and water fluxes-flows more than a streamflow-only approach, which increased internal consistency of the hydrological model. This occurs because a hydrological model needs to represent only an input-output response, whereas when biogeochemistry is included, move together (Knapp et al., 2020) a model needs to represent both residence-time distributions and biogeochemical processing to reproduce the observed stream water concentrations (Medici et al., 2012) and the decrease in solute-input signals. The use of solute time series, which mitigates the equifinality problem, thus excluded infeasible model configurations that would have also yielded high performance (Dimitrova-Petrova et al., 2020; Kuppel et al., 2018b; Yen et al., 2014).

An additional step is needed to understand the benefits of including solute data for internal hydrological consistency by analysing effects of including DOC and NO_3^- concentration data on the storage dynamics (state and

~~fluxesflows~~) of model components ~~and hydrological processes and pathways~~. For example, the simulations showed that including NO_3^- data decreased k_S and S_{S_mix} (Fig. 8g and 8h), suggesting that simulations of NO_3^- dynamics were optimized at a lower groundwater mixing volume and lower flow rate in S_S . However, it is important to go further to understand why including NO_3^- concentration data improved simulation of groundwater level (Fig. 9) and low flow (Fig. 7). In this landscape, most of the NO_3^- leached from the unsaturated reservoir accumulates in the shallow groundwater (Aubert et al., 2013; Strohmenger et al., 2020). The groundwater, with a legacy mass storage of NO_3^- (Basu et al., 2010; Molenat et al., 2008), thus contributes water to the stream that sustains the base flow and export of NO_3^- (Aubert et al., 2013; Molenat et al., 2008). Given these characteristics, good reproduction of NO_3^- concentrations and ~~fluxes-flows~~ in the stream, supplied mainly by groundwater, can be assumed to constrain the model sufficiently to yield good reproduction of water ~~fluxes-flows~~ from the groundwater to the stream and thus good representation of groundwater level.

4.2. Effects on parameter uncertainties

Using a parsimonious hydro-chemical model without explicit biogeochemical processes, Strohmenger et al. (2021) found that overall parameter uncertainties were higher when calibrating using solute data (DOC, NO_3^-) along with streamflow data than when calibrating using streamflow data alone. They assumed that DOC and NO_3^- sources behave as infinite pools with a fixed concentration in each reservoir contributing to the stream. The modelling approach in the present study was relatively similar, but explicitly represented biochemical processes related to DOC and NO_3^- . ~~This approach resulted in decreased parameter uncertainty~~ ~~Parameter uncertainty decreased~~ when solute concentrations were included in calibration, except for storage coefficients of the fast (k_F) and slow reservoirs (k_S) (Fig. 8). Comparing the results of these two studies suggests that the infinite-solute-pool assumption is sufficient to reproduce annual and storm-event dynamics of discharge and DOC and NO_3^- concentrations in the stream, but is insufficient ~~in calibration to constrain the model to adequately reproduce water storage dynamics and flow paths and to reduce~~ ~~improve the internal consistency or constrain the model to reduce~~ uncertainties in hydrological parameters. In the infinite-solute-pool assumption, hydrological parameters are indeed less sensitive to solute concentrations than they are in models that explicitly represent biogeochemical processes and dynamic solute concentrations in reservoirs. Notably, the results of this study highlight that S4, which considered all constraints (i.e. streamflow and DOC and NO_3^- concentrations), greatly influenced the distributions of the most influential hydrological parameters, specifically Q_L and C_P , whose values were among the highest or lowest or highest, respectively (Fig. 8b and 8j), and reproduced groundwater levels the best (Fig. 9). This highlights the importance of parameters Q_L and C_P , which determine inter-catchment groundwater flows and the recharge from S_U to S_S and S_{UR} to S_R , respectively, in ensuring that the model reproduced the observed groundwater dynamics. ~~Based on~~ ~~these results, for the model to best reproduce the dynamics of streamflow, concentrations (DOC, NO_3^-) and groundwater, recharge should be decreased and inter-catchment groundwater flow should be increased to ca. 0.35 mm day⁻¹ (best-compromise parameter value for S4, Fig. 8j). This value is consistent with those found in modelling studies of a similar physiographic headwater catchment in Brittany (Fovet et al., 2015a; Hrachowitz et al., 2014).~~

~~The~~ The model conceptualizes biogeochemical processes for DOC and NO_3^- in a relatively simple way, but has reduced the uncertainties of the parameters. An additional step in future studies will be to analyse whether more complex representation of biogeochemical processes in the model can further reduce uncertainties in hydrological parameters.

870 Results of the present study are consistent with those of other studies, in which inclusion of additional variables in multiple-objective calibration generally reduced parameter uncertainty (Tong et al., 2021). For example, Yen et al. (2014) found that including data related to water quality yielded lower parameter uncertainties than calibration using streamflow alone, especially for hydrological parameters that strongly influence denitrification. ~~Other studies that included additional data in multi-variable calibration found that it reduced parameter uncertainties. For example,~~ Silvestro et al. (2015) demonstrated that the equifinality of soil parameters was reduced by including satellite-derived soil moisture when calibrating a process-based, spatially distributed hydrological model. 875 Similarly, Rajib et al. (2016) found that including satellite-derived soil moisture, especially that in the rooting zone, reduced parameter uncertainties, particularly for parameters related to subsurface hydrological processes.

4.3. Comparability of point-scale *in-situ* measurements to catchment-scale storage

A remaining issue is the limited comparability of point-scale *in-situ* measurements and simulated soil moisture 880 and groundwater level to catchment-scale storage. In-situ volumetric soil moisture was calculated as the mean of several TDR probes, which reduces uncertainty at the point scale, but upscaling these point measurements to a reservoir that represents a hillslope or riparian zone is associated with uncertainties. Consequently, we considered normalized soil moisture as a proxy for dynamics of unsaturated storage in hillslope and riparian zones. Similarly, we used the daily mean normalized water level at point PG5 as a proxy for groundwater storage dynamics. An 885 additional step in future studies will be to determine how point measurements can be upscaled to areal mean point scale soil moisture and groundwater measurements compatible with catchment-scale storage. A complementary approach is to include other promising methods, such as remote sensing, to estimate the spatial distribution of storage in catchments, especially of soil moisture (Duethmann et al., 2022; Tong et al., 2021). The high spatial resolution, worldwide spatial coverage and increasing availability of remotely sensed data may provide ample 890 opportunities to further constrain hydrological models and their parameters (Bouaziz et al., 2021; Duethmann et al., 2022; Gomis-Cebolla et al., 2022; Nijzink et al., 2018; Tong et al., 2021). Recent soil moisture data from satellite-derived soil-moisture products (e.g. SMAPL3E, SCATSAR, ASCAT DIREX SWI) with high spatial and temporal resolutions (e.g. 0.5-9.0 km and 1-3 days, respectively) (Duethmann et al., 2022) would help constrain the model of the Kervidy-Naizin catchment. Other promising methods include cosmic-ray neutron-sensor probes 895 to estimate dynamics of near-surface soil water storage (Dimitrova-Petrova et al., 2020) and geodesy and geophysical methods (Fovet et al., 2015a). Additional data can be used to assess the internal representation of evapotranspiration, which has a wide spatial and temporal distribution at the catchment scale, to provide more confidence in simulation of the partitioning of water between soil storage and groundwater recharge (Moazen-zadeh and Izady, 2022). For example, using spatially and temporally gridded remotely sensed evapotranspiration data to 900 calibrate the Soil and Water Assessment Tool (SWAT) hydrological model decreased the equifinality of the calibrated parameters compared to calibration using only streamflow data (Shah et al., 2021). These results demonstrate the benefit of using increasingly available open-access remotely sensed evapotranspiration data to improve calibration of hydrological models. These methods provide a spatially aggregated overview of catchment water content and go beyond traditional methods of direct storage observations at the point scale that are limited 905 to a single reservoir (Dimitrova-Petrova et al., 2020).

4.4. Implications

This study's results indicate that solute data are important for improving the internal consistency of hydrological models, which can help guide collection of field data and modelling (Stadnyk and Holmes, 2023). When collecting

field data for model calibration, it may be important to collect solute data along with streamflow data. These data
910 can then be used in a hydrological model to which simple representations of biogeochemical processes are added
to improve the representation of internal behaviour of the catchment by calibrating streamflow and solutes
simultaneously. The type of solute measured is also important, as calibration using NO_3^- improved the internal
consistency of the groundwater reservoir, while that using DOC improved the internal consistency of soil water
storage in the upslope zone. With the increasing availability of solute data from catchment monitoring, this
915 approach provides an objective way to improve representation of complex hydrological systems when information
about their internal functioning is insufficient. A catchment model that represents observed behaviour of the system
more accurately can then be used with confidence when assessing scenarios, such as those of nutrient remediation
or climate change. If the internal behaviour of the hydrological system is not represented correctly, predicting
streamflow acceptably is pointless and perhaps counter-productive, leading to erroneous conclusions and potential
920 mismanagement of catchment resources. For example, Yen et al. (2014) showed that a lack of constraints to
realistically represent the internal functioning of a catchment can lead to misleading assessments of pollution-
control scenarios, even when typical streamflow performance criteria are satisfied.

The ability to apply this modelling approach to other catchments with different physiography will depend on the
model's ability to represent dominant sources and pathways of DOC and NO_3^- concentrations, that differ from
925 those of the Kervidy-Naizin. To address this question, we analysed the response of streamwater chemistry to
changes in discharge observed in this catchment and how the model represents it. Changes in solute concentrations
as a function of discharge, (i.e., concentration-discharge (CQ) relationships) (Appendix B) provides insight
into how catchments store and release water and solutes, and can therefore be considered a "fingerprint" of
catchment transport, mixing, and reaction processes (Godsey et al., 2009; Knapp et al., 2020). Long-term seasonal
930 CQ slopes for NO_3^- in Kervidy-Naizin generally indicated a chemostatic NO_3^- export regime (Fig. B1a). Indeed,
this pattern often emerges in catchments with a spatially uniform distribution of abundant solute sources, such as
 NO_3^- nitrate in agricultural areas, which leading to a relatively constant release of solutes to the stream network
(Bieroza et al., 2018). In contrast, in the winter for of a number of few years (2010, 2012, and 2014), the CQ slope
indicates instead a slightly more chemodynamic export regime with a dilution pattern. Long-term seasonal CQ
935 slopes for DOC indicate a chemodynamic export regime with an accretion pattern that changes to a chemostatic
export regime in autumn (Fig. B1b). The model reproduceds the differing export regime of each solute from 2008-
2016 relatively well (Fig. B1). Model performance was slightly lower for DOC (RMSE = 0.13-0.27) than for the
 NO_3^- (RMSE = 0.08 and 0.21). For a few years, the model did not represent the export regime accurately. The
export regime for NO_3^- observed in winter 2008 and 2009 was chemostatic, but the model simulated a
940 chemodynamic export regime with a dilution pattern. The export regime for DOC observed in autumn (2011 and
2014) and in summer (2012 and 2014) was an chemostatic export regime, but the model simulated a more
chemodynamic export regime with an accretion pattern. As the model simulated the hydrological dynamics
relatively well during these periods (Fig. 4), it was likely overpredictingshould produce too much DOC. Analysis
of the CQ relationships observed and simulated at in Kervidy-Naizin showshighlighted two important points:-
945 (i) First, each solute in this catchment did not have a single pattern but instead seasonal and interannual differences
in seasonal export regimes and (ii) Second, the parsimonious solute-transport model was able to reproduce
different export regimes. Thus, this modelling approach may be applicable, in particular due to its flexible
structure, to headwater catchments whose characteristics and export regimes differ fromof those of the Kervidy-
Naizin. Applyingieations the model to catchments whose streams can be intermittent would first require to solvinge
950 the methodological issue of high NO_3^- nitrate concentrations in summer, when there are no observations data are

955 available, to prevent ~~simulating~~ overpredicting concentrations and risk overestimating NO_3^- ~~nitrate~~ fluxes/flows in
summer. The model can also be adapted to represent catchments whose hydrological and biochemical patterns
differ from those of the Kervidy-Naizin, where most DOC accumulates in the soils of the riparian zone and ~~the~~
 NO_3^- accumulates in the groundwater. For example, the reservoirs in which DOC is produced or lost can be
modified easily. In addition, more complex models of biogeochemical processes ~~could~~ also be considered. While
we represented heterotrophic denitrification as a constant, ~~but more~~ dynamic equations (Heinen, 2006) could easily
be incorporated to represent the seasonality of this process.

960

965

970

975

980

985

990

5. Conclusion

The model reasonably reproduced the dynamics of discharge and ~~solute~~ (DOC and NO_3^-) concentrations in the
stream of the headwater catchment ~~simultaneously~~ for all scenarios. Model predictions based on independent
data ~~sets~~ indicated that the model generally reproduced the dynamics of groundwater level and soil moisture in
upslope and riparian ~~are~~ zones for all scenarios. Given the performance of the best-compromise model for each
calibration scenario, the results of this study tend to reject the first hypothesis, ~~that using daily stream DOC and~~
 NO_3^- concentrations along with streamflow data to calibrate a parsimonious conceptual model improves the
model's ability to predict streamflow, as ~~doing so using~~ daily stream DOC and NO_3^- concentrations along with
streamflow data to calibrate the ~~parsimonious conceptual model~~ did not improve the model's performance for
simulated streamflow ~~in~~ for the calibration or evaluation period ~~compared to calibration with streamflow alone~~. In
contrast, considering all hydrological signatures for discharge obtained from the envelope, the scenario that
included NO_3^- along with streamflow improved the model's ability to reproduce streamflow, especially low flows.
For the second hypothesis, ~~including solute (DOC and NO_3^-) data along with streamflow data in a multi-objective~~
calibration strategy significantly improved the representation of groundwater storage and soil moisture in the
upslope zone. The improvement in the representation of groundwater level ~~is~~ was significant and relatively large
for all scenarios ~~when using one or both~~ with solutes along with streamflow for calibration compared to using only
streamflow. In contrast, the improvement in the representation of soil moisture in the upslope zone ~~is~~ was
significant but relatively small, only ~~when using~~ DOC concentration along with streamflow ~~used~~ for calibration
compared to using only streamflow. None of the scenarios that included solutes improved both the model's
representation of streamflow dynamics and internal consistency in representing ~~both~~ groundwater level and soil

~~moisture in the riparian and upslope zones. Based on these results, it remains uncertain whether including solutes with streamflow in calibration improved only the representation of hydrological states and flows of specific reservoirs or also improved the model's overall internal hydrological consistency. concerning the improvement of the internal consistency of the model, appeared to be supported for the simulation of groundwater and upslope soil storage, but not for riparian soil storage.~~ For the third hypothesis, explicitly modelling biochemical processes for DOC and NO_3^- reduced the uncertainty in hydrological parameters, except the storage coefficients of the fast and slow reservoirs, compared to an approach in which sources of DOC and NO_3^- were treated as infinite pools with fixed concentrations. The simultaneous inclusion of daily in-stream DOC and NO_3^- concentrations ~~in a parsimonious conceptual model in a multi-objective and multi-variable~~ the calibration ~~and evaluation~~ strategy influenced the distribution of the most influential hydrological parameters of the model. Differences among the calibration scenarios also influenced the main components of the water balance. Calibrating the model with streamflow and solute concentrations simultaneously reduced predictions of evapotranspiration. Compared to calibration using streamflow alone, the inclusion of DOC increased the predicted contribution of ~~groundwater reservoir S_s~~ to discharge, while the inclusion of NO_3^- increased the predicted loss of water from ~~the reservoir-rooting-zone reservoir S_u~~ . This modelling study demonstrates that including the large amount of information in solute time series in hydrological models provided an objective way to improve the representation of complex hydrological systems for which information about internal functioning was insufficient.

995

1000

1005

1010

Table A1. Symbols and definitions of variables in the hydrological model

Symbol	Definition	Symbol	Definition
P	Precipitation [L]	k_F	Storage coefficient of the fast reservoir [T^{-1}]
E_U	Transpiration from S_U [$L T^{-1}$]	f	Proportion of the catchment covered by the riparian zone [-]
R_U	Infiltration into the unsaturated reservoir [$L T^{-1}$]	Q_S	Runoff from the slow reservoir [$L T^{-1}$]
R_F	Recharge of fast reservoir [$L T^{-1}$]	R_{SR}	Recharge of S_{UR} from S_S [$L T^{-1}$]
R_P	Preferential recharge of the slow reservoir [$L T^{-1}$]	Q_L	Deep infiltration loss [$L T^{-1}$]
R_{SS}	Recharge of the slow reservoir [$L T^{-1}$]	S_S	Storage in the slow reservoir [L]
E_P	Potential evaporation [$L T^{-1}$]	S_{S_mix}	Groundwater mixing storage in the slow reservoir [L]
E_A	Actual evaporation [$L T^{-1}$]	f_{SUR}	Proportion of water flow from S_S that passes through S_{UR}
S_U	Unsaturated storage [L]	k_S	Storage coefficient of the slow reservoir [T^{-1}]
S_{U_max}	Storage capacity of the hillslope unsaturated zone [L]	E_{UR}	Transpiration from S_{UR} [$L T^{-1}$]
L_P	Transpiration threshold [-]	R_R	Recharge of the riparian zone reservoir [$L T^{-1}$]
$C_{H,R}$	Hillslope runoff coefficient [-]	$C_{R,R}$	Riparian runoff coefficient [-]
C_P	Preferential recharge coefficient [-]	S_{UR}	Unsaturated storage in the riparian zone [L]
P_{max}	Percolation capacity [$L T^{-1}$]	S_{UR_max}	Storage capacity in the riparian unsaturated zone [L]
β_H	Hillslope coefficient [-]	β_R	Riparian coefficient [-]
R_{FR}	Recharge of S_{UR} from S_F [$L T^{-1}$]	k_R	Storage coefficient of the riparian zone reservoir [T^{-1}]
S_F	Storage in the fast reservoir [L]	Q_R	Runoff from the riparian zone reservoir [$L T^{-1}$]
S_R	Storage in the riparian reservoir [L]	Q_T	Total outflow [$L T^{-1}$]

Symbol	Definition	Symbol	Definition
$C_{H,R}$	Hillslope runoff coefficient [-]	Q_T	Total outflow [$L T^{-1}$]
C_P	Preferential recharge coefficient [-]	R_F	Recharge of fast reservoir [$L T^{-1}$]
$C_{R,R}$	Riparian runoff coefficient [-]	R_{FR}	Recharge of S_{UR} from S_F [$L T^{-1}$]
E_A	Actual evaporation [$L T^{-1}$]	R_P	Preferential recharge of the slow reservoir [$L T^{-1}$]
E_P	Potential evaporation [$L T^{-1}$]	R_R	Recharge of the riparian zone reservoir [$L T^{-1}$]
E_U	Transpiration from S_U [$L T^{-1}$]	R_{SR}	Recharge of S_{UR} from S_S [$L T^{-1}$]
E_{UR}	Transpiration from S_{UR} [$L T^{-1}$]	R_{SS}	Recharge of the slow reservoir [$L T^{-1}$]
f	Proportion of the catchment covered by the riparian zone [-]	R_U	Infiltration into the unsaturated reservoir [$L T^{-1}$]
f_{SUR}	Proportion of water flow from S_S that passes through S_{UR} [-]	S_F	Storage in the fast reservoir [L]
k_F	Storage coefficient of the fast reservoir [T^{-1}]	S_R	Storage in the riparian reservoir [L]
k_R	Storage coefficient of the riparian zone reservoir [T^{-1}]	S_S	Storage in the slow reservoir [L]
k_S	Storage coefficient of the slow reservoir [T^{-1}]	S_{S_mix}	Groundwater mixing storage in the slow reservoir [L]
L_P	Transpiration threshold [-]	S_U	Unsaturated storage [L]
P	Precipitation [$L T^{-1}$]	S_{U_max}	Storage capacity of the hillslope unsaturated zone [L]
P_{max}	Percolation capacity [$L T^{-1}$]	S_{UR}	Unsaturated storage in the riparian zone [L]
Q_L	Deep infiltration loss [$L T^{-1}$]	S_{UR_max}	Storage capacity in the riparian unsaturated zone [L]
Q_R	Runoff from the riparian zone reservoir [$L T^{-1}$]	β_H	Hillslope coefficient [-]
Q_S	Runoff from the slow reservoir [$L T^{-1}$]	β_R	Riparian coefficient [-]

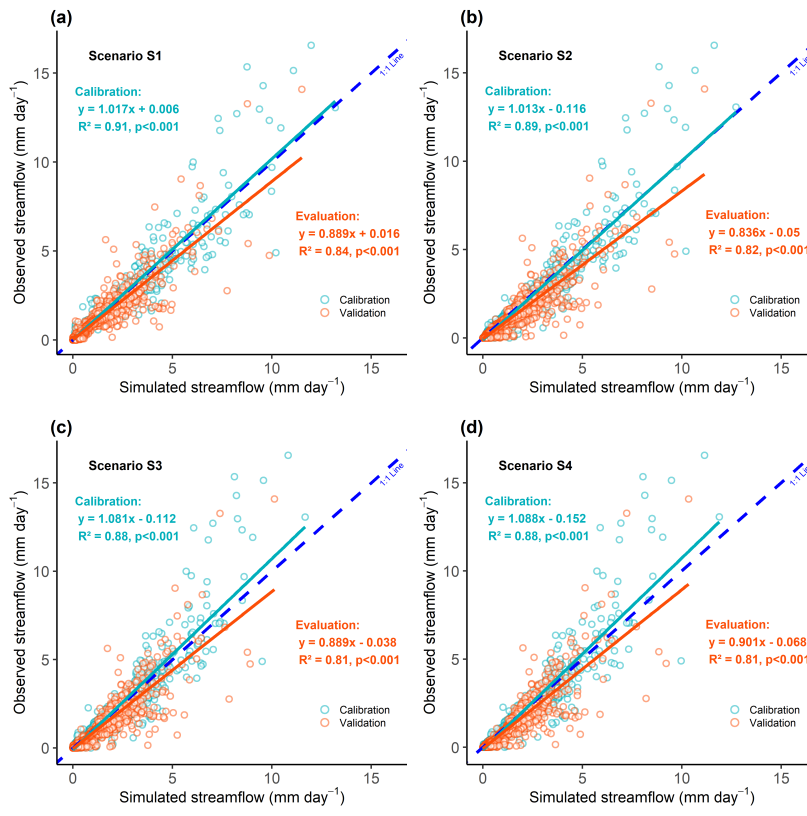


Figure A1. Relationship between observed- and- simulated streamflow for calibration and evaluation periods across for four calibration scenarios: a) S1 (Hydro Only), b) S2 (Hydro + DOC), c) S3 (Hydro + NO₃⁻), and d) S4 (Hydro + DOC + NO₃⁻). The dashed blue line is the 1:1 line. The light green or orange lines are linear regressions for the calibration or evaluation period, respectively. All relationships were statistically significant ($p < 0.001$).

Appendix B: Concentration–discharge (CQ) relationship

In general, the concentration–discharge (CQ) relationship allows three export regimes to be distinguished: (i) chemodynamic with an accretion pattern, (ii) chemodynamic with a dilution pattern, or (iii) chemostatics (Godsey et al., 2009; Musolff et al., 2017; Winter et al., 2021). “Chemodynamic” means that the variability in a solute's concentration is similar to or higher than that of Q , with concentrations either increasing (accretion) or decreasing (dilution) as Q increases (Winter et al., 2021). In contrast, chemostatics regimes have indicates constant in-stream nutrient concentrations in-stream that are not significantly correlated to with Q and have a considerably much lower variability (Bieroza et al., 2018). The slope of the linear relationship between $\ln(C)$ and $\ln(Q)$ (CQ-slope) determines the export regimes: (i) chemodynamic with an accretion pattern when greater than ≥ 0.1 , (ii) chemodynamic with a dilution pattern when less than ≤ -0.1 , and (iii) chemostatic from $(-0.1$ to $0.1)$ (Winter et al., 2021). The thresholds of -0.1 and 0.1 for the chemostatic regime were chosen according to Bieroza et al. (2018) and Winter et al. (2021).

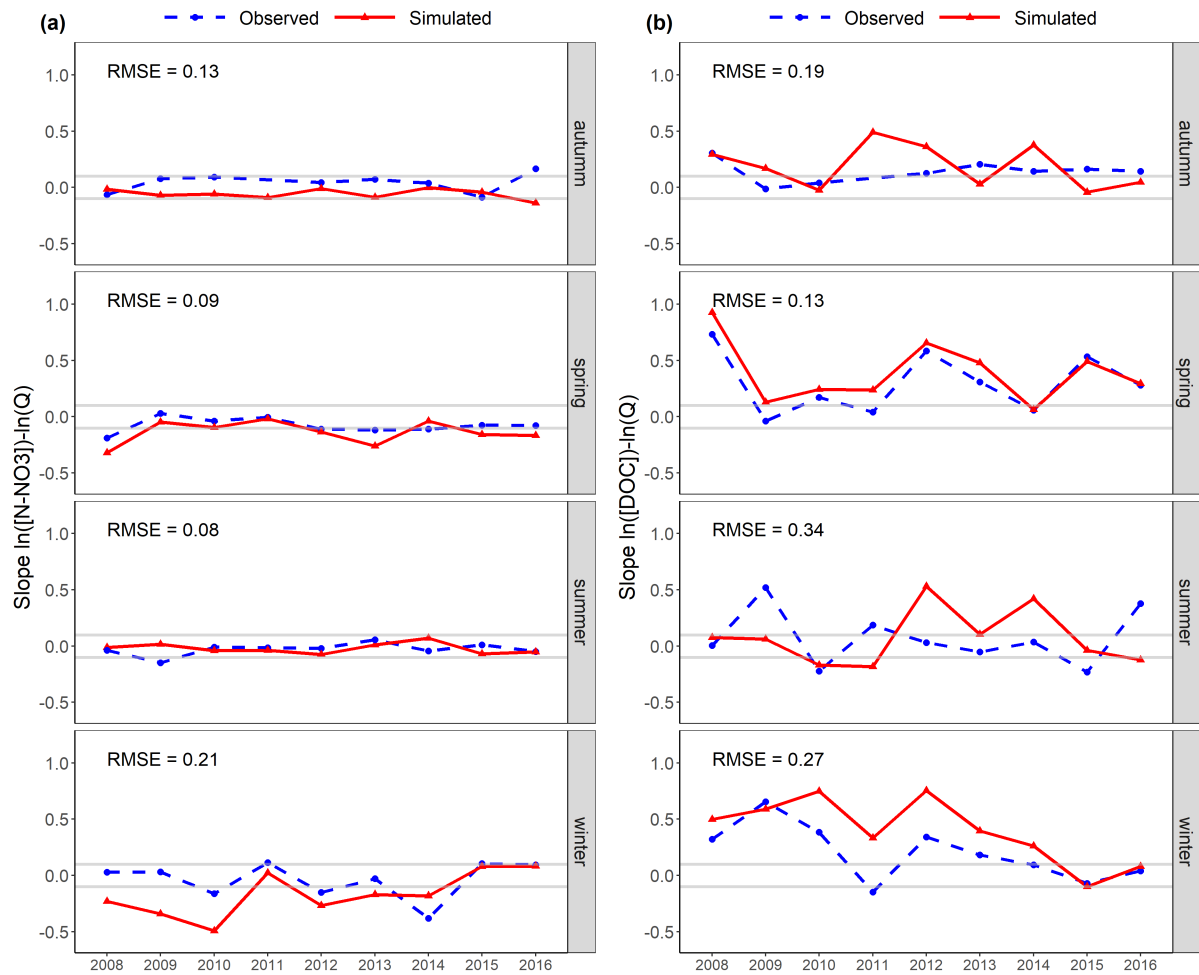


Figure B1. a) Slope $\ln([N-NO_3])-\ln(Q)$ for simulated nitrate (NO_3^-) data from scenario S3 (streamflow and stream NO_3^- concentration used for calibration). b) Slope $\ln([DOC])-\ln(Q)$ for simulated DOC data from scenario S2 (streamflow and stream DOC concentration used for calibration). Horizontal grey lines identify the boundary between a chemodynamic regime with a dilution pattern and a chemostatic regime (-0.1), and that between a chemostatic regime and a chemodynamic regime with an accretion pattern (0.1). RMSE: Root-mean-square error.

1045

1050

Appendix C: Performance criteria

To evaluate model performance, the study used the following criteria:

1) Nash-Sutcliffe efficiency (NSE) (Nash and Sutcliffe, 1970):

$$NSE = 1 - \frac{\sum_{i=1}^n (Y_{i,obs} - Y_{i,sim})^2}{\sum_{i=1}^n (Y_{i,obs} - \bar{Y}_{obs})^2} \quad (1)$$

where $Y_{i,sim}$ is the model output, $Y_{i,obs}$ is the observed value of variable Y for time step i, and \bar{Y}_{obs} is the mean value of observation data for the study period and n is the length of the time series. NSE ranges from -∞ and to 1, with NSE = 1 being the optimal value if the simulation represents the observations perfectly (Moriassi et al., 2007). NSE describes the variance in the observed values over time that is explained by the model. Negative NSE indicates that model predictions are worse than the mean of all observations. The NSE of the flows (NSE_Q) and the NSE of the logarithm of the flows (NSE_{logQ}) evaluated the model's ability to reproduce high flows and low flows, respectively (Gharari et al., 2014).

2) Kling-Gupta model efficiency (KGE) (Gupta et al., 2009):

$$KGE = 1 - \sqrt{(r - 1)^2 + (\beta - 1)^2 + (\alpha - 1)^2}, \beta = \frac{\mu_{sim}}{\mu_{obs}}, \alpha = \frac{\sigma_{sim}}{\sigma_{obs}} \quad (2)$$

where r is the correlation coefficient, β and α are the bias and variability ratio, respectively, between simulations and observations, μ and σ are the mean and standard deviation of the variable, respectively, and indices sim and obs represent simulations and observations, respectively.

The closer the KGE is to 1, the better the model performs, and KGE = 1 expresses a perfect fit between predictions and observations. KGE of 0.70-0.82 is considered average to slightly good model performance, while KGE > 0.82 is considered good to very good (Crochemore et al., 2015).

3) The Flow Duration Curve (FDC), which is the distribution of probabilities of streamflow being greater than or equal to a given magnitude (Sawicz et al., 2011). In the present study, the NSE of the FDC (NSE_{FDC}) evaluated the model's ability to reproduce FDCs:

$$NSE_{FDC} = 1 - \frac{\sum_{j=0}^{100} (FDC_{j,obs} - FDC_{j,sim})^2}{\sum_{j=0}^{100} (FDC_{j,obs} - \bar{FDC}_{obs})^2} \quad (3)$$

where FDC_{j,obs} is the FDC of the observed discharge with j probability of exceedance, FDC_{j,sim} is the FDC of the simulated discharge with j probability of exceedance and \bar{FDC}_{obs} is average the mean of observed discharge (from Euser et al., 2013).

4) The Volumetric efficiency (VE):

$$VE = 1 - \frac{\sum_{i=1}^n |Q_{i,sim} - Q_{i,obs}|}{\sum_{i=1}^n Q_{i,obs}} \quad (4)$$

where $Q_{i,obs}$ and $Q_{i,sim}$ are the observed and simulated discharge, respectively, at time step i, respectively. VE thus ranges from 0 to 1 and represents the fraction of simulated water delivered at the proper correct time (Criss and Winston, 2008).

5) Runoff (RUNOFF [-]), which equals long-term mean streamflow (Q) divided by long-term mean precipitation (P) (Sawicz et al., 2011):

$$RUNOFF = \frac{Q}{P} \quad (5)$$

RUNOFF represents the long-term water balance between water being released from the catchment as streamflow and as evapotranspiration (assuming no net change in storage). A high or low runoff ratio indicates a large amount of water exiting as streamflow (dominated by streamflow or blue water) or evapotranspiration (dominated by evapotranspiration or green water), respectively (Sawicz et al., 2011). NSE_{RUNOFF} corresponds to the NSE with RUNOFF as the variable.

1105 6) Root-Mean-Square e-Error (RMSE):

$$\text{RMSE} = \sqrt{\frac{1}{n} \sum_{i=1}^n (Y_{i,\text{obs}} - Y_{i,\text{sim}})^2} \quad (6)$$

1110 where $Y_{i,\text{sim}}$ and $Y_{i,\text{obs}}$ is are the simulated and observed value of variable Y , respectively, at for time step i and n is the length of the time series. RMSE is easy to interpret because it uses the same units as the model output. The lower the RMSE, the better the model performance.

1115 7) Percentage bBias (PBIAS) (Yapo et al., 1998)(Moriassi et al., 2007):

$$\text{PBIAS} = \frac{1}{n} \sum_{i=1}^n \left(\frac{Y_{i,\text{sim}} - Y_{i,\text{obs}}}{Y_{i,\text{obs}}} \right) * 100 \quad (7)$$

1120 measures the mean difference between observations $Y_{i,\text{obs}}$ and model simulations $Y_{i,\text{sim}}$ of variable Y for at time step i . n is the length of the time series. The optimal value of PBIAS is 0.0, with low-magnitudesmall values indicating accurate prediction and larger positive or negative values indicating overprediction or underprediction bias, respectively.

1125 8) Coefficient of determination (R^2):

$$R^2 = \frac{\left(\sum_{i=1}^n (Y_{i,\text{obs}} - \bar{Y}_{\text{obs}}) * (Y_{i,\text{sim}} - \bar{Y}_{\text{sim}}) \right)^2}{\sum_{i=1}^n (Y_{i,\text{obs}} - \bar{Y}_{\text{obs}})^2 * \sum_{i=1}^n (Y_{i,\text{sim}} - \bar{Y}_{\text{sim}})^2} \quad (348)$$

1130 where $Y_{i,\text{sim}}$ and $Y_{i,\text{obs}}$ is are the simulated and observed value of variable Y , respectively, at for time step i , and \bar{Y}_{obs} and \bar{Y}_{sim} are the mean value for observed and simulated data for the study period, respectively, and n is the length of the time series. R^2 evaluates how accurately the model tracks-predicts the variation in observed values. It can reveal the strength and direction of a linear relation between predictions and observations.

1135 Data availability. The weather data are available obtained—from the INRAE CLIMATIK platform (<https://agroclim.inrae.fr/climatik/>, in French). The hydrochemical data (i.e. streamflow, groundwater levels, soil water content, and solutes concentrations) are available from the Observatoire de Recherche en Environnement sur les Agro-Hydrosystèmes (ORE AgrHyS) platform (https://www6.inra.fr/ore_agrhys_eng/Data). ORE AgrHyS, funded by INRAE, is part of the OZCAR French Research Infrastructure (<https://www.ozcar-ri.org/agrhys-observatory/>).

1140 Code availability. The model code is available from <https://doi.org/10.5281/zenodo.10161243> or directly from the first author.

1145 Author contributions. All co-authors were involved in the-identifying-ication of the research questions, conceptualizing-ication of the original methods, and-the interpreting-ication and discussing-ions of the results. JSM implemented the model, performed the simulations, created the figures and prepared the first draft of the manuscript. All co-authors contributed to the content and improvement of the manuscript.

1150 Competing interests. At least one of the (co-)authors is a member of the editorial board of *Hydrology and Earth System Sciences*.

1155 Acknowledgements. We gratefully acknowledge Chantal Gascuel-Odoux for her insightful comments and suggestions. ~~The authors would like to~~We thank Yannick Hamon and Mikael Faucheu for conducting field and laboratory work, which provided-eding essential data for this study. We also thank Michelle and Michael Corson for their English and scientific review. This study was performed with the support of the high-performance computing platform MESO@LR at the University of Montpellier. We also thank Jan Seibert and the two anonymous reviewers for their very constructive comments, which helped us improve the manuscript greatly.

1160 References cited in t-ables-Refs:

(Criss and Winston, 2008; Gupta et al., 2009; Jothityangkoon et al., 2001; Nash and Sutcliffe, 1970; Yadav et al., 2007)

References

- 1165 Adeyeri, O. E., Laux, P., Arnault, J., Lawin, A. E., and Kunstmann, H.: Conceptual hydrological model calibration using multi-objective optimization techniques over the transboundary Komadugu-Yobe basin, Lake Chad Area, West Africa, *Journal of Hydrology: Regional Studies*, 27, 100655, <https://doi.org/10.1016/j.ejrh.2019.100655>, 2020.
- 1170 Anderson, T. R., Groffman, P. M., Kaushal, S. S., and Walter, M. T.: Shallow Groundwater Denitrification in Riparian Zones of a Headwater Agricultural Landscape, *Journal of Environmental Quality*, 43, 732–744, <https://doi.org/10.2134/jeq2013.07.0303>, 2014.
- Aubert, A. H., Gascuel-Oudou, C., Gruau, G., Akkal, N., Faucheux, M., Fauvel, Y., Grimaldi, C., Hamon, Y., Jaffrézic, A., Lecoz-Boutnik, M., Molénat, J., Petitjean, P., Ruiz, L., and Merot, P.: Solute transport dynamics in small, shallow groundwater-dominated agricultural catchments: insights from a high-frequency, multisolute 10 yr-long monitoring study, *Hydrol. Earth Syst. Sci.*, 17, 1379–1391, <https://doi.org/10.5194/hess-17-1379-2013>, 2013.
- 1175 Barton, L., McLay, C. D. A., Schipper, L. A., and Smith, C. T.: Annual denitrification rates in agricultural and forest soils: a review., *Australian Journal of Soil Research*, 37, 1073–1073, 1999.
- 1180 Basu, N. B., Destouni, G., Jawitz, J. W., Thompson, S. E., Loukinova, N. V., Darracq, A., Zanardo, S., Yaeger, M., Sivapalan, M., Rinaldo, A., and Rao, P. S. C.: Nutrient loads exported from managed catchments reveal emergent biogeochemical stationarity, *Geophysical Research Letters*, 37, <https://doi.org/10.1029/2010GL045168>, 2010.
- Benettin, P., van der Velde, Y., van der Zee, S. E. A. T. M., Rinaldo, A., and Botter, G.: Chloride circulation in a lowland catchment and the formulation of transport by travel time distributions, *Water Resources Research*, 49, 4619–4632, <https://doi.org/10.1002/wrcr.20309>, 2013.
- 1185 Benettin, P., Rodriguez, N. B., Sprenger, M., Kim, M., Klaus, J., Harman, C. J., van der Velde, Y., Hrachowitz, M., Botter, G., McGuire, K. J., Kirchner, J. W., Rinaldo, A., and McDonnell, J. J.: Transit Time Estimation in Catchments: Recent Developments and Future Directions, *Water Resources Research*, 58, e2022WR033096, <https://doi.org/10.1029/2022WR033096>, 2022.
- 1190 Bennett, K. E., Cherry, J. E., Balk, B., and Lindsey, S.: Using MODIS estimates of fractional snow cover area to improve streamflow forecasts in interior Alaska, *Hydrology and Earth System Sciences*, 23, 2439–2459, <https://doi.org/10.5194/hess-23-2439-2019>, 2019.
- Benoit, M. and Veysset, P.: Calcul des Unités Gros Bétaïls : proposition d’une méthode basée sur les besoins énergétiques pour affiner l’étude des systèmes d’élevage, *INRAE Productions Animales*, 34, 139–160, <https://doi.org/10.20870/productions-animales.2021.34.2.4855>, 2021.
- 1195 Beven, K.: On hypothesis testing in hydrology, *Hydrological Processes*, 15, 1655–1657, <https://doi.org/10.1002/hyp.436>, 2001.
- Beven, K.: A manifesto for the equifinality thesis, *Journal of Hydrology*, 320, 18–36, <https://doi.org/10.1016/j.jhydrol.2005.07.007>, 2006.
- Beven, K.: So how much of your error is epistemic? Lessons from Japan and Italy, *Hydrological Processes*, 27, 1677–1680, <https://doi.org/10.1002/hyp.9648>, 2013.
- 1200 Beven, K. and Westerberg, I.: On red herrings and real herrings: disinformation and information in hydrological inference, *Hydrological Processes*, 25, 1676–1680, <https://doi.org/10.1002/hyp.7963>, 2011.
- Beven, K. J.: *Rainfall-runoff modelling: the primer*, 2nd ed., Wiley-Blackwell, Chichester, West Sussex ; Hoboken, NJ, 457 pp., 2012.
- 1205 Bierozza, M. Z., Heathwaite, A. L., Bechmann, M., Kyllmar, K., and Jordan, P.: The concentration-discharge slope as a tool for water quality management, *Science of The Total Environment*, 630, 738–749, <https://doi.org/10.1016/j.scitotenv.2018.02.256>, 2018.

- Birkel, C. and Soulsby, C.: Linking tracers, water age and conceptual models to identify dominant runoff processes in a sparsely monitored humid tropical catchment, *Hydrological Processes*, 30, 4477–4493, <https://doi.org/10.1002/hyp.10941>, 2016.
- 1210 Birkel, C., Tetzlaff, D., Dunn, S. M., and Soulsby, C.: Using time domain and geographic source tracers to conceptualize streamflow generation processes in lumped rainfall-runoff models: DUAL-TRACER CONCEPTUALIZED STREAMFLOW GENERATION, *Water Resour. Res.*, 47, <https://doi.org/10.1029/2010WR009547>, 2011.
- 1215 Birkel, C., Soulsby, C., and Tetzlaff, D.: Integrating parsimonious models of hydrological connectivity and soil biogeochemistry to simulate stream DOC dynamics: PARSIMONIOUS COUPLED DOC MODEL, *J. Geophys. Res. Biogeosci.*, 119, 1030–1047, <https://doi.org/10.1002/2013JG002551>, 2014.
- Birkel, C., Soulsby, C., and Tetzlaff, D.: Conceptual modelling to assess how the interplay of hydrological connectivity, catchment storage and tracer dynamics controls nonstationary water age estimates, *Hydrological Processes*, 29, 2956–2969, <https://doi.org/10.1002/hyp.10414>, 2015.
- 1220 Birkel, C., Broder, T., and Biester, H.: Nonlinear and threshold-dominated runoff generation controls DOC export in a small peat catchment: NONLINEAR FLOW PATHS CONTROL DOC EXPORT, *J. Geophys. Res. Biogeosci.*, 122, 498–513, <https://doi.org/10.1002/2016JG003621>, 2017.
- Birkel, C., Duvert, C., Correa, A., Munksgaard, N. C., Maher, D. T., and Hutley, L. B.: Tracer-Aided Modeling in the Low-Relief, Wet-Dry Tropics Suggests Water Ages and DOC Export Are Driven by Seasonal Wetlands and Deep Groundwater, *Water Resour. Res.*, 56, <https://doi.org/10.1029/2019WR026175>, 2020.
- 1225 Blazkova, S., Beven, K. J., and Kulasova, A.: On constraining TOPMODEL hydrograph simulations using partial saturated area information, *Hydrological Processes*, 16, 441–458, <https://doi.org/10.1002/hyp.331>, 2002.
- Blöschl, G.: Scaling in hydrology: INVITED COMMENTARY, *Hydrol. Process.*, 15, 709–711, <https://doi.org/10.1002/hyp.432>, 2001.
- 1230 Böhlke, J. K., Antweiler, R. C., Harvey, J. W., Laursen, A. E., Smith, L. K., Smith, R. L., and Voytek, M. A.: Multi-scale measurements and modeling of denitrification in streams with varying flow and nitrate concentration in the upper Mississippi River basin, USA, *Biogeochemistry*, 93, 117–141, <https://doi.org/10.1007/s10533-008-9282-8>, 2009.
- 1235 Botter, G., Bertuzzo, E., and Rinaldo, A.: Catchment residence and travel time distributions: The master equation: CATCHMENT RESIDENCE TIMES, *Geophys. Res. Lett.*, 38, n/a-n/a, <https://doi.org/10.1029/2011GL047666>, 2011.
- Bouaziz, L., Weerts, A., Schellekens, J., Sprokkereef, E., Stam, J., Savenije, H., and Hrachowitz, M.: Redressing the balance: quantifying net intercatchment groundwater flows, *Hydrol. Earth Syst. Sci.*, 22, 6415–6434, <https://doi.org/10.5194/hess-22-6415-2018>, 2018.
- 1240 Bouaziz, L. J. E., Fenicia, F., Thirel, G., de Boer-Euser, T., Buitink, J., Brauer, C. C., De Niel, J., Dewals, B. J., Drogue, G., Grelier, B., Melsen, L. A., Moustakas, S., Nossent, J., Pereira, F., Sprokkereef, E., Stam, J., Weerts, A. H., Willems, P., Savenije, H. H. G., and Hrachowitz, M.: Behind the scenes of streamflow model performance, *Hydrol. Earth Syst. Sci.*, 25, 1069–1095, <https://doi.org/10.5194/hess-25-1069-2021>, 2021.
- 1245 Brocca, L., Melone, F., Moramarco, T., Wagner, W., and Hasenauer, S.: ASCAT soil wetness index validation through in situ and modeled soil moisture data in central Italy, *Remote Sensing of Environment*, 114, 2745–2755, <https://doi.org/10.1016/j.rse.2010.06.009>, 2010.
- Capell, R., Tetzlaff, D., and Soulsby, C.: Can time domain and source area tracers reduce uncertainty in rainfall-runoff models in larger heterogeneous catchments?, *Water Resour. Res.*, 48, 2011WR011543, <https://doi.org/10.1029/2011WR011543>, 2012.
- 1250 | Carluer, N.: Vers une modélisation hydrologique adaptée à l'évaluation des pollutions diffuses : prise en compte du réseau anthropique. Adaptation au bassin versant de Naizin (Morbihan), [phdthesisPhD thesis](#), Doctorat Sciences de la terre, Université Pierre et Marie Curie Paris, 1998.

- Casal, L.: Evaluation de scénarios de gestion paysagère de l'azote par modélisation en bassins versants agricoles, These de doctorat, Rennes, Agrocampus Ouest, 2018.
- 1255 Casal, L., Durand, P., Akkal-Corfini, N., Benhamou, C., Laurent, F., Salmon-Monviola, J., and Vertès, F.: Optimal location of set-aside areas to reduce nitrogen pollution: a modelling study, *The Journal of Agricultural Science*, 156, 1090–1102, <https://doi.org/10.1017/S0021859618001144>, 2018.
- Casal, L., Durand, P., Akkal-Corfini, N., Benhamou, C., Laurent, F., Salmon-Monviola, J., Ferrant, S., Probst, A., Probst, J.-L., and Vertès, F.: Reduction of stream nitrate concentrations by land management in contrasted landscapes, *Nutr Cycl Agroecosyst*, 114, 1–17, <https://doi.org/10.1007/s10705-019-09985-0>, 2019.
- 1260 Clark, M. P., Kavetski, D., and Fenicia, F.: Pursuing the method of multiple working hypotheses for hydrological modeling: HYPOTHESIS TESTING IN HYDROLOGY, *Water Resour. Res.*, 47, <https://doi.org/10.1029/2010WR009827>, 2011.
- 1265 Clark, M. P., Schaefli, B., Schymanski, S. J., Samaniego, L., Luce, C. H., Jackson, B. M., Freer, J. E., Arnold, J. R., Moore, R. D., Istanbuluoglu, E., and Ceola, S.: Improving the theoretical underpinnings of process-based hydrologic models, *Water Resources Research*, 52, 2350–2365, <https://doi.org/10.1002/2015WR017910>, 2016.
- 1270 Creed, I. F., McKnight, D. M., Pellerin, B. A., Green, M. B., Bergamaschi, B. A., Aiken, G. R., Burns, D. A., Findlay, S. E. G., Shanley, J. B., Striegl, R. G., Aulenbach, B. T., Clow, D. W., Laudon, H., McGlynn, B. L., McGuire, K. J., Smith, R. A., and Stackpoole, S. M.: The river as a chemostat: fresh perspectives on dissolved organic matter flowing down the river continuum, *Can. J. Fish. Aquat. Sci.*, 72, 1272–1285, <https://doi.org/10.1139/cjfas-2014-0400>, 2015.
- Criss, R. E. and Winston, W. E.: Do Nash values have value? Discussion and alternate proposals, *Hydrological Processes*, 22, 2723–2725, <https://doi.org/10.1002/hyp.7072>, 2008.
- 1275 Crochemore, L., Perrin, C., Andréassian, V., Ehret, U., Seibert, S. P., Grimaldi, S., Gupta, H., and Paturel, J.-E.: Comparing expert judgement and numerical criteria for hydrograph evaluation, *Hydrological Sciences Journal*, 60, 402–423, <https://doi.org/10.1080/02626667.2014.903331>, 2015.
- Dalzell, B. J., Filley, T. R., and Harbor, J. M.: The role of hydrology in annual organic carbon loads and terrestrial organic matter export from a midwestern agricultural watershed, *Geochimica et Cosmochimica Acta*, 71, 1448–1462, <https://doi.org/10.1016/j.gca.2006.12.009>, 2007.
- 1280 Demirel, M. C., Mai, J., Mendiguren, G., Koch, J., Samaniego, L., and Stisen, S.: Combining satellite data and appropriate objective functions for improved spatial pattern performance of a distributed hydrologic model, *Hydrology and Earth System Sciences*, 22, 1299–1315, <https://doi.org/10.5194/hess-22-1299-2018>, 2018.
- 1285 Di Grazia, F., Garcia, X., Acuña, V., Llanos-Paez, O., Galgani, L., Gumiero, B., and Loiselle, S. A.: Modeling dissolved and particulate organic carbon dynamics at basin and sub-basin scales, *Science of The Total Environment*, 884, 163840, <https://doi.org/10.1016/j.scitotenv.2023.163840>, 2023.
- Dimitrova-Petrova, K., Geris, J., Wilkinson, M. E., Rosolem, R., Verrot, L., Lilly, A., and Soulsby, C.: Opportunities and challenges in using catchment-scale storage estimates from cosmic ray neutron sensors for rainfall-runoff modelling, *Journal of Hydrology*, 586, 124878, <https://doi.org/10.1016/j.jhydrol.2020.124878>, 2020.
- 1290 Duethmann, D., Smith, A., Soulsby, C., Kleine, L., Wagner, W., Hahn, S., and Tetzlaff, D.: Evaluating satellite-derived soil moisture data for improving the internal consistency of process-based ecohydrological modelling, *Journal of Hydrology*, 128462, <https://doi.org/10.1016/j.jhydrol.2022.128462>, 2022.
- 1295 Dupas, R., Ehrhardt, S., Musolff, A., Fovet, O., and Durand, P.: Long-term nitrogen retention and transit time distribution in agricultural catchments in western France, *Environ. Res. Lett.*, 15, 115011, <https://doi.org/10.1088/1748-9326/abbe47>, 2020.
- Eder, A., Weigelhofer, G., Pucher, M., Tiefenbacher, A., Strauss, P., Brandl, M., and Blöschl, G.: Pathways and composition of dissolved organic carbon in a small agricultural catchment during base flow conditions, *Ecohydrology & Hydrobiology*, 22, 96–112, <https://doi.org/10.1016/j.ecohyd.2021.07.012>, 2022.

- 1300 Efstathiadis, A. and Koutsoyiannis, D.: Fitting Hydrological Models on Multiple Responses Using the Multiobjective Evolutionary Annealing-Simplex Approach, in: *Practical Hydroinformatics: Computational Intelligence and Technological Developments in Water Applications*, edited by: Abrahart, R. J., See, L. M., and Solomatine, D. P., Springer, Berlin, Heidelberg, 259–273, https://doi.org/10.1007/978-3-540-79881-1_19, 2008.
- 1305 Efstathiadis, A. and Koutsoyiannis, D.: One decade of multi-objective calibration approaches in hydrological modelling: a review, *Hydrological Sciences Journal*, 55, 58–78, <https://doi.org/10.1080/02626660903526292>, 2010.
- Euser, T., Winsemius, H. C., Hrachowitz, M., Fenicia, F., Uhlenbrook, S., and Savenije, H. H. G.: A framework to assess the realism of model structures using hydrological signatures, *Hydrol. Earth Syst. Sci.*, 17, 1893–1912, <https://doi.org/10.5194/hess-17-1893-2013>, 2013.
- 1310 Euser, T., Hrachowitz, M., Winsemius, H. C., and Savenije, H. H. G.: The effect of forcing and landscape distribution on performance and consistency of model structures: DISTRIBUTION OF FORCING AND MODEL STRUCTURES, *Hydrol. Process.*, 29, 3727–3743, <https://doi.org/10.1002/hyp.10445>, 2015.
- Fenicia, F., Savenije, H. H. G., Matgen, P., and Pfister, L.: Understanding catchment behavior through stepwise model concept improvement: CATCHMENT BEHAVIOR THROUGH STEPWISE MODEL, *Water Resour. Res.*, 44, <https://doi.org/10.1029/2006WR005563>, 2008.
- 1315 Fenicia, F., Kavetski, D., Reichert, P., and Albert, C.: Signature-Domain Calibration of Hydrological Models Using Approximate Bayesian Computation: Empirical Analysis of Fundamental Properties, *Water Resources Research*, 54, 3958–3987, <https://doi.org/10.1002/2017WR021616>, 2018.
- 1320 Fovet, O., Ruiz, L., Hrachowitz, M., Fauchoux, M., and Gascuel-Oudou, C.: Hydrological hysteresis and its value for assessing process consistency in catchment conceptual models, *Hydrol. Earth Syst. Sci.*, 19, 105–123, <https://doi.org/10.5194/hess-19-105-2015>, 2015a.
- Fovet, O., Ruiz, L., Fauchoux, M., Molénat, J., Sekhar, M., Vertès, F., Aquilina, L., Gascuel-Oudou, C., and Durand, P.: Using long time series of agricultural-derived nitrates for estimating catchment transit times, *Journal of Hydrology*, 522, 603–617, <https://doi.org/10.1016/j.jhydrol.2015.01.030>, 2015b.
- 1325 Fovet, O., Humbert, G., Dupas, R., Gascuel-Oudou, C., Gruau, G., Jaffrezic, A., Thelusma, G., Fauchoux, M., Gilliet, N., Hamon, Y., and Grimaldi, C.: Seasonal variability of stream water quality response to storm events captured using high-frequency and multi-parameter data, *Journal of Hydrology*, 559, 282–293, <https://doi.org/10.1016/j.jhydrol.2018.02.040>, 2018.
- 1330 Fovet, O., Cooper, D. M., Jones, D. L., Jones, T. G., and Evans, C. D.: Dynamics of dissolved organic matter in headwaters: comparison of headwater streams with contrasting DOM and nutrient composition, *Aquat Sci*, 82, 29, <https://doi.org/10.1007/s00027-020-0704-6>, 2020.
- Franks, S. W., Gineste, P., Beven, K. J., and Merot, P.: On constraining the predictions of a distributed model: The incorporation of fuzzy estimates of saturated areas into the calibration process, *Water Resources Research*, 34, 787–797, <https://doi.org/10.1029/97WR03041>, 1998.
- 1335 Freer, J. E., McMillan, H., McDonnell, J. J., and Beven, K. J.: Constraining dynamic TOPMODEL responses for imprecise water table information using fuzzy rule based performance measures, *Journal of Hydrology*, 291, 254–277, <https://doi.org/10.1016/j.jhydrol.2003.12.037>, 2004.
- Gao, H., Ding, Y., Zhao, Q., Hrachowitz, M., and Savenije, H. H. G.: The importance of aspect for modelling the hydrological response in a glacier catchment in Central Asia, *Hydrological Processes*, 31, 2842–2859, <https://doi.org/10.1002/hyp.11224>, 2017.
- 1340 Gharari, S., Hrachowitz, M., Fenicia, F., Gao, H., and Savenije, H. H. G.: Using expert knowledge to increase realism in environmental system models can dramatically reduce the need for calibration, *Hydrol. Earth Syst. Sci.*, 18, 4839–4859, <https://doi.org/10.5194/hess-18-4839-2014>, 2014.
- 1345 Giustolisi, O. and Simeone, V.: Optimal design of artificial neural networks by a multi-objective strategy: groundwater level predictions, *Hydrological Sciences Journal*, 51, 502–523, <https://doi.org/10.1623/hysj.51.3.502>, 2006.

- Godsey, S. E., Kirchner, J. W., and Clow, D. W.: Concentration–discharge relationships reflect chemostatic characteristics of US catchments, *Hydrological Processes*, 23, 1844–1864, <https://doi.org/10.1002/hyp.7315>, 2009.
- 1350 Gomis-Cebolla, J., Garcia-Arias, A., Perpinyà-Vallès, M., and Francés, F.: Evaluation of Sentinel-1, SMAP and SMOS surface soil moisture products for distributed eco-hydrological modelling in Mediterranean forest basins, *Journal of Hydrology*, 608, 127569, <https://doi.org/10.1016/j.jhydrol.2022.127569>, 2022.
- 1355 Guillaume, J. H. A., Jakeman, J. D., Marsili-Libelli, S., Asher, M., Brunner, P., Croke, B., Hill, M. C., Jakeman, A. J., Keesman, K. J., Razavi, S., and Stigter, J. D.: Introductory overview of identifiability analysis: A guide to evaluating whether you have the right type of data for your modeling purpose, *Environmental Modelling & Software*, 119, 418–432, <https://doi.org/10.1016/j.envsoft.2019.07.007>, 2019.
- Güntner, A., Uhlenbrook, S., Seibert, J., and Leibundgut, Ch.: Multi-criterial validation of TOPMODEL in a mountainous catchment, *Hydrological Processes*, 13, 1603–1620, [https://doi.org/10.1002/\(SICI\)1099-1085\(19990815\)13:11<1603::AID-HYP830>3.0.CO;2-K](https://doi.org/10.1002/(SICI)1099-1085(19990815)13:11<1603::AID-HYP830>3.0.CO;2-K), 1999.
- 1360 Gupta, H. V., Kling, H., Yilmaz, K. K., and Martinez, G. F.: Decomposition of the mean squared error and NSE performance criteria: Implications for improving hydrological modelling, *Journal of Hydrology*, 377, 80–91, <https://doi.org/10.1016/j.jhydrol.2009.08.003>, 2009.
- Gupta, H. V., Clark, M. P., Vrugt, J. A., Abramowitz, G., and Ye, M.: Towards a comprehensive assessment of model structural adequacy: ASSESSMENT OF MODEL STRUCTURAL ADEQUACY, *Water Resour. Res.*, 48, <https://doi.org/10.1029/2011WR011044>, 2012.
- 1365 Hartmann, A., Wagener, T., Rimmer, A., Lange, J., Brielmann, H., and Weiler, M.: Testing the realism of model structures to identify karst system processes using water quality and quantity signatures: KARST SYSTEM IDENTIFICATION, *Water Resour. Res.*, 49, 3345–3358, <https://doi.org/10.1002/wrcr.20229>, 2013.
- Hartmann, G. and Bárdossy, A.: Investigation of the transferability of hydrological models and a method to improve model calibration, *Adv. Geosci.*, 5, 83–87, <https://doi.org/10.5194/adgeo-5-83-2005>, 2005.
- 1370 Heinen, M.: Simplified denitrification models: Overview and properties, *Geoderma*, 133, 444–463, <https://doi.org/10.1016/j.geoderma.2005.06.010>, 2006.
- Houska, T., Kraft, P., Chamorro-Chavez, A., and Breuer, L.: SPOTting Model Parameters Using a Ready-Made Python Package, *PLoS ONE*, 10, e0145180, <https://doi.org/10.1371/journal.pone.0145180>, 2015.
- 1375 Hrachowitz, M. and Clark, M. P.: HESS Opinions: The complementary merits of competing modelling philosophies in hydrology, *Hydrology and Earth System Sciences*, 21, 3953–3973, <https://doi.org/10.5194/hess-21-3953-2017>, 2017.
- Hrachowitz, M., Soulsby, C., Tetzlaff, D., and Malcolm, I. A.: Sensitivity of mean transit time estimates to model conditioning and data availability, *Hydrol. Process.*, 25, 980–990, <https://doi.org/10.1002/hyp.7922>, 2011.
- 1380 Hrachowitz, M., Savenije, H., Bogaard, T. A., Tetzlaff, D., and Soulsby, C.: What can flux tracking teach us about water age distribution patterns and their temporal dynamics?, *Hydrol. Earth Syst. Sci.*, 17, 533–564, <https://doi.org/10.5194/hess-17-533-2013>, 2013.
- Hrachowitz, M., Fovet, O., Ruiz, L., Euser, T., Gharari, S., Nijzink, R., Freer, J., Savenije, H. H. G., and Gascuel-Oudou, C.: Process consistency in models: The importance of system signatures, expert knowledge, and process complexity, *Water Resour. Res.*, 50, 7445–7469, <https://doi.org/10.1002/2014WR015484>, 2014.
- 1385 Hrachowitz, M., Fovet, O., Ruiz, L., and Savenije, H. H. G.: Transit time distributions, legacy contamination and variability in biogeochemical $1/f^\alpha$ scaling: how are hydrological response dynamics linked to water quality at the catchment scale?: How are Hydrological Response Dynamics Linked to Water Quality?, *Hydrol. Process.*, 29, 5241–5256, <https://doi.org/10.1002/hyp.10546>, 2015.
- 1390 Hrachowitz, M., Benettin, P., van Breukelen, B. M., Fovet, O., Howden, N. J. K., Ruiz, L., van der Velde, Y., and Wade, A. J.: Transit times-the link between hydrology and water quality at the catchment scale: Linking hydrology and transit times, *WIREs Water*, 3, 629–657, <https://doi.org/10.1002/wat2.1155>, 2016.

- 1395 Hrachowitz, M., Stockinger, M., Coenders-Gerrits, M., van der Ent, R., Bogen, H., Lücke, A., and Stump, C.: Reduction of vegetation-accessible water storage capacity after deforestation affects catchment travel time distributions and increases young water fractions in a headwater catchment, *Hydrology and Earth System Sciences*, 25, 4887–4915, <https://doi.org/10.5194/hess-25-4887-2021>, 2021.
- Huang, Y. and Bardossy, A.: Impacts of Data Quantity and Quality on Model Calibration: Implications for Model Parameterization in Data-Scarce Catchments, *Water*, 12, 2352, <https://doi.org/10.3390/w12092352>, 2020.
- 1400 Hulsman, P., Winsemius, H. C., Michailovsky, C. I., Savenije, H. H. G., and Hrachowitz, M.: Using altimetry observations combined with GRACE to select parameter sets of a hydrological model in a data-scarce region, *Hydrology and Earth System Sciences*, 24, 3331–3359, <https://doi.org/10.5194/hess-24-3331-2020>, 2020.
- Humbert, G., Jaffrezic, A., Fovet, O., Gruau, G., and Durand, P.: Dry-season length and runoff control annual variability in stream DOC dynamics in a small, shallow groundwater-dominated agricultural watershed, *Water Resour. Res.*, 51, 7860–7877, <https://doi.org/10.1002/2015WR017336>, 2015.
- 1405 Inamdar, S. P. and Mitchell, M. J.: Hydrologic and topographic controls on storm-event exports of dissolved organic carbon (DOC) and nitrate across catchment scales, *Water Resources Research*, 42, <https://doi.org/10.1029/2005WR004212>, 2006.
- ISO, E.: 10304-1. Water quality—Determination of dissolved fluoride, chloride, nitrite, orthophosphate, bromide, nitrate and sulfate ions, using liquid chromatography of ions—Part 1: Method for water with low contamination, 33, 1995.
- 1410 Jothityangkoon, C., Sivapalan, M., and Farmer, D. L.: Process controls of water balance variability in a large semi-arid catchment: downward approach to hydrological model development, *Journal of Hydrology*, 254, 174–198, [https://doi.org/10.1016/S0022-1694\(01\)00496-6](https://doi.org/10.1016/S0022-1694(01)00496-6), 2001.
- Kalbitz, K. and Kaiser, K.: Contribution of dissolved organic matter to carbon storage in forest mineral soils, *Journal of Plant Nutrition and Soil Science*, 171, 52–60, <https://doi.org/10.1002/jpln.200700043>, 2008.
- 1415 Kavetski, D., Fenicia, F., Reichert, P., and Albert, C.: Signature-Domain Calibration of Hydrological Models Using Approximate Bayesian Computation: Theory and Comparison to Existing Applications, *Water Resources Research*, 54, 4059–4083, <https://doi.org/10.1002/2017WR020528>, 2018.
- 1420 Kirchner, J. W.: Getting the right answers for the right reasons: Linking measurements, analyses, and models to advance the science of hydrology: GETTING THE RIGHT ANSWERS FOR THE RIGHT REASONS, *Water Resour. Res.*, 42, <https://doi.org/10.1029/2005WR004362>, 2006.
- Kirchner, J. W., Feng, X., and Neal, C.: Catchment-scale advection and dispersion as a mechanism for fractal scaling in stream tracer concentrations, *Journal of Hydrology*, 254, 82–101, [https://doi.org/10.1016/S0022-1694\(01\)00487-5](https://doi.org/10.1016/S0022-1694(01)00487-5), 2001.
- 1425 Kirchner, J. W., Tetzlaff, D., and Soulsby, C.: Comparing chloride and water isotopes as hydrological tracers in two Scottish catchments, *Hydrological Processes*, 24, 1631–1645, <https://doi.org/10.1002/hyp.7676>, 2010.
- Knapp, J. L. A., von Freyberg, J., Studer, B., Kiewiet, L., and Kirchner, J. W.: Concentration–discharge relationships vary among hydrological events, reflecting differences in event characteristics, *Hydrology and Earth System Sciences*, 24, 2561–2576, <https://doi.org/10.5194/hess-24-2561-2020>, 2020.
- 1430 Koch, J. C., Runkel, R. L., Striegl, R., and McKnight, D. M.: Hydrologic controls on the transport and cycling of carbon and nitrogen in a boreal catchment underlain by continuous permafrost, *Journal of Geophysical Research: Biogeosciences*, 118, 698–712, <https://doi.org/10.1002/jgrg.20058>, 2013.
- Köhler, S., Buffam, I., Jonsson, A., and Bishop, K.: Photochemical and microbial processing of stream and soil water dissolved organic matter in a boreal forested catchment in northern Sweden, *Aquat. Sci.*, 64, 269–281, <https://doi.org/10.1007/s00027-002-8071-z>, 2002.
- 1435 Kreye, P., Gelleszun, M., and Meon, G.: Parameter identification in hydrological models using groundwater-level measurements and satellite-based soil moisture, *Hydrological Sciences Journal*, 64, 633–652, <https://doi.org/10.1080/02626667.2019.1599120>, 2019.

- 1440 Kunnath-Poovakka, A., Ryu, D., Renzullo, L. J., and George, B.: The efficacy of calibrating hydrologic model using remotely sensed evapotranspiration and soil moisture for streamflow prediction, *Journal of Hydrology*, 535, 509–524, <https://doi.org/10.1016/j.jhydrol.2016.02.018>, 2016.
- Kuppel, S., Tetzlaff, D., Maneta, M. P., and Soulsby, C.: EcH₂O-iso 1.0: water isotopes and age tracking in a process-based, distributed ecohydrological model, *Geoscientific Model Development*, 11, 3045–3069, <https://doi.org/10.5194/gmd-11-3045-2018>, 2018a.
- 1445 Kuppel, S., Tetzlaff, D., Maneta, M. P., and Soulsby, C.: What can we learn from multi-data calibration of a process-based ecohydrological model?, *Environmental Modelling & Software*, 101, 301–316, <https://doi.org/10.1016/j.envsoft.2018.01.001>, 2018b.
- Lambert, T., Pierson-Wickmann, A.-C., Gruau, G., Jaffrezic, A., Petitjean, P., Thibault, J.-N., and Jeanneau, L.: Hydrologically driven seasonal changes in the sources and production mechanisms of dissolved organic carbon in a small lowland catchment, *Water Resources Research*, 49, 5792–5803, <https://doi.org/10.1002/wrcr.20466>, 2013.
- 1450 Lambert, T., Pierson-Wickmann, A.-C., Gruau, G., Jaffrezic, A., Petitjean, P., Thibault, J. N., and Jeanneau, L.: DOC sources and DOC transport pathways in a small headwater catchment as revealed by carbon isotope fluctuation during storm events, *Biogeosciences*, 11, 3043–3056, <https://doi.org/10.5194/bg-11-3043-2014>, 2014.
- 1455 Lan, T., Lin, K., Xu, C.-Y., Tan, X., and Chen, X.: Dynamics of hydrological-model parameters: mechanisms, problems and solutions, *Hydrol. Earth Syst. Sci.*, 24, 1347–1366, <https://doi.org/10.5194/hess-24-1347-2020>, 2020.
- Le Moine, N., Andréassian, V., Perrin, C., and Michel, C.: How can rainfall-runoff models handle intercatchment groundwater flows? Theoretical study based on 1040 French catchments, *Water Resources Research*, 43, <https://doi.org/10.1029/2006WR005608>, 2007.
- 1460 López López, P., Sutanudjaja, E. H., Schellekens, J., Sterk, G., and Bierkens, M. F. P.: Calibration of a large-scale hydrological model using satellite-based soil moisture and evapotranspiration products, *Hydrology and Earth System Sciences*, 21, 3125–3144, <https://doi.org/10.5194/hess-21-3125-2017>, 2017.
- McMillan, H., Tetzlaff, D., Clark, M., and Soulsby, C.: Do time-variable tracers aid the evaluation of hydrological model structure? A multimodel approach, *Water Resources Research*, 48, <https://doi.org/10.1029/2011WR011688>, 2012.
- 1465 Medici, C., Wade, A. J., and Francés, F.: Does increased hydrochemical model complexity decrease robustness?, *Journal of Hydrology*, 440–441, 1–13, <https://doi.org/10.1016/j.jhydrol.2012.02.047>, 2012.
- Minville, M., Cartier, D., Guay, C., Leclaire, L.-A., Audet, C., Le Digabel, S., and Merleau, J.: Improving process representation in conceptual hydrological model calibration using climate simulations, *Water Resour. Res.*, 50, 5044–5073, <https://doi.org/10.1002/2013WR013857>, 2014.
- 1470 Moazenzadeh, R. and Izady, A.: A hybrid calibration method for improving hydrological systems using ground-based and remotely-sensed observations, *Journal of Hydrology*, 615, 128688, <https://doi.org/10.1016/j.jhydrol.2022.128688>, 2022.
- 1475 Molenat, J., Gascuel, C., Davy, P., and Durand, P.: How to model shallow water-table depth variations: the case of the Kervidy-Naizin catchment -France, *Hydrological Processes*, 19, 901–920, <https://doi.org/10.1002/hyp.5546>, 2005.
- Molenat, J., Gascuel-Odoux, C., Ruiz, L., and Gruau, G.: Role of water table dynamics on stream nitrate export and concentration in agricultural headwater catchment (France), *Journal of Hydrology*, 348, 363–378, <https://doi.org/10.1016/j.jhydrol.2007.10.005>, 2008.
- 1480 Monteil, C., Zaoui, F., Le Moine, N., and Hendrickx, F.: Multi-objective calibration by combination of stochastic and gradient-like parameter generation rules – the caRamel algorithm, *Hydrol. Earth Syst. Sci.*, 24, 3189–3209, <https://doi.org/10.5194/hess-24-3189-2020>, 2020.
- Morel, B., Durand, P., Jaffrezic, A., Gruau, G., and Molenat, J.: Sources of dissolved organic carbon during stormflow in a headwater agricultural catchment, *Hydrol. Process.*, 23, 2888–2901, <https://doi.org/10.1002/hyp.7379>, 2009.

- 1485 Moriasi, D. N., Arnold, J. G., Van Liew, M. W., Bingner, R. L., Harmel, R. D., and Veith, T. L.: Model evaluation guidelines for systematic quantification of accuracy in watershed simulations, *Transactions of the ASABE*, 2007.
- Mostafaie, A., Forootan, E., Safari, A., and Schumacher, M.: Comparing multi-objective optimization techniques to calibrate a conceptual hydrological model using in situ runoff and daily GRACE data, *Comput Geosci*, 22, 789–814, <https://doi.org/10.1007/s10596-018-9726-8>, 2018.
- 1490 Moussa, R., Chahinian, N., and Bocquillon, C.: Distributed hydrological modelling of a Mediterranean mountainous catchment – Model construction and multi-site validation, *Journal of Hydrology*, 337, 35–51, <https://doi.org/10.1016/j.jhydrol.2007.01.028>, 2007.
- Musolff, A., Fleckenstein, J. H., Rao, P. S. C., and Jawitz, J. W.: Emergent archetype patterns of coupled hydrologic and biogeochemical responses in catchments: Emergence of Archetype C-Q Patterns, *Geophys. Res. Lett.*, 44, 4143–4151, <https://doi.org/10.1002/2017GL072630>, 2017.
- 1495 Nash, J. E. and Sutcliffe, J. V.: River flow forecasting through conceptual models part I — A discussion of principles, *Journal of Hydrology*, 10, 282–290, [https://doi.org/10.1016/0022-1694\(70\)90255-6](https://doi.org/10.1016/0022-1694(70)90255-6), 1970.
- Nijzink, R. C., Almeida, S., Pechlivanidis, I. G., Capell, R., Gustafssons, D., Arheimer, B., Parajka, J., Freer, J., Han, D., Wagener, T., van Nooijen, R. R. P., Savenije, H. H. G., and Hrachowitz, M.: Constraining Conceptual Hydrological Models With Multiple Information Sources, *Water Resources Research*, 54, 8332–8362, <https://doi.org/10.1029/2017WR021895>, 2018.
- 1500 Nossent, J., Elsen, P., and Bauwens, W.: Sobol’ sensitivity analysis of a complex environmental model, *Environmental Modelling & Software*, 26, 1515–1525, <https://doi.org/10.1016/j.envsoft.2011.08.010>, 2011.
- Pelletier, A. and Andréassian, V.: On constraining a lumped hydrological model with both piezometry and streamflow: results of a large sample evaluation, *Hydrol. Earth Syst. Sci.*, 26, 2733–2758, <https://doi.org/10.5194/hess-26-2733-2022>, 2022.
- 1505 Penman, H. L.: Estimating evaporation, *Eos, Transactions American Geophysical Union*, 37, 43–50, <https://doi.org/10.1029/TR037i001p00043>, 1956.
- Pesántez, J., Birkel, C., Mosquera, G. M., Célleri, R., Contreras, P., Cárdenas, I., and Crespo, P.: Bridging the gap from hydrological to biogeochemical processes using tracer-aided hydrological models in a tropical montane ecosystem, *Journal of Hydrology*, 619, 129328, <https://doi.org/10.1016/j.jhydrol.2023.129328>, 2023.
- 1510 Pettersson, A., Arheimer, B., and Johansson, B.: Nitrogen Concentrations Simulated with HBV-N: New Response Function and Calibration Strategy, *Hydrology Research*, 32, 227–248, <https://doi.org/10.2166/nh.2001.0014>, 2001.
- 1515 Piovano, T. I., Tetzlaff, D., Carey, S. K., Shatilla, N. J., Smith, A., and Soulsby, C.: Spatially distributed tracer-aided runoff modelling and dynamics of storage and water ages in a permafrost-influenced catchment, *Hydrol. Earth Syst. Sci.*, 23, 2507–2523, <https://doi.org/10.5194/hess-23-2507-2019>, 2019.
- Rajat and Athira, P.: Calibration of hydrological models considering process interdependence: A case study of SWAT model, *Environmental Modelling & Software*, 144, 105131, <https://doi.org/10.1016/j.envsoft.2021.105131>, 2021.
- 1520 Rajib, M. A., Merwade, V., and Yu, Z.: Multi-objective calibration of a hydrologic model using spatially distributed remotely sensed/in-situ soil moisture, *Journal of Hydrology*, 536, 192–207, <https://doi.org/10.1016/j.jhydrol.2016.02.037>, 2016.
- 1525 Rakovec, O., Kumar, R., Mai, J., Cuntz, M., Thober, S., Zink, M., Attinger, S., Schäfer, D., Schrön, M., and Samaniego, L.: Multiscale and Multivariate Evaluation of Water Fluxes and States over European River Basins, *Journal of Hydrometeorology*, 17, 287–307, <https://doi.org/10.1175/JHM-D-15-0054.1>, 2016.
- Raymond, P. A. and Saiers, J. E.: Event controlled DOC export from forested watersheds, *Biogeochemistry*, 100, 197–209, <https://doi.org/10.1007/s10533-010-9416-7>, 2010.

- 1530 Reed, P. and Devireddy, V.: Groundwater monitoring design: a case study combining epsilon dominance archiving and automatic parameterization for the nsga-ii, in: *Applications of Multi-Objective Evolutionary Algorithms*, vol. Volume 1, WORLD SCIENTIFIC, 79–100, https://doi.org/10.1142/9789812567796_0004, 2004.
- Reusser, D. E., Buytaert, W., and Zehe, E.: Temporal dynamics of model parameter sensitivity for computationally expensive models with the Fourier amplitude sensitivity test: TEMPORAL DYNAMICS OF MODEL PARAMETER SENSITIVITY, *Water Resour. Res.*, 47, <https://doi.org/10.1029/2010WR009947>, 2011.
- 1535 Riboust, P., Thirel, G., Moine, N. L., and Ribstein, P.: Revisiting a Simple Degree-Day Model for Integrating Satellite Data: Implementation of Swe-Sca Hystereses, *Journal of Hydrology and Hydromechanics*, 67, 70–81, <https://doi.org/10.2478/johh-2018-0004>, 2019.
- 1540 Rinaldo, A., Benettin, P., Harman, C. J., Hrachowitz, M., McGuire, K. J., van der Velde, Y., Bertuzzo, E., and Botter, G.: Storage selection functions: A coherent framework for quantifying how catchments store and release water and solutes: ON STORAGE SELECTION FUNCTIONS, *Water Resour. Res.*, 51, 4840–4847, <https://doi.org/10.1002/2015WR017273>, 2015.
- 1545 Salmon-Monviola, J., Moreau, P., Benhamou, C., Durand, P., Merot, P., Oehler, F., and Gascuel-Oudou, C.: Effect of climate change and increased atmospheric CO₂ on hydrological and nitrogen cycling in an intensive agricultural headwater catchment in western France, *Climatic Change*, 120, 433–447, <https://doi.org/10.1007/s10584-013-0828-y>, 2013.
- Saltelli, A.: Making best use of model evaluations to compute sensitivity indices, *Computer Physics Communications*, 145, 280–297, [https://doi.org/10.1016/S0010-4655\(02\)00280-1](https://doi.org/10.1016/S0010-4655(02)00280-1), 2002.
- Saltelli, A. and Annoni, P.: How to avoid a perfunctory sensitivity analysis, *Environmental Modelling & Software*, 25, 1508–1517, <https://doi.org/10.1016/j.envsoft.2010.04.012>, 2010.
- 1550 Saltelli, A., Tarantola, S., and Chan, K. P.-S.: A Quantitative Model-Independent Method for Global Sensitivity Analysis of Model Output, *Technometrics*, 41, 39–56, <https://doi.org/10.1080/00401706.1999.10485594>, 1999.
- Saltelli, A., Chan, and Scott: *Sensitivity Analysis*, 2009.
- 1555 Sawicz, K., Wagener, T., Sivapalan, M., Troch, P. A., and Carrillo, G.: Catchment classification: empirical analysis of hydrologic similarity based on catchment function in the eastern USA, *Hydrology and Earth System Sciences*, 15, 2895–2911, <https://doi.org/10.5194/hess-15-2895-2011>, 2011.
- Seibert, J.: Multi-criteria calibration of a conceptual runoff model using a genetic algorithm, *Hydrol. Earth Syst. Sci.*, 4, 215–224, <https://doi.org/10.5194/hess-4-215-2000>, 2000.
- Seibert, J., Rodhe, A., and Bishop, K.: Simulating interactions between saturated and unsaturated storage in a conceptual runoff model, *Hydrol. Process.*, 17, 379–390, <https://doi.org/10.1002/hyp.1130>, 2003.
- 1560 Seibert, J., Grabs, T., Köhler, S., Laudon, H., Winterdahl, M., and Bishop, K.: Linking soil- and stream-water chemistry based on a Riparian Flow-Concentration Integration Model, *Hydrology and Earth System Sciences*, 13, 2287–2297, <https://doi.org/10.5194/hess-13-2287-2009>, 2009.
- 1565 Shah, S., Duan, Z., Song, X., Li, R., Mao, H., Liu, J., Ma, T., and Wang, M.: Evaluating the added value of multi-variable calibration of SWAT with remotely sensed evapotranspiration data for improving hydrological modeling, *Journal of Hydrology*, 603, 127046, <https://doi.org/10.1016/j.jhydrol.2021.127046>, 2021.
- Shang, P., Lu, Y., Du, Y., Jaffé, R., Findlay, R. H., and Wynn, A.: Climatic and watershed controls of dissolved organic matter variation in streams across a gradient of agricultural land use, *Science of The Total Environment*, 612, 1442–1453, <https://doi.org/10.1016/j.scitotenv.2017.08.322>, 2018.
- 1570 Shin, M.-J. and Kim, C.-S.: Assessment of the suitability of rainfall–runoff models by coupling performance statistics and sensitivity analysis, *Hydrology Research*, 48, <https://doi.org/10.2166/nh.2016.129>, 2017.
- Silvestro, F., Gabellani, S., Rudari, R., Delogu, F., Laiolo, P., and Boni, G.: Uncertainty reduction and parameter estimation of a distributed hydrological model with ground and remote-sensing data, *Hydrology and Earth System Sciences*, 19, 1727–1751, <https://doi.org/10.5194/hess-19-1727-2015>, 2015.

- 1575 Song, X., Zhang, J., Zhan, C., Xuan, Y., Ye, M., and Xu, C.: Global sensitivity analysis in hydrological modeling: Review of concepts, methods, theoretical framework, and applications, *Journal of Hydrology*, 523, 739–757, <https://doi.org/10.1016/j.jhydrol.2015.02.013>, 2015.
- Stadnyk, T. A. and Holmes, T. L.: Large scale hydrologic and tracer aided modelling: A review, *Journal of Hydrology*, 618, 129177, <https://doi.org/10.1016/j.jhydrol.2023.129177>, 2023.
- 1580 Strohmenger, L., Fovet, O., Akkal-Corfini, N., Dupas, R., Durand, P., Faucheux, M., Gruau, G., Hamon, Y., Jaffrezic, A., Minaudo, C., Petitjean, P., and Gascuel-Oudou, C.: Multitemporal Relationships Between the Hydroclimate and Exports of Carbon, Nitrogen, and Phosphorus in a Small Agricultural Watershed, *Water Resour. Res.*, 56, <https://doi.org/10.1029/2019WR026323>, 2020.
- 1585 Strohmenger, L., Fovet, O., Hrachowitz, M., Salmon-Monviola, J., and Gascuel-Oudou, C.: Is a simple model based on two mixing reservoirs able to reproduce the intra-annual dynamics of DOC and NO₃ stream concentrations in an agricultural headwater catchment?, *Science of The Total Environment*, 794, 148715, <https://doi.org/10.1016/j.scitotenv.2021.148715>, 2021.
- Sun, X., Croke, B., Jakeman, A., and Roberts, S.: Benchmarking Active Subspace methods of global sensitivity analysis against variance-based Sobol' and Morris methods with established test functions, *Environmental Modelling & Software*, 149, 105310, <https://doi.org/10.1016/j.envsoft.2022.105310>, 2022.
- 1590 Sutanudjaja, E. H., van Beek, L. P. H., de Jong, S. M., van Geer, F. C., and Bierkens, M. F. P.: Calibrating a large-extent high-resolution coupled groundwater-land surface model using soil moisture and discharge data: CALIBRATING GROUNDWATER-LAND SURFACE MODEL, *Water Resour. Res.*, 50, 687–705, <https://doi.org/10.1002/2013WR013807>, 2014.
- 1595 Taylor, P. G. and Townsend, A. R.: Stoichiometric control of organic carbon–nitrate relationships from soils to the sea, *Nature*, 464, 1178–1181, <https://doi.org/10.1038/nature08985>, 2010.
- Thomas, Z., Abbott, B. W., Troccaz, O., Baudry, J., and Pinay, G.: Proximate and ultimate controls on carbon and nutrient dynamics of small agricultural catchments, *Biogeosciences*, 13, 1863–1875, <https://doi.org/10.5194/bg-13-1863-2016>, 2016.
- 1600 Tong, R., Parajka, J., Salentinig, A., Pfeil, I., Komma, J., Széles, B., Kubáň, M., Valent, P., Vreugdenhil, M., Wagner, W., and Blöschl, G.: The value of ASCAT soil moisture and MODIS snow cover data for calibrating a conceptual hydrologic model, *Hydrology and Earth System Sciences*, 25, 1389–1410, <https://doi.org/10.5194/hess-25-1389-2021>, 2021.
- 1605 Viaud, V., Santillán-Carvantes, P., Akkal-Corfini, N., Le Guillou, C., Prévost-Bouré, N. C., Ranjard, L., and Menasseri-Aubry, S.: Landscape-scale analysis of cropping system effects on soil quality in a context of crop-livestock farming, *Agriculture, Ecosystems & Environment*, 265, 166–177, <https://doi.org/10.1016/j.agee.2018.06.018>, 2018.
- Wang, A. and Solomatine, D. P.: Practical Experience of Sensitivity Analysis: Comparing Six Methods, on Three Hydrological Models, with Three Performance Criteria, *Water*, 11, 1062, <https://doi.org/10.3390/w11051062>, 2019.
- 1610 Wang, S., Zhang, Z., Sun, G., Strauss, P., Guo, J., Tang, Y., and Yao, A.: Multi-site calibration, validation, and sensitivity analysis of the MIKE SHE Model for a large watershed in northern China, *Hydrology and Earth System Sciences*, 16, 4621–4632, <https://doi.org/10.5194/hess-16-4621-2012>, 2012.
- Werth, S. and Güntner, A.: Calibration analysis for water storage variability of the global hydrological model WGHM, *Hydrology and Earth System Sciences*, 14, 59–78, <https://doi.org/10.5194/hess-14-59-2010>, 2010.
- 1615 Winter, C., Lutz, S. R., Musolff, A., Kumar, R., Weber, M., and Fleckenstein, J. H.: Disentangling the Impact of Catchment Heterogeneity on Nitrate Export Dynamics From Event to Long-Term Time Scales, *Water Resources Research*, 57, e2020WR027992, <https://doi.org/10.1029/2020WR027992>, 2021.
- 1620 Woodward, S. J. R., Stenger, R., and Bidwell, V. J.: Dynamic analysis of stream flow and water chemistry to infer subsurface water and nitrate fluxes in a lowland dairying catchment, *Journal of Hydrology*, 505, 299–311, <https://doi.org/10.1016/j.jhydrol.2013.07.044>, 2013a.

- Woodward, S. J. R., Stenger, R., and Bidwell, V. J.: Dynamic analysis of stream flow and water chemistry to infer subsurface water and nitrate fluxes in a lowland dairying catchment, *Journal of Hydrology*, 505, 299–311, <https://doi.org/10.1016/j.jhydrol.2013.07.044>, 2013b.
- 1625 Woodward, S. J. R., Wöhling, T., Rode, M., and Stenger, R.: Predicting nitrate discharge dynamics in mesoscale catchments using the lumped StreamGEM model and Bayesian parameter inference, *Journal of Hydrology*, 552, 684–703, <https://doi.org/10.1016/j.jhydrol.2017.07.021>, 2017.
- WRB, I.-W.: World reference base for soil resources, *World soil resources reports*, 103, 1–128, 2006.
- 1630 Yadav, M., Wagener, T., and Gupta, H.: Regionalization of constraints on expected watershed response behavior for improved predictions in ungauged basins, *Advances in Water Resources*, 30, 1756–1774, <https://doi.org/10.1016/j.advwatres.2007.01.005>, 2007.
- Yang, H., Choi, H., and Lim, H.: Applicability Assessment of Estimation Methods for Baseflow Recession Constants in Small Forest Catchments, *Water*, 10, 1074, <https://doi.org/10.3390/w10081074>, 2018.
- 1635 Yassin, F., Razavi, S., Wheeler, H., Sapriza-Azuri, G., Davison, B., and Pietroniro, A.: Enhanced identification of a hydrologic model using streamflow and satellite water storage data: A multicriteria sensitivity analysis and optimization approach, *Hydrological Processes*, 31, 3320–3333, <https://doi.org/10.1002/hyp.11267>, 2017.
- Yen, H., Bailey, R. T., Arabi, M., Ahmadi, M., White, M. J., and Arnold, J. G.: The Role of Interior Watershed Processes in Improving Parameter Estimation and Performance of Watershed Models, *Journal of Environmental Quality*, 43, 1601–1613, <https://doi.org/10.2134/jeq2013.03.0110>, 2014.
- 1640 Yeste, P., Melsen, L. A., García-Valdecasas Ojeda, M., Gámiz-Fortis, S. R., Castro-Díez, Y., and Esteban-Parra, M. J.: A Pareto-Based Sensitivity Analysis and Multiobjective Calibration Approach for Integrating Streamflow and Evaporation Data, *Water Resources Research*, 59, e2022WR033235, <https://doi.org/10.1029/2022WR033235>, 2023.