

Mapping groundwater dependent ecosystems using a high-resolution global groundwater model

Nicole Gyakowah Otoo¹, Edwin H. Sutanudjaja¹, Michelle T. H. van Vliet¹, Aafke M. Schipper^{2,3}, Marc F. P. Bierkens^{1,4}

¹Department of Physical Geography, Utrecht University, The Netherlands

5 ²Radboud University, Radboud Institute for Biological and Environmental Sciences (RIBES), Nijmegen, The Netherlands

³PBL Netherlands Environmental Assessment Agency, The Hague, The Netherlands

⁴Unit Subsurface & Groundwater Systems, Deltares, Utrecht, the Netherlands

Correspondence to: Nicole Gyakowah Otoo (n.g.otoo@uu.nl)

Abstract.

10 Global population growth, economic growth, and climate change have led to a decline in groundwater resources, which are essential for sustaining groundwater dependent ecosystems (GDEs). To understand their spatial and temporal dependency on groundwater, we developed a framework for mapping GDEs at a large scale, using results from a high-resolution global groundwater model. To evaluate the proposed framework, we focus on the Australian continent because of the abundance of groundwater depth observations and the presence of a GDE atlas. We first classify GDEs into three categories: aquatic
15 (focussing on rivers-and-lakes), wetlands (inland wetlands), and terrestrial (phreatophyte) GDEs. We then define a set of rules for identifying these different ecosystems, ~~which are~~ based on, among others, ~~on~~ groundwater levels, and groundwater discharge. We run the groundwater model in both steady state and transient mode (period of 1979--2019) and apply the set of rules to map the different types of GDEs using model outputs. For the steady-state, ~~GDEs are mapped based on~~ we map the presence ~~or~~ and absence of GDEs, and evaluate results ~~are evaluated~~ against the Australian GDE atlas using a hit rate, false
20 alarm, and critical success index: derived from hit rate, false alarm rate and missing rate. Results show a hit rate and a critical success index (CSI) above 80% for each of the three GDE types. From transient runs, we analyse the changes in groundwater dependency between two time periods, 1979-1999 and 1999-2019, and observe a decline in the average number of months that GDEs ~~depend on~~ receive groundwater ~~resources~~, pointing at an increasing threat to these ecosystems. The proposed framework and methodology provide a basis for first step towards analysing how global ~~impacts of~~ climate change and water use may
25 affect ~~GDEs~~ GDE extent and health.

1 Introduction

35 Global water consumption has quadrupled in the last century due to population growth and industrialization in areas with limited precipitation and surface water resources, increasing the dependency on groundwater resources (Kummu et al., 2016). In addition, alterations in precipitation and recharge rates due to a changing climate have major impacts on groundwater resources (Cuthbert et al., 2019; Taylor et al., 2013). An increase in groundwater pumping and lower recharge rates have increased the rate of groundwater depletion in several regions globally (Bierkens & Wada, 2019). Overexploitation of

40 groundwater resources by non-renewable groundwater use in areas with low recharge rates leads to a decline in groundwater levels and a reduction of groundwater discharge to groundwater dependent ecosystems (GDEs) (Kløve et al., 2014). GDEs are defined as ecosystems that are reliant on groundwater to maintain their ecological function and structure (~~Murray et al., 2006~~) (~~Kløve et al., 2014~~) (~~Kløve et al., 2014; Murray et al., 2006~~). The ecological integrity of GDEs depends on shallow groundwater levels or groundwater discharge, all year round, seasonally or periodically (Duran-Llacer et al., 2022; Foster et

45 al., 2010). The degree of dependency of GDEs on groundwater varies with ecosystem type, geology, season, aquifer type, flow paths and catchment land use (Tomlinson & Boulton, 2010). In arid and semi-arid regions, groundwater is usually a major source of water for most ecosystems. ~~This dependency of ecosystems on groundwater includes~~ GDE types include surface water systems (aquatic GDEs, which include rivers and lakes) that rely on groundwater discharge (Kløve et al., 2011), and groundwater dependent wetlands and terrestrial ecosystems (e.g. vegetation like phreatophytes) that tap into groundwater as a

50 source of water (Robinson, 1958). ~~It is evident that GDEs and their biodiversity and the ecosystem services they provide are at risk due to unsustainable groundwater extractions (Bierkens & Wada, 2019; Link et al., 2023).~~ It is evident that GDEs and their biodiversity and the ecosystem services they provide are at risk due to unsustainable groundwater extractions . It is, therefore, necessary to implement protection measures through groundwater management policies, such as the extension of buffer zones around

55 groundwater recharge zones and appropriate land management in groundwater capture hotspots (Kløve, Balderacchi, et al., 2014; MacKay, 2006). A critical step towards the large-scale application of these water management strategies is to better understand ~~their~~ the global distribution of GDEs and their response to environmental change. This, in turn, requires delineating the global spatial distribution and extent of GDEs, understanding temporal variations of the dependency of these ecosystems on groundwater and assessing how they are impacted by sectoral groundwater withdrawals.

60 Until the past decade, mapping of GDEs was predominantly done at local scales, through laborious and costly methods that involved long hours of field surveys (Eamus et al., 2006; Hatton & Evans, 1998). More recently, GDEs have also been mapped based on satellite imagery such as MODIS (Castellazzi et al., 2019). Some large-scale satellite imagery-based mapping studies (> 50km) have been done in Chile (Duran-Llacer et al., 2022), Colorado and Nevada (Werstak et al., 2012), California (Howard & Merrifield, 2010), The Netherlands (Bonte et al., 2013; Hoogland et al., 2010), Ireland (Kilroy et al., 2009), South Africa

65 (Münch & Conrad, 2007), Spain (Martínez-Santos et al., 2021; Münch & Conrad, 2007) and Australia (Barron et al., 2014;

Brim Box et al., 2022; Glanville et al., 2016). The first continental mapping was done for Australia (Doody et al., 2017), combining remote sensing, GIS and expert knowledge to create a GDE atlas for the continent.

All the studies mentioned above are static in the sense that they map the spatial distributions of GDEs at a given point ~~(or year)~~ in time. However, to understand the dynamics of these ecosystems, it is essential to develop a method that can ~~simulate~~capture changes over time. The use of machine learning to predict groundwater dependency by ecosystems is a promising tool for spatial simulations. However, little data and an insufficient understanding of catchment-scale dynamics limit the use of machine learning for mapping spatio-temporal GDE dynamics (Xu & Liang, 2021) ~~for mapping spatio-temporal GDE dynamics~~. Process-based groundwater flow models, preferably at high resolution, may be more suitable for spatio-temporal mapping of GDEs, since they enable explicit linkages between GDE expression and groundwater level and groundwater discharges. In addition, process-based groundwater flow models ~~have the potential of~~facilitate scenario analyses, i.e. ~~to~~they can be applied under various assumptions of future changes in climate, land use and human water use, which all may impact future changes in GDE extent (Fatichi et al., 2016). This was first shown globally by De Graaf et al. (2019) ~~using~~, who used a global groundwater model to project changes in groundwater discharge to streamflow. It is also possible to couple a process-based dynamic GDE mapping model to other model types such as a biodiversity or economic models to determine the relationship between GDEs and biodiversity or the values of ecosystem services (Barbarossa et al., 2021; Van Emmerik et al., 2014).


The aim of this research is to explore the potential of mapping the spatio-temporal dynamics of GDEs based on a global groundwater model. This work ~~builds~~expands on the earlier work of De Graaf et al. (2019) in that it considers a wider range of GDEs and uses a much higher resolution groundwater model. We first classify GDEs into aquatic, wetlands and terrestrial vegetation (phreatophytes) ecosystems (section 2.1). We then use a global coupled surface - groundwater model run at 1km resolution in steady state and transient mode (section 2.2) to map the distribution of these three GDE classes in Australia (section 2.3). We also analyze the temporal variations in groundwater contributions for the three different GDE types (section 3). We choose to focus on Australia because of the availability of an existing GDE atlas (Doody et al., 2017) and the abundance of ~~extensive~~ groundwater monitoring data, which enable us to evaluate our method and results. Also, Australia has a large variation in hydro-climatology and topography, which will enable us to understand the potential of our developed framework and methodology in various landscape settings.


2 Data and methodology

This section is divided into subsections highlighting the entire GDE ~~modelling~~mapping framework, which entails model set-up and evaluation, GDE classification and temporal variation analysis. The framework for mapping GDEs is presented in Fig.1. Using this framework, firstly we define the GDE classes (step 1), and then we run the surface-groundwater model and

evaluate the groundwater levels against well observations (step 2). Finally, we use the model output to ~~map and~~ analyze and evaluate the spatio-temporal mapping of the three different classes of GDEs (Step 3).

100

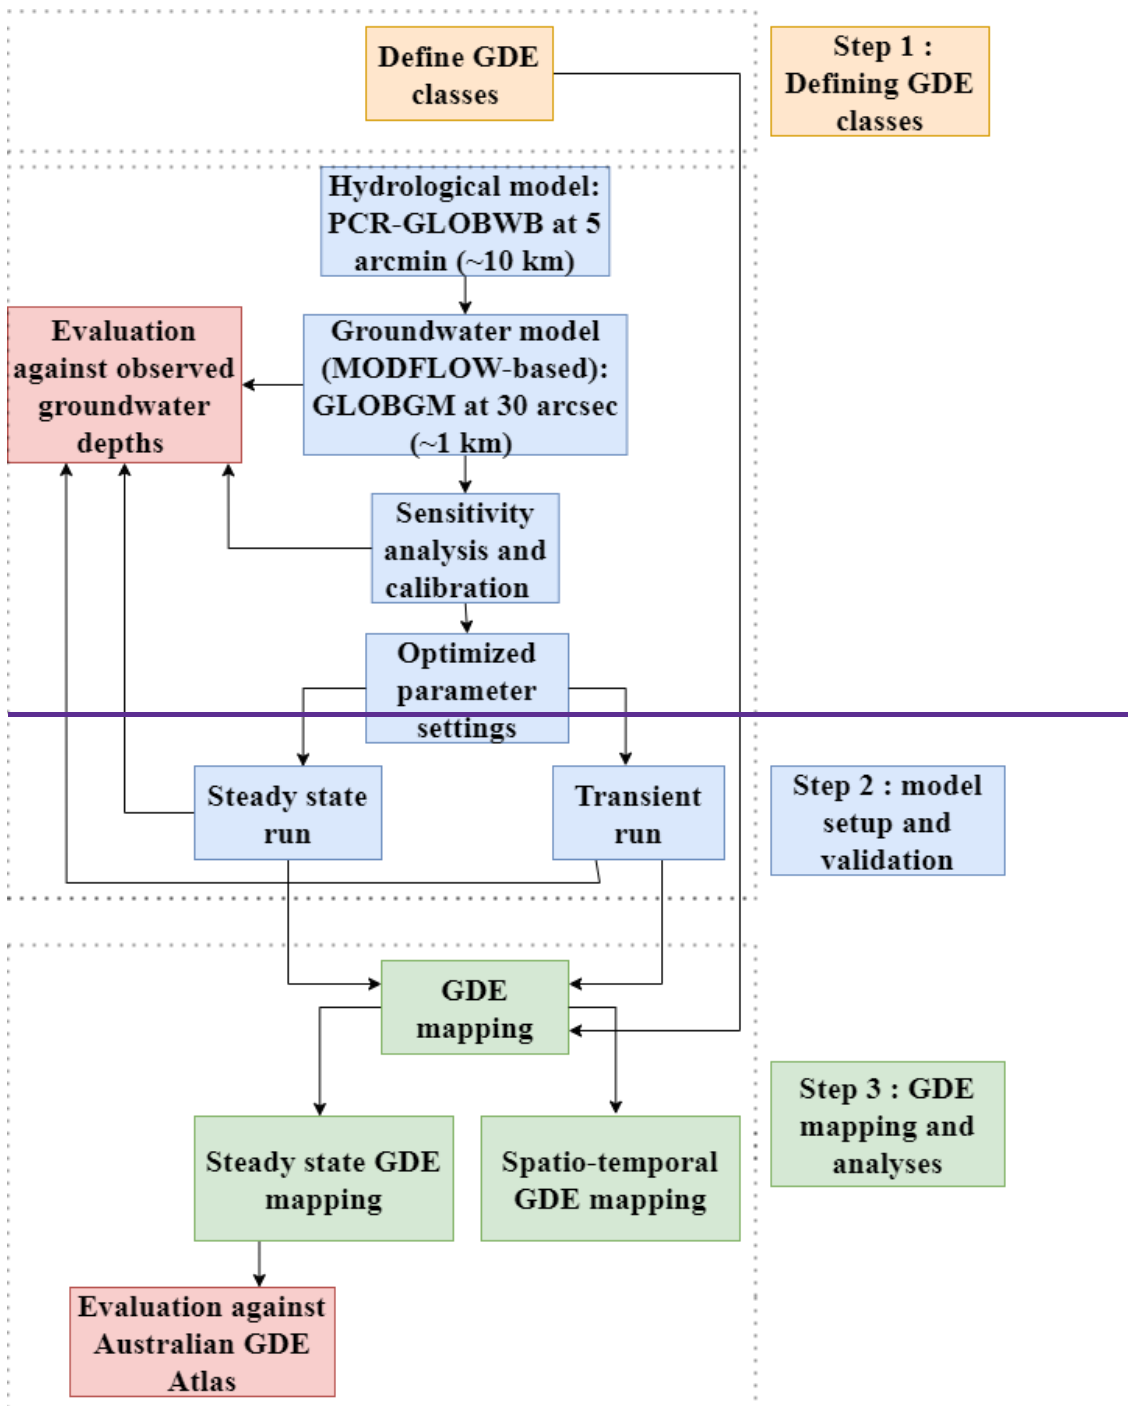

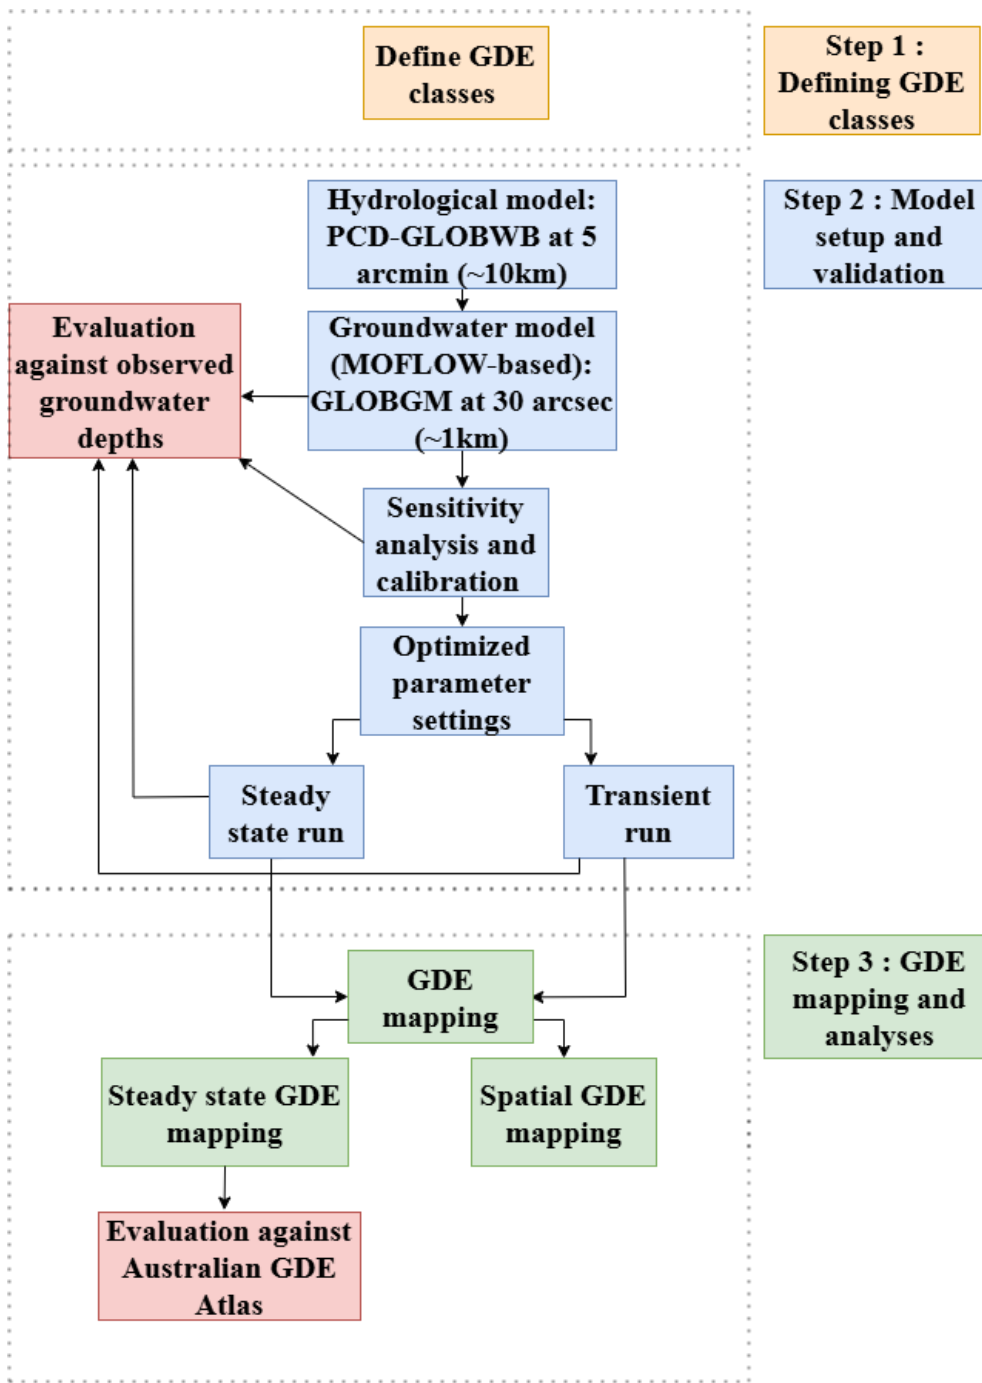

105 **Figure 1: Groundwater dependent ecosystems (GDE) modelling mapping framework using a high-resolution groundwater model.**


2.1 Defining GDE classes (step 1)

We categorize groundwater dependent ecosystems into three classes based on interaction with groundwater (see Figure 2). These include 1) ecosystems that depend on sufficient groundwater discharge (aquatic GDEs such as streams, and rivers and lakes); and; 2) ecosystems that need shallow groundwater tables and soil saturation (wetland GDEs); 3) ecosystems that depend on groundwater for root water uptake (terrestrial GDEs with phreatophyte vegetation). Note that we focus on only inland ecosystems only. In case of aquatic ecosystems, we do not include lakes due to the complexities in determining the contribution of groundwater in lentic systems. Also, note that we focus on inland ecosystems only. Finally, we do not consider subsurface ecosystems that rely on groundwater, such as stygofauna communities (Huggins et al., 2023), because of the complexity of mapping these communities.

For aquatic GDEs, any stream-or lake pixel where the ratio of groundwater discharge (Q_{gw}) to total streamflow (Q) $\frac{Q_{gw}}{Q} > 0$ for more than a month is classified as being groundwater dependent. The rationale behind using groundwater discharge as a metric is that it maintains streamflow during dry spells and due to the relatively constant temperature of groundwater, which modulates stream temperatures during warm periods.

For terrestrial GDEs (phreatophyte vegetation) we assume that any cell with a vegetation type with maximum rooting depth (D_{max}) greater than the groundwater leveldepth of that cell is groundwater dependent, assuming that in this case, the vegetation is able to access groundwater with its deepest roots during dry spells.

We define wetland GDEs based on the fraction of saturated area (soil wetness) and groundwater level. Any cell that has a saturated area fraction (F_{sat}) greater than 50% and a shallow groundwater table (less than 5m) is classified as a wetland GDE. The 5 meter groundwater level threshold was obtained from (Gerla, 1992), while the 50% soil saturation was added to discern dry areas with shallow groundwater levels from actual wetlands that are typically situated in areas with topographic convergence. Note that we can make this classification based on steady state groundwater model results as well as based on transient model results. In the latter case, we assess the “degree of groundwater dependency” for each GDE type identified at a monthly time step.

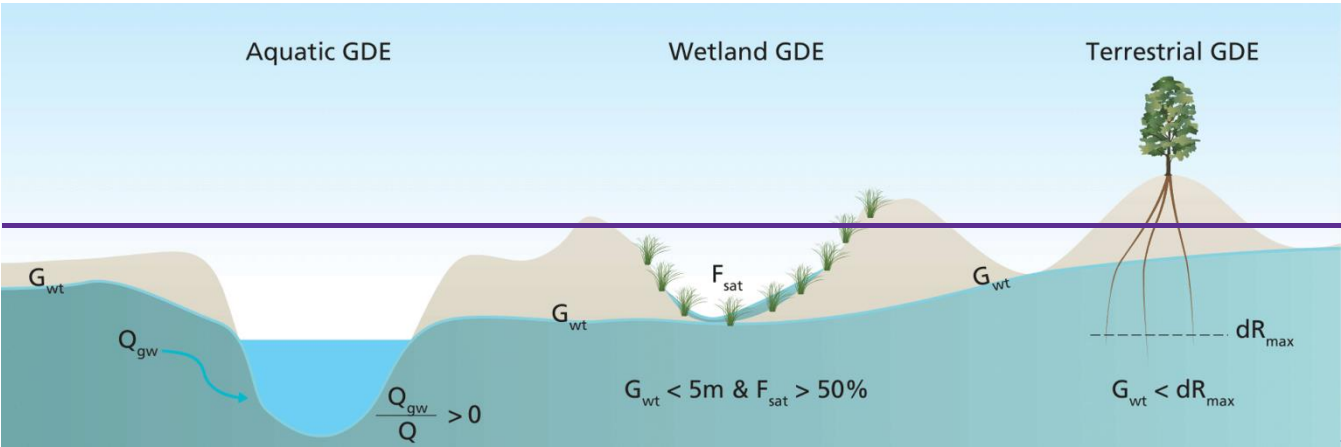

We define wetland GDEs based on the fraction of saturated area (soil wetness) and groundwater level. Any cell that has a saturated area fraction (F_{sat}) greater than 50% and a groundwater table depth less than 5m is classified as a wetland GDE. While groundwater levels closer to the surface (0.5 to 3 meters) support core wetland functions (Eamus et al., 2006; Winter, 1999), wetlands in arid and semi-arid regions can still exhibit groundwater dependence with water table depths up to 5 meters, particularly in peripheral or drought-adapted areas (Stromberg et al., 2010). Hence, the threshold of 5m accommodates both core and peripheral groundwater-supported zones across varied climates. We added the 50% soil saturation threshold to discern dry areas with shallow groundwater levels from actual wetlands, which are typically saturated at the surface. We performed a sensitivity analysis for varying groundwater depth thresholds (1 to 5 m) and saturated area fractions (0.1 to 1.0) with a total of 100 combinations, showing that the threshold of 5 meters produces the highest critical success index when validating against the Australian GDE atlas (See Supplementary Figure S1). In the latter case, we assessed the “degree of groundwater dependency” for each GDE type identified on the basis of a monthly time step (Figure 1).

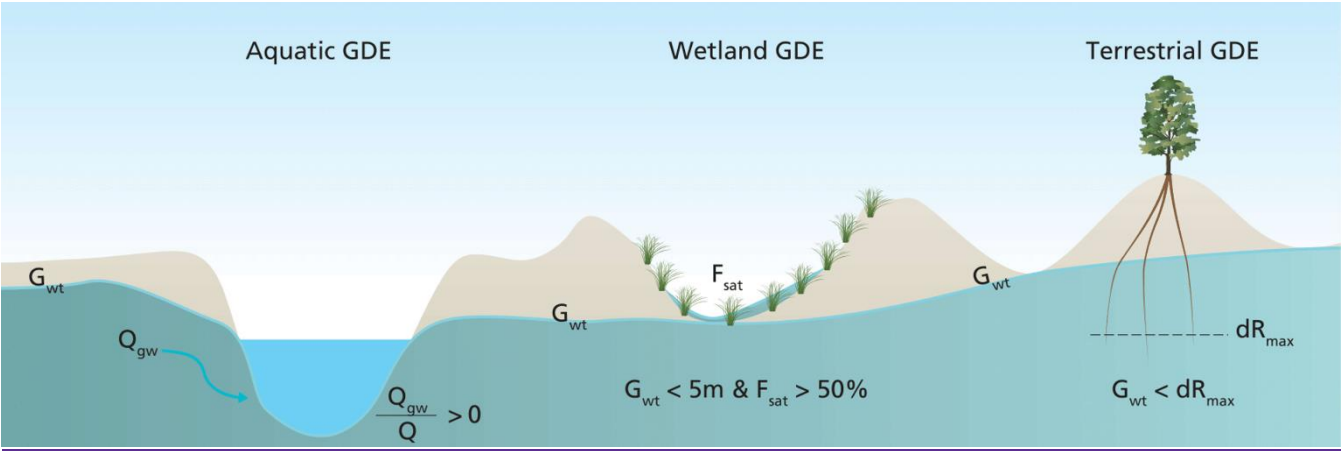


Figure 2: Criteria for defining ecosystem dependency on groundwater dependent ecosystems, with Q_{gw} \equiv local groundwater discharge, Q \equiv accumulated stream flow, G_{wt} = groundwater table depth, F_{sat} = saturated area fraction and dR_{max} = maximum rooting depth.

2.2 Model set-up, sensitivity analysis and output evaluation (step 2)

For this research, we use an integrated hydrological model that consists of two parts. The first part is a global physically-based global hydrology and water resources model (PCR-GLOBWB version 2.0) (Sutanudjaja et al., 2018) that simulates global terrestrial hydrology including the human impacts (dams and human water use). The second is a time-dependent (transient) groundwater flow model, GLOBGM (Verkaik et al., 2022). The two models are linked through a one-way coupling, that is,

155 the outputs of the PCR-GLOBWB model are used as inputs to the groundwater flow model (Sutanudjaja et al., 2011). We first
run the PCR-GLOBWB 2 with ~~theits own~~ default groundwater ~~model~~parameterization and then use the time series outputs for
surface water levels, saturated area fraction, and groundwater recharge as forcing for the groundwater flow model. Model input
parameters and data source references as well as groundwater properties for the model can be found in the supplementary
information (Figures S2 and S3, and Table S1).

160 2.2.1 PCR-GLOBWB

PCR-GLOBWB 2 is a gridded integrated hydrology and water resources model with a latitude-longitude grid of 5 arcminutes
spatial resolution that simulates terrestrial hydrology and human water use at a daily time step. A detailed model description
can be found in Sutanudjaja et al. (2018). PCR-GLOBWB 2 is forced with precipitation, temperature and reference evaporation
based on the W5DE5 meteorological data set (Cucchi et al., 2020; Lange et al., 2021) ~~meteorological data set.~~ Soil parameters
165 are based on the SoilGrids dataset (Hengl et al., 2017). ~~The~~We use the default model settings ~~of~~with four landcover types ~~were~~
~~used~~, aggregating land cover classes into tall natural vegetation, short natural vegetation, non-paddy irrigated crops and paddy
irrigated crops (Sutanudjaja et al., 2018). To simulate variations in the saturated area fraction, we use the improved Arno
Scheme ~~(Todini, 1996)~~(Hagemann & Gates, 2003; Todini, 1996), which is an integral part of PCR-GLOBWB 2 to assess the
area subject to surface runoff, ~~is utilized.~~ PCR-GLOBWB 2 also has an irrigation and water use model that calculates water
170 demand (Wada et al., 2014) and water withdrawal, water consumption and return flows for irrigation and domestic, livestock
and industrial sectors.

2.2.2 Groundwater model

We use ~~at~~the two-layer groundwater model GLOBGM run at 30 arcsec (16 million active cells) to simulate groundwater depths,
groundwater heads and groundwater discharge. The model code that is used is MODFLOW 2005 and the aquifer properties
175 are taken directly from (de Graaf et al., 2017). The groundwater model is forced with surface water levels and net groundwater
recharge (percolation minus capillary rise) over the period 1979-2019 at monthly time steps as obtained from runs with PCR-
GLOBWB 2. For net recharge simple resampling is used, while water levels are computed at 30 arcsecs based on a simple
routing (method of characteristics, for details see Sutanudjaja et al., 2018) of the 5-arcminute specific discharge over a 30-
arcsecond drainage network based on Hydrosheds (Lehner et al., 2008). The steady-state groundwater model is run with
180 average net groundwater recharge and surface water levels over 1979-2019. ~~Consequently~~Subsequently, the transient run
follows with the heads from the steady state run as the initial condition and after a sufficient spinup period of 20 years.

2.2.3 Sensitivity analysis and calibration of groundwater model parameters

With groundwater recharge and boundary conditions as described above, the groundwater model results are possibly sensitive
185 to aquifer transmissivity and storage coefficient, river bed conductance and the thickness of the confining layer, while these
properties are often very uncertain at larger scales (Brunner et al., 2017). We perform a sensitivity analysis using 216 steady-

state simulations varying the following three parameters: riverbed conductance, vertical conductivity of the confining layer (if present) and transmissivity of the confined and unconfined aquifers. We change these parameters independently using a single prefactor k applied to the log-transformed parameter of concern, with $k=1$ the initial value of the parameter taken from De Graaf et al. (2017). See Eq. (1) for an example for the transmissivity:

$$T' = \exp(k \cdot \ln(T)) \quad (1)$$

With T' the perturbed transmissivity ($M^2 d^{-1}$), T the original transmissivity according to De Graaf et al. (2017) and k the prefactor applied.

For each unique parameter combination, we evaluate the biases between the simulated steady state groundwater depth (surface elevation minus hydraulic head in the top layer) and time-averaged observed groundwater depths using data from 15,345 wells recorded from 1970 to 2019 at monthly time step. If there were multiple wells within a 1km cell, we ~~take~~calculate the average of these considering the same year. We then select the best parameter set with the least bias against observed well data and vary the storage coefficient and conduct six transient runs to select the best parameter set for simulating transient groundwater levels. Based on this, we finally select the best parameter set for the GDE mapping.

2.2.4 Evaluation of simulated groundwater depths

We evaluate the transient simulated groundwater depths against observed groundwater well depth time series data (BOM AU,2023). ~~A total of~~We compare 5 million cells with simulated groundwater depths ~~are evaluated against~~with the observed data from 1979 to 2019 in the Australian continent. The metrics used for evaluation are bias (Baker, 1987), Pearson correlation coefficient (Cohen et al., 2009) and relative variance (Grömping, 2007).

2.3 GDE mapping (step 3)

215 2.3.1 Steady-state GDE mapping

After running the model in steady state (average forcing groundwater dependent), we map the three different classes of GDEs according to the classification rules described above (Figure 2). For aquatic GDEs, we derive an aquatic ecosystem dependency ratio to groundwater which is defined as $\frac{Q_{gw}}{Q}$ where Q_{gw} is the local groundwater discharge and Q is the total streamflow.

220 Wetland GDEs are mapped using the groundwater depth from the groundwater model and the average saturated area (1979-2019) from PCR-GLOBWB 2. Terrestrial vegetation GDEs are mapped using the groundwater depth and a rooting depth map (Fan et al., 2017).

After mapping these GDEs in steady state we ~~evaluated~~evaluate the results by comparing these with the GDEs mapped by the Australian GDE Atlas using similarity index metrics. These metrics are the hit rate h (a class is present that is also mapped), false alarm rate f (a class is mapped that is not present) and miss rate m (a class is present that is not mapped). From these
225 metrics, we also calculate the critical success index (CSI) for ~~each~~the mapping of each GDE type, defined as Eq. (2):

$$CSI = \frac{h}{h + f + m} \quad (2)$$

Note that the Australian GDE Atlas distinguished between actually observed GDEs and likely GDEs (Doody et al., 2017), where the latter are mapped based on landcover type. When evaluating the mapping, we did not distinguish between known and likely GDEs, because of the overall good performance in our mapping approach and similarity in the hit-rates between
230 the known and likely GDEs (See Figure S4).

2.3.2 Transient GDE mapping

For the ~~mapping of~~ transient analysis of the GDEs, we use monthly time series of groundwater depth, groundwater discharge ~~and saturated~~ and saturated area fraction from the transient simulation over the period 1979 – 2019. We use the same criteria for mapping GDEs as used for mapping in a steady state and use the extent of the steady state mapped GDEs as a given. Within
235 these areas we ~~then~~ consider the temporal variability in the contribution of groundwater ~~as well~~. For aquatic GDEs we use monthly values of $\frac{Q_{gw}}{Q}$ to classify each month as low-dependent (ratio < 0.25) moderately dependent (ratio between 0.25 and 0.75) and highly dependent (ratio > 0.75) on groundwater. For terrestrial and wetland GDEs, we record the average number of months per year that the system is classified as groundwater dependent. We separately identify these transient GDE measures for two 20-year periods (1-1-1979 to 31-12-1999 and 1-1-2000 ~~to 31-12~~till 01-01-2019) to assess potential changes in the
240 contribution of groundwater between these two time periods.

3. Results

We first present the evaluation of the groundwater model simulations ~~used~~, as a first performance indicator of the proposed GDE mapping methodology (section 3.1). We then evaluate the coincidence of GDE types mapped with the steady-state

groundwater model with GDEs mapped by the Australian GDE atlas (Doody et al., 2017) (section 3.2). Finally, we show the temporal change in the degree of groundwater dependency of the different ~~ecosystem~~GDE classes based on the transient simulations over the period groundwater dependent (section 3.3). ~~Further information on the simulated groundwater levels, evaluation metrics and sensitivity analyses can additionally be found in the S3.~~

3.1 Performance of the groundwater model in simulating groundwater ~~depth~~heads

From the sensitivity analysis and calibration, it turned out that ~~in this case~~ the performance metrics calculated from the groundwater ~~level~~heads observations were rather insensitive to the pre-factors (see Figure ~~S3S5~~). We therefore decided to use the default parameters for further analyses. In general, the cumulative frequency distributions show a good agreement in timing (~ 75 % shows $r > 0.25$). The dissimilarities between the observed and the simulated ~~head is~~heads are due to the bias. Our simulated heads are deeper than the observed, ~~however~~ with ~ 70 % having a bias ranging from 0 to 5 m. Plotting ~~a scatter~~the biases per depth category of the ~~bias against the simulated heads~~observation data (wells) (Figure ~~S4S6~~), we observe a smaller bias for shallower depths compared to the deeper depths. This shows that where it matters for GDEs, ~~(i.e. shallower depths)~~, the biases are also smaller. The relative variance shows an underestimation of groundwater level variation ~~of~~ ~ 80% with a relative variance < 0.6).

The groundwater ~~depth~~head of the first layer as simulated with the steady-state groundwater model and the best parameter set from the sensitivity analyses is shown in ~~Supplementary Information~~ Figure ~~S1S7~~, presenting a ~~high~~wide range in groundwater ~~depth~~heads over Australia (0.25m to >320m). Figure ~~S2S8~~ shows the differences in simulated (steady state) groundwater heads for areas where a confining layer is present. The red areas are those where there is a confining layer and the heads in the aquifer underlying the confining layer are larger than those in the confining layer itself. In these areas, it is possible that deep incising surface waters could receive groundwater discharge from the lower aquifer~~..~~.

Figure 3 shows maps as well as cumulative frequency distributions of the bias (in m; difference in temporal mean ~~depths~~heads: simulated minus observed), Pearson correlation coefficient (between the observed and simulated ~~time series~~groundwater heads over time) and the relative variance (temporal variance of simulated time series divided by the temporal variance of the observed time series). Note that we compared the simulated groundwater depths from layer 1 with all available observation wells. Due to a lack of data on the wells' filter depths, we were not able to exclude the wells with filters in confined aquifers. This will likely have a negative effect on model performance. Results show that the evaluation metrics perform better in Tasmania and areas where the wells are likely not in a confined aquifer, i.e., the red areas in Figure ~~S2S8~~ (with $r > 0.6$, bias ≤ 3 m)).

3.2 Steady state mapping and evaluation of GDEs

To map the locations of GDEs we use the steady-state outputs from our groundwater model. For the aquatic GDEs, we observe that most streams of well-known river basins such as the Darling River depend on groundwater. Quite some vegetation located in dry areas tap into groundwater levels, while wetlands, showing large ranges in size, depend on groundwater predominantly when located close to rivers, likely being wetlands in or nearby floodplains.

Evaluating our mapped GDEs against the Australian GDE atlas [by](#) Doody et al. (2017), we observed a high hit rate ~~and critical success index (CSI)~~ of 87%, 92% and 95% for aquatic, terrestrial and wetland GDEs, respectively (Figure 4). Despite the overall bias observed in the groundwater model (Figure 3), the impact on representing GDEs is limited since this bias is smaller for shallower groundwater levels than for deeper groundwater levels (Figure [S4S6](#)). For the aquatic GDEs, most of the false alarms are in the near coastal areas and ~~also~~ in the Great Artesian basin. We miss some ~~groundwater dependent~~ terrestrial ~~vegetations (phreatophytes)~~GDEs in western Australia due to a lack of good rooting depth data. We also wrongly identify a large area of wetlands in New South Wales.

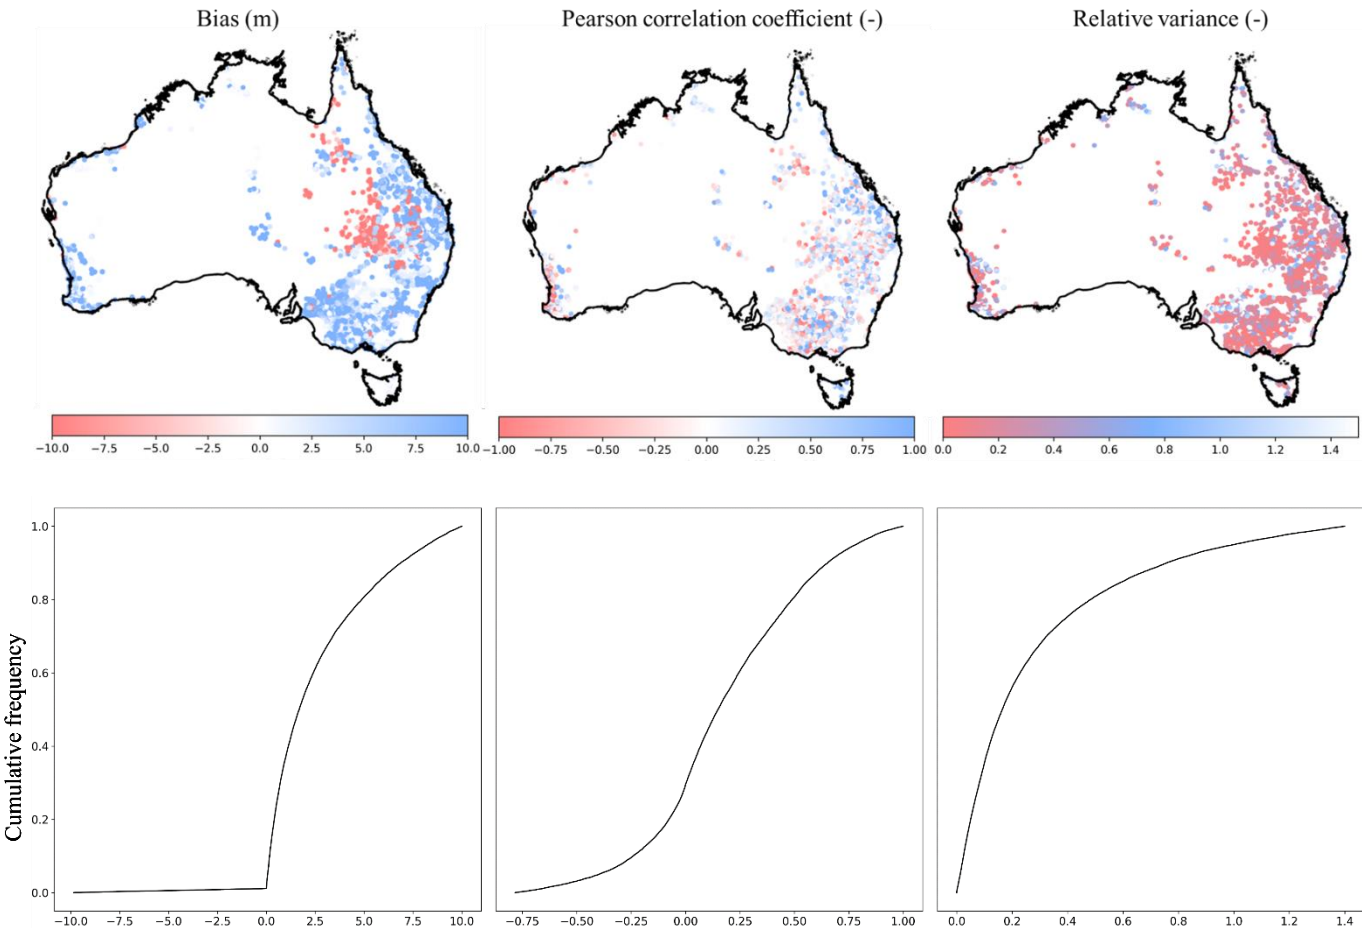


Figure 3: Evaluation statistics of observed groundwater depths against simulated groundwater depthhead; top row: maps with values per observed location; bottom row: associated cumulative frequency distributions; left column: Bias (m); middle column: Pearson correlation coefficient; right column: relative variance. The white areas on the maps are locations without observation data.

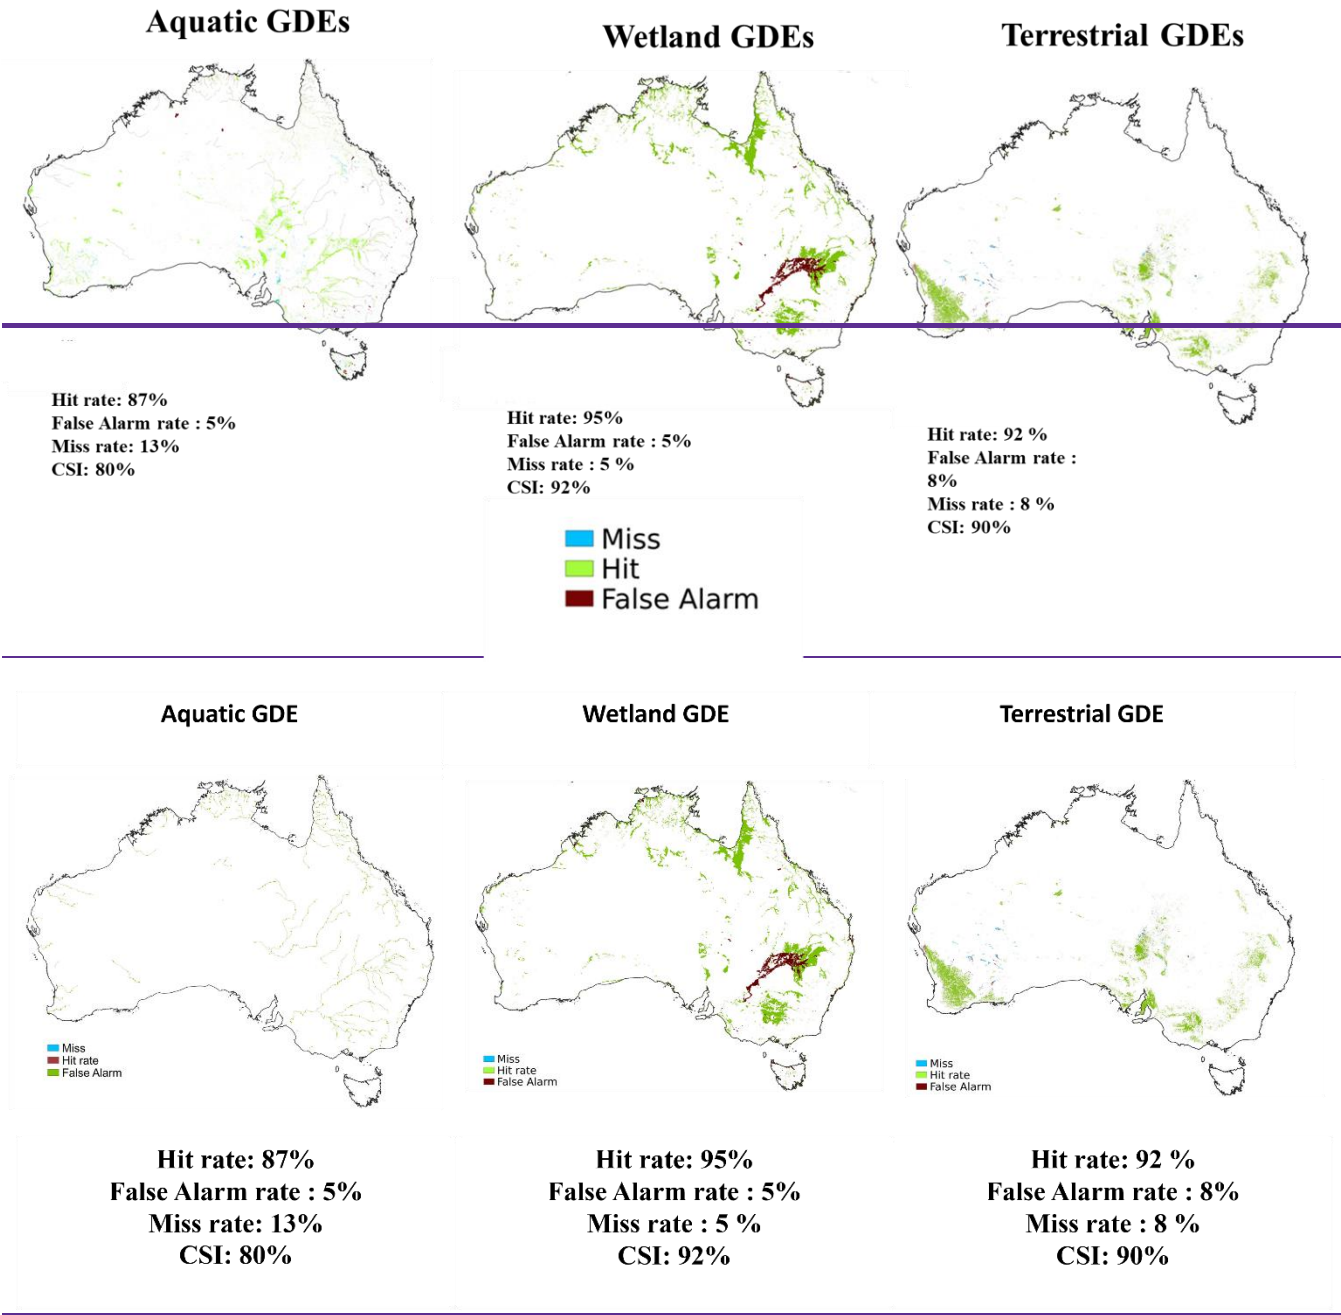



Figure 4: Mapped GDEs based on steady state groundwater model results evaluated against the Australian GDE atlas showing hit rate, false alarm ratiorate, miss rate and the CSI for the three GDE classes. Blue colour represents missed ecosystems, dark red represents false alarm and green represents hit rate.

3.3 Transient GDE mapping

295 To understand how the ~~dependency~~contribution of ~~groundwater to the~~ different ecosystems varied in the past, we divided the simulated periods into two-time intervals (period 1: 1979-2000; period 2: 2001-2019) and estimated for each time interval the average number of months per year that each GDE type relies on groundwater. Next, we calculated the changes in number of months of groundwater dependency: period 2 minus period 1 (Figures 5 and 6). ~~As stated in the Methods, we~~We used the mapped steady state extent as a given for the evaluation of the degree of groundwater influence on GDEs -for the transient runs. In other word, we did not look into extent dynamics.

300 For aquatic GDEs, we assessed temporal ~~dependency~~changes in the different dependency ratio $\frac{Q_{gw}}{Q}$ categories. We observe that there is a decline in the average number of months in all dependency classes ecosystems (Figure 5) and that the decline in groundwater contribution is mostly observed in streams in the Murray Darlin Basin. This is in accordance with the decline in groundwater levels between the two periods in both the simulations and the observations (Figure ~~S5S9~~). It is important to realize that the dependency ratio depends on both the groundwater depth and related groundwater discharge Q_{gw} and the streamflow itself. This is illustrated in Figure 6 that shows simulated time series of $\frac{Q_{gw}}{Q}$, groundwater depth and total streamflow. The figure shows that the groundwater levels are constrained at the top by the drainage system and also shows the intermittent character of the Australian climate, with wet periods alternating with dry periods where groundwater levels decline, and streamflow becomes almost zero. The top figure shows a negative trend in groundwater levels. However, ~~since~~ streamflow is also declining, ~~these offsets~~ offsetting the decline in groundwater discharge, resulting in a smaller negative trend in groundwater dependency $\frac{Q_{gw}}{Q}$. The zoom at the bottom shows the importance of discharge variability. November 2005 and July 2006 show almost the same shallow water table. However, streamflow peaks in November 2005, which makes for a low dependency ratio, while the 2006 streamflow is low in July, making the dependency on groundwater discharge large.

Aquatic GDEs

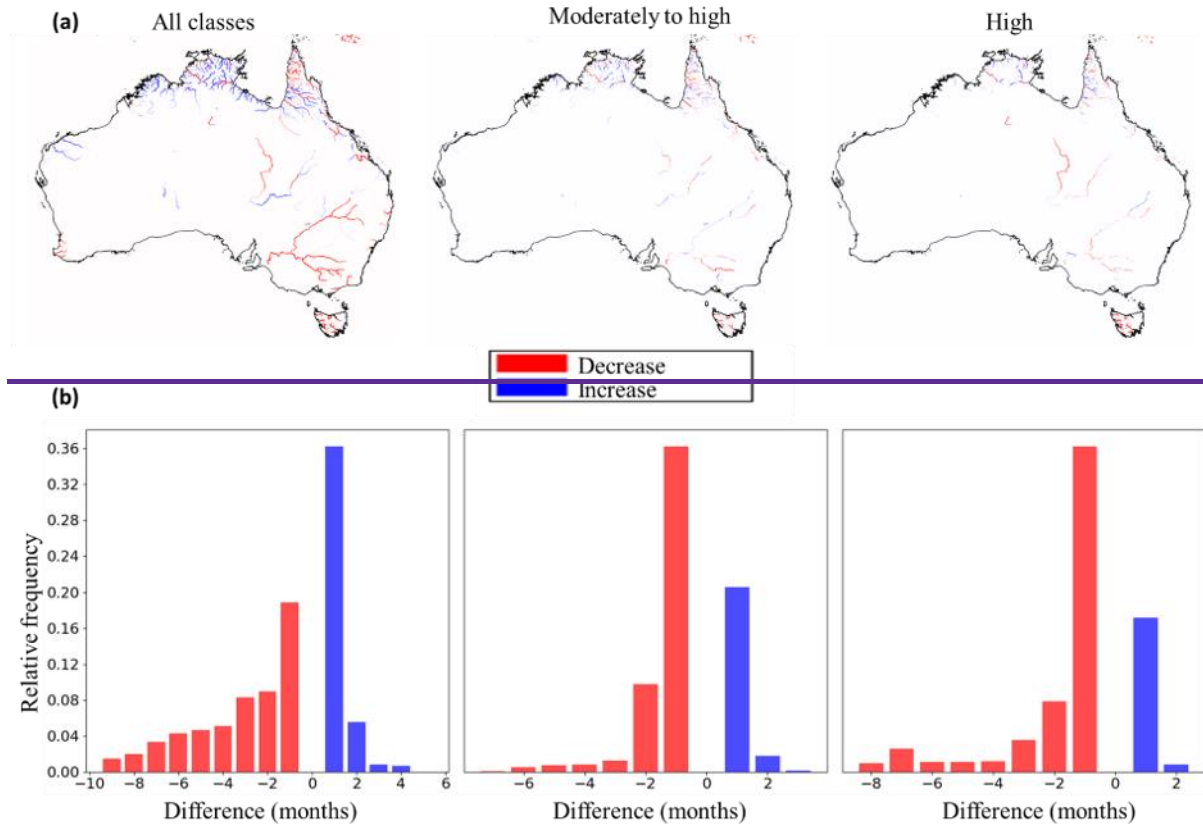

Aquatic GDEs



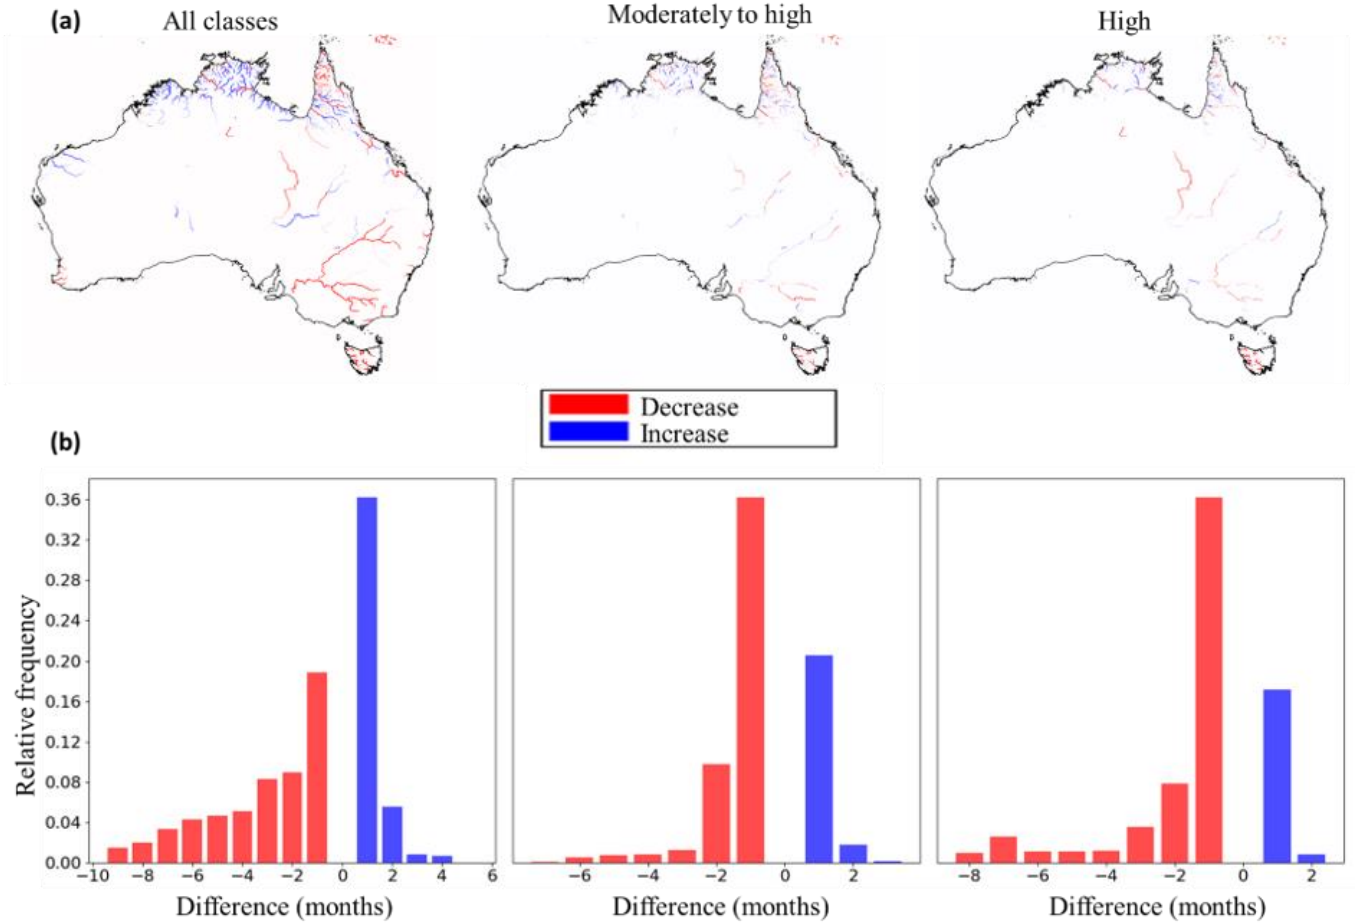


Figure 5: Change in groundwater dependency of aquatic GDEs between 1979-2000 and 2001-2019; (a) Maps of the direction of change in the average number of months that aquatic GDEs depend on groundwater; the left figure shows the change in the number of months $\frac{Q_{gw}}{Q} > 0$ (low to high dependency), the middle figure $\frac{Q_{gw}}{Q} > 0.5$ (moderate to high dependency) and the right figure $\frac{Q_{gw}}{Q} > 0.75$ (high dependency); Red areas indicate a decrease in the average number of months with groundwater dependency and blue indicates an increase; (b) associated frequency distributions of change in number of months.

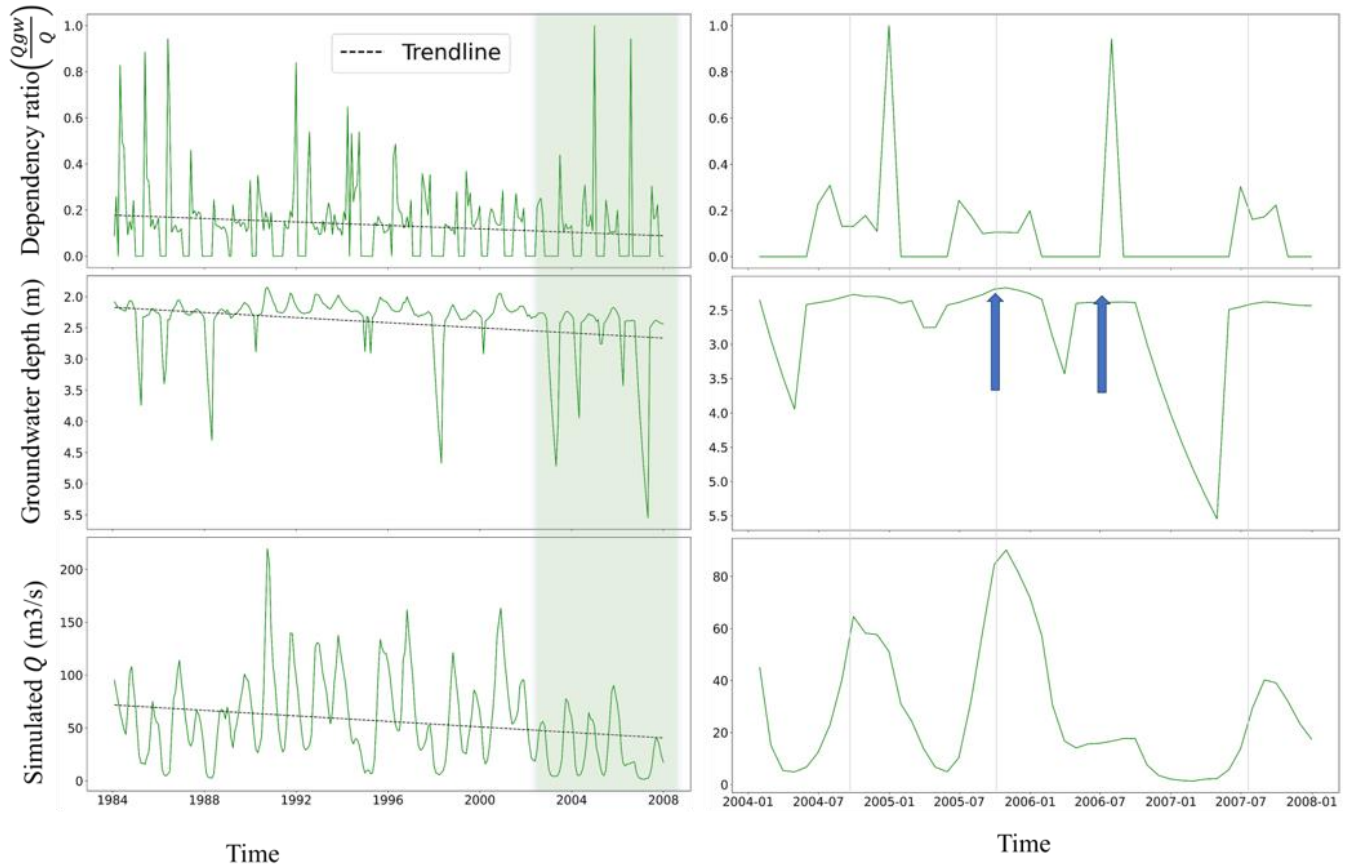

330 **Figure 6:** Example time series of $\frac{Q_{gw}}{Q}$ for a downstream river reach location in the Darling River- (location indicated in the aquatic GDE map on top). Top: time series of simulated $\frac{Q_{gw}}{Q}$, total streamflow (Q) and groundwater depth, including trendlines. Right: zoom into a selected timeframe (green bar in the left figure) to show how the variability of dependence of $\frac{Q_{gw}}{Q}$ depends on groundwater level and streamflow.

335 Figure 7 shows the change in the number of months that the terrestrial GDEs and wetland GDEs are groundwater dependent. For wetland GDEs, we observe a decline in groundwater contribution of on average four months per year in most regions, with an exception in some wetland areas in New South Wales and South Australia where an average increase of eight months of groundwater dependency is observed. For wetland GDEs, this decline can also be caused by a decline of the saturated area fraction, which is a driving factor for the decrease in wetland GDE dependency in Central Australia since these areas show
340 only limited declines in groundwater levels. Terrestrial GDEs (phreatophytes) show a limited decline in groundwater dependency of one month on average for most locations. These ~~are small changes and can only be attributed~~ are exclusively due to a decline in groundwater levels since the rooting depth is kept constant (See Figure ~~S5S7~~).

We have ~~added~~ performed some additional analyses to ~~improve understanding of~~ provide insight in the ~~drivers'~~ drivers of
345 groundwater level changes between both periods. Figure ~~S6S10~~ shows the difference in simulated groundwater recharge between the periods 2001-2019 relative to 1979-2000 and the simulated groundwater withdrawal over the 2001-2019 period. The changes in groundwater recharge reflect the impact of climate variability and/or change on the groundwater system, while the locations with groundwater withdrawal reflect the direct human impacts. A thorough factor analysis is beyond the scope of this study, but a comparison of Figures ~~S5S7~~ with ~~S6S9~~ suggests that climate variability mainly explains the changes in
350 groundwater depth in North, Central and Western Australia while both factors play a role in Eastern Australia. Note that the variability of the simulated groundwater levels is half of that of the observed ones. This reflects the underestimation of the variability in groundwater depth as shows in Figure 3. Possible explanations for this are an underestimation of recharge and recharge variability in drylands (Quichimbo et al., 2021), an overestimation of storage coefficients and an underestimation of groundwater withdrawals.

355

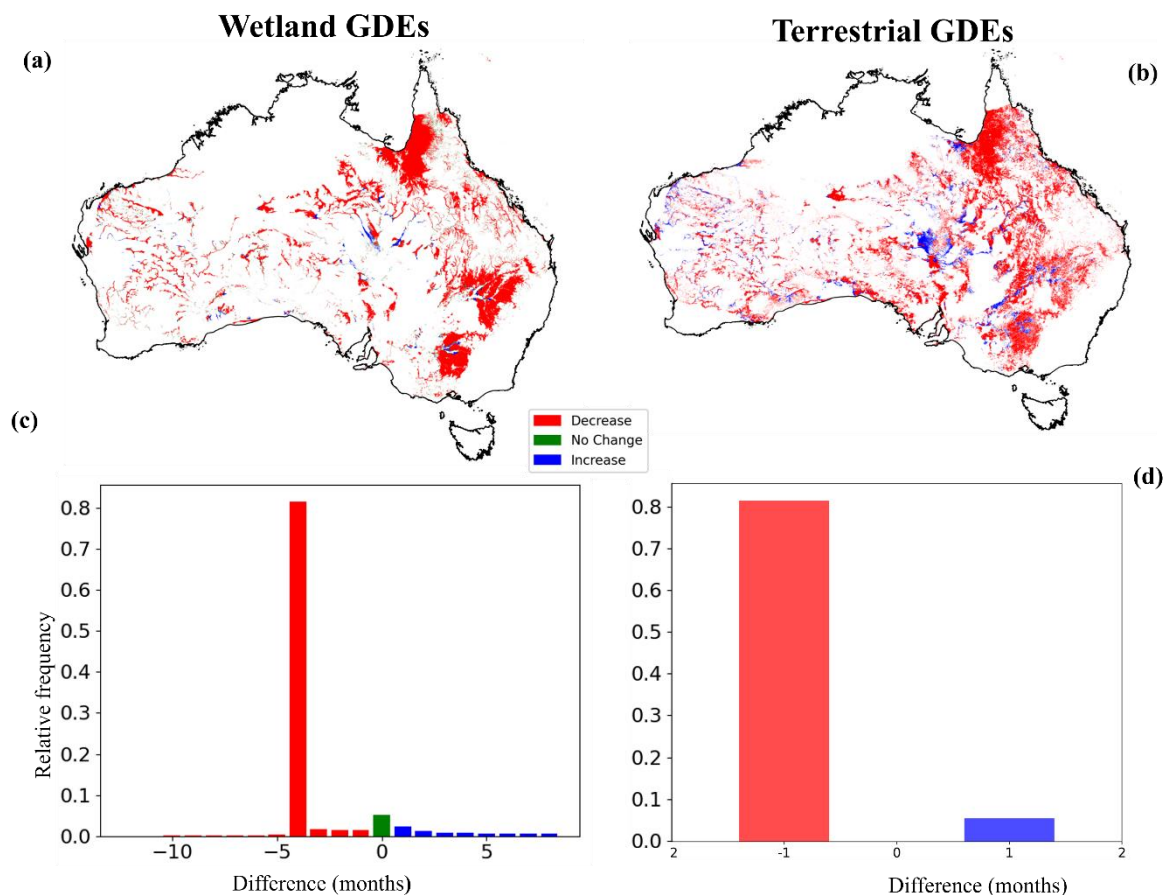


Figure 7: Change in average number of months of groundwater the dependency of terrestrial GDEs (phreatophytes) and wetland GDEs; a) direction of change in terrestrial GDEs (phreatophytes); b) direction of change wetland GDEs. Red areas indicate a decrease in the average number of months with groundwater dependency, green indicates no change between the periods and blue indicates an increase; (c) and (d) associated cumulative frequency distributions of change in number of months.

4.0 Discussions and conclusions

In this research, we developed and evaluated a framework using a high-resolution surface-groundwater model at 30 arcsec resolution to map aquatic, wetland and terrestrial groundwater-dependent ecosystems. We evaluated the simulated groundwater depthheads with observed groundwater level observations and the mapped GDE occurrence with the GDE atlas of Australia. Groundwater resources are crucial for GDEs as they partially or fully contribute to their water budget. Analysing the spatial and temporal changes in groundwater dependency is required for understanding threats to GDEs. In the context of global population growth, industrialization, economic growth and climate change driving global groundwater depletion, this will inform relevant stakeholders on high-riskthreatened ecosystems and direct groundwater allocation. This study introduces

370 a method for GDE mapping that offers the possibility to improve understanding of the spatial distribution and temporal dynamics of GDEs in relation to the spatiotemporal dynamics of groundwater systems.

Our research ~~builds upon~~complements previous work on mapping GDEs combining expert knowledge, GIS and field ~~visit~~visits by (Doody et al., 2017), previous global groundwater modelling efforts (De Graaf et al. 2019), as well as work by (Eamus et al., (2015), who investigated GDEs responses to changes in groundwater depth using satellite images and field studies for

375 selected locations. In comparison, our research proposes a methodology to understand the long-term temporal responses of different GDE types to changes in groundwater levels at a large spatial extent and at ~~fine~~high resolution. Our method relies on outputs from a process-based high-resolution large-scale groundwater model and has potential for identifying hotspots of ecosystems threatened by groundwater extractions on a large scale. It proved to be effective for identifying GDEs in Australia with a hit rate over 87% and CSI over 80%. GDEs occur in areas with a shallow water table and, notably, our framework was

380 well able to simulate groundwater depths at these locations~~-well~~. The transient component of this methodology also facilitates in-depth understanding of the temporal dynamics of the reliance on groundwater resources by GDEs. At a monthly time~~, scale~~, we were able to simulate the different levels of dependency by aquatic GDEs as well as the levels of reliance or non-reliance on groundwater resources by wetlands and phreatophyte communities.

It is important to note that the dependency ratio of aquatic GDEs is dependent on both total streamflow and groundwater depth.

385 Thus, increased groundwater discharge coupled with a decrease in streamflow may shift a river section to be more dependent and vice versa. Although streamflow and groundwater levels are likely positively correlated at larger time scales, they may not be in phase at shorter time scales due to the different response times of surface water and groundwater systems. This makes the degree of groundwater dependency of ~~Aquatic~~aquatic GDEs more intermittent than ~~other~~compared to GDEs that rely on groundwater depth and soil wetness (~~Wetlands~~wetlands) or groundwater depth only (~~and~~phreatophyte communities)~~-).~~.

390 Phreatophytes may be even more resilient to change as they are able to adapt to groundwater level declines through deeper rooting (Naumburg et al., 2005), although there are limitations to this adaptive capacity between species, implying that a decline in groundwater level may result in changes in phreatophyte community composition (Sommer & Froend, 2014).

The model performance evaluation in the transient analysis revealed a fair overall agreement ~~with~~between simulated and observed groundwater ~~depth~~head data, yet also an overall overestimation in simulated groundwater depth. However, since

395 biases for shallow groundwater levels were limited, the performance in identifying the GDEs was very good, as indicated by the different performance metrics. The calibration results show that the groundwater model was not very sensitive to global changes in parameter sets (Figure ~~S4~~S5). This calls for more sophisticated groundwater calibration methods that allow for regional differentiation in model parameters. Also, further improvements can be expected if the recharge simulated with PCR-GLOBWB 2 could be better constrained. Therefore, a calibration approach more sophisticated than pre-factor parameter

400 change must be implemented to improve the groundwater model simulations and derived mapping of GDEs.

One of the limitations of the current groundwater model setup is its relatively simple hydrogeologic schematisation obtained from De Graaf et al. (2017). Although this makes the framework globally applicable, it may suffer from a lack of geological detail needed for representing groundwater discharge and springs over ~~e.g.,~~for example, the Great Artesian Basin. Another

limitation is the assumption that the rooting depth of phreatophytes is constant, due to a lack of temporal rooting depth data. This assumption contrasts with studies that have shown the ability of plants to adapt to changes in groundwater levels (Fan et al., 2017; Robinson, 1958).

Although ~~we've~~ noted a decline in groundwater contribution to ~~Groundwater Dependent Ecosystems (Australian GDEs)~~, ~~we haven't over the past decades, we have not~~ explicitly factored in potential impacts from climate change or unsustainable groundwater extraction on GDE extent. Also, we ~~can't~~conclude on GDE ~~habitat~~ loss solely from our findings, as we ~~haven't~~have not observed a consistent lack of groundwater contribution throughout the year. The potential underestimation of groundwater level changes (Figure ~~S5S9~~) and withdrawals at a high resolution (Figure ~~S6S10~~) in our simulations could be a contributing factor.

In future work we intend to apply our framework to the global scale and better assess the individual impacts of groundwater withdrawals and climate change on the extent of GDEs under different scenarios. This would also require us to translate the change in degree of groundwater contribution to a change in GDE extent. This work will be accompanied by improved hydrogeological schematization and better calibration methods, with the aim to provide a good basis for ecological assessments, where changes in GDE extent are linked to changes in species richness.

In summary, the framework introduced in this study represents a GDE mapping approach that allows the assessment of spatio-temporal dynamics associated with the dependency of ecosystems on groundwater resources. This generic methodological framework not only enhances our understanding of the spatial distribution of GDEs but also establishes a foundation for interdisciplinary research between ecology and hydrology. By offering a global perspective on hotspot areas of GDEs under various hydroclimatic conditions, this methodology can inform decision-making processes regarding groundwater allocation and species conservation efforts. Such initiatives are crucial for advancing the objectives outlined in for example the Kunming-Montréal Global Biodiversity Framework and Sustainable Development Goal 15, which aims to halt biodiversity loss.

Author contribution

NGO, MFPB and ES designed the study. NGO performed the analyses, validation and visualisation of the results under the supervision of ES, MTHvV, ~~ASAMS~~ and MFPB. NGO developed the methodological framework in close collaboration with ES. NGO wrote the original manuscript draft and all co-authors reviewed and edited the manuscript.

Code/Data availability

Code for running GLOBGM can be found at <https://github.com/UU-Hydro/GLOBGM>. Model outputs are available upon request.

Competing interests

435 The contact author has declared that none of the authors has any competing interests.

Financial support

NGO and MFPB acknowledge support from the ERC Advanced Grant scheme (Grant no. 101019185 – GEOWAT²[2](#)).

440

445

450

455

460

References

- 465 Miller, B. B. and Carter, C.: The test article, *J. Sci. Res.*, 12, 135–147, doi:10.1234/56789, 2015.
- Smith, A. A., Carter, C., and Miller, B. B.: More test articles, *J. Adv. Res.*, 35, 13–28, doi:10.2345/67890, 2014.
- Baker, J. E. (1987). Reducing bias and inefficiency in the selection algorithm. *Proceedings of the second international conference on genetic algorithms*,
- Barbarossa, V., Bosmans, J., Wanders, N., King, H., Bierkens, M. F., Huijbregts, M. A., & Schipper, A. M. (2021). Threats of
470 global warming to the world's freshwater fishes. *Nature communications*, 12(1), 1701.
- Barron, O. V., Emelyanova, I., Van Niel, T. G., Pollock, D., & Hodgson, G. (2014). Mapping groundwater-dependent ecosystems using remote sensing measures of vegetation and moisture dynamics. *Hydrological Processes*, 28(2), 372-385.
- Bierkens, M. F., & Wada, Y. (2019). Non-renewable groundwater use and groundwater depletion: a review. *Environmental
475 Research Letters*, 14(6), 063002.
- Bonte, M., Geris, J., Post, V. E., Bense, V., Van Dijk, H., & Kooi, H. (2013). Mapping surface water-groundwater interactions and associated geological faults using temperature profiling. *Groundwater and Ecosystems of IAH Series on Hydrogeology*, 81-94.
- Brim Box, J., Leiper, I., Nano, C., Stokeld, D., Jobson, P., Tomlinson, A., Cobban, D., Bond, T., Randall, D., & Box, P. (2022).
480 Mapping terrestrial groundwater-dependent ecosystems in arid Australia using Landsat-8 time-series data and singular value decomposition. *Remote Sensing in Ecology and Conservation*.
- Brunner, P., Therrien, R., Renard, P., Simmons, C. T., & Franssen, H. J. H. (2017). Advances in understanding river-groundwater interactions. *Reviews of Geophysics*, 55(3), 818-854.
- Castellazzi, P., Doody, T., & Peeters, L. (2019). Towards monitoring groundwater-dependent ecosystems using synthetic
485 aperture radar imagery. *Hydrological Processes*, 33(25), 3239-3250.
- Cohen, I., Huang, Y., Chen, J., Benesty, J., Benesty, J., Chen, J., Huang, Y., & Cohen, I. (2009). Pearson correlation coefficient. *Noise reduction in speech processing*, 1-4.
- Cucchi, M., Weedon, G. P., Amici, A., Bellouin, N., Lange, S., Müller Schmied, H., Hersbach, H., & Buontempo, C. (2020). WFDE5: bias-adjusted ERA5 reanalysis data for impact studies. *Earth System Science Data*, 12(3), 2097-2120.
- 490 Cuthbert, M., Gleeson, T., Moosdorf, N., Befus, K. M., Schneider, A., Hartmann, J., & Lehner, B. (2019). Global patterns and dynamics of climate-groundwater interactions. *Nature climate change*, 9(2), 137-141.
- de Graaf, I. E., van Beek, R. L., Gleeson, T., Moosdorf, N., Schmitz, O., Sutanudjaja, E. H., & Bierkens, M. F. (2017). A global-scale two-layer transient groundwater model: Development and application to groundwater depletion. *Advances in water Resources*, 102, 53-67.
- 495 Doody, T. M., Barron, O. V., Dowsley, K., Emelyanova, I., Fawcett, J., Overton, I. C., Pritchard, J. L., Van Dijk, A. I., & Warren, G. (2017). Continental mapping of groundwater dependent ecosystems: A methodological framework to integrate diverse data and expert opinion. *Journal of Hydrology: Regional Studies*, 10, 61-81.
- Duran-Llacer, I., Arumí, J. L., Arriagada, L., Aguayo, M., Rojas, O., González-Rodríguez, L., Rodríguez-López, L., Martínez-Retureta, R., Oyarzún, R., & Singh, S. K. (2022). A new method to map groundwater-dependent ecosystem zones in
500 semi-arid environments: A case study in Chile. *Science of The Total Environment*, 816, 151528.
- Eamus, D., Froend, R., Loomes, R., Hose, G., & Murray, B. (2006). A functional methodology for determining the groundwater regime needed to maintain the health of groundwater-dependent vegetation. *Australian Journal of Botany*, 54(2), 97-114.
- Eamus, D., Zolfaghar, S., Villalobos-Vega, R., Cleverly, J., & Huete, A. (2015). Groundwater-dependent ecosystems: Recent
505 insights from satellite and field-based studies. *Hydrology and earth system sciences*, 19(10), 4229-4256.
- Fan, Y., Miguez-Macho, G., Jobbágy, E. G., Jackson, R. B., & Otero-Casal, C. (2017). Hydrologic regulation of plant rooting depth. *Proceedings of the National Academy of Sciences*, 114(40), 10572-10577.
<https://doi.org/doi:10.1073/pnas.1712381114>

- 510 Fatichi, S., Vivoni, E. R., Ogden, F. L., Ivanov, V. Y., Mirus, B., Gochis, D., Downer, C. W., Camporese, M., Davison, J. H., & Ebel, B. (2016). An overview of current applications, challenges, and future trends in distributed process-based models in hydrology. *Journal of Hydrology*, 537, 45-60.
- Foster, S., Koundouri, P., Tuinhof, A., Kemper, K., Nanni, M., & Garduño, H. (2010). Groundwater dependent ecosystems: the challenge of balanced assessment and adequate conservation. *GW Mate briefing note series*(15).
- 515 Gerla, P. J. (1992). The relationship of water-table changes to the capillary fringe, evapotranspiration, and precipitation in intermittent wetlands. *Wetlands*, 12, 91-98.
- Glanville, K., Ryan, T., Tomlinson, M., Muriuki, G., Ronan, M., & Pollett, A. (2016). A method for catchment scale mapping of groundwater-dependent ecosystems to support natural resource management (Queensland, Australia). *Environmental management*, 57(2), 432-449.
- 520 [Gleeson, T., Huggins, X., Connor, R., Arrojo-Agudo, P., & Vázquez-Suñé, E. \(2022\). GROUNDWATER AND ECOSYSTEMS \(CHAPTER 6\).](#)
- Grömping, U. (2007). Estimators of relative importance in linear regression based on variance decomposition. *The American Statistician*, 61(2), 139-147.
- [Hagemann, S., & Gates, L. D. \(2003\). Improving a subgrid runoff parameterization scheme for climate models by the use of high resolution data derived from satellite observations. *Climate Dynamics*, 21, 349-359.](#)
- 525 Hatton, T., & Evans, R. (1998). *Dependence of ecosystems on groundwater and its significance to Australia*. Canberra, ACT, LWRRDC.
- Hengl, T., Mendes de Jesus, J., Heuvelink, G. B., Ruiperez Gonzalez, M., Kilibarda, M., Blagotić, A., Shangguan, W., Wright, M. N., Geng, X., & Bauer-Marschallinger, B. (2017). SoilGrids250m: Global gridded soil information based on machine learning. *Plos one*, 12(2), e0169748.
- 530 Hoogland, T., Heuvelink, G., & Knotters, M. (2010). Mapping water-table depths over time to assess desiccation of groundwater-dependent ecosystems in the Netherlands. *Wetlands*, 30(1), 137-147.
- Howard, J., & Merrifield, M. (2010). Mapping groundwater dependent ecosystems in California. *Plos one*, 5(6), e11249.
- [Huggins, X., Gleeson, T., Serrano, D., Zipper, S., Jehn, F., Rohde, M. M., Abell, R., Vigerstol, K., & Hartmann, A. \(2023\). Overlooked risks and opportunities in groundwatersheds of the world's protected areas. *Nature Sustainability*, 6\(7\), 855-864.](#)
- 535 Kilroy, G., Coxon, C., Daly, D., O'Connor, Á., Dunne, F., Johnston, P., Ryan, J., Moe, H., & Craig, M. (2009). Monitoring the Environmental Supporting Conditions of Groundwater Dependent Terrestrial Ecosystems in Ireland. *Groundwater Monitoring*, 245.
- Kløve, B., Ala-Aho, P., Bertrand, G., Gurdak, J. J., Kupfersberger, H., Kværner, J., Muotka, T., Mykrä, H., Preda, E., & Rossi, P. (2014). Climate change impacts on groundwater and dependent ecosystems. *Journal of Hydrology*, 518, 250-266.
- 540 Kløve, B., Allan, A., Bertrand, G., Druzynska, E., Ertürk, A., Goldscheider, N., Henry, S., Karakaya, N., Karjalainen, T. P., & Koundouri, P. (2011). Groundwater dependent ecosystems. Part II. Ecosystem services and management in Europe under risk of climate change and land use intensification. *Environmental Science & Policy*, 14(7), 782-793.
- Kummu, M., Guillaume, J. H., de Moel, H., Eisner, S., Flörke, M., Porkka, M., Siebert, S., Veldkamp, T. I., & Ward, P. (2016). The world's road to water scarcity: shortage and stress in the 20th century and pathways towards sustainability. *Scientific Reports*, 6(1), 38495.
- 545 Lange, S., Menz, C., Gleixner, S., Cucchi, M., Weedon, G. P., Amici, A., Bellouin, N., Schmied, H. M., Hersbach, H., & Buontempo, C. (2021). WFDE5 over land merged with ERA5 over the ocean (W5E5 v2. 0).
- Link, A., El-Hokayem, L., Usman, M., Conrad, C., Reinecke, R., Berger, M., Wada, Y., Coroama, V., & Finkbeiner, M. (2023). Groundwater-dependent ecosystems at risk—global hotspot analysis and implications. *Environmental Research Letters*.
- 550 Martínez-Santos, P., Díaz-Alcaide, S., De la Hera-Portillo, A., & Gómez-Escalonilla, V. (2021). Mapping groundwater-dependent ecosystems by means of multi-layer supervised classification. *Journal of Hydrology*, 603, 126873.
- Münch, Z., & Conrad, J. (2007). Remote sensing and GIS based determination of groundwater dependent ecosystems in the Western Cape, South Africa. *Hydrogeology Journal*, 15(1), 19-28.
- 555 Murray, B. R., Hose, G. C., Eamus, D., & Licari, D. (2006). Valuation of groundwater-dependent ecosystems: a functional methodology incorporating ecosystem services. *Australian Journal of Botany*, 54(2), 221-229.

- Naumburg, E., Mata-Gonzalez, R., Hunter, R. G., McLendon, T., & Martin, D. W. (2005). Phreatophytic vegetation and groundwater fluctuations: a review of current research and application of ecosystem response modeling with an emphasis on Great Basin vegetation. *Environmental management*, 35(6), 726-740.
- Robinson, T. W. (1958). *Phreatophytes*. US Government Printing Office.
- Sommer, B., & Froend, R. (2014). Phreatophytic vegetation responses to groundwater depth in a drying mediterranean-type landscape. *Journal of Vegetation Science*, 25(4), 1045-1055.
- [Stromberg, J., Lite, S., & Dixon, M. \(2010\). Effects of stream flow patterns on riparian vegetation of a semiarid river: implications for a changing climate. *River research and applications*, 26\(6\), 712-729.](#)
- Sutanudjaja, E. H., Van Beek, L., De Jong, S. M., van Geer, F. C., & Bierkens, M. (2011). Large-scale groundwater modeling using global datasets: a test case for the Rhine-Meuse basin. *Hydrology and earth system sciences*, 15(9), 2913-2935.
- Sutanudjaja, E. H., Van Beek, R., Wanders, N., Wada, Y., Bosmans, J. H., Drost, N., Van Der Ent, R. J., De Graaf, I. E., Hoch, J. M., & De Jong, K. (2018). PCR-GLOBWB 2: a 5 arcmin global hydrological and water resources model. *Geoscientific Model Development*, 11(6), 2429-2453.
- Taylor, R. G., Scanlon, B., Döll, P., Rodell, M., Van Beek, R., Wada, Y., Longuevergne, L., Leblanc, M., Famiglietti, J. S., & Edmunds, M. (2013). Ground water and climate change. *Nature climate change*, 3(4), 322-329.
- Todini, E. (1996). The ARNO rainfall—runoff model. *Journal of Hydrology*, 175(1-4), 339-382.
- Tomlinson, M., & Boulton, A. J. (2010). Ecology and management of subsurface groundwater dependent ecosystems in Australia—a review. *Marine and Freshwater Research*, 61(8), 936-949.
- Van Emmerik, T., Li, Z., Sivapalan, M., Pande, S., Kandasamy, J., Savenije, H., Chanan, A., & Vigneswaran, S. (2014). Socio-hydrologic modeling to understand and mediate the competition for water between agriculture development and environmental health: Murrumbidgee River basin, Australia. *Hydrology and earth system sciences*, 18(10), 4239-4259.
- Verkaik, J., Sutanudjaja, E. H., Oude Essink, G. H., Lin, H. X., & Bierkens, M. F. (2022). GLOBGM v1. 0: a parallel implementation of a 30 arcsec PCR-GLOBWB-MODFLOW global-scale groundwater model. *Geoscientific Model Development Discussions*, 2022, 1-27.
- Wada, Y., Wissler, D., & Bierkens, M. F. (2014). Global modeling of withdrawal, allocation and consumptive use of surface water and groundwater resources. *Earth System Dynamics*, 5(1), 15-40.
- Werstak, C., Housman, I., Maus, P., Fisk, H., Gurrieri, J., Carlson, C. P., Johnston, B. C., Stratton, B., & Hurja, J. C. (2012). Groundwater-dependent ecosystem inventory using remote sensing. *United States Department of Agriculture*.
- [Winter, T. C. \(1999\). Relation of streams, lakes, and wetlands to groundwater flow systems. *Hydrogeology Journal*, 7, 28-45.](#)
- Xu, T., & Liang, F. (2021). Machine learning for hydrologic sciences: An introductory overview. *Wiley Interdisciplinary Reviews: Water*, 8(5), e1533.