

UpgradingEnhancing the performance of 1D-2D flood models using satellite laser altimetry and multi-mission satellite–surface water extent maps from Earth Observation (EO) data

Theerapol Charoensuk^{1,2,3}, Claudia Katrine Corvenius Lorentzen¹, Anne Beukel Bak¹, Jakob Luchner², Christian Tøttrup² and Peter Bauer-Gottwein¹

¹Department of Environmental and Resource Engineering, Technical University of Denmark, Kgs. Lyngby, 2800, Denmark

²DHI A/S, Hørsholm, 2970, Denmark

³Hydro-informatics Institute, Bangkok, 10900, Thailand

Correspondence to: Theerapol Charoensuk (tcha@dtu.dk)

Abstract. Digital elevation models (DEMs) are essential datasets, particularly for flood inundation mapping in one-dimensional (1D) to two-dimensional (2D) flood models. Given the current significant uncertainties stemming from changes in weather patterns affecting flooding, reducing associated with DEMs that can affect flood modelling accuracy, minimizing these inaccuracies in flood models is imperative essential. This study aims to enhance improve the performance of 1D-2D flood models using satellite Earth observation Observation (EO) data in, focusing on the lower Chao Phraya (CPY) basin. It introduces two workflows applied to upgrade the 1D-2D flood model: DEM analysis and flood map analysis. Two workflows are proposed: DEM analysis and flood map analysis. The DEM analysis workflow evaluates 10 DEM products, including three local DEMs provided by Thai agencies (LDD, JICA, and a merged LDD-JICA DEM) and seven global DEMs derived from EO data (ASTER GDEM V3, STRM-3SRTM V3, MERIT, GLO30, FABDEM V1, FABDEM V1-2, TanDEM-X, and TanDEM-EDEM). The evaluation process uses ICESat-2 ATL08 data processing, vertical datum reference processing, and evaluation of DEMs using ICESat-2 ATL08 benchmark processing. The DEMs are assessed using satellite laser altimetry data from the Ice, Cloud, and land Land Elevation Satellite-2 (ICESat-2) according as the benchmark. The evaluation employs standardized metrics, including point-wise, grid-wise, and track-wise comparisons, to standard criteria identify the most suitable DEM for DEM selection as input to integration into the flood model. Findings Results indicate that the merged LDD-JICA DEM and FABDEM V1-2 DEMs exhibit the highest level of accuracy among local and global products, respectively, with root mean square error errors (RMSE) values of 1.93 m and 1.95 m, respectively, and percent biases (PBIAS) of -15.38% and 4.59%.

The flood map analysis workflow involves comparing flood extent maps derived from multi-mission satellite datasets, and simulated flood maps. This study generated from 1D-2D flood models using the best available DEMs. This workflow utilizes surface water extent (SWE) maps from the WorldWater project, obtained from the Sentinel-1 and Sentinel-2 imaging satellites, and flood maps from the Geo-Informatics and Space Technology Development Agency (GISTDA) in Thailand to verify validate flood maps produced by the 1D-2D flood model, based on the merged LDD-JICA DEM and FABDEM V1-2

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

DEM. The results reveal that the flood maps from based on the 1D-2D flood model tend to overestimate flood extent. FABDEM V1-2 DEM slightly outperform those based on the merged LDD-JICA DEM, with a/an improvement of approximately 13.55–25.56% in the critical success index (CSI) range of 0.072–0.230. Our study demonstrates highlights the potential of leveraging satellite EO data to enhance the skill accuracy and reliability of 1D-2D flood models using satellite EO data, thereby improving the reliability of flood inundation predictions for effective flood management.

1 Introduction

Nowadays, flooding is one of the most common disaster issues hazards globally, impacting health, economies, and livelihoods worldwide. Flood models play a crucial role in forecasting floods and assessing flood risks, thereby assisting decision-makers in effective water management, particularly through one-dimensional (1D) - two-dimensional (2D) flood models. These models simulate various aspects of flooding, including flow, water levels, flood inundation extents, flood depths, flood maps, and flood duration (DHI Water and Environment, 2019). The Digital Elevation Model (DEM) serves as a primary input parameter for 1D-2D flood models, enabling the accurate simulation of flood overflow from rivers, floodplains, and inundated areas, particularly in flat and low-lying regions. The DEM significantly influences the simulation of flood inundation in both 1D-2D and 2D flood models (Saksena and Merwade, 2015; Shen and Tan, 2020; Wu et al., 2007; Morrison et al., 2022), urban areas (McClean et al., 2020), coastal areas (Darnell et al., 2008), and flood warning systems (Lamichhane and Sharma, 2018). Ultimately, the reliability of flood inundation predictions relies on the accuracy and detail resolution provided by the DEM, directly impacting the representation of flow geometry characteristics within flood models.

Validating Currently, the advancements in survey technologies, such as Unmanned Aerial Vehicles (UAVs) (Perera and Nalani, 2022), Light Detection and Ranging (LiDAR) (Raj et al., 2020), and Mobile Mapping Systems (MMS) (Schwarz and El-Sheimy, 2007), have significantly enhanced the accuracy, quality, and resolution of DEMs. These technologies enable the production of high-resolution terrain data; however, they remain costly, time-consuming, and less feasible for monitoring dynamic land-use changes or covering large river basins. For example, following the severe flooding in 2011, Thailand's Royal Irrigation Department collaborated with the Japan International Cooperation Agency (JICA) to survey a 27,000-square-kilometer area. This effort produced a high-resolution 2x2 meter DEM and required approximately seven months to complete (Japan International Cooperation Agency (JICA), 2012), underscoring the significant resources needed for such large-scale surveys.

EO technologies offer a promising alternative by providing global DEMs with comparable resolution and quality. EO-based DEMs, such as ASTER GDEM3 (Abrams et al., 2020), SRTMv3 (Farr et al., 2007), MERIT (Yamazaki et al., 2017), GLO30 (AIRBUS, 2020), FABDEMv1-2 (Hawker et al., 2023), TanDEM-X (Krieger et al., 2007), and TanDEM-EDEM, are freely available for download and utilize advanced techniques of EO and machine learning, to generate elevation estimates. These satellite-derived DEMs cover remote or inaccessible areas, offering a cost-effective and efficient solution for generating high-

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: Font color: Auto

resolution terrain data. Moreover, global DEMs derived from EO are increasingly being utilized as inputs for 1D-2D flood models, providing a practical and scalable option for flood risk assessment and forecasting in regions with limited resources.

65 However, validating the DEM before integrating it into the 1D-2D flood model is essential. The Ice, Cloud, and Land Elevation Satellite-2 (ICESat-2) is a satellite equipped with a laser altimeter, capable of measuring ice sheet and glacier elevation change, sea ice freeboard, land elevation, and water elevation (Neumann et al., 2019), providing opportunities for validating DEMs even in remote and hard-to-reach areas worldwide, such as Finland (Wang and Liang, 2023), Spain (Zhu et al., 2022), East Antarctica (Hao et al., 2022), Alaska in the USA (Wang et al., 2019), and the Qinghai-Tibet Plateau in China (Weifeng et al., 70 2024). Additionally, ICESat-2 has been used to assess the suitability of global DEMs for hydrodynamic modeling in data-scarce regions (Nandam and Patel, 2024) and to enhance the accuracy of 2D hydraulic models in the upstream Yellow River (Frias et al., 2024). Moreover, while an efficient DEM enhances the efficiency of 1D-2D flood simulation, it is important to systematically validate flood maps. Currently, satellite earth observation (EO) data can be utilized for monitoring and providing surface water extent (SWE) with synthetic-aperture radar (SAR) sensors, such as RADARSAT (Raney et al., 1991), ENVISAT 75 ASAR (Lv et al., 2005), COSMO-SkyMed (Pulvirenti et al., 2014), and TerraSAR-X (Martinis et al., 2013), which is the only way to validate flood inundation maps from flood models over regional scales. The WorldWater project developed a robust and scalable EO solution for inland SWE monitoring, which can be utilized by a large community of stakeholders involved in local water management (Tottrup et al., 2022). The project used free and open optical and SAR satellite imagery from the Sentinel-1 and Sentinel-2 missions to generate monthly SWE maps over four years, which are accessible from 80 <https://worldwater.earth/>. The product offers new opportunities for validating modelled flood maps with higher SWE resolution.

While satellite EO provides SWE maps that delineate water bodies and inundated areas, they cannot be directly compared to flood maps from 1D-2D flood models. The output of 1D-2D flood models are riverine flood maps. Additional flood classification processing is necessary to ensure comparability between SWE maps and the output of a flood model. However, 85 flood type classification using SWE maps poses challenges and difficulties. Many studies focus on classifying flood types based on meteorological condition rather than using SWE maps, such as Nied et al., 2014, Turkington et al., 2016, decision tree using meteorological data (Stein et al., 2019), and Yan et al., 2023. Riverine flood classification specifically involves identifying floods caused by river overflow from SWE maps. Here, we used expanding segmentation labels (ESL) (Van Der Walt et al., 2014), connected component labeling (CCL) (Rosenfeld and Pfaltz, 1966 and AbuBaker et al., 2007), masking off 90 riverine and permanent water, and morphological image processing (MIP) (Soille, 2003) techniques applied to the SWE maps to separate riverine flood areas from other inundated areas.

This study ~~demonstrates these presents two new workflows for the supporting flood modelling and forecasting in the~~ lower Chao Phraya (CPY) River basin in Thailand, ~~i.e. and elsewhere: 1) Comprehensive DEM evaluation with ICESat-2 benchmarks, riverine flood classification, and flood evaluation. The evaluation involved~~ Evaluation: A detailed assessment of 95 10 DEM products, including three local ~~DEM products~~ and seven global ~~DEM products~~. The DEMs, was conducted using ICESat-2 as a benchmark for the Thailand domain. DEM performance in the lower CPY basin was ~~assessed~~ evaluated using

Formatted: Font color: Auto

Formatted: Font color: Auto

100 statistical methods, including bias (mean error, ME), mean absolute error (MAE), mean square error (MSE), and root mean
square error (RMSE), ~~in terms of with comparisons made at point, grid, and grid level, as well as track-wise~~
~~comparison~~comparisons. The ~~best result~~highest-performing DEM from ~~DEM~~this evaluation was ~~implemented in~~subsequently
105 ~~integrated into~~ a 1D-2D flood model ~~for simulatingto simulate~~ flood inundation. ~~The simulated flood 2) Systematic~~
~~Comparison of Flood Maps: Simulated 2D~~ inundation ~~map was evaluated using a satellite EO-based flood map, patterns were~~
~~compared with flood maps~~ derived from ~~satellite EO-based surface water extent (SWE through the) using a~~ riverine flood
classification process. The ~~model's~~ performance ~~of the flood model~~ was assessed using three statistical metrics: probability of
105 ~~enhance~~improve the performance of the ~~Chao Phraya~~ operational hydrologic-hydraulic forecasting system ~~maintained at~~for
~~the Chao Phraya River, managed by~~ the Hydro-Informatics Institute (HII) in Thailand.

2 Study Area

The study area is located in the central part of Thailand, as shown in Figure 1(a). The delta area of the lower CPY River basin
in Thailand forms the study area depicted in Figure 1(c). The size of the study area is approximately 16,643 km², including
110 about 70% irrigation area and 20% urban area. The topography of the study area is characterized by a flat terrain, predominantly
consisting of a low-lying alluvial floodplain. The northern part of the study area is a mountainous region with four main rivers:
the Ping, Wang, Yom, and Nan rivers. These rivers converge to form the CPY river, which then flows into the study area. The
eastern and western parts of the study area are connected to the Bang Pakong River and the Mae Klong basin, respectively.
The southern part of the study area borders the Gulf of Thailand.
115 The study area is located in a tropical climate and is influenced by northeast and southwest monsoons. The northeast monsoon
brings cool and dry air from November to February, while the southwest monsoon brings humid air from May to October. The
precipitation is approximately 1,100 mm during the rainy season and 170 mm during the dry season. The flooding in the study
area is caused by the main rivers and their tributaries. The tributaries of the CPY river include Tha-Chin, Noi, and Lopburi.
Flooding problems are more severe along the main course of the CPY river compared to others. Nevertheless, flooding
120 mechanisms are complicated, arising from the combined effects of extreme precipitation, river overflows, insufficient river
conveyance, land-use change, and sea-level rise. This results in frequent flooding, as shown in Figure 3(c).

Formatted: Font color: Auto

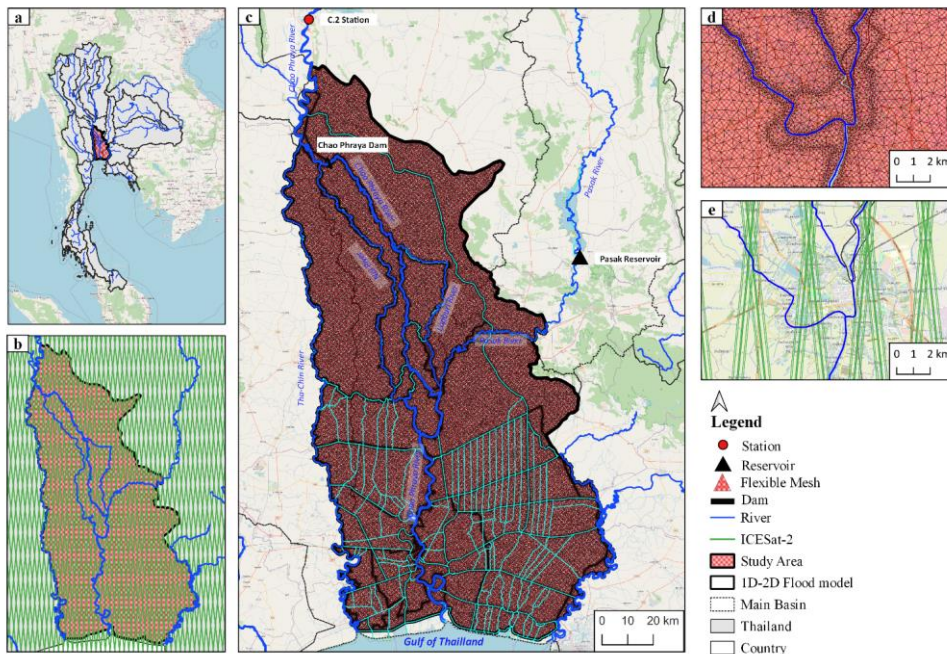


Figure 1: (a) the location of the study area, (b) the ICESat-2 orbit, (c) the study area/1D-2D flood model, (d) the flexible mesh in the flood model, and (e) ICESat-2 beam pairs. © OpenStreetMap contributors 2015. Distributed under the Open Data Commons Open Database License (ODbL) v1.0.

3 Materials

3.1 1D-2D Flood modelling

In this study, we used the flood model from the decision support system for flood forecasting and water management in the CPY River basin, developed in collaboration with HII and DHI A/S since 2012 (Sisomphon et al., 2013) and updated with new information in 2016 (Charoensuk et al., 2018). The decision support system for flood forecasting and water management in the CPY basin continues to operate, supporting the Thai Government in managing flood risk and providing real-time flood forecasts.

The flood model uses the MIKE FLOOD software developed by DHI A/S. A MIKE FLOOD model (DHI Water and Environment, 2019) consists of coupled one-dimensional (1D) and two-dimensional (2D) models, namely MIKE11 and

Formatted: English (United Kingdom)

Formatted: Font color: Auto

135 MIKE21, respectively. The 1D hydraulic model (MIKE11) simulates unsteady flow in river networks solving the Saint-Venant equations with an implicit finite difference solver (DHI Water and Environment, 2021). The main branches of MIKE11 include the Chao Phraya, Tha-Chin, Lopburi, Noi and Pasak rivers. Cross-sections, rainfall-runoff, boundary conditions, hydrodynamic parameters, and control structures were implemented in MIKE11. The MIKE21 model is an overland flow model utilizing 2D shallow water equations (Danish Hydraulic Institute, 2016). MIKE21 employs a 2D flexible mesh based on the digital elevation model (DEM) to assess flood depth and its propagation. The river network in MIKE11 is dynamically linked to floodplain bathymetry through lateral links. The lateral links connect the river to the floodplain along its length using the cell-to-cell method, allowing water to overflow to the floodplain in the MIKE21 overland flood model. The lateral link connection uses the weir equation to calculate overflow in MIKE FLOOD (DHI Water and Environment, 2019). The 1D-2D flood model, documented in Hydro-Informatics Institute, 2017, establishes the following boundary conditions: upstream boundary forcing with discharge from C.2 station and releases from the Pasak Reservoir from the Royal Irrigation Department (RID) in the CPY and Pasak rivers, respectively. Meanwhile, the downstream boundary connects to the Gulf of Thailand using sea level measurements from the Hydrographics Department, Royal Thai Navy (NAVY), as illustrated in Figure 1(c). ~~The MIKE11 model was calibrated using water level observations presented in Charoensuk et al., 2024~~The MIKE11 model was calibrated using water level observations presented in Charoensuk et al., 2024. MIKE21 utilized a flexible mesh to simulate overland flow, as illustrated in Figure 1(d), and MIKE FLOOD was calibrated against flood maps and satellite data from 2011, as detailed by Charoensuk et al., 2018.

3.2 Geoid Models

To measure elevations around the Earth, a vertical reference is needed, with mean sea level chosen as the reference. The geoid is the level (equipotential) surface of the Earth's gravity field that best coincides with mean sea level. This surface connects the oceans and extends through the continents. The geoid serves as the reference surface for levelled heights, commonly expressed as 'heights above sea level'. In order to compare heights from different data sources, all data has to be re-referenced to the same geoid model. A geoid model is a spatial representation of geoid height, encompassing both global and local scales. This study has collected three geoid models, summarized in Table 1 ~~and shown in Figure A-2.~~ Thailand has its own local geoid model. The latest one, TGM2017, was released in 2018. This geoid is based on new gravity measurements taken around Thailand and has been shown to better match the expected geoid heights than the EGM2008 model (Dumrongchai et al., 2021). TGM2017 provides the best fit for Thailand, it was chosen as the primary geoid model, and all heights were re-referenced to TGM2017.

Table 1: Geoid model datasets

Geoid model	Scale	Download	References
EGM96: The Earth Gravitational Model 1996	Global	https://earth-info.nga.mil/	Lemoine et al., 1998
EGM2008: The Earth Gravitational Model 2008	Global	https://earth-info.nga.mil/	Pavlis et al., 2012
TGM2017: Thailand geoid model 2017	Local	On request	Dumrongchai et al., 2021

Formatted: Font color: Auto

Formatted: Font color: Auto, (Complex) Arabic (Saudi Arabia)

Formatted: Font color: Auto

Formatted: Font color: Auto, (Complex) Arabic (Saudi Arabia)

165 3.3 Digital Elevation Models (DEM)

A digital elevation model (DEM) is a quantitative representation of the Earth’s surface elevation. The term "DEM" encompasses both digital terrain models (DTM) and digital surface models (DSM). A DSM maps the heights of all features on the surface, such as vegetation and buildings, while a DTM only represents the actual height of the terrain (“bare earth”). Multiple digital elevation models are available, local DEMs are often preferred due to their higher spatial resolution and vertical accuracy (McClean et al., 2020). In this study, we have collected 10 DEM products, as shown in Figure 2, and they are summarized in-. A summary of these products is presented in Table 2- and detailed statistical analyses are provided in Table A 1. The three local DEM products were obtained from the Thai agency, namely LDD DEM, JICA DEM, and merged LDD-JICA DEM. Additionally, seven global DEMs were collected, including ASTEM GDEM V3, SRTMv3 DEM, MERIT DEM, FABDEMv1-2 DEM, GLO30 DEM, TanDEM-X, and TanDEM-EDEM.


175


Table 2: Digital Elevation Model (DEM)

Dem Product	Spatial resolution	Data Collection (Year)	Datum Reference	Type	Scale	Acquisition technique
LDD DEM	5 m	2004	EGM96 geoid	DTM	Local	Aerial stereo photo
JICA DEM	2 m	2012	EGM2008 geoid	DTM	Local	Airborne LiDAR
merged LDD-JICA DEM	2 m	-	TGM2017 geoid	DTM	Local	Fusion of multisource data
ASTEM GDEM V3	1 arcsecond (~30 m)	2000-2010	EGM96 geoid	DSM	Global	Satellite stereo images
SRTM DEM V3	1 arcsecond (~30 m)	2000	EGM96 geoid	DSM	Global	SAR Interferometry
MERIT DEM	3 arcseconds (~90 m)	2000	EGM96 geoid	DSM	Global	Fusion of multisource data
GLO30 DEM	1 arcsecond (~30 m)	2011-2015	EGM2008 geoid	DSM	Global	Fusion of multisource data
FABDEM v1-2	1 arcsecond (~30 m)	2011-2015	EGM2008 geoid	Base on DSM remove building and forest	Global	Fusion of multisource data
TanDEM-X DEM	0.4 arcsecond (~12 m)	2011-2015	WGS84 ellipsoidal height	DSM	Global	SAR Interferometry
TanDEM-X EDEM	1 arcsecond (~30 m)	2011-2015	WGS84 ellipsoidal height	DSM	Global	Fusion of multisource data

Formatted: Font: 10 pt, Not Bold, Complex Script Font: 12 pt, Not Bold

- Formatted: Centered
- Formatted: Centered
- Formatted: Centered
- Formatted: Centered
- Formatted: Centered
- Formatted: Centered
- Formatted: Centered
- Formatted: Centered
- Formatted: Centered
- Formatted: Centered
- Formatted: Centered
- Formatted: Centered
- Formatted: Centered
- Formatted: Centered
- Formatted: Centered
- Formatted: Centered
- Formatted: Centered
- Formatted: Centered
- Formatted: Centered
- Formatted: Centered

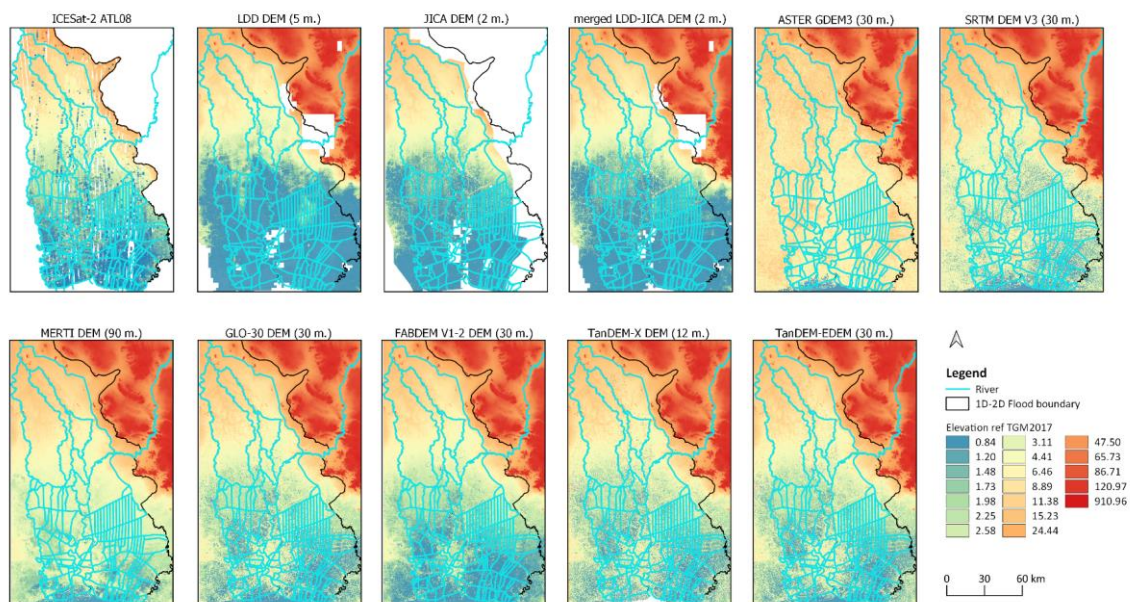

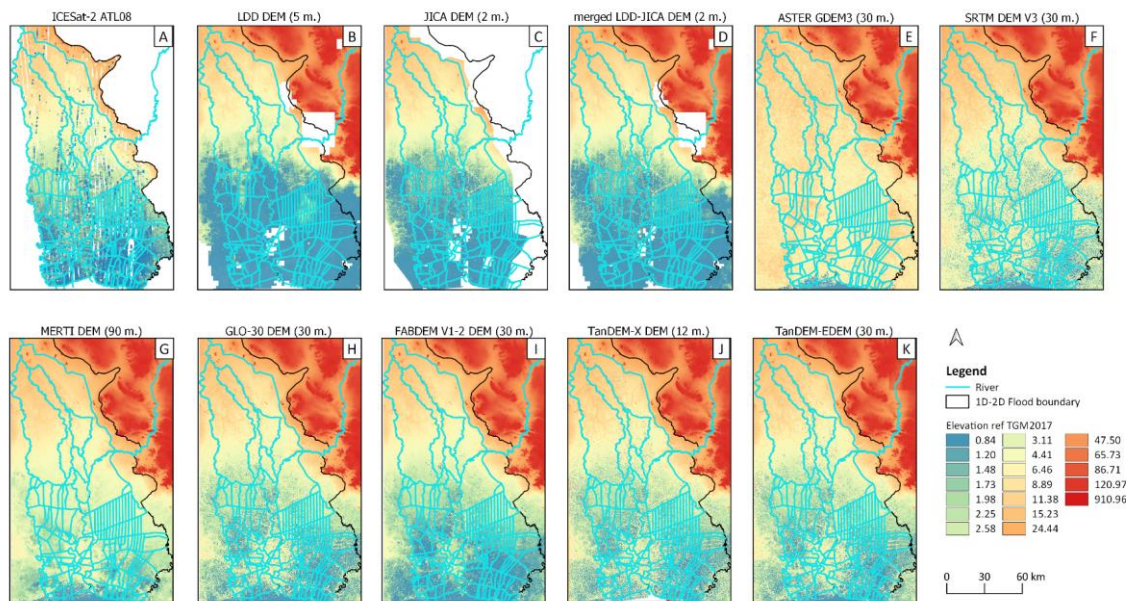

180 Figure 2: ICESat-2 ATL08 and DEM products

Formatted: English (United States)

Field Code Changed

, including: A) ICESat-2 ATL08 Surface elevation, B) Land Development Department (LDD) DEM, C) JICA DEM, D) Merged LDD-JICA DEM, E) ASTER GDEM Version 3, F) SRTM DEM Version 3, G) MERIT DEM, H) GLO-30 DEM, I) FABDEM v1.2 DEM, J) TanDEM-X DEM, and K) TanDEM-EDEM.

3.3.1 LDD DEM

The LDD DEM data is supplied by the Land Development Department of Thailand (LDD) in a grid format, with a resolution of 5x5 meters. This DEM was generated using photogrammetry using aerial stereo photo pairs with known scales (Paengwangthong and Sarapirome, 2012). This approach involves deducing distances between points from photos and determining object heights by identifying stereoscopic parallax from multiple pictures and rectifying with ground control points (GCPs) (Sholarin and Awange, 2015). Subsequently, orthorectification and interpolation are used to generate a DEM and mask off buildings and vegetation. Because buildings and vegetation are removed, the LDD DEM approximates a DTM (Sholarin and Awange, 2015).

3.3.2 JICA DEM

The JICA DEM was produced through a collaborative effort between the Royal Irrigation Department (RID) and the Japan International Cooperation Agency (JICA) at a resolution of 2x2 meters (Japan International Cooperation Agency (JICA), 2012). The JICA DEM was generated using Airborne Laser Scanning techniques with the LiDAR (Light Detection And Ranging) aerial technology. The LiDAR aerial survey employs a pulse laser to measure distances between the target and sensor, and it is applied on a large scale. The distance from the vehicle to the surface can be determined based on the travel time of the laser pulse (Argall and Sica, 2003). The JICA DEM was processed into a DTM filtering out features such as transportation facilities, buildings, and vegetation from the original data, as described in Japan International Cooperation Agency (JICA), 2012.

3.3.3 Merged LDD-JICA DEM

The merged LDD-JICA DEM was generated by integrating the LDD DEM and JICA DEM as described by Charoensuk et al., 2018. The JICA DEM served as the primary dataset, while the LDD DEM was utilized in areas with gaps within the 1D-2D Flood modeling boundary. To incorporate the LDD DEM into the merged LDD-JICA DEM within data gaps, we applied bias correction. The native LDD DEM and JICA DEM datasets were not referenced to the same vertical datum. The processing of the merged LDD-JICA DEM consists of two primary steps (Figure A 2): 1) re-referencing both LDD DEM and JICA DEM to the TGM2017 reference, and 2) calculation of the correlation coefficient between the JICA and LDD DEM for 1000 random points, using linear regression to correct the bias in the LDD DEM, as shown in Figure A 3. Following this, the JICA DEM and LDD DEM are combined to create the merged LDD-JICA DEM using linear regression. The resulting combined merged LDD-JICA DEM has a resolution of 2x2 meters.

3.3.4 ASTER GDEM3

The Advanced Spaceborne Thermal Emission and Reflection Radiometer (ASTER GDEM3), serving as a global DEM, was developed by the Ministry of Economy, Trade, and Industry (METI) of Japan in collaboration with The United States National

Aeronautics and Space Administration (NASA) and was published on 2019. The footprint of ASTER GDEM spans latitudes from 83°N to 83°S. The study area utilized ASTER GDEM3 (Abrams et al., 2020), which can be downloaded from the associated website: <https://gdemdl.aster.jspacesystems.or.jp/>. More information is shown as Table 2.

3.3.5 SRTMv3 DEM

The Shuttle Radar Topography Mission (SRTM) DEM, developed by NASA, was a collaborative effort involving the National Geospatial-Intelligence Agency (NGA) and the German and Italian Space Agencies. It was part of an international project aimed at acquiring radar data, which were used to create the first near-global set of land elevations (Werner, 2001). The DEM was launched in 2000 (Farr et al., 2007), and many improvements have been made since then. The SRTMv3 DEM, the latest version, was used for the study area and can be downloaded from the associated website: <https://search.earthdata.nasa.gov/search>.

3.3.6 MERIT DEM

The Multi-Error-Removed Improved-Terrain (MERIT) DEM, developed by Yamazaki et al., 2017. MERIT DEM improves upon previous DEMs by systematically removing various error components such as absolute bias, stripe noise, speckle noise, and tree height bias from SRTM3 DEM (Farr et al., 2007) , AW3D-30 m DEM (Tadono et al., 2015) and gap-filling with the Viewfinder Panoramas (VFP) DEM (<http://viewfinderpanoramas.org/dem3.html>). The MERIT DEM is a DSM with resolution of 3 arc seconds. It was utilized for the study area and is available for download from the dedicated website: http://hydro.iis.utokyo.ac.jp/~yamada/MERIT_DEM/index.html/.

3.3.7 GLO30 DEM

The Copernicus DEM, published in 2019 by the European Space Agency (ESA) (AIRBUS, 2020), represents an upgraded iteration of the WorldDEM. The backbone of the Copernicus WorldDEM is the TanDEM-X mission data, yet void filling techniques and integration of other data sources are used to enhance data completeness and accuracy. The Copernicus DEM is provided in three different DSM instances: EEA-10, GLO-30, and GLO-90. For this study, GLO-30 was utilized, offering 1 arc-second resolution. It can be downloaded from the dedicated website: <https://spacedata.copernicus.eu/de/collections/copernicus-digital-elevation-model>.

3.3.8 FABDEMv1-2

Forest And Building removed Copernicus Digital Elevation Model (FABDEM) was developed in collaboration between Bristol-based flood modelling company Fathom and the University of Bristol FloodLab. The FABDEM V1-0, launched in 2021 (Laurence Hawker, 2021), is derived from the Copernicus GLO-30 (AIRBUS, 2020) DSM. FABDEM V1-2, released in 2023 (Hawker et al., 2023), has a 1 arc-second resolution and is based on a DSM which removes buildings and vegetation.

Formatted: Font color: Auto
Formatted: Font color: Auto, (Complex) Arabic (Saudi Arabia)

Formatted: Font color: Auto
Formatted: Font color: Auto, (Complex) Arabic (Saudi Arabia)

Formatted: Font color: Auto
Formatted: Font color: Auto, (Complex) Arabic (Saudi Arabia)
Formatted: Font color: Auto
Formatted: Font color: Auto, (Complex) Arabic (Saudi Arabia)

Formatted: Font color: Auto
Formatted: Font color: Auto, (Complex) Arabic (Saudi Arabia)

This dataset was employed for the study area and is available for download from <https://data.bris.ac.uk/data/dataset/s5hqmjcdj8yo2ibzi9b4-ew3sn>.

Formatted: Font color: Auto

Formatted: Font color: Auto, (Complex) Arabic (Saudi Arabia)

3.3.9 TanDEM-X DEM

TanDEM-X (TerraSAR-X add-on for Digital Elevation Measurement) is an innovative space borne-radar interferometer based on two TerraSAR-X radar satellites flying in close formation (Krieger et al., 2007). The TanDEM-X mission represents a collaborative effort between the German Aerospace Center (DLR) and AIRBUS (Wessel, 2016), with the aim of generating a globally consistent DEM. TanDEM-X, launched in 2016, is a DSM with resolutions of 0.4, 1, and 3 arcseconds. The 3-arcsecond TanDEM-X product is readily accessible and can be downloaded directly from <https://geoservice.dlr.de/data-assets/ju28hc7pui09.html>. However, the 0.4 and 1 arcsecond products are available from DLR upon request. It is important to note that the TanDEM-X product has not undergone full processing to eliminate artifacts, outliers, noisy regions, and data gaps. As a result, its adoption in flood modeling has been limited (McClean et al., 2020). In this study, we employed TanDEM-X with a 0.4 arcsecond resolution for our flood modeling purposes.

Formatted: Font color: Auto

Formatted: Font color: Auto, (Complex) Arabic (Saudi Arabia)

3.3.10 TanDEM-EDEM

The TanDEM-X Edited Digital Elevation model (TanDEM-EDM) is an edited version of the TanDEM-X Global with a 1-arcsec (~30 m) pixel resolution released in 2023 (Wessel, 2016). The main update in TanDEM-EDEM version 1 includes filling gaps with suitable alternative DEM data and improving representation of water bodies. The TanDEM-EDEM dataset, which is a DSM, was utilized for the study area and is readily available for download from: https://download.geoservice.dlr.de/TDM30_EDEM/. It has a resolution of 30 m.

Formatted: Font color: Auto

Formatted: Font color: Auto

Formatted: Font color: Auto, (Complex) Arabic (Saudi Arabia)

3.4 ICESat-2 satellite laser altimetry

Ice, Cloud, and Land Elevation Satellite-2 (ICESat-2) is a laser altimetry satellite launched by the National Aeronautics and Space Administration (NASA) in 2018. As the follow-on satellite of ICESat, ICESat-2 continues elevation measurements of ice sheets, glaciers, sea ice, and various other land features with a 91-day exact repeat orbit. ICESat-2 carries the Advanced Topographic Laser Altimeter System (ATLAS), which works by transmitting 10,000 laser pulses per second using laser light of 532 nm (Neumann et al., 2019). The pulse rate enables the satellite to capture a measurement every 70 cm along the ground track. The pulse divides into six beams, organized into three pairs. Each pair comprises one right-side beam and one left-side beam, striking the Earth at a 90 m distance from each other. The distance between each pair is 3.3 km, as depicted in Figure 1(E).

The National Snow and Ice Data Center (NSIDC) portal has developed various products that incorporate photon travel times and locations determined using the built-in GPS from the ICESat-2 satellite. This mission generates 21 products, as detailed on their website: <https://nsidc.org/data/icesat-2/products>. The two data products used in this study are ATL03 and ATL08, as

Formatted: Font color: Auto

Formatted: Font color: Auto, (Complex) Arabic (Saudi Arabia)

summarized in Table 3, and the ~~groundtrack~~ground track pattern of ICESat-2 in ~~this~~the study area is shown in Figure 1(b). The ICESat-2 data were obtained from the NSIDC website via their data access tool (<https://nsidc.org/data/data-access-tool>).

275 **Table 3: ICESat-2 product**

ICESat-2 product		Data Collection (Year)	Datum Reference
ATL03	Global Geolocated Photon Data (DSM)	2018 - 2022	WGS84 ellipsoid
ATL08	Land/Water/Vegetation Elevation (DSM)	2018 - 2022	WGS84 ellipsoid

3.4.1 ~~ATL03~~ATL08

The ~~ATL03 data~~ATL08 product ~~is derived from ICESat-2~~ plays a crucial role as an intermediary between lower and higher-level products. ~~It~~ATL03 data, which provides ~~detailed information on~~ time, latitude, longitude, and height ~~information~~for each track-photon ~~track~~. This ~~comprehensive source of dense~~ photon ~~data facilitates dataset enables~~ subsequent analyses and ~~enables~~ the ~~generation~~creation of surface-specific products, such as land ice height and sea ice freeboard. ~~ATL03 includes surface masks and photon event classifications and applies geophysical corrections to enhance accuracy. Additionally, it supplies spacecraft and instrument information required by higher-level data products. Its role is crucial in facilitating streamlined data processing and serving as a unified source for further scientific investigations~~ (Tom Neumann et al., 2021).

3.4.2 ATL08

285 ~~The ATL08 product is derived from the ATL03 product.~~ The ATL08 product offers estimates of terrain heights, canopy heights, canopy cover, and other descriptive parameters at fine spatial scales in the along-track direction. A fixed segment size of 100 m was chosen to provide continuity of data parameters on the ATL08 data product. Height estimates from ATL08 can be compared with other geodetic data and serve as input for higher-level products like ATL13 (inland water-related heights) and ATL18 (terrain and canopy feature maps) (Neuenschwander et al., 2022). In this study, we used ATL08 ~~product~~land

290 ~~heights~~ from ICESat-2 as the benchmark, ~~to which various DEM products were compared.~~

3.5 Flood Map/Surface Water Extent (SWE) dataset

In this study, SWE and flood maps were collected from two sources: surface water extent (SWE) data from the WorldWater project (<https://worldwater.earth/>), funded by the European Space Agency (ESA) and the Geo-Informatics and Space Technology Development Agency (Public organization) (GISTDA) in Thailand. The flood map datasets are summarized in

295 Table 4 and presented in Figure 3.

3.5.1 WorldWater Surface Water Extent (SWE)

We used SWE products from the WorldWater project, ~~and~~ using data from the Sentinel-1 and Sentinel-2 imaging satellites, both integral parts of the ESA Copernicus program. The Sentinel-1 satellite, launched in 2014, is equipped with a SAR constellation consisting of two polar-orbiting satellites, with objectives on land and ocean monitoring. Sentinel-1 comprises a

Formatted: Font color: Auto

Formatted: Font color: Auto, (Complex) Arabic (Saudi Arabia)

Formatted: Centered

Formatted: Centered

Formatted: Centered

Formatted: Centered

Formatted: Centered

Formatted: Font color: Auto

Formatted: Font color: Auto, (Complex) Arabic (Saudi Arabia)

300 C-band SAR sensor with a 10-meter spatial resolution, ~~operating at an orbiting altitude~~ (Torres et al., 2012). The Sentinel-2
satellites consist of two satellites, namely Sentinel-2A and Sentinel-2B, launched in 2015 and 2017, respectively. The dual-
satellite system operates in coordination with a 180° phase difference in the sun-synchronous orbit, supporting both land and
ocean monitoring (European Space Agency (ESA), 2015). The WorldWater SWE mapping algorithm utilized Sentinel-1 and
Sentinel-2 data from 2017 to 2021 to develop a SWE dataset. The details of Sentinel-1 and Sentinel-2 ~~coverage across the~~
305 ~~study area~~ dataset are depicted in [Table A-2: Copernicus Open Access Hub](#). This algorithm utilizes a fusion approach (Tottrup
et al., 2022), combining optical and radar observations, to provide a more robust delineation of water surfaces. The SWE
products provide information on water occurrence, monthly water presence, water seasonality, maximum and minimum water
extent, all accessible on the website: <https://swdap.worldwater.earth/>. The monthly water presence of the Worldwater SWE in
November 2017 is illustrated in Figure 3(c). It is important to note that the WorldWater SWE dataset uses a median composite
310 of all Sentinel-1 and Sentinel-2 acquisitions within a given month to predict monthly surface water presence. Consequently, it
does not necessarily reflect the maximum extent of flooding within that month.

3.5.2 GISTDA Flood map

GISTDA is a Thai space agency and space research organization that utilizes satellites such as Cosmo-SkyMed, KOMPSAT,
LANDSAT-5, RADARSAT-2, and THAICHOTE (Channumsin et al., 2020) to conduct research and development. GISTDA
315 receives observations of the Earth through the use of Synthetic Aperture Radar (SAR) and optical sensor satellites
(Nithirochanont et al., 2010). SAR satellite information is derived from two constellations: RADARSAT and the Advanced
Land Observing Satellite (ALOS). RADARSAT comprises two SAR satellites, while ALOS integrates a SAR satellite with
an optical satellite. Both RADARSAT and ALOS possess SAR data processing systems. In flooded areas, the Earth's surface
appears smooth in the wavelength of the SAR. This smooth surface causes microwaves to reflect in a specular way, resulting
320 in low backscatter values. This characteristic allows for real-time flood imaging and identification. The SAR data undergoes
processing, and image quality enhancement while eliminating any noise present in the data products (Auynirundronkool et al.,
2012).
To generate flood maps from satellite data, GISTDA employed several analysis methods, including supervised classification,
visual analysis, and thresholding, which were combined with field images. Subsequently, GISTDA used the boundaries of
325 natural and permanent water sources from the existing database and removed these areas from the flood map. Since 2005,
GISTDA has annually published nowcasting flood maps and flood occurrence maps on <https://flood.gistda.or.th/>, which were
utilized in this study. The GISTDA flood occurrence map is shown in Figure 3(b).
From 2014 to 2023, HII analysed flood frequency maps from GISTDA. The assessment focused on the frequency of flood
occurrences, which were categorized into three levels: low, medium, and high-risk flood frequency. Low-risk flood frequency
330 is defined as 1-3 occurrences within the 10-year span, medium risk as 4-7 occurrences, and high risk as 8-10 occurrences, as
depicted Figure 3(a).

Formatted: Font color: Auto

Formatted: Font color: Auto, (Complex) Arabic (Saudi Arabia)

Formatted: Font color: Auto

Formatted: Font color: Auto, (Complex) Arabic (Saudi Arabia)

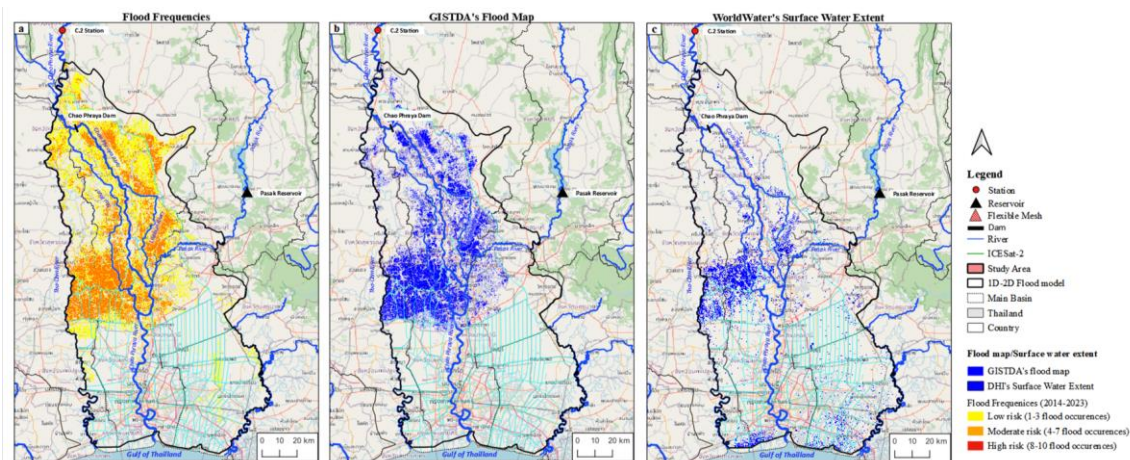


Figure 3: The flood map/surface water extent in study area, presenting (a) flood frequency from HIL, (b) GISTDA's flood map in Nov 2017, and (c) WorldWater's SWE in Nov 2017. © OpenStreetMap contributors 2015. Distributed under the Open Data Commons Open Database License (ODbL) v1.0.

Table 4: Flood map datasets

Product	Resolution (m.)	Period	Frequency	Type file	Download
GISTDA's flood map	-	2005-2021	On request, satellite track, and annual	Shape file	https://flood.gistda.or.th/
WorldWater's surface water extent	10	2017-2021	Monthly and annual	Raster file	https://swdap.worldwater.earth/

Formatted: Font color: Auto

Formatted: Font color: Auto

Formatted: Font color: Auto

Formatted: Font color: Auto

4 Methodology

Formatted: Font color: Auto


The workflow used in this study, illustrated in Figure 4, comprises two primary components. The first component, namely DEM analysis, focuses on evaluating the DEMs (Sect. 3.3) with the ICESat-2 benchmark (Sect. 3.4) as a high-precision reference, which effectively serves as the "ground truth." The best DEM identified in the DEM analysis is then used as input to the flood map analysis. The flood map analysis, focuses on evaluating flood maps generated by the 1D-2D flood model (Sect. 3.1) against WorldWater SWE and GISTDA flood maps (Sect. 3.5).

4.1 DEM Analysis

The primary objective is to assess the accuracy and reliability of the DEMs by comparing them with elevation data obtained from ICESat-2 using statistical methods. In the study area, ICESat-2 ATL08 data were primarily used for evaluation, while ICESat-2 ATL03 data were employed in complex terrain. Figure 4(a) illustrates the workflow involving processing and re-referencing steps. Subsequently, the evaluation of DEMs and ICESat-2 is conducted using statistical methods.

4.1.1 ICESat-2 ATL08 Data Processing

ATL08 provides estimates of terrain height, canopy height, and canopy cover at fine spatial scales in the along-track direction. For each parameter, terrain surface elevation and canopy heights were provided at a fixed along-track segment size of 100 meters (Neuenschwander et al., 2022). The ATL08 dataset comprises a total of 18 land parameters, such as Mean terrain height for segment (h_te_mean), Mode of terrain height for segment (h_te_mode), Number of ground photons in segment (n_te_photins), slope of terrain within segment (terrain_slope), Best fit terrain elevation at the 100 m segment mid-point location (h_te_best_fit), and others. We processed the ATL08 dataset, extracting the latitude and longitude of the photon signals along with the photon heights above the WGS84 ellipsoid. The terrain elevation parameter used for evaluation was h_te_best_fit.

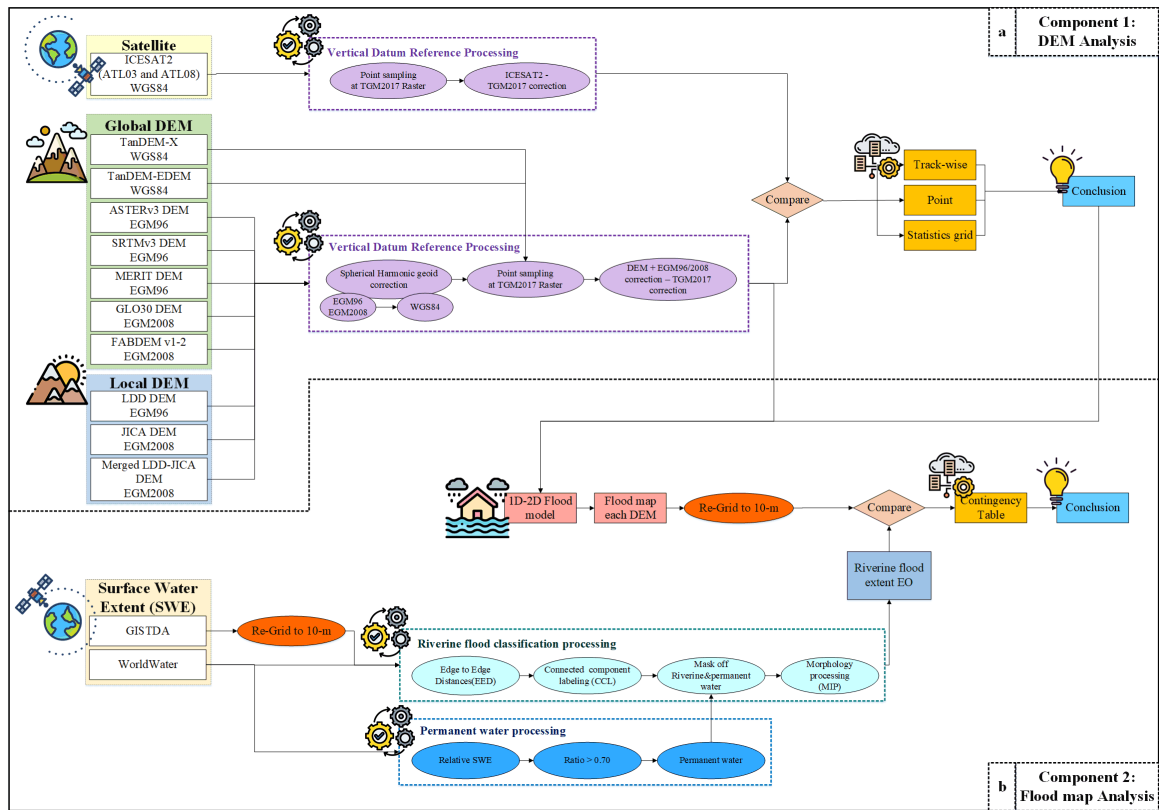

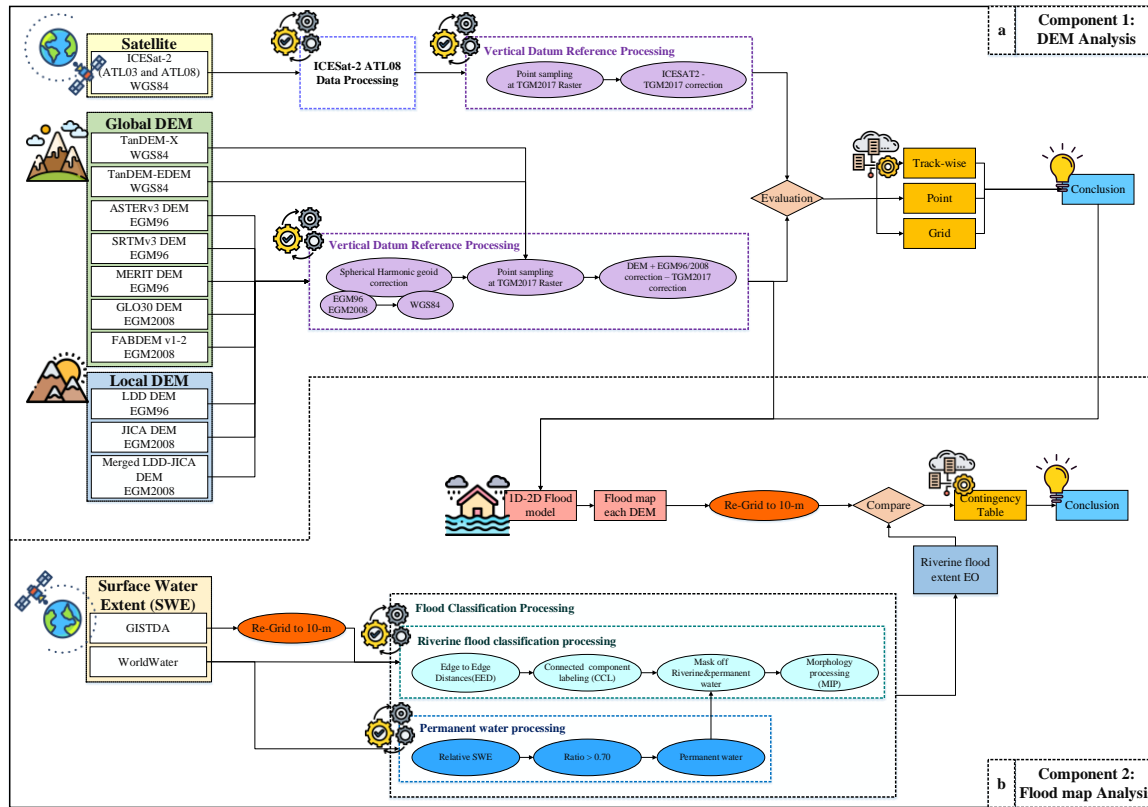


Figure 4: Overall methodology. (a) Component 1: DEM analysis – Involves processing ICESat-2 ATL08 data, applying vertical datum referencing, and evaluating DEMs against the ICESat-2 ATL08 benchmark through point, grid, and track-wise comparisons. (b) Component 2: Flood map analysis

Map Analysis – Includes setting up the 1D-2D flood model, performing flood classification, and evaluating flood maps using appropriate methods.

365 4.1.2 Vertical Datum Reference Processing

To evaluate the DEMs with the ICESat-2 benchmark, it is necessary to use the same vertical datum reference. Vertical datum reference processing was employed to standardize the datum reference. In this study, the vertical datum reference was TGM2017, using Eq. (1) to establish accurate measurements of vertical elevation

$$370 \quad H = h - N \quad (1)$$

Where H is ortometric height, h is ellipsoid height, and N is geoid height.

$$H_{DEM \text{ ref } TGM2017} = h_{DEM} + N_{DEM} - N_{TGM2017} \quad (2)$$

Where $H_{DEM \text{ ref } TGM2017}$ is the DEM referenced to TGM2017, h_{DEM} represents the original DEM, N_{DEM} is the geoid reference of the original DEM, $N_{TGM2017}$ is TGM2017 geoid model.

375 To obtain DEMs referenced to TGM2017, EGM96 and EGM2008 height corrections were added to the DEM heights, followed by subtracting the TGM2017 geoid corrections, as shown in Eq. (2). The geoid model datasets are shown in Sect. 3.2 for reference. For ICESat-2 elevations referenced to TGM2017, the TGM2017 correction was subtracted from the ICESat-2 elevation data.

4.1.3 Evaluation of DEMs using ICESat-2 ATL08 Benchmark

380 ~~The DEM products were estimated and evaluated using statistical methods, including bias (mean error, ME), mean absolute error (MAE), mean square error (MSE), and root mean square error (RMSE). The overall purpose of implementing these statistical methods is to evaluate the paired ICESat-2 ATL08 data with the 10 DEM products covering the study area.~~
~~The DEM products were estimated and evaluated using statistical methods, including bias (mean error, ME), mean absolute error (MAE) (Willmott, 2005,), mean square error (MSE), root mean square error (RMSE) (Chai and Draxler, 2014) and percent bias (PBIAS) (D. N. Moriasi et al., 2007). The overall purpose of implementing these statistical methods is to evaluate the ICESat-2 ATL08 data paired with the 10 DEM products covering the study area. Subsequently, the performance of the DEMs was systematically compared using statistical indices defined in Eqs. (3)–(6) (Samantaray and Sahoo, 2024).~~

$$ME = \frac{1}{n} \sum_{i=1}^n (Y_i - \hat{Y}_i) \quad (3)$$

$$MAE = \frac{1}{n} \sum_{i=1}^n |Y_i - \hat{Y}_i| \quad (4)$$

$$390 \quad MSE = \frac{1}{n} \sum_{i=1}^n (Y_i - \hat{Y}_i)^2 \quad (5)$$

$$RMSE = \sqrt{\sum_{i=1}^n \frac{(Y_i - \hat{Y}_i)^2}{n}} \quad (6)$$

$$PBIAS = 100 \times \left[\frac{\sum_{i=1}^n (Y_i - \hat{Y}_i)}{\sum_{i=1}^n \hat{Y}_i} \right] \quad (7)$$

Where \hat{Y}_i represents ICESat-2 ATL08 elevation, Y_i denotes the elevation for each DEM (i.e., LDD DEM, JICA, merged LDD-JICA DEM, ASTEM GDEM V3, SRTM DEM, MERIT DEM, FABDEM v1-2 DEM, GLO30 DEM, TanDEM-X, and

395 TanDEM-EDEM), and n is the number of observations. The ideal PBIAS value is 0: positive values indicate that the DEM products tend to overestimate compared to the ICESat-2 ATL08 benchmark, while negative values indicate a tendency toward underestimation.

Formatted: Font: Not Italic

Formatted: (Complex) Thai

We conducted three types of comparisons as follows:

Point comparison

400 Point comparison was performed for every segment of the ICESat-2 ATL08 pass over the study area. This approach aimed to provide a quantitative overview of the quality and identify potential discrepancies among the ten DEMs in comparison to ICESat-2 ATL08 data (Weifeng et al., 2024), using statistical methods. A total of 954,800 elevation points were extracted from the study area for point-to-point comparison.

Grid comparison

405 The grid comparison was conducted using a regular square grid over the study area. This comparison provides an overview of the spatial variation of the quality of the DEMs in comparison to ICESat-2 ATL08 benchmark. In this study, we employed a 5-km resolution for grid comparison, which involved calculating statistical measures for every segment within each grid cell and displaying the evaluation spatially on a map.

Track-wise comparison

410 The track-wise comparison was conducted using tracks of ICESat-2 over the study area. The distance between the ICESat-2 points was calculated using UTM x and y coordinates, as shown in Eq.(7). The track-wise comparison represents an overall elevation profile comparison between DEMs and ICESat-2 ATL08 data over the study area.

$$distance = \sqrt{(x_0 - x_i)^2 + (y_0 - y_i)^2} \tag{7}$$

Where x represents the x coordinates, and y denotes the y coordinates.

415 **4.2 Flood Map Analysis**

The purpose of the flood map analysis is to evaluate the performance of simulated flood maps from the 1D-2D flood model using various DEM products selected from the first component in comparison to the WorldWater SWE and GISTDA flood ~~map~~maps. This comparative analysis aims to assess the accuracy and effectiveness of the improved flood simulation model.

4.2.1 1D-2D Flood Modelling Setup

420 The setup of the 1D-2D flood model mirrored the original model, retaining the same parameters with only the DEM being modified to generate the flood map. The DEM products were selected based on the evaluation of DEMs against the ICESat-2 ATL08 benchmark. Flood maps in the lower CPY basin were simulated using the 1D-2D flood model for the years 2017, and 2021. The flood map simulation results from the 1D-2D flood model present flood extents that occurred during the simulation period and at each daily time step (DHI, 2018). In this study, we employ simulated flood maps generated from a 1D-2D flood

425 model using the merged LDD-JICA DEM and FABDEMv1-2 DEM products and compare them with WorldWater SWE and
GISTDA flood maps.

4.2.2 Flood Classification Processing

The flood map and SWE dataset used for evaluation in this study (Sect. 3.5) had different resolutions, formats, and flood map
definitions. To effectively assess the simulated flood map from [the](#) 1D-2D flood model, we compared it to the WorldWater
430 SWE and GISTDA flood map. However, it is crucial to employ the same resolution, format, and flood definition. Common
types of flooding include flood irrigation, pluvial flash floods, coastal floods, and riverine floods. The 1D-2D flood model
only simulates riverine floods, caused by high water levels in the rivers, eventually overflowing onto the neighboring land due
to high river discharge over an extended period. In order to compare the simulated flood map to the satellite EO products, we
first have to extract riverine flooding patterns from the surface water extent maps provided by satellite EO. This is done in the
435 following steps:

Permanent water processing

Permanent water bodies should be removed from the satellite EO SWE maps prior to comparison. The GISTDA datasets does
not include permanent water bodies. The WorldWater product includes permanent water bodies, which must be removed prior
to comparison with simulated flood maps. We use relative water frequency (Yamazaki et al., 2015), which measures the
440 occurrence of surface water within a defined time period. The relative water frequency f_r of pixel was defined by Eq.(8) and
shown as Figure A 4(a).

$$f_r(t) = \frac{f_a(t)}{f_v(t)} \quad (8)$$

Where f_a depicts the frequency of surface water detections during a certain time period for each pixel, and f_v represents the
frequency of valid observations during the same period for each pixel.

445 The relative water frequency ranges between 0.0 to 1.0. The permanent water designation indicates that there was observed
water coverage in every single observation of the considered time period, which corresponds to a relative water frequency of
1.0 (Martinis et al., 2022). In many cases, lower thresholds of 0.9, 0.7, and 0.5 were applied (Rao et al., 2018; Yamazaki et al.,
2015). The permanent water map for each threshold is illustrated in Figure A 4. In this study, the threshold for relative water
frequency is set to 0.7, indicating that a pixel is considered permanent water if it is present in 70% or more of the valid
450 observations over the specified time period. The output of the permanent water processing is utilized in riverine flood
classification processing to remove permanent water from the WorldWater SWE.

Riverine flood classification processing

The WorldWater and GISTDA datasets contain both riverine floods and other inundated areas caused, for instance, by
irrigation or pluvial floods. In order to separate riverine floods in the satellite EO flood maps, we used the following method
455 Figure A 5:

- Expand the wet area from WorldWater and GISTDA by 200 meters using expand segmentation labels (ESL) without overlap (Van Der Walt et al., 2014). The ESL method merges labels in a label image based on the distances between each pixel. Labels that are close by will be merged.
- Subsequently, label each pixel using connected component labeling (CCL) (Rosenfeld and Pfaltz, 1966 and AbuBaker et al., 2007). The CCL method is employed to detect connected regions in binary digital image. The assumption of riverine flood identification is based on the presence of wet connected pixels originating from the river. These are then masked off using ESL, and the riverine flood label is selected.
- Subsequently, the SWE undergoes morphological image processing (MIP) using a closing algorithm (Van Der Walt et al., 2014). The structuring element, footprint, passed to the closing algorithm is a boolean array describing the neighborhood. We used a disk to create a circular structuring element with a radius of 2, implemented as the footprint. The output provides riverine flood maps, namely WorldWater and GISTDA flood map, for evaluation with other flood map products.

4.2.3 Flood map evaluation methods

This study evaluates the flood map of the lower CPY River basin using the contingency table (“Glossary of Terms,” 1998), comparing flood maps from two different dimensions, as shown in Table 5. We evaluated the flood maps produced by the 1D-2D flood model by comparing them with the monthly surface water presence maps from WorldWater and GISTDA for the years 2017 and 2021. We mainly use probability of detection (POD), false alarm ratio (FAR), and critical success index (CSI) (Forecast, 1995) to perform the evaluation. These statistics are based on the number of grid cells or pixels in the study area is defined as:

$$POD = \frac{Hit}{Hit+Miss} \tag{9}$$

$$FAR = \frac{False\ alarm}{Hit+False\ alarms} \tag{10}$$

$$CSI = \frac{Hit}{Hit+False\ alarms+Miss} \tag{11}$$

Where, *Hit* represents the number of correctly detected flooded pixels from two different dimensions. *True negative* donates the number of correctly detected non-flooded or dry areas from two different dimensions. *Miss* indicates the number of floods from dimension 1 that are not detected by dimension 2, while *False Alarm* represents the number of floods from dimension 2 which did not occur floods in dimension 1. A perfect score for both POD and CSI is 1, while a value of 0 represents the best score for FAR.

Table 5: Contingency table

		Observation Observed flood map	
		Flood	Unflood
Model Modelled flood map	Flood	Hits	False alarms
	Unflood	Misses	True negative

5 Result

Formatted: Font color: Auto

5.1 1D-2D Flood model calibration results

The 1D river model was calibrated using in-situ water surface elevation data for the period 2012 to 2013. The calibration results of the main river in the study area are presented in Charoensuk et al., 2024. The overall performance during the calibration period is generally satisfactory for all main rivers, with an average R^2 of 0.96, RMSE of 0.30 m, and NSE of 0.90.

The 1D-2D flood model has been calibrated for extreme floods in 2011, as presented in Charoensuk et al., 2018. Normally, flooding in Thailand is influenced by meteorological conditions, river conveyance, and sea level rise. However, the primary cause of the 2011 flood was dike breaching along the Chao Phraya River, resulting in uncontrollable flood inundation. The simulated flood, when compared with the GISTDA's flood map, satisfactorily corresponds to flood depth, flood propagation direction, and duration.

5.2 Results of DEMs evaluation against the ICESat-2 ATL08 benchmark

5.2.1 Point comparison evaluation results

Figure 5 illustrates point comparisons between the statistical metrics of 10 DEM products against ICESat-2 ATL08 benchmark. As depicted in the Figure 5(a), the average ME of the local DEM products was -0.88 m, whereas the average ME of global DEM products was +1.62 m. The results indicate that local DEM products tend to underestimate have negative bias, while global DEM products tend to overestimate show positive bias when compared against ICESat-2 ATL08 benchmark. This tendency is attributed to the algorithms described in Sect. 3.3, which remove buildings and vegetation from the local DEM products. Moreover, the local DEM products have a finer grid resolution compared to the global DEM products. The average performance statistics of the local DEM and global DEM were 1.25 and 2.17 m for MAE, 4.23 m and 13.52 m for MSE, and 2.04 and 3.38 m. for RMSE, as shown in Figure 5(b), Figure 5(c) and Figure 5(d) respectively.

Table 6 presents the statistical results of point comparisons between 10 DEM products compared with ICESat-2 ATL08, indicating that the accuracy of JICA DEM and FABDEMv1-2 DEM was higher than other local and global DEM, respectively. The statistical results of JICA DEM were -0.65 m, 1.04 m, 3.51, and -1.87 m, and -17.00% for ME, MAE, MSE, and RMSE, and PBias, respectively. Specifically, the FABDEMv1-2 DEM showed the highest accuracy, with ME, MAE, MSE, RMSE, and RMSEP Bias values of 0.25 m, 0.80 m, 3.79, and -1.95 m, and 4.59% respectively.

Figure 6 presents the histogram distributions of ME for 10 DEM products relative to ICESat-2 ATL08 benchmark. The histogram illustrates distributions illustrate that the entire curve of both local and global DEMs shifts towards negative and positive biases, respectively. These shifts indicate that local DEMs, including LDD DEM, JICA DEM, and merged LDD-JICA DEM, underestimate the exhibit a negative bias in elevation relative to the ICESat-2 ATL08 benchmark, with ME averages of -1.30 m, -0.65 m, and -0.68 m, respectively.

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

515 Conversely, the shifts observed in the histogram distribution of global DEMs, including ASTERv3 DEM, SRTMv3 DEM, Merit DEM, GLO30 DEM, FABDEMv1-2 DEM, TanDEM-X DEM, and TanDEM-EDEM DEM, indicate an overestimationa positive bias of the elevation of ICESat-2 ATL08 benchmark. The ME averages for these DEMs were +4.78 m, +2.03 m, +1.56 m, +0.84 m, +0.25 m, +0.94 m, and +0.91 m, respectively. Further details are provided in Figure A 7 and Figure A 8, illustrating the mean absolute error (MAE) and mean squared error (MSE), respectively.

520

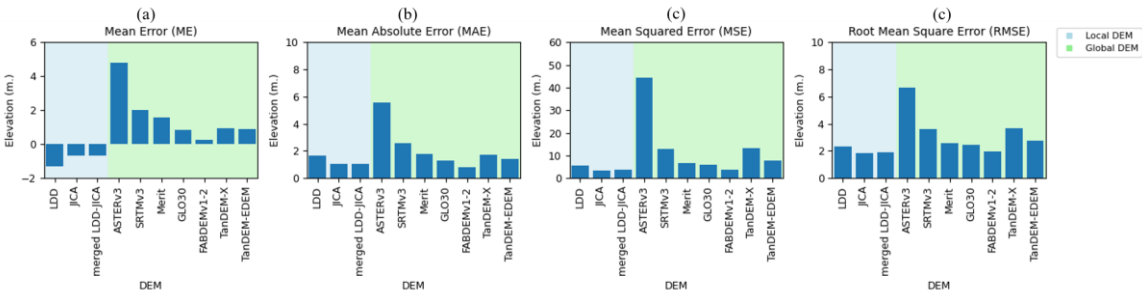


Figure 5: a bar chart of statistical metrics, comparing 10 DEM products against the ICESat-2 ATL08 benchmark, including (a) mean error (ME), (b) mean absolute error (MAE), (c) mean squared error (MSE), and (d) root mean square error (RMSE). The resulting averages are computed across the datasets in study area.

525

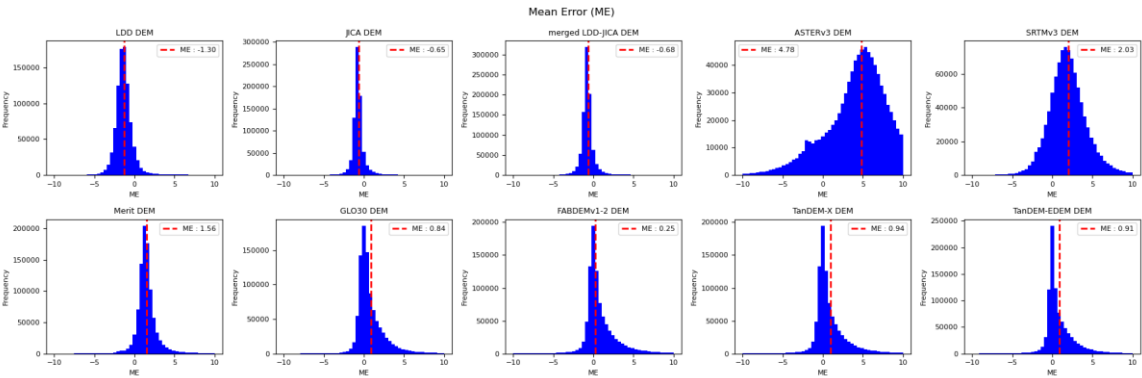


Figure 6: histogram distribution of the mean error (ME), comparing 10 DEM products against the ICESat-2 ATL08 benchmark.

Table 6: Table of statistical metrics, comparing 10 DEM products against the ICESat-2 benchmark. The resulting averages are computed across the datasets in study area.

DEM product	Scale	Statistical method				
		ME (m.)	MAE (m.)	MSE (m.)	RMSE (m.)	PBIAS (%)
LDD	Local	-1.330	1.64	5.45	2.33	-34.76
JICA	Local	-0.65	1.04	3.51	1.87	-17.00
merged LDD-JICA	Local	-0.68	1.08	3.74	1.93	-15.38
Average local DEMs		-0.88	1.25	4.23	2.04	-22.38
ASTER	Global	+4.77	5.57	44.28	6.65	47.71
SRTM	Global	+2.04	2.58	12.92	3.59	27.99
MERIT	Global	+1.56	1.79	6.76	2.6	22.99
GIO30	Global	+0.84	1.3	5.89	2.43	13.87
FABDEMv1-2	Global	+0.25	0.8	3.79	1.95	4.59
TanDEM-X	Global	+0.94	1.73	13.29	3.65	15.24
TanDEM-EDEM	Global	+0.91	1.43	7.74	2.78	14.84
Average global DEMs		+1.62	2.17	13.52	3.38	21.03

5.2.2 Grid comparison evaluation results

Figure 7 displays the ME spatial grid comparison of 10 DEM products against the ICESat-2 ATL08 benchmark, with a resolution of 5x5 km. As shown in the figure, the local DEMs indicated overall lower values than the benchmark, with LDD DEM showing the lowest ME. In contrast, the overall ME spatial grid comparison of global DEMs was higher than the benchmark and clearly reveals that the most of global DEMs exhibit poor performance in urban areas. Notably, in the lower middle of the study area lies Bangkok, the capital city of Thailand. However, the FABDEMv1-2 DEM performed better in urban areas compared to other global DEMs, which can be attributed to the improved algorithms that vegetation and buildings are eliminated in this DEM described in Sect. 3.3.8 and Dandabathula et al., 2023.

5.2.3 Track-wise comparison evaluation results

The track-wise comparison involves comparing the land elevation profile over the study area between the 10 DEM products and ICESat-2 ATL08 benchmark (cf. Figure 8). As shown in Figure 8, it is evident that the local DEMs exhibit lower land elevation compared to the ICESat-2 ATL08 benchmark. For most of the tracks, the LDD DEM measures a lower elevation than benchmark, while the JICA and merged LDD-JICA DEM follow the ICESat-2 ATL08 measurements more closely. This trend is consistent along the majority of the tracks, indicating that the LDD DEM generally underestimates the negative bias in elevation when compared to ICESat-2. Additionally, both the JICA and merged LDD-JICA DEMs closely track the ICESat-2 measurements for most of the tracks. Moreover, local DEMs show lower elevations in urban areas, in agreement with ICESat-2 ATL08. However, we expect that both of the local DEMs and ICESat-2 ATL08 can effectively remove buildings in urban areas. However, there may be some points where the values cannot be entirely removed still have residual positive bias compared to the true bare earth elevation in urban areas.

Formatted Table
Inserted Cells
Inserted Cells

Formatted Table
Inserted Cells
Inserted Cells

Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)

Formatted: English (United Kingdom)

The overall result of the track-wise comparison of global DEMs shows a higher elevation than the benchmark, especially in urban areas, clearly indicating ~~the shape of a hill~~higher elevations in these urban areas, as illustrated in [Figure 8](#). In ~~the~~ overallmost tracks, ASTERv3 and SRTMv3 DEMs ~~tend to overestimate and~~ exhibit a notable positive bias and fluctuations compared to the benchmark. Meanwhile, Merit, GLO30, TanDEM-X, and TanDEM-EDEM DEMs tend to follow a fluctuating pattern and measure slightly higher than the

Formatted: English (United Kingdom)

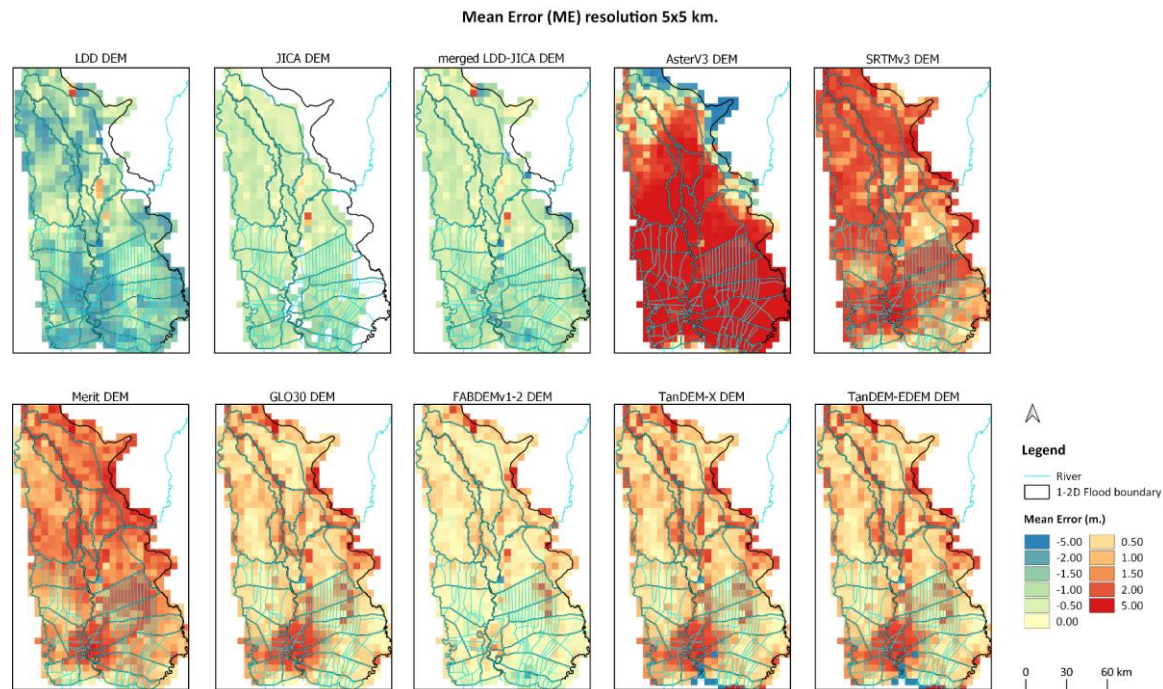


Figure 7: the mean-error (ME) spatial-grid comparison of 10 DEM products against the ICESat-2 ATL08 benchmark, with a resolution of 5x5 km.

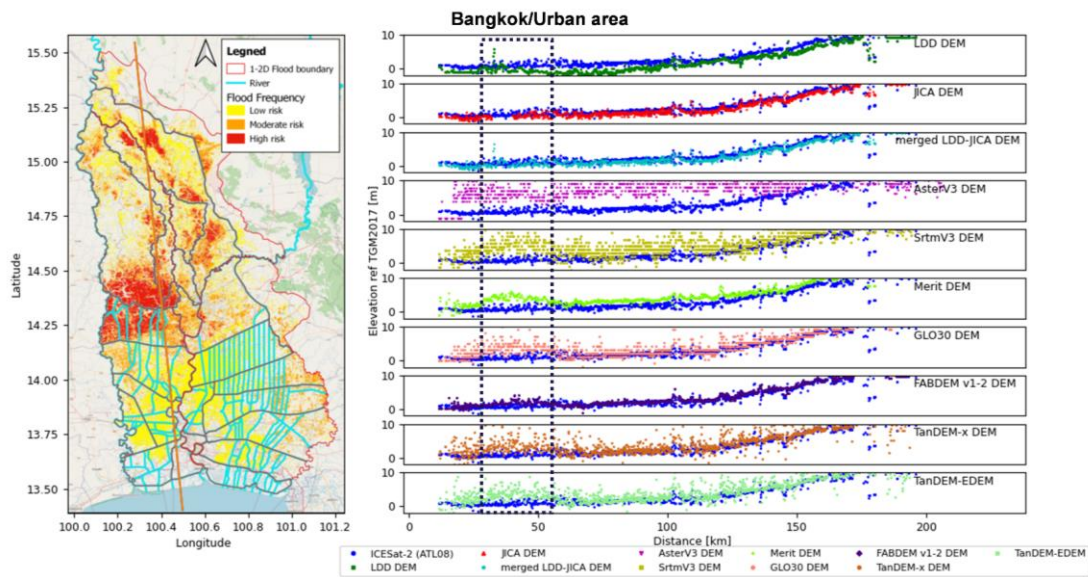


Figure 8: The track-wise comparison of 10 DEM products with ICESat-2 ATL08 benchmark. © OpenStreetMap contributors 2015. Distributed under the Open Data Commons Open Database License (ODbL) v1.0.

benchmark's track. FABDEMv1-2 closely aligns with the benchmark, indicating its strong performance. The track-wise comparison provides more detailed information in Appendix A.

The summary results of the evaluation of the 10 DEM products are presented in the parallel plot shown in Figure 9, which displays the 10 DEM products along with the results of statistical methods including MAE, RMSE, and DEM resolution. In the local DEM products, it is notable that the LDD DEM exhibits higher error and resolution compared to the JICA and merged LDD-JICA DEMs. Both the JICA and merged LDD-JICA DEMs demonstrate similar accuracy, but the JICA DEM does not cover the entire study area (Figure 2). Therefore, we utilized the merged LDD-JICA DEM from the local DEM product to implement the 1D-2D flood model. For the global DEM product, the FABDEMv1-2 demonstrates the best performance compared to other global DEM products. Therefore, we selected the FABDEMv1-2 DEM to implement in the 1D-2D flood modelling, even though its spatial resolution is lower than TanDEM-X DEM.

Formatted: Font: 10 pt, Not Bold, Complex Script Font: 12 pt, Not Bold

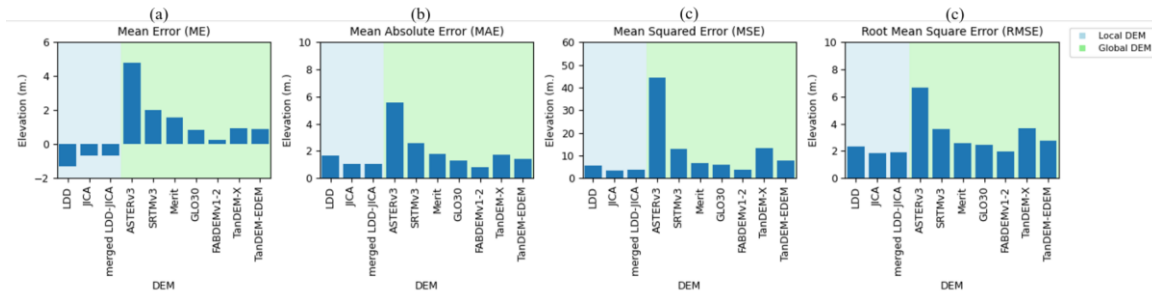


Figure 5: a bar chart of statistical metrics, comparing 10 DEM products against the ICESat-2 ATL08 benchmark, including (a) mean error (ME), (b) mean absolute error (MAE), (c) mean squared error (MSE), and (d) root mean square error (RMSE). The resulting averages are computed across the datasets in study area.

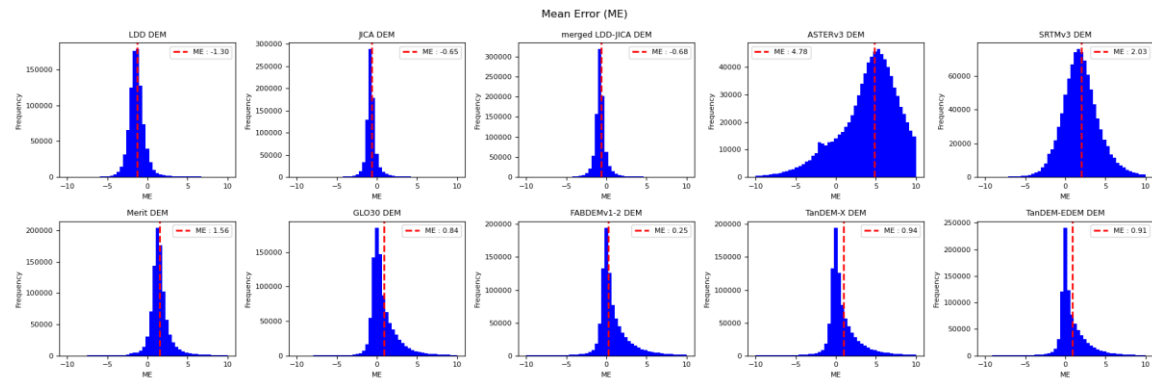


Figure 6: histogram distribution of the mean error (ME), comparing 10 DEM products against the ICESat-2 ATL08 benchmark.

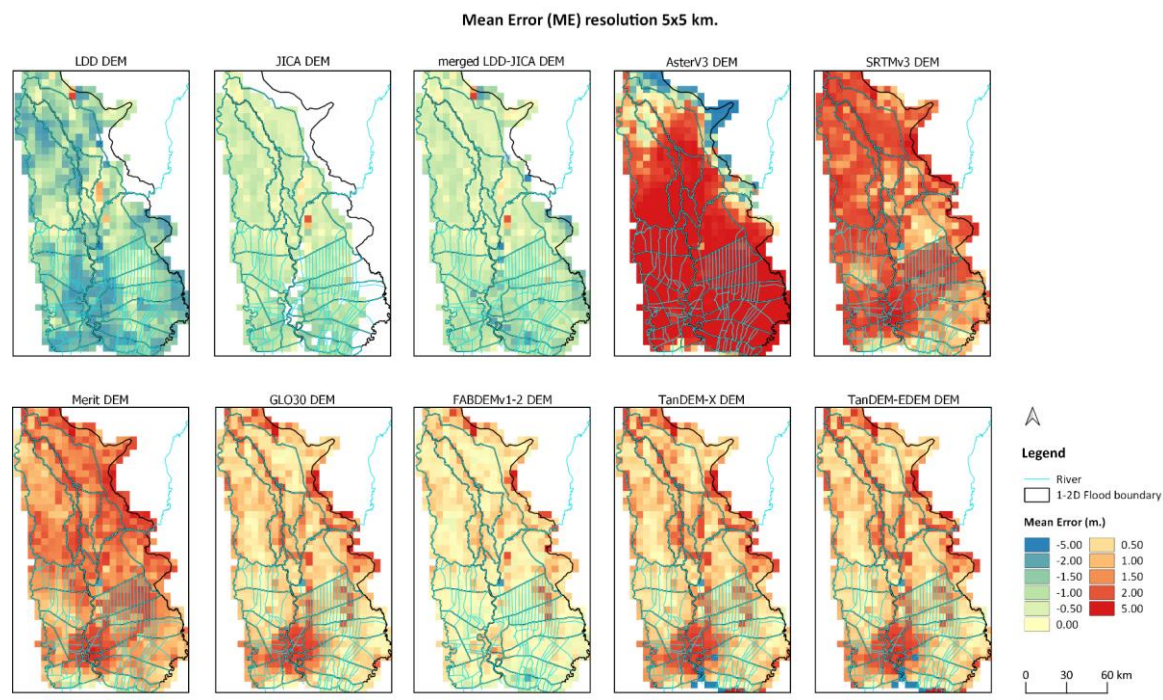


Figure 7: the mean error (ME) spatial grid comparison of 10 DEM products against the ICESat-2 ATL08 benchmark, with a resolution of 5x5 km.

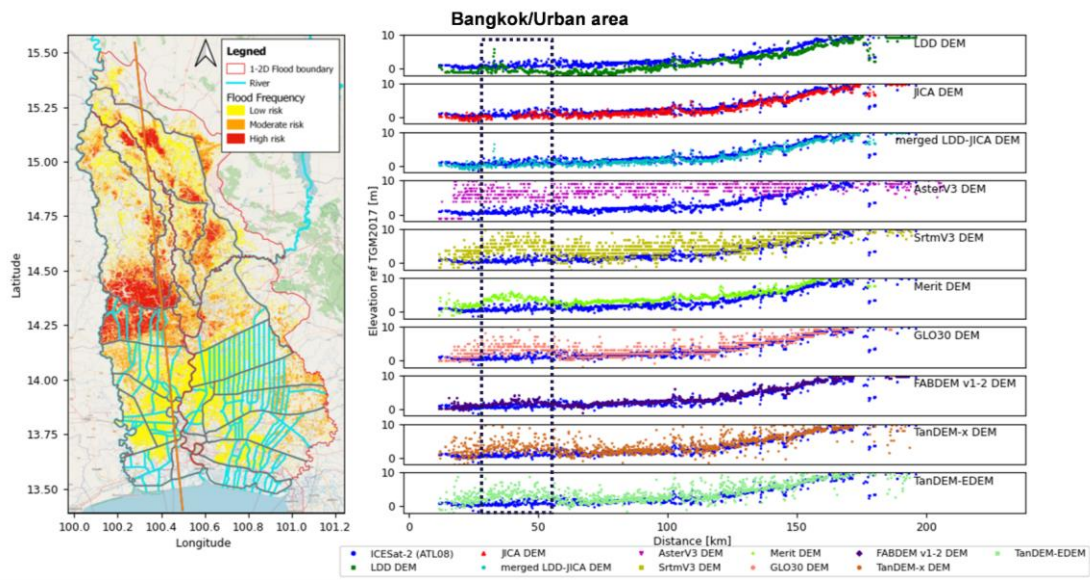


Figure 8: The track-wise comparison of 10 DEM products with ICESat-2 ATL08 benchmark. © OpenStreetMap contributors 2015. Distributed under the Open Data Commons Open Database License (ODbL) v1.0.

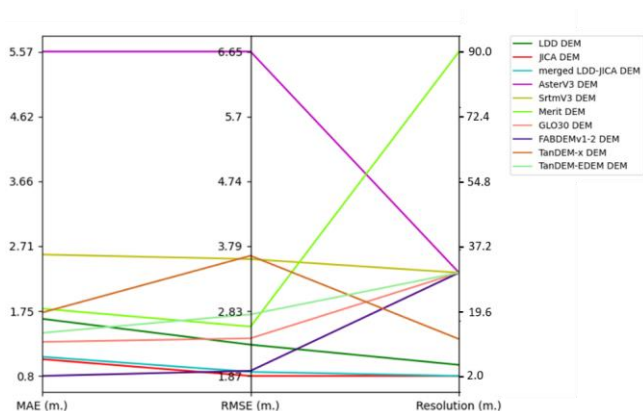


Figure 9: The parallel plot of 10 DEMs evaluation with the ICESat-2 ATL08 benchmark.

5.3 Results of the evaluation of flood inundation maps

We ~~implemented~~evaluated simulated flood maps produced using two DEMs: 1) the merged LDD-JICA DEM and 2) the FABDEMv1-2 DEM, as described in Section 5.2 from Sect. 5.2, into the 1D-2D flood model. The simulated flood map generated by the 1D-2D flood model, referred to as the Model flood map, ~~was~~were evaluated using flood maps from WorldWater and GISTDA for September, October, and November (flood season) in the years 2017 and 2021. The 1D-2D flood model generated daily simulated flood maps. To ensure accurate comparisons, we selected the dates of satellite passes over the study area according to [Table A-1 and Table A-2: WorldWater and GISTDA datasets](#). These dates were then combined to represent the flood areas that occurred in each month. The results of the flood map evaluation were categorized based on the DEM ~~used~~and compared to the flood maps from WorldWater and GISTDA.

Table 7 provides a comparison of the POD, FAR, and CSI scores for the flood simulation using the merged LDD-JICA DEM, month, and year. Overall, the flood model using the merged LDD-JICA DEM tends to overestimate flooding, particularly in the eastern part of the study area. This overestimation in the eastern part of the study area was attributed to the boundary between the JICA and LDD DEMs in the merged LDD-JICA DEM. The average FAR values of 0.926 and 0.790, along with POD values of 0.713 and 0.585 compared to WorldWater and GISTDA flood maps, respectively, indicate that the Model flood map portrays a larger flood extent while still effectively detecting floods. The average CSI values of 0.072 and 0.183 indicate low model performance and a reflection of the larger flood extent simulation when compared to the flood maps by WorldWater and GISTDA. The overall flood map evaluation based on the FABDEMv1-2 DEM indicates that the Model flood map tends to overestimate, with average FAR values of 0.916 and 0.730 compared to WorldWater and GISTDA flood maps, respectively. Meanwhile, the average CSI values of 0.081 and 0.230 indicate low performance.

Figure 10 shows flood maps and contingency tables for September, October, and November in 2017 and 2021. Figure 10(a-1) presents contingency tables comparing WorldWater monthly SWE and Model flood maps. Figure 10(a-1) presents contingency tables comparing WorldWater monthly SWE and Model flood maps respectively based on the merged LDD-JICA DEM in 2017. The results of the evaluation show low CSI values of 0.046, 0.071, and 0.076 for September, October, and November in 2017, respectively, indicating that the Model flood map based on the merged LDD-JICA DEM has low performance. Additionally, the number of False alarms was high, resulting in high FAR values of 0.952, 0.926, and 0.923 for September, October, and November in 2017, respectively. Figure 10(b-1) illustrates contingency tables comparing GISTDA and Model flood maps based on the merged LDD-JICA DEM in 2017. The POD values of 0.259, 0.567, and 0.642 are due to the high number of Misses, particularly in September in the upper part of the study area. Moreover, the results show more false alarms in the eastern part of the study area, attributed to the combination of LDD and JICA DEMs. The FAR values of 0.913, 0.727, and 0.699 for September, October, and November in 2017, respectively. The CSI values were low in September at 0.070 but increased to 0.226 and 0.258 for October and November, respectively. The detailed statistics are summarized in Table 7. Figure 10(a-2) and Figure 10(b-2) present contingency tables comparing WorldWater and Model, and GISTDA and Model for each month in 2021, respectively. The results of flood map evaluation in 2021 followed a similar trend to that of the 2017 flood. In Figure 10(a-2), low CSI values of 0.091, 0.071, and 0.075 are depicted for September, October, and December in 2021, respectively. Additionally, FAR values of 0.903, 0.928, and 0.923, and POD values of 0.593, 0.845, and 0.835, were high observed for September, October, and November in 2021, respectively. These values suggest that the WorldWater flood map indicates a smaller flood extent compared to the Model flood map based on the merged LDD-JICA DEM. Figure 10(b-2) illustrates an increase in CSI values to 0.133, 0.214, and 0.200 for September, October, and November in 2021, respectively, confirming that the Model flood map based on the merged LDD-JICA DEM fit the GISTDA flood map as well. However, the FAR values were high at 0.852, 0.760, and 0.790 for September, October, and November in 2021, respectively, indicating that the Model flood map based on the merged LDD-JICA DEM shows overestimated flood extents. Despite this, the POD values of 0.564, 0.667, and 0.810 suggest that the Model flood map based on the merged LDD-JICA DEM can effectively detect GISTDA flood map extents, particularly in October and November. Table 7 presents a comparison of the POD, FAR, and CSI scores for the flood simulation using FABDEMv1-2 DEM, month, and year. The overall flood map evaluation based on the FABDEMv1-2 DEM indicates that the Model flood map tends to overestimate, with average FAR values of 0.916 and 0.730 compared to WorldWater and GISTDA flood maps, respectively. Meanwhile, the average CSI values of 0.081 and 0.230 indicate low performance. Figure 11 shows flood maps and contingency tables in 2017 and 2021. Figure 11(a-1) illustrates contingency tables comparing WorldWater and Model flood maps based on FABDEMv1-2 DEM for each month in 2017. The evaluation results clearly indicate that the Model flood tends to overestimate the extent of flooding, as evidenced by FAR values of 0.946, 0.913, and 0.914 and low CSI values of 0.052, 0.084, and 0.085 in September, October, and November in 2017, respectively. However, the POD values were high, with values of 0.625, 0.710, and 0.907 in September, October, and November, respectively,

Field Code Changed

Field Code Changed

indicating that the Model flood map based on FABDEMv1-2 DEM can effectively detect the WorldWater flood map as well, as shown in Table 7. Figure 11(b-1) presents contingency tables comparing GISTDA and Model floods for each month in 2017. The Figure 11(b-1) confirms the observations made in Figure 11(a-1), indicating that the Model flood map tends to overestimate the extent of flooding compared to the GISTDA flood map. However, the FAR values decrease slightly to 0.834, 0.612, and 0.591, and the POD values decrease to 0.331, 0.664, and 0.672 in September, October, and November in 2017, respectively. The decrease in POD is attributed to a higher number of Misses in the upper part of the study area, suggesting that the GISTDA flood map depicts more flooding than the Model flood map based on FABDEMv1-2 DEM. On the other hand, the CSI improved to 0.124, 0.325, and 0.341 in September, October, and November in 2017, respectively, indicating that the model results are more accurate when compared with GISTDA flood map. Additionally, the figure illustrates that the GISTDA flood map shows a greater extent of flooding compared to the WorldWater flood map.

Figure 11(a-2) and Figure 11(b-2) depict contingency tables comparing WorldWater and Model, and GISTDA and Model for each month in 2021, respectively. The Model flood map based on FABDEMv1-2 DEM exhibits an overestimation of flooding, particularly noticeable in the eastern part of the study area. Figure 11(a-2) illustrates high FAR values of 0.887, 0.920, and 0.916 that indicating that there are more False alarms in September, October, and November, respectively. The POD was high values of 0.584, 0.885, and 0.850 and low CSI values of 0.105, 0.079, and 0.083 in September, October, and November in 2021, respectively. This figure illustrates that the Model and the WorldWater flood map indicates more and less flooding, respectively. Figure 11(b-2) reveals more Misses in the upper part of the study area, resulting in a decrease in the POD values to 0.502, 0.680, and 0.837 compared to Figure 11(a-2). Despite this, the FAR values remain high at 0.832, 0.738, and 0.776, particularly notable in the eastern part of the study area. However, the Model flood map effectively detects the GISTDA flood map as well. The CSI values of 0.144, 0.234, and 0.215 for September, October, and November in 2021, respectively, indicate that the Model flood map exhibits improved accuracy in comparison to the GISTDA flood map.

The overall assessment of the Model flood map, based on both the merged LDD-JICA and FABDEMv1-2 DEMs, indicates an overestimation of flood extent compared to both WorldWater and GISTDA flood maps. When comparing the model flood map based on the merged LDD-JICA DEM and FABDEMv1-2 DEM with each of the WorldWater and GISTDA flood maps, the results consistently indicate a slight improvement in performance for the Model flood map based on FABDEMv1-2. The CSI of the Model flood map based on FABDEMv1-2 increases by 0.010 and 0.047 compared to the Model flood map based on the merged LDD-JICA DEM for WorldWater and GISTDA flood maps, respectively. Additionally, the FAR is reduced by approximately 0.010 and 0.060 for WorldWater and GISTDA flood maps, respectively. Although the study used flood classification processing to extract riverine flood maps from the SWE map for comparison, there are still limitations. Continuous improvement in flood classification process are necessary. The study results show that the overall assessment of flood simulation based on FABDEMv1-2 DEM reveals a slight improvement of 13.55-25.56% in terms of the CSI compared to flood simulation based on the merged LDD-JICA DEM. However, the DEM is one factor contributing to improved performance, many other factors still require further improvement.

675

680

Figure 12 illustrates the overall performance of the Model flood map, based on both the merged LDD-JICA and FABDEMv1-2 DEMs. The results are presented in three box plots, corresponding to the evaluation metrics: POD, FAR, and CSI. FABDEMv1-2 exhibits a slightly higher median POD than the merged LDD-JICA, indicating a better ability to correctly detect flood events. The interquartile range (IQR) for the merged LDD-JICA is wider, suggesting greater variability in detection performance compared to FABDEMv1-2, which shows more consistent POD values. Both DEMs show relatively high FAR values, with the merged LDD-JICA having a slightly higher median FAR, indicating it generates more false alarms. FABDEMv1-2 has a smaller IQR, reflecting more consistent performance in minimizing false alarms compared to the merged LDD-JICA. Additionally, FABDEMv1-2 demonstrates a significantly higher median CSI than the merged LDD-JICA, reflecting superior overall performance in balancing correct detections and false alarms. The narrower IQR for FABDEMv1-2 suggests more consistent performance, while the merged LDD-JICA shows greater variability in CSI values.

Table 7: The statistical metrics of the contingency table, comparing flood map dimensions 1 and 2.

Time	Dimension 1: WorldWater Dimension 2: Model			Dimension 1: GISTDA Dimension 2: Model			DEM product
	POD	FAR	CSI	POD	FAR	CSI	
2017-09	0.549	0.952	0.046	0.259	0.913	0.070	merged LDD-JICA
2017-10	0.612	0.926	0.071	0.567	0.727	0.226	merged LDD-JICA
2017-11	0.842	0.923	0.076	0.642	0.699	0.258	merged LDD-JICA
2021-09	0.593	0.903	0.091	0.564	0.852	0.133	merged LDD-JICA
2021-10	0.845	0.928	0.071	0.667	0.760	0.214	merged LDD-JICA
2021-11	0.835	0.923	0.075	0.810	0.790	0.200	merged LDD-JICA
Total average	0.713	0.926	0.072	0.585	0.790	0.183	merged LDD-JICA
2017-09	0.625	0.946	0.052	0.331	0.834	0.124	FABDEMv1-2
2017-10	0.710	0.913	0.084	0.664	0.612	0.325	FABDEMv1-2
2017-11	0.907	0.914	0.085	0.672	0.591	0.341	FABDEMv1-2
2021-09	0.584	0.887	0.105	0.502	0.832	0.144	FABDEMv1-2
2021-10	0.885	0.920	0.079	0.680	0.738	0.234	FABDEMv1-2
2021-11	0.850	0.916	0.083	0.837	0.776	0.215	FABDEMv1-2
Total average	0.760	0.916	0.081	0.614	0.730	0.230	FABDEMv1-2

Formatted: Centered

Formatted: Centered

Formatted: Centered

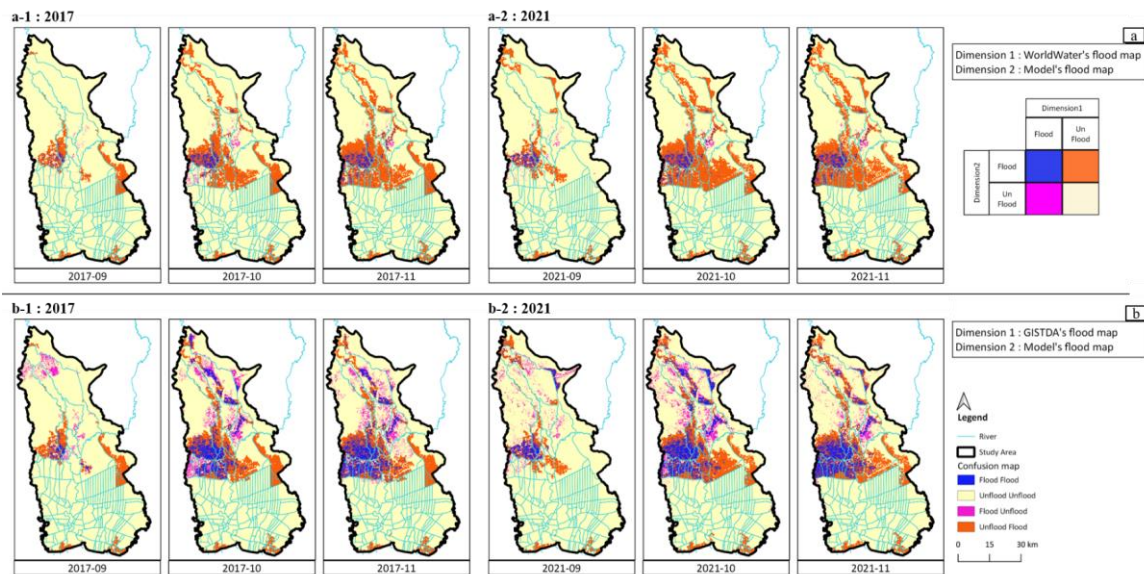


Figure 10: the contingency table of dimension 1 and dimension 2 flood maps on the spatial map: (a) Comparison between WorldWater and Model based on the merged LDD-IICA DEM, (a-1) in 2017 and (a-2) in 2021; (B) Comparison between GISTDA and Model based on the merged LDD-IICA DEM, (b-1) in 2017 and (b-2) in 2021.

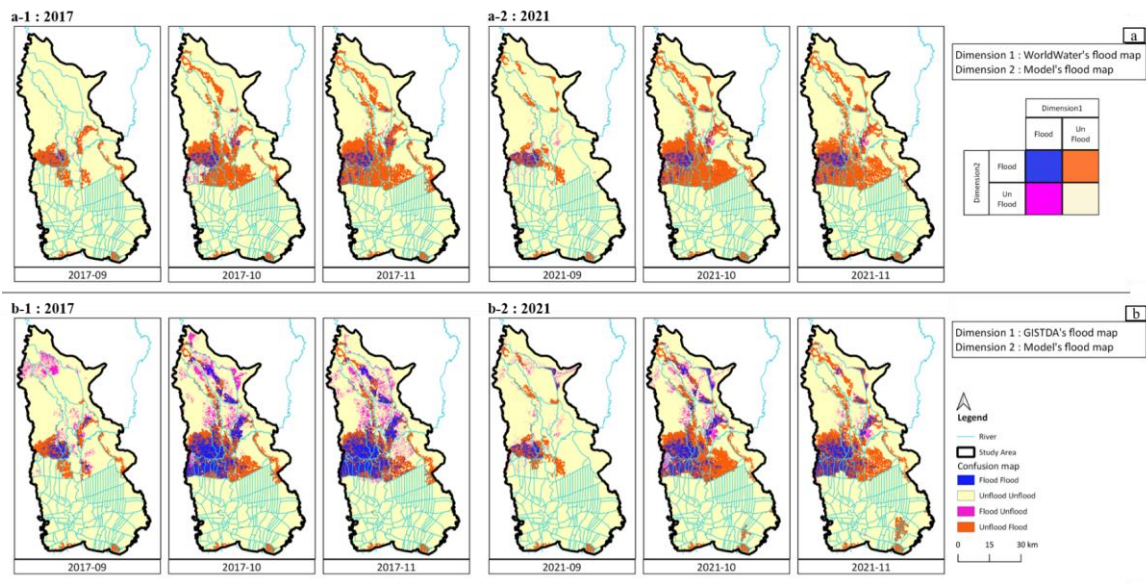


Figure 11: the contingency table of dimension 1 and dimension 2 flood maps on the spatial map: (a) Comparison between WorldWater and Model based on FABDEMv1-2 DEM, (a-1) in 2017 and (a-2) in 2021; (b) Comparison between GISTDA and Model based on FABDEMv1-2 DEM, (b-1) in 2017 and (b-2) in 2021.

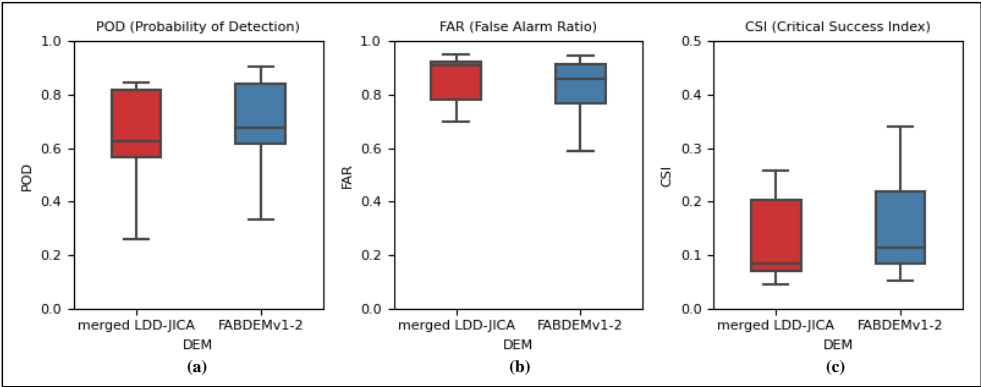


Figure 12: box plots illustrating the performance of the flood model based on the merged LDD-JICA and FABDEMv1-2 DEMs across three statistical metrics: (a) Probability of Detection (POD), (b) False Alarm Ratio (FAR), and (c) Critical Success Index (CSI).

6 Discussion

6.1 Overall result of DEM analysis workflow

The result of DEM analysis shows that ICESat-2 ATL08 data offer a unique advantage in verifying DEM accuracy (Carabajal and Boy, 2020). The overall precision of DEM products was evaluated using the ICESat-2 ATL08 benchmark, showing that JICA and FAMDEMv1-2 DEM were significantly better than the local and global DEM products in terms average of RMSE, with values of 1.87 m and 1.95 m, respectively (Figure 5 and Table 6) in point comparison. The merged LDD-JICA DEM showed a slight difference of 0.06 m in average RMSE compared to the JICA DEM. This variance is primarily attributed to the combination of LDD and JICA DEMs, with JICA DEM being chosen as the primary DEM. However, it is noteworthy that the local DEM product exhibited a negative average bias (ME) ranging from -1.30 to -0.65 m, indicating that elevation of local DEM products is lower than the benchmark. Another study conducted in Spain, which verified Airborne LiDAR data with ICESat-2 ATL08, also reported a negative bias, with average ME values of -0.48 m (Zhu et al., 2022). On the other hand, the average ME of the global DEM products yielded positive values ranging from 0.25 to 4.77 m, indicating that the global DEM products overestimate the benchmark. This result has been previously confirmed in studies such as ASTERv3 (Weifeng et al., 2024), STRMv3 and TanDEM-X (Liu et al., 2020). The ASTERv3 DEM showed the lowest overall accuracy, with an average RMSE of 6.65 m. This is in line with other areas, such as the Qinghai-Tibet Plateau, where the RMSE reached 11.47 m (Weifeng et al., 2024). The TanDEM-EDEM is an updated version of TanDEM-X, which can reduce the error value from 3.65 to 2.78 m in terms of average RMSE.

Formatted: Font color: Auto

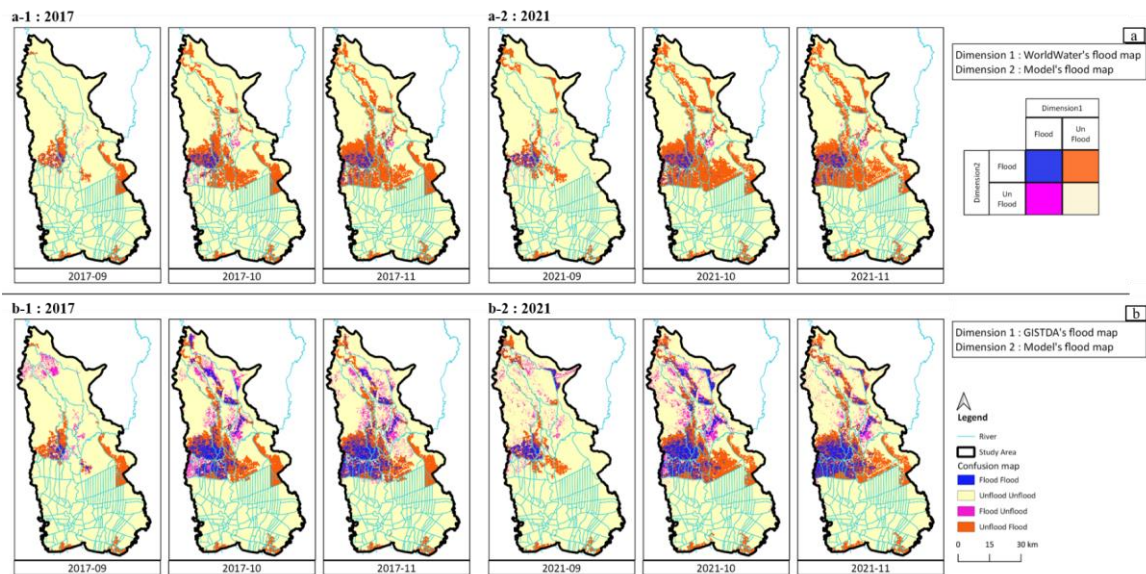


Figure 10: the contingency table of dimension 1 and dimension 2 flood maps on the spatial map: (a) Comparison between WorldWater and Model based on the merged LDD-JICA DEM, (a-1) in 2017 and (a-2) in 2021; (B) Comparison between GISTDA and Model based on the merged LDD-JICA DEM, (b-1) in 2017 and (b-2) in 2021.

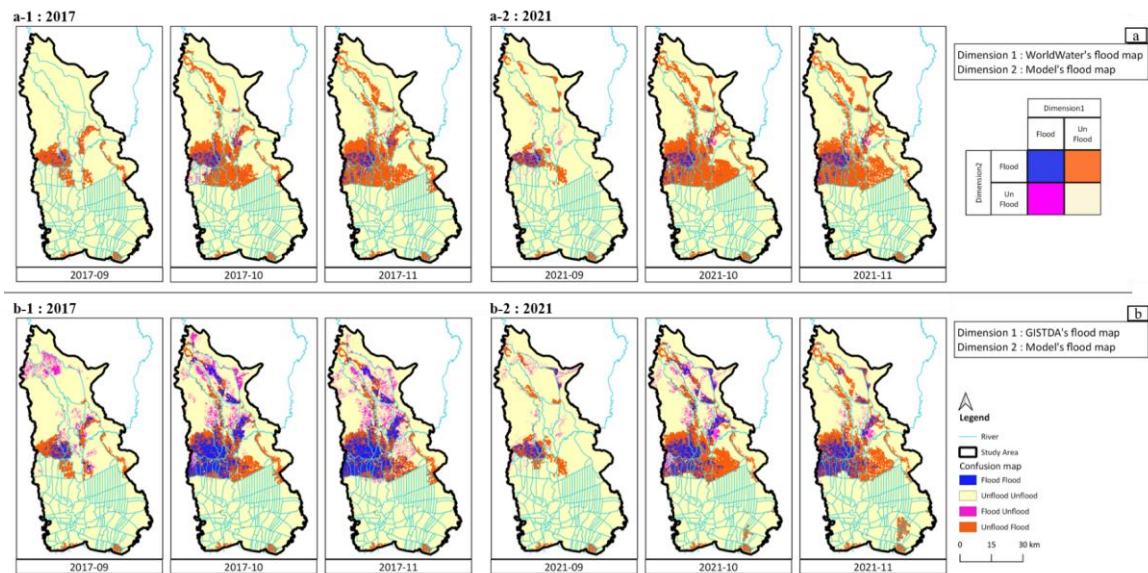


Figure 11: the contingency table of dimension 1 and dimension 2 flood maps on the spatial map: (a) Comparison between WorldWater and Model-based on FABDEM v1-2 DEM, (a-1) in 2017 and (a-2) in 2021; (b) Comparison between GISTDA and Model-based on FABDEM v1-2 DEM, (b-1) in 2017 and (b-2) in 2021.

In Figure 7, Figure A 10, and Figure A 11 illustrate the spatial grid comparison of 10 DEM products against the ICESat-2 ATL08 benchmark, with a resolution of 5x5 km for ME, MAE, and RMSE, respectively. The results clearly reveal that the global DEM tends to overestimate, particularly when compared to the ASTERv3 DEM. As shown in the figures, the error of the global DEM clearly clusters in urban areas, except for the FABDEMv1-2, which employs an algorithm to remove building discrepancies, as discussed in Sect. 3.3.8. Although, ICESat-2 ATL08 is capable of measuring land elevation very accurately, some urban areas still exhibit overestimationpositive bias, particularly in high-rise dense areas (Liu et al., 2020), as shown in Figure A 12. This suggests that the DEM analysis workflow can effectively utilize ICESat-2 ATL08 data for evaluation. In certain areas, the incorporation of ATL03 data may be necessary to enhance the evaluation process.

6.2 Overall result of flood map analysis workflow

The flood classification processing aims to classify flood types from SWE map. This method is based on various assumptions and simplifications. The validity of the approach is hard to evaluate, given the lack of ground-truth flood extent observations. However, it is evident that in this study area, surface water extent is not only due to riverine flooding but also various other flooding mechanisms such as irrigation and pluvial flooding.

The Model flood map, based on both Model and FABDEMv1-2 DEMs, tends to overestimate flood extent relative-to-the satellite-EO-datasets (Sect. 5.3)-compared to the classified flood maps derived from SWE data provided by the GISTDA and WorldWater projects. Additionally, the flood map based solely on FABDEMv1-2 performs slightly better than the one based on the merged LDD-JICA DEM, with an improvement of approximately 13.55 – 25.56 percent according to the CSI. The overestimation of flood inundation from the flood model occurs predominantly in the eastern part of the CPY River, indicating a clear need for improvement the 1D-2D flood model. Although this study has incorporated high-quality DEM data implemented into the 1D-2D flood model, there are still many factors affecting flood map generation. For instance, the 1D-2D flood model, developed long ago (Sect. 3.1), needs to be updated and recalibrated due to continuous developments in water management plans, such as the Ayutthaya Bypass channel (JICA, 2018) and ongoing land use changes in the lower CPY basin (Visessri and Ekkawatpanit, 2020), which impact flood map simulations.

The results of the flood map comparisons demonstrate that the CSI value is relatively better when compared with GISTDA, but lower when compared with WorldWater. –It is observed that the overall WorldWater flood map shows relatively low flooding compared to the GISTDA flood map. This is due to fundamental differences in the mapping approaches with WorldWater aiming to provide long-time series of the typical distribution and persistence of monthly surface water presence whereas GISTDA is targeting real time maps showing the extent of flooding at a specific moment in time. Additionally, WorldWater uses only Sentinel-1 and Sentinel-2 data, whereas GISTDA combines data from multiple other satellites, as described in Sect. 3.5.1. This can be further verified for accuracy with additional information from news sources and by cross-referencing with ICESat-2 ATL13 data, extracted from ICESat-2 ATL03 (inland water surface heights), in main rivers (Coppo Frias et al., 2023 and Dandabathula and Srinivasa Rao, 2020). This suggests that the flood analysis workflow can effectively

Formatted: English (United Kingdom)

760 verify the performance of flood simulation using satellite data. Although this study's the flood simulation results in this study
meet acceptable standards and are sufficiently reliable for practical applications, the SWE data were generated using different
algorithms and satellite sources, resulting in variations in the datasets. These observed datasets were subsequently compared
to simulated flood maps derived from various DEM products.

Formatted: English (United Kingdom)
Formatted: English (United Kingdom)
Formatted: English (United Kingdom)
Formatted: English (United Kingdom)

6.3 Advantages and Limitations

775 This study proposes enhance the performance of 1D-2D flood models using satellite laser altimetry and multi-mission surface
water extent maps from EO data. The proposed workflows, encompassing comprehensive DEM analysis and flood map
analysis, are designed be adaptable, scalable, and standardized for the development of 1D-2D flood models. These workflows
enable their application across diverse spatial domains, ranging from local to national scales, and can be readily tailored to
address flood management challenges in other regions or countries.
Furthermore, the increasing availability of EO data has proven highly effective in improving the accuracy of 1D-2D flood
models, particularly in calibration and validation processes. ICESat-2 data, with its high precision and 91-day exact repeat
orbit, serves as a robust benchmark for evaluating DEM products. Its near-real-time capability is particularly beneficial in
areas undergoing rapid land-use changes. Freely available global DEM products, developed using advanced EO techniques,
provide high-resolution and high-quality elevation data essential for accurate modeling.
Datasets such as WorldWater's SWE maps and GISTDA's flood maps are valuable resources for assessing the accuracy and
reliability of simulated flood maps. By comparing observed flood extents with model outputs, these datasets help identify
discrepancies, refine model parameters, and enhance the performance of flood models. This iterative process facilitates the
development of more reliable and accurate tools for flood forecasting and management.
Despite these advantages, EO data is not without limitations. For instance, ICESat-2 offers an elevation accuracy of
approximately 0.70 m (Neuenschwander and Pitts, 2019 and Carabajal and Boy, 2020). However, delays or gaps in EO data
acquisition, as discussed in Sect. 3.4 and 3.5, can affect the evaluation of simulated flood maps. Furthermore, while the best
available DEMs were selected for this study, elevation inaccuracies in certain areas may still compromise the precision of
flood inundation maps. Periodic updates to the data, as explained in Sect.6.2, are necessary to address these limitations and
maintain modeling accuracy.

6.4 Future applications

785 The workflows developed in this study represent a significant advancement in upgrading 1D-2D flood models by integrating
satellite laser altimetry and multi-mission satellite surface water extent (SWE) maps. These workflows not only enhance the
accuracy and reliability of flood inundation simulations but also offer scalable solutions for improving flood forecasting
systems across multiple regions. Their success in the Chao Phraya River Basin sets the foundation for expanding these
methodologies to other regions of Thailand, including the Eastern (Finn et al., 2018) Northeastern (Thanathanphon et al.,
2014), Southern, and Western regions. These regions will benefit from improved model calibration, validation, and more

790 accurate flood forecasts, thereby supporting better decision-making for flood mitigation, response, and water resource management.

Moreover, satellite technology offers new opportunities for measuring water surface elevation (WSE) such as ICESat-2 ATL13 (Jasinski et al., 2023), Surface Water and Ocean Topography (SWOT) (Biancamaria et al., 2016), CryoSat-2 (Kittel et al., 2021;Shen et al., 2020), Jason-2 and Envisat (Okeowo et al., 2017). These technologies enhance calibration, validation, error

795 diagnosis, and monitoring of main river systems, especially in areas with limited ground-based instrumentation.

On a broader scale, the workflows could be adapted for use in other countries, particularly in regions facing similar challenges related to data scarcity, terrain complexity, and high flood risk. The integration of satellite EO data, combined with local hydrological models, could provide valuable insights for flood-prone regions across Southeast Asia and beyond, contributing to global efforts in disaster risk reduction and climate resilience.

800 **7 Conclusion**

The present study ~~upgraded a~~enhanced the performance of 1D-2D flood ~~model~~models using satellite laser altimetry and multi-mission ~~satellite SWE~~surface water extent maps from Earth Observation (EO) data. We demonstrated two workflows in the lower CPY basin.

- 805 **DEM analysis workflow:** This involved evaluating DEM accuracy using satellite laser altimetry data from ICESat-2 ATL08 before integrating the DEM products into the flood model. The assessment aimed to assess the overall performance of DEM products through vertical, spatial, track-wise analysis, and statistics measures to select the most suitable DEM for the study area. Furthermore, this workflow is transferable to other study areas, providing a method to reduce uncertainty before developing flood models. The results show that the merged LDD-JICA and FABDEMv1-2 DEMs are highly suitable in the study area, with RMSE values of 1.93 and 1.95 m., respectively.
- 810 **Flood map analysis workflow:** This workflow encompassed riverine flood classification and the evaluation of simulated flood maps generated by the 1D-2D flood model using multi-mission satellite SWE maps. While the flood classification algorithm still presents challenges, it is important to recognize that SWE maps derived from satellite EO cannot be directly compared with the output of flood models without further processing. The flood map evaluation method facilitated the assessment of flood simulation accuracy against satellite SWE maps, employing statistical and spatial analyses. These evaluations contribute significantly to the calibration and validation of flood maps derived from the 1D-2D flood model.
- 815 The results indicate that simulated flood maps based on FABDEMv1-2 DEM can improve the performance of the 1D-2D flood model by 13.55% to 25.56%, as determined by the CSI, when compared to simulated flood maps based on the merged LDD-JICA DEM.

Integrating these workflows will enhance the efficiency of the 1D-2D flood model and showcase the potential of utilizing EO

820 satellite data to enhance flood modelling capabilities for operational flood forecasting in Thailand and elsewhere.

Formatted: Font color: Auto

Formatted: Justified, Line spacing: 1.5 lines

Formatted: Font color: Auto

Table A 1: Detail Descriptive statistics of GISTDA's flood map in study areaten different DEM products.

Formatted
Formatted
Deleted Cells
Merged Cells
Formatted Table
Deleted Cells
Formatted
Inserted Cells
Inserted Cells
Split Cells
Formatted
Formatted
Formatted
Formatted
Formatted
Formatted
Split Cells
Formatted
Formatted
Formatted
Inserted Cells
Formatted
Formatted
Formatted
Formatted
Formatted
Formatted
Inserted Cells
Formatted
Formatted
Formatted
Formatted
Split Cells
Formatted Table
Formatted
Formatted
Formatted
Formatted
Inserted Cells
Inserted Cells
Formatted
Formatted
Split Cells
Formatted
Formatted
Formatted
Formatted
Formatted
Formatted
Formatted
Formatted
Formatted
Split Cells
Formatted
Formatted Table

	August		28	COSMO-SkyMed1			
			29	RADARSAT-2			
			31	COSMO-SkyMed4			
			2				
			5				
			6				
			8				
			20				
FABDEMv1-2		-14.99	267.93	6.22	8.23	RADARSAT-2,85	
			25	RADARSAT-2			
			26	COSMO-SkyMed2			
	September		2				
TanDEM-X		-7.00	274.93	7.06	8.48	4.24	
			8				
			9				
			15				
			17	RADARSAT-1			
			25				
			30	RADARSAT-2			
	October		3	Sentinel-8			
			8				
			12				
TanDEM-EDEM		-36.91	271.26	6.93	8.35	4.13	COSMO-SkyMed4
			17				
			19	COSMO-SkyMed4			
			23				
			26				
			27				
	November		6				
			20				
			25				
			30				
2021	November		2				
			3				
			8				
			9				
			14				
			15				
	October		3				
			4				
			6				
			8				
			12				
			14				
		16					
		17					

- Split Cells
- Formatted: Left
- Formatted Table
- Inserted Cells
- Inserted Cells
- Split Cells
- Formatted: English (United States)
- Formatted: English (United States)
- Formatted: English (United States)
- Formatted: Centered
- Formatted: Centered
- Formatted: English (United States)
- Split Cells
- Formatted: Centered
- Inserted Cells
- Formatted: Centered
- Inserted Cells
- Split Cells
- Formatted: Left
- Formatted Table
- Split Cells
- Formatted: Left
- Formatted Table
- Split Cells
- Formatted: Centered
- Inserted Cells
- Inserted Cells
- Inserted Cells
- Deleted Cells

		18	
		21	
		22	
		27	
		28	
	September	12	
		21	
		22	
		27	
		28	
		29	

825 **Table A 2: The detailed analysis of Sentinel-1 and Sentinel-2 data within the study area.**

Year	Month	Day	Satellite	Year	Month	Day	Satellite
2017	1	2	S1	2017	5	7	S2A
2017	1	14	S1	2017	5	10	S1
2017	1	16	S1	2017	5	10	S2A
2017	1	20	S2A	2017	5	14	S1
2017	1	27	S2A	2017	5	17	S2A
2017	2	7	S1	2017	5	22	S1
2017	2	9	S2A	2017	5	26	S1
2017	2	16	S2A	2017	5	27	S2A
2017	2	19	S2A	2017	5	30	S2A
2017	2	26	S2A	2017	6	3	S1
2017	2	27	S1	2017	6	6	S2A
2017	3	8	S2A	2017	6	7	S1
2017	3	11	S1	2017	6	15	S1
2017	3	11	S2A	2017	6	16	S2A
2017	3	15	S1	2017	6	19	S1
2017	3	18	S2A	2017	6	19	S2A
2017	3	23	S1	2017	6	26	S2A
2017	3	27	S1	2017	6	27	S1
2017	3	28	S2A	2017	7	1	S1
2017	3	31	S2A	2017	7	6	S2A
2017	4	4	S1	2017	7	9	S1
2017	4	7	S2A	2017	7	9	S2A
2017	4	8	S1	2017	7	11	S2B
2017	4	16	S1	2017	7	13	S1
2017	4	17	S2A	2017	7	16	S2A
2017	4	20	S1	2017	7	21	S1
2017	4	20	S2A	2017	7	21	S2B
2017	4	27	S2A	2017	7	24	S2B
2017	4	28	S1	2017	7	25	S1

Year	Month	Day	Satellite	Year	Month	Day	Satellite
2017	5	2	S1	2017	7	26	S2A
2017	7	29	S2A	2017	10	25	S1
2017	7	31	S2B	2017	11	1	S2B
2017	8	2	S1	2017	11	3	S2A
2017	8	5	S2A	2017	11	6	S1
2017	8	6	S1	2017	11	6	S2A
2017	8	10	S2B	2017	11	8	S2B
2017	8	13	S2B	2017	11	10	S1
2017	8	14	S1	2017	11	11	S2B
2017	8	15	S2A	2017	11	13	S2A
2017	8	18	S1	2017	11	18	S1
2017	8	18	S2A	2017	11	18	S2B
2017	8	20	S2B	2017	11	21	S2B
2017	8	25	S2A	2017	11	22	S1
2017	8	26	S1	2017	11	23	S2A
2017	8	30	S1	2017	11	26	S2A
2017	8	30	S2B	2017	11	28	S2B
2017	9	2	S2B	2017	11	30	S1
2017	9	4	S2A	2017	12	1	S2B
2017	9	7	S1	2017	12	3	S2A
2017	9	7	S2A	2017	12	4	S1
2017	9	9	S2B	2017	12	8	S2B
2017	9	11	S1	2017	12	11	S2B
2017	9	14	S2A	2017	12	12	S1
2017	9	19	S1	2017	12	13	S2A
2017	9	19	S2B	2017	12	16	S1
2017	9	22	S2B	2017	12	16	S2A
2017	9	23	S1	2017	12	18	S2B
2017	9	24	S2A	2017	12	21	S2B
2017	9	27	S2A	2017	12	23	S2A
2017	9	29	S2B	2017	12	24	S1
2017	10	4	S2A	2017	12	28	S1
2017	10	5	S1	2017	12	28	S2B
2017	10	9	S2B	2017	12	31	S2B
2017	10	12	S2B	2018	1	2	S1
2017	10	13	S1	2018	1	2	S2A
2017	10	14	S2A	2018	1	5	S2A
2017	10	17	S1	2018	1	7	S2B
2017	10	17	S2A	2018	1	9	S1
2017	10	19	S2B	2018	1	10	S2B
2017	10	24	S2A	2018	1	12	S2A

Year	Month	Day	Satellite	Year	Month	Day	Satellite
2018	1	17	S1	2018	3	30	S1
2018	1	17	S2B	2018	3	31	S2B
2018	1	20	S2B	2018	4	2	S2A
2018	1	21	S1	2018	4	3	S1
2018	1	22	S2A	2018	4	5	S2A
2018	1	25	S2A	2018	4	7	S2B
2018	1	27	S2B	2018	4	10	S2B
2018	1	29	S1	2018	4	11	S1
2018	1	30	S2B	2018	4	12	S2A
2018	2	1	S2A	2018	4	15	S1
2018	2	2	S1	2018	4	15	S2A
2018	2	6	S2B	2018	4	17	S2B
2018	2	9	S2B	2018	4	20	S2B
2018	2	10	S1	2018	4	22	S2A
2018	2	11	S2A	2018	4	23	S1
2018	2	14	S1	2018	4	25	S2A
2018	2	14	S2A	2018	4	27	S1
2018	2	16	S2B	2018	4	27	S2B
2018	2	19	S2B	2018	4	30	S2B
2018	2	21	S2A	2018	5	2	S2A
2018	2	22	S1	2018	5	5	S1
2018	2	24	S2A	2018	5	5	S2A
2018	2	26	S1	2018	5	7	S2B
2018	2	26	S2B	2018	5	9	S1
2018	3	1	S2B	2018	5	10	S2B
2018	3	3	S2A	2018	5	12	S2A
2018	3	6	S1	2018	5	15	S2A
2018	3	6	S2A	2018	5	17	S1
2018	3	8	S2B	2018	5	17	S2B
2018	3	10	S1	2018	5	20	S2B
2018	3	11	S2B	2018	5	21	S1
2018	3	13	S2A	2018	5	22	S2A
2018	3	16	S2A	2018	5	25	S2A
2018	3	18	S1	2018	5	29	S1
2018	3	18	S2B	2018	5	30	S2B
2018	3	21	S2B	2018	6	1	S2A
2018	3	22	S1	2018	6	2	S1
2018	3	23	S2A	2018	6	4	S2A
2018	3	26	S2A	2018	6	6	S2B
2018	3	28	S2B	2018	6	9	S2B
2018	6	10	S1	2018	8	20	S2A

Year	Month	Day	Satellite	Year	Month	Day	Satellite
2018	6	11	S2A	2018	8	21	S1
2018	6	14	S1	2018	8	23	S2A
2018	6	14	S2A	2018	8	25	S2B
2018	6	16	S2B	2018	8	28	S2B
2018	6	19	S2B	2018	8	30	S2A
2018	6	21	S2A	2018	9	2	S1
2018	6	22	S1	2018	9	2	S2A
2018	6	24	S2A	2018	9	4	S2B
2018	6	26	S1	2018	9	6	S1
2018	6	26	S2B	2018	9	7	S2B
2018	6	29	S2B	2018	9	9	S2A
2018	7	1	S2A	2018	9	12	S2A
2018	7	4	S1	2018	9	14	S1
2018	7	4	S2A	2018	9	14	S2B
2018	7	6	S2B	2018	9	17	S2B
2018	7	8	S1	2018	9	18	S1
2018	7	9	S2B	2018	9	19	S2A
2018	7	11	S2A	2018	9	24	S2B
2018	7	14	S2A	2018	9	26	S1
2018	7	16	S1	2018	9	27	S2B
2018	7	16	S2B	2018	9	29	S2A
2018	7	19	S2B	2018	9	30	S1
2018	7	20	S1	2018	10	2	S2A
2018	7	21	S2A	2018	10	4	S2B
2018	7	24	S2A	2018	10	7	S2B
2018	7	26	S2B	2018	10	8	S1
2018	7	28	S1	2018	10	9	S2A
2018	7	29	S2B	2018	10	12	S1
2018	7	31	S2A	2018	10	12	S2A
2018	8	1	S1	2018	10	14	S2B
2018	8	3	S2A	2018	10	17	S2B
2018	8	5	S2B	2018	10	19	S2A
2018	8	8	S2B	2018	10	20	S1
2018	8	9	S1	2018	10	22	S2A
2018	8	10	S2A	2018	10	24	S1
2018	8	13	S1	2018	10	24	S2B
2018	8	13	S2A	2018	10	27	S2B
2018	8	15	S2B	2018	10	29	S2A
2018	8	18	S2B	2018	11	1	S1
2018	11	1	S2A	2019	1	15	S2B
2018	11	3	S2B	2019	1	17	S2A

Year	Month	Day	Satellite	Year	Month	Day	Satellite
2018	11	5	S1	2019	1	20	S2A
2018	11	6	S2B	2019	1	22	S2B
2018	11	8	S2A	2019	1	24	S1
2018	11	11	S2A	2019	1	25	S2B
2018	11	13	S1	2019	1	27	S2A
2018	11	16	S2B	2019	1	28	S1
2018	11	17	S1	2019	1	30	S2A
2018	11	18	S2A	2019	2	1	S2B
2018	11	21	S2A	2019	2	4	S2B
2018	11	23	S2B	2019	2	5	S1
2018	11	25	S1	2019	2	6	S2A
2018	11	26	S2B	2019	2	9	S1
2018	11	28	S2A	2019	2	9	S2A
2018	11	29	S1	2019	2	11	S2B
2018	12	4	S2A	2019	2	14	S2B
2018	12	3	S2B	2019	2	16	S2A
2018	12	6	S2B	2019	2	17	S1
2018	12	7	S1	2019	2	19	S2A
2018	12	8	S2A	2019	2	21	S1
2018	12	11	S1	2019	2	21	S2B
2018	12	11	S2A	2019	2	24	S2B
2018	12	13	S2B	2019	2	26	S2A
2018	12	16	S2B	2019	3	1	S1
2018	12	18	S2A	2019	3	1	S2A
2018	12	19	S1	2019	3	3	S2B
2018	12	21	S2A	2019	3	5	S1
2018	12	23	S1	2019	3	6	S2B
2018	12	23	S2B	2019	3	8	S2A
2018	12	26	S2B	2019	3	11	S2A
2018	12	28	S2A	2019	3	13	S1
2018	12	31	S1	2019	3	13	S2B
2018	12	31	S2A	2019	3	16	S2B
2019	1	2	S2B	2019	3	18	S2A
2019	1	4	S1	2019	3	21	S2A
2019	1	5	S2B	2019	3	23	S2B
2019	1	7	S2A	2019	3	25	S1
2019	1	10	S2A	2019	3	26	S2B
2019	1	12	S1	2019	3	28	S2A
2019	3	29	S1	2019	6	11	S2B
2019	3	31	S2A	2019	6	14	S2B
2019	4	2	S2B	2019	6	16	S2A

Year	Month	Day	Satellite	Year	Month	Day	Satellite
2019	4	5	S2B	2019	6	17	S1
2019	4	6	S1	2019	6	19	S2A
2019	4	7	S2A	2019	6	21	S2B
2019	4	10	S1	2019	6	24	S2B
2019	4	10	S2A	2019	6	26	S2A
2019	4	12	S2B	2019	6	29	S1
2019	4	15	S2B	2019	6	29	S2A
2019	4	17	S2A	2019	7	1	S2B
2019	4	20	S2A	2019	7	4	S2B
2019	4	22	S1	2019	7	6	S2A
2019	4	22	S2B	2019	7	9	S2A
2019	4	25	S2B	2019	7	11	S1
2019	4	27	S2A	2019	7	11	S2B
2019	4	30	S1	2019	7	14	S2B
2019	4	30	S2A	2019	7	16	S2A
2019	5	2	S2B	2019	7	19	S2A
2019	5	4	S1	2019	7	21	S2B
2019	5	5	S2B	2019	7	23	S1
2019	5	7	S2A	2019	7	24	S2B
2019	5	10	S2A	2019	7	26	S2A
2019	5	12	S1	2019	7	29	S2A
2019	5	12	S2B	2019	7	31	S2B
2019	5	15	S2B	2019	8	3	S2B
2019	5	16	S1	2019	8	4	S1
2019	5	17	S2A	2019	8	5	S2A
2019	5	20	S2A	2019	8	8	S2A
2019	5	22	S2B	2019	8	10	S2B
2019	5	24	S1	2019	8	13	S2B
2019	5	25	S2B	2019	8	15	S2A
2019	5	27	S2A	2019	8	16	S1
2019	5	28	S1	2019	8	18	S2A
2019	5	30	S2A	2019	8	20	S1
2019	6	1	S2B	2019	8	20	S2B
2019	6	4	S2B	2019	8	23	S2B
2019	6	5	S1	2019	8	25	S2A
2019	6	6	S2A	2019	8	28	S1
2019	6	9	S2A	2019	8	28	S2A
2019	8	30	S2B	2019	11	11	S2B
2019	9	1	S1	2019	11	12	S1
2019	9	2	S2B	2019	11	13	S2A
2019	9	4	S2A	2019	11	16	S2A

Year	Month	Day	Satellite	Year	Month	Day	Satellite
2019	9	7	S2A	2019	11	18	S2B
2019	9	9	S1	2019	11	20	S1
2019	9	9	S2B	2019	11	21	S2B
2019	9	12	S2B	2019	11	23	S2A
2019	9	13	S1	2019	11	24	S1
2019	9	14	S2A	2019	11	26	S2A
2019	9	17	S2A	2019	11	28	S2B
2019	9	19	S2B	2019	12	1	S2B
2019	9	21	S1	2019	12	2	S1
2019	9	22	S2B	2019	12	3	S2A
2019	9	25	S1	2019	12	6	S1
2019	9	27	S2A	2019	12	6	S2A
2019	9	29	S2B	2019	12	8	S2B
2019	10	2	S2B	2019	12	11	S2B
2019	10	3	S1	2019	12	13	S2A
2019	10	4	S2A	2019	12	14	S1
2019	10	7	S1	2019	12	16	S2A
2019	10	7	S2A	2019	12	18	S2B
2019	10	9	S2B	2019	12	21	S2B
2019	10	12	S2B	2019	12	23	S2A
2019	10	14	S2A	2019	12	26	S1
2019	10	15	S1	2019	12	26	S2A
2019	10	17	S2A	2019	12	28	S2B
2019	10	19	S1	2019	12	30	S1
2019	10	19	S2B	2019	12	31	S2B
2019	10	22	S2B	2020	1	2	S2A
2019	10	24	S2A	2020	1	5	S2A
2019	10	27	S1	2020	1	7	S1
2019	10	27	S2A	2020	1	7	S2B
2019	10	29	S2B	2020	1	10	S2B
2019	10	31	S1	2020	1	11	S1
2019	11	1	S2B	2020	1	12	S2A
2019	11	3	S2A	2020	1	15	S2A
2019	11	6	S2A	2020	1	17	S2B
2019	11	8	S1	2020	1	18	S1
2019	11	8	S2B	2020	1	19	S1
2020	1	20	S2B	2020	3	31	S1
2020	1	22	S2A	2020	4	1	S2A
2020	1	23	S1	2020	4	4	S1
2020	1	25	S2A	2020	4	4	S2A
2020	1	27	S2B	2020	4	6	S2B


Year	Month	Day	Satellite	Year	Month	Day	Satellite
2020	1	30	S2B	2020	4	9	S2B
2020	1	31	S1	2020	4	11	S2A
2020	2	1	S2A	2020	4	12	S1
2020	2	4	S1	2020	4	14	S2A
2020	2	4	S2A	2020	4	16	S1
2020	2	6	S2B	2020	4	16	S2B
2020	2	9	S2B	2020	4	19	S2B
2020	2	11	S2A	2020	4	21	S2A
2020	2	12	S1	2020	4	24	S1
2020	2	14	S2A	2020	4	24	S2A
2020	2	16	S1	2020	4	26	S2B
2020	2	16	S2B	2020	4	28	S1
2020	2	19	S2B	2020	4	29	S2B
2020	2	21	S2A	2020	5	1	S2A
2020	2	24	S1	2020	5	4	S2A
2020	2	24	S2A	2020	5	6	S1
2020	2	26	S2B	2020	5	6	S2B
2020	2	28	S1	2020	5	9	S2B
2020	2	29	S2B	2020	5	11	S2A
2020	3	2	S2A	2020	5	14	S2A
2020	3	5	S2A	2020	5	16	S2B
2020	3	7	S1	2020	5	18	S1
2020	3	7	S2B	2020	5	19	S2B
2020	3	10	S2B	2020	5	21	S2A
2020	3	11	S1	2020	5	24	S2A
2020	3	12	S2A	2020	5	26	S2B
2020	3	15	S2A	2020	5	29	S2B
2020	3	17	S2B	2020	5	30	S1
2020	3	19	S1	2020	5	31	S2A
2020	3	20	S2B	2020	6	3	S2A
2020	3	22	S2A	2020	6	5	S2B
2020	3	23	S1	2020	6	8	S2B
2020	3	25	S2A	2020	6	10	S2A
2020	3	27	S2B	2020	6	11	S1
2020	3	30	S2B	2020	6	13	S2A
2020	6	15	S2B	2020	9	3	S1
2020	6	18	S2B	2020	9	3	S2B
2020	6	20	S2A	2020	9	6	S2B
2020	6	23	S1	2020	9	7	S1
2020	6	23	S2A	2020	9	8	S2A
2020	6	25	S2B	2020	9	11	S2A

Year	Month	Day	Satellite	Year	Month	Day	Satellite
2020	6	28	S2B	2020	9	13	S2B
2020	6	30	S2A	2020	9	15	S1
2020	7	3	S2A	2020	9	16	S2B
2020	7	5	S1	2020	9	18	S2A
2020	7	5	S2B	2020	9	19	S1
2020	7	8	S2B	2020	9	21	S2A
2020	7	10	S2A	2020	9	23	S2B
2020	7	13	S2A	2020	9	26	S2B
2020	7	15	S2B	2020	9	27	S1
2020	7	17	S1	2020	9	28	S2A
2020	7	18	S2B	2020	10	1	S1
2020	7	20	S2A	2020	10	1	S2A
2020	7	23	S2A	2020	10	3	S2B
2020	7	25	S2B	2020	10	6	S2B
2020	7	28	S2B	2020	10	8	S2A
2020	7	29	S1	2020	10	9	S1
2020	7	30	S2A	2020	10	11	S2A
2020	8	2	S2A	2020	10	13	S1
2020	8	4	S2B	2020	10	13	S2B
2020	8	7	S2B	2020	10	16	S2B
2020	8	9	S2A	2020	10	18	S2A
2020	8	10	S1	2020	10	21	S1
2020	8	12	S2A	2020	10	21	S2A
2020	8	14	S1	2020	10	23	S2B
2020	8	14	S2B	2020	10	25	S1
2020	8	17	S2B	2020	10	26	S2B
2020	8	19	S2A	2020	10	28	S2A
2020	8	22	S1	2020	10	31	S2A
2020	8	22	S2A	2020	11	2	S1
2020	8	24	S2B	2020	11	2	S2B
2020	8	26	S1	2020	11	5	S2B
2020	8	27	S2B	2020	11	6	S1
2020	8	29	S2A	2020	11	7	S2A
2020	9	1	S2A	2020	11	10	S2A
2020	11	12	S2B	2021	1	24	S2B
2020	11	14	S1	2021	1	25	S1
2020	11	15	S2B	2021	1	26	S2A
2020	11	17	S2A	2021	1	29	S1
2020	11	18	S1	2021	1	29	S2A
2020	11	20	S2A	2021	1	31	S2B
2020	11	22	S2B	2021	2	3	S2B

Year	Month	Day	Satellite	Year	Month	Day	Satellite
2020	11	25	S2B	2021	2	5	S2A
2020	11	27	S2A	2021	2	6	S1
2020	11	30	S1	2021	2	8	S2A
2020	11	30	S2A	2021	2	10	S1
2020	12	2	S2B	2021	2	10	S2B
2020	12	5	S2B	2021	2	13	S2B
2020	12	7	S2A	2021	2	15	S2A
2020	12	8	S1	2021	2	18	S1
2020	12	10	S2A	2021	2	18	S2A
2020	12	12	S1	2021	2	20	S2B
2020	12	12	S2B	2021	2	22	S1
2020	12	15	S2B	2021	2	23	S2B
2020	12	17	S2A	2021	2	25	S2A
2020	12	20	S1	2021	2	28	S2A
2020	12	20	S2A	2021	3	2	S2B
2020	12	22	S2B	2021	3	5	S2B
2020	12	24	S1	2021	3	6	S1
2020	12	25	S2B	2021	3	7	S2A
2020	12	27	S2A	2021	3	10	S2A
2020	12	30	S2A	2021	3	12	S2B
2021	1	1	S1	2021	3	14	S1
2021	1	1	S2B	2021	3	15	S2B
2021	1	4	S2B	2021	3	17	S2A
2021	1	5	S1	2021	3	18	S1
2021	1	6	S2A	2021	3	20	S2A
2021	1	9	S2A	2021	3	22	S2B
2021	1	11	S2B	2021	3	25	S2B
2021	1	13	S1	2021	3	26	S1
2021	1	14	S2B	2021	3	27	S2A
2021	1	16	S2A	2021	3	30	S1
2021	1	17	S1	2021	3	30	S2A
2021	1	19	S2A	2021	4	1	S2B
2021	1	21	S2B	2021	4	4	S2B
2021	4	6	S2A	2021	6	18	S2A
2021	4	7	S1	2021	6	20	S2B
2021	4	9	S2A	2021	6	23	S2B
2021	4	11	S1	2021	6	25	S2A
2021	4	11	S2B	2021	6	28	S2A
2021	4	14	S2B	2021	6	30	S1
2021	4	16	S2A	2021	6	30	S2B
2021	4	19	S1	2021	7	3	S2B

Year	Month	Day	Satellite	Year	Month	Day	Satellite
2021	4	19	S2A	2021	7	5	S2A
2021	4	21	S2B	2021	7	8	S2A
2021	4	23	S1	2021	7	10	S2B
2021	4	24	S2B	2021	7	12	S1
2021	4	26	S2A	2021	7	13	S2B
2021	4	29	S2A	2021	7	15	S2A
2021	5	1	S1	2021	7	16	S1
2021	5	1	S2B	2021	7	18	S2A
2021	5	4	S2B	2021	7	20	S2B
2021	5	5	S1	2021	7	23	S2B
2021	5	6	S2A	2021	7	24	S1
2021	5	9	S2A	2021	7	25	S2A
2021	5	11	S2B	2021	7	28	S2A
2021	5	13	S1	2021	7	30	S2B
2021	5	14	S2B	2021	8	2	S2B
2021	5	16	S2A	2021	8	4	S2A
2021	5	17	S1	2021	8	5	S1
2021	5	19	S2A	2021	8	7	S2A
2021	5	21	S2B	2021	8	9	S1
2021	5	24	S2B	2021	8	9	S2B
2021	5	25	S1	2021	8	12	S2B
2021	5	26	S2A	2021	8	14	S2A
2021	5	29	S2A	2021	8	17	S1
2021	5	31	S2B	2021	8	17	S2A
2021	6	3	S2B	2021	8	19	S2B
2021	6	5	S2A	2021	8	21	S1
2021	6	6	S1	2021	8	22	S2B
2021	6	8	S2A	2021	8	24	S2A
2021	6	10	S2B	2021	8	27	S2A
2021	6	13	S2B	2021	8	29	S1
2021	6	15	S2A	2021	8	29	S2B
2021	6	18	S1	2021	9	1	S2B
2021	9	2	S1	2021	11	13	S1
2021	9	3	S2A	2021	11	15	S2A
2021	9	6	S2A	2021	11	17	S2B
2021	9	8	S2B	2021	11	20	S2B
2021	9	10	S1	2021	11	21	S1
2021	9	11	S2B	2021	11	22	S2A
2021	9	13	S2A	2021	11	25	S1
2021	9	14	S1	2021	11	25	S2A
2021	9	16	S2A	2021	11	27	S2B

Year	Month	Day	Satellite	Year	Month	Day	Satellite
2021	9	18	S2B	2021	11	30	S2B
2021	9	21	S2B	2021	12	2	S2A
2021	9	22	S1	2021	12	3	S1
2021	9	23	S2A	2021	12	5	S2A
2021	9	26	S1	2021	12	7	S1
2021	9	26	S2A	2021	12	7	S2B
2021	9	28	S2B	2021	12	10	S2B
2021	10	1	S2B	2021	12	12	S2A
2021	10	3	S2A	2021	12	15	S1
2021	10	4	S1	2021	12	15	S2A
2021	10	6	S2A	2021	12	17	S2B
2021	10	8	S1	2021	12	19	S1
2021	10	8	S2B	2021	12	20	S2B
2021	10	11	S2B	2021	12	22	S2A
2021	10	13	S2A	2021	12	25	S2A
2021	10	16	S1	2021	12	27	S1
2021	10	16	S2A	2021	12	27	S2B
2021	10	18	S2B	2021	12	30	S2B
2021	10	20	S1	2021	12	31	S1
2021	10	21	S2B	*Remark -S1 = Sentinel-1 -S2A = Sentinel-2A -S2B = Sentinel-2B			
2021	10	23	S2A				
2021	10	26	S2A				
2021	10	28	S1				
2021	10	28	S2B				
2021	10	31	S2B				
2021	11	1	S1				
2021	11	2	S2A				
2021	11	5	S2A				
2021	11	7	S2B				
2021	11	9	S1				
2021	11	10	S2B				

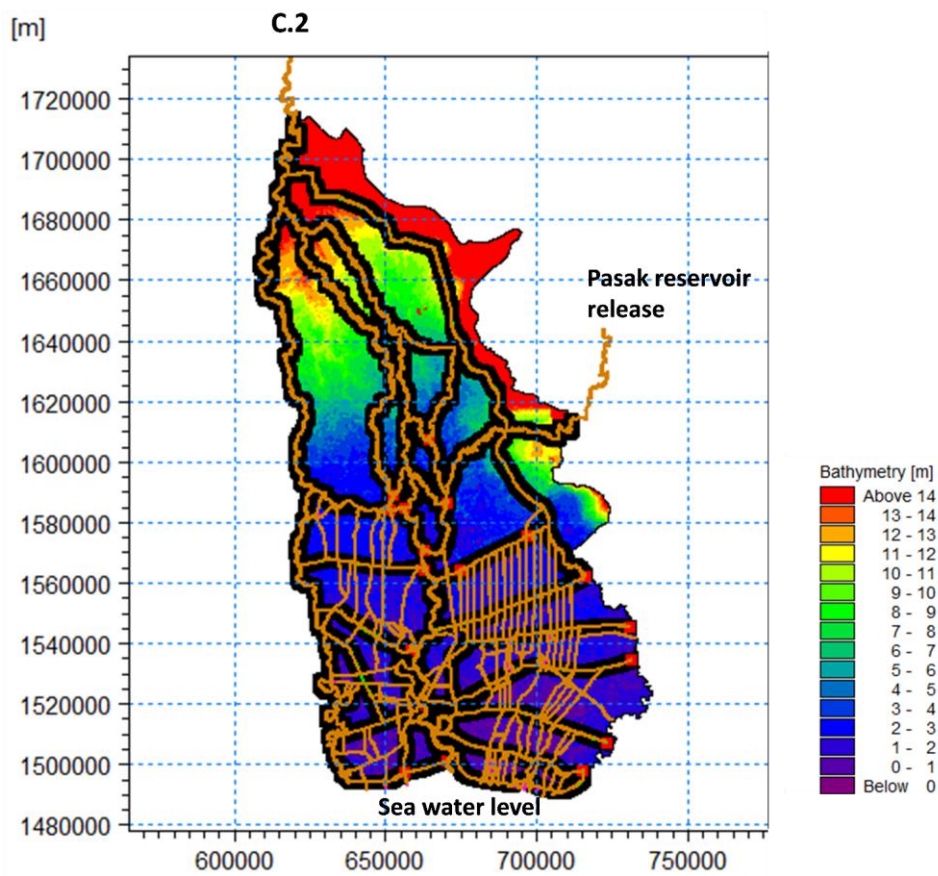

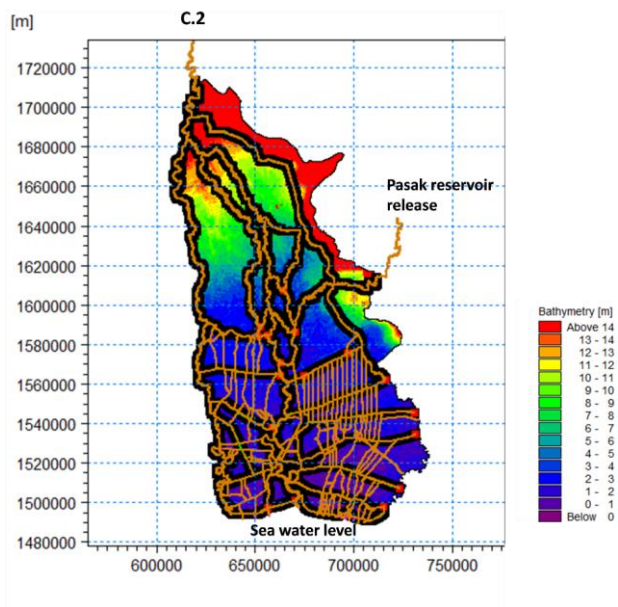
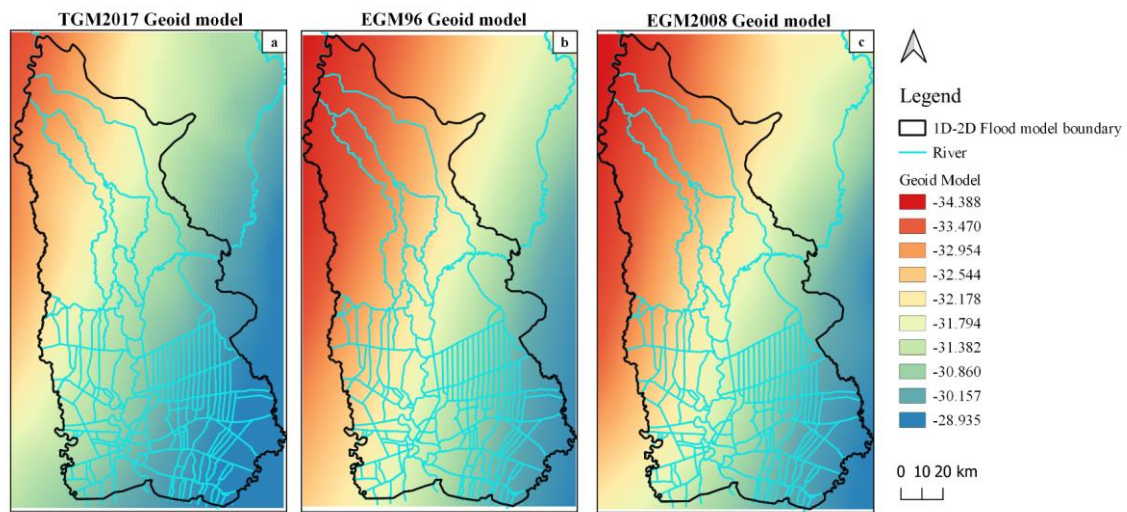


Figure A 1: 1D-2D Flood model




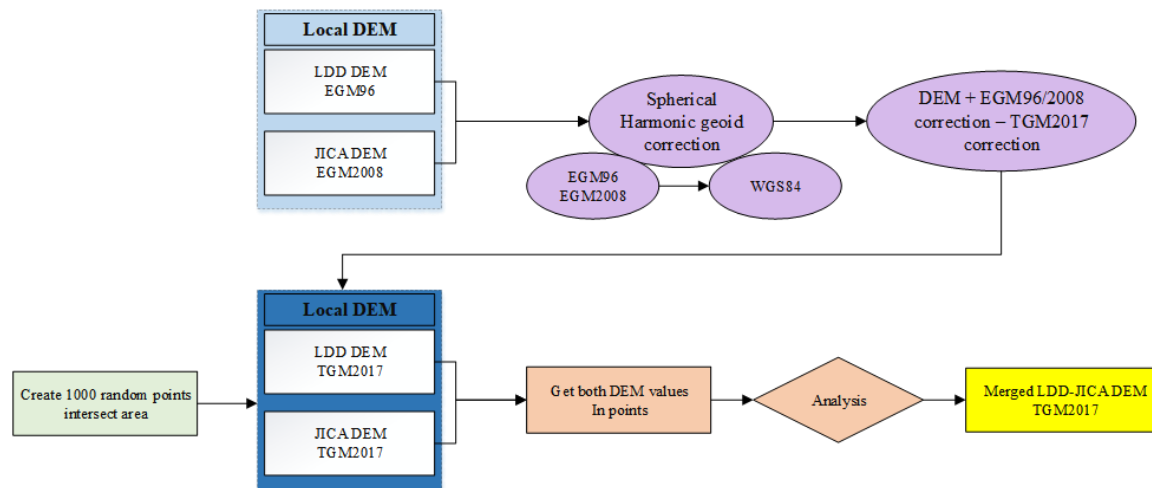


Figure A 2:- The geoid model dataset (a) TGM2017, (b) EGM96 and (c) EGM2008

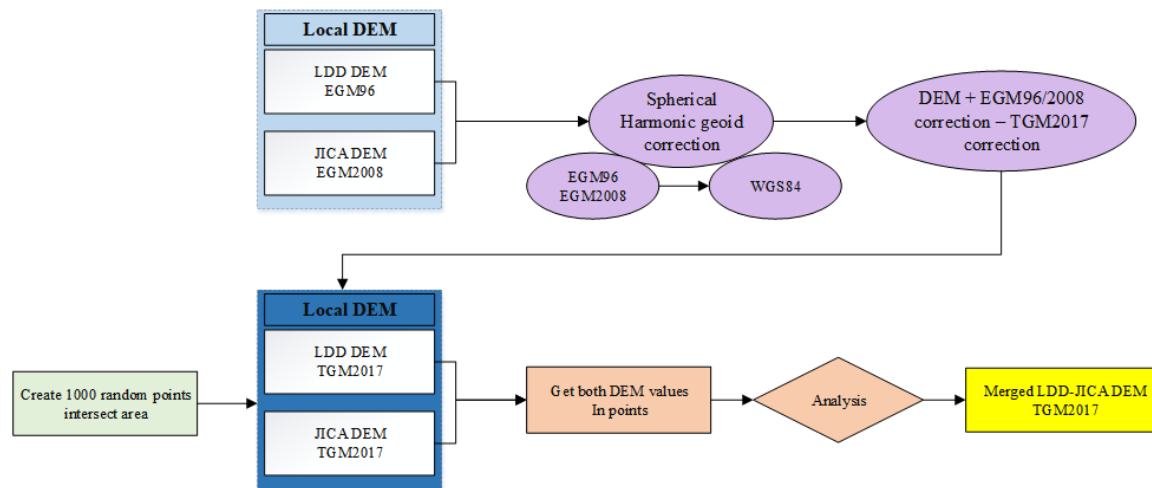

835 : the merged LDD-JICA DEM's workflow

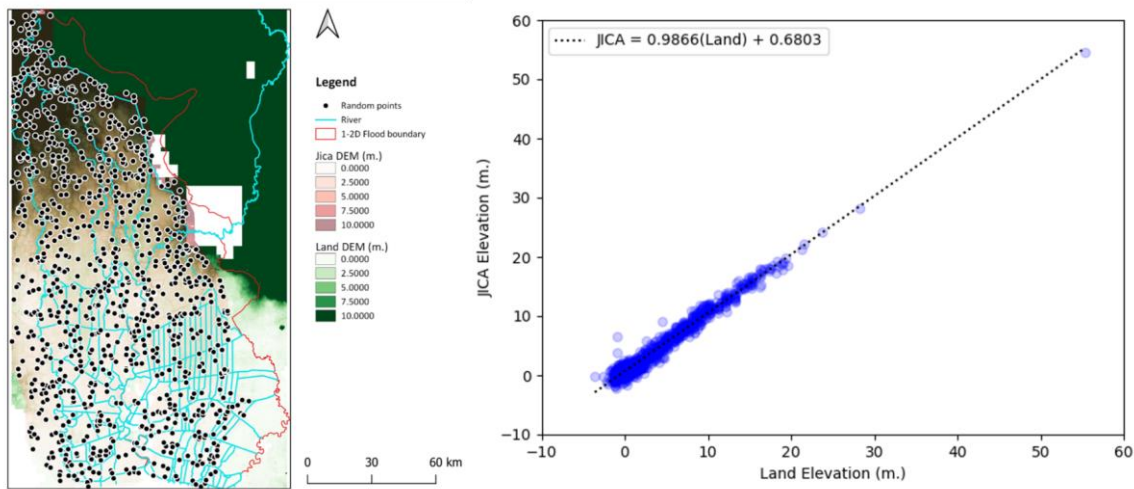


Figure A 3: the merged LDD-JICA DEM's **workflow**

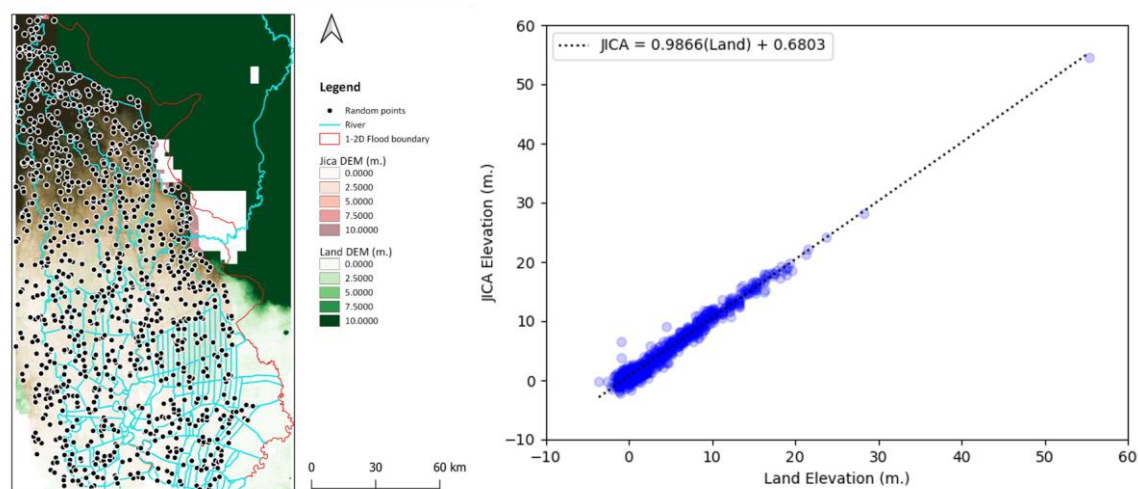


Figure A-4: the merged LDD-JICA-DEM's processing


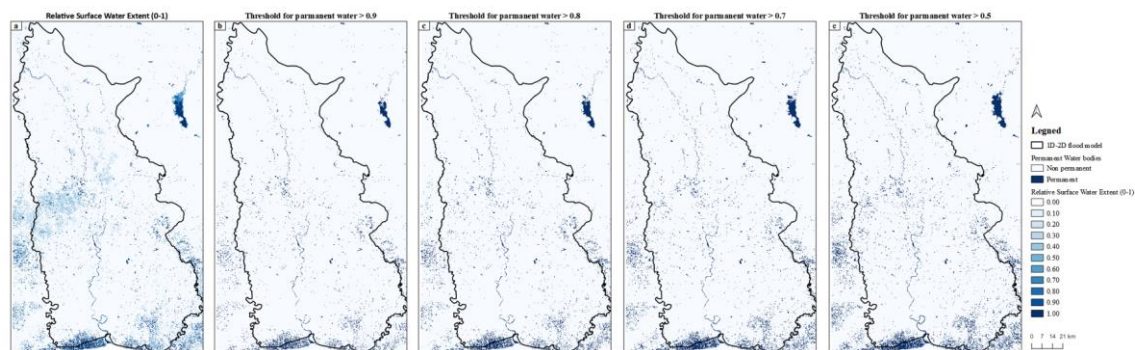


Figure A 4: Relative water frequency (a), threshold 0.9 (b), threshold 0.8 (c), threshold 0.7 (d) and threshold 0.5 (e).

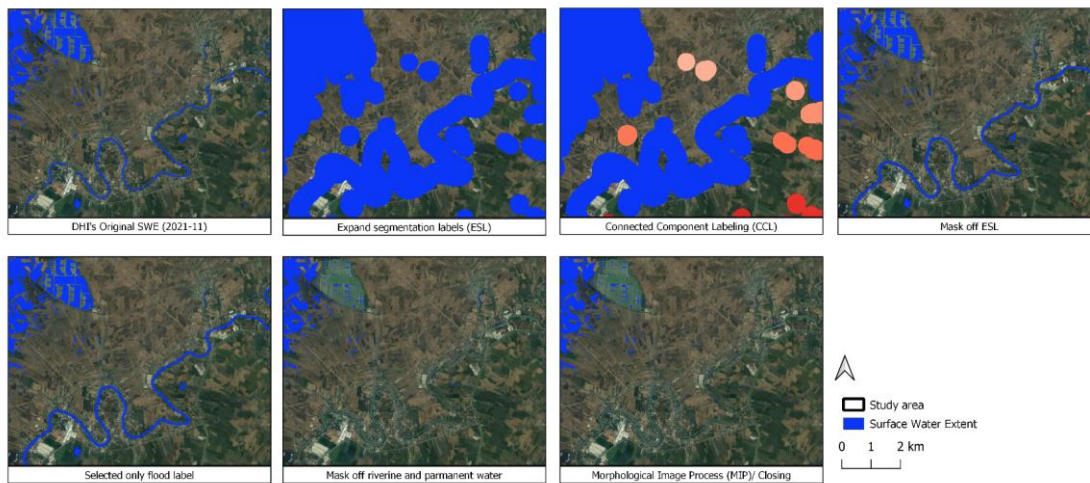

845 **Figure A 5: Riverine flood classification processing.** © Google Earth

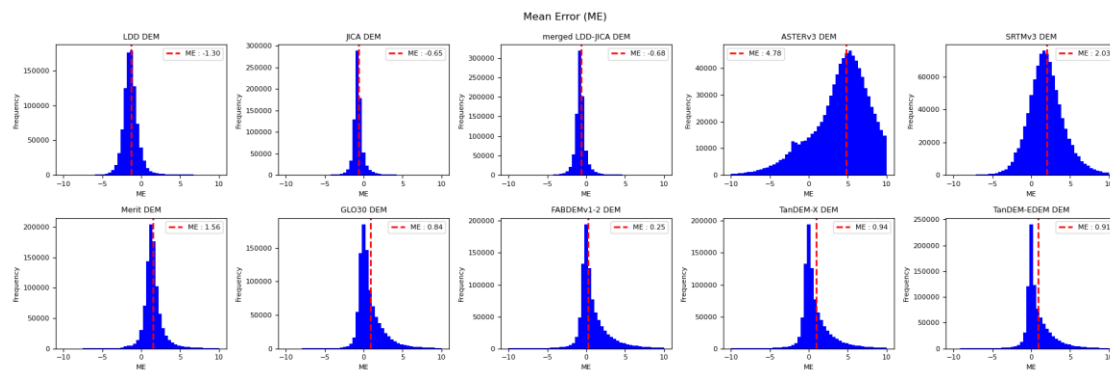


Figure A 6: The histogram distribution of the mean error (ME), comparing 10 DEM products against the ICESat-2 ATL07 benchmark.

C

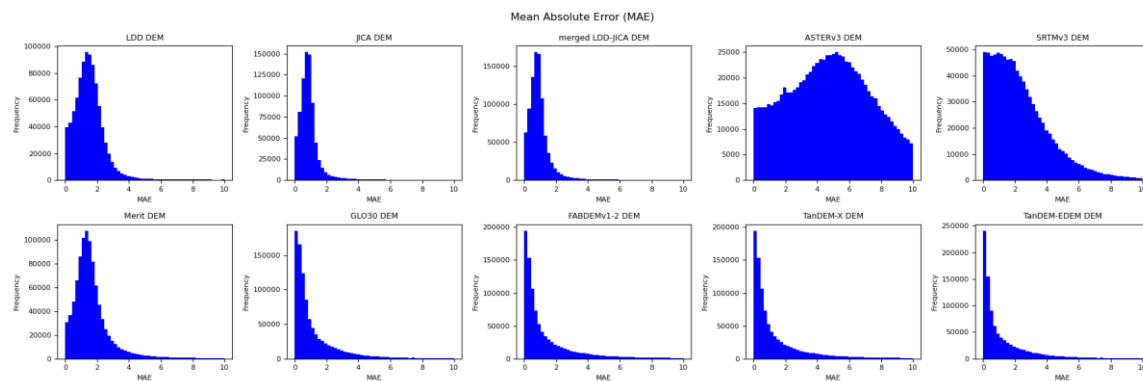


Figure A 7: The histogram distribution of the mean absolute error (MAE), comparing 10 DEM products against the ICESat-2 ATL07 benchmark.

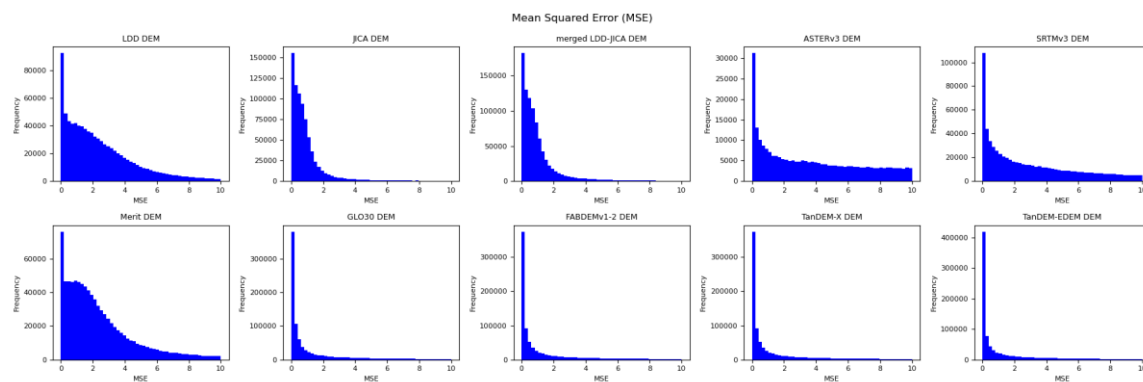


Figure A 8: The histogram distribution of the mean square error (MSE), comparing 10 DEM products against the ICESat-2 ATL07 benchmark.

Mean Error (ME) resolution 5x5 km.

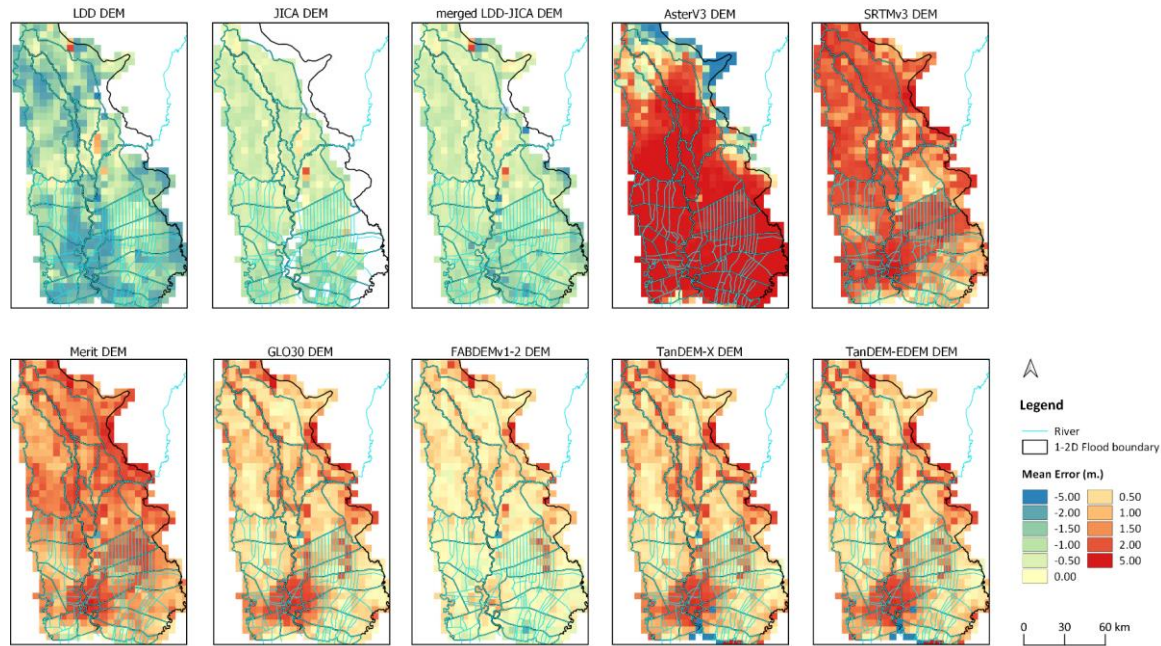


Figure A 9: The mean error (ME) spatial grid comparison of 10 DEM products against the ICESat-2 ATL08 benchmark, with a resolution of 5x5 km.


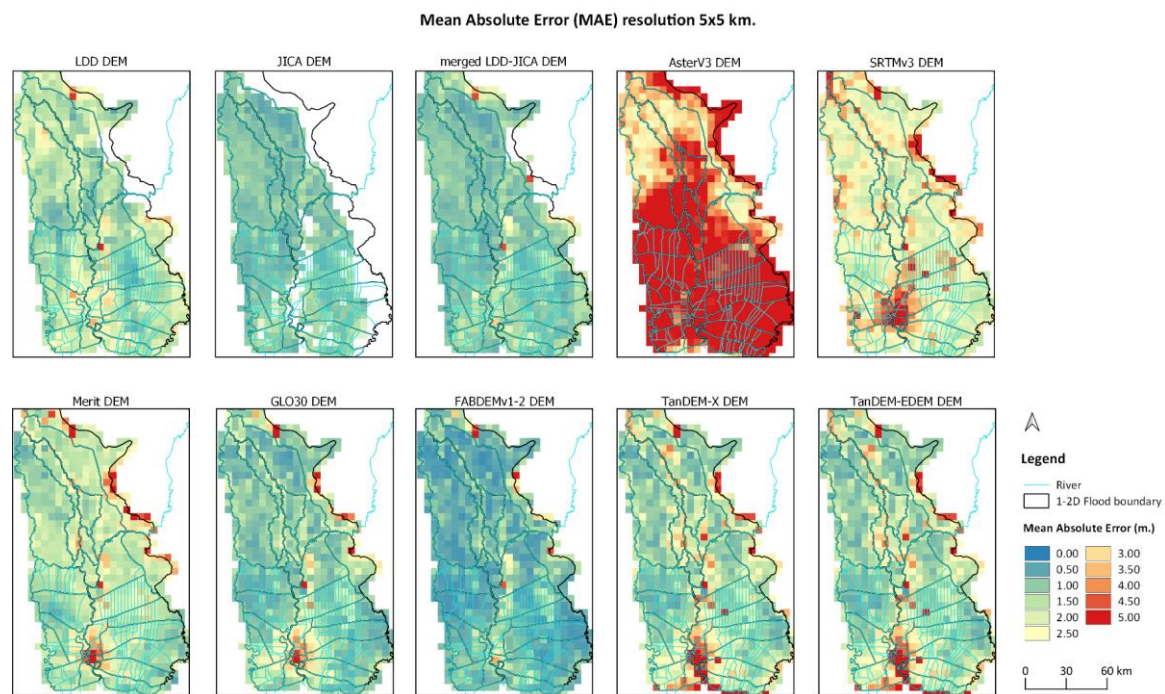


Figure A 10: The mean error (MAE) spatial grid comparison of 10 DEM products against the ICESat-2 ATL08 benchmark, with a resolution of 5x5 km.

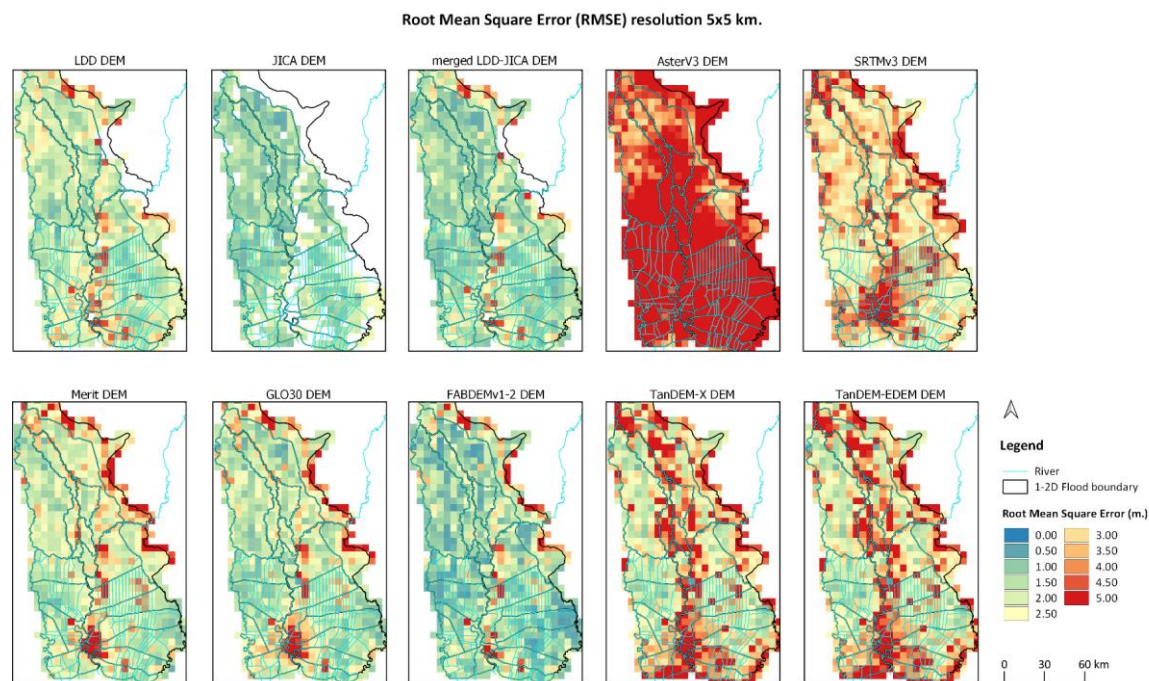

860 **Figure A 11: The mean error (RMSE) spatial grid comparison of 10 DEM products against the ICESat-2 ATL08 benchmark, with a resolution of 5x5 km.**

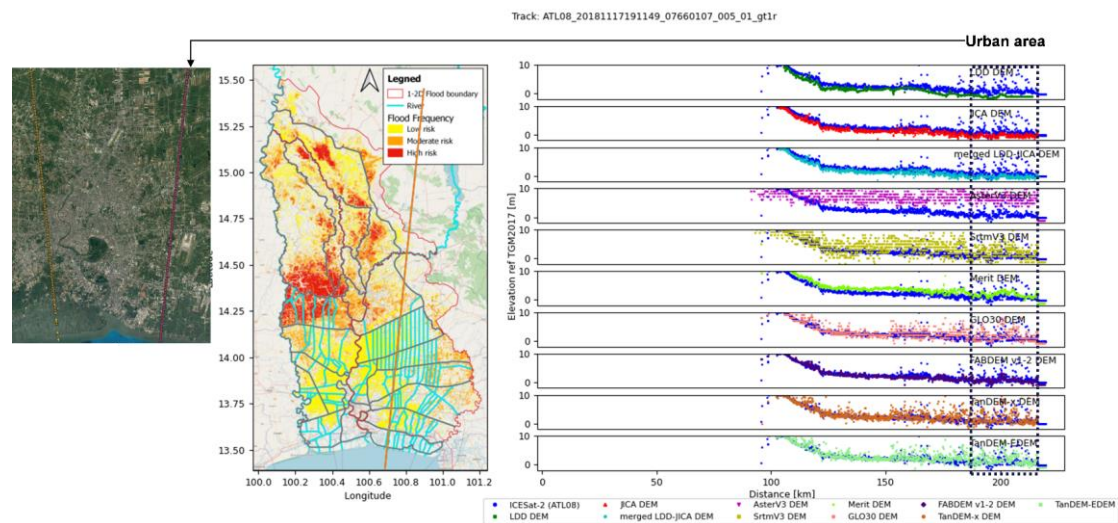


Figure A 12: The track-wise comparison of 10 DEM products with ICESat-2 ATL08 benchmark. © OpenStreetMap contributors 2015. Distributed under the Open Data Commons Open Database License (ODbL) v1.0. © Google Earth.

865 **Author contributions**

Formatted: Font color: Auto

Theerapol Charoensuk: Conceptualization, Methodology, Validation, Formal analysis, Investigation, Data curation, Visualization, Writing – review & editing, Writing – original draft. Claudia Katrine Corvenius Lorentzen: Coding and Visualization. Anne Beukel Bak: Coding and Visualization. Jakob Luchner: Software, review. Christian Tøttrup: Data curation, review. Peter Bauer-Gottwein: Methodology, Conceptualization, Resources, Supervision, Writing – review & editing.

Competing interests

Formatted: Font color: Auto

The authors declare that they have no conflict of interest.

Acknowledgements

Formatted: Font color: Auto

We gratefully acknowledge the Hydro-Informatics Institute (HII), DHI A/S, the Geo-Informatics and Space Technology Development Agency (GISTDA), German Aerospace Centre (DLR) and the WorldWater project (<https://worldwater.earth/>) funded by the European Commission and European Space Agency (ESA) for providing historical observed data, in-situ data, Chao Phraya’s 1D-2D flood models, MIKE powered by DHI software, flood maps, digital elevation model and water surface extent data. This study received no funding. Theerapol Charoensuk received financial support from the Office of the Civil Service Commission (OCSC) scholarship provided by the Thai Royal government. Their unwavering support and invaluable contributions have been instrumental in the fruition of this work.

References

Formatted: Font color: Auto

Abrams, M., Crippen, R., Fujisada, H., 2020. ASTER Global Digital Elevation Model (GDEM) and ASTER Global Water Body Dataset (ASTWBD). *Remote Sens.* 12, 1–12. doi:10.3390/rs12071156

AbuBaker, A., Qahwaji, R., Ipson, S., Saleh, M., 2007. One Scan Connected Component Labeling Technique, in: 2007 IEEE International Conference on Signal Processing and Communications. pp. 1283–1286. doi:10.1109/ICSPC.2007.4728561

AIRBUS, 2020. Copernicus DEM. Copernicus DEM: Copernicus Digital Elevation Model ProductHandbook. doi:<https://doi.org/10.5270/ESA-c5d3d65>

Argall, P.S., Sica, R.J., 2003. LIDAR | Atmospheric Sounding Introduction, in: Holton, J.R.B.T.-E. of A.S. (Ed.), . Academic Press, Oxford, pp. 1169–1176. doi:<https://doi.org/10.1016/B0-12-227090-8/00203-7>

890 Auynirundronkool, K., Chen, N., Peng, C., Yang, C., Gong, J., Silapathong, C., 2012. Flood detection and mapping of the Thailand Central plain using RADARSAT and MODIS under a sensor web environment. *Int. J. Appl. Earth Obs. Geoinf.* 14, 245–255. doi:10.1016/j.jag.2011.09.017

[Biancamaria, S., Lettenmaier, D.P., Pavelsky, T.M., 2016. The SWOT Mission and Its Capabilities for Land Hydrology. *Surv. Geophys.* 37, 307–337. doi:10.1007/s10712-015-9346-y](#)

895 Carabajal, C.C., Boy, J.P., 2020. ICESat-2 altimetry as geodetic control. *Int. Arch. Photogramm. Remote Sens. Spat. Inf. Sci.*

- ISPRS Arch. 43, 1299–1306. doi:10.5194/isprs-archives-XLIII-B3-2020-1299-2020

[Chai, T., Draxler, R.R., 2014. Root mean square error \(RMSE\) or mean absolute error \(MAE\)? -Arguments against avoiding RMSE in the literature. *Geosci. Model Dev.* 7, 1247–1250. doi:10.5194/gmd-7-1247-2014](#)

Channumsin, S., Sreesawet, S., Saroj, T., Saingyen, P., Puttasuwan, K., Udomthanatheera, P., Jaturut, S., 2020. Collision avoidance strategies and conjunction risk assessment analysis tool at GISTDA. *J. Sp. Saf. Eng.* 7, 268–273. doi:10.1016/j.jsse.2020.07.019

Charoensuk, T., Lolupiman, T., Chantip, S., Sisomphon, P., 2018. Modeling dike breaching in The Chao Phraya River Basin using high resolution elevation data (Lidar), in: 13th International Conference on Hydrosience & Engineering. Advancement of Hydro-Engineering for Sustainable Development. Chongqing, China.

Charoensuk, T., Luchner, J., Balbarini, N., Sisomphon, P., Bauer-gottweinGottwein, P., 2024. [Journal of Hydrology - Regional Studies](#) Enhancing the capabilities of the Chao Phraya forecasting system through the integration of pre-processed numerical weather forecasts. *J. Hydrol. Reg. Stud.* 52, 101737. doi:10.1016/j.ejrh.2024.101737

Coppo Frias, M., Liu, S., Mo, X., Nielsen, K., Rannal, H., Jiang, L., Ma, J., Bauer-Gottwein, P., 2023. River hydraulic modeling with ICESat-2 land and water surface elevation. *Hydrol. Earth Syst. Sci.* 27, 1011–1032. doi:10.5194/hess-27-1011-2023

[D. N. Moriasi, J. G. Arnold, M. W. Van Liew, R. L. Bingner, R. D. Harmel, T. L. Veith, 2007. Model Evaluation Guidelines for Systematic Quantification of Accuracy in Watershed Simulations. *Trans. ASABE* 50, 885–900. doi:10.13031/2013.23153](#)

Dandabathula, G., Hari, R., Ghosh, K., Bera, A.K., Srivastav, S.K., 2023. Accuracy assessment of digital bare-earth model using ICESat-2 photons: analysis of the FABDEM. *Model. Earth Syst. Environ.* 9, 2677–2694. doi:10.1007/s40808-022-01648-4

Dandabathula, G., Srinivasa Rao, S., 2020. Validation of ICESat-2 Surface Water Level Product ATL13 with Near Real Time Gauge Data. *Hydrology* 8, 19. doi:10.11648/j.hyd.20200802.11

Danish Hydraulic Institute, 2016. MIKE 21 Flow Model & MIKE21 Flood Screening Tool - Hydrodynamic Module - Scientific Documentation 53.

Darnell, A.R., Tate, N.J., Brunsdon, C., 2008. Improving user assessment of error implications in digital elevation models. *Comput. Environ. Urban Syst.* 32, 268–277. doi:10.1016/j.compenvurbsys.2008.02.003

DHI, 2018. MIKE 21 FLOW MODEL FM, Reference manual 55.

DHI Water and Environment, 2019. MIKE FLOOD Reference Manual.

DHI Water and Environment, 2021. MIKE 11 Reference Manual, DHI Water and Environment.

Dumrongchai, P., Srimanee, C., Duangdee, N., Bairaksa, J., 2021. The determination of Thailand Geoid Model 2017 (TGM2017) from airborne and terrestrial gravimetry. *Terr. Atmos. Ocean. Sci.* 32, 859–874. doi:10.3319/TAO.2021.08.23.01

European Space Agency (ESA), 2015. Sentinel-2 user handbook, Industrial and Engineering Chemistry.

Farr, T.G., Rosen, P.A., Caro, E., Crippen, R., Duren, R., Hensley, S., Kobrick, M., Paller, M., Rodriguez, E., Roth, L., Seal, D., Shaffer, S., Shimada, J., Umland, J., Werner, M., Oskin, M., Burbank, D., Alsdorf, D., 2007. The Shuttle Radar Topography Mission. *Rev. Geophys.* 45. doi:https://doi.org/10.1029/2005RG000183

[Finn, H., Storm, B., Richaud, B., Klinting, A., Gasc, A., 2018. Flood Forecasting and Water Management System for Thailand, in: *Advances in Hydroinformatics*. Springer, Singapore, pp. 541–557. doi:10.1007/978-981-10-7218-5_38](#)

Forecast, B., 1995. Chapter 7 Forecast verification. *Int. Geophys.* 59, 233–283. doi:10.1016/S0074-6142(06)80043-4

[Frias, M.C., Liu, S., Mo, X., Druce, D., Yamazaki, D., Folkmann, A., Nielsen, K., Bauer-gottwein, P., 2024. Improving 2D hydraulic modeling in floodplain areas with ICESat-2 data : A case study in Upstream Yellow River. *EGU General Assembly 2024*, Vienna, Austria, 14–19 Apr 2024, EGU24-14669, pp. 24–25. doi:https://doi.org/10.5194/egusphere-egu24-14669](#)

Glossary of Terms, 1998. *Mach. Learn.* 30, 271–274. doi:10.1023/A:1017181826899

Hao, T., Cui, H., Hai, G., Qiao, G., Li, H., He, Y., Li, R., 2022. Impact of Slopes on ICESat-2 Elevation Accuracy Along the CHINARE Route in East Antarctica. *IEEE J. Sel. Top. Appl. Earth Obs. Remote Sens.* 15, 5636–5643. doi:10.1109/JSTARS.2022.3189042

Hawker, L., Uhe, P., Neal, J., 2023. FABDEM Updates - FABDEM V1-2. pp. 2–5.

Hydro-Informatics Institute, 2017. Improving the efficiency of the CPY flood modelling system.

Formatted: English (United Kingdom)

Japan International Cooperation Agency (JICA), 2012. PROJECT FOR COMPREHENSIVE FLOOD MANAGEMENT PLAN FOR THE CHAO PHRAYA RIVER BASIN (SUB-COMPONENT 1-1 AERIAL SURVEY BY LIDAR).

Jasinski, Michael, Gsf. N., Stoll, Jeremy, Hancock, David, Robbins, John, Nattala, Jyothi, Morison, James, Jones, Benjamin, Ondrusek, Michael, Parrish, Christopher, Ssai, C.C., Jasinski, M., Stoll, J., Hancock, D., Robbins, J., Nattala, J., Morison, J., Jones, B., Ondrusek, M., Pavelsky, T., Parrish, C., Carabajal, C., 2023. ICESat-2 Algorithm Theoretical Basis Document (ATBD) for Along Track Inland Surface Water Data, ATL13, Version 6 2. doi:10.5067/03JYGZ0758UL

JICA, 2018. Data Collection Survey on the Outer Ring Road Diversion Channel in the Comprehensive Flood Management Plan for the Chao Phraya River Basin in the Kingdom of Thailand.

Kittel, C.M.M., Hatchard, S., Neal, J.C., Nielsen, K., Bates, P.D., Bauer-Gottwein, P., 2021. Hydraulic Model Calibration Using CryoSat-2 Observations in the Zambezi Catchment. *Water Resour. Res.* 57. doi:10.1029/2020WR029261

Krieger, G., Moreira, A., Fiedler, H., Hajnsek, I., Werner, M., Younis, M., Zink, M., 2007. TanDEM-X: A Satellite Formation for High-Resolution SAR Interferometry. *IEEE Trans. Geosci. Remote Sens.* 45, 3317–3341. doi:10.1109/TGRS.2007.900693

Lamichhane, N., Sharma, S., 2018. Effect of input data in hydraulic modeling for flood warning systems. *Hydrol. Sci. J.* 63, 938–956. doi:10.1080/02626667.2018.1464166

Laurence Hawker, J.N., 2021. FABDEM V1-0 [WWW Document]. Univ. Bristol. doi:https://doi.org/10.5523/bris.25wfy0f9ukoge2gs7a5mqpq2j7

Lemoine, F., Kenyon, S.C., Factor, J., Trimmer, R., Pavlis, N., Chinn, D., Cox, C., Klosko, S., Luthcke, S., Torrence, M., Wang, Y., Williamson, R., Pavlis, E., Rapp, R., Olson, T., 1998. The development of the joint NASA GSFC and the National Imagery and Mapping Agency (NIMA) geopotential model EGM96.

Liu, Z., Zhu, J., Fu, H., Zhou, C., Zuo, T., 2020. Evaluation of the vertical accuracy of open global dems over steep terrain regions using icesat data: A case study over hunan province, china. *Sensors (Switzerland)* 20, 1–16. doi:10.3390/s20174865

Lv, X., Liu, R., Liu, J., Song, X., 2005. Monitoring flood using multi-temporal ENVISAT ASAR data. *Int. Geosci. Remote Sens. Symp.* 5, 3627–3629. doi:10.1109/IGARSS.2005.1526633

Martinis, S., Groth, S., Wieland, M., Knopp, L., Rättich, M., 2022. Towards a global seasonal and permanent reference water product from Sentinel-1/2 data for improved flood mapping. *Remote Sens. Environ.* 278. doi:10.1016/j.rse.2022.113077

Martinis, S., Twele, A., Strobl, C., Kersten, J., Stein, E., 2013. A multi-scale flood monitoring system based on fully automatic MODIS and terraSAR-X processing chains. *Remote Sens.* 5, 5598–5619. doi:10.3390/rs5115598

McClean, F., Dawson, R., Kilsby, C., 2020. Implications of Using Global Digital Elevation Models for Flood Risk Analysis in Cities. *Water Resour. Res.* 56. doi:10.1029/2020WR028241

Morrison, D., Beevers, L., Wright, G., Stewart, M.D., 2022. The impact of data spatial resolution on flood vulnerability assessment. *Environ. Hazards* 21, 77–98. doi:10.1080/17477891.2021.1912694

Nandam, V., Patel, P.L., 2024. A framework to assess suitability of global digital elevation models for hydrodynamic modelling in data scarce regions. *J. Hydrol.* 630, 130654. doi:10.1016/j.jhydrol.2024.130654

Neuenschwander, A., Pitts, K., 2019. The ATL08 land and vegetation product for the ICESat-2 Mission. *Remote Sens. Environ.* 221, 247–259. doi:10.1016/j.rse.2018.11.005

Neuenschwander, A., Pitts, K., Jelley, B., Robbins, J., Markel, J., Popescu, S., Nelson, R., Harding, D., Klotz, B., Sheridan, R., Neuenschwander, A., 2022. Ice, Cloud, and Land Elevation Satellite 2 (ICESat-2) Algorithm Theoretical Basis Document (ATBD) for Land - Vegetation Along-Track Products (ATL08) 1–148. doi:10.5067/8ANPSL1NN7YS.1

Neumann, T.A., Martino, A.J., Markus, T., Bae, S., Bock, M.R., Brenner, A.C., Brunt, K.M., Cavanaugh, J., Fernandes, S.T., Hancock, D.W., Harbeck, K., Lee, J., Kurtz, N.T., Luers, P.J., Luthcke, S.B., Magruder, L., Pennington, T.A., Ramos-Izquierdo, L., Rebold, T., Skoog, J., Thomas, T.C., 2019. The Ice, Cloud, and Land Elevation Satellite – 2 mission: A global geolocated photon product derived from the Advanced Topographic Laser Altimeter System. *Remote Sens. Environ.* 233, 111325. doi:10.1016/j.rse.2019.111325

Nied, M., Pardowitz, T., Nissen, K., Ulbrich, U., Hundecha, Y., Merz, B., 2014. On the relationship between hydro-meteorological patterns and flood types. *J. Hydrol.* 519, 3249–3262. doi:10.1016/j.jhydrol.2014.09.089

Nithirochanont, U., Chivapreecha, S., Peanvijarnpong, C., Dehghan, K., 2010. GISTDA EOC synthetic aperture radar data processing system. *Proc. - CSPA 2010 2010 6th Int. Colloq. Signal Process. Its Appl.* 327–332. doi:10.1109/CSPA.2010.5545261

Formatted: English (United Kingdom)

- Okeowo, M.A., Lee, H., Hossain, F., Getirana, A., 2017. Automated Generation of Lakes and Reservoirs Water Elevation Changes from Satellite Radar Altimetry. *IEEE J. Sel. Top. Appl. Earth Obs. Remote Sens.* 10, 3465–3481. doi:10.1109/JSTARS.2017.2684081
- Paengwangthong, W., Sarapirome, S., 2012. DEM data assessment for hydrologic applications: A case study in Nam Khek Watershed, Thailand. 33rd Asian Conf. Remote Sens. 2012, ACRS 2012 1, 336–342.
- Pavlis, N.K., Holmes, S.A., Kenyon, S.C., Factor, J.K., 2012. The development and evaluation of the Earth Gravitational Model 2008 (EGM2008). *J. Geophys. Res. Solid Earth* 117. doi:10.1029/2011JB008916
- Perera, G.S.N., Nalani, H.A., 2022. Uavs for a Complete Topographic Survey. *Int. Arch. Photogramm. Remote Sens. Spat. Inf. Sci. - ISPRS Arch.* 43, 441–447. doi:10.5194/isprs-archives-XLIII-B2-2022-441-2022
- Pulvirenti, L., Boni, G., Pierdicca, N., Fiorini, M., Rudari, R., 2014. Combined use of multi-temporal COSMO-SkyMed data and a hydrodynamic model to monitor flood dynamics. *Int. Geosci. Remote Sens. Symp.* 3346–3349. doi:10.1109/IGARSS.2014.6947197
- Raj, T., Hashim, F.H., Huddin, A.B., Ibrahim, M.F., Hussain, A., 2020. A survey on LiDAR scanning mechanisms. *Electron.* 9. doi:10.3390/electronics9050741
- Raney, R.K., Luscombe, A.P., Langham, E.J., Ahmed, S., 1991. RADARSAT (SAR imaging). *Proc. IEEE* 79, 839–849. doi:10.1109/5.90162
- Rao, P., Jiang, W., Hou, Y., Chen, Z., Jia, K., 2018. Dynamic change analysis of surface water in the Yangtze river basin based on MODIS products. *Remote Sens.* 10, 1–20. doi:10.3390/rs10071025
- Rosenfeld, A., Pfaltz, J.L., 1966. Sequential Operations in Digital Picture Processing. *J. ACM* 13, 471–494. doi:10.1145/321356.321357
- Saksena, S., Merwade, V., 2015. Incorporating the effect of DEM resolution and accuracy for improved flood inundation mapping. *J. Hydrol.* 530, 180–194. doi:10.1016/j.jhydrol.2015.09.069
- Samantaray, S., Sahoo, A., 2024. Groundwater level prediction using an improved ELM model integrated with hybrid particle swarm optimisation and grey wolf optimisation. *Groundw. Sustain. Dev.* 26, 101178. doi:10.1016/j.gsd.2024.101178
- Schwarz, K.P., El-Sheimy, N., 2007. Digital mobile mapping systems state of the art and future trends. *Adv. Mob. Mapp. Technol.* 3–18. doi:10.4324/9780203961872-9
- Shen, J., Tan, F., 2020. Effects of DEM resolution and resampling technique on building treatment for urban inundation modeling: a case study for the 2016 flooding of the HUST campus in Wuhan, Natural Hazards. Springer Netherlands. doi:10.1007/s11069-020-04198-z
- Shen, Y., Liu, D., Jiang, L., Yin, J., Nielsen, K., Bauer-Gottwein, P., Guo, S., Wang, J., 2020. On the contribution of satellite altimetry-derived water surface elevation to hydrodynamic model calibration in the Han river. *Remote Sens.* 12, 1–18. doi:10.3390/rs12244087
- Sholarin, E.A., Awange, J.L., 2015. Photogrammetry. *Environ. Sci. Eng. (Subseries Environ. Sci.)* 213–230. doi:10.1007/978-3-319-27651-9_10
- Sisomphon, P., Boonya-aroonnet, S., Chonwattana, S., 2013. TOWARDS THE DEVELOPMENT OF A DECISION SUPPORT SYSTEM FOR FLOOD MANAGEMENT IN CHAO PHRAYA RIVER BASIN , THAILAND, in: International Conference on Flood Resilience, Experiences in Asia and Europe, 5-7 September 2013, Exeter UK.
- Soille, P., 2003. Morphological Image Analysis: Principles and Applications, 2nd ed. Springer-Verlag, Berlin, Heidelberg.
- Stein, L., Pianosi, F., Woods, R., 2019. Hydrological Processes - 2019 - Stein - Event-based classification for global study of river flood generating processes.pdf.
- Tadono, T., Takaku, J., Tsutsui, K., Oda, F., Nagai, H., 2015. Status of “ALOS World 3D (AW3D)” global DSM generation. *Int. Geosci. Remote Sens. Symp.* 2015-Novem, 3822–3825. doi:10.1109/IGARSS.2015.7326657
- Thanathanphon, W., Chanthip, S., Sisomphon, P., 2014. DEVELOPMENT OF AN OPERATIONAL REAL TIME MONITORING SYSTEM FOR FLOOD RISK ASSESSMENT , FORECASTING AND MANAGEMENT OF MUN AND CHI RIVER BASINS , THAILAND.
- Tom Neumann, Anita Brenner, David Hancock, John Robbins, Jack Saba, Kaitlin Harbeck, Aimée Gibbons, Jeffrey Lee, Scott Luthcke, Tim Rebold, 2021. Algorithm Theoretical Basis Document (ATBD) for Global Geolocated Photons ATL03. *Remote Sens. Environ.* 2, 7–208.
- Torres, R., Snoeij, P., Geudtner, D., Bibby, D., Davidson, M., Attema, E., Potin, P., Rommen, B.Ö., Floury, N., Brown, M., Traver, I.N., Deghaye, P., Duesmann, B., Rosich, B., Miranda, N., Bruno, C., L’Abbate, M., Croci, R., Pietropaolo, A.,

- Huchler, M., Rostan, F., 2012. GMES Sentinel-1 mission. *Remote Sens. Environ.* 120, 9–24. doi:10.1016/j.rse.2011.05.028
- Tottrup, C., Druce, D., Meyer, R.P., Christensen, M., Riffler, M., Dulleck, B., Rastner, P., Jupova, K., Sokoup, T., Haag, A., Cordeiro, M.C.R., Martinez, J.M., Franke, J., Schwarz, M., Vanthof, V., Liu, S., Zhou, H., Marzi, D., Rudiyanto, R., Thompson, M., Hiestermann, J., Alemohammad, H., Masse, A., Sannier, C., Wangchuk, S., Schumann, G., Giustarini, L., Hallows, J., Markert, K., Paganini, M., 2022. Surface Water Dynamics from Space: A Round Robin Intercomparison of Using Optical and SAR High-Resolution Satellite Observations for Regional Surface Water Detection. *Remote Sens.* 14. doi:10.3390/rs14102410
- Turkington, T., Breinl, K., Ettema, J., Alkema, D., Jetten, V., 2016. A new flood type classification method for use in climate change impact studies. *Weather Clim. Extrem.* 14, 1–16. doi:10.1016/j.wace.2016.10.001
- Van Der Walt, S., Schönberger, J.L., Nunez-Iglesias, J., Boulouge, F., Warner, J.D., Yager, N., Gouillart, E., Yu, T., 2014. Scikit-image: Image processing in python. *PeerJ* 2014, 1–18. doi:10.7717/peerj.453
- Visessri, S., Ekkawatpanit, C., 2020. Flood management in the context of climate and land-use changes and adaptation within the chao phraya river basin. *J. Disaster Res.* 15, 579–587. doi:10.20965/jdr.2020.p0579
- Wang, C., Zhu, X., Nie, S., Xi, X., Li, D., Zheng, W., Chen, S., 2019. Ground elevation accuracy verification of ICESat-2 data: a case study in Alaska, USA. *Opt. Express* 27, 38168. doi:10.1364/oe.27.038168
- Wang, X., Liang, X., 2023. Accuracy Evaluation of Icesat-2 Atl08 in Finland. *Int. Arch. Photogramm. Remote Sens. Spat. Inf. Sci. - ISPRS Arch.* 48, 1817–1822. doi:10.5194/isprs-archives-XLVIII-1-W2-2023-1817-2023
- Weifeng, X., Jun, L., Dailiang, P., Jinge, J., Hongxuan, X., Hongyue, Y., Jun, Y., 2024. Multi-source DEM accuracy evaluation based on ICESat-2 in Qinghai-Tibet Plateau, China. *Int. J. Digit. Earth* 17, 1–24. doi:10.1080/17538947.2023.2297843
- Werner, M., 2001. Shuttle Radar Topography Mission (SRTM) mission overview. *Frequenz* 55, 75–79. doi:10.1515/FREQ.2001.55.3-4.75
- Wessel, B., 2016. TanDEM-X Ground Segment DEM Products Specification Document. Public Doc. TD-GS-PS-0021 46.
- Willmott, C.J., 2005. [Advantages of the mean absolute error \(MAE\) over the root mean square error \(RMSE\) in assessing average model performance . *Clim. Res.* 30, 79–82.](#)
- Wu, S., Li, J., Huang, G.H., 2007. Modeling the effects of elevation data resolution on the performance of topography-based watershed runoff simulation. *Environ. Model. Softw.* 22, 1250–1260. doi:10.1016/j.envsoft.2006.08.001
- Yamazaki, D., Ikeshima, D., Tawatari, R., Yamaguchi, T., O’Loughlin, F., Neal, J.C., Sampson, C.C., Kanae, S., Bates, P.D., 2017. A high-accuracy map of global terrain elevations. *Geophys. Res. Lett.* 44, 5844–5853. doi:10.1002/2017GL072874
- Yamazaki, D., Trigg, M.A., Ikeshima, D., 2015. Development of a global ~90m water body map using multi-temporal Landsat images. *Remote Sens. Environ.* 171, 337–351. doi:10.1016/j.rse.2015.10.014
- Yan, L., Zhang, L., Xiong, L., Yan, P., Jiang, C., Xu, W., Xiong, B., Yu, K., Ma, Q., Xu, C.Y., 2023. Flood Frequency Analysis Using Mixture Distributions in Light of Prior Flood Type Classification in Norway. *Remote Sens.* 15. doi:10.3390/rs15020401
- Zhu, J., Yang, P. feng, Li, Y., Xie, Y. zhou, Fu, H. qiang, 2022. Accuracy assessment of ICESat-2 ATL08 terrain estimates: A case study in Spain. *J. Cent. South Univ.* 29, 226–238. doi:10.1007/s11771-022-4896-x