



The impact of future climate projections and anthropogenic activities on basin-scale groundwater availability

Steven Reinaldo Rusli^{1,2}, Victor F Bense¹, Syed M.T Mustafa¹, and Albrecht H Weerts^{1,3}

¹Hydrology and Environmental Hydraulics, Wageningen University, 6708 PB Wageningen, The Netherlands

²Civil Engineering Department, Faculty of Engineering, Parahyangan Catholic University, Bandung 40141, Indonesia

³Operational Water Management, Department of Inland Water Systems, Deltares, The Netherlands

Correspondence: Steven Reinaldo Rusli (steven.reinaldo.rusli@gmail.com)

Abstract. Groundwater is under the pressure of changing climate and increasing anthropogenic demand. In this study, we project the effect of these two processes on the projected future groundwater status. Climate projections of Representative Concentration Pathway (RCP) 4.5 and RCP8.5 from the Coupled Model Intercomparison Project Phase 6 (CMIP6) drive a one-way coupled fully distributed hydrological and groundwater model. In addition, three plausible groundwater abstraction scenarios with diverging predictions from increasing, constant, to decreasing volumes and spatial distribution are used. Groundwater status projections are assessed for the short-term (2030), mid-term (2050), and long-term (2100) periods. We use the Bandung groundwater basin as our study case, located 120 km from the current capital city of Indonesia, Jakarta, which is currently under a relocation plan. It is selected as the future anthropogenic uncertainties in the basin, related to the projected groundwater abstraction, is in agreement with our developed scenarios. Results show that changes in the projected climate input, including intensifying rainfall and rising temperature, do not propagate notable changes in groundwater recharge. Under the current unsustainable groundwater abstraction rate, the confined piezometric heads are projected to drop up to a maximum of 7.14 m, 15.25 m, and 29.51 m in 2030, 2050, and 2100, respectively. When groundwater abstraction expands in proportion to the present population growth, the impact is worsened almost two-fold. In contrast, if the groundwater abstraction decreases because of the relocated capital city, the groundwater storage starts to show replenishment potential. As a whole, projected groundwater status changes are dominated by anthropogenic activity, and less so by changes in climatic forcing. The results of this study are expected to demonstrate and inform responsible parties in operational water management on the issue of the impact of projected climate forcing and anthropogenic activity on future groundwater status.

1 Introduction

Groundwater, as one of the major sources of water on earth, has been known to be over-exploited in many basins worldwide (Bierkens and Wada, 2019; Gleeson et al., 2020), which has further caused global depletion of groundwater resources (Wada et al., 2010). In more than half of the sub-districts located in the northwestern part of Bangladesh, the estimated groundwater abstraction has a higher volume than the simulated groundwater recharge (Shahid et al., 2015), and overexploitation of groundwater for irrigation, identified as the primary factor, contributes to the decline in groundwater level in these areas (Mustafa et al., 2017). Even more drastically, twenty-one (out of twenty-three) provinces in China were diagnosed with groundwater



25 over-exploitation-related problems (Lili et al., 2020). In the northeastern part of Brazil, the intensification of groundwater
exploitation has caused piezometric surface drawdowns of up to 100 m (de Luna et al., 2017). In the archipelago part of
Spain, Gran Canaria, the currently accumulated groundwater depletion would require a few decades to recover (Custodio et al.,
2016). From all such cases, we can see the severe impact driven by anthropogenic activities through groundwater abstraction
on the groundwater regime. Dwindling groundwater tables, depleting groundwater storage, and degrading groundwater quality,
30 have led to various consequences such as land subsidence (Chen et al., 2022), wetland deterioration (Mancuso et al., 2020),
groundwater pollution (Meng et al., 2022), and seawater intrusion (Momejian et al., 2019).

Besides anthropogenic activities such as groundwater abstraction discussed above, climatic variability may also play an
important role in a changing groundwater regime since groundwater recharge is the dominant driver of groundwater flow.
Surface and soil properties aside, groundwater recharge is modulated by precipitation, temperature, radiation, and other climate
35 variables. The recent changes in these variables' patterns, frequencies, and extremes, therefore, have led to the alteration of
the groundwater table distribution. Several studies suggest that changes in climate can contribute positively to an increase
in groundwater recharge (Tillman et al., 2016; Patle et al., 2018; Gaye and Tindimugaya, 2019). This occurs when rainfall
intensification provides a higher volume of water, thus providing an opportunity for more abundant groundwater resources.
Some others advocate contrarily and estimate a decline in groundwater recharge as a consequence of climate change (Pardo-
40 Igúzquiza et al., 2019; Anurag and Ng, 2022; Trásy-Havril et al., 2022). Mostly, such a reduction is related to the higher
potential evapotranspiration driven by the increasing temperature. Some others found the trend to be less definitive, varying
per case depending on various factors, and involving large uncertainties in its quantification (Meixner et al., 2016; Smerdon,
2017; Yawson et al., 2019; Wu et al., 2020; Wang et al., 2021).

As much as both anthropogenic and climatic factors have influenced the groundwater regime in the past centuries even at
45 the global scale (Döll et al., 2012), they also, to various extents, control the current and future status of the subsurface resource
(Stevenazzi et al., 2017; Liu et al., 2022). Therefore, future groundwater resource prediction relies greatly on climate projec-
tions and anthropogenic scenarios. Regarding climate projection studies, the Coupled Model Intercomparison Project (CMIP)
takes an important position in coordinating the global climate models (GCMs) worldwide. In its current sixth development
phase, CMIP6 (Eyring et al., 2016) distributes climate model outputs from numerous GCMs run by various model groups un-
50 der different Representative Concentration Pathway (RCP) scenarios (IPCC, 2021), a set of pathways developed specifically on
the span of projected radiative forcing values by the year 2100 (van Vuuren et al., 2011). With numerous hydrological forcing
projections available in multiple scenarios, it is possible to simulate future groundwater recharge using hydrological models,
from catchment to global scales (Yuan et al., 2015; Zhao et al., 2021; Hua et al., 2022).

While climate variables have only partial repercussions on groundwater recharge as it is also controlled by other factors,
55 in particular the basin surface and subsurface properties, groundwater abstraction directly removes the groundwater from
subsurface storage. Regarding anthropogenic projection scenarios, many studies develop scenarios in which the groundwater
abstraction rates increase (Chang et al., 2020; Ansari et al., 2021; Aslam et al., 2022), in line with rising populations. Only a
few studies projected the abstraction to decrease in the future (Mustafa et al., 2019; Siarkos et al., 2021), and when they do,
it is estimated not as the likely scenario but as a recommended policy to achieve sustainable abstraction rates. Nevertheless,



60 in some specific basin-scale areas, decreasing future groundwater abstraction might be a real possibility, and hence is not
less important to be studied in comparison to the increasing abstraction scenario. This becomes even more crucial as changes
in anthropogenic factors are often quantified to be more influential to the groundwater level compared to changes driven by
climatic factors (Varouchakis et al., 2015; Brewington et al., 2019; Mustafa et al., 2019).

In this study, we aim to envisage future groundwater availability under several climatic and anthropogenic scenarios. The
65 study area is the Bandung groundwater basin, located in Java Island, Indonesia. While currently developed in a rising population
trajectory, the Indonesia capital city relocation plan could, in reverse, steer the future groundwater abstraction down in the
Bandung groundwater basin. This is a rather unique situation, as there are not many basins in the world that are seriously
facing the possibility of future reduced groundwater abstraction. The Bandung groundwater basin and the city of Jakarta are
closely connected. The urban and industrial sector development in the study area is highly influenced by the demographic
70 and socio-economic activity within and around the capital city. With the plan to relocate the capital to Borneo Island, it is
predicted that many aspects of the study area would be impacted, including the decrease in groundwater abstraction volume,
rate, and spatial distribution. However, there have been several challenges in the early phase of the relocation that might lead to
further repercussions. Should any consequences arise on the project such as delay, postponement, or even worse, revocation, the
groundwater abstraction in the Bandung groundwater basin would still be projected to increase. Such uncertain circumstances
75 of future groundwater abstraction are reflected by the developed anthropogenic scenarios in this study.

Under the future climatic forcing and groundwater abstraction uncertainties, in our analysis, we simulate the groundwater
level and storage changes using a one-way coupled distributed hydrological model (Wflow_sbm) and groundwater flow model
(MODFLOW) (Rusli et al., 2023a, b). By applying multiple climatic forcing and abstraction scenarios, we aim to specifi-
cally (1) quantify the impact of future climate projection on groundwater recharge, and (2) assess the impact of the changing
80 groundwater abstraction on groundwater status in the study area. It is expected that the outcome of this study will be useful in
understanding basin-scale future groundwater availability as well as the controlling factors and its processes. We also believe
that this study would provide valuable input for the Bandung groundwater basin authorities to improve the current and future
groundwater policy and management.

2 Materials and methods

85 2.1 Study area

2.1.1 Hydrological situation, hydrogeological setting, and the current state of the art

The Bandung groundwater basin is located in the western part of Java Island, Indonesia, close to the current capital city,
Jakarta (see Figure 1a). It covers a total area of over 1,699 km², including two cities and three regencies, and was populated
by approximately 10 million people in 2020. Topographically, it is surrounded by steep mountains around its perimeter but is
90 vastly plain in its middle part, where the urban areas are developing. Its elevation ranges between 640 m and 2,500 m above
sea level. Its average annual rainfall between 2005 and 2018 is estimated between 1,970 and 2,850 mm per year (Rusli et al.,




2021). The average discharge at the surface catchment outlet during the same period is observed at $73.86 \text{ m}^3 \text{ s}^{-1}$, but with a large temporal variation, with the highest and lowest recorded discharge of $469.29 \text{ m}^3 \text{ s}^{-1}$ and $4.4 \text{ m}^3 \text{ s}^{-1}$, respectively. Our previous study also reported the spatial distribution and the pumping volume of the groundwater abstraction within the basin boundary (Rusli et al., 2023a). In summary, the water demand from the domestic and industrial sectors has been growing at a swift rate of up to 1.6 times increase over those 14 years. On average, the volume of groundwater abstraction from the upper and the lower aquifer is estimated at 122 million and 255 million m^3 per year, respectively. The 'upper' and 'lower' aquifers are discerned, as hydrogeologically the Bandung groundwater basin consists of multiple subsurface layers (see the conceptual groundwater flow model in Figure 1b, taken from (Rusli et al., 2023b)). Although the main aquifer is formed by a solitary geological formation named the Cibereum Formation, it is interspersed in many locations by thin clay layers known as the Kosambi Formation. This aquitard zone conceptually divides the aquifer into two stratifications, hence the 'upper' and the 'lower' aquifer. Detailed data on the basin climate, hydrology, and hydrogeological features are presented in our previous studies (Rusli et al., 2021, 2023a, b).


According to previous studies, the groundwater level in the Bandung groundwater basin has been decreasing in the last three decades. The groundwater table dwindles, on average, from less than one meter per year around urban areas close to rivers and streams, to 2.45 m per year around the industrial area (Abidin et al., 2013; Gumilar et al., 2015). A correlation between the groundwater abstraction location and the dwindling groundwater table is visually apparent; the drop in groundwater level is distinctly higher in areas where the groundwater is abstracted from both the upper and the lower aquifer (Rusli et al., 2023b). In recent years, the groundwater situation has not been improving. The rising pressure of water demand increases groundwater abstraction, while the intensified rainfall pattern fluctuates the groundwater recharge. Furthermore, this is worsened by the fact that groundwater abstraction from the bottom aquifer is partially compensated by the loss of groundwater in the upper aquifer through vertical flow, which negatively impacts the unconfined groundwater table's disproportionate drawdown (Rusli et al., 2023b). All of the mentioned features of groundwater flow were simulated in our previous studies (Rusli et al., 2023a, b). Not only the characteristics of the subsurface flow are numerically reconstructed, but the one-way coupled hydrological-groundwater flow model is also supplemented, considering the limited number of calibration data, by additional validation of groundwater storage change using satellite gravimetry-based estimates (GRACE) (Rusli et al., 2023a) and semi-quantitative model evaluation using environmental water tracer data (Rusli et al., 2023b).

2.1.2 The influence of Jakarta and the new capital city plan on the Bandung groundwater basin

Jakarta is a metropolitan city, with an area of 661.5 km^2 , and a population density of 13,000 people per km^2 . Its area extends to a larger Jakarta Metropolitan Area (JMA), with a total area of $4,384 \text{ km}^2$. In 2019, the number of daily commuters entering JMA was reported at 3.2 million people (Martinez and Masron, 2020). Undoubtedly, Bandung City, the largest city within the Bandung groundwater basin, is one of the cities with tangible mutual dependencies to Jakarta due to its neighboring distance (see Figure 1a). Bandung City was populated by 2.7 million people, while the greater area of the Bandung groundwater basin had a total population of 10.5 million people, both in 2023. The flows of demographic and socio-economic activities between these two cities make them often referred to as the Jakarta-Bandung mega-urban region (Pravitasari et al., 2018).

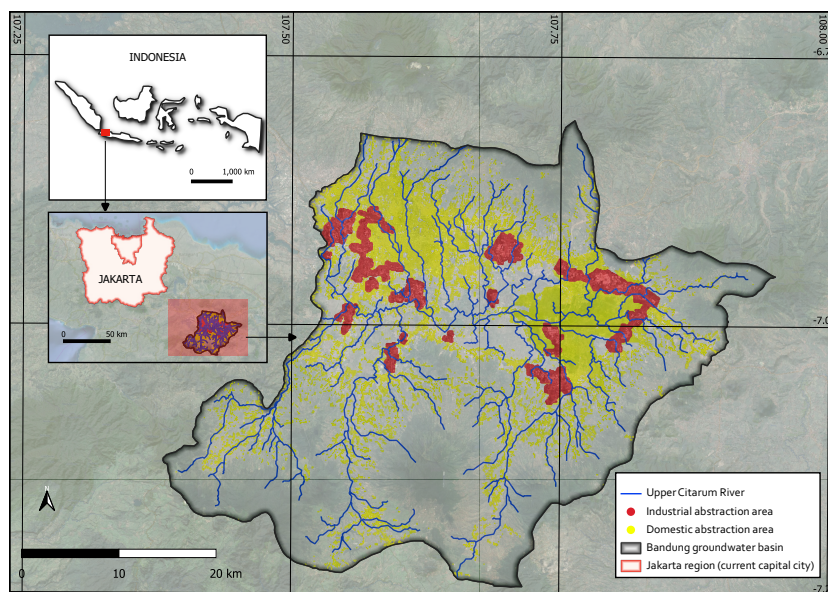

(a) The geographical location of the study area. The yellow and red area denotes the domestic and industry groundwater abstraction area respectively. The study area's relative position is highlighted in the locator map in the top left corner, indicated by the red square in Java Island. The second locator map just below the main locator map highlights the close distance between our study area of the Bandung groundwater basin and Jakarta, the current capital city of Indonesia. This image is adapted from Rusli et al. (2023b).

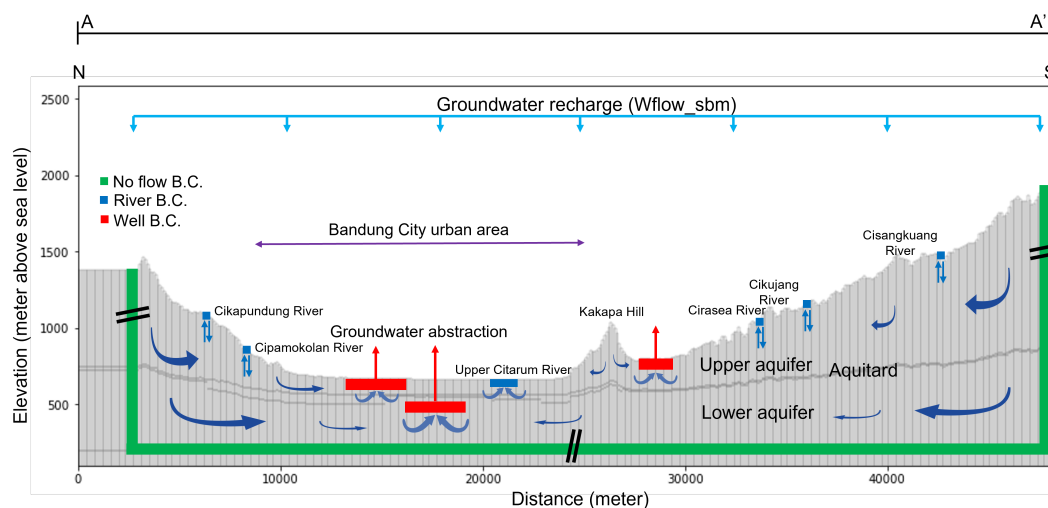

(b) The conceptual model of the Bandung groundwater basin from the north-south cross-section. Interspersing aquitard layers are found in between the upper and lower aquifers, interpolated based on the available borehole data. The figure also includes groundwater fluxes entering, leaving, and flowing within the domain, as well as the boundary conditions. This image is taken from Rusli et al. (2023b).

Figure 1. The overview of the Bandung groundwater basin as the study area.



The future of the groundwater regime in the Bandung groundwater basin becomes uncertain with the latest geospatial planning of Indonesia. It is to move its capital city from Jakarta to Nusantara, located on even a separate island in Borneo (Nugroho, 2020; Mutaqin et al., 2021; Hackbarth and de Vries, 2021). Under the current schedule where the capital city will begin to be relocated in 2024 (de Vries and Schrey, 2022), the urban and industrial development in cities surrounding Jakarta, including those in the Bandung groundwater basin, is predicted to be impacted, as the relocation would not only move the center of government but also mobilize part of the residents (Kodir et al., 2021). Regulated in the Presidential Regulation of Indonesia number 63, 2022 (Indonesia, 2022), the relocation is scheduled to be finalized in 2045, with the first two phases' end date in 2030. By 2030, up to 750,000 people are predicted to be fully relocated from JMA and its surroundings, including the Bandung groundwater basin, to Nusantara City.

Considering the capital city relocation plan and the close affinity between our study area and Jakarta, it is reasonable to imagine that the former issue would dampen the growth of the urban and industrial area in the Bandung groundwater basin. Indirectly, it would also be possible to forecast that the pressure of pumping groundwater to fulfill the water demand in the future is possibly reduced. Having said that, such a trend did not always happen in other former capital cities, such as Rio de Janeiro (Silva Jr and Pizani, 2003), Lagos (Healy et al., 2020), and Yangon (Hashimoto et al., 2022). In these three ex-capital cities, the economic growth carries on, despite being at different rates, and is translated to increasing groundwater abstraction. The uncertainties involving the future water resources, specifically groundwater abstraction, in the Bandung groundwater basin are highly unsettling, thus multiple and diverging scenarios are necessary to be explored. Therefore, while the common conceptual understanding of groundwater abstraction projection is to increase in the future, in this study we define three scenarios with wide ranges, stretching from an increasing to decreasing future groundwater abstraction, described in Section 2.3.2.

2.2 Simulation workflow and temporal framework

There are two numerical simulations involved in the modeling framework within this study: (1) surface hydrological and (2) groundwater flow. The hydrological simulation is performed using the Wflow_sbm model (Section 2.4.2), with two climate variables as its main forcing: the rainfall and the potential evapotranspiration. This produces two outputs: the simulated river discharge and the groundwater recharge. The former is compared with observation data to evaluate the performance of the hydrological Wflow_sbm model simulation, while the latter is used to force the one-way coupled MODFLOW groundwater flow model (Section 2.4.3). Aside from having the simulated groundwater recharge as its input, the groundwater flow model is also regulated by boundary conditions of groundwater abstraction. The outputs of the groundwater flow model include transient groundwater tables for the unconfined layer and piezometric heads for the confined layer, which allow to calculate the associated groundwater storage changes.

We consider the described simulation setup in this study in two phases based on the temporal categorization: the baseline and the future period. The baseline period is used as the 'control' of changes in the latter period; this is very important to note especially for variables whose projected changes are expressed in percentage relative to the benchmark. For the hydrological simulation using Wflow_sbm and the groundwater flow model using MODFLOW, the benchmark period is set between 2005 and 2015. The baseline hydrological simulation was forced by the CHIRPS rainfall estimates (Funk et al., 2015), and the

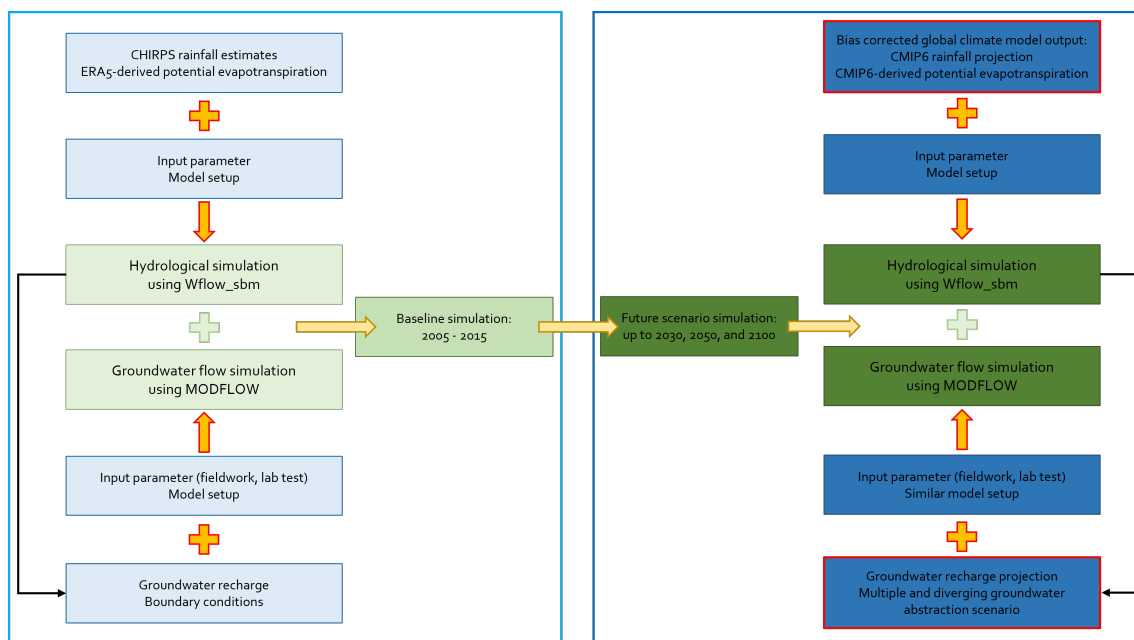


Figure 2. The overview of the modeling workflow. The left and right boxes show, respectively, the model setup during the baseline period and the future period. While both the hydrological and groundwater flow model's setup is similar during the two periods, the forcing data and boundary conditions are different and determined according to their respective configuration.

160 groundwater abstraction defined in the groundwater flow model was estimated upon population number (Rusli et al., 2021).
For the climate data temporal classification, the baseline period's temporal coverage starts from 1981 to 2015 following the
categorization on the Copernicus Climate Data Store of MRI-ESM2-0 model group (Copernicus Climate Change Service,
2021). For the future period, we classify the temporal setting into three categories: the short-term future (up to 2030), the mid-
term future (up to 2050), and the long-term future (up to 2100). These temporal classifications serve not only as the analysis
165 checkpoints but also as the milestone for the projected groundwater abstraction spatial distribution, described in Section 2.3.2.
On the whole, Figure 2 outlines the role of the temporal setup in this study (in the horizontal direction), from the baseline (left
box) to the future (right box) period, as well as the setup for subsequent hydrological and groundwater flow simulations (in the
vertical direction) in each of the period.

2.3 Future scenario development

170 In this study, we are going to independently develop two climatic scenarios (Section 2.3.1) and three anthropogenic scenarios
(Section 2.3.2). The climatic scenarios involve changes in projected rainfall and potential evapotranspiration, influenced by
temperature and radiation. The anthropogenic scenarios involve changes in not only the groundwater abstraction rate but also
the spatial distribution of the pumping activities. These scenarios result in six combinations of outcomes that are analyzed,
compared, and discussed in-depth in further sections.



175 2.3.1 Climate projection data and scenario


For the future period hydrological simulation, we use the CMIP6 (Coupled Model Intercomparison Project Phase 6) climate model runs (Eyring et al., 2016) under two greenhouse gas concentration trajectory scenarios: RCP (Representative Concentration Pathway) 4.5 and 8.5 (IPCC, 2021). The RCP4.5 is selected as the intermediate scenario, while the RCP8.5 is the extreme one. The considered variables are those required as the input to the Wflow_sbm model, specifically precipitation and near-
180 surface air temperature as well as surface downwelling shortwave radiation and top-of-atmosphere (TOA) incident shortwave radiation. The latter three variables are used to estimate potential evapotranspiration using the method proposed by de Bruin et al. (2016). All the mentioned climate model products are publicly available on the Copernicus Climate Data Store (Copernicus Climate Change Service, 2021). Consistent with Section 2.2 and Figure 2, we use the data on both the baseline and future scenarios temporal framework; up to 2015 for the baseline period and up to 2100 for the future period. The used data have
185 daily temporal resolution, following the daily resolution for the hydrological Wflow_sbm model simulation, and aggregated to monthly resolution for the groundwater MODFLOW model simulation.

To select the model group, we apply criteria that the product should have (a) a spatial resolution of approximately $1^{\circ} \times 1^{\circ}$ considering the size of the study area, (b) a daily temporal resolution for rainfall and temperature following the hydrological model setup, and (c) a projection scenario of historical, RCP4.5, and RCP8.5; applicable to the four mentioned variables.
190 Considering the criteria and other climate projection studies, we use the climate model outputs from the MRI-ESM2-0 model group (Yukimoto et al., 2019) for the precipitation and near-surface air temperature. It has been suggested to perform well in CMIP6 outputs (Oruc, 2022), especially those related to cloud-related processes (Kawai et al., 2019). It has also been indicated to be one of the best-performing models in other studies, proven through multi-metric assessments, including in Southeast Asia region (Iqbal et al., 2021; Baghel et al., 2022), which is very close to our study area. It is not used for the global radiation
195 data, however, as it does not cover the TOA incident shortwave radiation projection for the RCP 8.5. Therefore, for the global radiation data, we use the climate model output from the GFDL-ESM4 model group (Krasting et al., 2018).


2.3.2 Groundwater abstraction scenarios

For the groundwater abstraction projection, we consider three diverging scenarios where the groundwater abstraction (a) increases, (b) stays constant, and (c) decreases in the future. Meanwhile, the groundwater abstraction during the baseline period
200 is set according to estimates from our previous studies (Rusli et al., 2023a), increasing annually from 300 Mm³ per year in 2005 to 495 Mm³ per year in 2020. For all boundary conditions, the groundwater abstraction is distributed horizontally based on land use and vertically based on domestic/industrial water demand classification.


In this study, we propose a new approach to establishing the scenario where the future groundwater abstraction increases (scenario one). Commonly, the projected groundwater abstraction rate increases in proportion to the projected population
205 growth. We indeed apply such a method to estimate the annual volume of the future groundwater abstraction in the study area, using an annual population growth rate of 1.36% (Uni, 2023), shown in Figure 3a. Under this scheme, the annual groundwater abstraction volume in 2030, 2050, and 2100 is projected to be 529, 839, and 1,346 Mm³ per year, respectively. Considering the

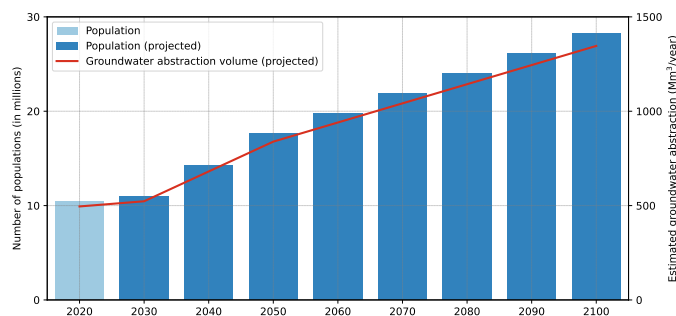

(a) Abstraction scenario 1: increasing abstraction

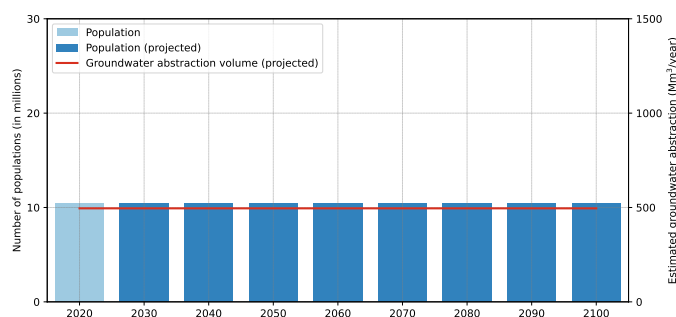

(b) Abstraction scenario 2: constant abstraction

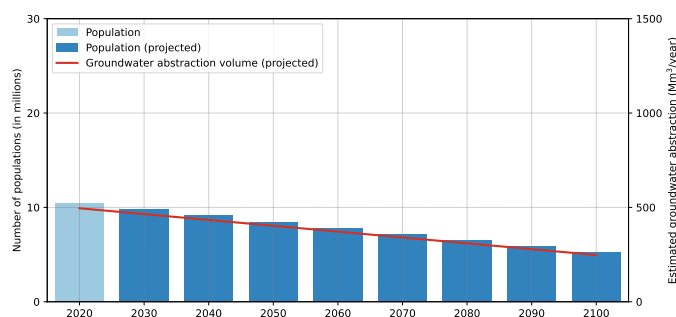

(c) Abstraction scenario 3: decreasing abstraction

Figure 3. The three diverging scenarios of estimated groundwater abstraction volumes (right axis, Mm^3/year) based on the projected number of population (left axis, millions).

currently high population density in the Bandung groundwater basin, it is only logical that a surge in groundwater abstraction volume is accompanied by an enlargement of the abstraction area. In this paper, we expand the groundwater abstraction location by increasing the area of the initial abstraction location proportionally to the volume of abstraction.

The other two groundwater abstraction scenarios are based on Indonesia's capital city relocation plan. In the 'stay constant' scenario (scenario two), we assume that the urban and industrial area that are currently settling will continue to remain where they are now, with linear development (Figure 3b). It is also possible that there would be tangible development, but its impact



Table 1. Datasets used for bias adjustment and statistical downscaling of the climate model output

Variables	Climate model output	'Ground truth' data
Precipitation	MRI-ESM2-0	CHIRPS ¹
Near-surface air temperature	MRI-ESM2-0	ERA5-Land
Surface downwelling shortwave radiation	GFDL-ESM4	ERA5-Land
TOA incident shortwave radiation	GFDL-ESM4	ERA5-Land

¹two CHIRPS products of different resolutions of $0.25^{\circ} \times 0.25^{\circ}$ and $0.05^{\circ} \times 0.05^{\circ}$ are used

will be compensated with technological advancement, for example, increasing efficiency or reducing losses of (groundwater)
215 use and distribution. Therefore, the groundwater abstraction rate is set constant from 2020 to 2100. In the decreasing ground-
water abstraction scenario (scenario three), we assume that the capital city relocation would decrease the population of the
Bandung groundwater basin and water demand gradually in the future (Figure 3c). By 2100, it is assumed that the population
would have halved from 2020, therefore also decreasing the groundwater abstraction rate by 50% to 248 Mm³ per year, linearly
interpolated. In scenarios two and three, the spatial distribution of the groundwater abstraction area remains the same as applied
220 in the baseline period.

2.4 One-way coupled model simulation setup

2.4.1 Bias adjustment and statistical downscaling method of ISIMIP3b

In climate-related research, it is common to apply bias correction to climate simulation data as they generally have different
225 statistical attributes to climate observation data (Lange, 2019). The discrepancies occur due to various factors, such as differ-
ences in spatial resolution and systematic biases. Therefore, bias correction, involving two steps method of bias adjustment
and statistical downscaling, is necessary to bridge and minimize this gap. In this study, we apply the method tailored to the
Inter-Sectoral Impact Model Intercomparison Project phase 3b (ISIMIP3b) for our bias correction (Lange, 2019, 2021).

In ISIMIP3b, the required data to be specified as the benchmark are the (a) historical 'ground truth' and (b) high-resolution
data for the bias adjustment and statistical downscaling, respectively. In this study, we use CHIRPS estimates (Funk et al.,
230 2015), with a spatial resolution of $0.25^{\circ} \times 0.25^{\circ}$, as the historical 'ground truth' rainfall estimates. The MRI-ESM2-0 model
output is available in lower spatial resolution than the CHIRPS estimates, therefore they first are re-gridded and resampled
to match the CHIRPS' spatial resolution, before the bias adjustment was applied. As CHIRPS is available at an even higher
resolution of $0.05^{\circ} \times 0.05^{\circ}$, we use it further as the benchmark for the statistical downscaling. The historical 'ground truth'
estimates for the other variables (near-surface air temperature, surface downwelling shortwave radiation, and TOA incident
235 shortwave radiation) are based on ERA5-Land hourly data (Copernicus Climate Change Service, 2019). All the datasets used
for the application of ISIMIP3b in this paper are listed in Table 1.



2.4.2 Wflow_sbm model setup

The Wflow_sbm model (van Verseveld et al., 2022) is used to perform the hydrological simulation in this study. With model parameters that mostly represent physical characteristics (Imhoff et al., 2020; Eilander et al., 2020), using Wflow_sbm makes it easier to intuitively interpret and correlate the parameter values with physical catchment properties. In the last decade, Wflow_sbm has been widely used in hydrological modeling studies (López et al., 2016; Hassaballah et al., 2017; Gebremicael et al., 2019), including those in tropical regions in South East Asia (Wannasin et al., 2021; Rusli et al., 2021), delivering good performance, shown by KGE, NSE, and RMSE metric.

We use the same Wflow_sbm model as in our previous studies (Rusli et al., 2023a, b). Starting with high-resolution model parameterization based upon point-scale (pedo)transfer functions (PTFs) (Imhoff et al., 2020), it is followed by downscaling designated to the model resolution of $0.008^{\circ} \times 0.008^{\circ}$. We use (a) SoilGrids database (Hengl et al., 2017) for soil-related parameters estimation, (b) Monthly Leaf Area Index climatology for daily interception calculation (Gash, 1979), (c) MERIT-DEM dataset (Yamazaki et al., 2017) for river network delineation (Eilander et al., 2020), and (d) vito land use map (Buchhorn et al., 2020) for deriving land-use related parameters. The *MaxLeakage* parameter is calibrated by optimizing the KGE value between the observed and the simulated discharge (Rusli et al., 2023a).

Precipitation and potential evapotranspiration data are the primary forcing data to run the Wflow_sbm. Following our temporal setting, we prepare and split the forcing data into the baseline and future projection periods. For the baseline period, CHIRPS rainfall estimates (Funk et al., 2015) and potential evapotranspiration, derived from ERA5 temperature and global radiation data using the method from de Bruin et al. (2016), are used. Using the Extended Triple Collocation method (McColl et al., 2014), CHIRPS products were found to perform well in estimating rainfall in the study area in our previous study (Rusli et al., 2021). For the future period, the forcing data are obtained from the bias-corrected climate projection: (1) the bias-corrected rainfall projections from the CMIP6 model output of the MRI-ESM2-0 model group and (2) the potential evapotranspiration derived from the bias-corrected near-surface air temperature projections from the CMIP6 model output of the MRI-ESM2-0 model group and the bias-corrected surface downwelling shortwave radiation and TOA incident shortwave radiation projections from the CMIP6 model output of the GFDL-ESM4 model group, based on two RCP scenarios (RCP4.5 and RCP8.5).

2.4.3 Groundwater flow model setup

The MODFLOW6 model, which solves the Darcy three-dimensional groundwater flow equation using the control-volume finite-difference (CVFD) method, is used to perform the groundwater flow simulation in this study. The model is built using the MODFLOW python package (Bakker et al., 2016).

The MODFLOW model parameterization in this study is based on the combination of literature reviews, fieldwork, and laboratory experiments. The model's subsurface vertical discretization is based upon collated borehole data (Rahiem, 2020), interpreted as a 3-layer model: the upper aquifer as the top layer, the thin interspersing aquitard as the middle layer, and the lower aquifer as the bottom layer. The hydraulic conductivities of the soil were measured by a combination of slug tests in



270 the field, laboratory tests, and private company reports. They were then recalibrated by minimizing the difference between
the simulated and the observed groundwater table (Rusli et al., 2023a). The K_h of the upper and the lower aquifer are found
in relatively similar ranges between 0.15 and 0.58 meter per day, as they are formed by a solitary geological formation. The
 K_v ranges between 3.0×10^{-4} and 6.0×10^{-4} meter per day. The aquitard is ten times less permeable than the aquifer. The
storage parameters are obtained from private company pumping test reports, and the river-related parameters were previously
275 calibrated for steady-state conditions. The initial condition is defined by our previous simulation results (Rusli et al., 2023a).
The well package, related to groundwater abstraction, is set according to the scenario described in Section 2.3.2. The full
description of the groundwater flow model parameterization, including the model parameter recalibration, is also reported in
our previous studies (Rusli et al., 2023a, b).

Similar to the hydrological simulation, we split the forcing data and the simulation period into two windows; the baseline
280 period between 2005 and 2015, and the future projection period on short-term (up to 2030), mid-term (up to 2050), and long-
term (up to 2100) future. Both periods are forced by the groundwater recharge simulated by the Wflow_sbm model, resulting
in three different inputs as the drivers of the groundwater flow model: the baseline groundwater recharge, the future RCP4.5
groundwater recharge, and the future RCP8.5 groundwater recharge. With the combinations of different inputs and boundary
conditions, six different outputs are produced from the groundwater flow simulation.

285 3 Results

3.1 Climate projection

The results for the climate projection are visualized by comparing the discussed climate variables - rainfall, temperature,
solar radiation, or potential evapotranspiration - during the baseline period and the future period. Quantitatively, the variables
are compared using their statistical attributes: minimum and maximum values, mean, and lower, middle, and upper quartile.
290 Visually, they are also represented in boxplots for easier interpretation, categorized by monthly estimates.

3.1.1 Bias corrected rainfall projection

The statistical attributes of the rainfall estimates pre- and post- bias correction, as well as ones of the future scenarios, are
summarized in Table 2. In the MRI-ESM2-0 model group 'historical' output pre-bias correction, the rainfall is, surprisingly,
projected to decrease in general compared to the CHIRPS estimates (column 1) in both RCP4.5 (column 4) and RCP8.5
295 (column 6). These values are, however, prior to bias correction. The same trend of climate model underestimation in almost
every statistical distribution is also found during the baseline period (column 1 and column 2), therefore bias correction is
essential to be implemented. By applying the ISIMIP3b bias adjustment, we come up with baseline rainfall estimates that
represent a better statistical fit to the CHIRPS estimates (column 3). Consequently, we apply the bias correction to the future
scenario of RCP4.5 (columns 5) and RCP8.5 (columns 7).



Table 2. Application of ISIMIP3b bias correction to the rainfall estimates projection from MRI-ESM2-0 model group (in millimeter)

	'Ground truth'	Historical data*		RCP4.5		RCP8.5	
	CHIRPS	Pre-**	Post-**	Pre-**	Post-**	Pre-**	Post-**
	(1)	(2)	(3)	(4)	(5)	(6)	(7)
Min	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Lower quartile	0.00	0.08	0.00	0.06	0.00	0.06	0.00
Median	4.67	0.97	4.17	2.81	5.45	2.39	5.18
Mean	7.61	5.74	7.62	6.87	8.70	6.64	8.52
Upper quartile	12.50	9.19	12.53	11.41	14.60	10.92	14.26
Max	111.66	91.45	111.66	88.13	131.67	121.70	123.90

*historical data of the climate projection products have the temporal coverage of the baseline period (1981 - 2015), and **the pre- and post- columns represent the values pre- and post- bias-adjustment in the future periods (2015 - 2100).

300 To observe the seasonal impact on the projected climate scenario, we plot the monthly rainfall of the baseline period of
 CHIRPS and the future period of the bias-corrected RCP4.5 and RCP8.5 projections in Figure 4. The boxplots represent the
 median and interquartile range of the interannual estimates, while the whiskers show the estimates' range. During the rainy
 season between October and March, we can see that the projected rainfall has an increasing trend, with higher monthly rainfall
 especially from November to January. A contrasting trend is shown in the dry season between April and September, with lower
 305 monthly rainfall especially from July to September. In short, the wet period is projected to become wetter, and the dry period
 is projected to become drier. We can also observe only small differences in the statistical quartiles between the two RCPs, with
 similar widths, mostly, between the orange and red boxes. The width of the minimum and maximum values, however, is more
 apparent. The magnitudes of the hydrological extremes are projected to be more pronounced in the future, therefore floods and
 droughts are predicted to be more severe than they currently are.

310 3.1.2 Bias-corrected potential evapotranspiration projection

We apply the bias-correction method of ISIMIP3b to the near-surface air temperature, surface downwelling shortwave radi-
 ation, and top of atmosphere (TOA) incident shortwave radiation, in a similar fashion as one to the rainfall estimates. Figure 5a
 and 5b show the monthly near-surface air temperature and radiation projections, respectively. The monthly average temper-
 ature sharply increases from the baseline period of the aggregated ERA5-Land hourly estimates to the future period of the
 315 bias corrected CMIP6 projections in all statistical attributes; quartiles, average, interquartile range, and extreme values. The
 temperature, on the long-term average, is projected to be warmer by 2.21°C and 2.72°C in RCP4.5 and RCP8.5 scenarios,
 respectively. The projection on global radiation is based on the GFDL-ESM4 model group, with a tendency of slightly less
 surface downwelling shortwave radiation in the future. The TOA incident shortwave radiation remains almost constant through-
 out. On the radiation variable, the two different climatic scenarios of RCP4.5 and RCP8.5 do not seem to differ a lot in their
 320 statistical values.


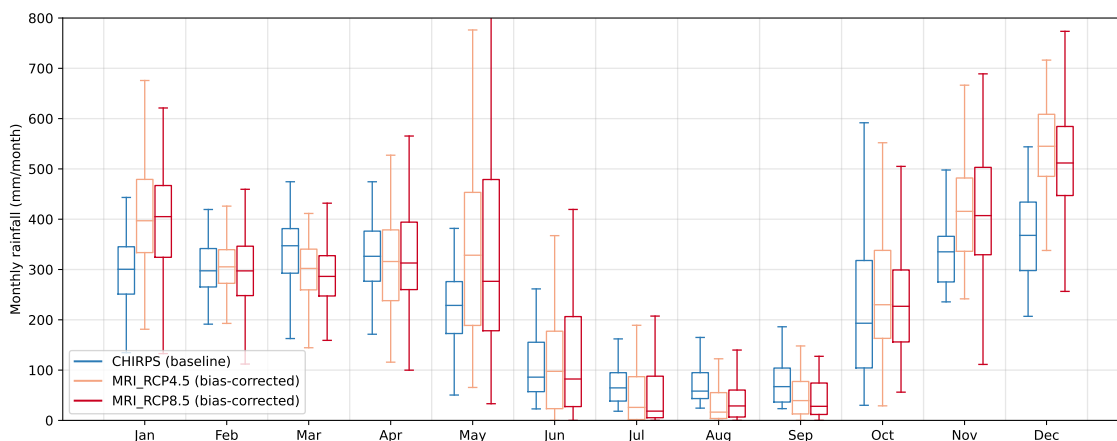


Figure 4. The comparison between the rainfall monthly statistics in the baseline period and the two future climate scenarios (RCP4.5 and RCP8.5). The future rainfall estimates are bias-corrected using the ISIMIP3b bias correction method. The box and whisker plots represent the median, interquartile range, and range of the interannual estimates.


We use the three variables above to calculate potential evapotranspiration using the method of de Bruin et al. (2016), with the result shown in Figure 5c. The range of the estimates is visually inconsistent between the baseline and the future period, as the future period is calculated in monthly time steps according to the temporal resolution of the radiation projections. Therefore, the variation between the statistical distribution is lower compared to ones of the baseline period, where it is available
325 in the daily time step. The difference in the magnitude is considered low, as the highest difference in average daily potential evapotranspiration is less than 0.5 mm per day. Without looking at the seasonal variance, the annual daily potential evapotranspiration averages of the baseline period, the future RCP4.5 scenario, and the future RCP8.5 scenario are 3.24, 3.26, and 3.23 mm per day, respectively, which are relative to insignificant differences.

3.2 Groundwater recharge projection


330 The projected rainfall and potential evapotranspiration are used to force the Wflow_sbm model, resulting in a projected groundwater recharge. A number of conceptual correlations are easily derivable in the projection of groundwater recharge: the intensification of rainfall during the wet season is projected to amplify the groundwater recharge, the drier period during the dry season is projected to temper the groundwater recharge, the rising temperature is expected to further diminish the available water to infiltrate to the soil, etc. As the difference in groundwater recharge in mm per day unit is relatively small, we accumu-
335 late the daily recharge to monthly recharge. The seasonal pattern of the monthly groundwater recharge is shown in Figure 6a. The values intrinsically represent the number of days in each month, therefore the groundwater recharge in the non-31-day months is lower than those in the 31-day months. The results are confirmed to be consistent in all the short-term, mid-term, and long-term future assessments of groundwater recharge.

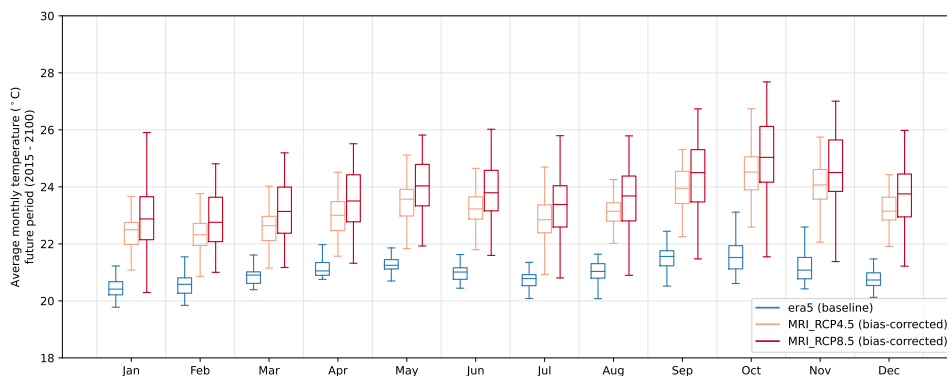

(a) Comparison between the temperature in the baseline period and the two future climate scenarios (RCP4.5 and RCP8.5).

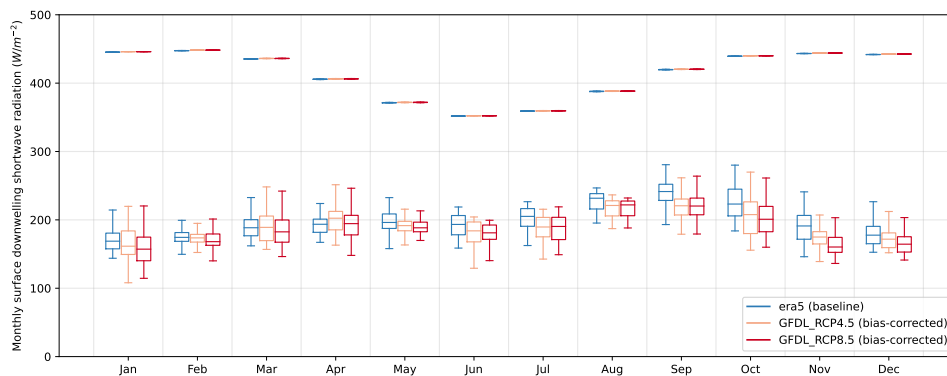

(b) Comparison between the radiation in the baseline period and the two future climate scenarios (RCP4.5 and RCP8.5).

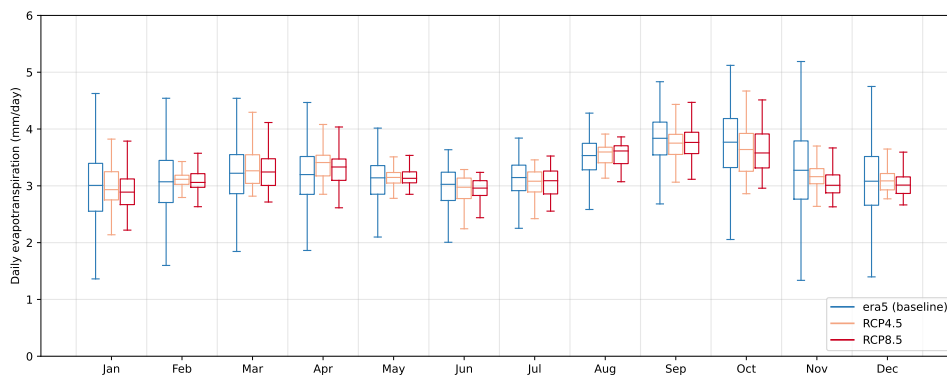

(c) Comparison between the potential evapotranspiration in the baseline period and the two future climate scenarios (RCP4.5 and RCP8.5).

Figure 5. The results on bias-corrected projections on three variables: (a) temperature, (b) radiation, and (c) potential evapotranspiration. The box and whisker plots represent the median, interquartile range, and range of the interannual estimates.




It can be seen that after the start of the wet season when the soil moisture starts to be saturated (December) to the beginning
340 of the dry season when the soil's maximum capacity for storing water is still attained (May), the groundwater recharge could
no longer increase despite the increasing rainfall projection during the wet season. On the other hand, after the start of the dry
season when the soil moisture starts to dry up (June) to the beginning of the wet season when the void spaces in the subsurface
are still available for water to fill into (November), the magnitude of the groundwater recharge is relatively more subject to
change. Having said that, during the latter period, there is only a small difference in the median and extreme values of the
345 groundwater recharge, although the quartile values vary. Based on the median values, the largest difference in groundwater
recharge is projected to occur in either September (for RCP4.5) or October (for RCP8.5), in an order of magnitude of a
minuscule increase of 1.27% and 1.79%. In all other months except June, the groundwater recharge is projected to either,
despite being a very small change, increase, or remain relatively constant. Annually, the average groundwater recharge during
the baseline period of 315.1 mm per year is projected to insignificantly increase to 316.1 mm per year for the RCP4.5 and
350 316.4 mm per year for the RCP8.5 scenario.

The results indicate the dominant role of the already-saturated soil in controlling the groundwater recharge processes in the
Bandung groundwater basin. When the soil maximum capacity is reached, more rainfall leads to no change in the recharge
processes. Instead, it leads to more water loss to evapotranspiration should the PET allows. It would also lead to an increase
in surface runoff discharge. On average, the absolute relative change in the rainfall, temperature, and groundwater recharge
355 estimates under the RCP4.5 scenario, respectively, are 31.03%, 10.71%, and 0.36%. The similar changes for the RCP8.5
scenario are 28.36%, 13.10%, and 0.44%. Figure 6b displays the comparison of the magnitude of change in the rainfall and
potential evapotranspiration on the left axis as well as the groundwater recharge on the right axis with a ten times larger
scale, all in monthly average values. The average value is chosen over the median value, specifically for this figure, to take
into account the projected extreme values. From the results, the change in the groundwater recharge is found to be far less
360 responsive compared to its driver, especially the rainfall.


3.3 Groundwater level projection

The combination of two climatic and three groundwater abstraction scenarios results in six outcomes of projected groundwater
level. For each outcome, there are three temporal checkpoints assigned as the milestone of the assessment: the short-term, the
mid-term, and the long-term future in 2030, 2050, and 2100, respectively. There are also two layers of aquifers, the unconfined
365 and the confined aquifers, to be assessed. As there are a lot of numbers to unpack, we discuss the results as per the abstraction
scenario.

Generally, we focus on the maximum drawdown values of the groundwater table/piezometric head, as the change in the
groundwater head is found to be highly localized, both from the simulation and observation perspective. Furthermore, the base-
line groundwater abstraction area is estimated 'only' at 27.3% of the total basin area for the domestic groundwater abstraction,
370 and even at 4.7% for the more intensive industrial abstraction. Taking the average or median value for the whole groundwater
basin, therefore, would not be suitable to represent the severity of the groundwater abstraction impact, considering the high
number of cells involved in the numerical simulation.

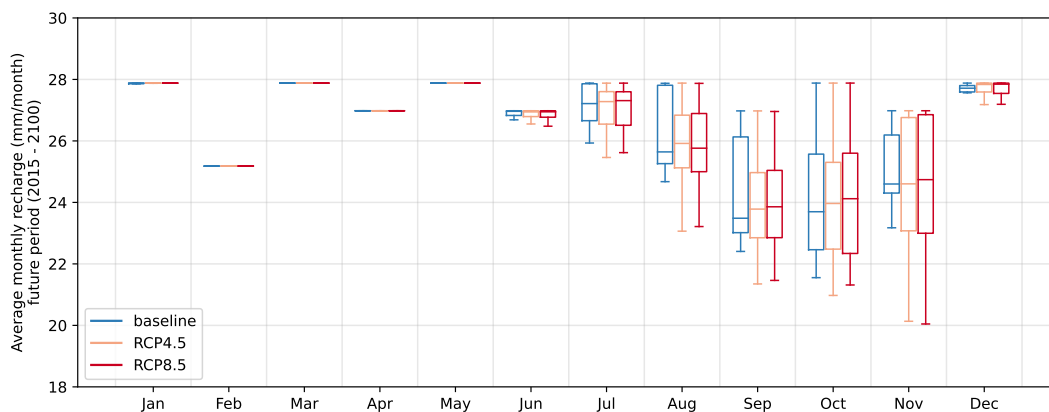

(a) Comparison between the simulated groundwater recharge in the baseline period and in the two future climate scenarios.

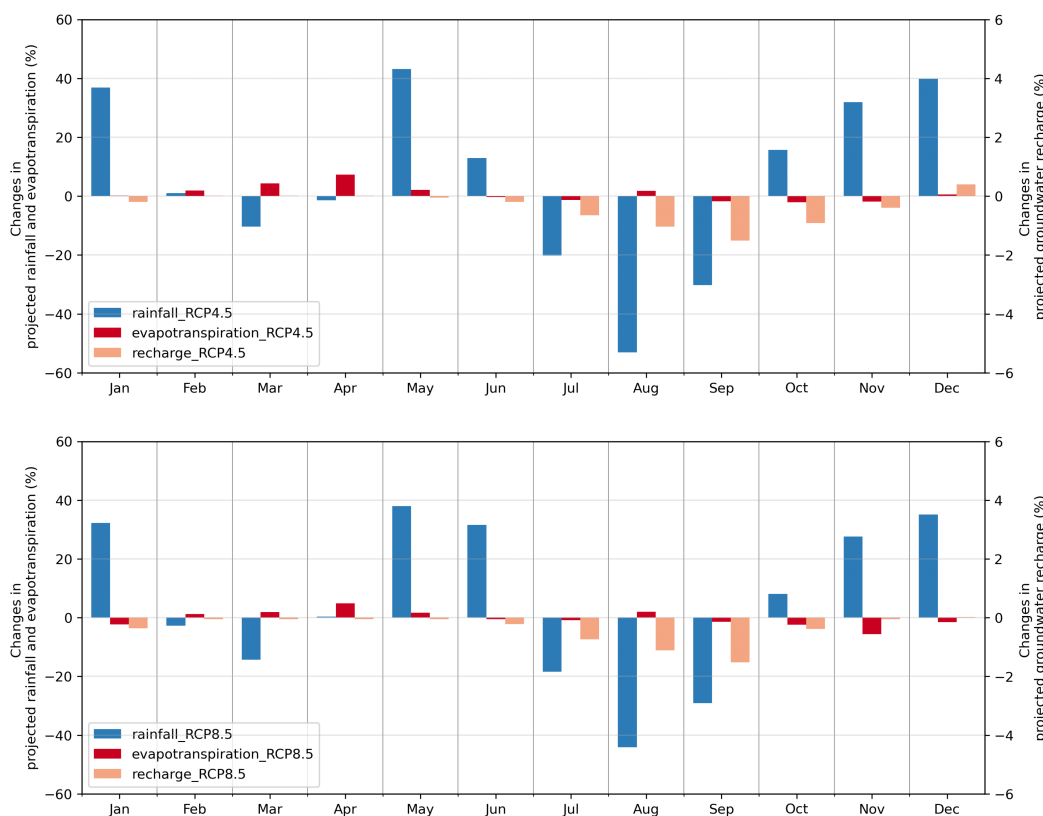

(b) Comparison between the projected average monthly rainfall, potential evapotranspiration, and groundwater recharge.

Figure 6. The results of (a) groundwater recharge projection and (b) its value relative to its driver of rainfall and potential evapotranspiration. The values are averaged over the future period, annually, up to 2100.



Under the increasing groundwater abstraction scenario, the groundwater level is projected to continue decreasing. The numbers are worse for the confined aquifer, as the groundwater abstraction is spatially more concentrated with higher abstraction rates compared to one in the unconfined layer. Under the RCP4.5 scenario, the maximum piezometric head drawdown for the confined aquifer is projected to be at 10.04 m in 2030, 19.98 m in 2050, and 48.79 m in 2100. Under the RCP8.5 scenario, the numbers are also concerning for the unconfined aquifers, as the groundwater table is projected to dwindle to up to 3.38 m and 3.40 m in the long run under the RCP4.5 and RCP8.5 scenarios, respectively. Based on the drawdown area, the trend shows that the impacted area is enlarged as the groundwater abstraction area expands. In the unconfined aquifer, respectively 74.6%, 80.5%, and 87.2% of the groundwater basin area is projected to experience groundwater table drawdown in 2030, 2050, and 2100 under the RCP4.5 scenario, obviously with varying magnitude. For the confined aquifers, the numbers representing the depression area are 70.5%, 72.9%, and 75.4%. Under the RCP8.5 scenario, these numbers are pretty much consistent, with a maximum of less than 1% difference from the RCP4.5 results.

The second abstraction scenario portrays the projection of the current situation in the study area. Should the anthropogenic pressure remain the same, the groundwater level, as expected, is projected to remain dwindling. The maximum confined piezometric head drawdown for 2030, 2050, and 2100 under the RCP4.5 scenario are 7.14, 15.25, and 29.51 m. The numbers for the RCP8.5 scenario are very similar: 7.14, 15.28, and 29.51 m. Similar to the increasing abstraction scenario, the unconfined aquifer groundwater table drawdown is noticeably lower compared to that of the confined aquifer, with a maximum drawdown of 2.58 and 2.60 m in 2100 for RCP4.5 and RCP8.5, respectively. The drawdown area increases, with up to 84.7% and 75.0% of the groundwater basin area experiencing long-term dwindling groundwater heads in the unconfined and confined aquifer. Despite the lesser extent of the impacted area relative to the previous scenario, the area of decreasing groundwater head remains relatively dominant in comparison to the basin's total area. To visualize the time-series increasing impact of the groundwater head drawdown, Figure 7 shows the propagation of the groundwater head decline in the Bandung groundwater basin under the RCP4.5 climatic scenario and the constant groundwater abstraction anthropogenic scenario.

The third abstraction scenario projects the groundwater abstraction to decrease, influenced by the relocation of Indonesia's capital city. Under this scenario, the groundwater is projected to be partially replenished between 2050 and 2100. This is indicated by the projected piezometric head drawdown that reaches 12.61 m in 2050, but is calculated at 11.75 m in 2100. Granted that 11.75 m remains a net negative of groundwater head in the future, however, subsurface flows (and replenishment) are known to have a longer time scale as compared to surface flows to reach an equilibrium. The fact that the piezometric head drawdown decreases signals an improving situation under scenario three. Having said that, the groundwater table in the unconfined aquifer is projected to decrease up to 2.58 and 2.93 m under the RCP4.5 and RCP8.5 scenarios, respectively. However, its drawdown area is projected to be smaller, going from 80.8% and 83.6% in 2030 for RCP4.5 and RCP8.5 respectively to 75.5% and 76.7% in 2100. The response of groundwater replenishment is unique between the aquifer layers; the unconfined aquifer primarily reduces the drawdown area, while the confined aquifer relaxes the magnitude of the piezometric head drawdown. Nevertheless, it presents an opportunity for groundwater replenishment in the future given the right policy and management in the study area.

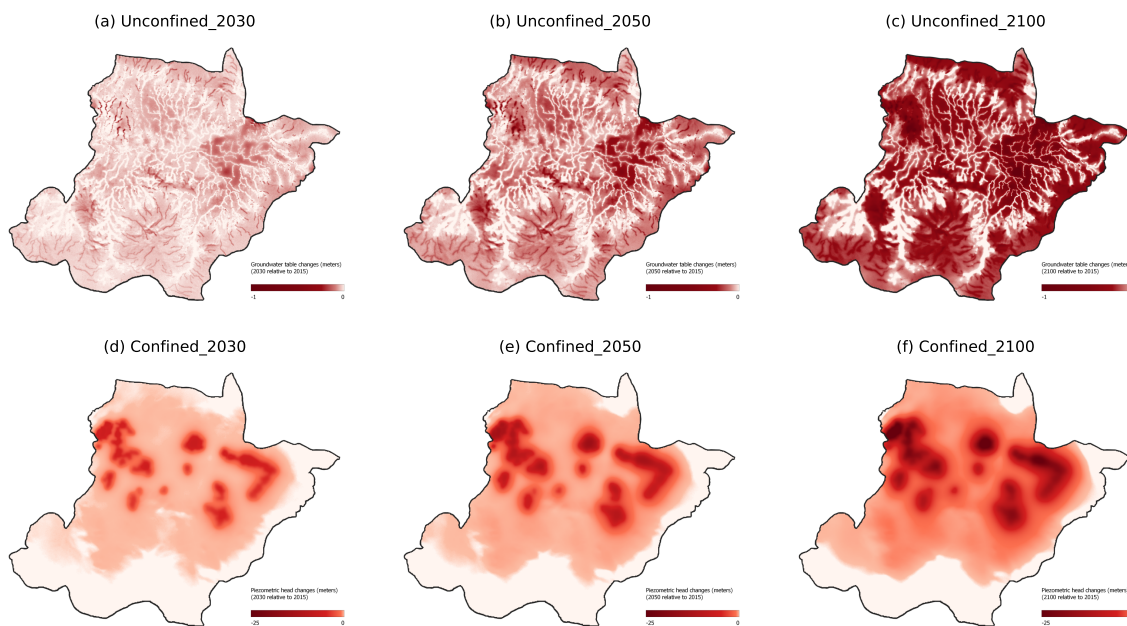


Figure 7. The spatial distribution of the projected groundwater head change under the RCP4.5 and the constant groundwater abstraction scenario. Figures (a), (b), and (c) represent the unconfined aquifers in the short-term, mid-term, and long-term future, respectively. Meanwhile, Figures (d), (e), and (f) represent the confined aquifers in the short-term, mid-term, and long-term future, respectively.

Table 3 summarizes the maximum groundwater head drawdown in both climatic and anthropogenic scenarios, checkpoints (short-term, mid-term, and long-term future), and layers (unconfined and confined aquifers) in focus. The table shows that the anthropogenic factor holds a more dominant influence on the status of the groundwater table in the future relative to the climatic factor. This is indicated as different RCPs in an abstraction scenario offer smaller changes in values as compared to different abstraction scenarios under a climatic scenario. We can also see the increase of the impact over time and the more severe impact on the confined groundwater head compared to the unconfined groundwater table.

3.4 Groundwater storage projection

As stated above and shown in Figure 7, the drawdown due to the groundwater abstraction is highly congregated. In the unconfined layer, the drawdown area is distributed under the abstraction area, while the area close to water bodies is less impacted. This occurs due to surface water and groundwater interaction, where the groundwater table is also regulated by the surface water elevation aside from the subsurface flow. In the confined aquifer, the highly elevated area on the surface is much less impacted compared to the one in the overlying aquifer, and the drawdown area is, in general, directly located under the abstraction area. Using only the groundwater head, although useful, could not capture the whole picture of the basin's groundwater regime projection. Therefore, we also assess the groundwater projections from the perspective of its integrated cumulative storage changes over time.



Table 3. Summary of projected maximum groundwater head drawdown under multiple climatic and anthropogenic scenarios (in meter)

		Increasing abstraction		Constant abstraction		Decreasing abstraction	
		RCP4.5	RCP8.5	RCP4.5	RCP8.5	RCP4.5	RCP8.5
		(1)	(2)	(3)	(4)	(5)	(6)
2030	Unconfined	0.98	0.97	0.89	0.89	0.89	0.97
	Confined	10.04	10.04	7.14	7.14	7.11	7.11
2050	Unconfined	1.69	1.69	1.49	1.49	1.49	1.69
	Confined	19.98	19.98	15.25	15.28	12.60	12.61
2100	Unconfined	3.38	3.40	2.58	2.60	2.58	2.93
	Confined	48.79	48.79	29.51	29.51	11.55	11.75

Similar to the projected groundwater level assessment, six outcomes are produced from the combination of two climatic and three anthropogenic scenarios. Figure 8 shows the trajectory of each outcome in terms of its accumulated groundwater storage changes relative to the one in 2015 as the benchmark. Consistent with the aforementioned results, the difference between climatic scenarios is very thin, as lines with the same color are almost intersecting. However, the impact of the diverging abstraction scenario is visually apparent and even results in diverging groundwater storage change. Using the gradient of the storage depletion accumulation for scenario two as the benchmark, it gets up to 3.43 times steeper for scenario one and up to 0.40 times milder for scenario three during the most extreme year, both propagating in curve-shaped lines. The lines' shapes deliver important messages, as they indicate the uniquely diverging results of deteriorating, sustained, and improving groundwater storage depletion under the first scenario, second, and third scenarios, respectively. It is also notable that despite the indication of confined groundwater replenishment from the groundwater level perspective, assessment of the groundwater storage change suggests otherwise, further discussed in Section 4.2.

Under the constant abstraction scenario, the Bandung groundwater storage is projected to lose almost $2 \times 10^{10} \text{ m}^3$ in the upcoming 85 years. While the number might seem exaggerated, it is actually equivalent to an average of 0.54 mm per day of storage depletion. The rate of storage depletion is relatively constant throughout the short-term, mid-term, and long-term future in this scenario, as per the abstraction rate. Under the increasing abstraction scenario, the long-term storage depletion is projected at 1.17 mm per day on average. This is a result of an escalating depletion, as the storage loss is averaged at 0.53 mm per day between 2015 and 2030, 0.86 mm per day between 2030 and 2050, and 1.48 mm per day between 2050 and 2100. Under the decreasing abstraction scenario, the long-term storage depletion is projected at 0.40 mm per day on average. This is the result of a withering depletion, as the storage loss is averaged at 0.54 mm per day between 2015 and 2030, 0.49 mm per day between 2030 and 2050, and 0.33 mm per day between 2050 and 2100.

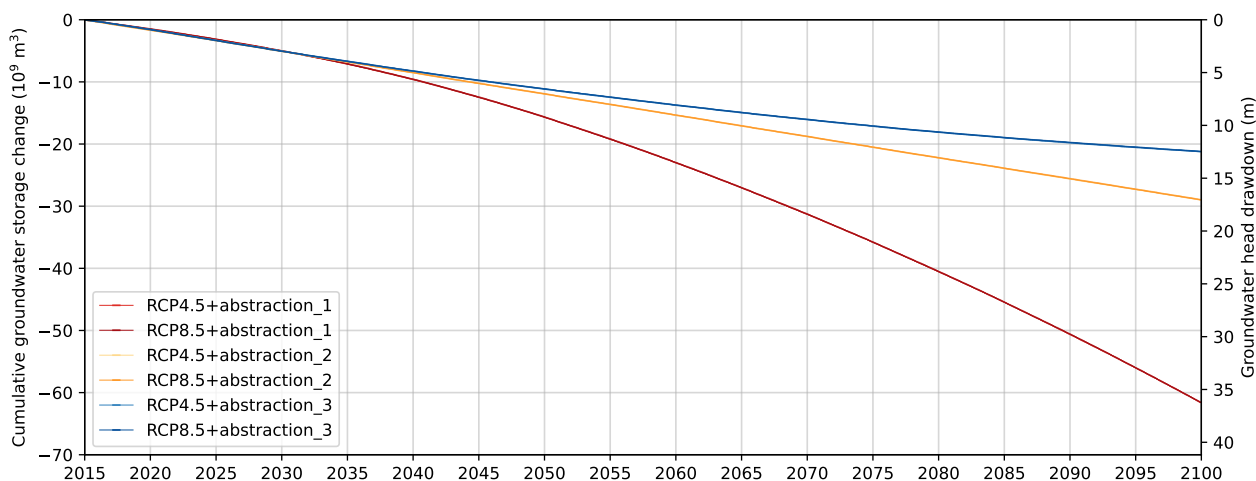


Figure 8. The cumulative projected groundwater storage changes from 2015 to 2100 for all climatic and anthropogenic scenarios.

4 Discussion

4.1 Projections uncertainty

In climate projection-related studies, uncertainties are unavoidable as they are propagated from multiple sources: the natural
445 climate variability, the climate model, and the emission scenario (Latif, 2011). The natural climate variability is highly uncertain
as Buser et al. (2010) suggested the extrapolative nature of climate variables which involved different biases in the scenario
and the control period. Each model also has different responses to climatology and perturbation components uncertainties, for
example, as stated by Adachi et al. (2019). To tackle the wide range of uncertainty bounds, many studies propose using an
ensemble of climate projection products (Hawkins et al., 2016; Rajczak and Schär, 2017). Meanwhile, other studies promote
450 the efficiency of bias correction to reduce the uncertainties of climate projection products as such a method takes into account
the 'ground-truth' estimates of the corresponding climate variables (Lange, 2019; Wu et al., 2022).

The climate projections resulting from different model groups have varying estimates and uncertainties. However, we be-
lieve that these uncertainties have been addressed in our study. First, the focus of the hydrological simulation is groundwater
recharge, which is not solely influenced by climate variables. Indeed, climate variables play an important role, as they provide
455 the input to the basin that further generates recharge. However, the control on effective groundwater recharge is also regulated
by catchment features, such as soil moisture capacity, surface water cycle, and subsurface properties. With the other simu-
lation components' relatively known values, in this case, the Wflow_sbm model parameterization, the groundwater recharge
estimates, therefore, are not singlehandedly impacted by the uncertainties of the climate projections. Second, the primary goal
of the study is to project the groundwater availability. With a relatively lower range of projected change in future groundwater
460 recharge, previous studies suggested the anthropogenic factor to play a larger role and involve a wider range of future uncertain-
ties compared to the climatic factor (Mustafa et al., 2019; Aslam et al., 2022). In our scenario, the three abstraction scenarios



that span from increasing to decreasing projection are expected to be able to outweigh the uncertainty bounds propagated from the climatic scenario. All the results from our projection in this study support the claim: in every scenario, the change in groundwater abstraction always produces significantly higher influences on the groundwater table and storage compared to the climatic scenario. Third, we also apply a bias correction method to the climate projection products, which has been proven in previous studies to effectively reduce climate projection uncertainties (Rahimi et al., 2021; Wu et al., 2022). Table 2 columns (1), (2), and (3) show a remarkable improvement in the bias-corrected climate model output. By bias-correcting the projected climate variables and taking into account the historical high-resolution 'ground truth' data as the benchmark, we believe the uncertainties of the climate projection have been significantly reduced.

470 **4.2 Impact assessment on future groundwater level projections**

As shown in the simulation workflow (Figure 2), future groundwater status is projected by altering climate forcing input and groundwater abstraction as the boundary condition. The former imparts its contribution to groundwater recharge estimates. However, as shown in Figure 6b, there are significant differences in the impact of climate variables' changes on the surface and the subsurface component of the water cycle. The rainfall median, not considering the seasonal fluctuation, is projected to change (either increase or decrease) up to 31.03% and 28.36% for RCP4.5 and RCP8.5 respectively. On the other hand, the projected change in the groundwater recharge is less than 1%, indicating a slower response of subsurface components to the climate change projection.

This result is limited, however, by the nature of the model one-way coupling. In our model setup, groundwater recharge is fully controlled by the surface processes and the pseudo-water table. Physically, groundwater storage depletion due to groundwater abstraction might dwindle the water table. By that process, there would be more space for water to infiltrate, indicating two-way feedback between groundwater abstraction and groundwater recharge. A one-way coupled model, unfortunately, is not capable of incorporating such two-way processes into its simulation. This further proves that groundwater abstraction and basin properties possess equal, if not more, importance compared to the climate forcing in groundwater recharge projection. This looks site-specific, however, depending on the basin features, especially the land use/land cover type, the soil maximum capacity, and the subsurface properties. In regions with higher margins between the groundwater recharge and soil capacity, changes in climatic factors (i.e. effective precipitation) would have a higher influence on the changes in groundwater recharge. This also highlights the importance of basin-scale information in climate projection studies (Bhave et al., 2013; Jackson et al., 2015; Marcos-Garcia et al., 2023), which have been conducted largely in global scale studies.

The uncertainties of future anthropogenic factors, considering their large influence, should be the primary focus in future groundwater management. While the climatic factor is relatively intractable, groundwater abstraction activities, in terms of rates, volumes, and spatial distribution, are relatively manageable through regional/local groundwater policies, not to mention its more influential impact on the groundwater regime. A previous study suggests that groundwater abstraction even holds a higher influence on river baseflow compared to changes in climate (Taie Semiromi and Koch, 2020). Improving the understanding of subsurface response and bridging the key gap between science and policy on the matter of groundwater abstraction should be the main focus and responsibility of all involved stakeholders.



The simulation results also reveal the importance of multi-perspective assessment in groundwater regimes. On one side, Table 3 implies that the groundwater situation in the confined aquifer is improving under scenario three of groundwater abstraction, where the maximum piezometric head drawdown in 2100 is lower than one from 2050. On the other side, Figure 8 shows that the groundwater storage is still depleting, shown by the negative gradient of all the lines, including ones from the abstraction scenario three. Such discrepancies occur as the two assessment variables, the groundwater head and the groundwater storage, represent two different dimensions of the groundwater status. The groundwater head represents a point, or a single grid, value that constitutes local features, while the groundwater storage evaluates the basin-integrated response. Referring to only one assessment variable could lead to a misunderstanding of the process of the groundwater flow system. We discuss the interpretation of the two conflicting numbers in the following section.

4.3 Opportunities for groundwater replenishment

As shown in Figure 8, the different gradients represent diverging directions of the groundwater storage over time. While all the results accumulate negative changes, the rate at which the groundwater storage is depleting differs among scenarios. With a decreasing groundwater abstraction scenario in the future, the depletion rate is projected to decline, as expected. Admittedly, groundwater replenishment might take a comparably long time to reach a 'new equilibrium', considering the subsurface low flow velocity. The current declining, but slower, groundwater storage depletion, therefore, could be interpreted in two ways, either (1) the groundwater storage is indeed still in a deterioration trend, or (2) the groundwater storage is actually being replenished, but has not yet reached the 'new equilibrium' state as the subsurface time scale is longer than the surface's. The latter hypothesis is supported by the values in Table 3, which at first glance might seem inconsistent with the results in Figure 8. By any means, the results in scenario three, which is highly possible due to the capital city relocation plan, suggest an opportunity for future groundwater replenishment, although it takes some time to yield a positive turning point. Consistent future groundwater head monitoring in the study area could provide crucial insight, which will assist in deriving adaptation policies in response to the capital city relocation.

We also notice the different responses of groundwater 'replenishment', which is contrasting between the aquifer layers. In the unconfined aquifer, the primary response of the groundwater improvement is to reduce the impacted drawdown area. While the groundwater table is still dwindling in all future checkpoints, there are smaller (simulated) drawdown areas in 2100, even compared to ones in 2030. In contrast, the confined aquifer relaxes the magnitude of the piezometric head drawdown while maintaining the drawdown area. This, presumably, is directly related to the spatial distribution of groundwater abstraction. The groundwater abstraction applied in the unconfined aquifer is more widespread with lower rates of abstraction. Therefore, the drawdown area is highly dependent on the spatial distribution. In the opposite to the unconfined aquifer, the groundwater abstraction applied in the confined aquifer is more concentrated with intense rates of abstraction. Decreasing the rate, consequently, delivers noticeable influences on the stressed piezometric head. This reveals an important opportunity for future groundwater policies: the governance of groundwater abstraction authorization should include not only the abstraction rate limitation but also the consideration of future and integrated geospatial planning of the study area.



5 Conclusions

530 In this study, we develop groundwater status projection under multiple climatic and diverging anthropogenic scenarios. We simulate the groundwater recharge projection using the hydrological model Wflow_sbm. The climate projection forcing is taken from the CMIP6 MRI-ESM2-0 model group, including the projected rainfall as well as the projected temperature and radiation data to estimate potential evapotranspiration. We force the Wflow_sbm model with two RCP scenarios: RCP4.5 and RCP8.5. Further, using the groundwater recharge projection as the groundwater flow driver, we simulate the subsurface
535 flow under groundwater abstraction as the boundary condition. We develop three diverging groundwater abstraction scenarios; increasing groundwater abstraction as the most common approach, constant abstraction as the benchmark, and decreasing abstraction as a possibility. We take the Bandung groundwater basin in Indonesia as our test case, located nearby Jakarta, the current capital city of Indonesia. The Bandung groundwater basin has a wide range of uncertainties in terms of future groundwater abstraction, in response to the Indonesia capital city relocation plan, therefore nicely covering the three developed
540 anthropogenic scenarios.

We applied the bias correction method of ISIMIP3b to the CMIP6 climate projection data before forcing it to the Wflow_sbm model. The bias correction reduces the uncertainty of the climate variables' projection, as the bias-corrected historical data show consistent statistical distributions to the 'ground-truth' data. Future rainfall and temperature median are projected to change by 31.03% and 10.71% under RCP4.5, and 28.36% and 13.10% under RCP8.5. Future groundwater recharge projection
545 reveals the dominant control of the soil component in generating the groundwater recharge in the study area. The fact that there is less than a 1% change projected for the groundwater recharge variable under both climatic scenarios shows that most of the time, the recharge is already at its maximum capacity. During the rainy season, rainfall intensification could not generate more recharge. On the other hand, during the dry season, increasing rainfall drives higher recharge, however, during the dry period that is projected to be even drier, the deficit of groundwater recharge almost balances out those additional recharge.

550 As expected, under the increasing and constant groundwater abstraction scenario, the groundwater status is projected to drop. The maximum groundwater head drawdown increases over time, the drawdown area expands, and the groundwater storage depletes. However, a positive sign of groundwater replenishment potential is shown under the decreasing groundwater abstraction scenario, despite the conflicting numbers shown between the point-based groundwater level assessment and the basin-integrated groundwater storage assessment. Despite being slow and occurring between 2050 and 2100, there is a sign
555 that the groundwater storage is going in the right direction to be refilled. It is also indicated that the groundwater table is highly regulated by not only the volume and rate but also the spatial distribution of groundwater abstraction. Comparing the results of climatic and anthropogenic impact, we conclude that groundwater abstraction propagates a more significant impact on the simulated future groundwater availability. The findings of this study are expected to assist in deriving and improving the current and future groundwater policies and management strategies for the Bandung groundwater basin and other groundwater basins
560 around the world that face similar issues.



Data availability. The climate model data are publicly available on the Copernicus Climate Data Store website, which can be accessed online at <https://cds.climate.copernicus.eu> (last access: 31 July 2023). Other data used in this study are stored in the 4TU Research Data repository, which is available online at: [10.4121/d9706a2a-b77b-412f-a3aa-6e22bd8ddf4a](https://doi.org/10.4121/d9706a2a-b77b-412f-a3aa-6e22bd8ddf4a)

565 *Author contributions.* SR, VB, and AW, altogether designed the study conceptualization. SM provided the theoretical background and related literature. SR managed the input data for the one-way coupled model. AW prepared the model setup for the hydrological simulation, and VB supervised the development of the groundwater flow model. SR ran the model simulations, while VB, SM, and AW validated the results. SR wrote the original draft, and VB, SM, and AW contributed to reviewing the manuscript before its finalization.

Competing interests. One of the authors, Albrecht H Weerts, is a HESS editor.

570 *Acknowledgements.* The first author would like to acknowledge the Indonesia Endowment Fund for Education (LPDP) under the Ministry of Finance, Republic of Indonesia, for its scholarship funding support. This research is also significantly supported by the Office of Energy and Mineral Resources (ESDM) of the West Java Province by providing access to the available data. We acknowledge the World Climate Research Programme, which, through its Working Group on Coupled Modelling, coordinated and promoted CMIP6. We thank the climate modeling groups for producing and making available their model output, the Earth System Grid Federation (ESGF) for archiving the data and providing access, and the multiple funding agencies that support CMIP6 and ESGF.



575 References

- <https://population.un.org/wpp/>, 2023.
- Abidin, H. Z., Gumilar, I., Andreas, H., Murdohardono, D., and Fukuda, Y.: On causes and impacts of land subsidence in Bandung Basin, Indonesia, *Environmental Earth Sciences*, 68, 1545–1553, <https://doi.org/10.1007/s12665-012-1848-z>, 2013.
- Adachi, S. A., Nishizawa, S., Ando, K., Yamaura, T., Yoshida, R., Yashiro, H., Kajikawa, Y., and Tomita, H.: An evaluation method for
580 uncertainties in regional climate projections, *Atmospheric Science Letters*, 20, e877, <https://doi.org/https://doi.org/10.1002/asl.877>, 2019.
- Ansari, A. H. M., Umar, R., us Saba, N., and Sarah, S.: Assessment of Current and Future Groundwater Stress through Varied Scenario Projections in Urban and Rural Environment in Parts of Meerut District, Uttar Pradesh in Ganges Sub-basin, *Journal of the Geological Society of India*, 97, 927–934, <https://doi.org/10.1007/s12594-021-1793-0>, 2021.
- Anurag, H. and Ng, G.-H. C.: Assessing future climate change impacts on groundwater recharge in Minnesota, *Journal of Hydrology*, 612,
585 128 112, <https://doi.org/https://doi.org/10.1016/j.jhydrol.2022.128112>, 2022.
- Aslam, R. A., Shrestha, S., Usman, M. N., Khan, S. N., Ali, S., Sharif, M. S., Sarwar, M. W., Saddique, N., Sarwar, A., Ali, M. U., and Arshad, A.: Integrated SWAT-MODFLOW Modeling-Based Groundwater Adaptation Policy Guidelines for Lahore, Pakistan under Projected Climate Change, and Human Development Scenarios, *Atmosphere*, 13, <https://doi.org/10.3390/atmos13122001>, 2022.
- Baghel, T., Babel, M. S., Shrestha, S., Salin, K. R., Virdis, S. G., and Shinde, V. R.: A generalized methodology for ranking climate models
590 based on climate indices for sector-specific studies: An application to the Mekong sub-basin, *Science of The Total Environment*, 829, 154 551, <https://doi.org/https://doi.org/10.1016/j.scitotenv.2022.154551>, 2022.
- Bakker, M., Post, V., Langevin, C. D., Hughes, J. D., White, J. T., Starn, J. J., and Fienen, M. N.: Scripting MODFLOW Model Development Using Python and FloPy, *Groundwater*, 54, 733–739, <https://doi.org/https://doi.org/10.1111/gwat.12413>, 2016.
- Bhave, A. G., Mishra, A., and Groot, A.: Sub-basin scale characterization of climate change vulnerability, impacts and adaptation in an
595 Indian River basin, *Regional Environmental Change*, 13, 1087–1098, <https://doi.org/10.1007/s10113-013-0416-8>, 2013.
- Bierkens, M. F. P. and Wada, Y.: Non-renewable groundwater use and groundwater depletion: a review, *Environmental Research Letters*, 14, 063 002, <https://doi.org/10.1088/1748-9326/ab1a5f>, 2019.
- Brewington, L., Keener, V., and Mair, A.: Simulating Land Cover Change Impacts on Groundwater Recharge under Selected Climate Projections, *Maui, Hawaii, Remote Sensing*, 11, <https://doi.org/10.3390/rs11243048>, 2019.
- 600 Buchhorn, M., Smets, B., Bertels, L., Roo, B. D., Lesiv, M., Tsendbazar, N.-E., Li, L., and Tarko, A.: Copernicus Global Land Service: Land Cover 100m: version 3 Globe 2015-2019: Product User Manual, <https://doi.org/10.5281/zenodo.3938963>, 2020.
- Buser, C. M., KÜNSCH, H. R., and WEBER, A.: Biases and Uncertainty in Climate Projections, *Scandinavian Journal of Statistics*, 37, 179–199, <https://doi.org/https://doi.org/10.1111/j.1467-9469.2009.00686.x>, 2010.
- Chang, S. W., Chung, I.-M., Kim, M.-G., and Yifru, B. A.: Vulnerability assessment considering impact of future groundwater ex-
605 ploitation on coastal groundwater resources in northeastern Jeju Island, South Korea, *Environmental Earth Sciences*, 79, 498, <https://doi.org/10.1007/s12665-020-09254-2>, 2020.
- Chen, H., Xue, Y., and Qiu, D.: Numerical simulation of the land subsidence induced by groundwater mining, *Cluster Computing*, <https://doi.org/10.1007/s10586-022-03771-4>, 2022.
- Copernicus Climate Change Service: ERA5-Land hourly data from 2001 to present, <https://doi.org/10.24381/CDS.E2161BAC>, 2019.
- 610 Copernicus Climate Change Service: CMIP6 climate projections, <https://doi.org/10.24381/CDS.C866074C>, 2021.



- Custodio, E., del Carmen Cabrera, M., Poncela, R., Puga, L.-O., Skupien, E., and del Villar, A.: Groundwater intensive exploitation and mining in Gran Canaria and Tenerife, Canary Islands, Spain: Hydrogeological, environmental, economic and social aspects, *Science of The Total Environment*, 557-558, 425–437, <https://doi.org/https://doi.org/10.1016/j.scitotenv.2016.03.038>, 2016.
- de Bruin, H. A. R., Trigo, I. F., Bosveld, F. C., and Meirink, J. F.: A Thermodynamically Based Model for Actual Evapotranspiration of an Extensive Grass Field Close to FAO Reference, Suitable for Remote Sensing Application, *Journal of Hydrometeorology*, 17, 1373–1382, <https://doi.org/10.1175/jhm-d-15-0006.1>, 2016.
- de Luna, R. M. R., Garnés, S. J. d. A., Cabral, J. J. d. S. P., and dos Santos, S. M.: Groundwater overexploitation and soil subsidence monitoring on Recife plain (Brazil), *Natural Hazards*, 86, 1363–1376, <https://doi.org/10.1007/s11069-017-2749-y>, 2017.
- de Vries, W. T. and Schrey, M.: Geospatial Approaches to Model Renewable Energy Requirements of the New Capital City of Indonesia, *Frontiers in Sustainable Cities*, 4, <https://doi.org/10.3389/frsc.2022.848309>, 2022.
- Döll, P., Hoffmann-Dobrev, H., Portmann, F., Siebert, S., Eicker, A., Rodell, M., Strassberg, G., and Scanlon, B.: Impact of water withdrawals from groundwater and surface water on continental water storage variations, *Journal of Geodynamics*, 59-60, 143–156, <https://doi.org/https://doi.org/10.1016/j.jog.2011.05.001>, *mass Transport and Mass Distribution in the System Earth*, 2012.
- Eilander, D., van Verseveld, W., Yamazaki, D., Weerts, A., Winsemius, H. C., and Ward, P. J.: A hydrography upscaling method for scale invariant parametrization of distributed hydrological models, *Hydrology and Earth System Sciences Discussions*, 2020, 1–34, <https://doi.org/10.5194/hess-2020-582>, 2020.
- Eyring, V., Bony, S., Meehl, G. A., Senior, C. A., Stevens, B., Stouffer, R. J., and Taylor, K. E.: Overview of the Coupled Model Intercomparison Project Phase 6 (CMIP6) experimental design and organization, *Geoscientific Model Development*, 9, 1937–1958, <https://doi.org/10.5194/gmd-9-1937-2016>, 2016.
- Funk, C., Peterson, P., Landsfeld, M., Pedreros, D., Verdin, J., Shukla, S., Husak, G., Rowland, J., Harrison, L., Hoell, A., and Michaelsen, J.: The climate hazards infrared precipitation with stations—a new environmental record for monitoring extremes, *Scientific Data*, 2, <https://doi.org/10.1038/sdata.2015.66>, 2015.
- Gash, J. H. C.: An analytical model of rainfall interception by forests, *Quarterly Journal of the Royal Meteorological Society*, 105, 43–55, <https://doi.org/https://doi.org/10.1002/qj.49710544304>, 1979.
- Gaye, C. B. and Tindimugaya, C.: Review: Challenges and opportunities for sustainable groundwater management in Africa, *Hydrogeology Journal*, 27, 1099–1110, <https://doi.org/10.1007/s10040-018-1892-1>, 2019.
- Gebremicael, T., Mohamed, Y., and der Zaag, P. V.: Attributing the hydrological impact of different land use types and their long-term dynamics through combining parsimonious hydrological modelling, alteration analysis and PLSR analysis, *Science of The Total Environment*, 660, 1155–1167, <https://doi.org/10.1016/j.scitotenv.2019.01.085>, 2019.
- Gleeson, T., Cuthbert, M., Ferguson, G., and Perrone, D.: Global Groundwater Sustainability, Resources, and Systems in the Anthropocene, *Annual Review of Earth and Planetary Sciences*, 48, 431–463, <https://doi.org/10.1146/annurev-earth-071719-055251>, 2020.
- Gumilar, I., Abidin, H. Z., Hutasoit, L. M., Hakim, D. M., Sidiq, T. P., and Andreas, H.: Land Subsidence in Bandung Basin and its Possible Caused Factors, *Procedia Earth and Planetary Science*, 12, 47–62, <https://doi.org/https://doi.org/10.1016/j.proeps.2015.03.026>, *proceeding of The 3rd International Symposium on Earthquake and Disaster Mitigation (The 3rd ISEDM)*, 2015.
- Hackbarth, T. X. and de Vries, W. T.: An Evaluation of Massive Land Interventions for the Relocation of Capital Cities, *Urban Science*, 5, <https://doi.org/10.3390/urbansci5010025>, 2021.



- Hashimoto, R., Kazama, S., Hashimoto, T., Oguma, K., and Takizawa, S.: Planning methods for conjunctive use of urban water resources based on quantitative water demand estimation models and groundwater regulation index in Yangon City, Myanmar, *Journal of Cleaner Production*, 367, 133–123, <https://doi.org/https://doi.org/10.1016/j.jclepro.2022.133123>, 2022.
- 650 Hassaballah, K., Mohamed, Y., Uhlenbrook, S., and Biro, K.: Analysis of streamflow response to land use and land cover changes using satellite data and hydrological modelling: case study of Dinder and Rahad tributaries of the Blue Nile (Ethiopia–Sudan), *Hydrology and Earth System Sciences*, 21, 5217–5242, <https://doi.org/10.5194/hess-21-5217-2017>, 2017.
- Hawkins, E., Smith, R. S., Gregory, J. M., and Stainforth, D. A.: Irreducible uncertainty in near-term climate projections, *Climate Dynamics*, 46, 3807–3819, <https://doi.org/10.1007/s00382-015-2806-8>, 2016.
- 655 Healy, A., Upton, K., Capstick, S., Bristow, G., Tijani, M., MacDonald, A., Goni, I., Bukar, Y., Whitmarsh, L., Theis, S., Danert, K., and Allan, S.: Domestic groundwater abstraction in Lagos, Nigeria: a disjuncture in the science-policy-practice interface?, *Environmental Research Letters*, 15, 045006, <https://doi.org/10.1088/1748-9326/ab7463>, 2020.
- Hengl, T., de Jesus, J. M., Heuvelink, G. B. M., Gonzalez, M. R., Kilibarda, M., Blagotić, A., Shangguan, W., Wright, M. N., Geng, X., Bauer-Marschallinger, B., Guevara, M. A., Vargas, R., MacMillan, R. A., Batjes, N. H., Leenaars, J. G. B., Ribeiro, E., Wheeler, I., 660 Mantel, S., and Kempen, B.: SoilGrids250m: Global gridded soil information based on machine learning, *PLOS ONE*, 12, e0169748, <https://doi.org/10.1371/journal.pone.0169748>, 2017.
- Hua, L., Zhao, T., and Zhong, L.: Future changes in drought over Central Asia under CMIP6 forcing scenarios, *Journal of Hydrology: Regional Studies*, 43, 101–191, <https://doi.org/https://doi.org/10.1016/j.ejrh.2022.101191>, 2022.
- Imhoff, R. O., van Verseveld, W. J., van Osnabrugge, B., and Weerts, A. H.: Scaling Point-Scale (Pedo)transfer Functions to Seamless Large-Domain Parameter Estimates for High-Resolution Distributed Hydrologic Modeling: An Example for the Rhine River, *Water Resources Research*, 56, <https://doi.org/10.1029/2019wr026807>, 2020.
- Indonesia: Detail masterplan on Indonesia capital city, 2022.
- IPCC: Climate Change 2021: The Physical Science Basis. Contribution of Working Group I to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change, vol. In Press, Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, 670 <https://doi.org/10.1017/9781009157896>, 2021.
- Iqbal, Z., Shahid, S., Ahmed, K., Ismail, T., Ziarh, G. F., Chung, E.-S., and Wang, X.: Evaluation of CMIP6 GCM rainfall in mainland Southeast Asia, *Atmospheric Research*, 254, 105–525, <https://doi.org/https://doi.org/10.1016/j.atmosres.2021.105525>, 2021.
- Jackson, C. R., Bloomfield, J. P., and Mackay, J. D.: Evidence for changes in historic and future groundwater levels in the UK, *Progress in Physical Geography: Earth and Environment*, 39, 49–67, <https://doi.org/10.1177/0309133314550668>, 2015.
- 675 Kawai, H., Yukimoto, S., Koshiro, T., Oshima, N., Tanaka, T., Yoshimura, H., and Nagasawa, R.: Significant improvement of cloud representation in the global climate model MRI-ESM2, *Geoscientific Model Development*, 12, 2875–2897, <https://doi.org/10.5194/gmd-12-2875-2019>, 2019.
- Kodir, A., Hadi, N., Astina, I., Taryana, D., Ratnawati, N., and Idris: The dynamics of community response to the development of the New Capital (IKN) of Indonesia, in: *Development, Social Change and Environmental Sustainability*, pp. 57–61, Routledge, 680 <https://doi.org/10.1201/9781003178163-13>, 2021.
- Krasting, J. P., John, J. G., Blanton, C., McHugh, C., Nikonov, S., Radhakrishnan, A., Rand, K., Zadeh, N. T., Balaji, V., Durachta, J., Dupuis, C., Menzel, R., Robinson, T., Underwood, S., Vahlenkamp, H., Dunne, K. A., Gauthier, P. P., Ginoux, P., Griffies, S. M., Hallberg, R., Harrison, M., Hurlin, W., Malyshev, S., Naik, V., Paulot, F., Paynter, D. J., Ploshay, J., Reichl, B. G., Schwarzkopf, D. M., Seman, C. J., Silvers, L., Wyman, B., Zeng, Y., Adcroft, A., Dunne, J. P., Dussin, R., Guo, H., He, J., Held, I. M., Horowitz, L. W., Lin, P., Milly, P.,



- 685 Shevliakova, E., Stock, C., Winton, M., Wittenberg, A. T., Xie, Y., and Zhao, M.: NOAA-GFDL GFDL-ESM4 model output prepared for CMIP6 CMIP, <https://doi.org/10.22033/ESGF/CMIP6.1407>, 2018.
- Lange, S.: Trend-preserving bias adjustment and statistical downscaling with ISIMIP3BASD (v1.0), *Geoscientific Model Development*, 12, 3055–3070, <https://doi.org/10.5194/gmd-12-3055-2019>, 2019.
- Lange, S.: ISIMIP3BASD, <https://doi.org/10.5281/zenodo.4686991>, 2021.
- 690 Latif, M.: Uncertainty in climate change projections, *Journal of Geochemical Exploration*, 110, 1–7, <https://doi.org/https://doi.org/10.1016/j.gexplo.2010.09.011>, sustainability of Geochemical Cycling, 2011.
- Lili, Y., Minhua, L., Fei, C., Yueyuan, D., and Cuimei, L.: Practices of groundwater over-exploitation control in Hebei Province, *Water Policy*, 22, 591–601, <https://doi.org/10.2166/wp.2020.183>, 2020.
- Liu, K., Zhang, J., and Wang, M.: Drivers of Groundwater Change in China and Future Projections, *Remote Sensing*, 14, 695 <https://doi.org/10.3390/rs14194825>, 2022.
- López, P. L., Wanders, N., Schellekens, J., Renzullo, L. J., Sutanudjaja, E. H., and Bierkens, M. F. P.: Improved large-scale hydrological modelling through the assimilation of streamflow and downscaled satellite soil moisture observations, *Hydrology and Earth System Sciences*, 20, 3059–3076, <https://doi.org/10.5194/hess-20-3059-2016>, 2016.
- Mancuso, M., Santucci, L., and Carol, E.: Effects of intensive aquifers exploitation on groundwater salinity in coastal wetlands, *Hydrological Processes*, 34, 2313–2323, <https://doi.org/https://doi.org/10.1002/hyp.13727>, 2020.
- Marcos-Garcia, P., Pulido-Velazquez, M., Sanchis-Ibor, C., García-Mollá, M., Ortega-Reig, M., Garcia-Prats, A., and Girard, C.: From local knowledge to decision making in climate change adaptation at basin scale. Application to the Jucar River Basin, Spain, *Climatic Change*, 176, 38, <https://doi.org/10.1007/s10584-023-03501-8>, 2023.
- Martinez, R. and Masron, I. N.: Jakarta: A city of cities, *Cities*, 106, 102 868, <https://doi.org/https://doi.org/10.1016/j.cities.2020.102868>, 705 2020.
- McColl, K. A., Vogelzang, J., Konings, A. G., Entekhabi, D., Piles, M., and Stoffelen, A.: Extended triple collocation: Estimating errors and correlation coefficients with respect to an unknown target, *Geophysical Research Letters*, 41, 6229–6236, <https://doi.org/10.1002/2014gl061322>, 2014.
- Meixner, T., Manning, A. H., Stonestrom, D. A., Allen, D. M., Ajami, H., Blasch, K. W., Brookfield, A. E., Castro, C. L., Clark, 710 J. F., Gochis, D. J., Flint, A. L., Neff, K. L., Niraula, R., Rodell, M., Scanlon, B. R., Singha, K., and Walvoord, M. A.: Implications of projected climate change for groundwater recharge in the western United States, *Journal of Hydrology*, 534, 124–138, <https://doi.org/https://doi.org/10.1016/j.jhydrol.2015.12.027>, 2016.
- Meng, L., Shi, J., Zhai, Y., Zuo, R., Wang, J., Guo, X., Teng, Y., Gao, J., Xu, L., and Guo, B.: Ammonium Reactive Migration Process and Functional Bacteria Response along Lateral Runoff Path under Groundwater Exploitation, *Sustainability*, 14, 715 <https://doi.org/10.3390/su14148609>, 2022.
- Momejian, N., Abou Najm, M., Alameddine, I., and El-Fadel, M.: Groundwater Vulnerability Modeling to Assess Seawater Intrusion: a Methodological Comparison with Geospatial Interpolation, *Water Resources Management*, 33, 1039–1052, <https://doi.org/10.1007/s11269-018-2165-4>, 2019.
- Mustafa, S. M. T., Abdollahi, K., Verbeiren, B., and Huysmans, M.: Identification of the influencing factors on groundwater drought and 720 depletion in north-western Bangladesh, *Hydrogeology Journal*, 25, 1357–1375, <https://doi.org/10.1007/s10040-017-1547-7>, 2017.



- Mustafa, S. M. T., Hasan, M. M., Saha, A. K., Rannu, R. P., Van Uytven, E., Willems, P., and Huysmans, M.: Multi-model approach to quantify groundwater-level prediction uncertainty using an ensemble of global climate models and multiple abstraction scenarios, *Hydrology and Earth System Sciences*, 23, 2279–2303, <https://doi.org/10.5194/hess-23-2279-2019>, 2019.
- Mutaqin, D. J., Muslim, M. B., and Rahayu, N. H.: Analisis Konsep Forest City dalam Rencana Pembangunan Ibu Kota Negara, Bappenas Working Papers, 4, 13–29, <https://doi.org/10.47266/bwp.v4i1.87>, 2021.
- 725 Nugroho, H.: Pemindahan Ibu Kota Baru Negara Kesatuan Republik Indonesia ke Kalimantan Timur: Strategi Pemenuhan Kebutuhan dan Konsumsi Energi, Bappenas Working Papers, 3, 33–41, <https://doi.org/10.47266/bwp.v3i1.53>, 2020.
- Oruc, S.: Performance of bias corrected monthly CMIP6 climate projections with different reference period data in Turkey, *Acta Geophysica*, 70, 777–789, <https://doi.org/10.1007/s11600-022-00731-9>, 2022.
- 730 Pardo-Igúzquiza, E., Collados-Lara, A. J., and Pulido-Velazquez, D.: Potential future impact of climate change on recharge in the Sierra de las Nieves (southern Spain) high-relief karst aquifer using regional climate models and statistical corrections, *Environmental Earth Sciences*, 78, 598, <https://doi.org/10.1007/s12665-019-8594-4>, 2019.
- Patle, G. T., Singh, D. K., and Sarangi, A.: Modelling of climate-induced groundwater recharge for assessing carbon emission from groundwater irrigation, *Current Science*, 115, 64–73, <https://www.jstor.org/stable/26978149>, 2018.
- 735 Pravitari, A. E., Rustiadi, E., Mulya, S. P., Setiawan, Y., Fuadina, L. N., and Murtadho, A.: Identifying the driving forces of urban expansion and its environmental impact in Jakarta-Bandung mega urban region, *IOP Conference Series: Earth and Environmental Science*, 149, 012044, <https://doi.org/10.1088/1755-1315/149/1/012044>, 2018.
- Rahiem, M. A.: Hydrogeological Information of Bandung Basin, Indonesia, <https://malikarrahiem.shinyapps.io/BandungBasin/>, 2020.
- Rahimi, R., Tavakol-Davani, H., and Nasser, M.: An Uncertainty-Based Regional Comparative Analysis on the Performance of Different Bias Correction Methods in Statistical Downscaling of Precipitation, *Water Resources Management*, 35, 2503–2518, <https://doi.org/10.1007/s11269-021-02844-0>, 2021.
- 740 Rajczak, J. and Schär, C.: Projections of Future Precipitation Extremes Over Europe: A Multimodel Assessment of Climate Simulations, *Journal of Geophysical Research: Atmospheres*, 122, 10,773–10,800, <https://doi.org/10.1002/2017JD027176>, 2017.
- Rusli, S., Weerts, A., Taufiq, A., and Bense, V.: Estimating water balance components and their uncertainty bounds in highly groundwater-dependent and data-scarce area: An example for the Upper Citarum basin, *Journal of Hydrology: Regional Studies*, 37, 100911, <https://doi.org/10.1016/j.ejrh.2021.100911>, 2021.
- 745 Rusli, S., Bense, V., Taufiq, A., and Weerts, A.: Quantifying basin-scale changes in groundwater storage using GRACE and one-way coupled hydrological and groundwater flow model in the data-scarce Bandung groundwater Basin, Indonesia, *Groundwater for Sustainable Development*, p. 100953, <https://doi.org/10.1016/j.gsd.2023.100953>, 2023a.
- 750 Rusli, S., Weerts, A., Mustafa, S., Irawan, D., Taufiq, A., and Bense, V.: Quantifying aquifer interaction using numerical groundwater flow model evaluated by environmental water tracer data: Application to the data-scarce area of Bandung groundwater basin, West Java, Indonesia, *Journal of Hydrology: Regional Studies*, under review, 2023b.
- Shahid, S., Wang, X.-J., Moshir Rahman, M., Hasan, R., Harun, S. B., and Shamsudin, S.: Spatial assessment of groundwater over-exploitation in northwestern districts of Bangladesh, *Journal of the Geological Society of India*, 85, 463–470, <https://doi.org/10.1007/s12594-015-0238-z>, 2015.
- 755 Siarkos, I., Sevastas, S., Mallios, Z., Theodossiou, N., and Ifadis, I.: Investigating groundwater vulnerability variation under future abstraction scenarios to estimate optimal pumping reduction rates, *Journal of Hydrology*, 598, 126297, <https://doi.org/10.1016/j.jhydrol.2021.126297>, 2021.



- 760 Silva Jr, G. and Pizani, T.: Vulnerability assessment in coastal aquifers between Niterói and Rio das Ostras, Rio de Janeiro State, Brazil, *Rev Lat Am Hidrogeol*, 3, 93–99, 2003.
- Smerdon, B. D.: A synopsis of climate change effects on groundwater recharge, *Journal of Hydrology*, 555, 125–128, <https://doi.org/https://doi.org/10.1016/j.jhydrol.2017.09.047>, 2017.
- 765 Stevenazzi, S., Bonfanti, M., Masetti, M., Nghiem, S. V., and Sorichetta, A.: A versatile method for groundwater vulnerability projections in future scenarios, *Journal of Environmental Management*, 187, 365–374, <https://doi.org/https://doi.org/10.1016/j.jenvman.2016.10.057>, 2017.
- Taie Semiromi, M. and Koch, M.: How Do Gaining and Losing Streams React to the Combined Effects of Climate Change and Pumping in the Gharehsoo River Basin, Iran?, *Water Resources Research*, 56, e2019WR025388, <https://doi.org/https://doi.org/10.1029/2019WR025388>, e2019WR025388 2019WR025388, 2020.
- Tillman, F. D., Gangopadhyay, S., and Pruitt, T.: Changes in groundwater recharge under projected climate in the upper Colorado River 770 basin, *Geophysical Research Letters*, 43, 6968–6974, <https://doi.org/https://doi.org/10.1002/2016GL069714>, 2016.
- Trásy-Havril, T., Szkolnikovics-Simon, S., and Mádl-Szönyi, J.: How Complex Groundwater Flow Systems Respond to Climate Change Induced Recharge Reduction?, *Water*, 14, <https://doi.org/10.3390/w14193026>, 2022.
- van Verseveld, W. J., Weerts, A. H., Visser, M., Buitink, J., Imhoff, R. O., Boisgontier, H., Bouaziz, L., Eilander, D., Hegnauer, M., ten Velden, C., and Russell, B.: Wflow_sbm v0.6.1, a spatially distributed hydrologic model: from global data to local applications, *Geoscientific 775 Model Development Discussions*, 2022, 1–52, <https://doi.org/10.5194/gmd-2022-182>, 2022.
- van Vuuren, D. P., Edmonds, J., Kainuma, M., Riahi, K., Thomson, A., Hibbard, K., Hurtt, G. C., Kram, T., Krey, V., Lamarque, J.-F., Masui, T., Meinshausen, M., Nakicenovic, N., Smith, S. J., and Rose, S. K.: The representative concentration pathways: an overview, *Climatic Change*, 109, 5, <https://doi.org/10.1007/s10584-011-0148-z>, 2011.
- 780 Varouchakis, E. A., Karatzas, G. P., and Giannopoulos, G. P.: Impact of irrigation scenarios and precipitation projections on the groundwater resources of Viannos Basin at the island of Crete, Greece, *Environmental Earth Sciences*, 73, 7359–7374, <https://doi.org/10.1007/s12665-014-3913-2>, 2015.
- Wada, Y., van Beek, L. P. H., van Kempen, C. M., Reckman, J. W. T. M., Vasak, S., and Bierkens, M. F. P.: Global depletion of groundwater resources, *Geophysical Research Letters*, 37, <https://doi.org/https://doi.org/10.1029/2010GL044571>, 2010.
- 785 Wang, S.-J., Lee, C.-H., Yeh, C.-F., Choo, Y. F., and Tseng, H.-W.: Evaluation of Climate Change Impact on Groundwater Recharge in Groundwater Regions in Taiwan, *Water*, 13, <https://doi.org/10.3390/w13091153>, 2021.
- Wannasin, C., Brauer, C., Uijlenhoet, R., van Verseveld, W., and Weerts, A.: Daily flow simulation in Thailand Part I: Testing a distributed hydrological model with seamless parameter maps based on global data, *Journal of Hydrology: Regional Studies*, 34, 100794, <https://doi.org/10.1016/j.ejrh.2021.100794>, 2021.
- 790 Wu, W.-Y., Lo, M.-H., Wada, Y., Famiglietti, J. S., Reager, J. T., Yeh, P. J.-F., Ducharme, A., and Yang, Z.-L.: Divergent effects of climate change on future groundwater availability in key mid-latitude aquifers, *Nature Communications*, 11, 3710, <https://doi.org/10.1038/s41467-020-17581-y>, 2020.
- Wu, Y., Miao, C., Fan, X., Gou, J., Zhang, Q., and Zheng, H.: Quantifying the Uncertainty Sources of Future Climate Projections and Narrowing Uncertainties With Bias Correction Techniques, *Earth's Future*, 10, e2022EF002963, <https://doi.org/https://doi.org/10.1029/2022EF002963>, e2022EF002963 2022EF002963, 2022.
- 795 Yamazaki, D., Ikeshima, D., Tawatari, R., Yamaguchi, T., O'Loughlin, F., Neal, J. C., Sampson, C. C., Kanae, S., and Bates, P. D.: A high-accuracy map of global terrain elevations, *Geophysical Research Letters*, 44, 5844–5853, <https://doi.org/10.1002/2017gl072874>, 2017.



- Yawson, D., Adu, M., Mulholland, B., Ball, T., Frimpong, K., Mohan, S., and White, P.: Regional variations in potential groundwater recharge from spring barley crop fields in the UK under projected climate change, *Groundwater for Sustainable Development*, 8, 332–345, <https://doi.org/https://doi.org/10.1016/j.gsd.2018.12.005>, 2019.
- 800 Yuan, F., Tung, Y.-K., and Ren, L.: Projection of future streamflow changes of the Pearl River basin in China using two delta-change methods, *Hydrology Research*, 47, 217–238, <https://doi.org/10.2166/nh.2015.159>, 2015.
- Yukimoto, S., Koshiro, T., Kawai, H., Oshima, N., Yoshida, K., Urakawa, S., Tsujino, H., Deushi, M., Tanaka, T., Hosaka, M., Yoshimura, H., Shindo, E., Mizuta, R., Ishii, M., Obata, A., and Adachi, Y.: MRI MRI-ESM2.0 model output prepared for CMIP6 CMIP, <https://doi.org/10.22033/ESGF/CMIP6.621>, 2019.
- 805 Zhao, Y., Dong, N., Li, Z., Zhang, W., Yang, M., and Wang, H.: Future precipitation, hydrology and hydropower generation in the Yalong River Basin: Projections and analysis, *Journal of Hydrology*, 602, 126 738, <https://doi.org/https://doi.org/10.1016/j.jhydrol.2021.126738>, 2021.