

This discussion paper is/has been under review for the journal Hydrology and Earth System Sciences (HESS). Please refer to the corresponding final paper in HESS if available.

Nitrogen surface water retention in the **Baltic Sea drainage basin**

P. Stålnacke¹, A. Pengerud¹, A. Vassiljev², E. Smedberg³, C.-M. Mörth⁴, H. E. Hägg⁵, C. Humborg⁵, and H. E. Andersen⁶

Received: 15 August 2014 - Accepted: 22 August 2014 - Published: 26 September 2014

Correspondence to: P. Stålnacke (per.stalnacke@bioforsk.no)

Published by Copernicus Publications on behalf of the European Geosciences Union.

iscussion

Discussion

Discussion Paper

Discussion Paper

HESSD

11, 10829–10858, 2014

Nitrogen surface water retention in the **Baltic Sea drainage** basin

P. Stålnacke et al.

Title Page

Introduction Abstract

Conclusions References

Figures

Back

Full Screen / Esc

Printer-friendly Version



¹Bioforsk – Norwegian Institute for Agricultural and Environmental Research, Fr. A. Dahls vei 20, 1430 Ås, Norway

²Tallinn University of Technology, Ehitajate tee 5, 19086 Tallinn, Estonia

³Baltic Sea Centre, Stockholm University, 10691 Stockholm, Sweden

⁴Department of Geological Sciences, Stockholm University, 10691 Stockholm, Sweden

⁵Department of Applied Environmental Science and Baltic Nest Institute, Stockholm University, 10691 Stockholm, Sweden

⁶Aarhus University, Department of Bioscience, Veilsøvei 25, 8600 Aarhus, Denmark

In this paper, we estimate the surface water retention of nitrogen (N) in all the 117 drainage basins to the Baltic Sea with the use of a statistical model (MESAW) for source apportionment of riverine loads of pollutants. Our results show that the MESAW model was able to estimate the N load at the river mouth of 88 Baltic Sea rivers, for which we had observed data, with a sufficient degree of precision and accuracy. The estimated retention parameters were also statistically significant. Our results show that around 380 000 t of N are annually retained in surface waters draining to the Baltic Sea. The total annual riverine load from the 117 basins to the Baltic Sea was estimated to 570 000 t of N, giving a total surface water N retention of around 40%. In terms of absolute retention values, three major river basins account for 50 % of the total retention in the 117 basins; i.e. around 104000t of N is retained in Neva, 55000t in Vistula and 32 000 t in Oder. The largest retention was found in river basins with a high percentage of lakes as indicated by a strong relationship between N retention (%) and share of lake area in the river drainage areas. For example in Göta älv, we estimated a total N retention of 72%, whereof 67% of the retention occurred in the lakes of that drainage area (Lake Vänern primarily). The obtained results will hopefully enable the Helsinki Commission (HELCOM) to refine the nutrient load targets in the Baltic Sea Action Plan (BSAP), as well as to better identify cost-efficient measures to reduce nutrient loadings to the Baltic Sea.

1 Introduction

Expanding human activities have had a great impact on nutrient dynamics and nutrient export from watersheds (Hill and Bolgrien, 2011; Mayorga et al., 2010). Increased population densities, food production, sewage emissions and fossil fuel combustion are among the driving forces causing increased nutrient mobilisation and alterations to hydrological systems (Mayorga et al., 2010). Increased nutrient export from coastal

iscussion Paper

Discussion Paper

Discussion Paper

Discussion

Paper

Pr

HESSD

11, 10829–10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

l∢ ≻l

- ◆

Back Close

Full Screen / Esc

Printer-friendly Version



Paper

watersheds has had severe impacts on the ecological functions and community composition of estuaries, with algal blooms, increased water turbidity, oxygen depletion, and severe fish deaths as the most prominent consequences (Kellogg et al., 2010; Mayorga et al., 2010; Hoffmann et al., 2009).

Several geomorphic, hydraulic and biological factors may interact to reduce nutrient export from watersheds (Wollheim et al., 2006). Hejzlar et al. (2009) define retention as the fraction of external nutrient inputs that is retained within watersheds, either in absolute values or relative to the input. For nitrogen (N), the term retention is widely used to describe the processes leading to a temporary immobilisation of reactive (non-N₂) N by incorporation into biomass or sedimentation, or the permanent loss of reactive N by conversion into the non-reactive atmospheric form (N₂) by denitrification (Billen et al., 2009). Results from mass-balance studies across a wide range of geographic scales indicate that watersheds could retain as much as 60–90% of total N inputs (Kellogg et al., 2010). Reduced N export can be achieved by increasing N retention in soils, sediments and biomass, reducing atmospheric and terrestrial N sources, and increasing in-stream N removal and retention processes (Hill and Bolgrien, 2011).

Water residence time is a major factor determining the retention of nutrients in watersheds (Hejzlar et al., 2009). Nitrogen is primarily removed (or retained) from surface water by denitrification (i.e. the microbial production of N₂ from fixed N), followed by processes such as sorption to sediment or organic matter, and biological uptake (Hejzlar et al., 2009). Watershed characteristics, such as hydrology and geomorphology, strongly control water residence time, where increased water residence time can enhance denitrification processes and thereby reduce N loads to coastal waters (Kellogg et al., 2010; Behrendt and Opitz, 2000). Total N inputs influence denitrification rates, whereas hydrology and geomorphology (or water residence time) influence the proportion of N inputs that are denitrified (Seitzinger et al., 2006). Certain areas within watersheds can be identified as sink areas with regard to N export, often being areas with a relatively long water residence time where biogeochemical processes can transform reactive N into organic N in biomass, or N gases via denitrification (Kellogg et al.,

HESSD

11, 10829–10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

l∢ ⊳l

- ◆

Back Close

Full Screen / Esc

Printer-friendly Version



11, 10829–10858, 2014

HESSD

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



2009), or burial of N in sediments (Harrison et al., 2009). The mitigating effect of these sink areas could in some cases be negligible, especially in cases where such areas are bypassed by N-carrying water flows due to specific land management practices (e.g. tile drains or storm water overflows) (Kellogg et al., 2009). Denitrification processes are favoured in sediments and hypoxic or anoxic bottom waters, particularly in systems with abundant organic carbon (C) and nitrate (Harrison et al., 2009; Mulholland et al., 2008).

The question on how to quantify the retention of nutrients from source to river mouth remains one of the largest uncertainties in river basin management. Several authors (e.g. Mayorga et al., 2010; Seitzinger, 2008) emphasise the need for advances in methods and models for determining the impacts of human activities on nutrient inputs to coastal waters, and a better understanding of the processes leading to retention of N in watersheds. Seitzinger et al. (2002) argue that studies generally have focused on N removal in shorter sub-sections of rivers and emphasise the need for a river network approach if we are to quantify the retention of nutrients relative to total inputs. In later years, a number of models of different complexity have been developed for estimating in-stream N retention (e.g. Billen et al., 2009; Grimvall and Stålnacke, 1996; Hejzlar et al., 2009; Hill and Bolgrien, 2011; Jung and Deng, 2011; Mayorga et al., 2010; Seitzinger et al., 2002). In a study comparing nutrient retention estimates by catchment-scale models of different complexity, Hejzlar et al. (2009) showed a large variation in nutrient retention values as estimated by the different models in four selected catchments in Europe. They further showed that retention values were directly proportional to nutrient sources within catchments, indicating a close relationship between uncertainties in quantification of diffuse nutrient sources and nutrient retention determination. They concluded that realistic modelling of nutrient export from large catchments is only possible with a certain level of measured data.

In this paper, we estimate the surface water retention of N in the Baltic Sea drainage basin with the use of a statistical model for source apportionment of riverine loads of pollutants, the MESAW model (Grimvall and Stålnacke, 1996). The Baltic Sea, together

Discussion Paper

Discussion Paper

Discussion Pape

with the lakes and watercourses in its drainage basin, represents one of the most intensively monitored aquatic systems in the world, and eutrophication has been identified as a major threat to this system. The total area of the Baltic Sea drainage basin is 1745 000 km², which is around four times the area of the sea itself. The long-term average inflow of freshwater with the rivers is 475 km³ yr⁻¹ or 15 130 m³ s⁻¹ (Bergstrom and Carlsson, 1994; Mörth et al., 2007). Details on population and land use characteristics in the Baltic Sea drainage area can be found in Mörth et al. (2007). Scientifically, estimation of retention is one of the largest challenges in river basin nutrient accounting (i.e. source apportionment and budget calculations), and so is also the case in the Baltic Sea drainage basin.

2 Materials and methods

2.1 MESAW input data

Model input data included:

- land cover, including cultivated land, wetland, lake area, other land (mainly forest), and total drainage area (Corine Land Cover 2006 raster data);
- atmospheric N wet deposition (EMEP; http://emep.int/publ/helcom/2012/index. html);
- 3. point source emissions, including emissions from waste water treatment plants (WWTPs) and industry (data from HYDE, EUROSTAT and OECD);
- 4. observed annual riverine N load (kg N yr⁻¹) as estimated from riverine N concentration and water discharge data for the time period 1994–2006 (PLC database by HELCOM and data from Denmark from NERI).

For the estimation of WWTP emissions, we created a spatially distributed data set of people "connected" or "not connected" to WWTPs (primary, secondary and tertiary) 10833

HESSD

11, 10829–10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◆ •

Full Screen / Esc

Back

Printer-friendly Version



Discussion Paper

Printer-friendly Version

Interactive Discussion



within the Baltic Sea river basins. For this, we used spatially distributed population data and national level statistics on WWTP connection. Population numbers for the year 2005 divided into urban and rural population were obtained from the HYDE database (http://themasites.pbl.nl/en/themasites/hyde/). These data were redistributed ₅ into a 10 km × 10 km grid. Percentages of population "connected" and type of waste water treatment were compiled from EUROSTAT (European Commission) and the Organisation for Economic Co-operation and Development (OECD). For Russia, Belarus, Ukraine and Slovakia, only percentage of people "connected" to any type of waste water treatment was available, so the distribution between primary, secondary and tertiary treatment was based on assumption and expert judgement. Based on these national statistics, the total number of "connected" people in each country was calculated. The number of "connected" people was then spatially distributed to the grid cells. The distribution was made based on the assumption that urban population and grid cells with higher population numbers would be more likely to have a municipal WWTP connection than rural and smaller populations. Applying this principle, the grid cells for each country were classified as "connected" starting with urban populations in a descending order, and continuing with rural population in the same way until the number of "connected" people reached the number specified by the national statistics. This procedure was carried out for all three treatment types; first tertiary, then secondary and last primary. The assumption here was that the more advanced treatment types are more likely to be located at larger aggregations of urban populations. The number of people "not connected" to any type of treatment plant was also calculated for each grid cell. Total N emission from WWTPs was then calculated for each grid cell based on the approach of Mörth et al. (2007).

The MESAW model and model parameterisation

MESAW is a statistical model for source apportionment of riverine loads of pollutants developed by Grimvall and Stålnacke (1996). This model-approach uses nonlinear regression for simultaneous estimation of export coefficients to surface waters

HESSD

11, 10829–10858, 2014

Nitrogen surface water retention in the **Baltic Sea drainage** basin

P. Stålnacke et al.

Title Page

Introduction Abstract

Conclusions References

Figures

Back

Full Screen / Esc

The basic principles and major steps in the procedure included: (i) estimation of mean annual riverine N loads for a fixed time period at each monitoring site based on data for the years 1994–2006, (ii) derivation of statistics on land cover, lake area, point source emissions and atmospheric deposition (see Sect. 2.1) for each river basin, and (iii) use of a general non-linear regression expression with N loads at each river basin as the dependent/response variable and basin characteristics as covariates/explanatory variables. This gave the following generalised form of the model (Eq. 1):

$$L_{i} = \sum_{j=1}^{n} (1 - R_{1})S_{j} + (1 - R_{2})P_{j} + (1 - R_{3})D_{j} + \varepsilon_{j}$$
(1)

where L_i is the load at outlet of basin i;

 S_i is total losses from soil to water in basin i;

 P_i is the point source discharges (WWTP and industry) to waters in basin i;

 D_i is the atmospheric deposition on surface waters in sub-basin i;

 R_{1-3} denote the retention for the source emissions S, P and D, respectively;

n is the number of basins, and

 ε_{l} is the statistical error term.

The parameterisation of the model is flexible and study area specific depending on the data and expert knowledge. The model is fitted by minimising the sum of squares for the differences between observed and estimated loads. The model can be run based on absolute or relative values. If based on absolute values, the optimisation

HESSD

11, 10829–10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

l∢ ≯l

4 ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



scussion Paper

ussion Paper

Discussion Paper

Discussion Paper

10835

Discussion

Papel

procedure finds the minimum sum of squares of the absolute differences between observed and estimated transport. This procedure implies that the influence of the different rivers/basins will be a function of size. If relative values are used, the optimisation procedure finds the minimum sum of squares of relative differences between observed and estimated transport. This procedure assumes that all rivers have the same weight in the optimisation routine. In this study, we used relative values in order to give equal weight to small and large river basins.

The total loss of N from soil to water, S_i , in the *i*th sub-basin was assumed to be a function of the land cover (Eq. 2):

$$S_i = (\theta_1 a_{1i} + \theta_2 a_{2i} + \theta_3 a_{3i}) \tag{2}$$

where a_{1i} , a_{2i} and a_{3i} in our study refer to the areas of three land cover classes, i.e. cultivated land, wetlands and other land (mainly forests), respectively. θ_1 , θ_2 and θ_3 are unknown emission coefficients for the three land use categories that are statistically estimated in MESAW. The point source emissions, P_i , and atmospheric deposition on surface waters, D_i , were assumed to be known (see Sect. 2.1)

"Retention" was in our study used as a summarising expression for all hydrological and biogeochemical processes that may decrease or retard the transport of N, e.g. denitrification, sedimentation and biological uptake. Irrespective of the exact retention mechanism, the parameterisation of the retention in the different basins was done with the following two empirical functions (Eqs. 3 and 4):

$$R_i = 1 - \frac{1}{1 + \lambda \sqrt{\text{drainagearea}_i}} \quad i = 1, 2, \dots, n$$
 (3)

$$R_{i} = 1 - \frac{1}{1 + \lambda \frac{\text{lakearea}_{i}}{\text{drainagearea}_{i}}} \quad i = 1, 2, \dots, n$$

$$(4)$$

where λ denotes a non-negative parameter and R_i denote the retention in the *i*th basin.

HESSD

11, 10829-10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

[4 ▶]

- ◆

Back Close

Full Screen / Esc

Printer-friendly Version



The empirical functions were in our case derived from the conception that the removal of N takes place primarily in the surface waters, and that the removal rate is proportional to drainage basin size and subsequently is an indirect expression of the water residence time in the river basin. Moreover, for the sake of simplicity and at the risk of over-parameterisation, we assumed that the retention is the same for source categories D, S and P. Finally, by combining the parametric expressions of losses from soil to waters and retention with the empirical data, the $\theta_1, \theta_2, \theta_3$, and λ parameters were estimated simultaneously.

For estimation of total N retention, the model was first run including only 88 river basins for which we had observed annual N load (Table 1). Among these 88 were 10 smaller Danish sub-basins, all with available monitoring data, but which only constitute parts of the major Danish river basins draining to the Baltic Sea. Thereafter, the model was run with different combinations of basin sub-groups in order to obtain reasonable model coefficients and load estimates (i.e. little deviation between predicted and observed loads). The grouping of basins was based on prior knowledge of similarities between basins as well as geographic location. For example, the 10 smaller Danish sub-basins formed one group, as a residual analysis showed that these subbasins deviated from the general relationships. In the final model run (#4 in Table 1), including all the 88 basins with observed N load, both retention parameters (lake area and total drainage area) and land use category "cultivated" were statistically significant (p < 0.05). The land use category "other" (which basically is the forest land) was very close to being statistically significant (p < 0.06). "Wetland" was not statistically significant, but this land use category accounts for less than 4% of the total drainage area in the Baltic Sea drainage basin. This model parameterisation was then used to determine the surface water retention of N in all the 117 major river basins in the Baltic Sea drainage area. This included 78 river basins with observed N load (excluding the 10 smaller Danish sub-basins), and also an additional 39 unmonitored river basins.

HESSD

11, 10829–10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

I∢ ►I

- ◆

Back Close

Full Screen / Esc

Printer-friendly Version



The MESAW model was able to estimate the N load at the river mouth of 88 Baltic Sea rivers for which we had observed data with a sufficient degree of accuracy (Fig. 1, upper panel; Table 1). However, when we show the obtained relationships using unit-area (specific) load, the model underestimates the load (Fig. 1, lower panel). Worth to notice is also that the 10 Danish sub-basins included deviate from the general relationship. These 10 smaller sub-basins have a high observed specific N load, which is not well predicted by the model.

Our results show that around 380 000 t of N are annually retained in surface waters draining to the Baltic Sea (streams, rivers, reservoirs and lakes; Fig. 2). The total annual riverine load from the 117 basins to the Baltic Sea was estimated to 570 000 t of N, giving a total surface water N retention of around 40%. This is substantially higher than given by Mörth et al. (2007) who reported a mean in-stream N retention of 19% in the Baltic Sea rivers. The spatial distribution of the relative surface water retention is shown in Fig. 3. In terms of absolute retention values, three major river basins account for 50% of the total retention in the 117 basins; i.e. around 104 000 t of N is retained in Neva, 55 000 t in Vistula and 32 000 t in Oder.

Most of the retention occurs in lakes, as indicated by a strong relationship between N retention (%) and share of lake area in the river drainage areas (up to 20 % lake area; Fig. 4). In Göta älv, we estimated a total N retention of 72 %, whereof 67 % occurred in the lakes of that drainage area (Lake Vänern primarily). Other river basins with high retention were Kymijoki (70 %), Motalaström (73 %) and Neva (74 %). All these basins are characterised by a high percentage of lakes. Low retention was estimated for lake-poor basins, e.g. Aurajoki (2 %), Kasari (4 %) and Kelia (3 %). This is in accordance with earlier studies, where the highest N retention has been found in river basins with a large proportion of lakes. In a comparison of N retention in four selected watersheds in Europe, representing a wide range in climate, hydrology and nutrient loads, Hejzlar et al. (2009) found the highest retention values in the two watersheds with lakes as

HESSD

Paper

Discussion Paper

Discussion Paper

Discussion

Paper

11, 10829–10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

→

Back Close

Full Screen / Esc

Printer-friendly Version



Back

Printer-friendly Version

Interactive Discussion



compared to the two other mostly or entirely lake-less watersheds. A global-scale analysis by Harrison et al. (2009) indicated that lakes and reservoirs are important sinks for N in watersheds, with small lakes (< 50 km²) retaining about half of the global total. Despite the fact that reservoirs occupy only 6% of global lentic surface area, the reservoirs were estimated to retain about 33% of the total N retained by lentic systems.

Figure 5a-d show the relationships between observed specific N load (kg N km⁻²) and share of various land cover categories and lake area in the 88 (78 for wetland) Baltic Sea basins with observed N loads. A high specific N load was generally found in river basins with a large share of cultivated land, as indicated by a strong positive relationship between specific N load (kg N km⁻²) and share of cultivated land (%; Fig. 5a). In their modeling of riverine N transport to the Baltic Sea, Mörth et al. (2007) found diffuse sources to contribute the most to the overall simulated riverine N loads. A review by Stålnacke et al. (2009) also emphasised the importance of diffuse sources (or share of cultivated land) in contributing to N loads in watersheds. HELCOM (2011) reports that 45-61 % of the total waterborne inputs of N to the Baltic Sea are from diffuse sources. The importance of wetlands in determining N loads seems highly variable, with no apparent relationship between specific N load and share of wetland area in the river basins (Fig. 5b). In a meta-analysis of the importance of wetlands for the removal of inorganic N and reduction of N export from watersheds, Jordan et al. (2011) found a large variation (0.25 to 100%) in N removal efficiency between individual wetlands. When grouped into different wetland classes, mean efficiency was highest for palustrine forested wetlands (63%) and lowest for estuarine emergent wetlands (33%).

It should be noted that there are considerable uncertainties related to estimates of nutrient loads and retention at the watershed scale. However, modelling efforts that combine comprehensive datasets on population, land cover, water discharge and quality, etc., may serve as important tools for improved watershed management and for better identification of cost-efficient measures to reduce nutrient loading. The predicted climate change is an additional factor that may significantly affect nutrient loads and retention in watersheds (Jeppesen et al., 2011). Changes in temperature and precipitation

HESSD

11, 10829–10858, 2014

Nitrogen surface water retention in the **Baltic Sea drainage** basin

P. Stålnacke et al.

Title Page

Introduction **Abstract**

Conclusions References

Full Screen / Esc

11, 10829–10858, 2014

Nitrogen surface water retention in the **Baltic Sea drainage** basin

HESSD

P. Stålnacke et al.

Title Page Introduction **Abstract** Conclusions References Back Full Screen / Esc Printer-friendly Version

Interactive Discussion

will most likely induce changes in agricultural land use, e.g. type of crops grown, rates and timing of fertiliser use etc., and thereby influence N cycling and export to coastal waters. However, given the uncertainties in predicting future climate and land use on a regional level, the predicted effects on nutrient budgets in watersheds remain highly 5 uncertain (Jeppesen et al., 2011).

Conclusions

We claim that one of the largest scientific and management uncertainties are devoted to the question on how to quantify the retention from source to river mouth. In this study, we used the MESAW statistical model to estimate the surface water N retention in the 117 river basins draining to the Baltic Sea. The MESAW model was able to estimate the N load at the river mouth of 88 Baltic Sea rivers, for which we had observed data, with a sufficient degree of accuracy. The estimated retention parameters were also statistically significant. Our results show that around 380 000 t of N are annually retained in surface waters draining to the Baltic Sea. The total annual riverine load from the 117 basins to the Baltic Sea was estimated to 570 000 t of N, giving a total surface water N retention of around 40 %. The largest retention was found in river basins with a high percentage of lakes.

The obtained results will hopefully enable the Helsinki Commission (HELCOM) to refine the nutrient load targets in the Baltic Sea Action Plan (BSAP), as well as to better identify cost-efficient measures to reduce nutrient loadings to the Baltic Sea.

Acknowledgements. This paper is a contribution from the RECOCA project, which has received funding from the BONUS + program funded jointly by European Community's Seventh framework Programme (FP7/2007-2013, grant agreement 217 246) and Baltic Sea national funding institutions. Additional funding was for the Norwegian authors provided under the research grant "AGRI-LOSS" of the Norwegian Research Council. This work was also supported by institutional research funding IUT (IUT19-17) of the Estonian Ministry of Education and Research.

Interactive Discussion

References

- Behrendt, H. and Opitz, D.: Retention of nutrients in river systems: dependence on specific runoff and hydraulic load, Hydrobiologia, 410, 111–122, 2000.
- Bergstrom, S. and Carlsson, B.: River runoff to the Baltic Sea 1950-1990, Ambio, 23, 280-287, 1994.
- Billen, G., Thieu, V., Garnier, J., and Silvestre, M.: Modelling the N cascade in regional watersheds: the case study of the Seine, Somme and Scheldt rivers, Agr. Ecosyst. Environ., 133, 234-246, 2009.
- Grimvall, A. and Stålnacke, P.: Statistical methods for source apportionment of riverine loads of pollutants, Environmetrics, 7, 201-213, 1996.
- Harrison, J. A., Maranger, R. J., Alexander, R. B., Giblin, A. E., Jacinthe, P. A., Mayorga, E., Seitzinger, S. P., Sobota, D. J., and Wollheim, W. M.: The regional and global significance of nitrogen removal in lakes and reservoirs, Biogeochemistry, 93, 143-157, doi:10.107/s10553-008-9272-x. 2009.
- ¹⁵ Hejzlar, J., Anthony, S., Arheimer, B., Behrendt, H., Bouraoui, F., Grizzetti, B., Groenendijk, P., Jeuken, M., Johnsson, H., Lo Porto, A., Kronvang, B., Panagopoulos, Y., Siderius, C., Silgram. M., Venohr, M., and Zaloudik, J.: Nitrogen and phosphorus retention in surface waters: an inter-comparison of predictions by catchment models of different complexity, J. Environ. Monitor., 11, 584–593, doi:10.1039/B901207A, 2009.
 - HELCOM: The fifth Baltic Sea pollution load compilation (PLC-5), Balt. Sea Environ. Proc. No. 128, Helsinki Commission, Helsinki, 2011.
 - Hill, B. H. and Bolgrien, D. W.: Nitrogen removal by streams and rivers of the Upper Mississippi River basin, Biogeochemistry, 102, 183-194, doi:10.1007/s10533-010-9431-8, 2011.
 - Hoffmann, C. C., Kjaergaard, C., Uusi-Kamppa, J., Hansen, H. C. B., and Kronvang, B.: Phosphorus retention in riparian buffers: review of their efficiency, J. Environ. Qual., 38, 1942-1955, 2009.
 - Jeppesen, E., Kronvang, B., Olesen, J. E., Audet, J., Sondergaard, M., Hoffmann, C. C., Andersen, H. E., Lauridsen, T. L., Liboriussen, L., Larsen, S. E., Beklioglu, M., Meerhoff, M., Ozen, A., and Ozkan, K.: Climate change effects on nitrogen loading from cultivated catchments in Europe: implications for nitrogen retention, ecological state of lakes and adaptation, Hvdrobiologia, 663, 1-21, 2011.

HESSD

11, 10829–10858, 2014

Nitrogen surface water retention in the **Baltic Sea drainage** basin

P. Stålnacke et al.

Title Page

Introduction **Abstract**

References Conclusions

Figures

Full Screen / Esc

- Jordan, S. J., Stoffer, J., and Nestlerode, J. A.: Wetlands as sinks for reactive nitrogen at continental and global scales: a meta-analysis, Ecosystems, 14, 144–155, 2011.
- Jung, H. S. and Deng, Z. Q.: Modeling of nitrogen retention in Amite River, Water Air Soil Pollut., 215, 411–425, 2011.
- Kellogg, D. Q., Gold, A. J., Cox, S., Addy, K., and August, P. V.: A geospatial approach for assessing denitrification sinks within lower-order catchments, Ecol. Eng., 36, 1596–1606, 2010.
 - Lidèn, R., Vassiljev, A., Loigu, E., Stålnacke, P., and Wittgren, H. B.: Nitrogen source apportionment using a physically and statistically based model, Ecol. Model., 114, 235–250, 1999.
- Mayorga, E., Seitzinger, S. P., Harrison, J. A., Dumont, E., Beusen, A. H. W., Bouwman, A. F., Fekete, B. M., Kroeze, C., and Van Drecht, G.: Global Nutrient Export from WaterSheds 2 (NEWS 2): model development and implementation, Environ. Modell. Softw., 25, 837–853, 2010.
- Mörth, C. M., Humborg, C., Eriksson, H., Danielsson, A., Medina, M. R., Lofgren, S., Swaney, D. P., and Rahm, L.: Modeling riverine nutrient transport to the Baltic Sea: a large-scale approach, Ambio, 36, 124–133, 2007.
- Mulholland, P. J., Helton, A. M., Poole, G. C., Hall, R. O., Hamilton, S. K., Peterson, B. J., Tank, J. L., Ashkenas, L. R., Cooper, L. W., Dahm, C. N., Dodds, W. K., Findlay, S. E. G., Gregory, S. V., Grimm, N. B., Johnson, S. L., McDowell, W. H., Meyer, J. L., Valett, H. M., Webster, J. R., Arango, C. P., Beaulieu, J. J., Bernot, M. J., Burgin, A. J., Crenshaw, C. L., Johnson, L. T., Niederlehner, B. R., O'Brien, J. M., Potter, J. D., Sheibley, R. W., Sobota, D. J., and Thomas, S. M.: Stream denitrification across biomes and its response to anthropogenic nitrate loading, Nature, 452, 202–205, 2008.
- Povilaitis, A., Stålnacke, P., and Vassiliev, A.: Nutrient retention and export to surface waters in Lithuanian and Estonian river basins, Hydrol. Res., 43, 359–373, 2012.
- Seitzinger, S. P.: Nitrogen cycle out of reach, Nature, 452, 162–163, 2008.

20

- Seitzinger, S. P., Styles, R. V., Boyer, E. W., Alexander, R. B., Billen, G., Howarth, R. W., Mayer, B., and Van Breemen, N.: Nitrogen retention in rivers: model development and application to watersheds in the northeastern USA, Biogeochemistry, 57, 199–237, 2002.
- Seitzinger, S. P., Harrison, J. A., Böhlke, J. K., Bouwman, A. F., Lowrance, R., Peterson, B., Tobias, C., and Drecht, G. V.: Denitrification across landscapes and waterscapes: a synthesis, Ecol. Appl., 16, 2064–2090, 2006.

HESSD

11, 10829–10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

[4] ▶[

◆ •

Back Close

Full Screen / Esc

Printer-friendly Version



Stålnacke, P., Pengerud, A., Bechmann, M., Garnier, J., Humborg, C., and Novotny, V.: Nitrogen driving force and pressure relationships at contrasting scales: implications for catchment management, Int. J. River Basin Manage., 7, 221–232, 2009.

Vassiljev, A. and Stålnacke, P.: Source apportionment of nutrients in the Lake Peipsi drainage basin – experiences from a statistical model, Water Sci. Technol., 51, 309–317, 2005.

Vassiljev, A., Blinova, I., and Ennet, P.: Source apportionment of nutrients in Estonian rivers, Desalination, 226, 222–230, 2008.

Wollheim, W. M., Voosmarty, C. J., Peterson, B. J., Seitzinger, S. P., and Hopkinson, C. S.: Relationship between river size and nutrient removal, Geophys. Res. Lett., 33, L06410, doi:10.1029/2006GL025845, 2006.

10

HESSD

11, 10829–10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

[◄ ▶]

•

Full Screen / Esc

Back

Printer-friendly Version



Table 1. Results from the different MESAW model runs for estimation of total nitrogen (N) retention with different combinations of basin sub-groups. Results include estimated export coefficients (kg km $^{-2}$) from different land use classes (i.e. cultivated, wetland and other), estimated retention coefficients (dimension-less) for lake area and total drainage area, and the coefficient of determination (R^2) between observed and predicted annual loads. Standard error and t ratio of the estimated coefficients are given for each model run.

М	Model run		Dif	fuse emissic	ns	Rete	ntion	R^2	
			Cultivated (kg km ⁻²)	Wetland (kg km ⁻²)	Other (kg km ⁻²)	Lake area (dimension-less)	Drainage area (dimensionless)	(observed vs. predicted)	
1	88 monitored basins	Est. coeff.	1435	405	233	9	4 × 10 ⁻³	0.94	
	(1 group)	St. err. t ratio	929 1.54	2527 0.16	443 0.53	16 0.57	4 × 10 ⁻³ 1.03		
2	88 monitored basins	Est. coeff.	1.54	386	185	8	2×10^{-3}	0.98	
_	(3 groups)	St. err.	172 8.38	753 0.51	136 1.36	5 1.78	5 × 10 ⁻⁴ 3.60	0.98	
3	88 monitored basins	Est. coeff.	1137	208	220	11	8×10^{-4}	0.99	
	(4 groups)	St. err.	115	668	126	5	3×10^{-4}		
	, ,	t ratio	9.88	0.31	1.75	2.16	2.62		
4	88 monitored basins	Est. coeff.	1073	158	225	12	7×10^{-4}	0.99	
	(5 groups)	St. err. t ratio	109 9.85	675 0.23	123 1.83	5 2.23	3×10^{-4} 2.27		

11, 10829-10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.



Table 1. Continued.

Estimated (Estimated group ratios \pm standard error for diffuse emissions coefficients:								
Model run	Basin sub-group	Ratio \pm st. err.							
2	2 Pregolia, Narva	0.3 ± 0.2							
	3 Daugava, Neva	2.2 ± 0.3							
3	2 Pregolia, Narva	0.4 ± 0.2							
	3 Daugava, Neva	2.0 ± 0.3							
	4 10 Danish + 6 Swedish (south-west coast) basins	2.0 ± 0.8							
4	2 Pregolia, Narva	0.4 ± 0.2							
	3 Daugava, Neva	2.0 ± 0.2							
	4 10 Danish + 6 Swedish (south-west coast) basins	2.1 ± 0.8							
	5 27 Finnish basins								

11, 10829-10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

I∢ ►I

•

Back Close

Full Screen / Esc

Printer-friendly Version



Discussion Paper

Discussion Paper

Discussion Paper

Discussion Paper

Table A1. Input data to the MESAW model for estimation of total nitrogen (N) retention. Input data include land cover (cultivated, wetland, lake area, other and total drainage area; km²) and point source emissions (WWTP and industry; kg N yr⁻¹). Observed annual loads are given with the retention results in Table A2.

River basin	ID		Lai	nd cover (km	²)		Point source	es (kg N yr ⁻¹)
		Cultivated	Wetland	Lake area	Other	Total area	WWTP	Industry
Alterälven	5	18	15	6	418	457	863	(
Aurajoki	231	388	20	0	448	856	49 322	526
Botorpströmmen	98	120	1	94	772	986	0	(
Dalälven	25	1071	2158	1281	24 128	28 638	250 825	393 700
Daugava	62	18 242	973	2480	62912	84 608	2 895 199	83 017
Delångersån	28	99	21	184	1665	1969	7258	(
Emån	97	559	23	272	3572	4427	73 043	2200
Eurajoki	221	351	22	169	800	1342	0	2461
Forsmarksån	24	14	28	9	252	302	5	(
Gauja	61	3353	99	66	5432	8951	256 499	(
Gavleån	26	169	44	165	2115	2494	85 652	10 600
Gideälven	341	50	277	103	3007	3437	37	(
Göta älv	151	6669	1484	9105	34 206	51 465	517 002	882 100
Helge å	91	1116	108	220	3237	4681	98 586	(
lijoki	14	193	1933	647	11369	14 142	4400	(
Indalsälven	31	641	2162	1654	21 382	25 839	119 903	35 800
Kalajoki	173	771	234	127	3326	4457	17 282	62
Kalix älv	8	92	3030	288	14286	17 696	34 5 1 9	55 000
Karvianjoki	250	460	239	109	2673	3481	7550	(
Kasari	103	1085	211	2	1938	3236	34 256	(
Kelia	47	335	40	1	336	712	29 5 1 8	9300
Kemijoki	12	306	7633	1682	42892	52 513	50 135	125 000
Kiiminkijoki	15	81	866	96	2850	3894	7666	(
Kiskonjoki	234	255	7	44	649	955	0	(
Kokemäenjoki	21	5180	402	2265	19281	27 128	353 484	201 64
Koskenkylänjoki	404	338	5	35	571	950	0	114
Kuivajoki	132	25	355	30	942	1352	86	(
Kymijoki	41	2741	425	5971	27 138	36 275	189 501	509 272
Kyrönjoki	178	1442	320	46	3128	4936	45 276	578
Lagan	143	903	275	598	4802	6579	104 364	31 000
Lapuanjoki	177	1052	206	83	2720	4060	12 102	4650
Lestijoki	174	156	141	3	753	1053	0	(

11, 10829-10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title Page								
Abstract	Introduction							
Conclusions	References							
Tables	Figures							
I 4	►I							
•	•							
Back	Close							
Full Scre	een / Esc							
Printer-frie	ndly Version							
Printer-frie	ndly Version							



Discussion

Point sources (kg N vr⁻¹)

Industry

n

30.500

WWTP

701 774

31 242

n

341 463

87 147

36 077

38 752

63 498

23 639

860 051

13 758 343

Paper

Discussion

Discussion Paper

Discussion Paper

11, 10829-10858, 2014

Nitrogen surface water retention in the **Baltic Sea drainage** basin

HESSD

P Stålnacke et al.

Title Page

Abstract Introduction

Conclusions References

Figures

Back

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



River basin

Lielupe

Ljungan

Ljusnan

Luleäly

Ljungbyån

Lvckebvån

Lögdeälven

Mörrumsån

Mustijoki

Narva

Neva

Odra

Oulojki

PiteÄlv

Pregolia

Pvhäioki

Rickleån

Rönneå

Salaca

Siikajoki

Simojoki

Skellefteäly

Råneälven

Pärnu

Neman

Nissan

Norrström

Nyköpingsån

Närpiönjoki

Paimionjoki

Perhonjoki

Porvoonjoki

Motala ström

ID

Cultivated

12 437

44 359

73 524

Land cover (km²)

Lake area

45 020

Other

49 469

43 559

Total area

24 554

58 126

95 925

118 939

24 242

23 076

279 586

14 121

Wetland

Discussion Paper

Point sources (kg N yr⁻¹)

Industry

WWTP

Discussion Paper

Discussion Paper

Discussion Paper

11, 10829-10858, 2014

HESSD

Nitrogen surface water retention in the **Baltic Sea drainage** basin

P. Stålnacke et al.

Title Page

Introduction Abstract

Conclusions References

> Figures **Tables**

I

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



River basin

ID

Torne älv	10	264	6089	1405	32 354	40 112	52914	131 000
Töreälven	72	3	70	14	417	505	719	0
Ume älv	35	252	2169	1318	23 199	26 939	38 2 1 9	59 100
Uskelanjoki	233	472	4	4	478	959	5763	26 640
Vantaanjoki	401	541	12	52	1290	1895	39 672	12 032
Venta	80	6146	107	111	5328	11 692	580 890	0
Vironjoki	43	67	2	6	283	357	0	0
Viskan	149	365	14	136	1664	2178	44 596	0
Vistula	85	124 478	751	2268	66 398	193 894	20 541 873	547 784
Ähtävänjoki	176	737	201	225	3155	4318	2349	14 376
Ätran	147	558	50	196	2515	3320	6049	0
Öreälven	343	63	347	37	2600	3046	1801	0
Ångermanälven	33	398	2923	1921	26 572	31 815	36 673	0
Ryå		214		2	69	285	23 275	0
Lindenborg å		197		4	119	319	19624	0
Skals å		401		16	139	556	22700	0
Karup å		344		8	275	627	92 696	0
Gudenå		1563		79	961	2603	404 099	0
Århus å		183		10	130	324	134 450	0
Kolding å		180		3	85	268	32 126	0
Odense å		339		9	187	535	31 007	0
Ndr. Halleby å		272		18	128	418	31 204	0
Suså		478		24	254	756	107 901	0
Coast DE andArkona Basin	1011	1740	28	8	620	2395	74 132	0
Coast DE and Bornholm Basin	1012	7858	81	191	2455	10 585	336 061	1535
Coast DE and Fehmarn Belt	1013	8041	52	280	2148	10 522	377 142	23 830
Coast DK andArkona Basin	2011	1109	14	3	500	1626	44 132	55 702
Coast DK and Bornholm Basin	2012	446	2	0	134	581	19962	9873
Coast DK and Central Kattegat	2018	9915	194	82	824	12 459	71 261	21 316
Coast DK and Fehmarn Belt	2015	2471	14	62	1729	2961	228 639	145 739
Coast DK and Northern Kattegat	2017	376	16	13	463	629	78 572	10 873
Coast DK andSamso Belt	2014	7346	67	6	296	9204	0	2317
Coast DK and Southern Kattegat	2013	2141	27	0	237	3074	12 299	183 156
Coast DK and The Sound	2016	117	2	150	2199	422	370 565	76 197
Coast EE and Baltic Proper	3011	1102	201	40	3120	4463	38 295	0
Coast EE and Gulf of Finland	3012	1953	181	16	3694	5843	90 250	636 400
Coast EE and Gulf of Riga	3013	1610	373	34	3375	5392	71 976	0

Land cover (km²)

Lake area

Other

Total area

Wetland

Cultivated

Table A1. Continued.

River basin	ID		La	nd cover (km	²)		Point sou	irces (kg N yr ⁻¹)
		Cultivated	Wetland	Lake area	Other	Total area	WWTP	Industry
Coast FI and Baltic Proper	4013	802	15	58	8112	3716	48 827	1 275 161
Coast FI andBothnian Bay	4011	1283	608	152	9272	10 061	37 028	393 799
Coast FI andBothnian Sea	4012	2255	165	292	2607	11844	5282	123 771
Coast FI and Gulf of Finland	4014	1120	58	109	3999	5286	997	155 412
Coast LT and Baltic Proper	5011	846	34	7	713	1599	23 821	0
Coast LV and Baltic Proper	6011	2605	101	60	2491	5257	54 410	0
Coast LV and Gulf of Riga	6012	1697	210	112	4052	6071	169 910	0
Coast North of Northern Kattegat	9018	129	0	205	5857	464	178 001	0
Coast PL and Baltic Proper	7012	7144	71	251	3313	10778	191 663	14 737
Coast PL and Bornholm Basin	7011	8207	64	10	2125	14 333	67 794	0
Coast RU and Baltic Proper	8011	3552	28	345	22 109	5716	50 496	334 590
Coast RU and Gulf of Finland	8012	690	689	34	569	23 832	50 617	170 000
Coast SE andArkona Basin	9012	1182	0	2	154	1338	34 653	0
Coast SE and Baltic Proper	9014	5022	66	315	4230	19925	54 353	418 800
Coast SE and Bornholm Basin	9013	1049	24	623	14215	5618	165 765	223 000
Coast SE andBothnian Bay	9015	769	1195	821	16344	19 129	105 747	259 100
Coast SE andBothnian Sea	9016	1641	315	833	18550	21 339	159 982	1 544 000
Coast SE and Central Kattegat	9020	595	7	5	330	1878	9798	0
Coast SE and Northern Kattegat	9019	141	0	28	576	745	10 765	7600
Coast SE and Southern Kattegat	9021	1054	26	80	1195	2234	21 757	131 000
Coast SE and The Sound	9011	2019	2	15	1138	2623	11 479	11 000
Laihianjoki	201	239	21	1	461	723	6010	0
Isojoki	205	176	80	3	895	1155	0	3000
Sirppujoki	222	143	7	3	270	424	0	0
lilolanjoki	405	102	1	7	196	306	0	0

11, 10829-10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

I∢ ►I

Back Close

Full Screen / Esc

Printer-friendly Version



Discussion Paper

Discussion Paper

Discussion Paper

Table A2. Observed and predicted annual N loads $(kg \, N \, yr^{-1})$ and total N retention as estimated by the MESAW model.

River basin	basin ID Annual N load (kg N yr ⁻¹) Retention (kg N yr ⁻¹) Relative retention						
		Observed	Predicted		Total surface water	Lake	In-stream
Alterälven	5	96 331	100 515	17290	0.15	0.134	0.014
Aurajoki	231	704 385	600 476	11817	0.02	0.000	0.019
Botorpströmmen	98	173 792	171 655	197 934	0.54	0.526	0.021
Dalälven	25	5 226 692	4744728	3 2 9 6 1 2 3	0.41	0.343	0.102
Daugava	62	40 351 648	45 292 798	27 364 274	0.38	0.255	0.164
Delångersån	28	231 231	255 778	294 739	0.54	0.522	0.029
Emån	97	993 846	953813	756 687	0.44	0.417	0.043
Eurajoki	221	639 538	284 749	434 449	0.60	0.594	0.024
Forsmarksån	24	90 969	58 633	20 485	0.26	0.250	0.012
Gauja	61	4 467 000	4 443 302	690 252	0.13	0.079	0.060
Gavleån	26	559 846	456 153	378 260	0.45	0.435	0.03
Gideälven	341	474 231	568 452	229 492	0.29	0.260	0.03
Göta älv	151	15 496 154	6 222 224	15 737 523	0.72	0.673	0.13
Helge å	91	2786308	2742915	1 697 732	0.38	0.354	0.04
lijoki	14	2 2 0 5 3 8 5	2 092 250	1 372 973	0.40	0.348	0.074
Indalsälven	31	4321692	3 260 548	3 0 4 7 7 6 4	0.48	0.427	0.098
Kalajoki	173	2 2 9 4 6 1 5	1 294 900	507 684	0.28	0.249	0.04
Kalix älv	8	3505231	3 021 890	895 054	0.23	0.159	0.08
Karvianjoki	250	1 398 667	902 551	378 474	0.30	0.267	0.03
Kasari	103	1 949 457	1 593 791	74510	0.04	0.008	0.03
Kelia	47	831 729	467 939	12609	0.03	0.009	0.018
Kemijoki	12	6372308	7 897 005	4619699	0.37	0.272	0.13
Kiiminkijoki	15	746 000	719 171	246 453	0.26	0.224	0.040
Kiskonjoki	234	351 985	306 363	173 663	0.36	0.349	0.02
Kokemäenjoki	21	9839231	5 662 122	6747574	0.54	0.493	0.100
Koskenkylänjoki	404	429 846	376 743	174 023	0.32	0.302	0.020
Kuivajoki	132	388 538	252 573	72 255	0.22	0.203	0.02
Kymijoki	41	5 673 077	3 9 1 2 1 9 9	8 968 328	0.70	0.657	0.11
Kyrönjoki	178	3274615	2 201 007	353 912	0.14	0.098	0.04

HESSD

11, 10829-10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title	Page
Abstract	Introduction
Conclusions	References
Tables	Figures
[4]	►I
•	•
Back	Close
Full Scre	en / Esc
Printer-frier	ndly Version
Interactive	Discussion



Table A2. Continued.

River basin	ID	Annual N loa		Retention (kg N yr ⁻¹)	Relative		
		Observed	Predicted		Total surface water	Lake	In-stream
Lagan	143	2812308	2 375 686	2785262	0.54	0.515	0.052
Lapuanjoki	177	2 052 308	1 525 444	443 272	0.23	0.192	0.04
Lestijoki	174	448 077	339 396	20 572	0.06	0.037	0.02
Lielupe	63	13 435 786	11 941 659	2100218	0.15	0.073	0.08
Ljungan	29	1 536 538	1 751 972	1 256 416	0.42	0.374	0.07
Ljungbyån	96	241 923	340 462	40 219	0.11	0.087	0.02
Ljusnan	27	2822077	3 149 047	1715354	0.35	0.291	0.08
Luleälv	6	2920615	2 572 731	2688010	0.51	0.459	0.09
Lyckebyån	95	221 462	158 152	79 930	0.34	0.323	0.019
Lögdeälven	342	234 077	272 877	68 367	0.20	0.179	0.02
Motala ström	99	3 017 538	2 067 763	5 577 661	0.73	0.708	0.07
Mustijoki	402	620 923	388 273	59 428	0.13	0.117	0.01
Mörrumsån	93	834 923	557 809	951 339	0.63	0.616	0.03
Narva	46	5 034 077	5 400 364	6 902 138	0.56	0.490	0.14
Neman	83	44 323 731	46 377 160	20 173 375	0.30	0.158	0.17
Neva	42	44 616 846	36 056 404	104 559 254	0.74	0.652	0.26
Nissan	145	1 368 846	1 231 196	893 156	0.42	0.399	0.03
Norrström	101	3 637 692	4 695 747	7 182 353	0.60	0.564	0.093
Nyköpingsån	100	730 077	792 009	1 293 905	0.62	0.603	0.04
Närpiönjoki	202	657 615	432 931	32 255	0.07	0.049	0.02
Odra	87	70 289 195	73 974 593	31 717 905	0.30	0.138	0.18
Oulojki	16	2894615	2598002	3708470	0.59	0.545	0.09
Paimionjoki	232	900 846	680 805	114 622	0.14	0.125	0.02
Perhonjoki	175	815 769	688 291	209 547	0.23	0.208	0.03
PiteÄlv	4	1 594 231	1 492 285	966 100	0.39	0.350	0.06
Porvoonjoki	403	1 303 615	723 513	107 528	0.13	0.108	0.02
Pregolia	84	4 580 143	4 207 286	1 429 755	0.25	0.195	0.07
Pyhäjoki	172	1 127 385	807 208	504218	0.38	0.359	0.03
Pärnu	601	3 091 070	3 193 671	219 537	0.06	0.013	0.05
Rickleån	1	283 462	233 266	181 333	0.44	0.422	0.02
Rönneå	142	2587846	1511841	682 779	0.31	0.291	0.02
Råneälven	71	540 308	714315	177 607	0.20	0.164	0.04

11, 10829–10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title	Page
Abstract	Introduction
Conclusions	References
Tables	Figures
[4	►I
■	•
Back	Close
Full Scre	en / Esc
Printer-frier	ndly Version
Interactive	Discussion



Discussion Paper

Discussion Paper

Table A2. Continued.

River basin	ID	Annual N loa	ıd (kg N yr ⁻¹)	Retention (kg N yr ⁻¹)	Relative i	retention	
		Observed	Predicted		Total surface water	Lake	In-stream
Salaca	602	2 287 635	1 585 606	377 174	0.19	0.160	0.038
Siikajoki	171	1 332 615	1 127 084	266 866	0.19	0.157	0.041
Simojoki	131	748 231	471 133	286 563	0.38	0.355	0.036
Skellefteälv	2	1 319 385	1 124 731	1 475 798	0.57	0.536	0.068
Torne älv	10	5 154 615	5 552 103	3319728	0.37	0.290	0.119
Töreälven	72	89 992	83 532	28 567	0.25	0.244	0.015
Ume älv	35	3 359 846	3 522 076	2619449	0.43	0.363	0.099
Uskelanjoki	233	508 182	652 521	47 115	0.07	0.048	0.020
Vantaanjoki	401	1 283 000	753 105	269 584	0.26	0.242	0.028
Venta	80	6 649 974	7 118 779	1 365 064	0.16	0.100	0.068
Vironjoki	43	213 534	122 758	26 503	0.18	0.167	0.013
Viskan	149	1 568 692	1 016 516	792 104	0.44	0.420	0.030
Vistula	85	112 041 104	116 917 897	55 292 179	0.32	0.120	0.229
Ähtävänjoki	176	419608	1 049 732	713 541	0.40	0.378	0.042
Ätran	147	2007769	1 529 797	1 155 539	0.43	0.408	0.037
Öreälven	343	491 769	605 790	110818	0.15	0.123	0.036
Ångermanälven	33	4 223 154	3 798 849	3 450 419	0.48	0.413	0.107
Ry å		537 807	495 987				
Lindenborg å		724 156	458 904				
Skals å		683 604	743 902				
Karup å		720 306	866 486				
Gudenå		3 075 608	3 177 587				
Århus å		442719	446 084				
Kolding å		651 265	423 277				
Odense å		1 071 416	740 493				
Ndr. Halleby å		275 250	473 721				
Suså		961 097	952 650				
Coast DE and Arkona Basin	1011		1 953 735	139 436	0.07	0.036	0.032
Coast DE and Bornholm Basin	1012		7 394 183	2 176 860	0.23	0.174	0.065
Coast DE and Fehmarn Belt	1013		7 094 187	2843034	0.29	0.237	0.065
Coast DK and Arkona Basin	2011		1 345 482	61 852	0.04	0.018	0.026
Coast DK and Bornholm Basin	2012		529 791	8 593	0.02	0.000	0.016
Coast DK and Central Kattegat	2018		9 543 967	1 505 255	0.14	0.071	0.070
Coast DK and Fehmarn Belt	2015		2715470	783 402	0.22	0.195	0.035
Coast DK and Northern Kattegat	2017		483 61 1	127 542	0.21	0.195	0.017
Coast DK and Samso Belt	2014		7 432 683	537 534	0.07	0.007	0.061
Coast DK and Southern Kattegat	2013		2 458 534	91 878	0.04	0.000	0.036
Coast DK and The Sound	2016		232 761	984 193	0.81	0.806	0.014

HESSD

11, 10829-10858, 2014

Nitrogen surface water retention in the **Baltic Sea drainage** basin

P. Stålnacke et al.

Title Page

Abstract Introduction

Conclusions References

> **Tables** Figures

1⋖ ►I

Close Back

Full Screen / Esc

Printer-friendly Version



Table A2. Continued.

River basin	ID	Annual N load (kg N yr ⁻¹)	Retention (kg N yr ⁻¹)	Relative i	retention	
		Observed Predicted		Total surface water	Lake	In-stream
Coast EE and Baltic Proper	3011	1 711 747	261 982	0.13	0.094	0.043
Coast EE and Gulf of Finland	3012	3 399 885	289 177	0.08	0.031	0.049
Coast EE and Gulf of Riga	3013	2 339 545	295 661	0.11	0.068	0.047
Coast FI and Baltic Proper	4013	3 285 098	754 614	0.19	0.153	0.039
Coast FI andBothnian Bay	4011	3 211 420	818 564	0.20	0.149	0.063
Coast FI andBothnian Sea	4012	2 382 056	908 814	0.28	0.223	0.068
Coast FI and Gulf of Finland	4014	1 783 711	535 861	0.23	0.193	0.047
Coast LT and Baltic Proper	5011	1 024 349	78 227	0.07	0.046	0.026
Coast LV and Baltic Proper	6011	2 9 1 9 6 3 2	550 310	0.16	0.118	0.047
Coast LV and Gulf of Riga	6012	2 347 634	656 593	0.22	0.178	0.050
Coast North of Northern Kattegat	9018	291 927	1 530 714	0.84	0.838	0.014
Coast PL and Baltic Proper	7012	6 523 722	2 3 4 9 5 1 3	0.26	0.213	0.065
Coast PL and Bornholm Basin	7011	8 603 413	770 891	0.08	0.008	0.075
Coast RU and Baltic Proper	8011	5 280 324	4 169 888	0.44	0.413	0.048
Coast RU and Gulf of Finland	8012	1 082 667	132 001	0.11	0.016	0.094
Coast SE andArkona Basin	9012	1 284 175	55 321	0.04	0.018	0.024
Coast SE and Baltic Proper	9014	5 408 956	1 605 059	0.23	0.156	0.087
Coast SE and Bornholm Basin	9013	2 193 909	3 088 678	0.58	0.564	0.048
Coast SE andBothnian Bay	9015	3 191 350	2 0 4 2 1 1 3	0.39	0.333	0.085
Coast SE andBothnian Sea	9016	4 986 008	2 9 8 1 1 7 3	0.37	0.313	0.089
Coast SE and Central Kattegat	9020	687 471	41 291	0.06	0.029	0.028
Coast SE and Northern Kattegat	9019	222 276	101 656	0.31	0.301	0.018
Coast SE and Southern Kattegat	9021	1 120 775	520 464	0.32	0.295	0.031
Coast SE and The Sound	9011	2 227 338	232 256	0.09	0.063	0.033
Laihianjoki	201	356 461	13 468	0.04	0.019	0.018
Isojoki	205	385 234	21 891	0.05	0.032	0.022
Sirppujoki	222	195 592	21 695	0.10	0.087	0.014
lilolanjoki	405	124 007	33 175	0.21	0.202	0.012

11, 10829-10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

→

Close

Full Screen / Esc

Back

Printer-friendly Version






11, 10829-10858, 2014


HESSD

Nitrogen surface water retention in the **Baltic Sea drainage** basin

P. Stålnacke et al.










Figure 1. Relationship between observed and predicted annual N load (kt N yr⁻¹; upper panel) and specific observed and predicted N load (kg N yr⁻¹ km⁻²; lower panel) in the 88 Baltic Sea basins with observed N load (lower panel).




Figure 2. Total estimated nitrogen (N) load (kt N yr⁻¹) in the 117 basins of the Baltic Sea drainage area. Total retention is given as the difference between the estimated total load if no retention and the estimated total riverine net N load.

11, 10829-10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

I≼ ≻I

◆ Back Close

Full Screen / Esc

Printer-friendly Version



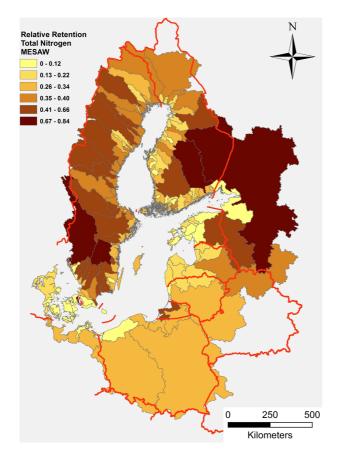


Figure 3. Relative total nitrogen (N) retention in the Baltic Sea drainage basins.

11, 10829-10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

I ◀ ▶I

■ Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion






11, 10829-10858, 2014


Nitrogen surface water retention in the **Baltic Sea drainage** basin

HESSD

P. Stålnacke et al.










Figure 4. Relationship between estimated retention (%) and total drainage area (km²; upper panel) and share of lake area (% of total drainage area; lower panel) for 117 Baltic Sea basins.

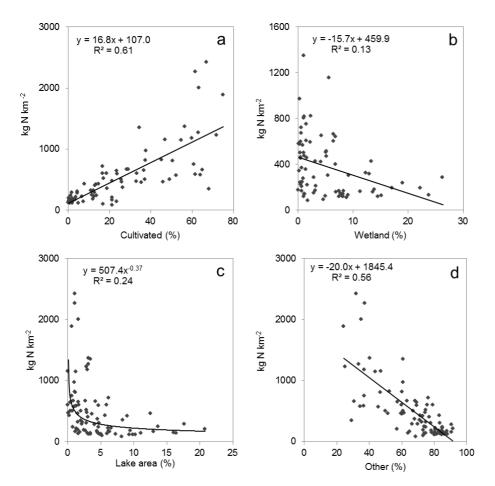


Figure 5. Relationship between specific N load (kg N km⁻²) and share of **(a)** cultivated, **(b)** wetland, **(c)** lake and **(d)** other area (in % of total drainage area) in the 88 (78 for wetland) Baltic Sea basins with observed N load.

11, 10829-10858, 2014

Nitrogen surface water retention in the Baltic Sea drainage basin

P. Stålnacke et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

l∢ ≯l

■ Back Close

Full Screen / Esc

Printer-friendly Version

