## Anonymous Referee #1

In my opinion the authors have made an improvement in analyzing and interpreting drought features from 2000-2010 in the Poyang lake region. However, my main concern is whether the authors correctly applied SPI concept in defining SLI. Before defining the SLI in their equation (1), the authors should evaluate and verify that the monthly (or 2 or 3-month) averaged lake level variation satisfies the Gamma-distribution. The authors should present a figure showing this verification result, similar to Fig. 1 in the paper by Shukla and Wood (2008). Such a result will provide evidence to convince the readers that indeed the lake level variation fits the Gamma-distribution and, thus, a form analogous to that used in defining SPI may be used to define the SLI. I seriously doubt that the lake level meets the Gamma-distribution because it is a different kind of variable from the precipitation or stream runoff which has accumulated values for specific time segments. Until such a distribution is verified equation (1) cannot be used to describe lake level variation and the results are meaningless. Therefore this manuscript in its current form cannot be accepted for publication.

### **Response:**

We thank the reviewer for the comment. Upon the comment, in the revised manuscript we supplied with a new figure (Figure 2), which is described in line 359-363 (highlighted in red). The figure shows that the monthly lake stage fits well with the Gamma distribution at a significant level of 1% for all the calendar months required in McKee et al (1993) and Lloyd-Hughes & Saunders (2002). We appreciate it very much for the constructive comment, which is valuable to enhance the scientific ground of the present study.

We scrutinized Figure 1 in the paper by Shukla & Wood (2008) (shown below). It uses SRI (-3, 3) as the horizontal coordinate axis, and precipitation (0, 800) as the vertical coordinate axis. A Log function is fitted for the data, which is difficult to be understood for negative values (-3,0) and zero. Instead, we adopted the approach, similar to Figure 1 described in Lloyd-Hughes & Saunders (2002) (shown below), for verifying the fits with the Gamma distribution.

## References

Lloyd-Hughes, B., Saunders, M., 2002. A drought climatology for Europe. Int. J. Climato., 22, 1571–1592

McKee, T. B., Doesken, N. J., Kliest, J., 1993. The relationship of drought frequency and duration to time scales. Proceedings of the 8th Conference of Applied Climatology, 17–22 January, Anaheim, CA. American Meteorological Society, Boston, MA. 179–184.

L02405

L02405




Figure 1. The simulated historical (1955 to 2005) distribution of 3-month runoff (areal average depth) accumulations for March, April and May in the Feather River basin. The sample is fitted with Gamma and Log Normal (LN2) distributions. The SRI (bottom axis) is the unit standard normal deviate associated with the percentiles of the runoff value (top axis).

The above figure is from Shukla & Wood (2008).

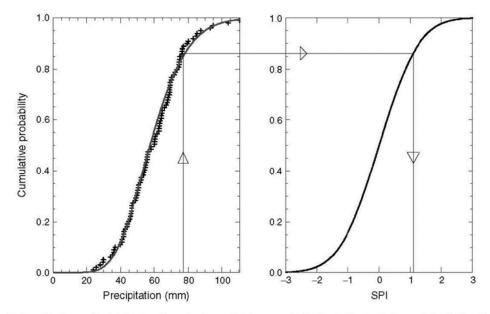


Figure 1. Example of an equiprobability transformation from a fitted gamma distribution to the standard normal distribution. Data are for the 3 month (DJF) average precipitation over the southeast of England. (After Edwards and McKee (1997))

The above figure is from Lloyd-Hughes & Saunders (2002).

# Anonymous Referee #2

An in-depth review of the equations is required in order to avoid misuse of mathematical symbols.

# **Response:**

Thank you very much for the critical review and the constructive suggestions.

For instance, k is used to indicate the generic unit of time (i.e. month) in Eq. (2). Then, j is used to define the generic month in Eq. (5). Also, j is greater than m in Eq. (6a), but is equal to m in Eq. (6b).

# **Response:**

*j* indicates a calendar month and k is a sequential month. Use of *j* in equations (6) & (7) leads to the problem you point out. In the revision, we replaced *j* with *l* in the equations (line 254 and 261).

I suggest to avoid useless subscripts, such as "a" from Eq. (5) to Eq. (7b) as, in my opinion, the anomaly "a"does not need a counter.

# **Response:**

Upon the comment, we remove the "a" from all the subscripts. In the revision, we use,

for example,  $\widetilde{X}$  , for the anomaly.

Check the equation numbering: Eq. (7a) comes before Eq. (6b).

# **Response:**

In the revision, upon the comments from the handling editor, we removed equations (6b) and (7b). Thank you.

In eq. (2) I would replace SPI with SLI.

# **Response:**

Changed as suggested.

Hays must be Hayes.

# **Response:**

Corrected in the revision.

### Anonymous Referee #3

The reviewer is very glad to see this manuscript, which addresses a significant scientific issue, has been improved considerably in terms of structure and presentation. The methodology on multi-scale modeling and analysis is clarified and systemically introduced, and the results are interpreted and discussed in a clear and consistent way. The study made comprehensive analysis on the draught events of the Poyang Lake in recent decade and provided insightful views on the causes of draughts (intensity and severity) with solid evidences from multi-scale water budget models. In particular, the study provided quantitative and qualitative evaluation on the influences of the Three Gorges Dam (TGD) on water deficit of the Poyang Lake Basin, which is a helpful to ease recent debates on the role of TGD (e.g., Guo et al., 2012, Feng et al., 2014, Song & Ke, 2014). The authors should be applauded for their efforts in improving the clarity and overall impact of the manuscript, which is not easy as there involves analyses on multiple spatial scales, treatments of multi-sources data, and link of ideas from different perspectives. From the reviewer's standpoint, there are several issues (mostly about language) that need to be addressed before final publication.

## **Response:**

We are deeply impressed by the reviewer's comments. It summarizes the significance of the study issue, the novelty of the study methodology, the completeness of the data used, the comprehensiveness of the analysis results, and the difficulty to link the ideas from different perspectives. It is truly a valuable encouragement for us to continue the study and contribute good works to scientific community. In addition, we appreciate it very much for the following constructive and very specific comments on the manuscript.

### Specific comments:

Line 137: 'Feng et al. (2012) used 250-m satellite images.....' this sentence is mainly a repeat of the sentence in line 103. It is better to start with 'Feng et al. (2012) quantified the drought severity of Poyang Lake in 2011 and showed that the drought was primarily due to......'

## **Response:**

Revised as suggested (line 136-137).

Line 203: 'in the case of ...' should be 'in case of'?

# **Response:**

Revised as suggested (line 201).

Line 380: 'It has several difficulties to perform.....' awkward phrase. It is better to be replaced with "It has been difficult to perform....."

# **Response:**

Revised as suggested (line 377).

Line 382: 'the lake has a remarkable surface variation.....' What kind of surface variation? Use clear expression as 'the lake inundation area shows remarkable variation'

### **Response:**

Revised as suggested (line 379).

Line 402: is 'annual variability' correct here? It seems to be 'seasonal variation', as it is about how to obtain monthly data form yearly mean data.

### **Response:**

Revised as suggested (line 399).

Line 545: 'Concerning water budget for a drought event, it was.....' remove concerning and start the sentence with 'The water budget was .....'

# **Response:**

Revised as suggested (line 529).

Line 561: 'While the inflow reduction generated from combined hydroclimatic change' Note that a sentence should follow the word 'while' and re-consider the use of 'generated from'. Revise it to 'While the inflow reduction was caused by (resulted from) combined hydroclimatic change'

## **Response:**

Revised as suggested (line 545).

Line 599: 'the water deficit increased.....'Re-consider the use of 'increased'. It is better to use 'worsened' or 'enhanced'?

### **Response:**

The 'enhanced' is used in the revision (line 577)

Line 676: Replace 'However' with 'Overall'

# **Response:**

Revised as suggested (line 654).

Line 678: Remove 'Overall' and start with 'The findings of this study ......'

# **Response:**

Revised as suggested (line 656).

Line 679: Re-phrase the sentence. The meaning is not clear. What is 'droughts in the changing climate and anthropogenic influences'?

Line 680: what the word 'It' refer to?

Line 680-682: These sentences need to be modified to make clear statements on the potentials of this research.

# **Response:**

Upon the comments, we reform the last paragraph (line 656-661).

# Hydroclimatological influences on recently increased droughts in China's largest freshwater lake

10

5

Yuanbo Liu<sup>\*</sup>, Guiping Wu

15

	Nanjing Institute of Geography & Limnology
	Chinese Academy of Sciences
20	73# East Beijing Road, Nanjing 210008, China
	Email: ybliu@niglas.ac.cn, yb218@yahoo.com

0

### Abstract

Lake droughts are the consequences of climatic, hydrologic and anthropogenic

- 25 influences. Quantification of the droughts and clarification of contributions from the individual influences are essential for understanding drought features and their causation structure, which is highly valuable for policymakers to make effective adaption, especially under the changing climate situations. This study examines Poyang Lake, the China's largest freshwater lake, which has been undergoing drastic
- 30 hydrological alternation in recent decade. Standardized lake stage is used to identify and quantify the lake droughts, and hydroclimatic contributions are determined with water budget analysis, in which absolute deficiency is defined in reference to normal hydrologic condition. Our analyses demonstrate that in the recent decade the lake droughts worsened in terms of duration, frequency, intensity and severity.
- 35 Hydroclimatic contributions to each individual drought varied from one to another, and the overall contribution to the decadal lake droughts came from decreased inflow, increased outflow, and reduced precipitation and increased evapotranspiration at the lake region. The decreased inflow resulted mainly from reduced precipitation and less from increased evapotranspiration over the Poyang Lake Basin. The increased outflow
- 40 was attributable to the weakened blocking effects of the Yangtze River, in which the Three Gorges Dam (TGD) established upstream. The TGD impoundments were not responsible for the increased number of drought events, but they may have intensified the droughts and changed the frequency of classified droughts. However, its contribution is limited in comparison with the hydroclimatic influences. Hence, the

45 recently increased droughts were the hydroclimatic consequences, with less important 45 contribution from anthropogenic influences. The findings provide an example of 45 intensified lake droughts, and offer an insightful view into lake droughts under the 45 hydroclimatic and anthropogenic influences. It should be valuable for improving our 45 understanding of lake droughts, and for promoting effective climate adaptation and

50 water resources management practices.

**Keywords**: droughts, climate change, hydroclimatology, freshwater lake, water resources management

# 1. Introduction

- A drought is a temporary lack of water caused by abnormal climatic or environmental influences, among other factors (*Kallis*, 2008; *Mishra and Singh*, 2010; *and references therein*). There are meteorological droughts (abnormal precipitation deficits), hydrological droughts (abnormal streamflow, groundwater, or lake deficits), agricultural droughts (abnormal soil moisture deficits), ecological droughts (abnormal water deficits causing stress on ecosystems), and socio-economic droughts (abnormal failures of water supply to meet economic and social demands) (*Tallaksen and van Lanen*, 2004; *Kallis*, 2008; *Mishra and Singh*, 2010). The drought phenomena may have different temporal features and causation structure (*Kallis*, 2008; *Mishra and Singh*, 2010). It is anticipated that droughts would likely increase owing to global
- climate change (*Kallis*, 2008; *Mishra and Singh*, 2010).

Hydrological droughts occur when land water decreases significantly below its

normal conditions, represented by low water levels in streams, lakes, reservoirs and groundwater as well (Nalbantis and Tsakiris, 2009; Keskin and Sorman, 2010). Streamflow droughts may occur with basin-scale precipitation deficiency and/or excessive evapotranspiration (Zelenhasic and Salvai, 1987; Tallaksen et al., 1997; 70 Kingston et al., 2013). In addition to local precipitation and evaporation, lake droughts involve other hydrological components, including inflows from streams surrounding the lake and outflows out of the lake. Hence, lake droughts can be more complicated than streamflow droughts in causation structure. Furthermore, both 75 inflows and outflows may be affected by human activities, for example, groundwater pumping, reservoir construction, or land cover change (Wilcox et al., 2010). Therefore, lake droughts are the consequences of combined climatic, hydrologic and anthropogenic influences. In a disciplinary sense, in contrast to floods that have been given a great deal of attention in hydrology, droughts are not yet comprehensively understood (Kallis, 2008; Mishra and Singh, 2011). Quantification of lake droughts 80 and clarification of contributions from individual influences are essential for understanding drought features and their causation structure, which is highly valuable for policymakers to make effective adaption, especially under the changing climate situations. Place-based drought analysis is a starting point towards integrated theories

85 of drought (*Kallis*, 2008).

Poyang Lake is the China's largest freshwater lake, which has been undergoing drastic hydrological alterations in recent decade (*Jiao*, 2009; *Finlayson et al.*, 2010; *Hervé et al.*, 2011; *Liu et al.*, 2013; *Zhang et al.*, 2014). The lake is located at the

3

south bank of the Yangtze River, which is a humid monsoon climatic region.

- Although the region historically experiences significant floods (*Shankman and Liang*, 2003; *Shankman et al.*, 2006), severe lake droughts have occurred frequently in the recent decade, resulting in tremendous hydrological, biological, ecological and economic consequences (*Feng et al.*, 2012; *Environment News Service*, 2012; *Wu and Liu*, 2014). Because the lake is the primary part of the well-known Poyang Lake
  Wetland and the lake region serves as an important food base for China, the
- frequently occurred lake droughts have also received increasing international attention (*Jiao*, 2009; *Finlayson et al.*, 2010; *Liu et al.*, 2011; *Environment News Service*, 2012; *The Ramsar Convention*, 2012; *Zhang et al.*, 2012, 2014).

Since lake droughts usually exhibit as an abnormal decline in lake stage or lake

- size, a number of studies documented the decline feature in Poyang Lake and its controlling factors (*Guo et al.*, 2012; *Zhang et al.*, 2012; *Liu et al.*, 2013; *Lai et al.*, 2014a; *Zhang et al.*, 2014). Feng et al. (2012) used 250-m satellite images and reported that the lake size had a decreasing trend between 2000 and 2010. Liu et al. (2013) revealed an abrupt decrease in the lake size in 2006, dominant in October and
- November. Zhang et al. (2014) demonstrated that the lake stage fell to the lowest during the 2000s compared to previous decades, in particular significantly lower in autumn recession periods. Since Poyang Lake receives inflows from its surrounding basin and discharges into the Yangtze River via a narrow outlet at the Hukou (Figure 1), the strong lake-river interaction makes it complex to separate relative impacts of the inflow and outflow on the lake stage (*Hu et al.*, 2007; *Lai et al.*, 2014a). Zhang et

al. (2014) employed a hydrodynamic model for Poyang Lake for the separation and declared that the lake decline in the 2000s was primarily ascribed to the weakened blocking effect of the Yangtze River. Compared to climate variability on the lake basin, modifications to the Yangtze River flows have had a much greater influence on

- the seasonal (September-October) dryness of the lake (*Zhang et al.*, 2014). The modification was largely attributable to the operation of the Three Gorges Dam (TGD), established upstream of the Yangtze River in 2003. Water impoundments of the TGD incurred water level drops with an average estimate of 2 m at the outlet of Poyang Lake in mid-September to November for 2003-2008 (*Guo et al.* 2012; *Zhang*
- *et al.* 2012). Alternatively, Lai et al. (2013) developed a hydrodynamic model for the middle Yangtze River region (CHAM-Yangtze), in which coupled both Poyang Lake and the Yangtze River to account for the lake-river interactions explicitly. They demonstrated that the lake stage was more sensitive to the alternation in lake inflow compared to the same discharge modification in the Yangtze River (*Lai et al.*, 2014a).
- 125 The recent extremely low water levels in the Yangtze River resulted mainly from remarkable decline in inflows to the River, rather than solely from the TGD impoundments (*Lai et al.*, 2014b). Indeed, these studies highlighted the complexity of the multiple influences on Poyang Lake's decline in the complex basin-lake-river system.
- Definitely, drought differs from low water level and persistent dryness. Water level can be low in seasonal dry seasons, but it does not necessarily constitute a drought (*Smakhtin*, 2001). Persistent dryness refers to water decrease in a long run,

equivalent to decreasing trend or shrinkage, which is usually unrecoverable in a short time (*Zhang et al.*, 2012). Droughts are complex events that have a recurrent feature,

and it may occur in any season lasting several months or longer (*Todd et al.*, 2013).
Feng et al. (2012) quantified the drought severity of Poyang Lake in 2011 and showed that the drought was primarily due to low basin-scale precipitation, rather than mis-balanced discharge between the Lake and the Yangtze River with TGD impoundments. Very recently, Wu and Liu (2014) used satellite-delineated inundation area to quantify two lake droughts occurred in 2006 and 2011. Statistical comparison indicated that the 2006 drought was mainly attributable to abnormal decrease of water

flow in the Yangtze River and the 2011 drought was due to combined influences of the Poyang Lake Basin and the Yangtze River. Although the studies specified two extreme drought events, neither of them offered a full explanation to the frequently occurred droughts in Poyang Lake.

145 Occurred droughts in Poyang Lake.

In principle, drought identification, quantification or characterization with a consistent standard is a prerequisite for drought analysis. However, few studies have comprehensively quantified and addressed the Poyang Lake droughts in the 2000s. The current understanding of the Lake's decline in autumn cannot provide a complete

150 explanation to the lake droughts spanning non-autumn seasons. It remains unknown to what extent the climatic, hydrologic and anthropogenic influences have contributed to the lake droughts, which is one of key issues identified for developing integrated, interdisciplinary theories of droughts (*Kallis*, 2008). Especially for practice, clarification of the multiple influences on the recently increased droughts is essential 155 to effective prevention of the droughts.

Complicated causality of lake droughts requires robust approach for determining the contributions from multiple influences. Analogous to standardized precipitation index, this study utilizes standardized lake index to quantify lake droughts (Section 2). With the principle of lake water balance, it proposes to define an absolute deficiency

- 160 for each water component and determine their relative contributions to lake droughts (Section 2). The approach is applicable to basin-scale water balance, quantifying regional hydroclimatic influences on lake inflow, and subsequently on lake droughts (Section 2). Poyang Lake droughts are examined with the proposed approach, in combination with five-decade hydroclimatic data including latest satellite products
- 165 (Section 3). The drought features in the 2000s and its mechanism are addressed subsequently (Section 4). Our findings should be valuable for improving our understanding of lake droughts under the changing climate situations and be useful for local water resources management and climate change adaptation.

### 2. Methodology

Drought has a multi-faceted nature. Major attributes of a drought event involve initiation, termination, duration, severity, magnitude, and intensity, as well as spatial extent for the case of meteorological or agricultural droughts (*Yevjevich*, 1967; *Dracup et al.*, 1980; *Wilhite and Glantz*, 1985; *McKee et al.*, 1993; *Mishra and Singh*, 2010; *Spinoni et al.*, 2014). Drought initiation time is the starting of the drought.
Termination time is the end when the drought no longer persists. Drought duration is the period between the initiation and the termination (*Yevjevich*, 1967; *Mishra and*

*Singh*, 2010). Drought severity is the total, cumulative water deficient for the duration. Drought magnitude is a derivative of drought severity, defined as the average water deficit in the drought period (*Dracup et al.*, 1980; *Wilhite and Glantz*, 1985). Drought

180 intensity usually refers to the largest departure from the normal conditions (*McKee et al.*, 1993; *Spinoni et al.*, 2014). For a given historical period, drought description also includes drought frequency, which refers to the number of drought events occurred (*Mishra and Singh*, 2010; *Spinoni et al.*, 2014).

## 2.1 Quantification of Lake Droughts

- For quantitative analysis, various indices have been proposed to characterize the complex features of droughts (*Dracup et al.*, 1980; *Keyantash and Dracup*, 2002; *Mishra and Singh*, 2010; 2011). Among the numerous indices, standardized precipitation index (SPI) is commonly used (*McKee et al.*, 1993; *Mishra and Singh*, 2010). It is a normalized dimensionless index, defined as the difference of
- 190 precipitation from the mean divided by the standard deviation for a given period, in which a Gamma distribution is generally fitted to the long-term precipitation records for each calendar month to account for seasonal differences (*McKee et al.*, 1993). The SPI is simple but capable of quantifying drought features, and has been recently recommended by the World Meteorological Organization (WMO) to characterize 195 meteorological droughts (*Hayes et al.*, 2011). Despite it was proposed to quantify precipitation deficiency, the SPI methodology has been applied in a similar manner to other hydroclimatic variables, for example, streamflow discharge, soil moisture,
  - reservoir storage, and groundwater level (McKee et al., 1993; Sheffield et al., 2004;

Vicente-Serrano and López-Moreno, 2005; Mendicino et al., 2008; Shukla and Wood,
200 2008).

In case of lake drought, it can be described with lake stage, lake area or water storage. Because the time series data of lake area or water storage are generally unavailable, lake stage is feasible for analysis. Analogue to SPI, standardized lake index (SLI) is described as follows

205 
$$\operatorname{SLI}_{ij} = \frac{L_{ij} - \overline{L}_j}{\sigma_j}, \qquad (1)$$

where  $L_{ij}$  is the monthly average lake stage (unit in m) of year *i* and month *j* (*j* = 1, 2, ..., 12), normalized with a gamma distribution (*McKee et al.*, 1993).  $\overline{L}_j$  is the multi-year mean of monthly average stage for month *j*, and  $\sigma_j$  is one standard deviation (S.D.) of monthly average stage for month *j*. Since SLI uses  $\overline{L}_j$  and  $\sigma_j$ , both of which are monthly dependent, it thus removes seasonal differences in lake stage.

210

220

A drought event is discernible with SLI. While a negative SLI indicates the lake stage is lower than the normal, not all the negatives can be classified into a drought event. Only when SLI deviates away from the normal by more than one standard deviation (SLI<-1), an event can be established (*McKee et al.*, 1995). Furthermore, a drought initializes when SLI becomes negative and terminates before SLI becomes positive in SLI time series (*McKee et al.*, 1995). The initialization and the termination time yield drought duration (unit in day, month or year). Once all the drought events are identified, drought frequency can be determined for a given period.

In accordance with McKee et al. (1993)'s definition of SPI, SLI represents a

departure of lake stage from its normal conditions. The departure corresponds to a probability of drought intensity, highly valuable to drought risk analysis. Namely, SLI=-1 denotes an occurrence probability of 15.9% (*Lloyd-Hughes and Saunders*, 2002). Furthermore, SLI can be either positive or negative. The positive (negative)

- value indicates lake stage higher (lower) than the normal condition for the period. The negative value quantifies the drought intensity. For an individual drought event, its lowest SLI value indicates the intensity of the event (*McKee et al.*, 1993; *Spinoni et al.*, 2014). Accordingly, a drought event can be classified into four categories with its lowest SLI: extreme drought (- $\infty$ , -2.0], severe drought (-2.0, -1.5], moderate drought
- (-1.5, -1.0] and mild drought (-1.0, 0.0) (*Dracup et al.*, 1980; *McKee et al.*, 1993).In addition, drought severity of a drought event is calculated as follows

Severity = 
$$\sum_{k=m}^{k=n} SLI_k$$
, (2)

where *m* denotes the initialization time of a drought and *n* represents the termination time (*Keyantash and Dracup*, 2002; *Mishra and Singh*, 2010). Drought magnitude is then calculated as (*Keyantash and Dracup*, 2002)

$$Magnitude = Severity/duration .$$
(3)

## 2.2 Contribution of Water Deficiency to Lake Droughts

235

A lake drought results directly from an abnormal change in lake water budget. Thus, water budget analysis is essential to clarify the drought causes. A general water balance for lake in a period can be described as follows

$$\Delta_L = P_L - E_L + G_L + I_L - O_L, \qquad (4)$$

where  $\Delta_L$  is the lake water budget (mm or m<sup>3</sup>),  $P_L$  is the precipitation (mm or m<sup>3</sup>),

 $E_L$  is the lake evaporation (mm or m<sup>3</sup>),  $G_L$  is the groundwater net inflow to the lake (mm or m<sup>3</sup>),  $I_L$  is the inflow (mm or m<sup>3</sup>) and  $O_L$  is the outflow (mm or m<sup>3</sup>).

245

Once the water budget appears abnormal, it suffers from the anomalies of some or all the water components, namely, low precipitation, high evapotranspiration, low inflow and/or high outflow. At the monthly scale, for a water component X, being  $\Delta_L$ ,  $P_L$ ,  $E_L$ ,  $G_L$ ,  $I_L$  or  $O_L$ , its anomaly is described as follows

$$\widetilde{X}_{ij} = X_{ij} - \overline{X}_j, \tag{5}$$

where  $\tilde{X}_{ij}$  denotes the anomaly of the water component (mm or m<sup>3</sup>) for year *i* and month *j*.  $\overline{X}_j$  is the multi-year mean of  $X_{ij}$ . Notably, Eq. (5) defines an absolute water deficiency from its normal amount, different from Eq. (1) that defines a relative deficiency for drought identification. The equation offers a baseline to quantify contributions from individual water components to a drought.

During a drought event, the anomaly of lake water storage in month  $l (m < l \le n)$ ,  $\widetilde{S}_l$ , results from the consecutive anomalies of the lake water budget (*Seneviratne* et al., 2012; *Teuling et al.*, 2013), which can be described as

$$\widetilde{S}_l = \sum_{k=m}^{k=l} \widetilde{\Delta}_k \ . \tag{6}$$

The contribution from an individual water component to the water deficiency of the lake water storage is quantifiable with a ratio defined as follows

$$C_{X_{l}} = \frac{\sum_{k=m}^{k=l} \widetilde{X}_{k}}{\sum_{k=m}^{k=l} \widetilde{\Delta}_{k}},$$
(7)

where  $C_{\chi_i}$  denotes the contribution, the numerator is the sum of the monthly

anomalies of the water component from month *m* to *l*.  $\sum_{k=m}^{k=l} \widetilde{\Delta}_k$  is generally negative,

but  $\sum_{k=m}^{k=l} \widetilde{X}_k$  may vary with hydroclimatic conditions. For example, precipitation

265 deficiency leads to a negative  $\sum_{k=m}^{k=l} \widetilde{X}_k$  value and produces a positive  $C_{X_l}$ . Low evapotranspiration may lessen water deficiency and generate a negative  $C_{X_l}$ . Therefore,  $C_{X_l}$  can be either positive or negative.

Notably, Eq.(7) requires all the involved water components be independent from each other, which is the general case for  $P_L$ ,  $E_L$ ,  $G_L$  and  $I_L$ , but not for  $O_L$ . Given  $O_L$  is largely dependent on the sum of  $(P_L - E_L + G_L + I_L)$ , its net contribution to lake water budget can be described with  $\Delta_{Lk} = (P_{Lk} - E_{Lk} + G_{Lk} + I_{Lk}) - O_{Lk}$ . The anomaly of the net contribution is  $\widetilde{\Delta}_k = (\widetilde{P}_k - \widetilde{E}_k + \widetilde{G}_k + \widetilde{I}_k) - \widetilde{O}_k$ , and it is used to replace  $\widetilde{O}_k = O_k - \overline{O}_k$  in Eq.(7) for quantification of the relative contribution of the outflow.

Eq.(7) is useful to quantify hydroclimatological influences on drought, and 275 applicable to any single month in a drought period. However, it may not be meaningful for an entire drought, because the storage anomaly will back to zero at the end of the drought. In contrast, when a drought event reaches its highest storage deficit, it has the lowest intensity, the main criterion for drought classification. Therefore, quantification of the hydroclimatological contribution for the month with 280 the lowest intensity is fundamental to clarify drought causes.

### 2.3 Contribution of Basin-scale Hydroclimatic Influences on Lake Droughts

In addition to quantification of water deficiency in inputs and outputs to lake, it is natural to trace the causes of inflow deficiency for complete understanding of hydroclimatic influences on lake droughts. Lake inflow originates from precipitation in its surrounding basin. Given the water balance for the basin in a period, lake inflow is described as

$$I_L = P_B - E_B + \Delta_B, \tag{8}$$

where  $P_B$  is the precipitation (mm or m<sup>3</sup>),  $E_B$  is the evapotranspiration (mm or m<sup>3</sup>), and  $\Delta_B$  is the change of water storage (mm or m<sup>3</sup>), including soil moisture and groundwater in the basin.

In practice, there are often areas ungauged downstream from hydrological stations. In this case, the lake inflow includes two parts, one from gauged areas and another from ungauged areas. It has

$$I_U = P_U - E_U + \Delta_U, \tag{9a}$$

$$I_G = P_G - E_G + \Delta_G, \tag{9b}$$

where the subscript G represents the components for the gauged areas and the subscript U denotes that for the ungauged areas.

In combination with Eq. (4) and Eq. (9a), the lake water budget can be expressed

as

$$\Delta_L = \underbrace{P_L - E_L + G_L}_{lake} + \underbrace{P_U - E_U + \Delta_U}_{ungauged\_area} + I_G - O_L \,. \tag{10a}$$

Or in parallel,

$$\Delta_L = \underbrace{P_R - E_R + \Delta_R}_{lake\_region} + I_G - O_L.$$
(10b)

where the subscript *R* represents the components for the lake region. It shows that the lake change involves water budgets in the lake and the ungauged areas, in addition to gauged inflow and outflow.

13

295

300

305

290

Further incorporated with Eq. (9b), the lake water budget can be expressed as

$$\Delta_L = \underbrace{P_L - E_L + G_L}_{lake} + \underbrace{P_U - E_U + \Delta_U}_{ungauged\_area} + \underbrace{P_G - E_G + \Delta_G}_{gauged\_area} - O_L \,. \tag{11a}$$

Or in parallel,

$$\Delta_L = \underbrace{P_R - E_R + \Delta_R}_{lake\_region} + \underbrace{P_B - E_B + \Delta_B}_{lake\_ba \sin} - O_L.$$
(11b)

310 Clearly, the lake water change is a combined result of precipitation, evapotranspiration, soil moisture, groundwater, and outflow.

As done with Eq. (5), the water anomaly of each component in Eq. (10) and Eq. (11) can be defined, respectively. As done with Eq. (6), their contributions to the abnormal change of the lake water can be determined for water balance at different spatial scales, namely, the lake, the lake region, and the basin. The multi-scale

315 spatial scales, namely, the lake, the lake region, and the basin. The multi-scale determination is useful to trace regional hydroclimatic influences on the lake droughts.

## 3. Study Area and Data Processing

# 3.1 Study Area and Data

- Poyang Lake is located at the northern part of the Poyang Lake Basin, a sub-basin of the Yangtze River Basin of China (Figure 1a). The lake has a maximum area of 3,860 km<sup>2</sup> with an average depth of 8 m at the lake stage of 22 m (*Shankman et al.*, 2003). It varies remarkably from several thousand km<sup>2</sup> in summer to less than one thousand km<sup>2</sup> in winter (*Liu et al.*, 2013). There are five stations (Kangshan,
- Tangyin, Duchang, Xingzi, and Hukou) to measure lake stage across the lake from the south to the north (Figure 1d). Lake water flows out into the Yangtze River via the Hukou outlet. The lake water principally comes from five major river systems

including Xiushui, Ganjiang, Fuhe, Raohe and Xinjiang. Seven hydrological control stations (Qiujin, Wanjiabu, Waizhou, Lijiadu, Meigang, Dufengkeng, and Shizhenjie)
are located downstream to measure the discharge of the five rivers (Figure 1b). The lake region (Figure 1c) downstream from the stations is ungauged, with an area of 23,089 km<sup>2</sup>, approximately six times of the maximum lake size. The Poyang Lake Basin has an area of 162,225 km<sup>2</sup> and belongs to a humid subtropical climate zone with an annual mean surface air temperature of 17.5°C and an annual precipitation of 1,635.9 mm for the years 1960-2010 (*Liu et al.*, 2012). Forestlands, agricultural fields, grasslands, bare-lands and water surfaces are the dominant land cover types (*Liu et al.*, 2012).

Daily lake stage data from five hydrological stations and daily discharge data from seven control stations were obtained from the Hydrological Bureau of Poyang Lake. Lake stage data from Xingzi and Hukou were available for 1961-2010, but the data from other three stations were unavailable for 2009-2010. Daily discharge data for the Hukou outlet are available from the Hydrological Bureau of the Yangtze River Water Resources Commission. Daily precipitation data from 73 national weather stations within the Poyang Lake Basin are available from the National Meteorological Information Center of China for 1961-2010. Regional evapotranspiration data were

Information Center of China for 1961-2010. Regional evapotranspiration data were extracted from the latest satellite products (MOD16) of the Moderate resolution Imaging Spectroradiometer (MODIS) (http://www.ntsg.umt.edu/project/mod16) (*Mu et al.*, 2011) for the lake region and the lake basin in 2000-2010. In addition, the lake stage at Hukou is available for the case without the TGD for 2006-2010, which is the

### output of the CHAM-Yangtze model (*Lai et al.*, 2013).

# **3.2 Drought Quantification**

355

To identify lake droughts, SLI was calculated with Eq. (1) from monthly lake stage. Notably, it is approximate 110 km from the north to the south of Poyang Lake requiring a best representative of the lake conditions. Among five stations to measure the lake stage, the SLI values of Xingzi station had the highest correlation with that calculated from averaged lake stage of the five stations using all the available data for 1960-2008 (y=0.9953x,  $R^2$ =0.9901, p<0.0001). Thus, the station was selected for drought quantification.

Prior to drought quantification with SLI, the monthly lake stage was evaluated
for its fit with the Gamma distribution in each calendar month (*McKee et al.*, 1993).
The statistical evaluation demonstrated the goodness-of-fit at a significant level of 1% with the Kolmogorov-Smirnov test (*Lloyd-Hughes and Saunders*, 2002) for all twelve months (Figure 2). Subsequently, drought initialization, termination, duration, intensity, severity, and frequency were determined from the SLI values of Xingzi, with the criteria described in Section 2.1. Finally, all the lake droughts were identified and classified into extreme, severe, or moderate drought (*McKee et al.*, 1993).

In addition, for the case without the TGD impoundments, the lake stage at Xingzi was estimated from its highly correlated relationship with Hukou, y = 0.9594x+0.8034 (*Min and Zhan*, 2013), for 2006-2010. Consequently, the SLI values of Xingzi were

370 re-calculated for the case without TGD. It serves as a reference to evaluate the TGD effect on the lake droughts.

#### **3.3 Water Budget Analysis**

To quantify hydroclimatic influences on lake droughts, water budget analysis was designed at multi-spatial scales, preferably at the lake, the lake region and the lake basin (Figure 1). At the lake scale, water components include precipitation, 375 evaporation, groundwater net inflow, inflows from gauged and ungauaged areas, and outflow (Eq. (4)). It has been difficult to perform water balance analysis with a high accuracy for the lake. First, evaporation data are unavailable for the lake in monthly time series. Second, the lake inundation area shows remarkable variation, which 380 significantly regulates wetland evapotranspiration (Zhao and Liu, 2014). Third, there are many small rivers and brooks downstream from the hydrological control stations. It is impractical to measure all of the surface runoff into Poyang Lake. Given the hydrological data, the Poyang Lake region is thus the minimum closure entity directly available for water budget analysis. Furthermore, for complete understanding of climatic, hydrologic and anthropogenic influences on lake droughts, water budget 385 analysis should be performed for the lake basin, with a focus on the causes of inflow deficiency. Besides, the boundary effect of the Yangtze River is taken into consideration to account for the anomaly of lake outflow.

Specification of normal hydrologic condition is a prerequisite for determining water deficiency. First, precipitation data were grouped for the Poyang lake region and the lake basin. Multi-year mean of monthly precipitation was obtained from the observation data for 1961-2010. Second, multi-year mean of monthly discharge was calculated from the data for inflows and outflow in the period. Third, since evapotranspiration data prior to 2000 was unavailable, the multi-year mean of annual
evapotranspiration was calculated from the difference between annual precipitation
and discharge, respectively for the lake region and the entire lake basin in 1961-2010.
The multi-year mean of monthly evapotranspiration was then obtained from the
annual value distributed with a monthly weighting factor calculated from the MOD16
time series, with an assumption that the seasonal variation is relatively similar for
1961-2010.

Once the normal hydrologic condition was established, the water deficiency of a water component (Eq. (5)) and its contribution to lake drought origin were determined (Eq. (7)). It was applied to water budget for the lake region (Eq.(10b)) and the lake basin (Eq.(11b)), respectively. For the basin, a one-month lag was determined with correlation analysis between peak rainfall and peak discharge, and it was applied to account for the peak difference (*Senay et al.*, 2011; *Liu et al.*, 2013). In addition, there are three points addressed here. First,  $\Delta_R$  in Eq. (10b) for the lake region is only 1.3% of the total water balance and is neglected in the present study (*Wan and Xu*, 2010; *Zhang et al.*, 2014). Second,  $\Delta_G$  in Eq. (9b) for the gauged lake basin is

405

410 generally unavailable. According to Feng and Liu (2014), it is roughly 5% of the total water balance and is neglected here. Third, the MOD16 datasets provide one-decade monthly evapotranspiration, making it feasible to use the independent observations for water budget analysis in time series. While the datasets have been extensively evaluated and applied worldwide, namely Australia, Brazil, Asia, and the United

415 States (Loarie et al., 2011; Kim et al., 2012; Velpuri et al., 2013; Wang et al., 2014),

our recent assessment showed that it had an error of approximate 10% for the study area (*Wu et al.*, 2013). The error, together with the neglected  $\Delta_R$  and  $\Delta_G$ , may introduce uncertainties. Given that water anomaly (Eq. (5)) and relative contribution (Eq. (7)) are used, the uncertainties would not be enlarged but minimized in water balance calculation and water budget analysis

420 balance calculation and water budget analysis.

It should be emphasized that, for the sake of addressing water contribution at the lake region and the lake basin, the water amounts (unit in m<sup>3</sup>) of all the water components were normalized to equivalent water height (unit in mm) of the whole basin (unit in km<sup>2</sup>). Besides, statistical approaches were adopted in the present analysis (*Lomax*, 2001), in which paired F-test (and T-test) were used to examine the

425 analysis (*Lomax*, 2001), in which paired F-test (and T-test) were used to examine the variance (and mean) difference between the statistics for 1961-2000 and that for 2001-2010.

## 4. Results and discussion

# 4.1 Poyang Lake Droughts in Recent Decade

- Figure 3(a) illustrates the SLI variation for Poyang Lake in the recent decade.
  The negative values prevail over the positive, indicating the dry phase dominates the lake for the period. There occurred three extreme, two severe and four moderate droughts, according to the drought classification criteria (*McKee et al.*, 1993). Among the nine cases, three droughts started in spring, two in summer and four in autumn (Table 1). Drought duration varied from 2 to 13 months with a mean of 6.2 months
- and one standard deviation (S.D.) of 4.1 months, which demonstrated that the lake droughts could occur in any month. Drought intensity ranged from -1.03 to -3.03 with

a mean of  $-1.79\pm0.70$ . The top three lowest SLI values were -3.03, -2.66 and -2.01, corresponding to possibilities of 0.12%, 0.39% and 2.22%, respectively, for each

440 occurrence. Drought severity varied from -1.39 to -20.22 with a mean of -7.16±6.41. More specifically, in the category of 'extreme drought', the drought event that ranked first in both intensity and severity occurred from July 2006-July 2007, lasting 13 months. The 2006 drought was addressed in Feng et al. (2012) and Wu and Liu (2014) in terms of inundated area, whereas the present study quantified its probability of occurrence and revealed that the drought lasted longer than the previous reports. The second most severe drought event emerged in September 2009-January 2010, persisting 5 months. The third most severe drought took place from October 2007-August 2008, lasting 11 months. The two droughts in the 'severe drought' category spanned 6 and 10 months, respectively. The four droughts in the 'moderate 450 drought' category lasted 2~4 months. It appears that a drought with a lower SLI is usually more severe and lasts for a longer time.

In comparison to the years 1961-2000, the lake droughts changed in terms of duration, frequency, intensity and severity in the most recent decade (Figure 3(b)). On average, drought duration extended from 5.6 to 6.2 months. Drought frequency increased from 6.0 to 9.0 events per decade. Drought intensity intensified from -1.38 to -1.79, and drought severity increased from -5.02 to -7.16. In regard to the intensification, further analysis revealed that the moderate drought events increased. The severe droughts decreased, but the extreme droughts increased from 0.5 to 3.0 events per decade (Figure 3(c)). Overall, the lake droughts have worsened in terms of

460 duration, frequency, intensity and severity over the last decade.

# 4.2 Hydroclimatic Change at Poyang Lake Region

465

Normal variation of water components is a baseline for quantitative analysis of drought occurrence as an abnormal change. Figure 4(a) shows the multi-year mean of monthly precipitation ( $P_R$ ) and evapotranspiration ( $E_R$ ) for the lake region, lake inflow (I) from five major rivers and outflow (O) into the Yangtze River. The monthly

- precipitation varied with a peak in June followed by a sharp decrease. Inflow had a similar seasonal pattern. Outflow had the maximum value in June and the minimum in January. The maximum evapotranspiration appeared in August and the minimum in December. From a perspective of water balance, the water budget was positive from
- 470 January to June with a peak in June. It became negative from July to December, and the minimum value appeared in October. These results indicate a shift in water budget from a surplus phase in the first half of the year to a deficit phase in the second half of the year. The deficit phase is a part of the normal hydrologic condition, and thus it does not necessarily mean a drought occurrence. Furthermore, in annual water budget,
- the equivalent water supply from the local precipitation was 312.0 mm, and that from inflow was 714.4 mm, more than two times of the local precipitation. The water loss from the local evapotranspiration was 118.3 mm, and that from outflow was 908.1 mm, approximate 7.7 times of the local evapotranspiration. It demonstrated that the inflow and outflow were much higher than the local precipitation and evapotranspiration. This finding implies the dominant role of hydrologic components over meteorological components in regulating Poyang Lake.

Lake droughts occur when abnormal change appears in the water budget. Table 2 lists the water components for the lake region during the periods of lake droughts. The water budgets ( $P_{R}$ - $E_{R}$ +I-O) were -67.1, -12.6 and -69.3 mm for three extreme lake droughts, -71.6 and 27.7 mm for two severe lake droughts, and 72.0, 5.4, 18.5, and 485 -66.1 mm for four moderate lake droughts. In sum, the budget was negative (deficit) for five cases and positive (surplus) for four cases. Despite the positive water budgets, the large negative anomalies of  $P_R$ - $E_R$ +I for the cases illustrated that the lake water income  $(\mathbf{P_R}-\mathbf{E_R}+\mathbf{I})$  was exceptionally lower than normal. The low water income 490 resulted from largely decreased inflow and precipitation, as well as increased evapotranspiration. The positive water budgets were attributed to the water surplus period in the first half of the year. In this sense, the definition of drought is a water anomaly referenced to a normal state of either water surplus or deficit phase. It indicated that a drought occurrence was more closely related to the water deficiency (negative anomaly) of water budget than the net water budget. For example, the net 495 water budget did not show statistically significant relationships with drought intensity. On the contrary, the total water anomaly of a drought event showed a significant relationship with drought intensity (x) (y = 31.624x + 28.842, n = 9, R<sup>2</sup>=0.534, p < 0.05) (Figure 4(b)). In general, the water budget analysis highlighted the importance of water deficiency in reference to a normal condition of either water surplus or deficit 500 phase.

Drought causes can be traced from relative contribution of individual water components. Table 3 shows the ratios of the total water anomaly of a component to that of the water budget up the time of peak drought for each event (Eq. (7)). In the lake region, the ratio for inflow is largest for most cases, followed by  $\mathbf{O}$ ,  $\mathbf{P}_{\mathbf{R}}$  and  $\mathbf{E}_{\mathbf{R}}$ , indicating the dominant role of inflow in drought formation. Meanwhile, hydroclimatological contributions to each individual drought varied from one to another. For example,  $\mathbf{O}$  was larger than  $\mathbf{P}_{\mathbf{R}}$  for 2001.06-2001.11, and lower for 2009.09-2010.01. In addition to the positive contribution, a water component may contribute negatively. For example, one negative value appeared for inflow (Table 3),

which was attributable to the normal inputs  $(I+P_R-E_R)$  accompanied by excessive **O** for 2006.07-2006.10. Since inflow reduction is the major contribution to the drought formation in the lake region, it is vital to trace how precipitation and evapotranspiration have changed at the basin scale.

# 515 **4.3 Hydroclimatic Change at Poyang Lake Basin**

Likewise, prior to performing a water budget analysis, it is valuable to clarify the normal hydrologic condition. Generally, precipitation ( $\mathbf{P}_{\mathbf{B}}$ ) and evapotranspiration ( $\mathbf{E}_{\mathbf{B}}$ ) had similar seasonal patterns in the basin as its counterpart in the lake region (Figure 5(a)). Monthly precipitation varied seasonably with a peak in June, followed by peaks

520 in May and April. Major precipitation appeared in the first half of the year. Monthly evapotranspiration was generally less than precipitation and its top three highest values appeared from June-August. Monthly outflow was approximately half of precipitation with a similar seasonal pattern. Consequently, the monthly water budget was positive (surplus) from December-June and negative (deficit) from 525 July-November. The highest water surpluses appeared in March, April and May, and

the lowest water deficits in July, August and September. On an annual scale, outflow `occupies approximately 55% of precipitation, 10% higher than evapotranspiration, which is one of the climate features of this humid subtropical region.

The water budget was -252.2, -79.4 and -95.8 mm for the three extreme droughts, -251.9 and 152.0 mm for the two severe droughts, and 136.3, 21.3, -9.5 and -65.1 mm 530 for the moderate droughts (Table 2). For six negative cases, the water budget featured less precipitation (negative anomaly) and more evapotranspiration (positive anomaly). For three positive cases,  $P_B$ - $E_B$  had large negative anomalies over 100 mm, but the water budgets became positive due to the largely reduced outflow. For the three extreme droughts,  $P_B$ - $E_B$  was much lower than the normal, suggesting that 535 meteorological droughts have made significant effects on the drought formation. For all the cases, the water anomalies of  $P_B$  and  $P_B$ - $E_B$  had positive relationships with drought severity, which was consistent with the water budget for the lake region. Nevertheless, the basin-scale precipitation is the most important water source to the lake, as confirmed by a correlation between  $P_B-E_B(x)$  and I (y) (y=0.9958x, 540  $R^2=0.8667$ , n=10, p<0.005) (Figure 5(b)). The **P**<sub>B</sub>-**E**<sub>B</sub>-to-**I** difference was -28.3 mm, approximately 10% of I, in agreement with our previous study (Wu et al., 2013). The high correlation and relatively small difference also confirmed the suitability of the satellite evapotranspiration data for the study area.

545 While the inflow reduction resulted from combined hydroclimatic change, precipitation and evapotranspiration may have made different contributions to the drought formation. Table 3 shows that the relative contribution for  $P_B$  varied from 0.56 to 1.12, suggesting that precipitation deficiency is the main driver to reduce the lake inflows during the drought development. Alternatively, the contribution for  $E_B$ 

<sup>550</sup> ranged from -0.12 to 0.44, highlighting the importance of evapotranspiration in amplifying droughts, in agreement with the conclusion that reduced precipitation can coincide with increased evaporation (*Teuling* et al., 2013).

## 4.4 Mechanisms Accounting for Recent Lake Droughts

The above sections detail the lake droughts as abnormal phenomena and the 555 hydroclimatic contribution to individual drought events. Yet, it remains unclear why the droughts strengthened in the recent decade, and whether the droughts resulted from a long-term change of hydroclimatic influences or a seasonal combination of these influences.

Figure 6(a) shows the accumulated anomalies of water budget from 2001-2010.

- At the lake region, the water budget (P<sub>R</sub>-E<sub>R</sub>+I-O) declined from mid-2002 to a low value in September 2009, and then increased yet remained in a negative phase.
  Obviously, the decrease in the water budget is a hydroclimatic setting for the recent drought increase. The water deficits involve local precipitation and evapotranspiration, lake inflow and outflow, but each of these components has different courses. The
- accumulated  $\mathbf{P}_{\mathbf{R}}$  showed a decreasing trend after mid-2003. The accumulated  $\mathbf{E}_{\mathbf{R}}$ increased gradually but steadily, which was consistent with the rapid increase of surface temperature in the Poyang Lake Basin since 1998 (*Liu et al.*, 2012). The  $\mathbf{E}_{\mathbf{R}}$ exceeded the  $\mathbf{P}_{\mathbf{R}}$  after April 2010, exhibiting an increasing effect on the water budget. Comparatively, the accumulated **I** or **O** had a relatively large variation, consistent with

- 570 their dominance over  $\mathbf{P}_{\mathbf{R}}$  and  $\mathbf{E}_{\mathbf{R}}$  at seasonal scale. They displayed similar behaviors with a peak in spring 2003, and then declined by the end of 2009. In the entire period, precipitation decreased by 5%, evapotranspiration increased by 19%, inflow declined by 5% and outflow declined by 4%, accounting for the negative water budget in the lake region.
- Figure 6(b) displays seasonal variation of the water budget during 2001-2010. In comparison to 1961-2000, the water surplus reduced for the first half of the year, and the water deficit enhanced for the second half of the year except for August and November. The large reduced surplus includes March and June, and the enhanced deficit includes July and September. The reduced surplus and the enhanced deficit would increase the possibility of drought occurrence and intensify the drought intensity. In the enlarged water deficit, the P<sub>R</sub>-E<sub>R</sub> and the I-O contributed to 43% and 57%, respectively. In the I-O deficit, inflow decreased but outflow increased. Usually, the outflow decreases with reduced inflow and P<sub>R</sub>-E<sub>R</sub>. Since the Yangtze River serves as a boundary condition of Poyang Lake, the increased outflow is generally a result of weakened blocking effects of the lake-River interactions (*Guo et al.*, 2012; *Zhang et al.*, 2012; *Lai et al.*, 2014).

The weakened effects involve climate change in the upper reaches of the Yangtze River, and water impoundments of the TGD (*Guo et al.* 2012). Routinely, the TGD impoundment begins in mid-September and spans one to two months. Among all the drought events, none occurred during exactly the same time span. Accordingly, the TGD impoundments should not be responsible for the increased drought events.

590

However, the impoundments lowered the lake stage at the Hukou outlet by 1~2 meters for September-October (Guo et al. 2012; Zhang et al., 2012, 2014). Our analysis indicated that the impoundments led to a change in SLI from -2.70 to -3.03 for the extreme drought in July 2006-July 2007, and from -1.81 to -2.66 for the extreme 595 drought in September 2009-Januray 2010. The change has two implications. First, the droughts were intensified with the TGD impoundments. Second, a severe drought  $(-2.0 \le SLI \le -1.5)$  was intensified to an extreme drought  $(-\infty \le SLI \le -2.0)$ , which changed the frequency of classified droughts. This is a reasonable explanation for the decrease in the number of severe droughts but increase in extreme droughts (Figure 3(c)). 600 Furthermore, according to the latest lake storage curve described in Tan et al. (2013), the lowered lake stages would result in a water loss of  $7.1 \times 10^8$  m<sup>3</sup> and  $24.1 \times 10^8$  m<sup>3</sup> for each event, respectively. The losses occupied approximate 11.3% and 24.1% of the total anomalies of outflow up the time of peak drought, corresponding to 11.3% and 3.7% of the contribution for each drought. In comparison with the hydroclimatic 605

influences, the TGD contribution is yet limited.

In general, the recently increased droughts were principally attributed to decreased inflow, increased outflow, and reduced local precipitation and increased evapotranspiration at the lake region. The findings lay in several strengths or novelties 610 in the present study. First, use of satellite-retrieved evapotranspiration data makes it possible to analyze drought causes from a perspective of water budget with independent measures of major water components. Given measurement errors are quality controlled, the independent observations are more faithful than model simulation that is susceptible to model uncertainty and empirical parameterization.

- 615 Indeed, the MOD16 products demonstrated its effectiveness in water balance calculation and subsequent water budget analysis. Second, in addition to drought quantification, absolute deficiency was defined for water component and water budget in reference to normal hydrologic state. Individual hydroclimatic contributions were isolated from the total anomalies of water budget, and the drought causation structure
- 620 was subsequently distinguished. The quantification approach is straightforward and applicable to separate hydroclimatic influences to droughts, a key issue identified for developing integrated theories of droughts (*Kallis*, 2008). Third, it is the first time to quantify all the drought events and their causation structure in Poyang Lake. Most existing studies did not explicitly quantify the droughts but focused on low water
- 625 levels mainly in autumn seasons. A few studies addressed 1-2 extreme droughts with statistical regression analysis (*Feng et al.*, 2012; *Wu and Liu*, 2014), yet lack of systematic water balance analysis of the droughts and their decadal features. The present study completed drought quantification, water budget analysis, isolation of hydroclimatic contributions, and clarification of causation structure for the recently
- 630 increased droughts in Poyang Lake. The complete assessments demonstrated that the droughts were the hydroclimatic consequences, with less important contribution from the TGD influences. Yet, it should be noted that the present study did not address some potential influences, for example, land cover/use change, agricultural water use, soil moisture variation and vegetation dynamics. These factors may affect the hydrological processes at seasonal and annual scales, and subsequently affect lake

stage and droughts, which should be taken into consideration in future study.

## 5. Conclusions

This paper used standardized lake stage to identify and quantify droughts illustrated with the case in Poyang Lake for all seasons. From a perspective of water budget, it defined an absolute deficiency for water component and water budget in reference to normal hydrologic condition to determine hydroclimatic contributions to drought formation. Given five-decade hydroclimatic observation data and the latest satellite products, water budget analysis was operational and performed in the study area.

- Our analyses demonstrated that the lake droughts had strengthened in the recent 645 decade, in terms of duration, frequency, intensity and severity. The overall contribution to the lake droughts came from decreased inflow, increased outflow, and reduced precipitation and increased evapotranspiration at the lake region. The decreased inflow resulted mainly from basin-scale precipitation and less from evapotranspiration. The recently increased droughts were principally ascribed to 650 hydroclimatic change. specified with precipitation, decreased increased evapotranspiration and reduced inflow. The TGD impoundments were not responsible for the increased drought events, but they did intensify the droughts and change the frequency of classified droughts. Overall, the TGD contribution was limited, compared with the hydroclimatic influences. 655
- 555 compared with the hydrochinatic influence

The findings of this study provide an example of intensified lake droughts, and offer an insightful view into the droughts under the hydroclimatic and anthropogenic

29

influences. The methodology proposed for quantification of lake droughts and isolation of hydroclimatic contributions has potential applications to other lakes.

660 Moreover, the results of the study should be useful for local water resources management and climate change adaptation.

## Acknowledgments

This work is supported by the 973 Program of National Basic Research Program of China (2012CB417003), the State Key Program of National Natural Science of

- 665 China (41430855), and the Key Program of Nanjing Institute of Geography and Limnology of the Chinese Academy of Sciences (CAS) (NIGLAS2012135001). We thank Prof. David Shankman for his constructive comments on an earlier version of the manuscript, Ms. R. Guo for data pre-processing, Prof. Y. Chen for providing hydrological data, and Dr. X. Lai for sharing simulation data from the
- 670 CHAM-Yangtze model. Prof. Peter Molnar and the anonymous reviewers are acknowledged for their constructive comments that have substantially improved the manuscript.

## References

Dracup, J., Lee, K., Paulson Jr., E., 1980. On the definition of droughts. Water Resour.

- 675 Res. 16(2), 297–302, doi: 10.1029/WR016i002p00297
  - Environment News Service, 2012. China's Largest Freshwater Lake Shrinks in Record Drought (available from http://www.ens-newswire.com/ens/jan2012/2012-01-05 -01.html, accessed 8 August 2012).

Feng, L., Hu, C., Chen, X., 2012. Satellites capture the drought severity around

China's largest freshwater lake. IEEE JSTAR. 5, 1266–1271

Feng, H., and Liu, Y., 2014. Trajectory based detection of forest-change impacts on surface soil moisture at a basin scale [Poyang Lake Basin, China]. Journal of Hydrology 514, 337–346.

Finlayson, M., Harris, J., McCartney, M., Lew, Y., Zhang C., 2010. Report on Ramsar

- 685 visit to Poyang Lake Ramsar site, P. R. China (available from: www.ramsar.org/pdf/Poyang lake report v8.pdf, accessed 16 January 2013).
  - Guo, H., Hu, Q., Zhang, Q., Feng, S., 2012. Impacts of the Three Gorges Dam on Yangtze River flow and river interaction with Poyang Lake, China: 2003-2008. J. Hydrol. 416-417, 19–27, doi: 10.1016/j.jhydrol.2011.11.027.
- 690 Hayes, M., Svoboda, M., Wall, N., Widhalm, M., 2011. The Lincoln declaration on drought indices: universal meteorological drought index recommended. Bulletin of the American Meteorological Society. 92, 485–488.
  - Hervé, Y., Claire, H., Lai, X., Stéphane, A., Li, J., Sylviane, D., Muriel, B-N., Chen, X., Huang, S., Burnham, J., Jean-François, C., Tiphanie, M., Li, J., Rmié, A.,
- 695 Carlos, U., 2011. Nine years of water resources monitoring over the middle reaches of the Yangtze River, with ENVISAT, MODIS, Beijing-1 time series, altimetric data and field measurements. Lake Reserv. Manage. 16, 231–247, doi: 10.1111/j.1440-1770.2011.00481.x.
- Hu, Q., Feng, S., Guo, H., Chen, G., Jiang, T., 2007. Interactions of the Yangtze River
  flow and hydrologic processes of the Poyang Lake, China. J. Hydrol. 347,
  90–100, doi: 10.1016/j.jhydrol.2007.09.005.

680

- Jiao, L., 2009. Scientists line up against dam that would alter protected wetlands. Science 326, 508–509, doi: 10.1126/science.326 508.
- Kallis, G., 2008. Droughts. Annu. Rev. Environ. Resour. 33, 85-118, doi :

705 10.1146/annurev.environ.33.081307.123117.

- Keskin, F., Sorman, A. 2010. Assessment of the dry and wet period severity with hydrometeorological index. Int. J. Water Resour. Environ. Engineer. 2, 29–139.
- Keyantash, J., Dracup, J. A., 2002. The quantification of drought: an evaluation of drought indices. Bulletin of American Meteorological Society. 83, 1167–1180.
- 710 Kim, H. W., Hwang, K., Mu, Q., Lee, S. O., and Choi, M., 2012. Validation of MODIS 16 global terrestrial Evapotranspiration products in various climates and land cover types in Asia. KSCE Journal of Civil Engineering, 16, 229–238.
  - Kingston, D., Fleig, A., Tallaksen, L., Hannah, D., 2013. Ocean-atmosphere forcing of summer streamflow drought in Great Britain. J. Hydrometeor. 14, 331–344,
- 715 doi: 10.1175/JHM-D-11-0100.1.
  - Lai, X., Jiang, J., Liang, Q., Huang, Q., 2013. Large-scale hydrodynamic modeling of the middle Yangtze River Basin with complex river-lake interactions. J. Hydrol. 492, 228–243.
- Lai, X., Huang, Q., Zhang, Y., Jiang, J., 2014a. Impact of lake inflow and the Yangtze
  River flow alternations on water levels in Poyang Lake, China. Lake and
  Reservoir Management. 30, 321–330.
  - Lai, X., Jiang, J., Yang, G., Lu, X., 2014b. Should the Three Gorges Dam be blamed for the extremely low water levels in the middle–lower Yangtze River? Hydrol

Process. 28,150–160.

730

- 725 Liu, Y., Song, P., Peng, J., Fu, Q., Dou, C., 2011. Recent increased frequency of drought events in Poyang Lake Basin, China: climate change or anthropogenic effects? Hydro-climatology: Variability and Change (IAHS Publ.), 344, 99–104.
  - Liu, Y., Wu, G., Zhao, X., 2013. Recent declines of the China's largest freshwater lake: trend or regime shift? Environ. Res. Lett. 8(1), 014010, 9pp. doi: 10.1088/1748-9326/8/1/014010.
    - Liu, Y., Zhang, Q., Liu, J., Li, H., 2012. Climatic, Hydrologic and Environmental Change in Poyang Lake Basin. Science Press, Beijing. 262 pp. (in Chinese).
    - Lloyd-Hughes, B., Saunders, M., 2002. A drought climatology for Europe. Int. J. Climato., 22, 1571–1592, doi: 10.1002/joc.846.
- 735 Loarie, S. R., Lobell, D. B., Asner, G. P., Mu, Q. and Field, C. B., 2011. Direct impacts on local climate of sugar-cane expansion in Brazil. Nature Climate Change. 1, 105–9.
  - Lomax, R. G., 2001. An Introduction to Statistical Concepts for Education and Behavioral Sciences. Lawrence Erlbaum Associates, Inc. Mahwah. pp.519.
- 740 McKee, T. B., Doesken, N. J., Kliest, J., 1993. The relationship of drought frequency and duration to time scales. Proceedings of the 8th Conference of Applied Climatology, 17–22 January, Anaheim, CA. American Meteorological Society, Boston, MA. 179–184.
  - McKee, T. B., Doesken, N. J., Kliest, J., 1995. Drought monitoring with multiple time
- scales. Ninth Conference on Applied Climatology, 15-20 January 1995, Dallas,

TX. American Meteorological Society, Boston, MA. 233-236.

- Mendicino, G., Senatore, A., and Versace, P., 2008. A groundwater resource index (GRI) from drought monitoring and forecasting in a Mediterranean climate. J. Hydrol., 357, 282–302.
- 750 Min, Q., and Zhan, L., 2013. Analysis of lake stage relationships between different locations in Poyang Lake. The Yangtze River, 44, 5–10 (in Chinese).
  - Mishra, A., Singh, V., 2010. Review of drought concepts. J. Hydrol. 391, 202–216, doi: 10.1016/j.jhydrol.2010.07.012.
  - Mishra, A., Singh, V., 2011. Drought modeling A review. J. Hydrol. 403, 157–175, doi: 10.1016/j.jhydrol.2011.03.049.

755

760

Mu, Q., Zhao, M., Running, S. W., 2011. Improvements to a MODIS global terrestrial evapotranspiration algorithm. Remote Sens. Environ. 115, 1781–1800, doi: 10.1016/j.rse.2011.02.019

Nalbantis, I., Tsakiris, G. 2009. Assessment of hydrological drought revisited. Water Resour. Manage. 23, 881–897, doi: 10.1007/s11269-008-9305-1

The Ramsar Convention, 2012. The List of Wetlands of International Importance, 25 April 2012. (available from http://www.ramsar.org/pdf/sitelist.pdf, accessed on 8 August 2012).

Senay, G. B., Leake, S., Nagler, P. L., Artan, G., Dickinson, J., Cordova, J. T., Glenn, E.

P., 2011. Estimating basin scale evapotranspiration (ET) by water balance and remote sensing methods. Hydrol. Process. 25, 4037–4049, doi: 10.1002/hyp.8379.

- Shankman, D., Keim, B. D., Song, J., 2006. Flood frequency in China's Poyang Lake region: trends and teleconnections. Int. J. Climatol. 26, 1255-1266, doi: 10.1002/joc.1307.
- Shankman, D., Liang, O., 2003. Landscape changes and increasing flood frequency in China's Poyang Lake region. The Professional Geographer 55(4), 434–445, doi: 10.1111/0033-0124.5504003.
- Sheffield, J., Goteti, G., Wen, F., and Wood, E. F., 2004. A simulated soil moisture based drought analysis for the United States. J. Geophy. Res., 109, D24108.

Seneviratne, S. L., Lehner, I., Gurtz, J., Teuling, A. J., Lang, H., Moser, U., Grebner, D., Menzel, L., Schroff, K., Vitvar, T., Zappa, M., 2012. Swiss prealpine Rietholzbach research catchment and lysimeter: 32 year time series and 2003 drought event. Water Resources Research, 48, W06526, doi:

780

775

770

10.1029/2011WR011749.

Shukla, S., Wood, A. W., 2008. Use of a standardized runoff index for characterizing Lett. hydrologic drought. Geophys. Res. 35, L02405, doi: 10.1029/2007GL032487.

Smakhtin, V.U., 2001. Low flow hydrology: a review. J. Hydrol., 240, 147–186.

- Spinoni, J., Naumann, G., Carrao, H., Barbosa, P., Vogt, J., 2014. World drought 785 frequency, duration, and severity for 1951-2010. Int. J. Climato., 34, 2792-2804.
  - Tallaksen, L. M., Madsen, H., Clausen, B., 1997. On the definition and modelling of streamflow drought duration and deficit volume. Hydrol. Sci. J., 42, 15–33.

Tallaksen, L. M., van Lanen, Henny A. J., 2004. Hydrological Droughts: Processes

- and Estimation Methods for Streamflow and Groundwater. Elsevier Science,Amsterdam, The Netherlands.
  - Tan, G., Guo, S., Wang, J., and Lv, S., 2013. Hydrologic Change and Water Resources in Poyang Eco-economic Zone. China Water & Power Press, Beijing, China.

Teuling, A. J., Van Loon, A. F., Seneviratne, S. I., Lehner, I., Aubinet, M., Heinesch,

- B., Bernhofer, C., Grünwald, T., Prasse, H., Spank, U., 2013. Evapotranspiation amplifies European summer drought. Geophysical Research Letters, 40, 2071-2075, doi: 10.1002/grl.50495.
  - Velpuri, N. M., Senay, G. B., Singh, R. K., Bohms, S., Verdinb, J. P., 2013. A comprehensive evaluation of two MODIS evapotranspiration products over the
- 800 conterminous United States: Using point and gridded FLUXNET and water balance ET. Remote Sensing of Environment, 139, 35–49.
  - Vicente-Serrano, S. M., and López-Moreno, J., 2005. Hydrological response to different time scales of climatological drought: an evaluation of the Standardized Precipitation Index in a mountainous Mediterranean basin. Hydrol. Earth Syst.
- 805 Sci., 9, 523–533.

810

- Wan, X. and Xu, X., 2010. Analysis of supply and demand balance of water resources around Poyang Lake. The Yangtze River, 41, 43–7.
- Wang, H., Guan, H., Gutiérrez-Jurado, H., Simmons, C., 2014. Examination of water budget using satellite products over Australia. Journal of Hydrology, 511, 546–554.

Wilhite, D. A., Glantz, M. H., 1985. Understanding the drought phenomenon: the role

of definitions. Water International, 10, 111-120.

815

825

830

- Wilcox, B. P., Huang, Y., Walker, J. W., 2010. Long-term trends in streamflow from semiarid rangelands: uncovering drivers of change. Global Change Biology, 14, 1676–1689.
- Wu G., Liu, Y., Zhao, X., 2013. Analysis of spatio-temporal variations of evapotranspiration in Poyang Lake Basin using MOD16 products. Geophysical Research, 32, 617–627 (in Chinese with English abstract).
- Wu, G., Liu, Y., 2014. Satellite-based detection of water surface variation in China's
- largest freshwater lake in response to hydro-climatic drought. International
  Journal of Remote Sensing, 35, 4544–4558, doi:
  10.1080/01431161.2014.916444.
  - Yevjevich, V., 1967. An objective approach to definitions and investigations of continental hydrologic droughts. Hydrology Paper No. 23, Colorado State University, Fort Collins, CO, pp.18.
  - Zelenhasic, E., Salvai, A., 1987. A method of streamflow drought analysis. Wat. Resour. Res., 23, 156–168.
  - Zhang, Q., Li, L., Wang, Y.-G., Werner, A., Xin, P. Jiang, T., Barry, D., 2012. Has the Three-Gorges Dam made the Poyang Lake wetlands wetter and drier? Geophysical Research Letters 39, L20402, doi: 10.1029/2012GL053431.
  - Zhang, Q., Ye, X., Werner, A., Li, Y, Yao, J., Li, X., Xu, C., 2014. An investigation of enhanced recessions in Poyang Lake: Comparison of Yangtze River and local catchment impacts. J. Hydrol. 517, 425–434.

Zhao, X., and Liu, Y., 2014. Lake fluctuation effectively regulates wetland
 evapotranspiration: A case study of the largest freshwater lake in China. Water, 6,
 2482–2500.

## **Figure Captions**

850

855

Figure 1. Geographic location of Poyang Lake, China. The lake is principally fed by a

840 five river systems of the Poyang Lake Basin. Lake water flows into the Yangtze River via a sole outlet at the Hukou. Jiujiang is located 25 km upstream of the Hukou on the Yangtze River. The Three Gorges Dam (TGD) is upstream of the river.

Figure 2. Statistical distribution of monthly average lake stages with a fitted Gamma

distribution for each calendar month at Xingzi of Poyang Lake in 1961-2010.

**Figure 3**. Poyang Lake droughts in 2001-2010. (a) Variation in the standardized lake stage index (SLI). (b) Drought duration, frequency, intensity and severity, and (c) Drought frequency for moderate, severe and extreme droughts, compared to 1961-2000.

Figure 4. (a) Multi-year mean of monthly precipitation ( $P_R$ ) and evapotranspiration ( $E_R$ ) for the Poyang Lake region, lake inflow (I) from five major rivers of the Poyang Lake Basin, and outflow (O) into the Yangtze River. All the water amounts are normalized to equivalent water height of the whole Poyang Lake Basin. (b) The

relationship between drought severity and total water anomaly of  $(\mathbf{P}_{\mathbf{R}}-\mathbf{E}_{\mathbf{R}}+\mathbf{I})$  of each event for nine cases of Poyang Lake droughts.

Figure 5. (a) Multi-year mean of monthly precipitation  $(P_B)$  and evapotranspiration

- 860  $(E_B)$  for the Poyang Lake Basin, and outflow (O) into the Yangtze River. (b) The relationship between  $P_B-E_B$  and inflow for nine cases of Poyang Lake droughts. All the water amounts are normalized to equivalent water height of the whole Poyang Lake Basin.
- Figure 6. (a) Accumulated anomaly of water components and (b) water budget at the Poyang Lake region for 2001-2010 compared to 1961-2000. All the water amounts are normalized to equivalent water height of the whole Poyang Lake Basin.