

Comments are highlighted in blue and responses are provided directly after each comment.

The paper presents a climate impact assessment for two climate warming scenarios focusing in water availability in West Africa and in particular for a small scale West African catchment, where no studies are available about this topic so far. The authors have put a lot of work in dealing and examining state-of-the-art climate models and their uncertainties for the region and have carried out various analyses which are well presented in the figures. The analysis includes good approaches for the examination of specific hydro-climatic indicators (incl. water-energy budget) and their uncertainties as well as the application of a hydrological model. The paper is well written, in particular the introduction and discussion, and the methodology is well presented. The figures and tables are accurate and support the understanding of the results.

Thanks.

However, the paper includes some inconsistencies, in particular concerning the interpretation of the results, and further shortcomings in scientific and structural aspects, which need to be revised. Therefore, the paper should be subjected to major revision.

My major request is that the authors should especially revise these major points:

Our replies to the specific comments are provided below.

1. The first point is related to scaling issues which makes the paper difficult to understand when reading it for the first time. In the article actually includes two evaluations on different scales: one evaluation of available climate models on large scale (Climate data: $250 \times 200 \text{ km} = 50.000 \text{ km}^2$) and one hydrological analysis for the small Dano river catchment (200 km^2). A box of 20 climate model grid cells were correctly used for the analysis to capture the spatial climate variability of the climate models, as stated in the Discussion (p. 12, L. 367) and examined for a larger region. In a second step, the small Danu catchment was examined using a hydrological model and climate model data of one grid cell as meteorological driver. These two analyses are partly mixed up in the presentation and interpretation of the results and need to be structured and distinguished in a better way.

2. The authors carried out a bias correction for the climate models for the region. Here it is described in the methods: p. 4, L.111: "Although the national observation network includes several rainfall gauges and synoptic stations, solely the data of the Dano station were used as it is located in the study area." So, is it true that for bias correction of the climate model data (20 nodes of climate models $\rightarrow 50,000 \text{ km}^2$) only the data from one meteorological station was used? If yes, the measured basis data for bias correction may be representative for the small Dano catchment, but lead to incorrect bias correction transfer functions if applied for the whole region.

As this comment and the previous one focus on the scale issue we address them together.

We do agree with Referee2 that it may seem that the evaluations (climate and hydrological changes) are done at two different scales. Nonetheless, the focus is only the Dano catchment, i.e. the 200 km^2 ; and both climate and hydrological changes as presented in the study apply only to the Dano catchment.

Only considering climate variables of the nearest RCM grid point to the Dano catchment would be meaningless since the nominal resolution of RCMs does not corresponds to the effective resolution (Villani et al. 2015; Grasso, 2000). Therefore, we had to consider a larger RCM domain to represent the simulated climate within Dano the catchment (a 20 nodes domain was applied). We used the Dano weather station as reference station for bias correction and, indeed, we did expect the measured basis data to be representative of the Dano catchment only.

For the hydrological simulations, although the hydrological modeling domain (the Dano catchment) is about 200 km², the entire 20 nodes domain was applied as climate forcing data. This has been further specified in the revised manuscript (L129-130). Considering climate inputs of such a large climate domain for the hydrological simulation model necessarily implies some issues when interpolation approaches are applied (this is discussed in the response to the comment2 of Referee1). To overcome these issues (overestimation of rainy days, decreasing of rainfall intensities, drizzle effect etc.) we adopted the “one node at a time approach” and the 20 nodes were used.

3. The hydrological model applied in the study has been calibrated using only three years of daily discharge data and validated for just one year in a previous study (Yira et al. 2016). In this study the model has then been used to project runoff changes under changing climate conditions until 2050. I suppose that this very short calibration and validation period was chosen due to missing measuring data in the catchment. Generally, in data scarce regions a weighing is necessary between scientific accuracy and best scientific information available for the region under given conditions. Nevertheless, it may be questioned if the model's ability is adequately validated to project long-term runoff pattern in particular under changing climatic conditions in a monsoon region. Of course the major source of uncertainty in hydrological impact assessments is coming from the climate models, which are in West Africa related to very high un-certainties already. As for many African regions, the examination of available climate models in this study reveals very high uncertainties in the projections and no clear patters in the directions of the change. This may sound harsh but my point is that, as the input data as well a calibration and validation data for the hydrological model are quite low, the additional value of using the hydrological model to examine impacts on water resources instead of just analyzing the climatic water balance and water-energy budget out of climate model data for the region is not clearly highlighted in the paper. Further- more, this point of additionally increasing uncertainties in the hydrological analysis is not discussed in the paper.

Referee2 is right in stating that a weighing is necessary between scientific accuracy and best scientific information available for the region, as well as the lack of long term discharge data. However the comment contains other points that we would like to address.

-The hydrological model was indeed calibrated/validated for a relatively short period and this necessarily introduces an element of uncertainty that has to be taken into account. Nevertheless, the issue related to the calibration/validation period was not ignored in Yira et al. 2016. In the absence of long term observation discharge for the catchment, as rightly pointed out by Referee2, the reliability of the model parameters in time could not be assessed in a classical way. Therefore, a soft validation approach was adopted. The approach consisted in determining, based on the Standardized Precipitation Index, whether the calibration/validation years represented normal years in the catchment (considering the historical period of 1990 to 2014). This evaluation showed that both calibration and validation periods are normal and reflect the annual rainfall pattern in the catchment for the period 1990–2014 (Fig.1_ supplementary materials in Yira et al. 2016 shows this evaluation). Therefore, the model parameters for the catchment are expected to be reliable for a long period.

-Analyzing climatic water balance and water energy budget solely falls short in the assessment of CC impact on water resources in the catchment if not supported by good discharge information. As shown throughout the discussion, information about ETp and Precipitation do not suffice to explain the hydrological behavior of the catchment. It was shown that the annual ETp is not correlated to the annual discharge ($ETp \gg \text{Eta} + \text{Discharge}$). Although discharge is controlled by precipitation, not only the amount is important but also the annual distribution (pattern). Inferring the hydrological behavior of the catchment based on ETp and Precipitation is therefore rendered inapplicable if the temporal distributions of both variables are not thoroughly

combined with the ecosystem within the catchment, and this is made possible by the application of the hydrological simulation model.

4. The paper includes considerable inconsistencies in particular concerning the interpretation of the results which need to be revised.

In the conclusions the authors correctly conclude: p. 14, L. 438ff: "(...) the lack of agreement among the models with regard to the projected precipitation change signal creates a considerable uncertainty about how the catchment discharge will evolve by 2050s. As discharge in the catchment is strongly determined by precipitation, no clear trend in future development of water resources can be concluded due to the high variability of the different climate models and scenarios. Therefore, potential increase and decrease of future discharge have to be considered in climate change adaptation strategies in the region." And further in the Discussion: p. 10, L. 315: "(...) individual model errors of opposite sign cancel each other out (...). (...) the climate models ensemble means should not be considered as an expected outcome."

As correctly concluded, the results, in particular for RCM 8.5, are too uncertain to give any direction for future hydrological development and, hence, the mean values over the climate models cannot be used to give a direction of future changes. These statements are not consistently kept over the article, including the Abstract.

As example: Discussion: P. 13, L. 413ff: "The climate models ensemble means projects a precipitation increase about 1.5% under RCP8.5 with a resulting discharge decrease of 2%. This indicates that the catchment ecosystem is able to optimize the use of water and energy available in the environment (...)." Abstract: p.1, L. 24f: "The RCMs-GCMs ensemble average suggests a +7% increase in annual discharge under RCP4.5 and a -2% decrease under RCP8.5. (...) Therefore, potential increase and decrease of future discharge has to be considered in climate adaptation strategies in the catchment."

Hence, also the Abstract of the article should be revised according to the uncertainty of the results and the conclusions as given in the Conclusion section.

Thanks for pointed out these somewhat misleading/unclear formulations. We changed the manuscript accordingly. We rewrote the referred sentences, and the focus is now made on the divergence of projected signals between RCMs instead of their average. See [L23-26](#), [L433-435](#) of the revised manuscript.

5. In the Discussion the authors state: p.12, 362ff: " In the view of the general good simulation of historical discharge for the climate models ensemble, it is worth noting that running the hydrological model with simulated climate data of one node (...) has reasonably bridged the discrepancy between RCMs-GCMs data resolution and hydrological modeling domain. Therefore, the approach can be considered as eligible for climate change impact assessment for small scale catchments."

If I understood the methodology correctly, there were no hydrological measurement data available for the historical period, so the runoff, which was simulated with the input data from one weather station, was compared to the runoff simulated with one node of the bias-corrected historical runs of the GCMs-RCMs. As the bias correction for the climate models was carried out using this weather station data, the hydrological input data certainly turn out to be very similar as they have been adjusted by the bias correction (by definition!). Hence, this "proof" seems to me redundant and not convincing.

It has to be pointed out that; the "one node at a time" method is referred to be an approach for CC impact assessment for small catchments in which interpolation methods create issues related to the representation of climate variables (particularly precipitation). This section was modified in the manuscript ([see L380-388](#)). In regions with higher data availability, historical

RCM-based discharges should necessarily be compared to historical observed discharge, which could not be done in the current study.

6. Concerning the conclusions for the additional value of bias correction when analyzing the relative changes between the future and reference period which was one of the main objectives of the study: p. 3, L. 87: "[this study] has the following objectives: (...) (v) investigate the effect and necessity of bias correction on the detected signal."

In the Introduction the authors cite p. 2, L. 59 "unless the precipitation from climate models are bias corrected, results from hydrological simulations are unrealistic": This statement has been shown not to be necessary true if the relative changes of the climate signal are used as examined by e.g. Hagemann et al. 2011 and Muerth et al. 2013, which are cited in p.5, L. 163. As one main objective of the study, the pro and cons of bias correction should be discussed more extensively in the introduction and/or discussion.

To evaluate the impact of bias correction, the hydrological model was additionally run with non bias corrected future climate of one single climate model which was randomly selected among the 6 RCMs-GCMs (p. 5, L. 163). As this analysis is mentioned as one main objective of this study, I suggest carrying out this analysis for the other 5 climate models to get more reliable results on this topic. Otherwise the conclusions should at least be toned down (e.g. "This result supports further studies, which have shown") and this topic should not be headed as main objective of this study. [Conclusions p.14,

L. 432: "This result indicates that it is safe to perform bias correction; it also points out the "non-necessity" of performing bias correction in order to detect future discharge change signal in the catchment."]

We do agree with Referee2 regarding several aspects addressed in this comment. The manuscript was revised accordingly:

- the bias correction is no more headed as main objective and we rewrote the conclusion on this topic as suggested (please see L94-95).

- "unless the precipitation from climate models are bias corrected, results from hydrological simulations are unrealistic": This statement was toned down as suggested. The findings of Hagemann et al. 2011 and Muerth et al. 2013 did show that if the relative changes of the climate signal are used, hydrological impact assessment with not corrected data can still yield valid results. This comment was incorporated in the manuscript at L61 and L457-458.

Minor comments:

p. 3, L. 84 - please correct "echohydrologocal"

Done (See L89)

p. 4, L. 123f: "(..) data resolution (0.44, about 50 * 50 km²) and the hydrological modeling domain (about 18 * 11 km²)" Please correct "km²" to "km".

Done (See L131-132)

p. 9, L. 268: "The intra-annual change in discharge appears strongly determined by the precipitation change signal (Fig. 8)." Fig. 8 shows monthly discharge changes but not the reason for these changes. Reasons for these changes in discharge could also be e.g. higher evaporative demand due to higher temperatures.

This was corrected to "The intra-annual change in discharge (Fig. 8) appears strongly determined by the precipitation change signal (Fig. 6)". (Please see L277-278).

p. 10, L. 289: please correct "Eco-hydrologic"

Done (Please see L300)

Impact of climate change on water resources in a tropical West African catchment using an ensemble of climate simulations

Yacouba Yira¹, Bernd Diekkrüger¹, Gero Steup¹, Aymar Y. Bossa^{2,3}

¹Department of Geography, University of Bonn, Meckenheimer Allee 166, 53115 Bonn, Germany

²West African Science Service Center on Climate Change and Adapted Land Use-WASCAL, Ouagadougou 06 P.O. Box 9507, Burkina Faso

³Department of Hydrology and Water Resources Management, National Institute of Water, University of Abomey-Calavi, Cotonou 01 P.O. Box 526, Benin

Correspondence to: Yacouba Yira (yira_y@uni-bonn.de)

Abstract. This study evaluates climate change impacts on water resources using an ensemble of six Regional Climate Models (RCMs)-Global Climate Models (GCMs) in the Dano catchment (Burkina Faso). The applied climate datasets were performed in the framework of the COordinated Regional climate Downscaling Experiment (CORDEX-Africa) project.

After evaluation of the historical runs of the climate models ensemble, a statistical bias correction (*Empirical Quantile Mapping*) was applied to daily precipitation. Temperature and bias corrected precipitation data from the ensemble of RCMs-GCMs was then used as input for the Water flow and balance Simulation Model (WaSiM) to simulate water balance components.

The mean hydrological and climate variables for two periods (1971-2000 and 2021-2050) were compared to assess the potential impact of climate change on water resources up to the middle of the twenty-first century under two greenhouse gas concentration scenarios, the Representative Concentration Pathways (RCPs) 4.5 and 8.5. The results indicate: (i) a clear signal of temperature increase of about 0.1 to 2.6 °C for all members of the RCMs-GCMs ensemble; (ii) high uncertainty about how the catchment precipitation will evolve over the period 2021-2050; (iii) the applied bias correction method only affected the magnitude of climate change signal ~~(iiiiv)~~ individual climate models results lead to opposite discharge change signals; (iv) the results for the RCMs-GCMs ensemble are too uncertain to give any clear direction for future hydrological development~~the RCMs-GCMs ensemble average suggests a +7 % increase in annual discharge under RCP4.5 and a -2 % decrease under RCP8.5; (v) the applied bias correction method only affected the magnitude of climate change signal.~~ Therefore, potential increase and decrease of future discharge has to be considered in climate change adaptation strategies in the catchment. The results further underline on the one hand the need for a larger ensemble of projections to properly estimate the impacts of climate change on water resources in the catchment and on the other hand the high uncertainty associated with climate projections for the West African region. A water-energy budget ~~An ecohydrological~~ analysis provides further insight into the behavior of the catchment.

Keywords: Hydrological modeling, RCP, bias correction, West Africa, Ecohydrological analysis, WaSiM.

1. Introduction

Development of adaptation strategies to deal with potential impacts of climate change on hydrological systems is a considerable challenge for water resources management (Muerth et al., 2013; Piani et al., 2010). Besides being highly exposed to climate change, the West African region presents a low adaptive capacity (IPCC, 2014). Projections for the late 21st century suggest severe consequences of climate change on water resources for the region. This includes an increased risk of water stress and flood (Sylla et al., 2015; Oyerinde et al., 2014), and significant change in river discharge regimes (Aich et al., 2014; Ardoin-Bardin et al., 2009; Mbaye et al., 2015).

Rising temperatures, commonly acknowledged by regional climate models (RCMs) and global climate models (GCMs), are expected to intensify the hydrological cycle due to an increased water holding capacity of the atmosphere, leading to an increased amount of renewable fresh water resources (Piani et al., 2010). Another consequence of temperature increase ascertained by Piani et al. (2010) for some regions, is the decrease in precipitation associated with the intensification of the seasonal cycle and the frequency of extreme events. These opposite trends imply that high uncertainties are associated with predicted rising temperatures' impact on the hydrological cycle for some regions (Salack et al., 2015).

Confidence in RCMs and GCMs over West Africa relies on their ability to simulate the West African monsoon (WAM) precipitation (Klein et al., 2015). However, simulating the WAM remains challenging for both RCMs and GCMs (Cook, 2008; Druyan et al., 2009; Paeth et al., 2011; Ruti et al., 2011), as each RCM and GCM produces a version of the WAM, but with some distortion of structure and/or timing. Some GCMs ([e.g. CSIRO, GISS ER, ECHAM5, CCSM](#)) do not generate the WAM at all (Cook and Vizzy, 2006). Part of this divergence is related to: (i) imperfect characterization of tropical precipitation systems; (ii) uncertain future greenhouse gas forcing; (iii) scarcity of observations over West Africa; and (iv) natural climate variability (Cook and Vizzy, 2006; Foley, 2010). The hydrological climate change signal is therefore unclear for the region. Several authors (Kasei, 2009; Paeth et al., 2011; Salack et al., 2015) observed diverging precipitation signals among models. Moreover, several models fail to accurately reproduce the historical rainfall onset, maxima, pattern, and amount of the region (Nikulin et al., 2012; Ardoin-Bardin et al., 2009).

Despite significant advances, outputs of GCMs and RCMs are still characterized by biases that challenge their direct use in climate change impact assessment (Ehret et al., 2012). Indeed, unless the precipitation from climate models are bias corrected, results from hydrological simulations are [often reported to be](#) unrealistic and may lead to incorrect impact assessments (Johnson and Sharma, 2015; Teutschbein and Seibert, 2012; Ahmed et al., 2013). However, correction of climate model based simulation results does not ensure physical consistency (Muerth et al., 2013) and may affect the signal of climate change for specific regions as reported by Hagemann et al. (2011). Consequently, simulated hydrological variables using bias corrected data need to be explored in climate change impact assessment.

There is essential consensus on the necessity of performing multi (climate)-model assessments to estimate the response of the West African climate to global change (Sylla et al., 2015). Accordingly, several studies (e.g. Chen et al., 2013; Zhang et al., 2011) emphasize the importance of using multiple climate models to account for uncertainty when assessing climate change impacts on water resources. Taking advantage of the results of the COordinated Regional climate Downscaling Experiment (CORDEX-Africa) project, this study evaluates potential climate change impacts on water resources using an ensemble of six RCMs-GCMs in the Dano catchment in Burkina Faso. The catchment experiences seasonally limited water availability, and like other catchments of the region, it has experienced the severe droughts of the 1970s (Kasei et al., 2009) which resulted in a decline of water flow in many West African catchments.

A few studies have already investigated the impacts of projected climate change on water resources in West Africa (see Roudier et al. 2014 for a review). ~~Most~~ Many of these studies have used an approach based on hydrological models driven by a single RCM or GCM data set (e.g. Mbaye et al., 2015; Cornelissen et al., 2013; Bossa et al., 2014; Bossa et al., 2012). Therefore, uncertainty related to the choice of the climate model was not explicitly evaluated. However, ~~a limited other number of~~ studies have used multi-climate model data sets (Kasei, 2009; Ruelland et al., 2012, Aich et al. 2016); most of these studies have resulted in a diverging projected hydrological change signal. Climate model outputs have often been bias corrected to fit the historical climate variables and then used as input for hydrological models but few have investigated the necessity of performing such corrections in detecting the signal of future climate change impacts on water resources.

The current study aims to investigate the future climate change impacts on the hydrology of the Dano catchment in Burkina Faso, thus contributing to the management of water resources in the region. Besides the small scale of the catchment that implies addressing scale issues, the novelty of the study includes ~~the use of an ensemble of climate simulations and an ecohydrological~~ a water-energy budget analysis. Specifically, it has the following objectives: (i) evaluate the historical runs of six RCMs-GCMs at the catchment scale; (ii) analyze the climate change signal for the future period of 2021-2050 compared to the reference period of 1971-2000; ~~(iii) evaluate the ability of the climate models to reproduce the historical discharge,~~ (iii) assess the impacts of climate change on the hydrology of the catchment by the middle of the 21st ~~century;~~ (iv) perform an ecohydrological analysis of the catchment under climate change, ~~evaluate the uncertainty related to the projected hydrological change signal; and (v) investigate the effect and necessity of bias correction on the detected signal.~~

2. Materials and methods

2.1. Study area

The study was carried out in Dano catchment covering a total area of 195 km² in the Ioba province of Southwestern Burkina Faso (Fig. 1). The catchment is one of the study areas of the WASCAL project (West African Science

Service Center on Climate Change and Adapted Land Use, www.wascal.org); whose main target is to increase resilience of human and environmental systems to climate change.

The major land uses in the catchment include shifting cultivation which accounts for one third of the catchment area; natural vegetation albeit converted into agricultural and fallow lands form part of Sudanian region characterized by wooded, scrubby savannah and abundant annual grasses. Sorghum (*Sorghum bicolor*), millet (*Pennisetum glaucum*), cotton (*Gossypium hirsutum*), maize (*Zea mays*), cowpeas (*Vigna unguiculata*) and groundnut (*Arachidis hypogaea*) are the major crops cultivated in the catchment.

The catchment is characterized by a flat landscape with a mean slope of 2.9 % and mean altitude of 295 m above sea level. According to Schmengler (2011), mean annual temperature of 28.6 °C was recorded while mean annual rainfall ranged from 800 mm – 1200 mm for the period of 1951- 2005. The catchment receives monsoonal rains with a dry season occurring in the months of November to April while the wet season being experienced in the months of July to September. This kind of rainfall pattern limits water availability especially in the dry season hence communities in the catchment are vulnerable to water scarcity since they heavily rely on surface water.

Plinthosol characterized by a plinthite subsurface layer in the upper first meter of the soil profile accounts for 73.1 % of the soil types in the catchment, other soil types found within the catchment include *gleysol*, *cambisol*, *lixisol*, *leptosol* and *stagnosol* (WRB, 2006).

2.2. Climate data

Observed mean daily temperature and daily precipitation used in the study were collected from the national meteorological service of Burkina Faso (DGM). The dataset covers the reference period of 1971-2000. Although the national observation network includes several rainfall gauges and synoptic stations, solely the data of the Dano station were used as it is located in the study area.

An ensemble of six RCM-GCM datasets is exploited in the study (Table 1). The RCM-GCM simulations were performed in the framework of the CORDEX-Africa project. The datasets were produced by three RCM groups (CCLM: Climate Limited-area Modelling Community, Germany; RACMO22: Royal Netherlands Meteorological Institute, Netherlands; HIRHAM5: Alfred Wegener Institute, Germany) using the boundary conditions of four GCMs (CNRM-CM5, EC-EARTH, ESM-LR, NorESM-M). Each dataset consists of historical runs and projections based on the emission scenarios RCP4.5 and RCP8.5 (Moss et al., 2010). The retrieved data (precipitation and temperature) range from 1971-2000 for the historical runs and 2021-2050 for the RCPs. An extent of 20 nodes of the African CORDEX domain, surrounding the catchment, was delineated to simulate the catchment's climate and consider climate variability in the catchment region (Fig. 1 B). The climate variables (historical and projected) of the extent of 20 nodes were used as inputs for the hydrological simulation model.

Due to the discrepancy between the RCM-GCM data resolution (0.44°, about 50 * 50 km²) and the hydrological modeling domain (about 18 * 11 km²) the data of each node were separately used as climate input for the hydrological simulation model. Therefore, for each period (historical and projected scenarios) 20 simulations

corresponding to the 20 nodes are performed per RCM-GCM. Monthly water balance for each RCM-GCM is then calculated as arithmetic mean.

2.3. Bias correction of precipitation data

The RCMs-GCMs ensemble was evaluated to get an estimate of the historical simulated variables for the catchment by comparing RCMs-GCMs based simulations of historical climate variables to the observations provided by the National Meteorological Service (DGM). As presented in section 3.1, whereas temperature simulated by the models ensemble enveloped the observed temperature with moderate deviation, precipitation simulated by individual RCM-GCM exhibited biases such as overestimation of annual precipitation as well as misrepresentation of the timing of the rainy season. A precipitation bias correction was therefore applied to the six RCMs-GCMs following the non-parametric quantile mapping using the empirical quantiles method (Gudmundsson et al.; 2012). For each member, a transfer function was derived using observed and modeled precipitation for the period of 1971-2000; afterwards the transfer function was applied to the projected climate scenarios (period 2021-2050).

2.4. Hydrological modeling

Observed and RCMs-GCMs based (historical runs and projections) data were used as climate input for version 9.05.04 of the Water flow and balance Simulation Model (WaSiM) (Schulla, 2014). WaSiM is a deterministic and spatially distributed model, which uses mainly physically based approaches to describe hydrological processes. The model configuration as applied in this study is shown in Table 2. Schulla (2014) gives more details of the model structure and processes in the Model Description Manual.

A previous study confirmed the suitability of WaSiM to model the hydrology of the Dano catchment. Details of the model setup and parameterization are available in that study (Yira et al., 2016). Briefly summarized, the model was calibrated and validated using discharge, soil moisture and groundwater depth for the period of 2011-2014. Daily time steps and a regular raster-cell size of 90 m were used. Minimum values of 0.7 for Pearson product-moment-correlation-coefficient, Nash Sutcliffe Efficiency (Nash and Sutcliffe, 1970) and Kling-Gupta Efficiency (Gupta et al., 2009; Kling et al., 2012) were achieved during the calibration and validation using observed discharge. Soil moisture and groundwater dynamics were also well simulated by the model ($R^2 > 0.6$). Therefore, no further model calibration was done in the current study.

No hydrologic observations (discharge, soil moisture and groundwater level) are available for the reference period (1971-2000) in the catchment. The expected climate change for an RCM-GCM is therefore expressed as the relative difference between simulated hydrological variables under reference period (1971-2000) and future period (2021-2050).

Nevertheless, discharge simulated with RCM-GCM historical runs (bias corrected and not bias corrected) were compared to the discharge obtained with observed historical climate data. RCM-GCM based simulations able to reproduce the runoff regime of the past were used for climate change impact assessment. These comparison runs

(performed with CCLM-ESM) showed that bias correction was necessary for RCMs-GCMs based simulations to reproduce the historical discharge regime. Hydrological variables simulated under historical (1971-2000) and projected (2021-2050) climate conditions were therefore compared with bias corrected RCMs-GCMs data. To integrate the potential effect of bias correction on climate change signal as raised by different authors (e.g. Muerth et al., 2013; Ehret et al., 2012; Hagemann et al., 2011), the hydrological model was also run with not bias corrected future climate for CCLM-ESM (which was randomly selected among the 6 RCMs-GCMs).

2.5. Ecohydrologic analysis

A concept of water-energy budget (Tomer and Schilling, 2009; Milne et al., 2002) was applied to estimate the effectiveness of water and energy use by the catchment as it undergoes climate change. While experiencing climate change, a trend towards the optimization of total unused water- P_{ex} (1) and energy- E_{ex} (2) existing in the environment is usually observed. Plotting P_{ex} against E_{ex} allows for determining the ecohydrologic status of the catchment. The climate change signal can therefore be detected by the shift of this status. The direction of the shift indicates whether the catchment experienced water stress or increased humidity. The approach was used to test its validity in analyzing the interplay between temperature increase and precipitation change as projected by the RCMs-GCMs ensemble.

$$P_{ex} = (P - ET_a)/P \quad (1)$$

$$E_{ex} = (ET_p - ET_a)/ET_p \quad (2)$$

Where P is precipitation, ET_a and ET_p refer to actual and potential evapotranspiration respectively.

2.6. Assessment criteria

A set of evaluation measures was used to analyze the RCMs-GCMs historical runs, to assess model performance and to estimate the effects of different climate scenarios on hydrological variables:

- (i) *P-Factor*, measures the percentage of observed climate data covered by the RCMs-GCMs ensemble historical runs;
- (ii) the *R-factor*, indicates for an observation series, how wide the range between minimum RCM-GCM and maximum RCM-GCM for precipitation and temperature is, compared to the observation:

$$R - factor (Var) = \frac{1}{n\sigma_{Var_{obs}}} \sum_{l=1}^n (Var_{Si_{max}} - Var_{Si_{min}}) \quad (3)$$

Where Var is the climate variable (e.g. precipitation), n refers to the observations data points; σ is the standard deviation, obs refers to observation, and Si_{max} and Si_{min} are respectively the maximum and minimum values of the RCMs-GCMs ensemble.

(iii) the normalized root-mean-square deviation (NRMSD), expresses the deviation of each RCM-GCM based precipitation and temperature from the observations;

(iv) the Pearson product-moment-correlation-coefficient (R^2), the Nash Sutcliffe Efficiency (NSE) (Nash and Sutcliffe, 1970) and the Kling-Gupta Efficiency (KGE) (Gupta et al., 2009; Kling et al., 2012) assess the RCM-GCM based discharge simulations ability to reproduce discharge computed using observed climate data;

(v) change signal (Δ) in climate and hydrological variables (precipitation, temperature and discharge) expresses the difference between projected and historical values (4); and

$$\Delta Var = \frac{(Var_{Proj} - Var_{Ref}) \times 100}{Var_{Ref}} \quad (4)$$

Where Var is the evaluated variable (e.g. discharge), $Proj$ = the projected period (2021-2050 under RCP4.5 and RCP8.5) and Ref = Reference or historical period (1971-2000).

(vi) the Wilcoxon (1945) rank-sum test was used to compare discharge change signal with bias corrected and not bias corrected precipitation data (for CCLM-ESM) following Muerth et al. (2013). The test evaluated the null hypothesis: “discharge change signal under bias corrected CCLM-ESM data equals discharge change signal under not bias corrected CCLM-ESM data”. The rejection of the test at 5 % implies that future discharge change under bias correction and no bias correction are significantly different. If the test is not rejected, both discharge change under bias correction and change under not bias correction yield the same result, and thus bias correction do not alter the climate change signal on projected discharge.

3. Results

3.1. Historical runs analysis

The comparison between RCM-GCM historical runs and observations for temperature and precipitation is done for the reference period of 1971-2000 for average monthly values. The correlation coefficient is plotted against the *NRMSD* (Fig. 2) for a cross-comparison between RCMs-GCMs in order to assess the relative ability of each RCM-GCM to represent historical climate conditions in the catchment. The correlation coefficient for the RCM-GCM ensemble is in general higher than 0.7 for both precipitation and temperature. The highest coefficients (0.96) are scored by CCLM-ESM for temperature and HIRAM-NorESM for precipitation. The RCMs-GCMs ensemble mean outscores five members of the RCMs-GCMs ensemble with regard to temperature and precipitation (Fig. 2).

The RCMs-GCMs ensemble shows a clear deviation from observed precipitation compared to temperature (Fig. 2). HIRAM-EARTH and CCLM-EARTH present the lowest deviation for temperature and precipitation respectively. The RCMs-GCMs ensemble mean outcores four out of six RCMs-GCMs for temperature and precipitation with regards to the deviation from observed data.

Fig. 3 (A and B) shows a trend towards an overestimation of annual precipitation throughout the reference period for the RCMs-GCMs ensemble when precipitation data are not bias corrected (UC). Although the RCMs-GCMs ensemble presents a large dispersion ($R\text{-factor} = 4.3$) only 50 % ($P\text{-factor} = 0.5$) of observed precipitation is covered by the RCMs-GCMs ensemble. After bias correction (BC), the RCMs-GCMs ensemble agrees in general with the observed precipitation ($P\text{-factor} = 0.8$), moreover the dispersion of climate models based precipitation decreases ($R\text{-factor} = 3.2$).

The mean annual precipitation pattern is in general well captured by all RCMs-GCMs (Fig. 3 C and D Fig. 4). However, the climate models ensemble, when not bias corrected, covers only 50 % of monthly precipitation despite a large dispersion (Fig. 3 C Fig. 4 UC). After bias correction, the agreement between RCMs-GCMs based precipitation and observation is considerably improved (Fig. 3 D Fig. 4 BC); and the uncertainty band of the climate model is considerably reduced ($R\text{-factor} = 0.1$). However, a slight positive bias is still presented by the climate models ensemble.

Fig. 4 shows that the RCMs-GCMs ensemble fully captures the annual temperature pattern ($P\text{-factor} = 100\%$). However, a gap of up to $-4\text{ }^{\circ}\text{C}$ between some climate models and observations is noted. This translates into an $R\text{-factor}$ reaching 8.2. On average, RACMO-EARTH shows an underestimation of temperatures throughout the year, whereas HIRAM-NorESM indicates an opposite trend.

3.2. Climate change signal

The RCMs-GCMs ensemble exhibits a mixed annual precipitation change signal between reference period (1971-2000) and future period (2021-2050) (Table 3). CCLM-CNRM, RAMCO-EARTH and HIRHAM-NorESM project a precipitation increase of about 2.5 to 21 % whereas CCLM-ESM and CCLM-EARTH indicate a decrease of 3 to 11 %. Bias correction has a minor impact on these signals, as the magnitude of projected precipitation increase ranges from 1 to 18 % and the decrease is around 5-13 % after bias correction.

A much more complex intra-annual precipitation change signal is projected by the climate models ensemble (Fig. 5). CCLM-CNRM and HIRHAM-NorESM, which projected an increased annual precipitation, are characterized by an increased rainfall from May to June followed by a decreased rainfall in August. RAMCO-EARTH shows an increased rainfall throughout the season except in July. The decrease in annual precipitation projected by CCLM-ESM and CCLM-EARTH is consistent throughout the entire season. The climate model ensemble consistently projects mean monthly temperature increase of about 0.1 to $2.3\text{ }^{\circ}\text{C}$ under RCP4.5 and 0.6 to $2.5\text{ }^{\circ}\text{C}$ under RCP8.5 leading to an increase of potential evapotranspiration for the climate models ensemble.

3.3. Historical discharge

RCMs-GCMs ensemble based discharges are compared to discharge simulated using observed climate data to evaluate the climate models ability to reproduce the historical discharge regime over the reference period (Fig. 6). Accordingly, performances (R^2 , NSE and KGE) achieved by the climate models are presented in Table 4. Fig. 6 (a) shows good agreement between (bias corrected) climate models based discharge and observation based discharge, with a trend towards discharge overestimation for some climate models (RACMO-EARTH, CCLM-EARTH and HIRAM-EARTH). All climate models show good statistical quality measures after bias correction. Bias correction impact on simulated historical discharge is shown in Fig. 6 (b) for CCLM-ESM. As an example, simulated discharge for CCLM-ESM with not bias corrected data leads to a misrepresentation of the discharge regime, as peak flow is shifted from August to September and discharge is highly overestimated. Moreover, poor quality measures are achieved by CCLM-ESM with not bias corrected data (Table 4).

3.4. Discharge change

Projected change in annual discharge for the period of 2021-2050 compared to the reference period is presented in Table 5. Alike for precipitation, a mixed annual discharge change signal is projected by the climate model ensemble. It projects: (i) more than 15 % decrease in annual discharge, which is a consequence of relative decrease in precipitation and a consistent increase in potential evapotranspiration for CCLM-ESM, CCLM-EARTH and HIRHAM-EARTH (RCP8.5); (ii) about 5 % decreased in annual discharge for the RCMs-GCMs ensemble mean under RCP8.5 which is the consequence of a slight increase in precipitation counterbalanced by a high increase in potential evapotranspiration; (iii) low to very high (3 to 50 %) increase in total discharge due to increased precipitation not counterbalanced by the evapotranspiration for CCLM-CNRM, RAMCO-EARTH, HIRHAM-NorESM, HIRHAM-EARTH (RCP4.5) and the RCMs ensemble mean (RCP4.5). The intra-annual change in discharge (Fig. 7) appears strongly determined by the precipitation change signal (Fig. 5)~~The intra-annual change in discharge appears strongly determined by the precipitation change signal (Fig. 8)~~. The divergence between climate models is reflected through a large amount of uncertainty associated with the projected annual discharge (Fig. 8).

Under RCP4.5, the discharge change signal for CCLM-ESM is more pronounced with bias corrected precipitation data compared to not bias corrected. Indeed, the projected annual discharge equals -12 % and -5 % with and without bias correction respectively (Table 5). Under RCP8.5, bias correction impact is relatively low. The Wilcoxon (1945) rank-sum, testing the significance of the difference between bias corrected and not bias corrected discharge change signal, indicates that the two signals are not different at p -level equals 0.05. A p -value of the Wilcoxon rank-sum test equals 0.51 and 0.7 is required under RCP4.5 and RCP8.5 respectively to reject the null hypothesis (H_0 : discharge change with bias corrected CCLM-ESM data = discharge change with not bias corrected CCLM-ESM data). Hence, the bias correction impact on discharge change signal alteration can be considered negligible.

The sensitivity of the catchment discharge to precipitation and temperature change is tested by plotting, for each member of the climate models ensemble, predicted precipitation and temperature change against predicted discharge change. The result shows that change in total discharge cannot be strongly related to change in potential

evapotranspiration (Fig. 9 a). However, a high sensitivity of river discharge to precipitation change (Fig. 9 b) is observed. Under scenario RCP4.5, an increase of +5 % in precipitation leads to an increase of discharge of about +12.5 %, whereas a decreased precipitation of the same order leads to a decrease of discharge of -13 %. The same simulations under RCP8.5 yield in a +8.3 % discharge increase and a -14.7 % discharge decrease. Interestingly, under RCP8.5 and assuming comparable precipitation between reference and future periods, a discharge decrease of about -3.2 % should be expected (Fig. 9 b).

3.5. Ecohydrologic status

The Eco-hydrologic status of the catchment for the reference period and future scenarios RCP4.5 and RCP8.5 is shown in Fig. 10 to illustrate the use of energy and water by the catchment while undergoing temperature increase and precipitation change. Moving left to right along “*Excess water- P_{ex}* ” axis indicates that the environmental conditions in the catchment lead to an increase in discharge (CCLM-CNRM, RAMCO-EARTH and HIRHAM-NorESM). Reduction of discharge is experienced when moving the other way round (CCLM-ESM and CCLM-EARTH).

Moving upwards along “*Excess evaporative demand- E_{ex}* ” implies drier environmental conditions due to an increase in evaporative demand and soil water deficit. Except for HIRAM-EARTH, all the climate models project drier conditions (increase in *Excess evaporative demand*) under RCP4.5 as a result of an increased temperature not compensated by the amount and/or timing of precipitation. Increased evaporative demand, with marginally aggravated drier conditions, is shown by CCLM-ESM, HIRAM-NorESM, CCLM-EARTH and RCMs-GCMs ensemble mean under RCP8.5.

The ecohydrologic status of the catchment, irrespective of climate model and emission scenario, projects a shift for the period of 2021-2050 compared to the reference period. Therefore, differences in climate conditions between the two periods influence the hydrology (discharge, evapotranspiration, precipitation) of the catchment.

4. Discussion

4.1. Historical runs analysis

All GCMs and RCMs applied in this study have proved in previous works to fairly reproduce the climatology of West Africa (Cook and Vizy, 2006; Dosio et al., 2015; Gbobaniyi et al., 2014; Paeth et al., 2011). The RCMs-GCMs ensemble reasonably captures the annual cycle of temperatures, and following several authors (e.g. Buontempo et al., 2014; Waongo et al., 2015) no bias correction was performed for this climate variable. The systematic positive bias and large deviation from observed precipitation exhibited by the climate models ensemble in this study is also reported by several authors (Nikulin et al., 2012; Paeth et al., 2011) for the southern Sahel Zone. This deviation motivated the bias correction of precipitation. After correction, the positive bias is significantly reduced for all individual climate models and the improvement is clearly visible.

In general, the RCMs-GCMs ensemble mean outperforms individual climate models for both temperature and precipitation. This is due to the fact that individual model errors of opposite sign cancel each other out (Nikulin et al., 2012; Paeth et al., 2011). However, the climate models ensemble mean should not be considered as an expected outcome (Nikulin et al., 2012). Rather considering a large ensemble of climate models should be seen as necessary to properly perform future climate impact studies in the catchment (Gbobaniyi et al., 2014) and to assess the range of potential future hydrological status required for adaptation and management strategies.

4.2. Climate change signal

Compared to the period of 1971-2000, a clear temperature increase signal is projected for 2021-2050 by the six members of the RCMs-GCMs ensemble in the catchment. This feature is common to all multi-model ensemble studies performed in the region (IPCC, 2014). It is further in line with the historical temperature change observed in the region as reported by Waongo (2015) who used the same observation data set applied in the current study. He reported an average +0.31°C/decade and +0.17°C/decade increase for the minimum and maximum temperature respectively for the region considering the period of 1960-2010. However, the climate models ensemble does not agree on the projected precipitation change signal as wetter (RAMCO-EARTH), drier (CCLM-ESM and CCLM-EARTH) as well as mixed (CCLM-CNRM, HIRHAM-NorESM and HIRAM-EARTH) trends are shown by the individual model. It is worth noting that the Dano catchment is located in a region where the “*Coupled Model Intercomparison Project Phase 5 (CMIP5)*” models showed divergent precipitation change for the mid-21st century (IPCC, 2014).

The precipitation change projected by CCLM-CNRM and HIRHAM-NorESM, wetter conditions associated with drought during specific months, is consistent with the change reported by Patricola and Cook (2009) for the West African region. They highlighted an increase in precipitation in general, but also noted drier June and July months. A similar result is achieved by Kunstmann et al. (2008) in the Volta Basin, albeit with a decrease in precipitation at the beginning of rainy season in April.

Precipitation change projected by CCLM-ESM and CCLM-EARTH is consistent with the decrease in June-July-August season noted by Buontempo et al. (2014). A reduction in precipitation during the rainy season is also achieved with RegCM3, driven by ECHAM5 in the Niger River Basin (Oguntunde and Abiodun, 2012). Up to 20.3 % reduction of precipitation in some months is projected, but an increased precipitation during the dry season is also expected.

A critical analysis of CCLM (by Dosio et al., 2015) showed that the model is significantly influenced by the driving GCM (including EC-Earth, ESM-LR, and CNRM-CM). Such an analysis was not found for RACMO and HIRAM. Overestimation of precipitation is a common feature to the RCMs-GCMs ensemble applied in this study, which could suggest that the RCMs inherit the bias from the GCM (Dosio et al., 2015). Consistently with Paeth et al. (2011), the relation between RCM trend and driving GCM cannot be observed in the current study as CCLM-EARTH and RACMO-EARTH clearly show opposite trends although both are driven by EC-EARTH. Differences

in projected trends are also highlighted by individual RCMs driven by different GCMs (e.g. CCLM-EARTH and CCLM-CNRM).

4.3. Historical discharge

Compared to the observation based simulation, not bias corrected RCMs-GCMs based discharge is characterized by an overestimation of annual discharge. This misrepresentation results from the positive precipitation bias presented by the climate models ensemble. The bias correction significantly improves the ability of all members of the climate models ensemble to reproduce the historical discharge regime. By comparing simulated discharge for CCLM-ESM with bias corrected and not bias corrected precipitation data, it clearly appears that the bias correction methodology is effective with regards to both discharge regime and total discharge. However, a trend towards discharge overestimation was noticed after bias correction of precipitation. This could be related to:

- (i) the relative long period used for the bias correction (1971-2000). As noticed by Piani et al. (2010), fragmenting the correction period to decade and deriving several transfer functions can improve the bias correction result and further contribute to capture the decadal rainfall change that characterizes the West African climate; and
- (ii) the fact that temperature was not bias corrected. This led to ETp values that vary from one RCM-GCM to another since ETp after *Hamon* is computed based on temperature values only (Table 2). As a result, a relatively large range of potential evapotranspiration is observed for the climate models as an ensemble (Table 6).

In view of the general good simulation of historical discharge for the climate models ensemble, it is worth noting that running the hydrological model with simulated climate data of one node at a time (section 2.2) has reasonably bridged the discrepancy between RCMs-GCMs data resolution and hydrological modeling domain (see fig. 1 of supplementary materials for the hydrological spread of the 20 nodes approach and fig.2 of supplementary materials for the difference in precipitation between the 20 nodes approach and the standard 3x3 nodes average approach). Therefore, the approach can be considered as eligible for climate change impact assessment for small scale catchments in which interpolation methods create issues related to the representation of climate variables (particularly precipitation). However, besides regional climate specificities, its reliability might depend on the extent of the RCM-domain used to simulate a given catchment climate, which in the case of this study was set at $0.44^{\circ} \times 4$ over $0.44^{\circ} \times 5$ in order to account for climate spatial variability. In data available regions, historical RCM-based discharges should necessarily be compared to historical observed discharge, which could not be done in the current study.

4.4. Discharge change

A mixed annual discharge change signal is projected by the climate models ensemble for the period of 2021-2050. These trends agree with several studies in the region (Table 7), although all were carried out at the mesoscale and macroscale:

- **Negative trend** (CCLM-ESM and CCLM-EARTH). A discharge decrease of 30 to 46 % is reported by Ruelland et al. (2012) using MadCM3 and MPI-M in the Bani catchment. A similar trend, resulting from a combination of temperature increase and precipitation decrease was reached by Mbaye et al. (2015) using the climate model REMO in the Upper Senegal Basin; as did Cornelissen et al. (2013) and Bossa et al. (2014) in the Térou and the Ouémé catchment respectively.
- **Positive trend** (CCLM-CNRM, RAMCO-EARTH and HIRHAM-NorESM). An increase of 38 % in annual discharge in the region is reported by Ardoin-Bardin et al. (2009) for the Sassandra catchment (South of the Dano catchment) using climate projections of HadCM3-A2. This results from a 11 % increase in precipitation not counterbalanced by the 4.5 % increase of potential evapotranspiration.
- **Mixed trend** (HIRHAM-EARTH and RCMs-GCMs ensemble). A mixed discharge change signal for the future period is the common signal projected by multi-climate models studies performed in the West African region. In the Niger basin, Aich et al. (2014) simulated change in annual discharge ranging from an increase of up to 50 % to a decrease of up to 50 % using an ensemble of five climate models. Similar signals are reported by Kasei (2009) who applied two climate models (MM5 and REMO) in the Volta basin.

This mixed hydrological change signal is the result of high uncertainties associated to the precipitation change projected by climate models for the catchment (IPCC, 2014). The Wilcoxon rank-sum test further indicated that bias correction did not significantly alter these discharge change signals. Due to the high sensitivity and nonlinear response of the catchment discharge to precipitation, any change in precipitation will have a strong impact on the discharge; the impact will further be pronounced under RCP8.5 compared to RCP4.5. Irrespective of emission scenario, change in potential evapotranspiration alone failed to strongly explain change in annual discharge (Fig. 9 a); this is partly explained by the fact that the environmental system of the catchment is water limited and not energy limited.

The water limited environment of the catchment might also explain the performance of the hydrological model for the climate models ensemble despite the non-bias correction of temperature data (up to 4°C gaps between observed and simulated temperature were noticed for some months, section 3.1). The annual evaporative demand for the climate models ensemble, including RACMO-EARTH which underestimated observed temperature for the reference period, exceeds (almost doubles) precipitation (Table 6). In such a system, also characterized by extended periods with little to no precipitation (November-May) actual evapotranspiration is strongly controlled by precipitation (Guswa, 2005; Schenk and Jackson, 2002). Therefore, an increase in ETp is not necessarily translated in an increase in ETa as limitation in precipitation (soil moisture) dictates water fluxes (Newman et al., 2006) (e.g. CCLM-EARTH and CCLM-ESM in Table 6).

4.5. Ecohydrologic status

The E_{ex} - P_{ex} plot (Fig. 10) allows accurately displaying climate change impact on the catchment hydrology, as main water balance components (precipitation, discharge and evapotranspiration) are presented in an integrated manner.

The overall ecohydrologic effect of climate change in the catchment, as shown by the plots, is a trend towards drier environmental conditions due to increased evaporative demand- E_{ex} . This denotes an increase in potential evapotranspiration higher than the increase in actual evapotranspiration. By contrast, change in the proportion of precipitation converted to discharge- P_{ex} appears specific to each climate model, with a marginal trend towards discharge increase for the models ensemble under RCP4.5 and discharge decrease under RCP8.5.

All the climate models that projects a precipitation increase of about 1.5 % under RCP8.5 with a resulting in an discharge decrease of 2 % increase. This indicates that the catchment ecosystem (defined as the vegetation within the catchment and provided by the land use and land cover map of the catchment) is able to optimize the use of water and energy available in the environment, thus reducing unused water (P_{ex}) with temperature increase (Caylor et al., 2009). Such an optimization, although not investigated in this study, may lead plants to change the allocation of fixed carbon to various tissues and organs (Collins and Bras, 2007; Milne et al., 2002). The suitability of the catchment area for the current plant species could also be affected (McClean et al., 2005) by the projected climate change.

In a previous study (Yira et al., 2016), land use in the catchment was found to be characterized by conversion from savannah to cropland implying the reduction of the vegetation covered fraction, root depth, leaf area index etc. Such a land use and land cover change strongly affects the ecohydrologic status of a catchment. Tomer and Schilling (2009) highlighted that removal of perennial vegetation leads to an increase of both *Excess Water*- P_{ex} and *Excess evaporative demand*- E_{ex} . Combining this land use change to climate change impact would therefore on the one hand aggravate water stress for plants in the catchment and on the other hand increase the unused water in the catchment.

5. Conclusion

An ensemble of six RCMs-GCMs data, all produced in the frame of the CORDEX-Africa project, were used as input to a hydrological simulation model to investigate climate change impact on water resources in the Dano catchment by the mid-21st century. The ability of the RCMs-GCMs ensemble to simulate historical climate and discharge was evaluated prior to future climate change impact assessment.

The six climate models fairly reproduce the observed temperature. By contrast, bias correction was necessary for all climate models to accurately reproduce observed precipitation and historical discharge. The applied bias correction method further proved not to alter the discharge change signal. However, projected discharge change signal with and without bias corrected data were tested very comparable. This result indicates that it is safe to perform bias correction; it also points out the “non-necessity” of performing bias correction in order to detect future discharge change signal in the catchment when relative change in climate variables are used as reported by several authors (e.g. Muerth et al., 2013; Hagemann et al., 2011).

A temperature increase is consistently projected by the models ensemble. This reinforces the commonly acknowledged warming signal for the region. However, the lack of agreement among models with regard to the

projected precipitation change signal creates a considerable uncertainty about how the catchment discharge will evolve by 2050. As discharge in the catchment is strongly determined by precipitation, no clear trend in future development of water resources can be concluded due to the high variability of the different climate models and scenarios. Therefore, potential increase and decrease of future discharge have to be considered in climate change adaptation strategies in the region.

The ecohydrological concept as applied in this study proved to fully capture climate change impact on the catchment hydrology as both discharge change signal, precipitation and actual/potential evapotranspiration change signal are consistently displayed by the E_{ex} - P_{ex} plot. The approach appears suitable to display the results of climate change impact on catchment hydrology; it further brings insights about the catchment environmental conditions, which can assist in development of climate change adaptation strategies.

The results further underline on the one hand the need for a larger ensemble of projections to properly estimate the impacts of climate change on water resources in the catchment and on the other hand the high uncertainty associated with climate projections for the West African region. Therefore, assessing future climate change impact on water resources for the region needs to be continuously updated with the improvement of climate projections.

Acknowledgement

The authors are grateful for the financial support provided by the German Federal Ministry of Education and Research (BMBF) (Grant No. 01LG1202E) under the auspices of the West African Science Service Centre for Climate Change and Adapted Land Use (WASCAL) project. They thank Dr. J. Schulla for providing support for the application of WaSiM. Thanks go to the CORDEX project & partner institutions for making climate data available and to Dr. D. Wisser for providing a R-code for bias correction. Mr. T. Jütten and Mr. F. Op de Hipt are acknowledged for their comments on the manuscript.

References

- Ahmed, K.F., Wang, G., Silander, J., Wilson, A.M., Allen, J.M., Horton, R., Anyah, R., 2013. Statistical downscaling and bias correction of climate model outputs for climate change impact assessment in the U.S. northeast. *Glob. Planet. Change* 100, 320–332. doi:10.1016/j.gloplacha.2012.11.003
- Aich, V., Liersch, S., Vetter, T., Huang, S., Tecklenburg, J., Hoffmann, P., Koch, H., Fournet, S., Krysanova, V., Müller, E.N., Hattermann, F.F., 2014. Comparing impacts of climate change on streamflow in four large African river basins. *Hydrol Earth Syst Sci* 18, 1305–1321. doi:10.5194/hess-18-1305-2014
- [Aich, V., Liersch, S., Vetter, T., Fournet, S., Andersson, J.C.M., Calmanti, S., van Weert, F.H.A., Hattermann, F.F., Paton, E.N., 2016. Flood projections within the Niger River Basin under future land use and climate change. *Sci. Total Environ.* 562, 666–677. doi:10.1016/j.scitotenv.2016.04.021](#)

- Ardoïn-Bardin, S., Dezetter, A., Servat, E., Paturel, J.E., Mahé, G., Niel, H., Dieulin, C., 2009. Using general circulation model outputs to assess impacts of climate change on runoff for large hydrological catchments in West Africa. *Hydrol. Sci. J.* 54, 77–89. doi:10.1623/hysj.54.1.77
- 495 Bossa, A.Y., Diekkrüger, B., Agbossou, E.K., 2014. Scenario-Based Impacts of Land Use and Climate Change on Land and Water Degradation from the Meso to Regional Scale. *Water* 6, 3152–3181. doi:10.3390/w6103152
- Bossa, A.Y., Diekkrüger, B., Giertz, S., Steup, G., Sintondji, L.O., Agbossou, E.K., Hiepe, C., 2012. Modeling the effects of crop patterns and management scenarios on N and P loads to surface water and groundwater in a semi-humid catchment (West Africa). *Agric. Water Manag.* 115, 20–37. doi:10.1016/j.agwat.2012.08.011
- 500 Buontempo, C., Mathison, C., Jones, R., Williams, K., Wang, C., McSweeney, C., 2014. An ensemble climate projection for Africa. *Clim. Dyn.* 44, 2097–2118. doi:10.1007/s00382-014-2286-2
- Caylor, K.K., Scanlon, T.M., Rodriguez-Iturbe, I., 2009. Ecohydrological optimization of pattern and processes in water-limited ecosystems: A trade-off-based hypothesis. *Water Resour. Res.* 45, W08407. doi:10.1029/2008WR007230
- 505 Chen, J., Brissette, F.P., Chaumont, D., Braun, M., 2013. Performance and uncertainty evaluation of empirical downscaling methods in quantifying the climate change impacts on hydrology over two North American river basins. *J. Hydrol.* 479, 200–214. doi:10.1016/j.jhydrol.2012.11.062
- Collins, D.B.G., Bras, R.L., 2007. Plant rooting strategies in water-limited ecosystems. *Water Resour. Res.* 43, W06407. doi:10.1029/2006WR005541
- 510 Cook, K.H., 2008. Climate science: The mysteries of Sahel droughts. *Nat. Geosci.* 1, 647–648. doi:10.1038/ngeo320
- Cook, K.H., Vizzy, E.K., 2006. Coupled Model Simulations of the West African Monsoon System: Twentieth- and Twenty-First-Century Simulations. *J. Clim.* 19, 3681–3703. doi:10.1175/JCLI3814.1
- Cornelissen, T., Diekkrüger, B., Giertz, S., 2013. A comparison of hydrological models for assessing the impact of land use and climate change on discharge in a tropical catchment. *J. Hydrol.* 498, 221–236. doi:10.1016/j.jhydrol.2013.06.016
- 515 Dosio, A., Panitz, H.-J., Schubert-Frisius, M., Lüthi, D., 2015. Dynamical downscaling of CMIP5 global circulation models over CORDEX-Africa with COSMO-CLM: evaluation over the present climate and analysis of the added value. *Clim. Dyn.* 44, 2637–2661. doi:10.1007/s00382-014-2262-x
- Druyan, L.M., Feng, J., Cook, K.H., Xue, Y., Fulakeza, M., Hagos, S.M., Konaré, A., Moufouma-Okia, W., Rowell, D.P., Vizzy, E.K., Ibrah, S.S., 2009. The WAMME regional model intercomparison study. *Clim. Dyn.* 35, 175–192. doi:10.1007/s00382-009-0676-7
- 520 Ehret, U., Zehe, E., Wulfmeyer, V., Warrach-Sagi, K., Liebert, J., 2012. HESS Opinions “Should we apply bias correction to global and regional climate model data?” *Hydrol Earth Syst Sci* 16, 3391–3404. doi:10.5194/hess-16-3391-2012
- 525 Feddes, R.A., Kowalik, P.J., Zaradny, H., 1978. Simulation of field water use and crop yield. Centre for Agricultural Publishing and Documentation.

- Federer, C.A., Lash, D., 1983. BROOK - a hydrologic simulation model for eastern forests. Resources Research Center, University of New Hampshire.
- Foley, A.M., 2010. Uncertainty in regional climate modelling: A review. *Prog. Phys. Geogr.* doi:10.1177/0309133310375654
- Gbobaniyi, E., Sarr, A., Sylla, M.B., Diallo, I., Lennard, C., Dosio, A., Dhiédiou, A., Kamga, A., Klutse, N.A.B., Hewitson, B., Nikulin, G., Lamptey, B., 2014. Climatology, annual cycle and interannual variability of precipitation and temperature in CORDEX simulations over West Africa. *Int. J. Climatol.* 34, 2241–2257. doi:10.1002/joc.3834
- Gudmundsson, L., Bremnes, J.B., Haugen, J.E., Engen-Skaugen, T., 2012. Technical Note: Downscaling RCM precipitation to the station scale using statistical transformations - a comparison of methods. *Hydrol. Earth Syst. Sci.* 16, 3383–3390. doi:10.5194/hess-16-3383-2012
- Gupta, H.V., Kling, H., Yilmaz, K.K., Martinez, G.F., 2009. Decomposition of the mean squared error and NSE performance criteria: Implications for improving hydrological modelling. *J. Hydrol.* 377, 80–91. doi:10.1016/j.jhydrol.2009.08.003
- Guswa, A.J., 2005. Soil-moisture limits on plant uptake: An upscaled relationship for water-limited ecosystems. *Adv. Water Resour.* 28, 543–552. doi:10.1016/j.advwatres.2004.08.016
- Hagemann, S., Chen, C., Haerter, J.O., Heinke, J., Gerten, D., Piani, C., 2011. Impact of a Statistical Bias Correction on the Projected Hydrological Changes Obtained from Three GCMs and Two Hydrology Models. *J. Hydrometeorol.* 12, 556–578. doi:10.1175/2011JHM1336.1
- IPCC, 2014. Climate change 2014: impacts, adaptation, and vulnerability. Part B: regional aspects. Contribution of Working Group II to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change (Barros, V.R., C.B. Field, D.J. Dokken, M.D. Mastrandrea, K.J. Mach, T.E. Bilir, M. Chatterjee, K.L. Ebi, Y.O. Estrada, R.C. Genova, B. Girma, E.S. Kissel, A.N. Levy, S. MacCracken, P.R. Mastrandrea, and L.L. White, Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, 688 . ed.
- Johnson, F., Sharma, A., 2015. What are the impacts of bias correction on future drought projections? *J. Hydrol.* 525, 472–485. doi:10.1016/j.jhydrol.2015.04.002
- Kasei, R.A., 2009. Modelling impacts of climate change on water resources in the Volta Basin, West Africa. (PhD Thesis) University of Bonn, Germany. <http://hss.ulb.uni-bonn.de/2010/1977/1977.pdf>.
- Kasei, R., Dieckrüger, B., Leemhuis, C., 2009. Drought frequency in the Volta Basin of West Africa. *Sustain. Sci.* 5, 89–97. doi:10.1007/s11625-009-0101-5
- Klein, C., Heinzeller, D., Bliefernicht, J., Kunstmann, H., 2015. Variability of West African monsoon patterns generated by a WRF multi-physics ensemble. *Clim. Dyn.* 45, 2733–2755. doi:10.1007/s00382-015-2505-5
- Kling, H., Fuchs, M., Paulin, M., 2012. Runoff conditions in the upper Danube basin under an ensemble of climate change scenarios. *J. Hydrol.* 424–425, 264–277. doi:10.1016/j.jhydrol.2012.01.011
- Kunstmann, H., Jung, G., Wagner, S., Clottey, H., 2008. Integration of atmospheric sciences and hydrology for the development of decision support systems in sustainable water management. *Phys. Chem. Earth Parts ABC*,

Hydrological Assessment and Integrated Water Resources Management with Special Focus on Developing Countries 33, 165–174. doi:10.1016/j.pce.2007.04.010

- 565 Mbaye, M.L., Hagemann, S., Haensler, A., Stacke, T., Gaye, A.T., Afouda, A., 2015. Assessment of Climate Change Impact on Water Resources in the Upper Senegal Basin (West Africa). *Am. J. Clim. Change* 4, 77. doi:10.4236/ajcc.2015.41008
- McClean, C.J., Lovett, J.C., Küper, W., Hannah, L., Sommer, J.H., Barthlott, W., Termansen, M., Smith, G.F., Tokumine, S., Taplin, J.R.D., 2005. African Plant Diversity and Climate Change. *Ann. Mo. Bot. Gard.* 92, 570 139–152.
- Milne, B.T., Gupta, V.K., Restrepo, C., 2002. A scale invariant coupling of plants, water, energy, and terrain. *Écoscience* 9, 191–199.
- Moss, R.H., Edmonds, J.A., Hibbard, K.A., Manning, M.R., Rose, S.K., van Vuuren, D.P., Carter, T.R., Emori, S., Kainuma, M., Kram, T., Meehl, G.A., Mitchell, J.F.B., Nakicenovic, N., Riahi, K., Smith, S.J., Stouffer, R.J., Thomson, A.M., Weyant, J.P., Wilbanks, T.J., 2010. The next generation of scenarios for climate change research and assessment. *Nature* 463, 747–756. doi:10.1038/nature08823
- 575 Muerth, M.J., Gauvin St-Denis, B., Ricard, S., Velázquez, J.A., Schmid, J., Minville, M., Caya, D., Chaumont, D., Ludwig, R., Turcotte, R., 2013. On the need for bias correction in regional climate scenarios to assess climate change impacts on river runoff. *Hydrol Earth Syst Sci* 17, 1189–1204. doi:10.5194/hess-17-1189-2013
- 580 Nash, J.E., Sutcliffe, J.V., 1970. River flow forecasting through conceptual models part I — A discussion of principles. *J. Hydrol.* 10, 282–290. doi:10.1016/0022-1694(70)90255-6
- Newman, B.D., Wilcox, B.P., Archer, S.R., Breshears, D.D., Dahm, C.N., Duffy, C.J., McDowell, N.G., Phillips, F.M., Scanlon, B.R., Vivoni, E.R., 2006. Ecohydrology of water-limited environments: A scientific vision. *Water Resour. Res.* 42, W06302. doi:10.1029/2005WR004141
- 585 Nikulin, G., Jones, C., Giorgi, F., Asrar, G., Büchner, M., Cerezo-Mota, R., Christensen, O.B., Déqué, M., Fernandez, J., Hänsler, A., van Meijgaard, E., Samuelsson, P., Sylla, M.B., Sushama, L., 2012. Precipitation Climatology in an Ensemble of CORDEX-Africa Regional Climate Simulations. *J. Clim.* 25, 6057–6078. doi:10.1175/JCLI-D-11-00375.1
- 590 Oguntunde, P.G., Abiodun, B.J., 2012. The impact of climate change on the Niger River Basin hydroclimatology, West Africa. *Clim. Dyn.* 40, 81–94. doi:10.1007/s00382-012-1498-6
- Oyerinde, G.T., Hountondji, F.C.C., Wisser, D., Dieckkrüger, B., Lawin, A.E., Odofin, A.J., Afouda, A., 2014. Hydro-climatic changes in the Niger basin and consistency of local perceptions. *Reg. Environ. Change* 15, 1627–1637. doi:10.1007/s10113-014-0716-7
- 595 Paeth, H., Hall, N.M.J., Gaertner, M.A., Alonso, M.D., Moumouni, S., Polcher, J., Ruti, P.M., Fink, A.H., Gosset, M., Lebel, T., Gaye, A.T., Rowell, D.P., Moufouma-Okia, W., Jacob, D., Rockel, B., Giorgi, F., Rummukainen, M., 2011. Progress in regional downscaling of west African precipitation. *Atmospheric Sci. Lett.* 12, 75–82. doi:10.1002/asl.306

- 600 Patricola, C.M., Cook, K.H., 2009. Northern African climate at the end of the twenty-first century: an integrated
application of regional and global climate models. *Clim. Dyn.* 35, 193–212. doi:10.1007/s00382-009-0623-
7
- Piani, C., Weedon, G.P., Best, M., Gomes, S.M., Viterbo, P., Hagemann, S., Haerter, J.O., 2010. Statistical bias
correction of global simulated daily precipitation and temperature for the application of hydrological
models. *J. Hydrol.* 395, 199–215. doi:10.1016/j.jhydrol.2010.10.024
- 605 Roudier, P., Ducharne, A., Feyen, L., 2014. Climate change impacts on runoff in West Africa: a review. *Hydrol*
Earth Syst Sci 18, 2789–2801. doi:10.5194/hess-18-2789-2014
- Ruelland, D., Ardoin-Bardin, S., Collet, L., Roucou, P., 2012. Simulating future trends in hydrological regime of a
large Sudano-Sahelian catchment under climate change. *J. Hydrol.* 424–425, 207–216.
doi:10.1016/j.jhydrol.2012.01.002
- 610 Ruti, P.M., Williams, J.E., Hourdin, F., Guichard, F., Boone, A., Van Velthoven, P., Favot, F., Musat, I.,
Rummukainen, M., Domínguez, M., Gaertner, M.Á., Lafore, J.P., Losada, T., Rodriguez de Fonseca, M.B.,
Polcher, J., Giorgi, F., Xue, Y., Bouarar, I., Law, K., Josse, B., Barret, B., Yang, X., Mari, C., Traore, A.K.,
2011. The West African climate system: a review of the AMMA model inter-comparison initiatives.
Atmospheric Sci. Lett. 12, 116–122. doi:10.1002/asl.305
- 615 Salack, S., Sarr, B., Sangare, S.K., Ly, M., Sanda, I.S., Kunstmann, H., 2015. Crop-climate ensemble scenarios to
improve risk assessment and resilience in the semi-arid regions of West Africa. *Clim. Res.* 65, 107–121.
doi:10.3354/cr01282
- Schenk, H.J., Jackson, R.B., 2002. Rooting depths, lateral root spreads and below-ground/above-ground allometries
of plants in water-limited ecosystems. *J. Ecol.* 90, 480–494. doi:10.1046/j.1365-2745.2002.00682.x
- 620 Schmengler, A.C., 2011. Modeling Soil Erosion and Reservoir Sedimentation at Hillslope and Catchment Scale in
Semi-Arid Burkina Faso (PhD Thesis). University of Bonn, Germany.
- Schulla, J., 2015. Model Description WaSiM. http://wasim.ch/downloads/doku/wasim/wasim_2015_en.pdf.
- Sylla, M.B., Elguindi, N., Giorgi, F., Wissler, D., 2015. Projected robust shift of climate zones over West Africa in
response to anthropogenic climate change for the late 21st century. *Clim. Change* 134, 241–253.
doi:10.1007/s10584-015-1522-z
- 625 Teutschbein, C., Seibert, J., 2012. Bias correction of regional climate model simulations for hydrological climate-
change impact studies: Review and evaluation of different methods. *J. Hydrol.* 456–457, 12–29.
doi:10.1016/j.jhydrol.2012.05.052
- Tomer, M.D., Schilling, K.E., 2009. A simple approach to distinguish land-use and climate-change effects on
watershed hydrology. *J. Hydrol.* 376, 24–33. doi:10.1016/j.jhydrol.2009.07.029
- 630 van Genuchten, M.T., 1980. A Closed-form Equation for Predicting the Hydraulic Conductivity of Unsaturated
Soils. *Soil Sci. Soc. Am. J.* 44, 892. doi:10.2136/sssaj1980.03615995004400050002x
- Waongo, M., Laux, P., Kunstmann, H., 2015. Adaptation to climate change: The impacts of optimized planting
dates on attainable maize yields under rainfed conditions in Burkina Faso. *Agric. For. Meteorol.* 205, 23–
39. doi:10.1016/j.agrformet.2015.02.006
- 635

Waongo, M., 2015. Optimizing Planting Dates for Agricultural Decision-Making under Climate Change over Burkina Faso/West Africa (PhD Thesis). Augsburg, Germany. <https://opus.bibliothek.uni-augsburg.de/opus4/frontdoor/index/index/docId/3280>

Wilcoxon, F., 1945. Individual Comparisons by Ranking Methods. *Biom. Bull.* 1, 80–83. doi:10.2307/3001968

640 WRB, I.U.S.S.W.G., 2006. World reference base for soil resources, World Soil Resources Reports No. 103. ed. Food & Agriculture Org., Rom.

Yira, Y., Diekkrüger, B., Steup, G., Bossa, A.Y., 2016. Modeling land use change impacts on water resources in a tropical West African catchment (Dano, Burkina Faso). *J. Hydrol.* doi:10.1016/j.jhydrol.2016.03.052

645 Zhang, H., Huang, G.H., Wang, D., Zhang, X., 2011. Uncertainty assessment of climate change impacts on the hydrology of small prairie wetlands. *J. Hydrol.* 396, 94–103. doi:10.1016/j.jhydrol.2010.10.037

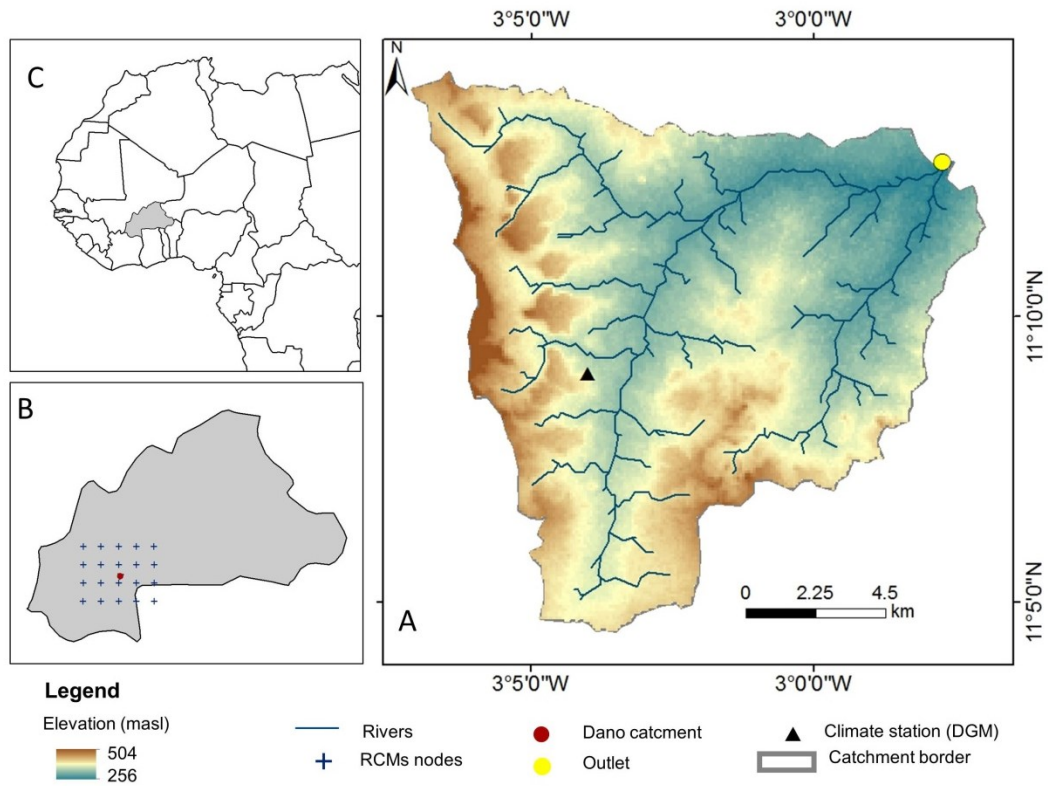


Fig. 1 Location map: (A) Dano catchment, (B) its location in Burkina Faso and (C) in West Africa. (B) RCMs domain used in the study. [The topography and land use and land cover map of the RCMs domain are provided as supplementary materials Fig 3 and 4 respectively.](#)

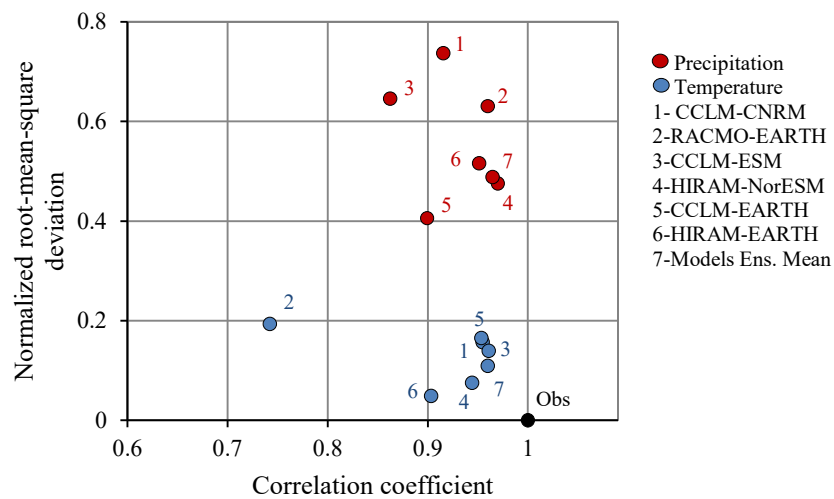


Fig. 2 Statistics of RCM-GCM based precipitation and temperature compared to observations (Obs) for the reference period (1971-2000). Climate model data are not bias corrected. Statistics are computed based on average monthly values.

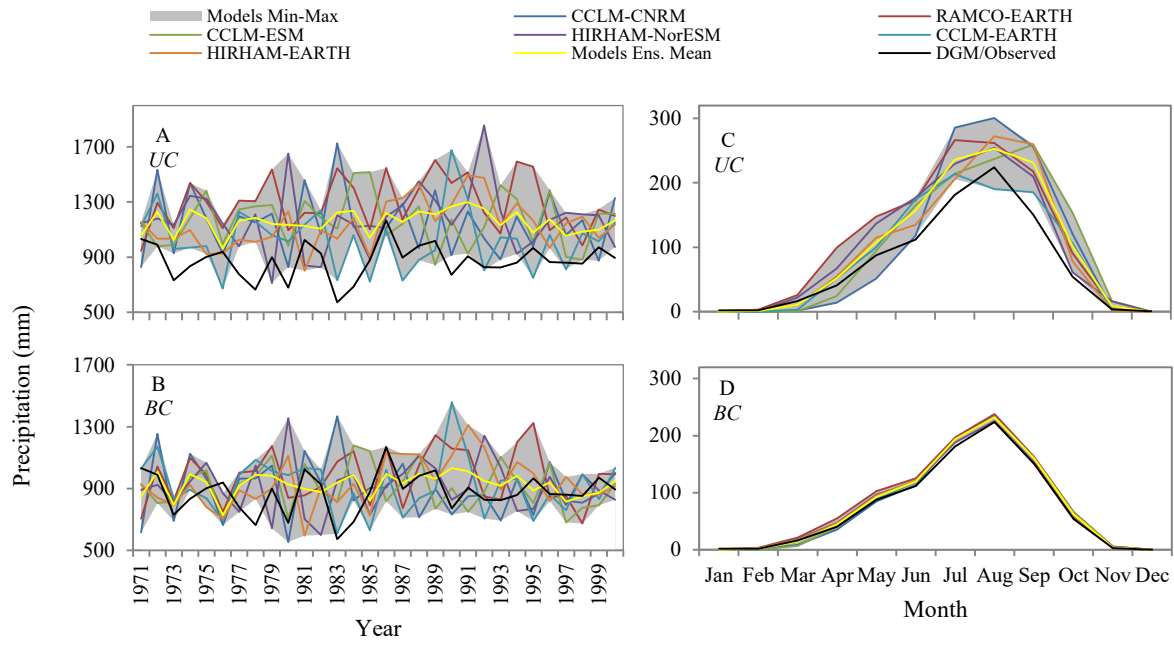


Fig. 3 Historical mean annual (A & B) and mean monthly (C & D) precipitation. UC refers to not bias correct, BC is bias corrected. P -factor equals 50, 80, 50 and 50% for A, B, C and D respectively. R -factor equals 4.3, 3.2, 0.6 and 0.11 for A, B, C and D respectively.


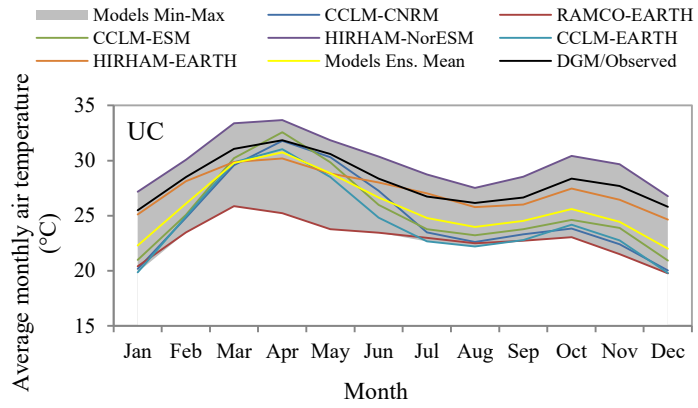


Fig. 4 Monthly air temperature derived from climate models and observations for the reference period (1971-2000). Data are not bias corrected. P -factor= 100% and R -factor= 8.2.

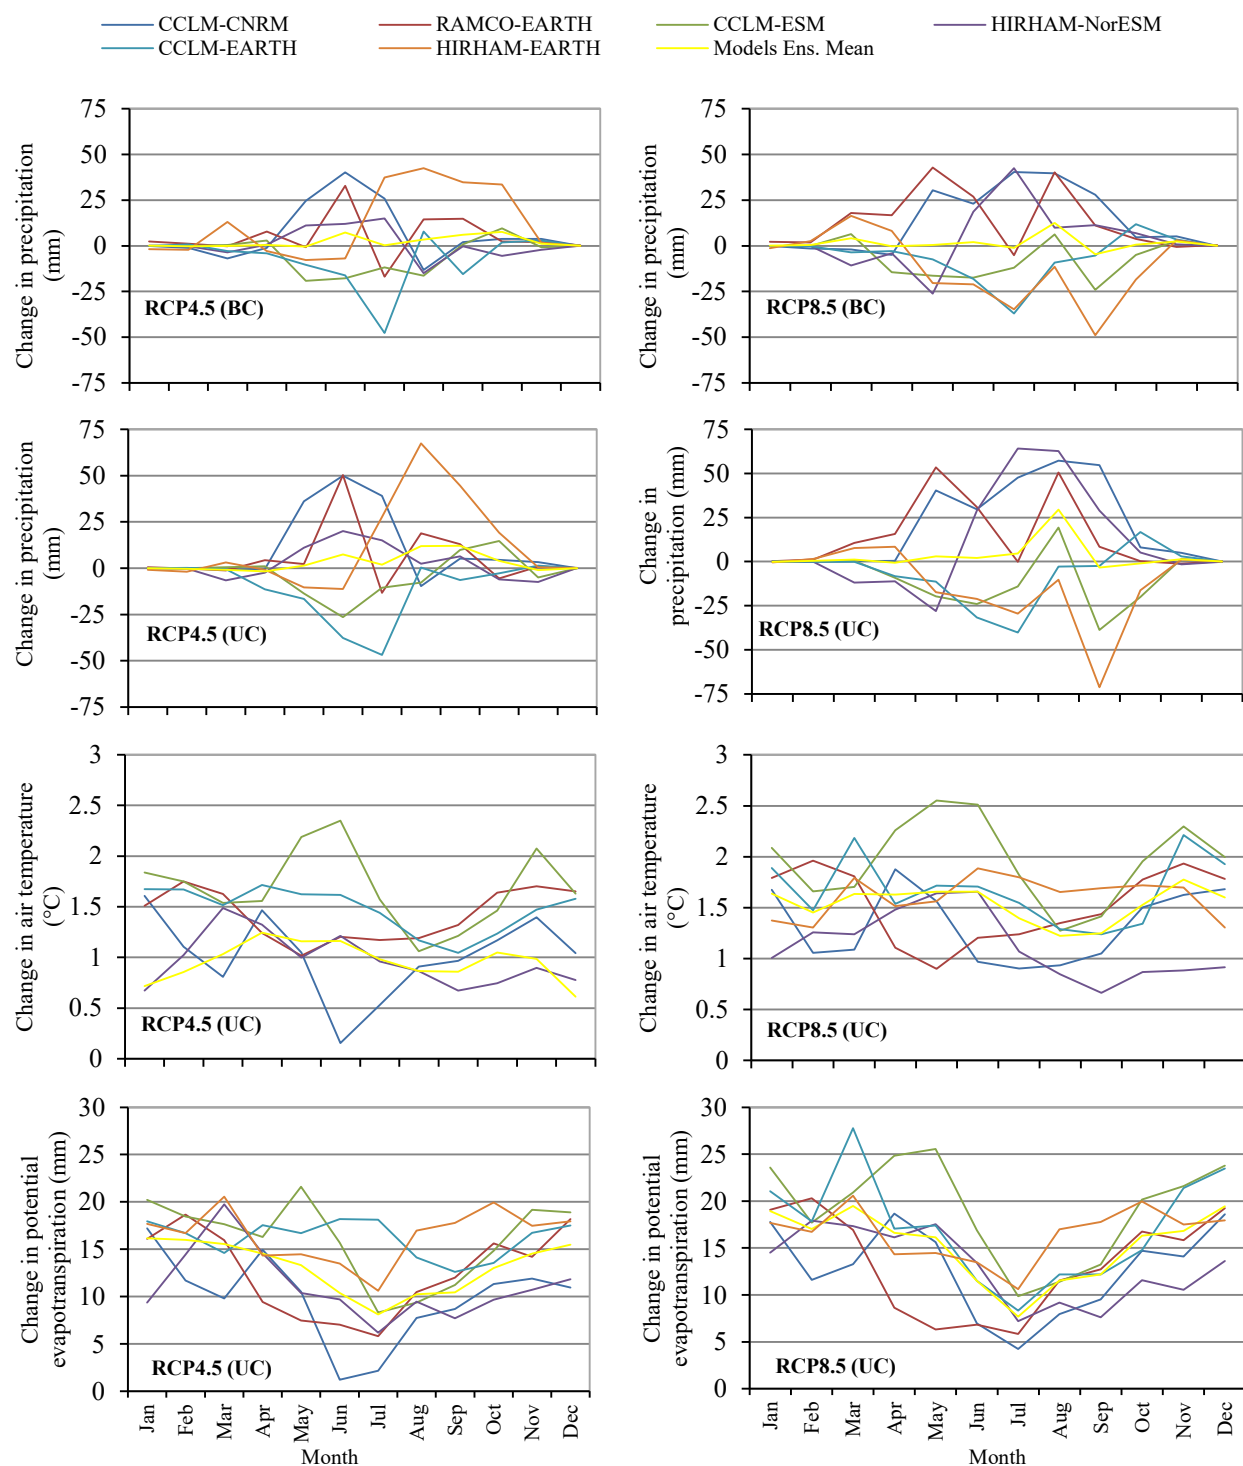

665 **Fig. 5** Climate change signal of precipitation, air temperature and evapotranspiration between the reference (1971-2000) and the future (2021-20150) periods under emission scenarios RCP4.5 and RCP8.5. BC is bias corrected and UC refers to not bias corrected.

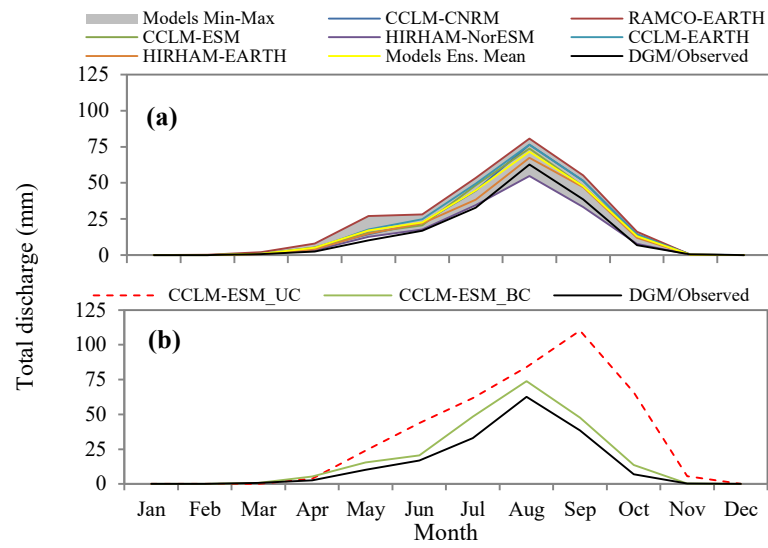


Fig. 6 Historical RCMs-GCMs based discharge simulations and observation based discharge: (a) all RCM rainfall are bias corrected, (b) simulated discharge with bias corrected and not bias corrected rainfall data are compared for CCLM-ESM.


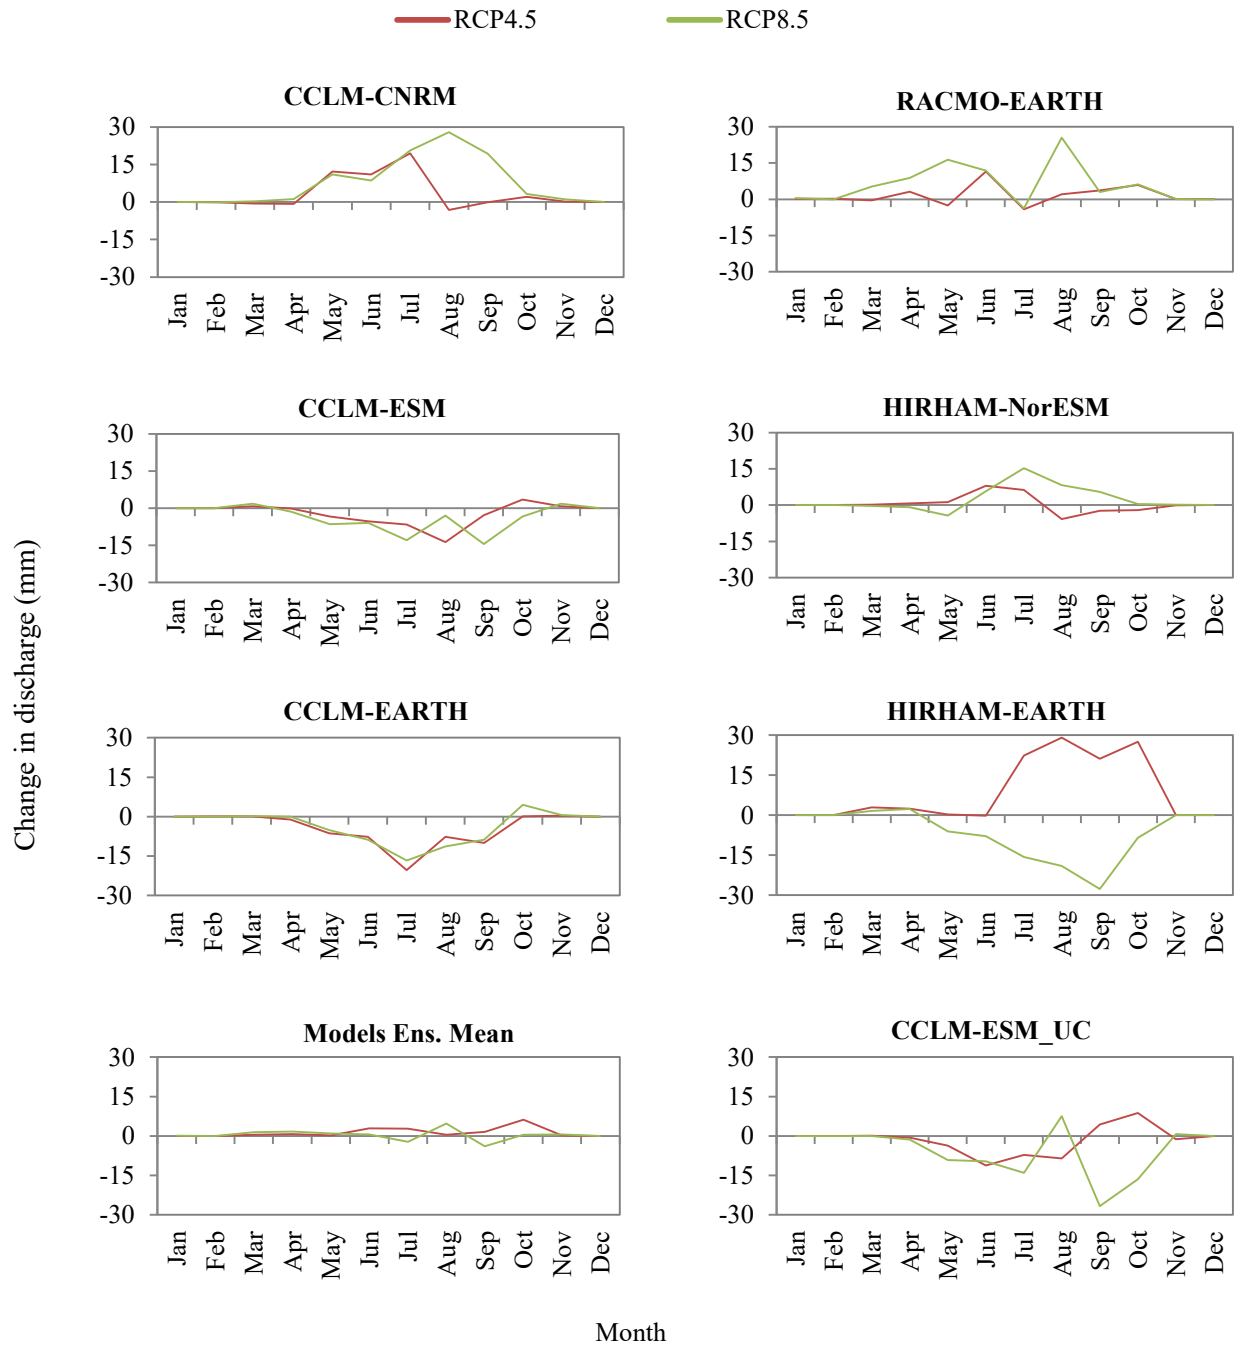


Fig. 7 Monthly discharge change between the reference period (1971-2000) and the future period (2021-20150) under emission scenarios RCP4.5 and RCP8.5. *UC* refers to not bias corrected.

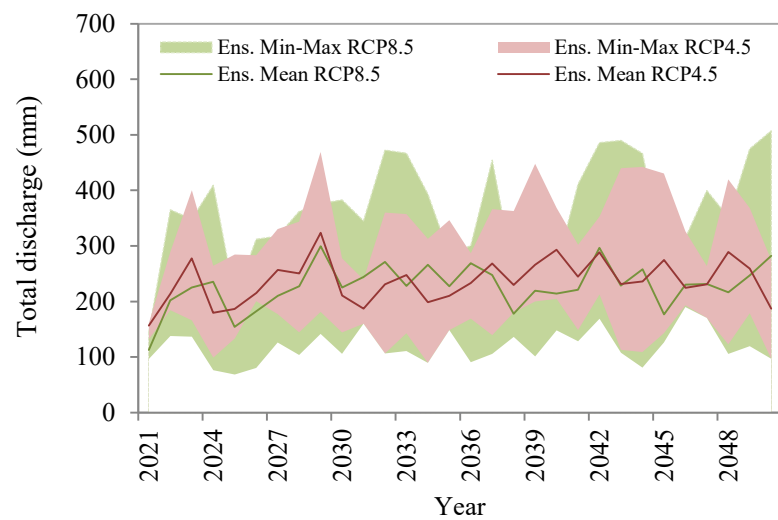

675

Fig. 8 Projected annual discharge for the climate models ensemble. Simulations are performed with bias corrected precipitation data.

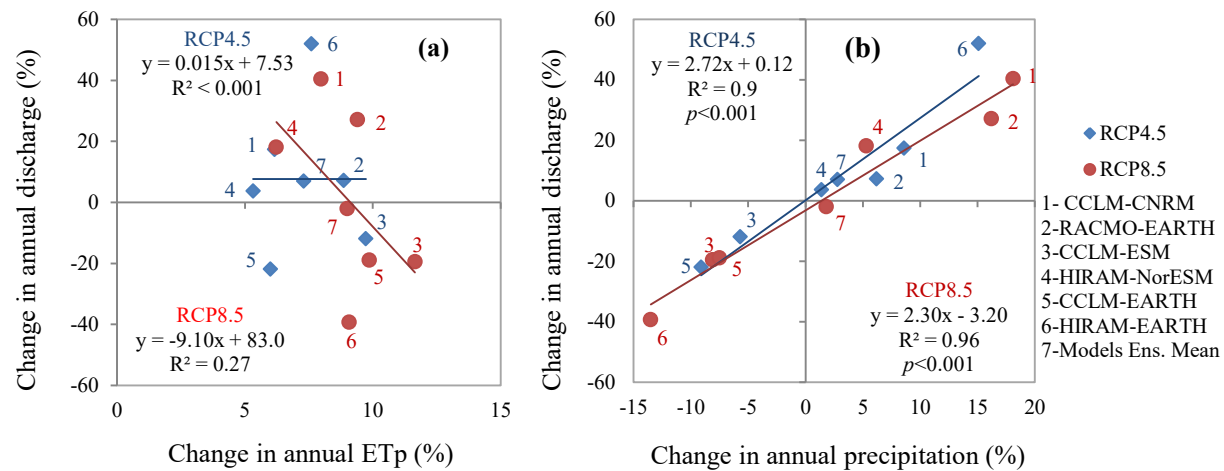


Fig. 9 Change in the annual discharge as a response to potential evapotranspiration (a) and precipitation (b) change under emission scenarios RCP4.5 and RCP8.5. Projected precipitation, potential evapotranspiration and discharge changes are calculated comparing period 1971-2000 to period 2021-2050.

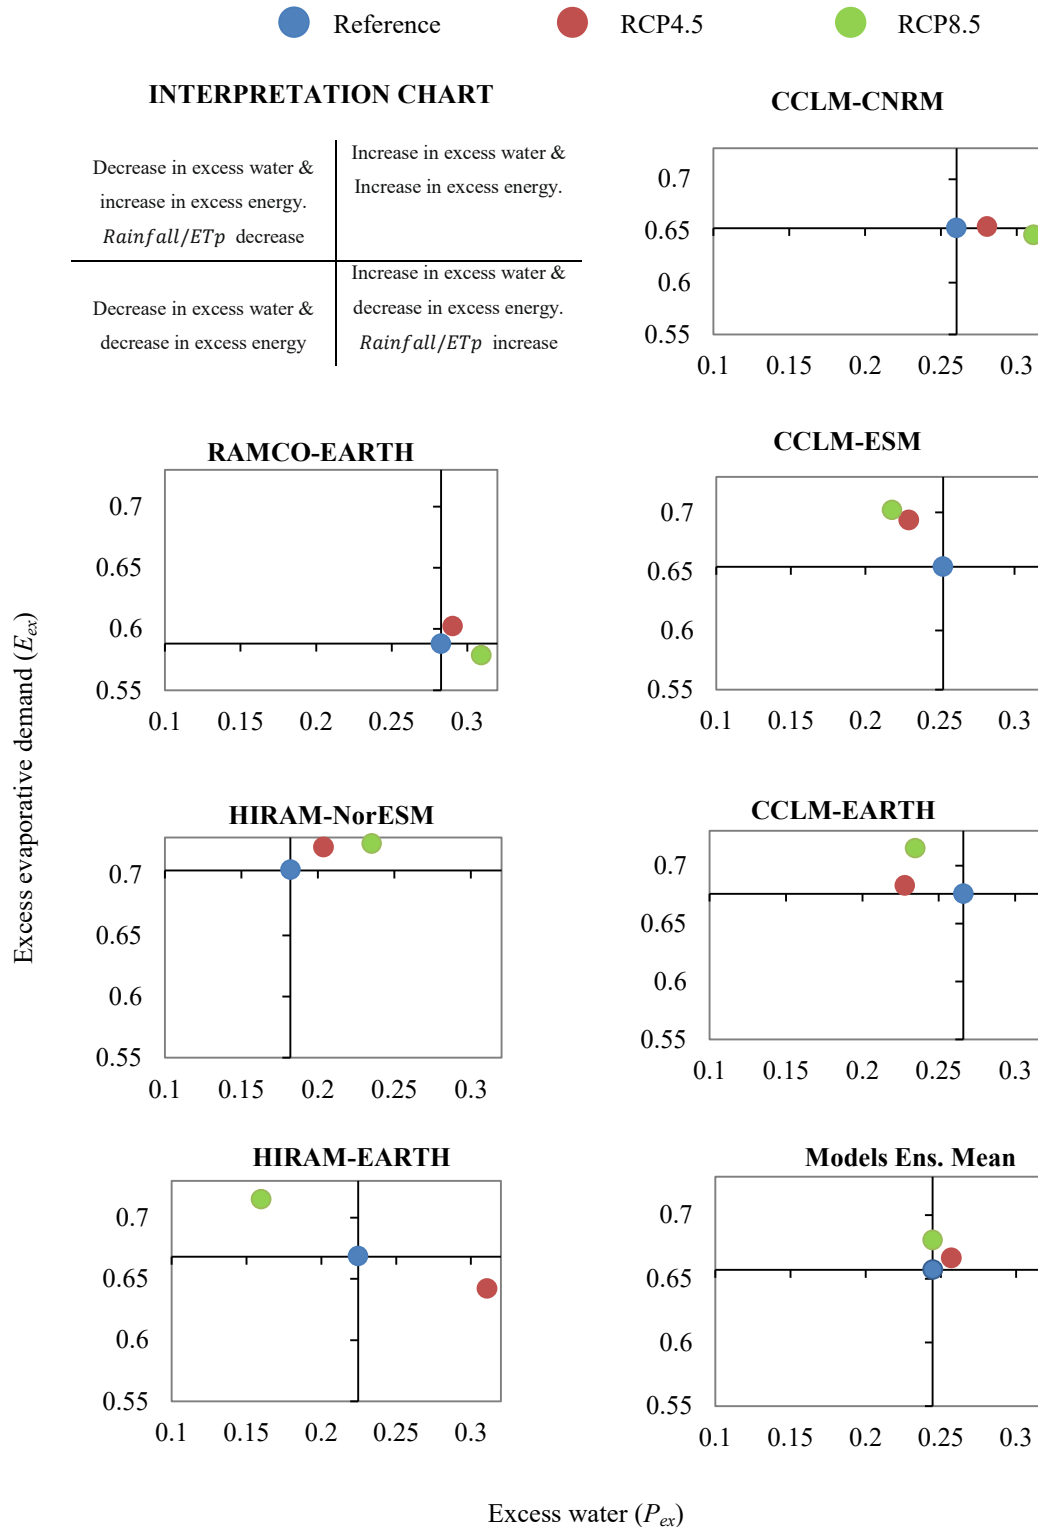


Fig. 10 Plot of excess precipitation (P_{ex}) versus evaporative demand (E_{ex}) for the reference period (1979-2000) and the emission scenarios RCP4.5 and RCP8.5 (2021-2050) for the RCMs-GCMs ensemble. The shift of RCP dots compared to the reference period's dot indicates the effects of climate change on the catchment hydrology. P_{ex} and E_{ex} for each period are calculated from the annual average rainfall, potential evapotranspiration and actual evapotranspiration.

Table 1 RCM-GCM products and corresponding label used in the study

RCM	Driving GCM	RCM Centre/Institute	Label used in the study
CCLM48	CNRM-CM5	CCLMcom	CCLM-CNRM
CCLM48	EC-EARTH	CCLMcom	CCLM-EARTH
CCLM48	ESM-LR	CCLMcom	CCLM-ESM
HIRHAM5	NorESM1-M	DMI	HIRHAM-NorESM
HIRHAM5	EC-EARTH	DMI	HIRHAM-EARTH
RACMO22	EC-EARTH	KNMI	RAMCO-EARTH

Table 2 Selected sub models and algorithms of WaSiM.

Sub model	Algorithm
Potential evapotranspiration	Hamon (based on Federer and Lash, 1983)
Actual evapotranspiration (ET)	Suction depended reduction according to Feddes et al. (1978)
Interception	Leaf area index dependent (bucket approach)
Infiltration	Based on saturated hydraulic conductivity, soil water content and rainfall (Schulla, 2015)
Unsaturated soil zone	Richard's equation parameterized based on van Genuchten (1980) parameterization of the water retention curve
Discharge routing	Kinematic-wave using Manning-Strickler equation

690

Table 3 Projected rainfall change between reference (1971-2000) and future (2021-2050) period with bias corrected and not bias corrected RCM-GCM based simulations.

RCM-GCM	Not bias corrected			Bias corrected		
	Historical Precipitation	Precipitation change RCP4.5	Precipitation change RCP8.5	Historical precipitation	Precipitation change RCP4.5	Precipitation change RCP8.5
	(mm)	(%)	(%)	(mm)	(%)	(%)
CCLM-CNRM	1150.4	+11.0	+21.2	900.3	+8.6	+18.1
CCLM-EARTH	1027.5	-11.7	-7.5	917.7	-9.1	-7.5
CCLM-ESM	1165.2	-3.2	-9.0	911.4	-5.7	-8.1
HIRHAM-NorESM	1173.3	+2.8	+11.7	911.6	+1.4	+5.3
HIRHAM-EARTH	1135.0	+12.1	-13.0	933.5	+15.1	-13.5
RAMCO-EARTH	1292.2	+5.4	+13.2	977.9	+6.2	+16.2
Models Ens. Mean	1157.3	+3.0	+3.2	925.4	+2.8	+1.8

Table 4 Performance of RCMs-GCMs based discharge compared to observation based discharge. Performance is calculated using mean monthly discharges for the period 1971-2000.

Climate model	R ²	NSE	KGE
CCLM-CNRM	0.99	0.92	0.65
CCLM-EARTH	0.97	0.89	0.59
CCLM-ESM	0.97	0.92	0.68
CCLM-ESM_UC*	0.51	-0.51	-0.36
HIRHAM-NorESM	0.98	0.99	0.92
HIRHAM-EARTH	0.98	0.97	0.78
RAMCO-EARTH	0.94	0.78	0.40
Models Ens. Mean	0.98	0.94	0.69

* Simulation performed with not bias corrected rainfall data.

Table 5 Mean annual discharge change projected by the RCMs-GCMs ensemble for the period 2021-2050 compared to the reference period 1971-2000.

Climate model	Reference discharge	Discharge change RCP4.5	Discharge change RCP8.5
	(mm)	(%)	(%)
CCLM-CNRM	230.6	+17.4	+40.4
CCLM-EARTH	240.1	-21.9	-18.9
CCLM-ESM	226.0	-11.9	-19.5
CCLM-ESM_UC*	407.1	-4.7	-17.0
HIRHAM-NorESM	194.9	+3.7	+18.1
HIRHAM-EARTH	206.6	+52.0	-39.3
RAMCO-EARTH	271.4	+7.2	+27.1
Models Ens. Mean	223.3	+7.0	-2.0

* Simulation performed with not bias corrected rainfall data.


700

Table 6 Mean annual water balance components per RCM-GCM for the historical (1971-2000) and projected (2021-2050) periods. Precipitation data are bias corrected.


	CCLM-CNRM			CCLM-EARTH			CCLM-ESM			HIRAM-NorESM			HIRAM-EARTH			RACMO-EARTH			OBSERVED
Water balance components	Historical	RCP4.5	RCP8.5	Historical	RCP4.5	RCP8.5	Historical	RCP4.5	RCP8.5	Historical	RCP4.5	RCP8.5	Historical	RCP4.5	RCP8.5	Historical	RCP4.5	RCP8.5	Historical
Precipitation (mm/y)	900	978	1063	917	834.2	849	911	859	837	912	924	960	934	1074	807	978	1038	1136	898
Potential <i>ET</i> (mm/y)	1992	2110	2145	1918	2112	2132	1979	2170	2208	2216	2349	2372	2053	2251	2253	1703	1853	1863	2070
Actual <i>ET</i> (mm/y)	666	704	732	673	644	650	682	663	655	746	753	765	724	741	678	701	737	785	703
Total discharge (mm/y)	231	270	324	240	187	195	226	199	182	194	201	229	207	314	126	271	291	345	198
Surface runoff (mm/y)	103	141	170.0	111	78	83	100	90	76	80	84	104	88	174	47	135	153	195	92.9
Interflow (mm/y)	116	118	142	117	98	101.4	114.4	98.7	95.2	104	76.9	81.1	107	128	69	123	125	135	98.0
Baseflow (mm/y)	11.0	11.0	11.1	11.5	10.4	10.4	10.8	9.9	9.9	10.3	9.9	9.5	10.8	10.7	9.6	12.6	12.5	14.2	8.9

Table 7 Selected studies of climate impact on water resources in the West African Region


Study	Location/seize	GCM/RCM	Scenario	Reference period	Future period	Precipitation change (%)	Discharge change (%)
Ruelland et al. (2012)	Bani catchment, Mali/100 000Km ²	MadCM3 and MPI-M	A2	1961-1990	2041-2070	-2 to -10	-30 to -46
Mbaye et al. (2015)	Upper Senegal Basin, Senegal-Mali-Mauritania/218000 Km ²	REMO-MPI-ESM-LR	RCP4.5 and RCP8.5	1971-2000	2071-2100	negative trend	up to -80
Aich et al. (2014)	Niger Basin/ 2156000 Km ²	HadGEM2-ES, IPSL-5 CM5A-LR, MIROC-ESM-CHEM, GFDL-ESM2M, NorESM1-M	RCP8.5	1970-1999	2070-2099	mixed trend	-50 to +50
Ardoïn-Bardin et al. (2009)	Sassandra, Ivory Coast/ 62173 Km ²	HadCM3-A2	-	1971-1995	2036-2065	11.4	38
Bossa et al. (2014)	Ouémé catchment, Benin/ 49256 Km ²	REMO-ECHAM5/MPI-OM	A1B	2000-2009	2010-2029	-10	-18
Cornelissen et al. (2013)	Térou Catchment, Benin/2344 km ²	REMO-ECHAM5/MPI-OM	B1	2001-2010	2031-2049	-11	-11
Kasei (2009)	Volta Basin/400000 km ²	MM5 and REMO	B1	1991-2000 and 1961-2000	2030-2039 and 2001-2050	+12 and -6	+40 and -5

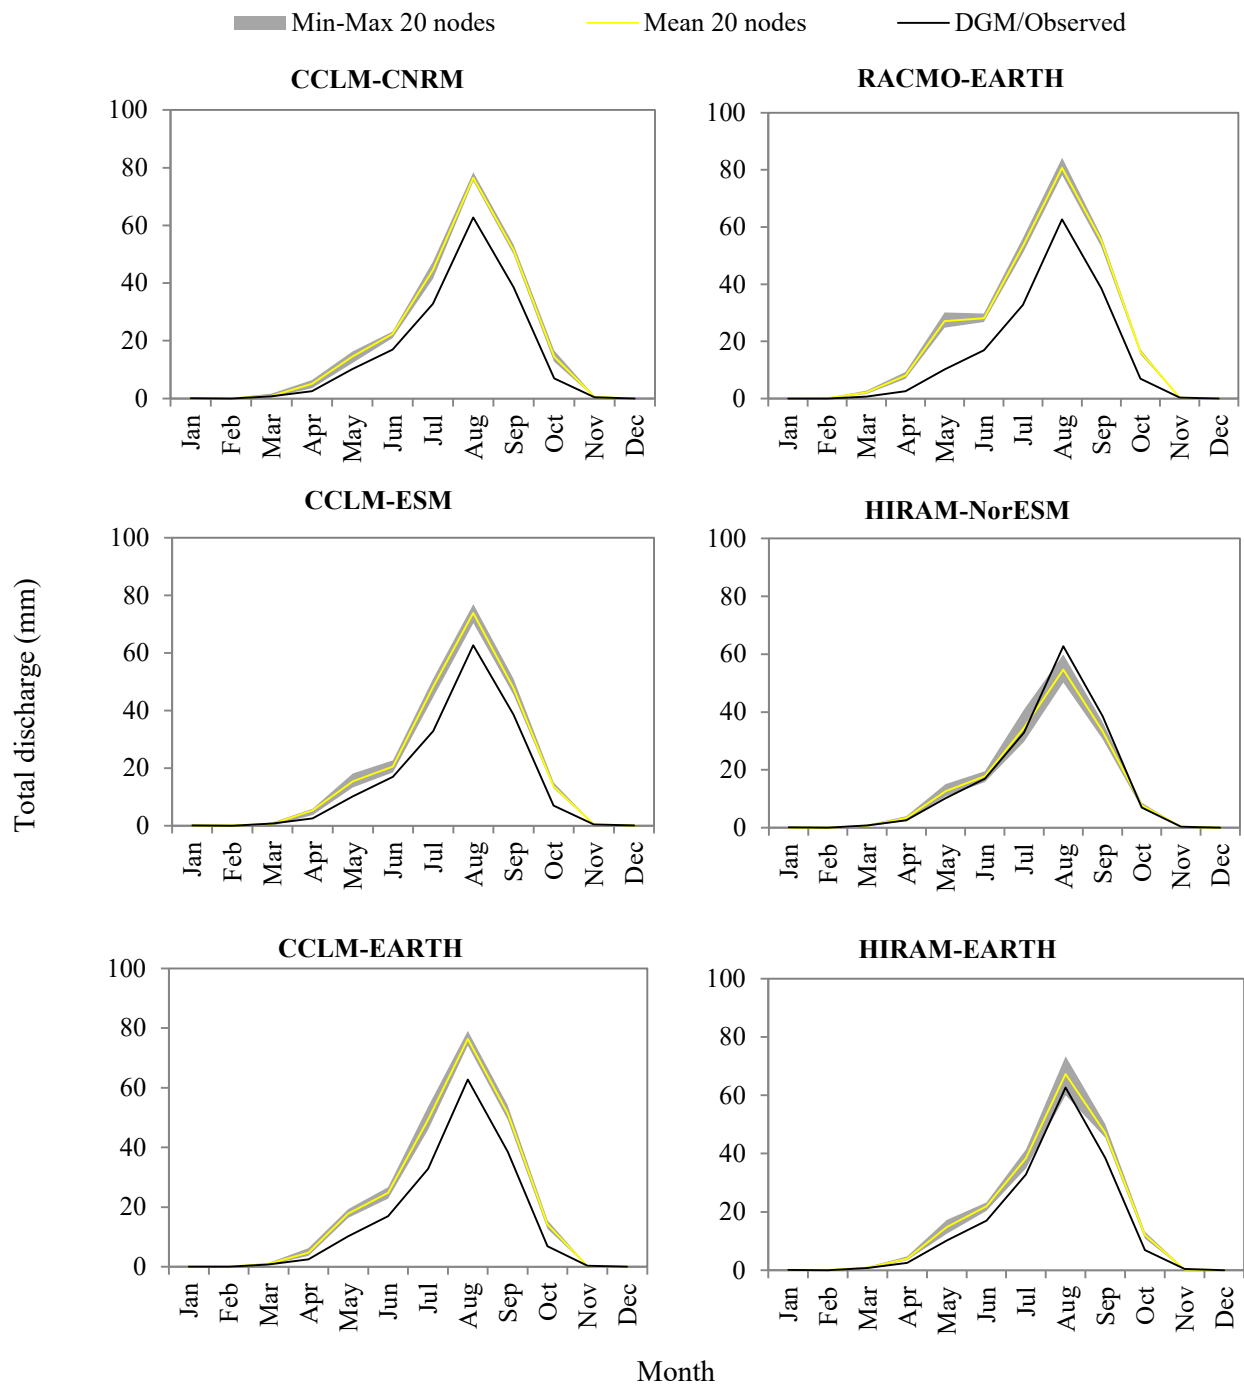


Supp_Fig. 1 Simulated RCMs-GCMs based discharge using the 20 nodes approach as applied in the study. Simulation period is 1971-2000 and precipitation was bias corrected.

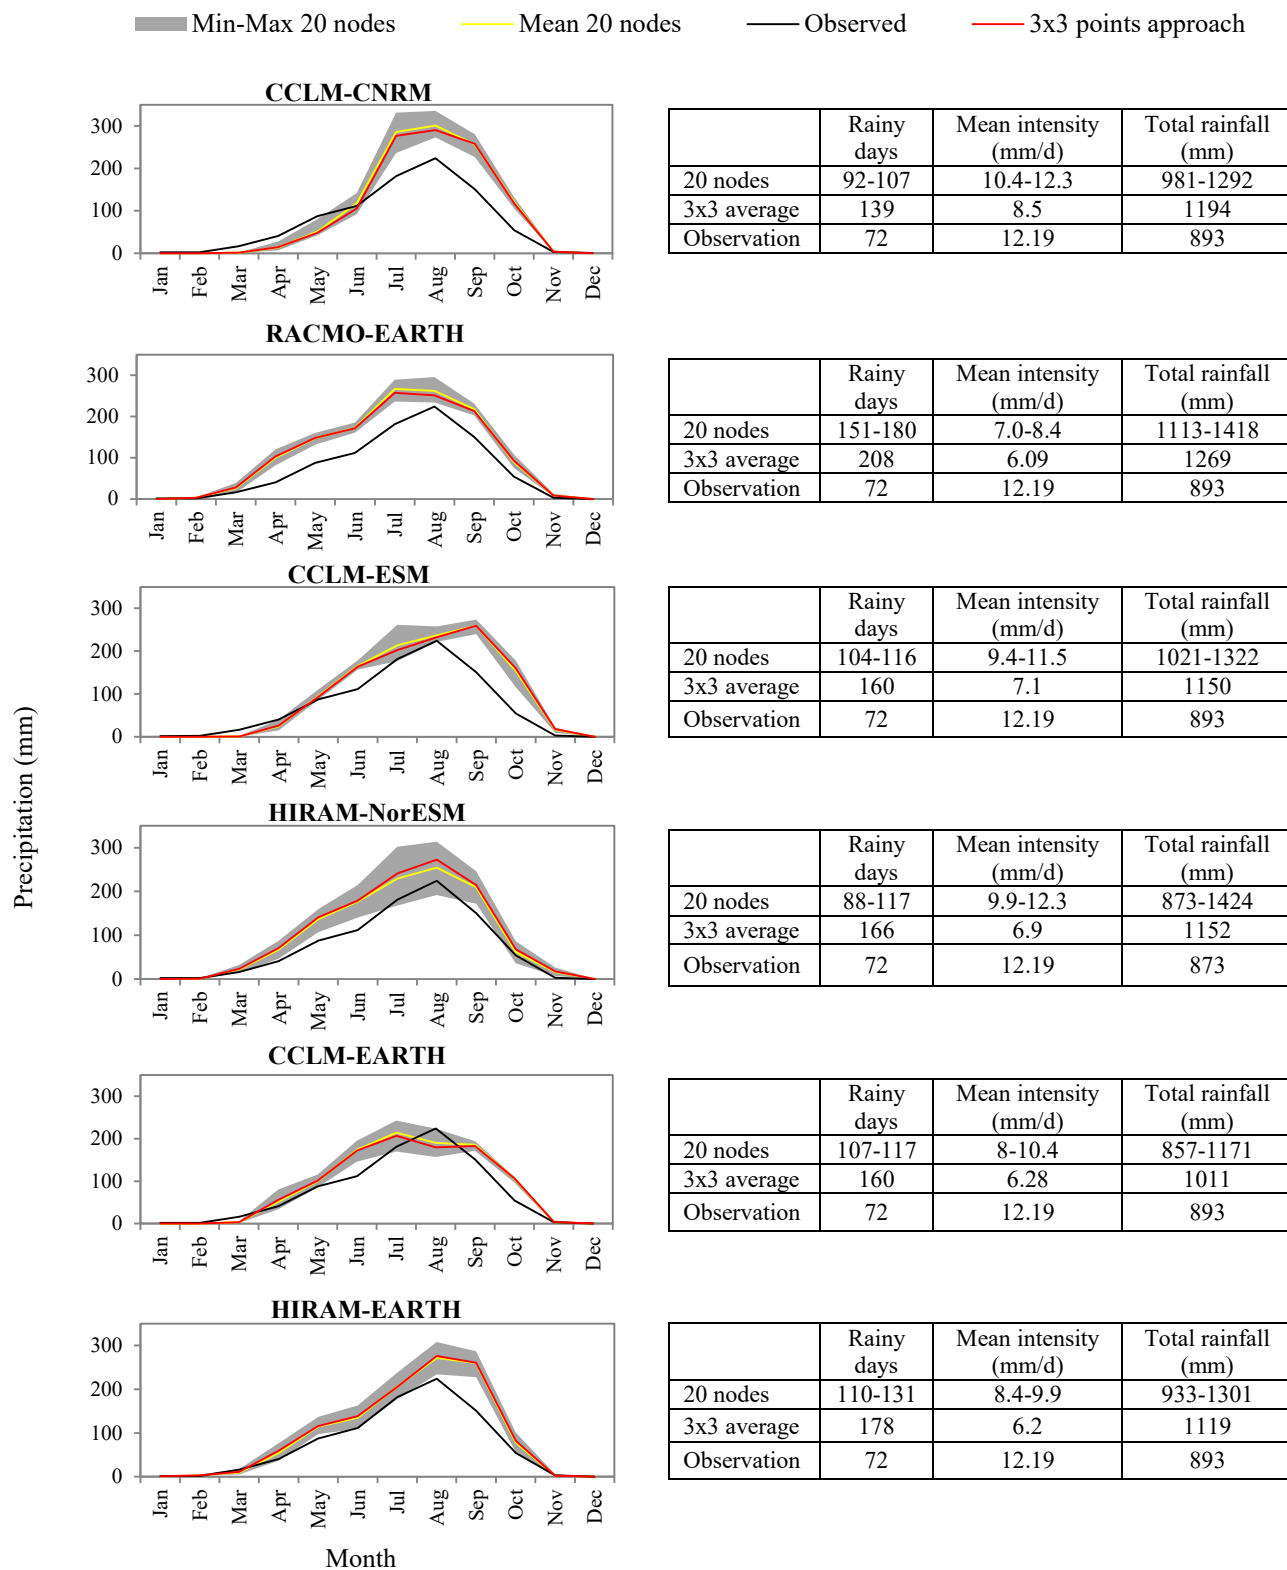

Supp_Fig. 2 Comparison between precipitations retrieved from RCMs-GCMs using the 20 nodes approach and the standard 3x3 average approach. The comparison period is 1971-2000 and precipitation data is not bias corrected.

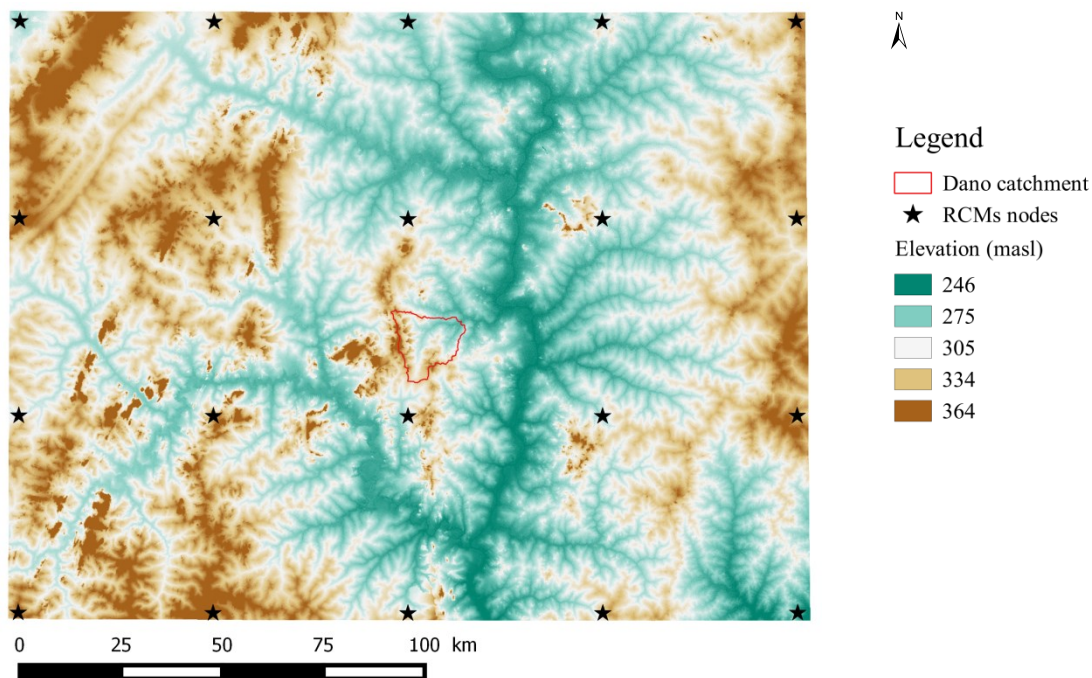

Supp_Fig. 3 Topography of the RCM domain. Source : SRTM (<http://srtm.csi.cgiar.org>).

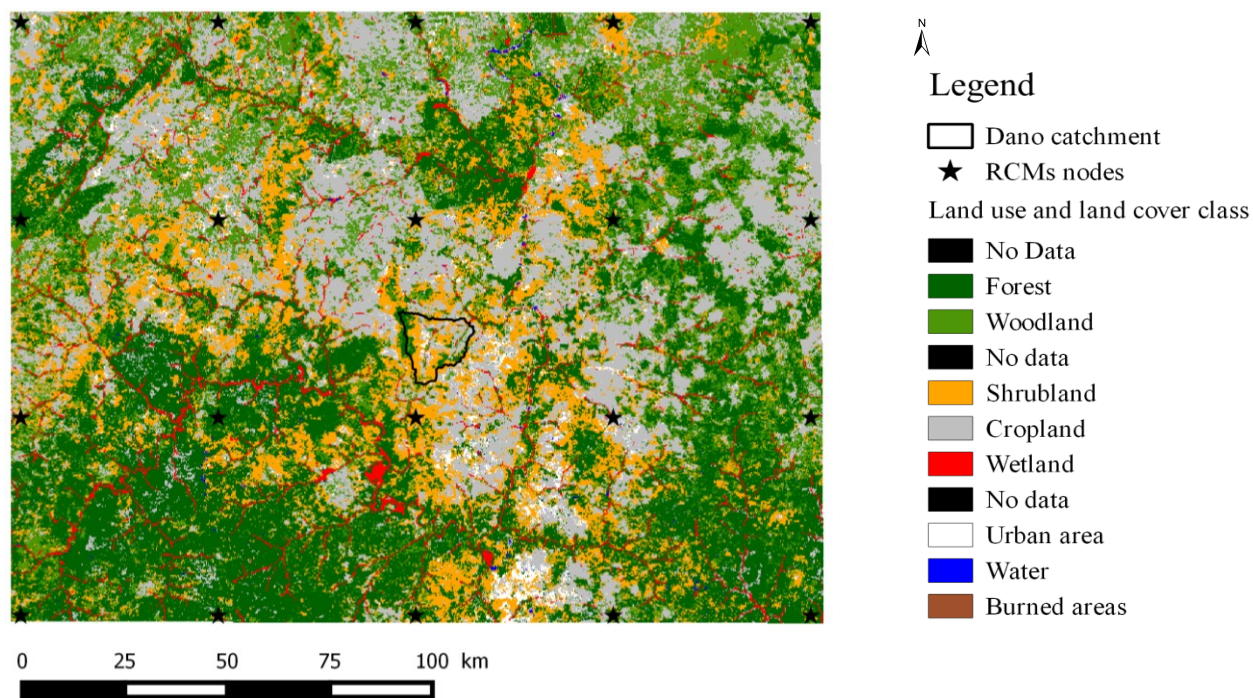

Supp_Fig. 4 Land use and land cover map of the RCM domain. Source : Landmann et al. 2007 (<http://dx.doi.org/10.1109/IGARSS.2007.4424058>.)