

Editor report:

Dear authors,

as you can see, the referee report still asks several valid questions. I took the time to have a more detailed look than normal to the revised paper and the your responses. I also believe, that there are several issues with the paper, that need to be fixed before the paper could be accepted for publication in HESS. I know, some of them are not easy, but being partly a field hydrologist myself, I cannot accept that we claim to develop better models but at the end, we just use some simple fixes like adding a soil storage underneath a glacier to represent the much more complex process of englacial liquid water storage, where conceptual models have already been developed. When looking in more detail into the sensitivity analysis in chapter 5.3, I was also wondering about the presented NSE and KGE values for changing the "soil depth" under the glacier (at least you should give this a different name!!) and the values in Table 3. Why are some of the values higher than the best model in Table 3. The sensitivity of changing this parameter is actually larger than the improvement of the model from v0 to v3. If this is the case, why improving the other parts if this process would be so much more relevant to improve streamflow prediction.

From the three points proposed by the referee, I would at least see that the following points should be addressed:

- Explicitly adding storage in the glacier (see above), which might reduce the need to add a thick soil under the glacier
- Performing a limited number of Monte Carlo runs with reasonable parameter value ranges - as you clearly demonstrate, there are many uncertainties and then you parameterise some parameters by "These were fixed by optimizing the recession shape of the hydrographs." This is not repeatable by other scientists.

I hope you see the need to reconsider some parts of your model and to change the analysis and provide a clear way to explain the model and its implications.

Referee report:

The authors seem a bit upset by the term 'trick'. However, I think we need to be honest about our modeling approaches. As I understand the parameterization choice, the soil below the glacier is assumed to be 2m and, thus, thicker than the soils in the rest of the catchment. I am sorry, but this is not physically realistic but a 'trick' to compensate for other processes that are apparently missing in the model.

Re snow-redistribution: I fully agree with the authors, that there is almost no limit on how detailed one could go and this would be beyond this study. However, having said this, I still think that the approach being used here is overly simplistic. At least allowing for diagonal transport downslope would seem like an easy improvement. Btw, it is still not clear to me, how the snow is distributed among downslope cells in case of several downslope directions. To consider the uncertainties, especially also those arising from using literature values, which were partly derived from rather different geographical settings, I would still like to see some Monte Carlo / ensemble approach. Even a small number of model runs with different values for all parameters would at least give an indication of how sensitive the results are to the particular parametrization.

The simple solution would be to clearly discuss these limitations in the text (and in a more prominent way than the uncertainty analyses now, which comes a bit hidden in the end).

However, I would encourage the authors to consider:

- Adding diagonal snow redistribution
- Explicitly adding storage in the glacier, which might reduce the need to add a thick soil under the glacier
- Performing a limited number of Monte Carlo runs with reasonable parameter value ranges

Authors response:

Dear Editor,

Please find herewith a modified version of our paper “Quantification of different flow components in a high-altitude glacierized catchment (Dudh Koshi, Himalaya)”. The authors thank the editor Markus Weiler and the anonymous referee for their advices on the glacier parameterization and sensitivity analysis, which undeniably helped to improve the manuscript.

The main modifications that were applied to the manuscript are the following:

The abstract, the discussion and conclusion of the manuscript were modified to stress on the analysis of the impact of the representation of cryospheric processes on the simulated hydrological response, rather than on the potential improvements of the latest version of the model. Indeed, the main objective of the manuscript is not to propose a new model, but to discuss on the difficulty to correctly represent cryospheric processes in glacio-hydrological models (especially in a scarce data region as the Himalayas) and to assess the uncertainty on the relative contributions of ice and snow melt to the streamflow using such models.

- Englacial storage parameterization

Instead of using an additional soil depth under glaciers as in the initial version of the paper, we now consider a conceptual englacial porous layer between the glacier and the bedrock for taking account of the melt storage and the consequent delay of the snow and ice melt.

This alternative conceptual parameterization is probably more adapted to a physically based model as DHSVM, than a classical conceptual reservoir. Of course, one has to fix the porous layer parameter values, i.e. the depth of the englacial layer, as well as the porosity and the hydraulic conductivity and on this specific point, we would like to clarify the approach that we followed. As we do not have flow or storage measurements within the glacier, but we do have observed hydrographs at the outlet, instead of just optimizing the global NSE or KGE values, we also have looked to the simulated recession shape and added the constraint of minimizing the differences (in terms of least squares) with the observed one.

We propose to change paragraph “3.2.4 Glacier parameterization” and replace it with the following paragraph:

p.10 l. 6-10 : “In this study, storage of liquid water inside glaciers was implemented by adding an englacial porous layer between the glacier and the bedrock, allowing the liquid water storage within the glacier. This englacial porous layer has a depth of 2 m and is characterized by a porosity of 0.8 and a hydraulic conductivity (vertical and lateral) of $3 \cdot 10^{-4}$ m/s (see Table A2). These parameters are kept constant through the simulations and were optimized according to the constraint of minimizing the differences (in terms of least squares) between the recession shape of the simulated hydrographs and the observed one.”

The sensitivity to the englacial porous layer parameter values is also evaluated and analyzed in section 5.2.3 “Sensitivity to model parameters” p.30

- Sensitivity analysis to the parameter values

A sensitivity analysis to the parameters values was developed (5.2.3 “Sensitivity to model parameter values” p.30) in order to have a hint on the expected uncertainty on the results. As our simulations with DHSVM-GDM require high computation resources, we were unfortunately unable to perform a true Monte Carlo analysis with a large number of simulations. However, we compared the results of the control run (v3) with the results obtained from 28 additional simulations with changing parameter values. This section discusses the impact of the parameter values on the simulated daily discharge and the estimated relative contributions to the outflow.

- Avalanche module

A sentence was added (p.9 l.15-16) to explain how snow is distributed in case of several possible downslope directions :

“In case of several possible directions downstream, avalanche snow is distributed according to a ratio based on the slope of each of the directions.”

We hope that with these modifications you will be able to consider our paper for publication.

Best regards,

Quantification of different flow components in a high-altitude glacierized catchment (Dudh Koshi, **Nepalese Himalaya**): some cryospheric-related issues

Louise Mimeau¹, Michel Esteves¹, Isabella Zin¹, Hans-Werner Jacobi¹, Fanny Brun¹, Patrick Wagon¹, Devesh Koirala², and Yves Arnaud¹

¹Université Grenoble Alpes, IRD, Grenoble INP, CNRS, IGE, Grenoble, France

²Nepal Academy of Science and Technology, NAST, Kathmandu, Nepal

Correspondence to: Michel Esteves (michel.esteves@ird.fr)

Abstract. In a context of climate change and water demand growth, understanding the origin of water flows in the Himalayas is a key issue for assessing the current and future water resources availability and planning the future uses of water in downstream regions. Two of the main issues in the hydrology of high-altitude glacierized catchment are (i) the limited representation of cryospheric processes controlling the evolution of ice and snow in distributed hydrological models and (ii) the difficulty to define and quantify the hydrological contributions to the river outflow. This study estimates the relative **contributions contribution** of rainfall, glacier and snow melt to the Khumbu River streamflow (Upper Dudh Koshi, Nepal, 146 km², 43 % glacierized, elevation range from 4260 to 8848 m a.s.l.) ~~as well as their~~the seasonal, daily, and sub-daily variability during the period 2012-2015 ~~by~~ using the physically based glacio-hydrological model DHSVM-GDM (Distributed Hydrological Soil Vegetation Model - Glaciers Dynamics Model). ~~One of the main issues in high-elevated and glacierized catchments hydrology is the limited representation of cryospheric processes, which control the evolution of ice and snow, in distributed hydrological models. Here, the~~The impact of different snow and glacier parameterizations was tested by modifying the **original DHSVM-GDM** snow albedo parameterization, ~~by~~ adding an avalanche module, ~~and by~~ adding a reduction factor for the melt of debris covered glaciers. ~~The validation of the~~, and adding a conceptual englacial storage. The representation of snow, glacier, and hydrological processes was ~~established~~evaluated using three types of **validation**-data (MODIS satellite images, glacier mass balances, and in situ discharge measurements). ~~Results show that the new version of DHSVM-GDM improves the simulation of the snow-covered area and the glacier mass balances~~The relative flow components were estimated using two different definitions based on the water inputs and contributing areas. The simulated hydrological contributions differ not only depending on the used models and implemented processes, but also due to different definitions of the estimated flow components. ~~Therefore, we apply here two different definitions based on the water inputs and contributing areas for the diverse flow components.~~ In the presented case study, ~~results show that~~ ice and snow melt contribute each more than 40 % to the annual water inputs and ~~that~~ 69 % of the outflow annual stream flow originates from glacierized areas. ~~However, the~~The analysis of the seasonal contributions highlights that ice and snow melt as well as rain contribute to monsoon flows in similar proportions and that winter outflow is mainly controlled by the release from the englacial water storage. The choice of a given **parameterization parametrization** for snow and glacier processes, as well as their relative parameter values, has a significant impact on the sim-

ulated water balance: for instance, the different tested parameterizations led to ice melt contributions ranging from ~~45 to 70~~42 to 54 %. ~~Our simulations also highlight that winter flows are mainly controlled by the release from the englacial water storage.~~ The sensitivity of the model to the glacier inventory was also tested demonstrating that the uncertainty related to the glacierized surface leads to an uncertainty of 20 % for the simulated ice melt component.

5 1 Introduction

The Himalayan mountain range is known for being the water tower of Central and South Asia (Immerzeel et al., 2010). Its high elevated glaciers and snow cover play an important role in the regional hydrological system (Kaser et al., 2010; Racoviteanu et al., 2013) and provide water resources for the population living in the surrounding countries (Viviroli et al., 2007; Singh et al., 2016; Pritchard, 2017).

10 In the Hindu Kush-Himalaya (HKH) region climate change is expected to cause shrinkage of the snow and ice cover (Bolch et al., 2012; Benn et al., 2012; Kraaijenbrink et al., 2017). Changes in glacier and snow cover runoff are likely to have a significant impact on the hydrological regime (Akhtar et al., 2008; Immerzeel et al., 2012; Lutz et al., 2014; Nepal, 2016). Development of tourism is also affecting the accessibility to water during the peak of tourist season. In the Everest region in Nepal water needs have increased within the past decades due to higher demand in water supply for tourists and hydroelectricity
15 production, leading to water shortage during months with low flows (winter and spring) (McDowell et al., 2013). Understanding the past and present hydrological regime and more particularly estimating the seasonal contribution of ice melt, snow melt, and rainfall to outflows is thus a key issue for managing water resources within the next decades. Indeed, the quantification of the ice melt contribution enables to assess the proportion of water currently available which is coming from a long term accumulation in the glaciers, and thus to assess the annual decrease of the basin water storage due to glacier melt. Moreover,
20 knowing the fraction of snow melt, ice melt, and rainfall to the river outflow, and understanding their hydrological pathways can give insights into how much water is currently seasonally delayed and how the seasonal outflow and the overall water balance might be impacted in the future when this delay changes or if the ratio snowfall to rainfall changes (Berghuijs et al., 2014).

Recent studies have estimated present glacier and snow melt contributions to the outflow in Nepalese Himalayan catchments
25 (e.g., Andermann et al., 2012; Savéan et al., 2015; Ragettli et al., 2015) and simulated future hydrological regimes using glacio-hydrological models (Rees and Collins, 2006; Nepal, 2016; Soncini et al., 2016). Results have demonstrated large differences in the estimates of the contribution of glaciers to the annual outflows of the Dudh Koshi catchment in Nepal, which range from 4 to 60 % (Andermann et al., 2012; Racoviteanu et al., 2013; Nepal et al., 2014; Savéan et al., 2015).

One of the main sources of uncertainty in modelling the outflow of Himalayan catchments is the representation of cryospheric
30 processes, which control the evolution of ice and snow-covered surfaces in hydrological models. For instance, the representation of the debris covered glaciers in glacio-hydrological models is a challenge. Debris covered glaciers represent about 23 % of all glaciers in the Himalaya-Karakoram region (Scheler et al, 2011). The debris layers have been expanding during the last decades due to the glacier recession (Shukla et al., 2009; Bhambri et al., 2011; Benn et al., 2012) and are expected to keep

expanding in the near future (Rowan et al., 2015). Since the study of Østrem (1959) it is known that the debris thickness has a strong impact on the meltwater generation, which means that a good representation of the debris covered glaciers in glacio-hydrological models is essential for estimating the amount of meltwater generated in glacierized catchment in the Himalayas. Many other cryospheric processes such as the liquid water storage and transfer through glaciers, snow transport by avalanches or wind, glacial lake dynamics and snow albedo evolution are either very simplified or not at all represented by the models (Chen et al., 2017). It is therefore important to estimate the impact of such simplified representations of cryospheric processes on modelling results.

Delineation of the glacierized areas is another key entry-element to the glacio-hydrological model. Glacier inventories are commonly used as forcing data to delineate glacierized areas in glacio-hydrological modelling studies. There are three global major glacier inventories such as the World Glacier Inventory (Cogley, 2009), GlobGlacier (Paul et al., 2009) and the Randolph Glacier Inventory (Pfeffer et al., 2014), and several regional glacier inventories in the HKH region (ICIMOD (Bajracharya et al., 2010), Racoviteanu et al. (2013)), showing substantial differences. These can be due to the definition of the glacierized area itself (Paul et al., 2013; Brun et al., 2017) as well as to the characteristics of the satellite image (date, resolution, spectral properties) used for the delineation (Kääb et al., 2015), and to difficulties related to the interpretation of satellite images for outlying the glaciers, especially when they are debris covered (Bhambri et al., 2011; Racoviteanu et al., 2013; Robson et al., 2015). Thus, the question whether the glacier delineation has a significant impact on the model results needs to be addressed.

These issues of the representation of cryospheric processes and of glaciers delineation in the hydrological modelling are addressed in the present study by (i) adapting the parameterization of the snow albedo evolution of DHSVM-GDM, in order to improve the simulation of the snow cover dynamics; (ii) implementing an avalanche module; (iii) introducing a melting factor for debris covered glaciers and (iv) testing the sensitivity of simulated outflows and flow components with respect to these modifications as well as to glacier delineation for three different outlines coming from different glacier inventories. Both in-situ measurements and satellite data were used for evaluating the outflow simulations as well as snow cover and glacier evolutions focusing on a small headwater catchment.

~~An uncertainty on the estimation of the glacier contribution also results from how the contributions to the outflow are defined.~~ There are indeed several ways to define the glacier contribution to runoff (Radić and Hock, 2014): it can be either considered as the total outflow coming from glacierized areas, the outflow produced by the glacier itself (snow, firn and ice melt) or the outflow produced only by the ice melt. How the contributions to the outflow are defined adds further uncertainty to the estimation of the glacier contribution. The definition of the glacial contribution is dependent to the hydrological model (distributed or lumped, representation of glaciers and snow in the model) and cannot always be chosen. In the Dudh Koshi basin, Andermann et al. (2012); Racoviteanu et al. (2013); Savéan et al. (2015) estimated the fraction of the outflow produced by ice melt, whereas Nepal et al. (2014) defined the glacier contribution as the fraction of the outflow coming from glacierized areas. Here, flow components were estimated using two different definitions of the hydrological contributions ~~to control and make the best evaluation of all the terms of the~~ for assessing their relative contributions to the total water balance. Finally, the model results are analyzed at the annual, monthly, daily and sub-daily scale in order to explain the origin of the water flows and their seasonal and daily variations.

2 Study area

5 This study focuses on the Pheriche sub-catchment of the Dudh Koshi basin (outlet at coordinates 27.89° N, 86.82° E) located in Nepal on the southern slopes of Mt. Everest in the Sagarmatha National Park (SNP) (Fig. 1). The catchment area is 146 km² and its elevation extends from 4260 to 8848 m a.s.l.

Local climate is mainly controlled by the Indian summer monsoon (Bookhagen and Burbank, 2006) and is characterized by four different seasons: a cold dry winter from December to March with limited precipitation, a warm and moist summer with most of the annual precipitation occurring during the monsoon from June until September, and two transition seasons: the pre-monsoon season in April and May and the post-monsoon season in October and November (Shrestha et al., 2000). At 5000 m, the annual precipitation is around 600 mm and the mean monthly temperature ranges from -8.4°C in January to 3.5°C in July, according to temperature and precipitation data from the Pyramid EvK2 station (Fig. 2 and Table 1). The hydrological regime follows the precipitation cycle with high flows during the monsoon season, when most of the annual precipitation occurs, complemented by the melting of snow and ice, and low flows during winter.

Due to high elevation, the vegetation in the catchment is scarce. The basin area is mainly covered by rocks and moraines (43 %) (Bajracharya et al., 2010) and glaciers (43 %) (Racoviteanu et al., 2013). Only 14 % of the basin area is covered by grasslands and shrublands. Glaciers belong to the summer-accumulation type (Wagnon et al., 2013) and are partially fed by avalanches (King et al., 2016; Sherpa et al., 2017). 60 % of the glaciers are located between 5000 and 6000 m a.s.l. Debris-covered glaciers are found at low elevations mainly on the ablation tongues of the glaciers (Fig. 3). According to the Racoviteanu et al. (2013) glacier inventory, debris covered glaciers represent 30 % of the glacierized area with smaller melting rates at similar elevations than debris-free glaciers due to the insulating effect of the debris layer (Vincent et al., 2016).

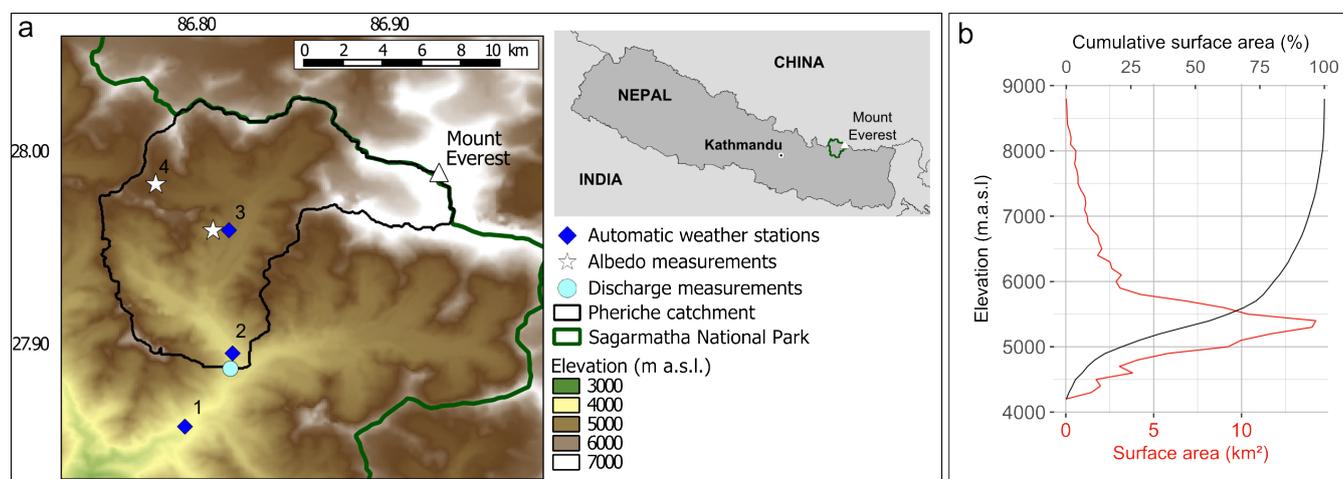


Figure 1. Study area : (a) Location map of Pheriche catchment (black) in the Sagarmatha National Park (green) in Nepal. Characteristics of the meteorological stations are summarized in Table 1. (b) Hypsometric curve of the Pheriche catchment.

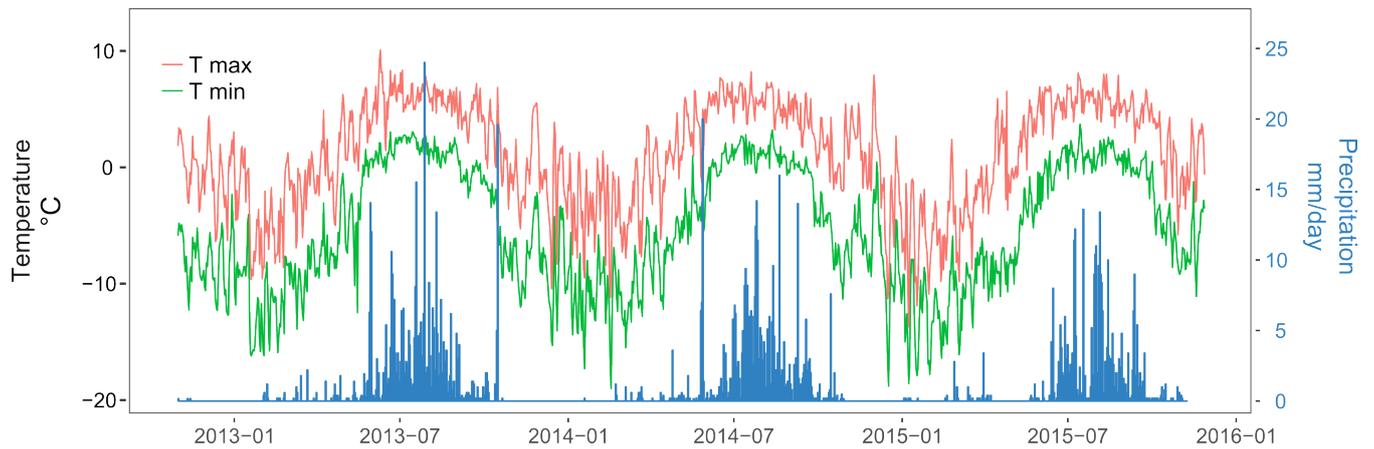


Figure 2. Daily minimal and maximal air temperature and daily precipitation measured at the Pyramid station.

3 Data and model setup

10 3.1 Database

To describe the topography of the study area, an ASTER DEM originally at 30 m resolution was resampled to a 100 m resolution. The SOTER Nepal soil classification (Dijkshoorn and Huting, 2009) and a landcover classification from ICIMOD (Bajracharya, 2014) were used for the soil and landcover description.

Meteorological data were available at hourly time steps from three automatic weather stations (AWS) located at Pangboche (3950 m a.s.l.), Pheriche (4260 m a.s.l.) and Pyramid (5035 m a.s.l.) (Table 1). Since December 2012, precipitation has been recorded at the Pheriche and Pyramid AWS by two Geonor T-200 sensors designed to measure both liquid and solid precipitation. Data were corrected for potential undercatch following the method used by Lejeune et al. (2007) and Sherpa et al. (2017). Precipitation at the Pangboche station was recorded with a tipping bucket. Air temperature, wind speed, relative humidity short-wave radiation and long-wave radiation measurements at Pheriche and Pyramid were provided by the EvK2-CNR stations.

Discharge measurements of the Khumbu River at Pheriche were obtained using a pressure water level sensor at a 30 minutes time step since October 2010.

Glacier outline	Area	Satellite imagery used for delineation	Acquisition dates	Spatial resolution of the satellite images used for delineation
Racoviteanu et al. (2013)	Dudh Koshi, Langtang	ASTER, IKONOS-2	2003-2008	1 - 90 m
GAMDAM (Nuimura et al., 2015)	Asian glaciers	SRTM, LANDSAT	1999-2003	30 - 120 m
ICIMOD (Bajracharya et al., 2010)	Nepal	IKONOS, LANDSAT, ASTER	1992-2006	1 - 120 m

Table 2. Glacier outlines characteristics

N°	Name	Elevation (m)	Lat (°)	Lon (°)	Measured parameters	Manager
1	Pangboche	3950	27.857	86.794	T, P	IRD
2	Pheriche	4260	27.895	86.819	T, P, WS, RH, SWin	EvK2-CNR, IRD
3	Pyramid	5035	27.959	86.813	T, P, WS, RH, SWin, SWout, LWin	EvK2-CNR, IRD
4	Changri Nup	5363	27.983	86.779	SWin, SWout	GLACIOCLIM

Table 1. Location of measurements. **T** air temperature, **P** precipitation, **WS** wind speed, **RH** relative humidity, **SWin** incoming shortwave radiation, **SWout** outgoing shortwave radiation, **LWin** incoming longwave radiation.

10 The MODImLab algorithm developed by Sirguey et al. (2009) was applied to MODIS reflectances data to obtain daily albedo and snow fraction satellite images for the period 2010-2015. We used the Sirguey et al. (2009) algorithm rather than the MOD10A1 500 m snow products because it generates daily regional snow cover images at 250 m resolution and applies corrections on atmospheric and topographic effects which makes the snow cover maps more realistic on mountainous areas. 27 cloud free Landsat8 images were used to generate snow maps at 30 m resolution between 1 November 2014 and 31 December 15 2015. A NDSI (Normalized-Difference Snow Index) threshold of 0.15 was taken to separate snow free and snow covered pixels on Landsat8 data as proposed by Zhu and Woodcock (2012). Daily snow cover maps were then retrieved from the MODImLab snow fraction product: areas with a snow fraction above 0.15 were defined as snow covered areas so that the MODImLab Snow cover area (SCA) matches the Landsat8 SCA on the common dates. For the rest of this study we call MODIS data albedo and snow cover data obtained with the MODImLab algorithm. We also used snow albedo data from in-situ measurements at Pyramid and Changri Nup (Table 1).

5 For describing the glacierized area in the basin we compared three different glacier outlines available as vector layers for the Khumbu region: the glacier delineation proposed by Racoviteanu et al. (2013) specifically set up for the Dudh Koshi basin; the GAMDAM inventory covering the entire Himalayan range (Nuimura et al., 2015); and the ICIMOD inventory (Bajracharya et al., 2010) (Fig. 3). The three outlines have been derived on different grids, from different datasets at different spatial resolutions and covering different temporal periods (see Table 2), thus leading at different results.

Mass balances estimated by Sherpa et al. (2017) for the clean-ice West Changri Nup and Pokalde glaciers located in the Pheriche basin (Fig. 3) were used as reference, as well as mean annual glacier mass balances calculated over the Pheriche basin area for the period 2000-2016 by Brun et al. (2017).

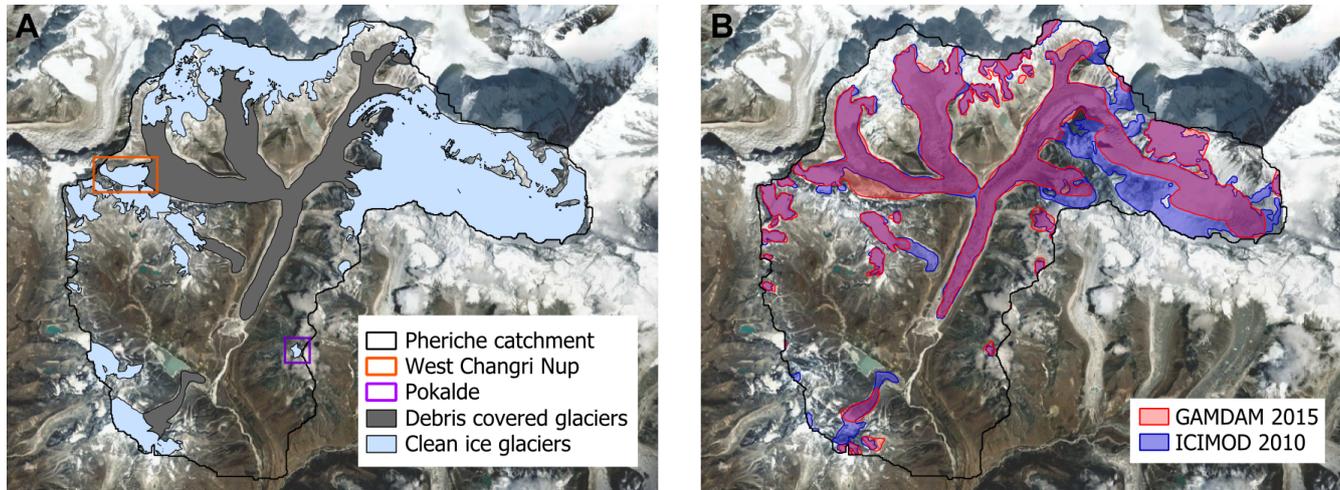


Figure 3. Glacier outlines in the Pheriche catchment. (a) Clean glaciers and debris-covered glaciers from Racoviteanu et al. (2013) and location of the clean ice West Changri Nup and Pokalde glaciers (b) GAMDAM (red) and ICIMOD (blue) glacier outlines

3.2 Glacio-hydrological modelling

3.2.1 General description of the model

The glacio-hydrological model DHSVM-GDM (Distributed Hydrological Soil Vegetation Model - Glaciers Dynamics Model) is a physically based, spatially distributed model which was developed for mountain basins with rain and snow hydrological regimes (Wigmosta et al., 1994; Nijssen et al., 1997; Beckers and Alila, 2004). A glacier dynamics module was recently implemented in DHSVM by Naz et al. (2014) to simulate glacier mass balance and the runoff production in catchments with glaciers, thus extending the application to ice dominated hydrological regimes. The resulting DHSVM-GDM simulates the spatial distribution and the temporal evolution of the principal water balance terms (soil moisture, evapotranspiration, sublimation, glacier mass balance, snow cover, and runoff) at hourly to daily time scales. It uses a two-layer energy and mass balance module for simulating snow cover evolution and a single layer energy and mass balance module for glaciers (Andreadis et al., 2009; Naz et al., 2014) and has been applied in a number of studies for snow and cold regions hydrology (e.g., Leung et al., 1996; Leung and Wigmosta, 1999; Westrick et al., 2002; Whitaker et al., 2003; Zhao et al., 2009; Bewley et al., 2010; Cristea et al., 2014; Frans et al., 2015). Distributed meteorological data (air temperature, precipitation, relative humidity, wind speed, and shortwave and longwave incoming radiation) are requested as input, as well as distributed geographical information (elevation, soil type, landcover, soil depth, and ice thickness).

10 3.2.2 Snow albedo parameterization

In the original DHSVM-GDM version, the snow albedo α_s [-] is set to its maximum value α_{smax} (to be fixed either by calibration or from observed albedo values) after a snowfall event and then decreases with time according to the following equations (Wigmosta et al., 1994):

$$\begin{aligned}\alpha_s &= \alpha_{smax} (\lambda_a)^{N^{0.58}} & \text{if } T_s < 0 \\ \alpha_s &= \alpha_{smax} (\lambda_m)^{N^{0.46}} & \text{if } T_s \geq 0\end{aligned}\quad (1)$$

- 15 Where N is the number of days since the last snowfall, λ_a [-] and λ_m [-] correspond to 0.92 and 0.70 for the accumulation season and the melt season, respectively, and T_s is the snow surface temperature [°C].

MODIS albedo images and the albedo measurements from Pyramid and Changri Nup were used to analyse the decrease of snow albedo with age in various locations of our study area. Figure 4 compares the observed albedo decay as a function of time for snow events with at least three consecutive days without clouds after the snowfall with the albedo parameterization in DHSVM-GDM. Since the observed values are not well represented by the standard albedo decrease, the parameterization was replaced by Eq. 2, with a decay of the albedo when there is no new snowfall inspired by the ISBA model albedo parameterization (Douvillle et al., 1995) and with the fresh snow albedo modified as a function of the amount of snowfall:

$$\begin{aligned}\alpha_s &= (\alpha_{st-1} - \alpha_{smin}) \exp(-cN) + \alpha_{smin} & \text{if } i_{snowfall} = 0 \text{ mm/h} \\ \alpha_s &= \max(0.6, \alpha_{st-1}) & \text{if } 0 \text{ mm/h} < i_{snowfall} \leq 1 \text{ mm/h} \\ 5 \quad \alpha_s &= \max(0.6, \alpha_{st-1}) + (\alpha_{smax} - \max(0.6, \alpha_{st-1})) \frac{i_{snowfall}-1}{3-1} & \text{if } 1 \text{ mm/h} < i_{snowfall} \leq 3 \text{ mm/h} \\ \alpha_s &= \alpha_{smax} & \text{if } i_{snowfall} > 3 \text{ mm/h}\end{aligned}\quad (2)$$

Where α_{st-1} is the albedo from the previous time step, α_{smin} is the minimal snow albedo of 0.3 (estimated using the mean minimal albedo values observed at the station and on MODIS images), N is the number of days since the last snowfall, c is the coefficient of the exponential decrease [days⁻¹], and $i_{snowfall}$ the snowfall intensity [mm/h]. Since the observed decrease is dependent on elevation, the coefficient c is calculated as a function of elevation according to Eq. 3:

$$10 \quad c = 20 \exp(-0.001 Z) \quad (3)$$

Where Z is the elevation of the cell in m a.s.l.

The new function for the decrease of the snow albedo is also shown in Fig. 4.

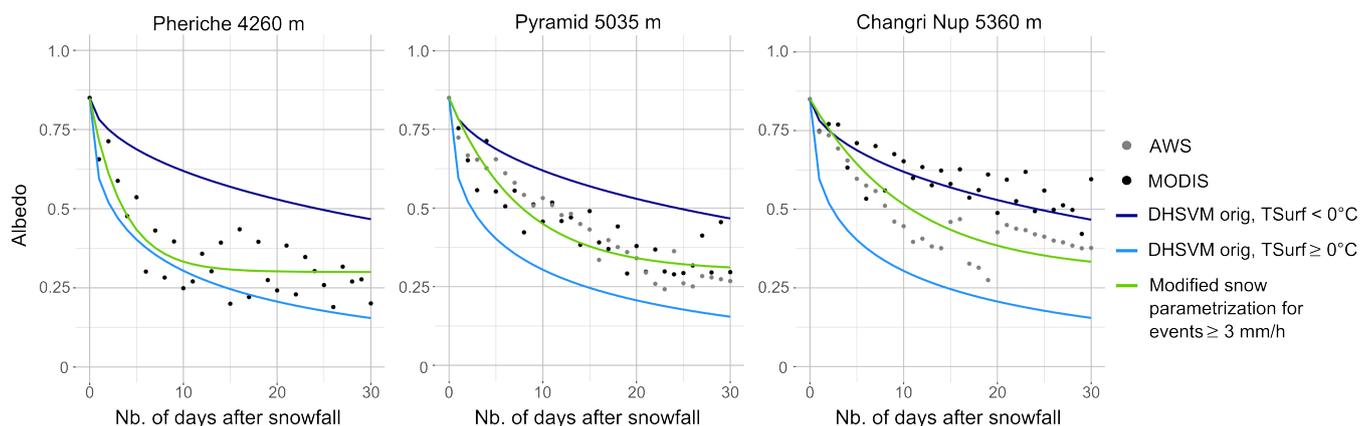


Figure 4. Original and modified parameterization of the snow albedo evolution in DHSVM-GDM and comparison with observed albedo data (2010-2015) in Pheriche, Pyramide and Changri Nup.

3.2.3 Avalanches parameterization

Transport of snow by avalanches is not represented in the original version of DHSVM-GDM. The absence of avalanches in
 15 the model can lead to an unrealistic accumulation of snow in steep high elevated cells, where the air temperature remains below 0 °C, and to a deficit of snow in the lower areas, where snow melt occurs during the melting season. The simulated water balance directly depends on the snow cover, thus not considering avalanches can lead to significant errors. In order to address these discrepancies, an avalanche module was implemented in DHSVM-GDM. The avalanche model transfers snow to downslope neighbour cells under the following conditions:

- if the terrain slope is steeper than 35 ° and the amount of dry snow water equivalent (total snow water equivalent minus liquid water content) is higher than 30 cm: 5 cm of snow water equivalent remains in the cell and the rest is removed by avalanches;
- if the terrain slope is less steep than 35 ° but the difference in snow water equivalent compared to the downslope
 5 neighbour cells is larger than 50 cm: 95 % of the difference is removed by avalanches.

The transfer of snow by avalanches is based on the surface runoff routing in DHSVM-GDM: at every time step starting from the highest cell of the DEM to the lowest, each cell can transfer snow to its closest downslope neighbour cells (between 1 and 4 cells). In case of several possible directions downstream, avalanche snow is distributed according to a ratio based on the slope of each of the directions. Within the same time step, the amount of snow in the receiving cells is actualised and the avalanches
 10 propagate downslope until the conditions cited above are no longer respected.

3.2.4 Glacier parameterization

Distributed ice thickness is derived from the terrain slope following the method described in Haeberli and Hölzle (1995).

Since the standard DHSVM-GDM model does not take into account the impact of the debris layer on melting of the glaciers, the insulating effect of the debris layer is not represented. Here, we implemented a reduction factor for ice melt generated in grid cells with debris-covered glaciers (see Sect. 3.3).

Moreover, in the original DHSVM-GDM version, glacier melt is instantaneously transferred to the soil surface, which is parameterized as bedrock under glaciers (Naz et al., 2014). This significantly underestimates the transfer time through glaciers. In this study we modified the soil parameterization in glacierized areas by increasing the soil depth to 2 m under glaciers. This modification of the soil depth under glaciers enables to compensate the absence of representation of the englacial storage of liquid water inside glaciers was implemented by adding an englacial porous layer between the glacier and the bedrock allowing the liquid water storage in the model. This new parametrization also implies to change the values of three soil parameters under glaciers: the vertical and the lateral conductivities, as well as the porosity (within the glacier. This englacial porous layer has a depth of 2 m and is characterized by a porosity of 0.8 and a hydraulic conductivity (vertical and lateral) of $3 \cdot 10^{-4}$ m/s (see Table A2). These were fixed by optimizing the parameters are kept constant through the simulations and were optimized according to the the constraint of minimizing the differences (in terms of least squares) between the recession shape of the hydrographs simulated hydrographs and the observed one.

Moreover, since the standard DHSVM-GDM model does not take into account the impact of the debris layer on melting of the glaciers, the insulating effect of the debris layer is not represented. Here, we implemented a reduction factor for ice melt generated in grid cells with debris-covered glaciers (see Sect. 3.3).

3.2.5 Quantification of the flow components

Quantifying the relative contributions of ice melt, snow melt, and rainfall in the river discharge at different time scales is a difficult task because hydrological models usually do not track the origin of water during transfer within the catchment (Weiler et al., 2018). There are also different ways of defining the origins of the streamflow. Weiler et al. (2018) lists three types of contributions: 1) contributions from the source areas i.e. from each class of landcover, 2) contributions from the runoff generation (overland flow, subsurface flow, and groundwater flow), and 3) input contributions (ice melt, snow melt, and rain).

In this study, two different definitions were used to estimate the hydrological contributions. First, we estimate the contributions of ice melt, snow melt, and net rainfall to the total water input (definition 1) according to the following water balance equations (all the terms are fluxes expressed in [L/T]):

$$\text{Input} = \text{Icemelt} + \text{Snowmelt} + \text{RainNet} \quad (4)$$

$$\frac{dI_{wq}}{dt} = \text{GIAcc} - \text{Icemelt} - \text{SubIce} \quad (5)$$

$$\frac{dS_{wq}}{dt} = P_{solid} - \text{Snowmelt} - \text{SubIce} - \text{GIAcc} \quad (6)$$

$$\text{RainNet} = P_{liquid} - E_{int} \quad (7)$$

$$\frac{d\text{Storage}}{dt} = \text{Input} - Q - E_T \quad (8)$$

Where $\frac{dI_{wq}}{dt}$ and $\frac{dS_{wq}}{dt}$ are the variations of the ice and snow storages, GI_{Acc} is the amount of snow that is transferred to the ice layer by compaction on glaciers (Naz et al., 2014), $Subl_{Ice}$ and $Subl_{Snow}$ are the amounts of sublimation from the ice and snow layers, P_{solid} and P_{liquid} are the amounts of solid and liquid precipitation, and E_{int} is the amount of evaporation from intercepted water stored in the canopy. It is worth noting that the sum of these contributions (Input) is not equal to the outflow at the catchment outlet Q as it represents all liquid water reaching the soil surface (before infiltration and potential storage in the soils and glaciers ($\frac{dStorage}{dt}$) and before evapotranspiration (E_T)).

In order to evaluate the seasonal components of the outflow at the catchment's outlet, we also define the hydrological contributions as fractions of the outflow coming from the different contributing areas (definition 2):

- direct glacier contribution: direct runoff from glacierized areas,
- delayed glacier contribution: resurging melt water stored inside glaciers,
- direct snow contribution: direct outflow from snow covered non-glacierized areas,
- direct runoff: direct runoff from areas without snow and glaciers,
- subsurface and groundwater contribution: resurging water from the soil in non-glacierized areas resulting from infiltrated rainfall, snow melt, as well as upstream lateral subsurface flows.

These contributions are obtained from the amount of water reaching the soil surface simulated by DHSVM-GDM (see supplementary material). On each grid cell, this volume is a mixture of ice melt, snowmelt and rainfall and can either infiltrate into the soil or produce runoff. Definition 2 combines contributions from source areas (glacierized and non-glacierized areas) and contributions from runoff generation (direct runoff, englacial contribution, and soil contribution).

Figure 5 illustrates the two definitions of the different contributions to outflows. Definition 1 allows assessing the annual impact of glacier melt and snow melt on the water production, while Definition 2 describes the intra-annual routing of the water within the catchment. Moreover, using the two definitions allows to directly compare the results with other hydrological modelling studies in the Dudh Koshi basin, which have estimated glaciers contributions either from effective ice melt (Savéan et al., 2015; Ragetti et al., 2015; Soncini et al., 2016) or runoff from glacierized areas (Immerzeel et al., 2012; Nepal et al., 2014). Further, we assessed the impact of the definition of hydrological components on the estimated glaciers contribution.

Flow components were estimated for the period 2012-2015 at annual scale, on the basis of the glaciological year (from 1 December to 30 November), as well as monthly, daily, and sub-daily scales, in order to have a better understanding of the seasonal variation of the estimated hydrological contributions.

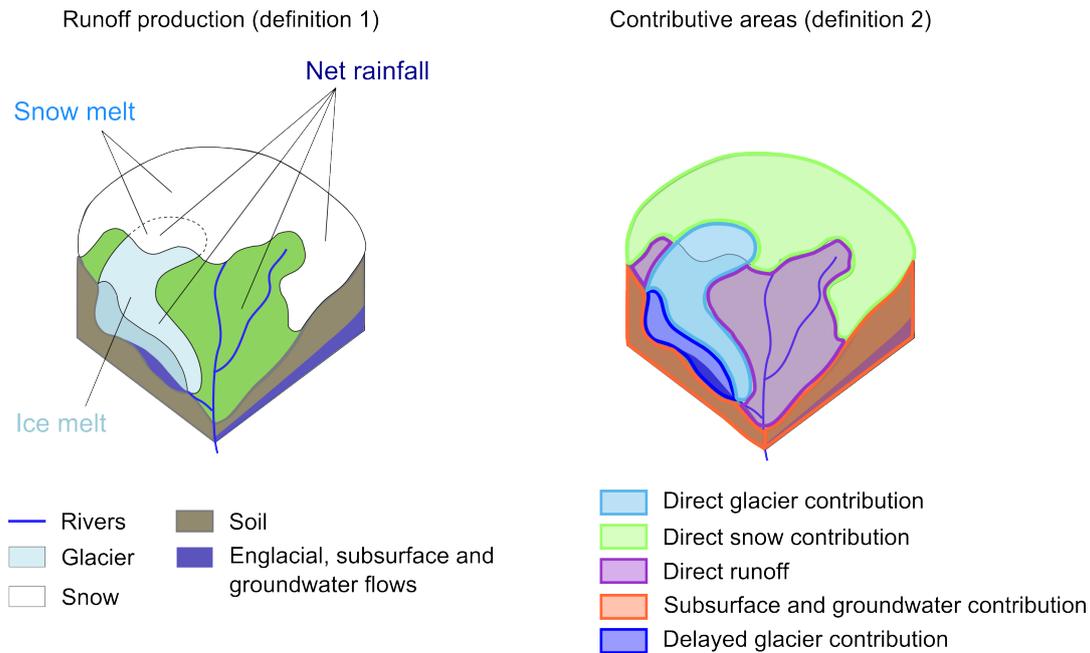


Figure 5. Definitions of the flow components.

3.3 Experimental set-up

Simulations were run with a 1 h time step and a spatial resolution of 100 m for the period from 1 November 2012 to 27 November 2015 corresponding to the period with most available meteorological and discharge data.

A soil depth map was derived from the DEM using the method proposed in the DHSVM-GDM documentation (Wigmosta et al., 1994). As a result, soil depth outside glacierized areas ranges between 0.5 and 1 m ([glaciers are considered to lay on bedrock](#)). All parameter values retained for the simulations (with no calibration) are summarized in Appendix A.

5 In order to test the impact of the representation of the cryospheric processes on the hydrological modelling, we performed simulations with the four following configurations:

- v0: original DHSVM-GDM snow and glacier parameterization;
- v1: modified snow albedo parameterization;
- v2: modified snow albedo parameterization and avalanche module;

10 – v3: modified snow albedo parameterization, avalanche module and melt coefficient for debris covered glaciers.

All four configurations were run with the Racoviteanu et al. (2013) glaciers outline. Concerning the melt of the debris-covered glaciers, we use a reduction factor of 0.4 as estimated by Vincent et al. (2016) from a study on uncovered and debris covered areas of the Changri Nup glacier.

Using configuration v3, we also tested the impact of using different glaciers outlines (the GAMDAM and ICIMOD inventories were also considered for simulations) ~~.-The and analyzed the sensitivity related to different values of parameters related to the cryospheric processes (see Table B1). Indeed, the~~ debris-covered glacier melt reduction factor estimated in Konz et al. (2007), Nepal et al. (2014) and Shea et al. (2015) are respectively equal to 0.3, 0.33 and 0.47. Thus, values between 0.3 and 0.5 were also considered (in addition to the reference of 0.4) ~~in order to evaluate the sensitivity of the model to the debris covered glacier reduction factor.-~~ A sensitivity analysis of the englacial porous layer parameters (depth, porosity, and hydraulic conductivity) and avalanches parameters was also performed (see Table B1 for the tested parameter values) and the relative impact on the simulated hydrological response was discussed (see Ch. 5.3.2).

The sensitivity to the values of the englacial porous layer parameters (depth, porosity, and hydraulic conductivity), as well as to the values of the avalanches parameters, and to the soil depth is also analyzed in the discussion section of the manuscript

3.3.1 Model forcing

Meteorological data from the Pheriche and Pyramid stations (Table 1) were spatialized over the basin by an inverse distance interpolation method. Altitudinal lapse rates of precipitation and temperature were calculated at 1 h time step from data collected at Pangboche (3950 m a.s.l.), Pheriche (4260 m a.s.l.) and Pyramid (5035 m a.s.l.) (Fig. 6). Only significant lapse rates with R^2 values higher than 0.75 were retained for precipitation (43% of the dataset). For smaller R^2 , the lapse rate is considered as not significant and thus set to 0.

In this study, the precipitation lapse rates show a large seasonal variability with daily lapse rates ranging from -41 to 9 mm km^{-1} . Precipitation decreases with elevation during the monsoon season and increases with elevation in winter: during the simulation period, we found 450 days (40 %) with no precipitation, 83 days (8 %) with a strictly negative lapse rate and 165 days (15 %) with a strictly positive lapse rate. Concerning temperatures, daily lapse rates range from -0.009 to $+0.006 \text{ }^\circ\text{C m}^{-1}$. We found only 10 days (1 %) showing a temperature inversion with a positive daily lapse rate.

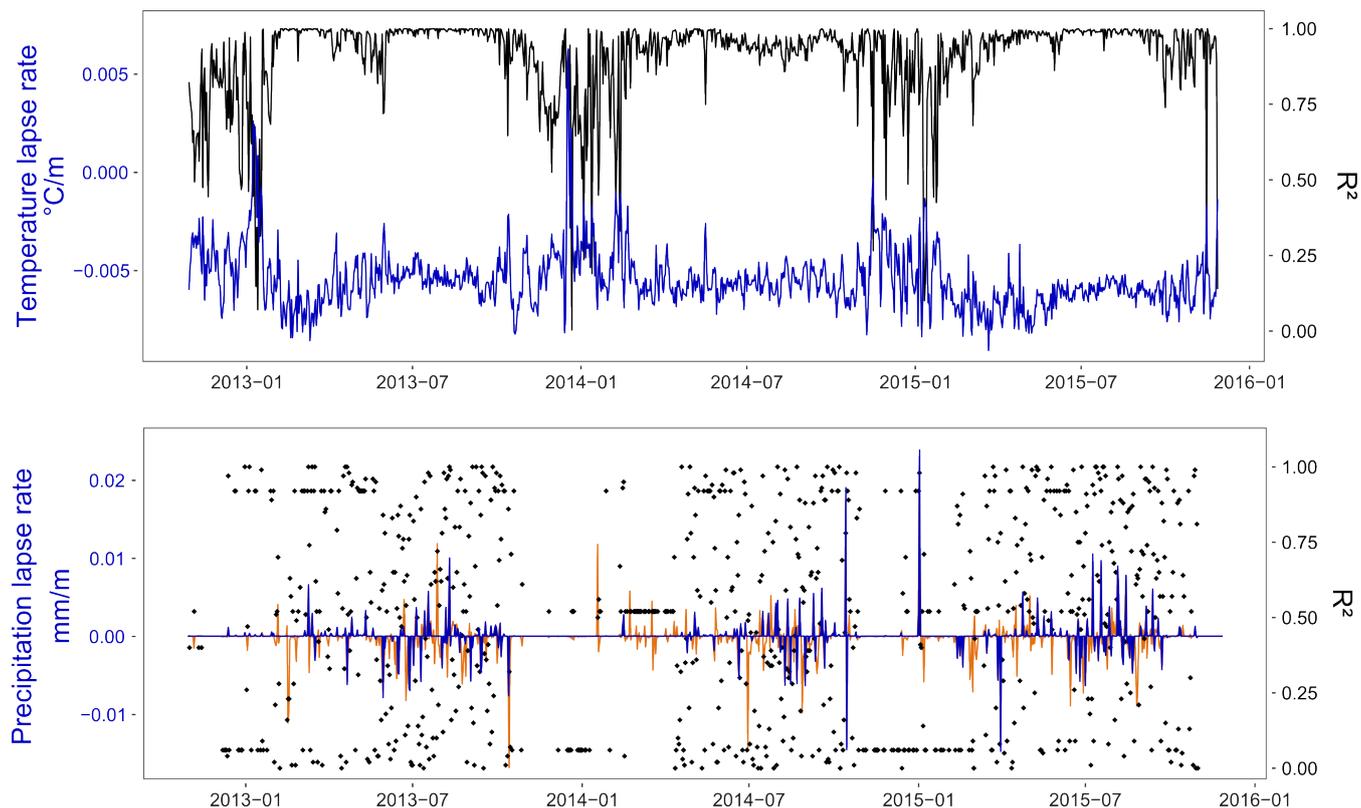


Figure 6. Daily temperature and precipitation lapse rates. Discarded precipitation lapse rates (with a $R^2 < 0.75$) are represented in orange.

5 3.3.2 Model evaluation

A multi criteria evaluation was made considering simulated outflows, SCA and glacier mass balances. Discharge measurements at Pheriche station were used as reference for the evaluation of simulated outflows. A 15% confidence interval was retrieved as representative of the uncertainty of measured discharge. Nash-Sutcliffe Efficiency (NSE) (Nash and Sutcliffe, 1970) and Kling-Gupta Efficiency (KGE) (Gupta et al., 2009) were chosen as objective functions and applied to daily discharges. The simulated SCA was evaluated in comparison to daily SCA derived from MODIS images. Because a large number of MODIS images suffer from cloud coverage, we only compared the simulated and observed SCA during days with less than 5 % of cloud cover on the catchment. The simulated glacier mass balances were evaluated at basin scale by a comparison with published regional geodetic mass balances and at local scale using available stake measurements on the clean ice West Changri Nup and the Pokalde glaciers (Sherpa et al., 2017).

4.1 Impact of the snow and glacier parameterizations on the simulated results

This section presents the simulation results obtained with the different configurations of the model DHSVM-GDM (configurations v0, v1, v2, and v3, see 3.2.5) and the analysis of the impact of the snow and glacier parameterizations on the simulated annual outflow, the daily SCA, annual glacier mass balances.

4.1.1 Annual outflow

Figure 7 represents the annual outflow and flow components (definition 1) simulated with the different model configurations, indicating the impact of each modification of the snow and glacier parameterization on the simulated annual outflow and flow components. Configuration v1 leads to a drastically increased outflow due to an enhanced ice melt component. Implementing the avalanche module (v2) reduces the ice melt component and increases the snow melt component by 21 %. Configuration v3 including debris-covered glaciers further reduces the ice melt, resulting in a simulated annual outflow close to the observations.

Figure 7 shows that configuration v2, which does not consider the debris-covered glaciers, overestimates the outflow at Pheriche with a mean bias of +32 % compared to the annual observed outflow. Without the debris layer, the ice melt component represents 817 mm, which is nearly twice the amount of ice melt obtained with v3 that includes debris-covered glacier melt.

The configuration with all three modifications (v3) gives results similar to the original parameterization of DHSVM-GDM (v0) in terms of glacier mass balance, improving slightly the annual outflow. The ice melt factor for debris covered glaciers and the avalanches compensate the increase of ice melt caused by the new snow albedo parameterization, but the modifications implemented in v3 impact the results for the flow components: on average, less ice melt and more snow melt are generated. Moreover, the configuration v3 modifies the seasonal variation of the outflow by increasing winter discharges and reducing monsoon discharges (not illustrated here) which improves the daily NSE and KGE (Table 3).

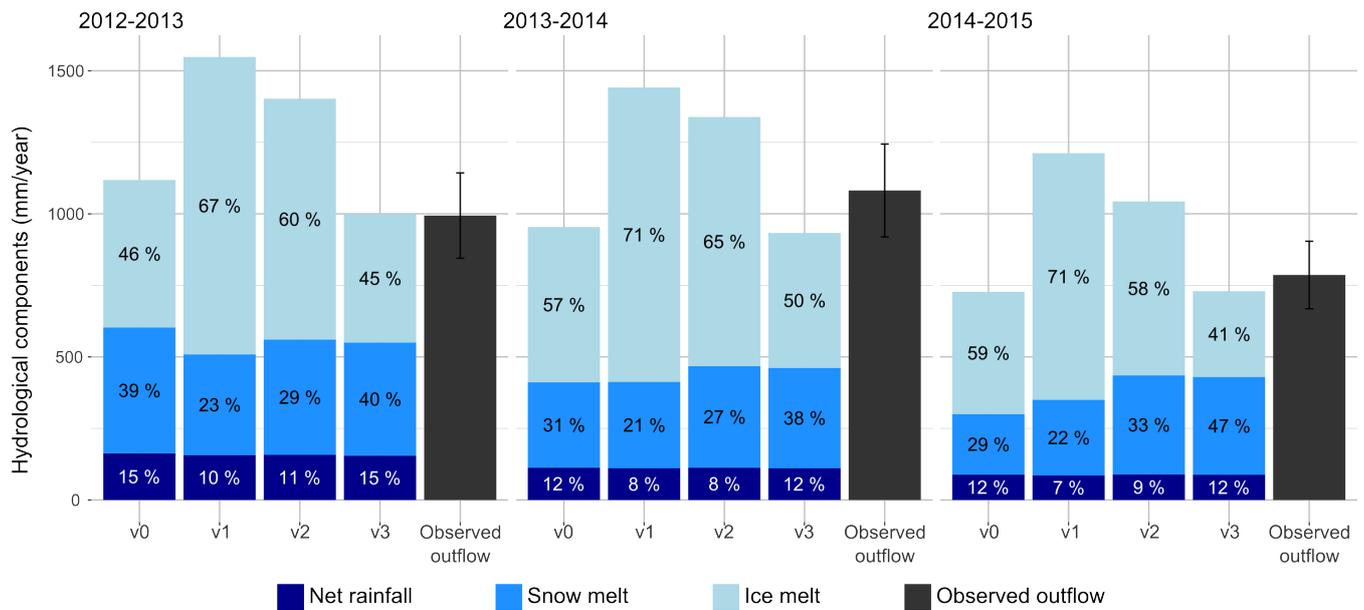


Figure 7. Simulated annual hydrological contributions (Definition 1) to Pheriche outflow for 3 glaciological years from 12/2013 to 11/2015

	v0	v1	v2	v3
NSE	0.87	0.53	0.74	0.91
KGE	0.83	0.5	0.65	0.88

Table 3. NSE and KGE values calculated on the daily discharges on the period 2012-2015 for each model configuration.

4.1.2 Snow cover dynamics

Figures 8 and 9 compare the simulated snow cover area (SCA) and duration obtained with the configurations v0, v1, v2, and v3 to data derived from MODIS images. The SCA is strongly overestimated using the original parameterization v0: Figure 8 shows that after full coverage it does not decrease fast enough compared to MODIS data. Figure 9 demonstrates that the snow cover duration is over-estimated for the entire catchment area. This indicates that in the simulations snow does not melt fast enough with the original parameterization. Configuration v1 with the modified snow albedo parameterization (Eq. 2) accelerates the snow melt and improves the SCA simulation (Fig. 8). The RMSE between the simulated and observed SCA decreases from 29 % using v0 to 14 % using v1 and v2. Figure 9 shows that with configuration v1 in some areas located at high elevation the snow cover duration is underestimated. This bias is rectified in configuration v2 since the avalanche module transfers snow from high elevated and sloping cells downward and corrects the lack of snow observed with configuration v1 at the edges of the permanent snow cover (Fig. 9). The results for the SCA and snow cover duration using the configuration v3 show no difference compared to the configuration v2 since only the ice melt rate for debris covered glaciers is modified.

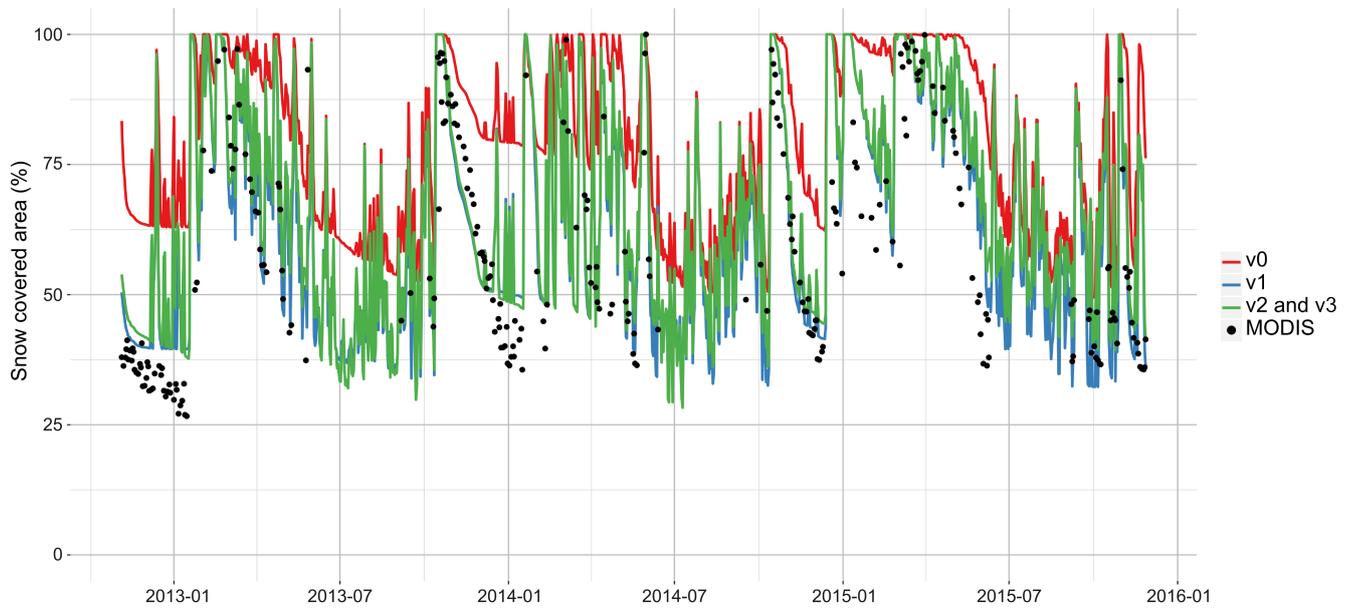


Figure 8. Comparison of the MODIS SCA and the simulated daily SCA with the four modelling configurations (v0, v1, v2 and v3) for the Pheriche catchment.

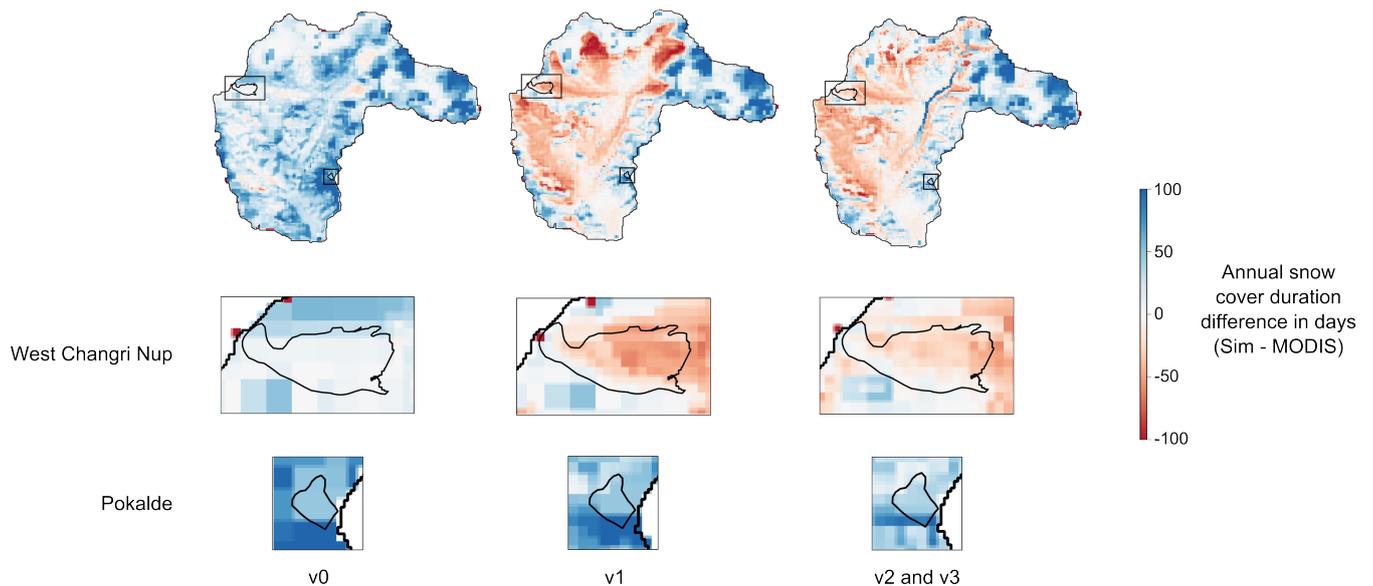


Figure 9. Difference between the mean annual snow cover duration simulated with DHSVM-GDM and derived from MODIS images (in days) for the Pheriche catchment (top panels), with a focus on West Changri Nup (medium panels) and Pokalde glaciers (bottom panels).

15 4.1.3 Glacier mass balances

Figure 10 compares the simulated mean annual glacier mass balances obtained with the different model configurations with mass balances determined with geodetic methods between 1999 and 2015 (Bolch et al., 2012; Gardelle et al., 2013; Nuimura et al., 2015; King et al., 2016; Brun et al., 2017). These geodetic mass balances range from -0.67 ± 0.45 m w.e.yr⁻¹ (2000-2008) (Nuimura et al., 2015) to -0.32 ± 0.09 m w.e.yr⁻¹ (2000-2015) (Brun et al., 2017).

Our results show that the snow parameterization has a significant impact on the simulated glacier mass balance. The mass balance simulated with v0 is on average -0.82 m w.e.yr⁻¹ and decreases to -2.02 m w.e.yr⁻¹ with the corrected snow albedo (v1) since the modified snow albedo parameterization accelerates the snow melt which leads to more uncovered ice and stronger glacier melt. The avalanche module (v2) adds snow on glaciers and increases the accumulation and, thus, reduces the glacier melt to -1.69 m w.e.yr⁻¹. Nevertheless the mass balance remains too negative compared to geodetic mass balances which suggests that the model produces too much ice melt. The implementation of debris-covered glaciers (v3) gives a mean annual glacier mass balance of -0.84 ± 0.14 m w.e.yr⁻¹ which is within the intervals of uncertainty and thus in good agreement with geodetic methods.

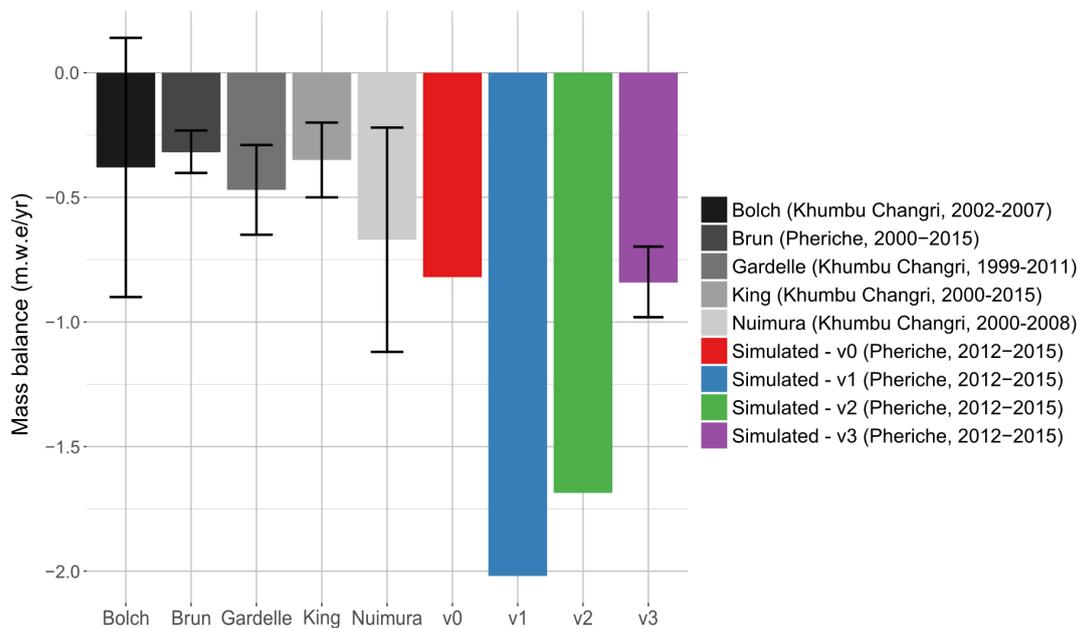


Figure 10. Mean annual glacier mass balances simulated with configurations v0, v1, v2 and v3. The error bar for configuration v3 represents the uncertainty related to the debris layer coefficient melt varying between 0.3 and 0.5.

We also evaluated the mass balance at the point scale. Figure 11 shows the simulated mass balances with parameterizations v0, v1, v2 and v3 versus the observed mass balances of the two debris-free glaciers West Changri Nup and Pokalde measured in-situ for the three glaciological years (2012-2015). Here, the configuration v3 gives the same results as the configu-

15 ration v2 because in configuration v3 only the ice melt rate on debris-covered glaciers is modified. The simulated mass balances vary according to the model configuration. With configuration v0, the model overestimates the point mass balances because of small snow melt rates (see also section 4.1.2). With configuration v1, the model overestimates the ice melt on the West Changri Nup glacier due to a lack of accumulation in the western part of the catchment and a too strong accumulation on the Pokalde glacier (Fig. 9). The configuration v2 improves the simulated mass balance by transferring snow due to avalanches on the West Changri Nup glacier and by removing exceeding snow accumulation on the Pokalde glacier. For the Pokalde glacier, the mass balances simulated with configuration v3 show a larger variability than the mass balances simulated with configuration v0, but the point mass balances are spread around the diagonal axis which leads to a bias ten times smaller (mean bias of 1 m with v0 and 0.1 m with v3).

The results at basin scale and point scale show that the snow parameterization has a strong impact on the simulated glacier mass balance and that the new snow albedo parameterization and the avalanching module clearly improve the simulated glacier mass balance on debris-free glaciers. Nevertheless, regarding point mass balances, the agreement is far from being perfect, due either to simulation RMSEs (including errors depending on the interpolated input fields and errors induced by the representation of slopes and expositions by the DEM) and/or from a lack of representativeness of the measurements.

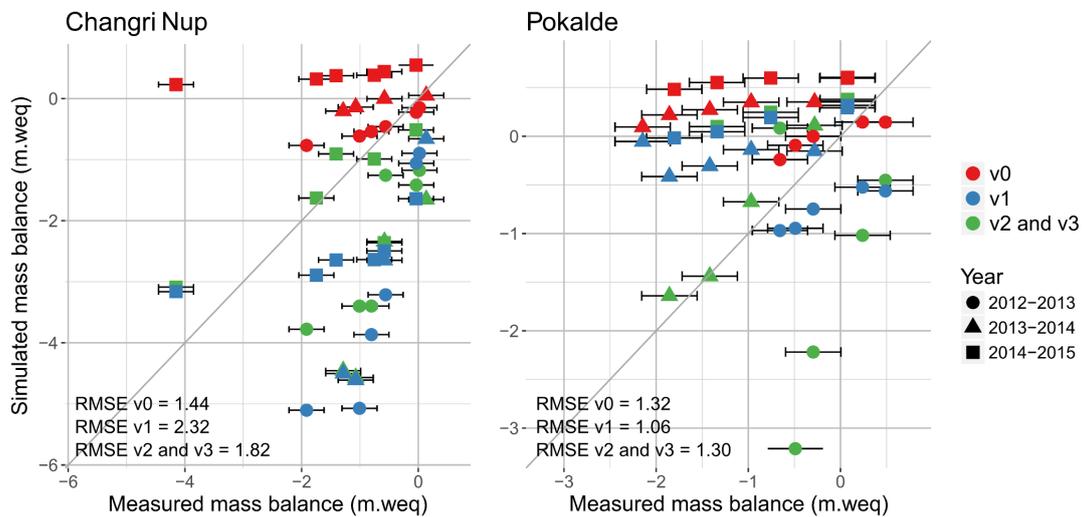


Figure 11. Annual simulated and measured point mass balances on West Changri Nup (left panel) and Pokalde (right panel) glaciers; also shown is the 1:1 line.

4.2 Simulated outflow and flow components

This section presents the outflows and flow components simulated in the Pheriche basin during the period 2012-2015 with the modified version of DHSVM-GDM (configuration v3). The simulation results are analysed using two different definitions of the flow components (definitions 1 and 2, see 3.2.5).

4.2.1 Annual simulated outflow and hydrological contributions

The annual outflows simulated with the new ~~parameterization~~ parametrization of the model (configuration v3) are in good agreement with the annual observed outflows since they remain within the 15 % interval of estimated error (Fig. 12 and Table 4).

20 The results show an inter-annual variability of the flow components. During the period 2013-2015, the ice melt component ranged from 41 to 50 %, the snow melt component from 37 to 47 % and the net rainfall component from 12 to 16 %. These variations are related to the meteorological annual variability. The amount of rainfall decreased from 2013 to 2015 and explains the decrease of the net rainfall components from 155 mm in 2013 to 88 mm in 2015. The snow melt component is higher in 2013 because of warmer pre-monsoon and monsoon seasons. The ice melt component is mainly controlled by the amount of winter snowfall. In 2014 a low amount of snowfall was observed, so the snowpack melted more rapidly and the glaciers started melting earlier. In contrast, 2015 was a year with a lot of winter snowfall, which delayed the beginning of the glacier melt and explains the lower ice melt component. The losses by evaporation and sublimation are rather constant through the simulation period ranging from 140 to 150 mm/yr.

5 The runoff coefficients (ratio between the annual outflow and annual precipitation) were on average equal to 1.4, which means that a considerable amount of water is withdrawn each year from the catchment through ice melt (eventually in the form of a delayed groundwater flow).

10 On average, we find that the outflow is mainly produced by meltwater as 46 % of the annual water input is due to ice melt and 41 % to snow melt (definition 1). The contributions estimated according to definition 2 show the importance of infiltration and subsurface flows in the water balance since more than 40 % of the outflow was coming from water infiltrated in glaciers and more than 20 % from subsurface and groundwater flows generated outside the glacier covered area.

The choice of the definition of the hydrological components leads to different perceptions of the glacier contribution to the outflow. The glacier contribution to the total outflow is 69 % if the contribution from the entire glacierized area (i.e. contributions of ice melt, snow melt and net rainfall) is considered like in definition 2. However, the contribution from ice melt alone, included in definition 1, corresponds to only 46 % of the water input.

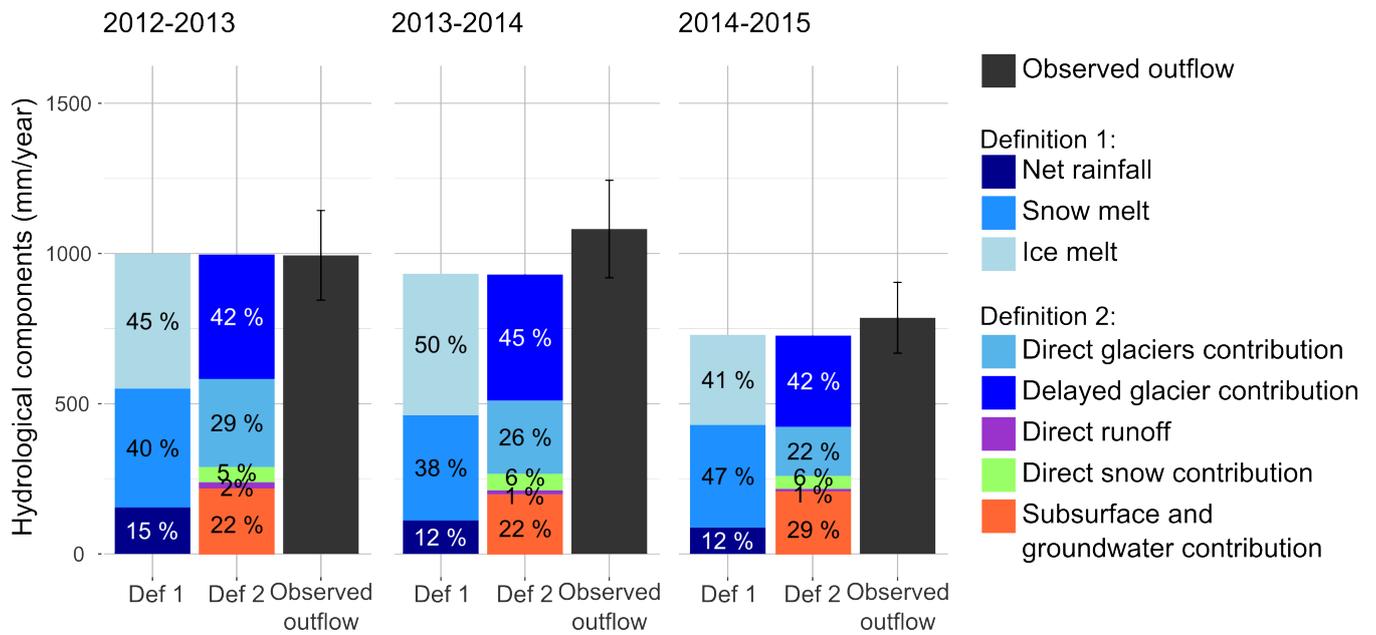


Figure 12. Simulated annual hydrological contributions to Pheriche outflow for the two definitions of the flow components (Definition 1 and Definition 2) and for 3 glaciological years from 12/2013 to 11/2015.

	2013	2014	2015
Total precipitation (mm)	708	644	683
Snowfall (mm)	501	492	561
Qobs (mm)	994	1081	786
Qobs \pm 15% (mm)	845 - 1143	919 - 1244	668 - 904
Qsim (mm)	999	933	729
Bias (%)	+1	-14	-7
Evapotranspiration (mm)	61	48	43
Sublimation (mm)	91	96	97
Flow components (Definition 1)			
Net rainfall (mm)	164	117	93
Snow melt (mm)	420	368	362
Ice melt (mm)	476	496	317
Flow components (Definition 2)			
Direct glacier contribution (mm)	293	244	164
Delayed glacier contribution (mm)	414	420	304
Direct runoff (mm)	21	14	9
Direct snow contribution (mm)	51	55	43
Subsurface and groundwater contribution (mm)	220	200	211

Table 4. Annual hydrological balance simulated with configuration v3 for 3 glaciological years from December 2013 to November 2015.

4.2.2 Seasonal variations of the flow components

5 Figure 13 presents the daily simulated discharges simulated with configuration v3 and the flow components estimated with the two different definitions. Daily discharges were well simulated for 2012-2013 and 2014-2015 by the model, with NSE equal to 0.91 and KGE equal to 0.88. However, the outflow is under-estimated by the model during the monsoon season in 2014.

The simulated total water input (i.e. the sum of snow melt, ice melt and net rainfall) is always higher than the simulated outflow at the catchment outlet before the monsoon season (from February to June) and lower during post-monsoon and winter
5 seasons. This is mainly due to glacier melt water stored inside the glaciers during pre-monsoon and monsoon seasons and continuing surging during winter, as well as to changes in the soil water storage (Fig. 13b and 14b).

Figure 14 shows the mean monthly flow components averaged over the simulation period. From February to May-June, the water input is entirely controlled by snow and ice melt (snow melt between 50 and 60 % ice melt between 40 and 48 %) Fig. 14a). The net rainfall, snow melt and ice melt absolute contributions are at their maxima in July and August during the
10 monsoon season. During these two months, 24 % of the runoff is generated by net rainfall, 37 % by snow melt, and 38 % by ice

melt. From October to January, the runoff is produced by ice melt (up to 80 % in December) and snow melt (between 20 and 30 %). Groundwater and englacial water represent a significant fraction of the monthly outflow as they contribute more than 50 % of the outflow during the monsoon season and can contribute up to 90 % during winter Fig. 14b). Direct contributions from glacierized areas, snow areas, and direct runoff are highest during the monsoon season, when the englacial and soil storage is saturated.

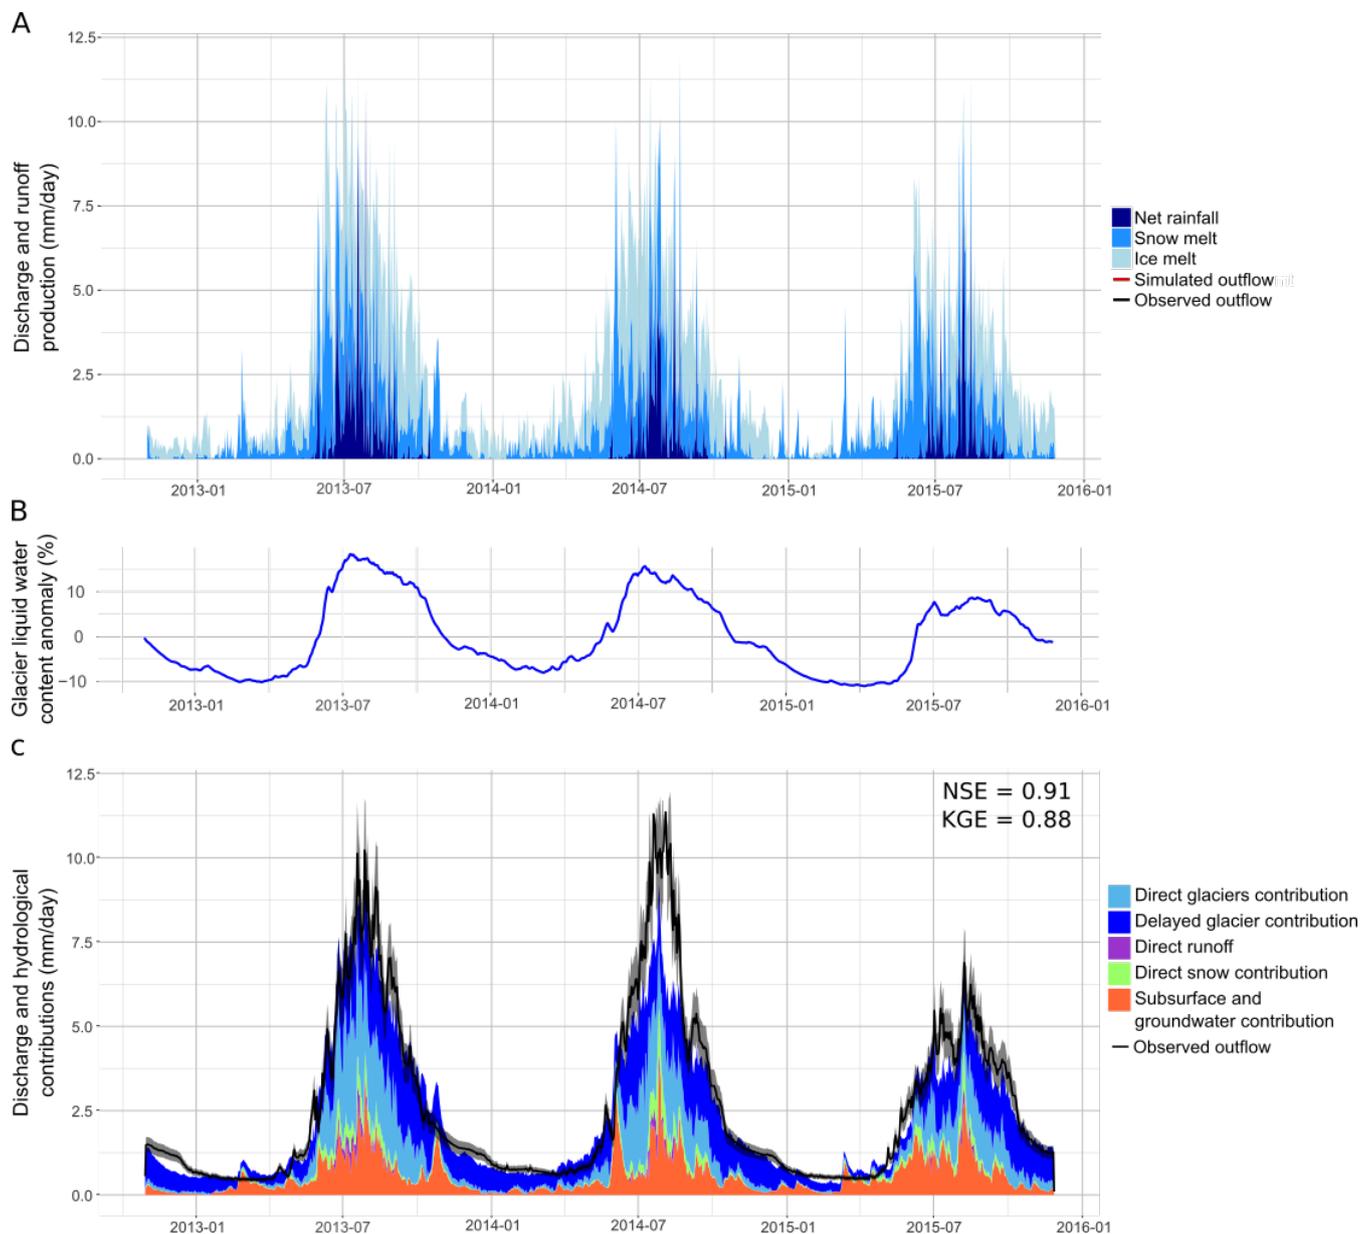


Figure 13. Daily discharges and flow components simulated with configuration v3: (a) production of ice melt, snow melt and net rainfall (note that the sum of the flow components represent the total water input and is not equal to the discharge at the catchment outlet, see definition 1, ch. 3.2.5), (b) relative difference between the simulated glacier liquid water content and the inter-annual mean (c) hydrological contributions to the outflow (definition 2, ch. 3.2.5). Observed discharges are represented by the black line with a 15 % interval of error.

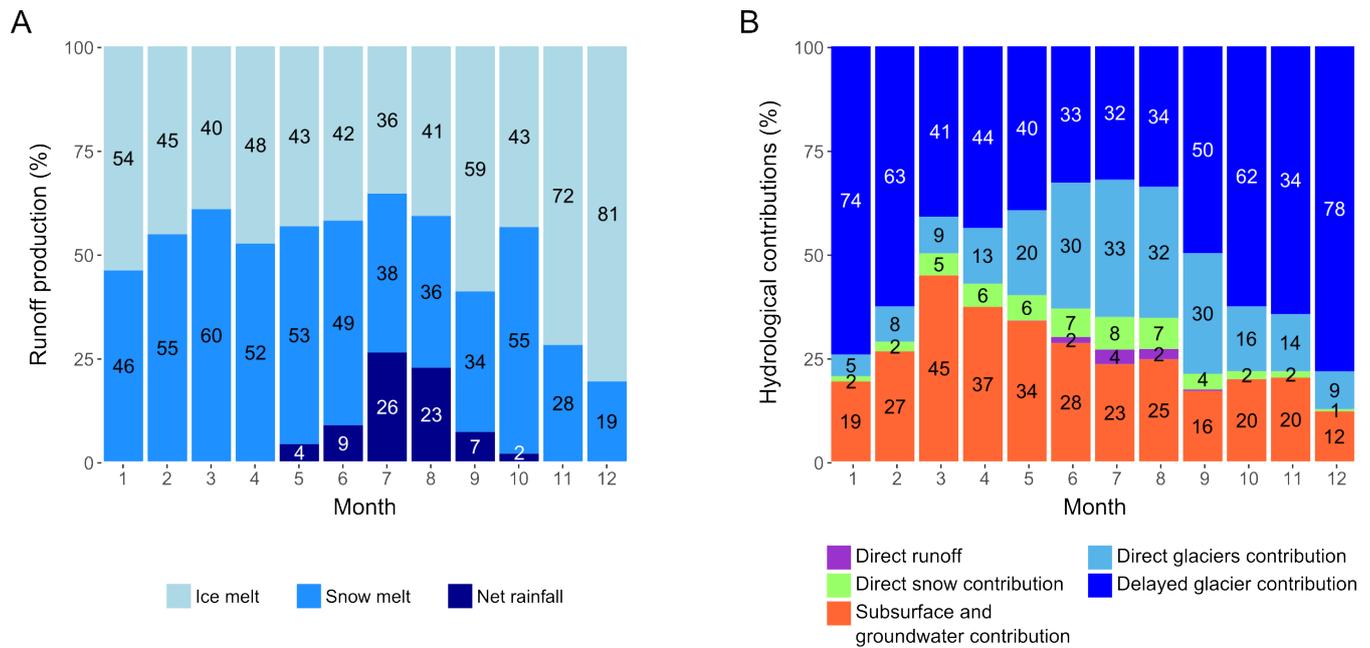


Figure 14. Average monthly contributions to the water input (definition 1, ch 3.2.5) (a) and hydrological contributions (definition 2, ch. 3.2.5) (b) simulated with configuration v3 for the years 2012-2015.

4.2.3 Diurnal cycle

Figure 15 presents the diurnal cycles of precipitation and hydrological components averaged for each considered season (winter, pre-monsoon, monsoon, and post-monsoon) obtained with configuration v3. During winter, pre-monsoon, and post-monsoon, the observed outflow is rather constant during the day, with a weak peak around noon when the temperature is at its maximum. During this period, almost all of the precipitation is in the form of snowfall leading to no direct response for the outflow. The peak around noon can be explained by snow melt or the melting of small frozen streams. During the monsoon season, there is a strong diurnal cycle of the precipitation with a maximum occurring during late afternoon or at night causing a peak in the discharge around midnight.

The model simulates ice and snow melt during day time with a maximum at noon as expected. Except for the monsoon season, it seems to simulate accurately the baseflow during night without melt production: the discharge is rather controlled by the release of the glacier and soil storage. However, the model simulates a peak of discharge around 14 h originating mostly from glacierized areas, two hours after the maximum of ice and snow melt, which does not correspond to observed discharges. At daily and longer time scales the water balance is correctly simulated. However, at a sub-daily scale the model responds too quickly to the snow and ice melt production.

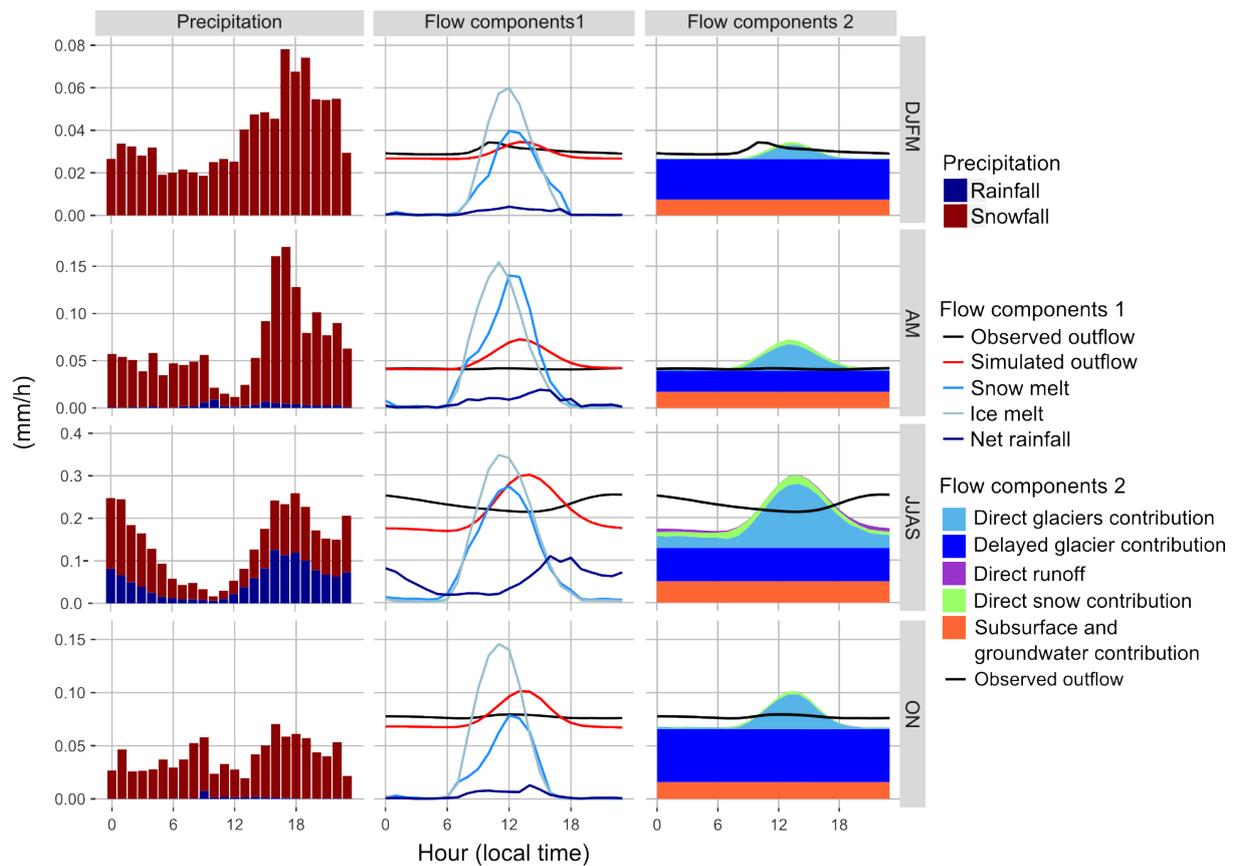


Figure 15. Mean hourly precipitation, discharge and flow components simulated with configuration v3 and averaged for the winter (DJFM), pre-monsoon (AM), monsoon (JJAS), and post-monsoon (ON) seasons. Note different y-axis scales for each season

5 Discussion

5.1 Simulation of the discharges and flow components

Overall, the comparison between the two definitions of the hydrological contributions shows that contributions must be explicitly specified in order to allow inter-comparison between models, especially for catchments with a large glacierized area. Moreover, the use of two different definitions allows to get complementary information on the origin of the outflow (processes at the origin of the runoff, types of flow generation, contributive zones). A perspective to improve the quantification of the hydrological contributions to the outflow is to track the icemelt, snowmelt and rainfall component pathways in the model as suggested in Weiler et al. (2018). This would enable to quantify the fractions of the three components contributing to subsurface and groundwater flow, which is not possible with the current version of DHSVM-GDM.

Soncini et al. (2016) studied flow components in the Pheriche catchment for the period 2013-2014 and estimated an annual ice melt component of 55 % and a snow melt component of 20 % of the annual outflow. The ice melt components are thus quite similar in terms of relative contributions to outflow, which is not the case for the snow melt components. We think that the main reason of such a difference is that we use different precipitation input. Indeed, precipitation data are measured here by Geonor sensors, while in Soncini et al. (2016) precipitation data come from tipping buckets. At the Pyramid station, where both sensors are installed, the Geonor sensor measures 60 % more precipitation than the tipping bucket over the period 2013-2015 and the main differences are in terms of solid precipitation (~~309 mm of mean annual snowfall measured by the Geonor sensor versus 83 mm measured by the tipping bucket, which is known to badly perform with solid precipitation~~) (Mimeau et al., 2019).

Concerning the seasonal contributions to the outflow, our results are consistent with the results from Soncini et al. (2016), who found a main contribution of snow melt during the pre-monsoon season, mixed contributions of rainfall, snow melt and ice melt during the monsoon season and mixed contributions of snow melt and ice melt during post-monsoon and winter season. The studies of Ragetli et al. (2015) and Racoviteanu et al. (2013) concerning the Upper Langtang and the Dudh Koshi basin respectively, showed that most of the winter outflow surges from soil, channel, surface, and englacial storage changes, which is consistent with our results. However, the estimated flow components presented in this study, particularly the soil and englacial contributions, ~~are estimations which strongly depends~~ strongly depend on the model set-up. Figure 13 shows that the main part of the soil infiltrated water resurges within a day, whereas liquid water can be stored for several months within the glaciers. This difference between the response of the soil storage and the englacial storage results from the soil and glacier parameterization (see sensitivity analysis in ch. 5.3.2).

At hourly scale, the results show that the model cannot represent the diurnal cycle of the outflow correctly as the simulated hydrological response is anticipated. Irvine-Fynn et al. (2017) found that on the Khumbu glacier the presence of supraglacial ponds buffers the runoff by storing diurnally more than 20 % of the discharge. This could explain the longer transfer time observed on the measured outflows which are not represented by the model. This shows that the current representation of the glacier ~~and soil~~ storage in DHSVM-GDM does not allow to reproduce accurately the diurnal variations of discharge and further studies are needed in order to improve the model.

Overall, the comparison between the two definitions of the hydrological contributions shows that contributions must be explicitly specified in order to allow inter-comparison between models, especially for catchments with a large glacierized area. Moreover, the use of two different definitions allows to get complementary information on the origin of the outflow (processes at the origin of the runoff, types of flow generation, contributive zones). A perspective to improve the quantification of the hydrological contributions to the outflow is to track the icemelt, snowmelt and rainfall component pathways in the model as suggested in Weiler et al. (2018). This would enable to quantify the fractions of the three components contributing to subsurface and groundwater flow, which is not possible with the current version of DHSVM-GDM.

5.2 Representation of the cryospheric processes in the model

~~One of the main difficulties for hydrological modelling of highly glacierized catchments is to correctly simulate at the same time the outflows, the dynamics of the snow cover, and the~~ One of the main difficulties in glacio-hydrological modelling is to

correctly simulate both river discharges, snow cover dynamics, and glacier mass balances. The results showed that two different representations of the cryospheric processes in the model (v0 and v3) can lead to similar simulated annual outflows but different estimations of the ice melt and snow melt contributions. This is particularly true for the glaciological year 2014-2015, when the ice melt contribution decreases from 59 % with v0 to 41 % with v3 and the snow melt contribution increases from 29 % to 20 47 % (Fig. 7). This can be explained by the fact that 2014-2015 was a year with a high amount of snowfall (Fujita et al., 2017), therefore, the representation of snow processes in the model has a larger impact on the simulated runoff production than the two other years. This highlights the importance of a correct representation of snow processes in the model. This also shows the need to use as much validation data as possible to assess the coherence between the ice, snow and hydrological processes and reduce the uncertainty on the flow components estimation.

25 The results also showed that the modification of one specific hydrological process (here, the representation of the snow albedo evolution) can have a significant impact on the simulated hydrological response of the catchment and requires improving other processes (here, considering specific representation of avalanches and debris-covered glaciers).

Further modifications of the model could also lead to different model results and it is also not excluded that different model errors are compensating each other. For example, the results showed that the original model version leads to a correct 30 simulation of the river discharges because the non-representation of the insulation effect for debris covered glaciers on the ice melt was compensated by the incorrect representation of the snow albedo decrease. Due to the complexity of the model and the represented processes, no guarantee can be given that similar compensating effects still occur in the model. In this study, the validation of the model output was extended beyond the annual river discharge to discharges at different time scales, the snow cover area, and glacier mass balances in order to validate the simulations of the snow cover, glacier melt and discharges separately. The results demonstrate that the new version of the model performs well for all three signals. Moreover, the new parametrizations of the snow albedo and ice melt under debris were based on observed data (MODIS and in situ albedo measurements, and coefficient for ice melt under debris from Vincent et al. (2016)) and do not result from a calibration in order to avoid compensation effects. Therefore, it is very likely that the new implementation improved the quality of the represented 5 processes.

The results presented in this study also indicate possible forthcoming works for increasing the simulations reliability and reducing uncertainties, especially at short time steps. Indeed, at daily and longer scales, the different hydrological components seem to be well reproduced by the model. However, an analysis of the diurnal cycle (Fig. 15) showed that DHSVM-GDM responds too rapidly to the ice melt production and that the representation of the water storage within the glaciers needs to 10 be improved. Further improvements should be based on studies that analyze the mechanisms of glaciers drainage systems in the Khumbu region and their influence on glaciers outflow (e.g., Gulley et al., 2009; Benn et al., 2017). These studies show that englacial conduits and supraglacial channels, ponds and lakes play a key role in the response of glaciers: DHSVM-GDM could thus be upgraded by implementing a parameterization of such systems and delay the response of glacierized areas, as successfully proposed, for instance, in the model developed by Flowers and Clarke (2002). Other processes such 15 as supraglacial ponds and ice cliffs melting, transport of snow by wind or variation of temperature in the ice pack are not considered in DHSVM-GDM and their impact on the hydrological modelling should also be studied.

The avalanche routine implemented in this study is simplified and only considers 4 directions for the snow redistribution. A perspective of this study is to improve the representation of the avalanches in DHSVM-GDM by considering eight directions for the snow redistribution and considering other parameters such as the age of the snow cover, the snow density and the type of land-cover as it was proposed in Frey and Holzmann (2015).

5.3 ~~Uncertainties~~ Model sensitivities and ~~other open-ended questions~~ uncertainties in forcing data

5.3.1 Sensitivity to the glacier outline

The three inventories used in this study result in very different estimates of the glacierized area: between 43 % and 24 % of the Pheriche basin with the inventories proposed by Racoviteanu et al. (2013) and GAMDAM (Fig. 3). Table 5 presents the average annual glacier mass balances, outflows, and flow components for the configuration v3 using the three inventories. The GAMDAM inventory leads to a more negative glacier mass balance than the two other inventories with $-1.17 \text{ m w.e.yr}^{-1}$ compared to -0.84 and $-0.89 \text{ m w.e.yr}^{-1}$ for the Racoviteanu et al. (2013) and ICIMOD inventories. This is due to smaller glacier accumulation areas in the GAMDAM inventory. The amount of snowfalls collected over those areas is lower, leading to more negative mass balances: glaciers receive less snowfall for accumulation, which lowers the mass balance value. Concerning the simulated outflow and flow components, the GAMDAM and ICIMOD inventories lead to fewer ice melt than the Racoviteanu et al. (2013) inventory due to their smaller areas in ablation zones, which leads to a smaller simulated annual outflow. From these results we estimate an uncertainty of 20 % (430 mm with the Racoviteanu et al. (2013) inventory versus 345 mm with the ICIMOD inventory, cf. Table 5) on the simulated annual ice melt volume related to the glaciers outline. The glacier outline mainly affects the simulated outflow during the monsoon season, when the ice melt contribution to the outflow is more important and leads to an uncertainty of 8 % (154 mm with the Racoviteanu et al. (2013) inventory versus 141 mm with the ICIMOD inventory) on the monthly discharges during monsoon season. This result shows that the choice of the glacier inventory as an input data of the glacio-hydrological model contributes to the uncertainty on the simulation results. Here, the Racoviteanu et al. (2013) inventory gives the best results in terms of glacier mass balance and the smallest bias with respect to the annual outflow. As its area is significantly larger than the other inventories, it gives the largest amount of ice melt. This potentially compensates a lack of precipitation due to a poor knowledge of the precipitation distribution over the catchment, specifically in the areas above 5000 m a.s.l. which constitute more than three quarters of the total area and for which no observations exist. It is worth noting that the glacier mass balances obtained with the Racoviteanu et al. (2013) and ICIMOD inventories are very similar but the amounts of simulated ice melt are different, which shows that a consistent mass balance can lead to errors on the simulated glacier contributions and total outflow.

5.3.2 Sensitivity to ~~the parameterization~~ model parameter values

DHSVM-GDM is a physically based model with a large number of parameters which are difficult to define, particularly in a study area with little information on catchment characteristics and limited validation data. In order to have an indication of how sensitive the results are on the chosen parameter values, 27 additional simulations were performed with the new version

Glaciers inventory	Basin glacier area		Glacier MB m w.e.yr ⁻¹	Qsim		Flow components (mm)		
	km ²	%		mm	Bias	Net rainfall	Snow melt	Ice melt
Racoviteanu et al. (2013)	60	43	-0.84	887	-7%	125 (13%)	383 (41%)	430 (46%)
GAMDAM	38	24	-1.17	824	-13%	123 (14%)	387 (44%)	370 (42%)
ICIMOD	44	30	-0.89	811	-15%	121 (14%)	397 (46%)	345 (40%)

Table 5. Mean annual glaciers mass balance (MB), outflow and flow components simulated with different glaciers inventories (configuration v3)

of DHSVM-GDM (configuration v3). The model sensitivity concerning the melt coefficient on debris covered glaciers, the soil depth, the parameters of the englacial porous layer, and the avalanche parameters (see Table B1) was tested.

20 Figure 16 shows the impact of the parameter values on the simulated daily discharge. The overall variability ranges from 0.1 m³/s up to 7.4 m³/s, and is larger during the monsoon season (3.8 m³/s on average in June). Overall, the parameter values have a low impact on the simulated daily discharge but a higher impact on the estimated relative contributions to the outflow (see Table B2). NSE values remain close to the reference simulation (around 0.91), while snow and ice melt contributions (definition 1) vary from 34 to 44 % and from 42 to 54 %, respectively. Concerning contributing areas (definition 2), the
25 parameter values mainly impact the distribution between direct and delayed runoff from glacierized areas.

A major limitation to the estimation of the contributions from the runoff generation (overland flow, subsurface and groundwater flow, and groundwater-englacial flow) is the representation of the groundwater and-englacial flows in the model. ~~In this study, we selected standard soil parameters for the simulations since there is very little information about soil properties in high-mountain environments. Moreover, data to validate subsurface and groundwater flows do not exist making it very difficult to adapt~~ The performed simulations show that the parameter values to the study area. Here, three different values of soil depth under glaciers were tested in order to assess the sensitivity of the soil parameterization on the simulated discharges. Figure ??a shows the
5 simulated discharges and flow components (definition 2) simulated with configuration v3 for a soil depth under glaciers equals to 1 m, 2 m and 5 m. The soil depth under glaciers does not impact of the simulated annual outflow and the porous englacial layer have a strong impact on the results (Table B2 sim. 3 to 11). While it has no impact on the total annual contributions from glacierized and non-glacierized areas. ~~The soil depth under glaciers only, it impacts the partitioning between direct and delayed contributions (soil water and englacial water contributions): when the soil depth under glaciers ranges between 1 m and 5 m, the~~
10 direct glaciers contribution ranges glacier contributions ranging from 34 to 20 % ~~and the delayed glacier contribution ranges from (direct) and 35 to 47 % .At seasonal scale(delayed), with the tested range of parameter values. The overall performance of the simulation of the daily discharge is affected by the choice of the parameter values of the porous englacial layer (NSE values ranging between 0.84 and 0.9). Indeed, an increase of the soil depth under glaciers glacier storage capacity leads to a rather important delay of the outflow (as there is more infiltration simulated during the pre-monsoon and monsoon seasons, but~~
15 this has a limited impact on the NSE and KGE values (respectively ranging from 0.92 to 0.94 and 0.83 to 0.91)). It is worth noting that we kept constant parameters for the englacial porous layer in our simulations, which is clearly a simplification, at least considering seasonally evolving flow networks within the glacier. A perspective would be to consider seasonal parameters

values in order to reduce the uncertainty regarding direct and delayed runoff generation, but data to validate englacial storage and glacier outflows are currently not available, making it very difficult to adapt the parameter values to the study area.

Another limitation of our model lies in the application of a uniform reduction factor for ice melt under debris covered glaciers. ~~Figure ??b~~ Table B2 shows the sensitivity of the model to the ice melt reduction factor on debris covered glaciers (sim.1 and 2). When the reduction factor varies between 0.3 and 0.5, the simulated annual outflow is modified by $\pm 7\%$ and the mean ice melt flow component ranges from 42 to 50 %. ~~This shows that the results are sensitive to the representation of the debris cover in the model.~~ In order to have a more realistic representation of the debris, the reduction factor could be spatially distributed, at least following elevation or slope exposition, and eventually taken as time-variant. As an example, Ragettli et al. (2015) considered a distributed debris thickness in their glacio-hydrological model and obtained a mean reduction of ice melt under debris of 84 %.

We also tested the model sensitivity with respect to the avalanche parameters by changing the values of the thresholds for the slope (35, 40, and 45 °) and the snow height (15, 30 and 60 cm) for steep terrains and for the snow water equivalent difference between two neighboring cells (25, 50, and 100 cm) in case of a flat terrain (Tables B2 and B1 sim. 12 to 27). ~~In total, 11 combinations of these parameters were tested.~~ The results confirmed that higher thresholds for triggering avalanches and their propagation ~~led lead~~ to less accumulation on the downslope parts of the glaciers and, thus, to more overall ice melt. Nevertheless, the results also show that the simulated outflow is not very sensitive to the avalanche parameterization since we derived a variation of 3 % of the mean annual outflow. However, the modification of the avalanche parameters leads to an uncertainty of 12 % on the estimation of the ice melt and snow melt components: the simulated contribution of ice melt to the water input varied between 46 and 52 % and the contribution of snow melt varied from 36 to 41 %.

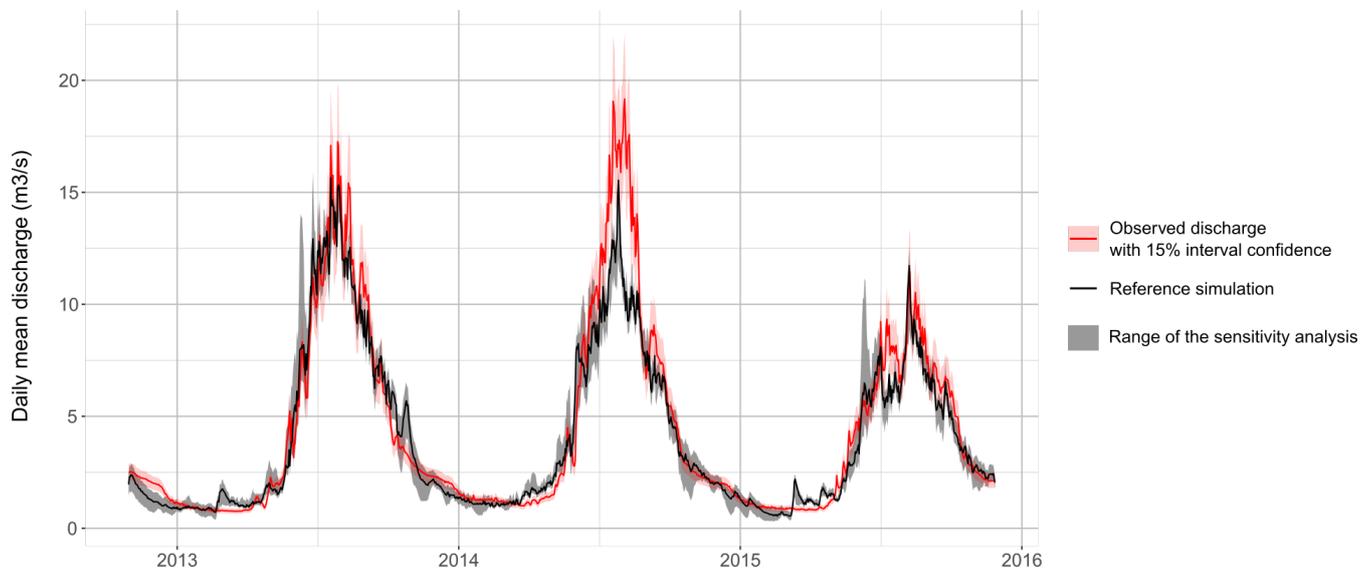


Figure 16. Annual discharges and flow components Sensitivity of the simulated with daily discharge to different parameter values related to cryospheric processes. Black line represents the reference simulation (configuration v3 with a) three different soil depths under glaciers (1-m, 2-m, and 5-m) (definition 2), b) three different values for grey area shows the debris-covered ice melt reduction factor range (0.3, 0.4, minimum and 0.5 maximum values) of the 27 simulations with changing parameters (definition see Table 1B1), and observed discharges are represented in red.

5.3.3 Validation and forcing data uncertainties

A main issue is related to the availability of data for validating the glacio-hydrological modelling parameterizations and outputs.

5 The lack of in-situ measurements at high elevations and the uncertainty related to the available data prevent from assessing the performance of the model in simulating the different cryospheric processes we consider. They only allow to evaluate integrated variables such as the annual glacier mass balance, the seasonal snow cover area dynamics and the outflow at the catchment outlet with significant uncertainties that impact the estimation of the different flow components. For instance, concerning the validation of the simulated glacier mass balances, only the order of magnitude of the simulated and geodetic mass balances used

10 in this study can be compared because the considered areas are not the same in the different studies and the considered time periods differ as well. Indeed, four of the geodetic mass balances were derived for the Khumbu-Changri glacier, while mass balances from this study and from Brun et al. (2017) represent the mean mass balance for all glaciers located in the Pheriche basin. Moreover, the mean annual glacier mass balance is estimated here for the three simulated years (2012-2015), whereas the geodetic mass balances correspond to longer (5 to 15 years) as well as earlier periods beginning between 1999 and 2002

15 (see Fig. 10) and do not take into account the inter-annual variability of the glacier mass balances. Nevertheless, on Figure 10, the variability of the simulated glacier mass balances is much larger than the variability of the geodetic mass balances, showing the significant impact of the snow and glacier parameterization on the simulation results. It is also worth noting that the snow

cover distribution evaluation is particularly challenging on the Pheriche catchment, as clouds cover more than 50 % of the catchment during more than 150 days per year on average (and almost all the time during the monsoon season).

20 Finally, a major source of uncertainty lies in the lack of meteorological data at high elevation (because of the inaccessibility on the terrain) and in the measurement errors when observations are available, due to extreme meteorological conditions. ~~Indeed, precipitation is known to be underestimated due to the difficulty of measuring solid precipitation with rain gauges (Wolff et al., 2015). Precipitation fields provided by different atmospheric models and satellites show also high discrepancies in this region of the Himalayas (Andermann et al., 2011; Palazzi et al., 2013; Ceglar et al., 2017): a perspective of this study is~~
25 ~~to test the~~ In Mimeau et al. (2019), we tested the sensitivity of the model to different precipitation forcing data sets (in-situ, reanalysis, and satellite) and analyze the impact of different precipitation amounts and spatial distributions on the simulated discharges and flow components.

6 Conclusions

In this study we used a distributed physically-based glacio-hydrological model (DHSVM-GDM) to simulate the outflow of
30 a small catchment in the Everest region and to estimate the different contributions to streamflows, which can be useful for water resources and water-related risks management. ~~Some improvements on the cryospheric processes parameterization in DHSVM-GDM were proposed~~ Different parameterizations of the snow and glacier processes in the model were compared in order to ~~better represent the snowcover dynamics, the ice melt under debris-covered glaciers, and avalanches.~~ evaluate the uncertainty related to the representation of cryospheric processes on the simulated water balance. Simulated SCA were compared with MODIS images and calculated glacier mass balances with local in situ and geodetic measurements.

Results showed that the representation of the cryospheric processes in the model has a significant impact on the simulated outflow and flow components. ~~Despite some outstanding issues that have been discussed, we can argue that the most~~
5 ~~satisfactory snow and glacier parameterizations proposed in this study (model configuration v3) enabled to simulate the snow cover spatial distribution and the glacier mass balance more accurately than the original version of DHSVM-GDM, by increasing the glacier accumulation and reducing ice melt. and that the improvement of one processes parameterization does not necessarily improve the overall simulation.~~ Major contributions from glaciers and snow to the outflow were found, with 46 % of the annual water input produced by ice melt and 41 % by snow melt in the control simulation v3. Winter flows are mainly controlled by the release of englacial and soil water storage (up to 78 % in December in the control simulation v3), which corroborates other studies (Racoviteanu et al., 2013; Ragetti et al., 2015). ~~We~~ These results are sensitive to both the
5 chosen cryospheric parameterizations (v0 to v3 set-ups) and their relative parameter values (27 simulations added to the control v3), in a similar order of magnitude. For instance, we estimate an uncertainty related to the ice melt reduction factor by debris (ranging from 0.3 to 0.5) of $pm \pm 0.14$ m w.e.yr⁻¹ for the annual glacier mass balance and $pm \pm 7$ % for the annual outflow. Given the different tested parameter values, the uncertainty on the annual ice melt and the snow melt contributions ranges from -8 % to +17 % and from -17 % to +7 % with respect to the control contributions, respectively. When looking closely to the glacier contributions, these range from -23 to +38 % and from -20 to +14 % for the direct and delayed contributions.

respectively. Finally, The glacier inventories used to outline the glacierized areas have also an important impact on the simulation results. The three inventories tested in this study give estimations of the glacierized area ranging from 26 to 43 % of the basin area and a corresponding uncertainty of 20 % for the ice melt production.

- 5 This study also reminds that glacial and snow contributions to the streamflow must be clearly defined, as considering glacial contribution as the total outflow from the glacierized area or as outflow produced by ice melt can lead to very different estimations.

Appendix A: Parameter values used in DHSVM-GDM

Name	Unit	Value(s)	Reference
Ground Roughness	m	0.04	Brutsaert (2005)
Reference Height	m	2	-
LAI Multiplier for rain interception	-	0.0005	Brutsaert (2005)
LAI Multiplier for snow interception	-	0.00005	Andreadis et al. (2009)
Tree Height	m	2	-
Vegetation Density	-	0.25	-
Distance from bank to canopy	m	2	-
Snow			
Snow Roughness	m	0.001	Brock et al. (2006)
Rain Threshold	°C	0	L'hôte et al. (2005)
Snow Threshold	°C	2	L'hôte et al. (2005)
Snow Water Capacity	-	0.05	Singh (2001)
Minimum Intercepted snow	m	0.005	-
Maximum Snow Albedo	-	0.85	MODImLab
Glaciers			
Glacier Albedo	-	0.3	MODImLab
Melt coefficient for debris-covered glacier	-	0.4	Vincent et al. (2016)

Table A1. Global parameter values used for the glacio-hydrological simulation with DHSVM-GDM

Name	Unit	Value(s)	Reference
Soil type -Type	-	Regosol <u>Soil (Regosol)</u>	
<u>Number of Soil Layers</u>	<u>~</u>	<u>3</u>	<u>~</u>
<u>Soil</u> Lateral Conductivity	m/s	0.0053	Clapp and Hornberger (1978)
<u>Soil</u> Exponential Decrease	-	2	Niu et al. (2005)
<u>Soil</u> Depth Threshold	m	10	-
<u>Soil</u> Capillary Drive	-	0.0756	Morel-Seytoux and Nimmo (1999)
<u>Soil</u> Maximum Infiltration	m/s	6.94E-06	FAO
<u>Soil</u> Surface Albedo	-	0.35	ModimLab
Number of Soil Layers 3 <u>Soil</u> Porosity	-	0.6	calibrated
<u>Soil</u> Pore Size Distribution	-	0.43	Rawls et al. (1982)
<u>Soil</u> Bubbling Pressure	-	0.302	Rawls et al. (1982)
<u>Soil</u> Field Capacity	-	0.31	Meyer et al. (1997)
<u>Soil</u> Wilting Point	-	0.23	Meyer et al. (1997)
<u>Soil</u> Vertical Conductivity	m/s	5.30E-05	Clapp and Hornberger (1978)
<u>Soil</u> Thermal Conductivity layer 1	W/m.°C	7.114	Burns (2012)
<u>Soil</u> Thermal Conductivity layer 2 et 3	W/m.°C	6.923	Burns (2012)
<u>Soil</u> Thermal Capacity	J/m3.°C	1.40E+06	Burns (2012)
<u>Number of Glacier Layers</u>	<u>~</u>	<u>1</u>	<u>~</u>
<u>Glacier</u> Lateral Conductivity	<u>m/s</u>	<u>0.0003</u>	<u>calibrated</u>
<u>Glacier</u> Vertical Conductivity	<u>m/s</u>	<u>0.0003</u>	<u>calibrated</u>
<u>Glacier</u> Porosity	<u>~</u>	<u>0.8</u>	<u>calibrated</u>

Table A2. Soil and glacier parameter values used for the glacio-hydrological simulation with DHSVM-GDM. ~~Under glaciers, the values of the vertical and lateral conductivities were adjusted to 0.0003 m/s and the porosity value to 0.8.~~

Name	Unit	Value(s)				Reference
Vegetation type	-	Shrubland	Grassland	Agriculture	Bare	
Overstory Present	-	FALSE	FALSE	FALSE	FALSE	-
Understory Present	-	TRUE	TRUE	TRUE	TRUE	-
Impervious Fraction	-	0	0	0	0	-
Height	m	1	0.3	1	0.15	-
Maximum Resistance	s/m	600	600	600	600	Wigmosta et al. (1994)
Minimum Resistance	s/m	200	200	120	120	Wigmosta et al. (1994)
Moisture Threshold	-	0.6	0.6	0.33	0.8	calibrated
Vapor Pressure Deficit	Pa	2880	2880	4000	2000	Wigmosta et al. (1994)
Rpc	-	10	10	10	10	Dickinson et al. (1991)
Number of Root Zones	-	3	3	3	3	-
Root Zone Depths 1	m	0.06	0.1	0.06	0.045	-
Root Zone Depths 2	m	0.13	0.05	0.13	0.025	-
Root Zone Depths 3	m	0.2	0.05	0.2	0.025	-
Understory Root Fraction 1	-	0.4	0.4	0.4	0.4	-
Understory Root Fraction 2	-	0.6	0.6	0.6	0.6	-
Understory Root Fraction 3	-	0	0	0	0	-
Understory Monthly LAI	-	5.0 5.0 5.0	0.8 0.9 1.0	3.0 3.0 3.0	1.0 1.0 1.0	Wigmosta et al. (1994)
		5.0 5.0 5.0	1.1 1.8 3.7	3.0 3.0 3.0	1.0 1.0 1.0	
		5.0 5.0 5.0	4.8 4.2 2.0	3.0 3.0 3.0	1.0 1.0 1.0	
		5.0 5.0 5.0	1.2 1.0 0.9	3.0 3.0 3.0	1.0 1.0 1.0	
Understory Albedo	-	0.2	0.1	0.2	0.2	Wigmosta et al. (1994)

Table A3. Vegetation parameter values used for the glacio-hydrological simulation with DHSVM-GDM.

Appendix B: Sensitivity analysis

N°	Debris cov. gl. factor	Soil depth	Glacier porous layer			Avalanches			
			Depth	por	Ks	Hlim	slope	ΔH	Tr
			(m)	(-)	(10^{-4} m/s)	(cm)	(°)	(cm)	(%)
<u>Ref</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	<u>30</u>	<u>35</u>	<u>50</u>	<u>95</u>
<u>1</u>	0.3	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	<u>30</u>	<u>35</u>	<u>50</u>	<u>95</u>
<u>2</u>	0.5	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	<u>30</u>	<u>35</u>	<u>50</u>	<u>95</u>
<u>3</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	1	<u>0.8</u>	<u>3</u>	<u>30</u>	<u>35</u>	<u>50</u>	<u>95</u>
<u>4</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	5	<u>0.8</u>	<u>3</u>	<u>30</u>	<u>35</u>	<u>50</u>	<u>95</u>
<u>5</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	0.4	<u>3</u>	<u>30</u>	<u>35</u>	<u>50</u>	<u>95</u>
<u>6</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	0.6	<u>3</u>	<u>30</u>	<u>35</u>	<u>50</u>	<u>95</u>
<u>7</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	1	<u>3</u>	<u>30</u>	<u>35</u>	<u>50</u>	<u>95</u>
<u>8</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	1	<u>30</u>	<u>35</u>	<u>50</u>	<u>95</u>
<u>9</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	1.5	<u>30</u>	<u>35</u>	<u>50</u>	<u>95</u>
<u>10</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	4.5	<u>30</u>	<u>35</u>	<u>50</u>	<u>95</u>
<u>11</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	10	<u>30</u>	<u>35</u>	<u>50</u>	<u>95</u>
<u>12</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	15	<u>35</u>	<u>50</u>	<u>95</u>
<u>13</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	15	40	<u>50</u>	<u>95</u>
<u>14</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	15	45	<u>50</u>	<u>95</u>
<u>15</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	<u>30</u>	40	<u>50</u>	<u>95</u>
<u>16</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	<u>30</u>	45	<u>50</u>	<u>95</u>
<u>17</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	60	<u>35</u>	<u>50</u>	<u>95</u>
<u>18</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	60	40	<u>50</u>	<u>95</u>
<u>19</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	60	45	<u>50</u>	<u>95</u>
<u>20</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	<u>30</u>	<u>35</u>	25	50
<u>21</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	<u>30</u>	<u>35</u>	25	75
<u>22</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	<u>30</u>	<u>35</u>	25	<u>95</u>
<u>23</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	<u>30</u>	<u>35</u>	<u>50</u>	50
<u>24</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	<u>30</u>	<u>35</u>	<u>50</u>	75
<u>25</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	<u>30</u>	<u>35</u>	100	50
<u>26</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	<u>30</u>	<u>35</u>	100	75
<u>27</u>	<u>0.4</u>	<u>0.5 - 1.0</u>	<u>2</u>	<u>0.8</u>	<u>3</u>	<u>30</u>	<u>35</u>	100	<u>95</u>

Table B1. Parameter values used for the sensitivity analysis. First line corresponds to the reference simulation (configuration v3) and simulations 1 to 27 refer to the sensitivity analysis simulations (parameters different from the reference simulation are highlighted).

N°	NSE	Contributions Definition 1 (%)				Contributions Definition 2 (%)			
		<u>Net Rainfall</u>	<u>Snow Melt</u>	<u>Ice Melt</u>	<u>Soil</u>	<u>Direct Runoff</u>	<u>Snow</u>	<u>Direct glacier</u>	<u>Delayed glacier</u>
Ref	0.91	13	41	46	24	2	6	26	43
1	0.88	14	44	42	26	2	6	24	42
2	0.92	12	39	49	23	2	5	28	43
3	0.88	13	41	46	24	2	6	34	34
4	0.88	13	41	46	24	2	6	20	49
5	0.84	13	40	47	24	2	5	28	42
6	0.89	13	40	47	24	2	5	27	43
7	0.9	13	40	47	24	2	5	26	44
8	0.89	13	40	47	24	2	5	36	34
9	0.9	13	40	47	24	2	5	32	38
10	0.9	13	40	47	24	2	5	24	46
11	0.89	13	40	47	24	2	5	21	49
12	0.91	13	40	47	24	2	5	26	44
13	0.91	13	40	47	24	2	5	26	43
14	0.9	13	39	48	24	2	5	26	43
15	0.9	13	40	47	24	2	5	26	43
16	0.9	13	39	48	24	2	5	27	43
17	0.9	13	40	47	24	2	5	26	43
18	0.9	13	39	48	24	2	5	26	43
19	0.9	13	38	48	24	2	5	27	43
20	0.9	13	37	50	24	2	5	26	43
21	0.9	13	39	48	24	2	5	26	43
22	0.91	13	41	46	24	2	6	26	43
23	0.9	13	35	52	24	1	5	27	44
24	0.9	13	36	51	24	1	5	26	44
25	0.9	13	34	54	23	1	5	27	44
26	0.9	13	35	53	23	1	5	27	44
27	0.9	13	36	51	23	2	5	27	44

Table B2. Nash coefficient (NSE) of simulated daily discharge and relative contributions to annual outflow (definitions 1 and 2) for the 27 sensitivity analysis simulations.

10 *Competing interests.* The authors declare that they have no conflict of interest.

Acknowledgements. This work has been supported by the French National Research Agency (ANR) through the ANR-13-SENV-0005-04/05-PRESHINE project and by a grant from Labex OSUG@2020 (investissement d'avenir, ANR 10 LABX56). It has benefited of data from the French Service d'Observation GLACIOCLIM (<https://glacioclim.osug.fr/>) and from Ev-K2-CNR (www.ev2cnr.org). The DHSVM-GDM model was made available by Chris Frans (Department of Civil and Environmental Engineering, University of Washington).

15 The works of Yves Lejeune (CNRM-GAME) for correcting precipitation data in the GLACIOCLIM database and Ahmed Alatrash for processing MODIS data have been particularly helpful. Authors had fruitful discussions with ~~Pierre Chevalier, Francois Delelaux, Thomas Condom (IGE), Pierre Chevalier, Francois Delclaux,~~ Luc Neppel and Judith Eeckman (HSM). Authors also acknowledge B. Schaeffi, M. Weiler and a third anonymous reviewer for their comments and suggestions that significantly improved the this paper content.

References

- 20 Akhtar, M., Ahmad, N., and Booij, M.: The impact of climate change on the water resources of Hindukush–Karakorum–Himalaya region under different glacier coverage scenarios, *Journal of hydrology*, 355, 148–163, 2008.
- Andermann, C., Bonnet, S., and Gloaguen, R.: Evaluation of precipitation data sets along the Himalayan front, *Geochemistry, Geophysics, Geosystems*, 12, 2011.
- Andermann, C., Longuevergne, L., Bonnet, S., Crave, A., Davy, P., and Gloaguen, R.: Impact of transient groundwater storage on the
25 discharge of Himalayan rivers, *Nature Geoscience*, 5, 127, 2012.
- Andreadis, K. M., Storck, P., and Lettenmaier, D. P.: Modeling snow accumulation and ablation processes in forested environments, *Water Resources Research*, 45, 2009.
- Bajracharya, B., Uddin, K., Chettri, N., Shrestha, B., and Siddiqui, S. A.: Understanding land cover change using a harmonized classification system in the Himalaya: a case study from Sagarmatha National Park, Nepal, *Mountain Research and Development*, 30, 143–156, 2010.
- 30 Bajracharya, S. R.: Glacier status in Nepal and decadal change from 1980 to 2010 based on Landsat data, *International Centre for Integrated Mountain Development*, 2014.
- Beckers, J. and Alila, Y.: A model of rapid preferential hillslope runoff contributions to peak flow generation in a temperate rain forest watershed, *Water Resources Research*, 40, 2004.
- Benn, D., Bolch, T., Hands, K., Gulley, J., Luckman, A., Nicholson, L., Quincey, D., Thompson, S., Toumi, R., and Wiseman, S.: Response
35 of debris-covered glaciers in the Mount Everest region to recent warming, and implications for outburst flood hazards, *Earth-Science Reviews*, 114, 156–174, 2012.
- Benn, D. I., Thompson, S., Gulley, J., Mertes, J., Luckman, A., and Nicholson, L.: Structure and evolution of the drainage system of a Himalayan debris-covered glacier, and its relationship with patterns of mass loss, *The Cryosphere*, 11, 2247, 2017.
- Berghuijs, W., Woods, R., and Hrachowitz, M.: A precipitation shift from snow towards rain leads to a decrease in streamflow, *Nature Climate Change*, 4, 583, 2014.
- Bewley, D., Alila, Y., and Varhola, A.: Variability of snow water equivalent and snow energetics across a large catchment subject to Mountain
5 Pine Beetle infestation and rapid salvage logging, *Journal of Hydrology*, 388, 464–479, 2010.
- Bhambri, R., Bolch, T., Chaujar, R. K., and Kulshreshtha, S. C.: Glacier changes in the Garhwal Himalaya, India, from 1968 to 2006 based on remote sensing, *Journal of Glaciology*, 57, 543–556, 2011.
- Bolch, T., Kulkarni, A., Kääb, A., Huggel, C., Paul, F., Cogley, J. G., Frey, H., Kargel, J. S., Fujita, K., Scheel, M., et al.: The state and fate of Himalayan glaciers, *Science*, 336, 310–314, 2012.
- 10 Bookhagen, B. and Burbank, D. W.: Topography, relief, and TRMM-derived rainfall variations along the Himalaya, *Geophysical Research Letters*, 33, 2006.
- Brock, B. W., Willis, I. C., and Sharp, M. J.: Measurement and parameterization of aerodynamic roughness length variations at Haut Glacier d’Arolla, Switzerland, *Journal of Glaciology*, 52, 281–297, 2006.
- Brun, F., Berthier, E., Wagnon, P., Kääb, A., and Treichler, D.: A spatially resolved estimate of High Mountain Asia glacier mass balances
15 from 2000 to 2016, *Nature Geoscience*, 2017.
- Brutsaert, W.: *Hydrology: an introduction*, Cambridge University Press, 2005.
- Burns, P. J.: Glacier change in a basin of the Peruvian Andes and implications for water resources, Ph.D. thesis, Oregon State University, 2012.

- Ceglar, A., Toreti, A., Balsamo, G., and Kobayashi, S.: Precipitation over Monsoon Asia: A Comparison of Reanalyses and Observations, *Journal of Climate*, 30, 465–476, 2017.
- Chen, Y., Li, W., Fang, G., and Li, Z.: Hydrological modeling in glacierized catchments of central Asia-status and challenges, *Hydrology and Earth System Sciences*, 21, 669, 2017.
- Clapp, R. B. and Hornberger, G. M.: Empirical equations for some soil hydraulic properties, *Water resources research*, 14, 601–604, 1978.
- Cogley, J. G.: A more complete version of the World Glacier Inventory, *Annals of Glaciology*, 50, 32–38, 2009.
- 25 Cristea, N. C., Lundquist, J. D., Loheide, S. P., Lowry, C. S., and Moore, C. E.: Modelling how vegetation cover affects climate change impacts on streamflow timing and magnitude in the snowmelt-dominated upper Tuolumne Basin, Sierra Nevada, *Hydrological processes*, 28, 3896–3918, 2014.
- Dickinson, R. E., Henderson-Sellers, A., Rosenzweig, C., and Sellers, P. J.: Evapotranspiration models with canopy resistance for use in climate models, a review, *Agricultural and Forest Meteorology*, 54, 373–388, 1991.
- 30 Dijkshoorn, K. and Huting, J.: Soil and Terrain database for Nepal, 2009.
- Douville, H., Royer, J.-F., and Mahfouf, J.-F.: A new snow parameterization for the Meteo-France climate model, *Climate Dynamics*, 12, 21–35, 1995.
- Flowers, G. E. and Clarke, G. K.: A multicomponent coupled model of glacier hydrology 2. Application to Trapridge Glacier, Yukon, Canada, *Journal of Geophysical Research: Solid Earth*, 107, 2002.
- 35 Frans, C., Istanbuluoglu, E., Lettenmaier, D. P., Naz, B. S., Clarke, G. K., Condom, T., Burns, P., and Nolin, A. W.: Predicting glacio-hydrologic change in the headwaters of the Zongo River, Cordillera Real, Bolivia, *Water Resources Research*, 51, 9029–9052, 2015.
- Frey, S. and Holzmann, H.: A conceptual, distributed snow redistribution model, *Hydrology and Earth System Sciences*, 19, 4517, 2015.
- Fujita, K., Inoue, H., Izumi, T., Yamaguchi, S., Sadakane, A., Sunako, S., Nishimura, K., Immerzeel, W. W., Shea, J. M., Kayastha, R. B., et al.: Anomalous winter-snow-amplified earthquake-induced disaster of the 2015 Langtang avalanche in Nepal, *Natural Hazards and Earth System Sciences*, 17, 749, 2017.
- Gardelle, J., Berthier, E., Arnaud, Y., and Kaab, A.: Region-wide glacier mass balances over the Pamir-Karakoram-Himalaya during 1999–2011 (vol 7, pg 1263, 2013), *Cryosphere*, 7, 1885–1886, 2013.
- 5 Gulley, J., Benn, D., Screatton, E., and Martin, J.: Mechanisms of englacial conduit formation and their implications for subglacial recharge, *Quaternary Science Reviews*, 28, 1984–1999, 2009.
- Gupta, H. V., Kling, H., Yilmaz, K. K., and Martinez, G. F.: Decomposition of the mean squared error and NSE performance criteria: Implications for improving hydrological modelling, *Journal of Hydrology*, 377, 80–91, 2009.
- 10 Haerberli, W. and Hölzle, M.: Application of inventory data for estimating characteristics of and regional climate-change effects on mountain glaciers: a pilot study with the European Alps, *Annals of glaciology*, 21, 206–212, 1995.
- Immerzeel, W. W., Van Beek, L. P., and Bierkens, M. F.: Climate change will affect the Asian water towers, *Science*, 328, 1382–1385, 2010.
- Immerzeel, W. W., Van Beek, L., Konz, M., Shrestha, A., and Bierkens, M.: Hydrological response to climate change in a glacierized catchment in the Himalayas, *Climatic change*, 110, 721–736, 2012.
- 15 Irvine-Fynn, T. D., Porter, P. R., Rowan, A. V., Quincey, D. J., Gibson, M. J., Bridge, J. W., Watson, C. S., Hubbard, A., and Glasser, N. F.: Supraglacial ponds regulate runoff from Himalayan debris-covered glaciers, *Geophysical Research Letters*, 2017.
- Kääb, A., Treichler, D., Nuth, C., and Berthier, E.: Brief Communication: Contending estimates of 2003–2008 glacier mass balance over the Pamir–Karakoram–Himalaya, *The Cryosphere*, 9, 557–564, 2015.

- Kaser, G., Großhauser, M., and Marzeion, B.: Contribution potential of glaciers to water availability in different climate regimes, *Proceedings of the National Academy of Sciences*, 107, 20 223–20 227, 2010.
- King, O., Quincey, D. J., Carrivick, J. L., and Rowan, A. V.: Spatial variability in mass change of glaciers in the Everest region, central Himalaya, between 2000 and 2015, *The Cryosphere Discussions*, pp. 1–35, 2016.
- Konz, M., Uhlenbrook, S., Braun, L., Shrestha, A., and Demuth, S.: Implementation of a process-based catchment model in a poorly gauged, highly glacierized Himalayan headwater, *Hydrology and Earth System Sciences Discussions*, 11, 1323–1339, 2007.
- 25 Kraaijenbrink, P., Bierkens, M., Lutz, A., and Immerzeel, W.: Impact of a global temperature rise of 1.5 degrees Celsius on Asia's glaciers, *Nature*, 549, 257–260, 2017.
- Lejeune, Y., Bouilloud, L., Etchevers, P., Wagnon, P., Chevallier, P., Sicart, J.-E., Martin, E., and Habets, F.: Melting of snow cover in a tropical mountain environment in Bolivia: Processes and modeling, *Journal of Hydrometeorology*, 8, 922–937, 2007.
- Leung, L., Wigmosta, M., Ghan, S., Epstein, D., and Vail, L.: Application of a subgrid orographic precipitation/surface hydrology scheme to a mountain watershed, *Journal of Geophysical Research: Atmospheres*, 101, 12 803–12 817, 1996.
- 30 Leung, L. R. and Wigmosta, M. S.: Potential climate change impacts on mountain watersheds in the Pacific Northwest, *JAWRA Journal of the American Water Resources Association*, 35, 1463–1471, 1999.
- L'hôte, Y., Chevallier, P., Coudrain, A., Lejeune, Y., and Etchevers, P.: Relationship between precipitation phase and air temperature: comparison between the Bolivian Andes and the Swiss Alps/Relation entre phase de précipitation et température de l'air: comparaison entre les Andes Boliviennes et les Alpes Suisses, *Hydrological Sciences Journal*, 50, 2005.
- 35 Lutz, A., Immerzeel, W., Shrestha, A., and Bierkens, M.: Consistent increase in High Asia's runoff due to increasing glacier melt and precipitation, *Nature Climate Change*, 4, 587–592, 2014.
- McDowell, G., Ford, J. D., Lehner, B., Berrang-Ford, L., and Sherpa, A.: Climate-related hydrological change and human vulnerability in remote mountain regions: a case study from Khumbu, Nepal, *Regional Environmental Change*, 13, 299–310, 2013.
- Meyer, P., Rockhold, M., and Gee, G.: Uncertainty analyses of infiltration and subsurface flow and transport for SDMP sites, Tech. rep., Nuclear Regulatory Commission, Washington, DC (United States). Div. of Regulatory Applications; Pacific Northwest National Lab., Richland, WA (United States), 1997.
- 5 Mimeau, L., Esteves, M., Jacobi, H.-W., and Zin, I.: Evaluation of gridded and in-situ precipitation datasets on modeled glacio-hydrologic response of a small glacierized Himalayan catchment, *Journal of Hydrometeorology*, 20(6), 1103–1121, 2019.
- Morel-Seytoux, H. J. and Nimmo, J. R.: Soil water retention and maximum capillary drive from saturation to oven dryness, *Water resources research*, 35, 2031–2041, 1999.
- Nash, J. E. and Sutcliffe, J. V.: River flow forecasting through conceptual models part I—A discussion of principles, *Journal of hydrology*, 10, 282–290, 1970.
- 10 Naz, B. S., Frans, C., Clarke, G., Burns, P., and Lettenmaier, D.: Modeling the effect of glacier recession on streamflow response using a coupled glacio-hydrological model, *Hydrology and Earth System Sciences*, 18, 787–802, 2014.
- Nepal, S.: Impacts of climate change on the hydrological regime of the Koshi river basin in the Himalayan region, *Journal of Hydro-environment Research*, 10, 76–89, 2016.
- 15 Nepal, S., Krause, P., Flügel, W.-A., Fink, M., and Fischer, C.: Understanding the hydrological system dynamics of a glaciated alpine catchment in the Himalayan region using the J2000 hydrological model, *Hydrological Processes*, 28, 1329–1344, 2014.
- Nijssen, B., Haddeland, I., and Lettenmaier, D. P.: Point evaluation of a surface hydrology model for BOREAS, *Journal of Geophysical Research: Atmospheres*, 102, 29 367–29 378, 1997.

- Niu, G.-Y., Yang, Z.-L., Dickinson, R. E., and Gulden, L. E.: A simple TOPMODEL-based runoff parameterization (SIMTOP) for use in
20 global climate models, *Journal of Geophysical Research: Atmospheres*, 110, 2005.
- Nuimura, T., Sakai, A., Taniguchi, K., Nagai, H., Lamsal, D., Tsutaki, S., Kozawa, A., Hoshina, Y., Takenaka, S., Omiya, S., et al.: The
GAMDAM glacier inventory: a quality-controlled inventory of Asian glaciers, *The Cryosphere*, 9, 849–864, 2015.
- Østrem, G.: Ice melting under a thin layer of moraine, and the existence of ice cores in moraine ridges, *Geografiska Annaler*, 41, 228–230,
1959.
- 25 Palazzi, E., Hardenberg, J. v., and Provenzale, A.: Precipitation in the Hindu-Kush Karakoram Himalaya: Observations and future scenarios,
Journal of Geophysical Research: Atmospheres, 118, 85–100, 2013.
- Paul, F., Kääb, A., Rott, H., Shepherd, A., Strozzi, T., Volden, E., et al.: GlobGlacier: a new ESA project to map the world’s glaciers and ice
caps from space, *EARSeL eProceedings*, 8, 11–25, 2009.
- Paul, F., Barrand, N. E., Baumann, S., Berthier, E., Bolch, T., Casey, K., Frey, H., Joshi, S., Kononov, V., Bris, R. L., et al.: On the accuracy
30 of glacier outlines derived from remote-sensing data, *Annals of Glaciology*, 54, 171–182, 2013.
- Pfeffer, W. T., Arendt, A. A., Bliss, A., Bolch, T., Cogley, J. G., Gardner, A. S., Hagen, J.-O., Hock, R., Kaser, G., Kienholz, C., et al.: The
Randolph Glacier Inventory: a globally complete inventory of glaciers, *Journal of Glaciology*, 60, 537–552, 2014.
- Pritchard, H. D.: Asia’s glaciers are a regionally important buffer against drought, *Nature*, 545, 169–174, 2017.
- Racoviteanu, A. E., Armstrong, R., and Williams, M. W.: Evaluation of an ice ablation model to estimate the contribution of melting glacier
35 ice to annual discharge in the Nepal Himalaya, *Water Resources Research*, 49, 5117–5133, 2013.
- Radić, V. and Hock, R.: Glaciers in the Earth’s hydrological cycle: assessments of glacier mass and runoff changes on global and regional
scales, *Surveys in geophysics*, 35, 813–837, 2014.
- Ragettli, S., Pellicciotti, F., Immerzeel, W., Miles, E., Petersen, L., Heynen, M., Shea, J., Stumm, D., Joshi, S., and Shrestha, A.: Unraveling
the hydrology of a Himalayan catchment through integration of high resolution in situ data and remote sensing with an advanced simulation
model, *Advances in Water Resources*, 78, 94–111, 2015.
- Rawls, W. J., Brakensiek, D., and Saxton, K.: Estimation of soil water properties, *Transactions of the ASAE*, 25, 1316–1320, 1982.
- 5 Rees, H. G. and Collins, D. N.: Regional differences in response of flow in glacier-fed Himalayan rivers to climatic warming, *Hydrological
processes*, 20, 2157–2169, 2006.
- Robson, B. A., Nuth, C., Dahl, S. O., Hölbling, D., Strozzi, T., and Nielsen, P. R.: Automated classification of debris-covered glaciers
combining optical, SAR and topographic data in an object-based environment, *Remote Sensing of Environment*, 170, 372–387, 2015.
- Rowan, A. V., Egholm, D. L., Quincey, D. J., and Glasser, N. F.: Modelling the feedbacks between mass balance, ice flow and debris transport
10 to predict the response to climate change of debris-covered glaciers in the Himalaya, *Earth and Planetary Science Letters*, 430, 427–438,
2015.
- Savéan, M., Delclaux, F., Chevallier, P., Wagnon, P., Gonga-Saholiariliva, N., Sharma, R., Neppel, L., and Arnaud, Y.: Water budget on the
Dudh Koshi River (Nepal): uncertainties on precipitation, *Journal of Hydrology*, 531, 850–862, 2015.
- Shea, J., Immerzeel, W., Wagnon, P., Vincent, C., and Bajracharya, S.: Modelling glacier change in the Everest region, Nepal Himalaya, *The
15 Cryosphere*, 9, 1105–1128, 2015.
- Sherpa, S. F., Wagnon, P., Brun, F., Berthier, E., Vincent, C., Lejeune, Y., Arnaud, Y., Kayastha, R. B., and Sinisalo, A.: Contrasted surface
mass balances of debris-free glaciers observed between the southern and the inner parts of the Everest region (2007-15), *Journal of
Glaciology*, pp. 1–15, 2017.

- Shrestha, A. B., Wake, C. P., Dibb, J. E., Mayewski, P. A., et al.: Precipitation fluctuations in the Nepal Himalaya and its vicinity and relationship with some large scale climatological parameters, *International Journal of Climatology*, 20, 317–327, 2000.
- Shukla, A., Gupta, R., and Arora, M.: Estimation of debris cover and its temporal variation using optical satellite sensor data: a case study in Chenab basin, Himalaya, *Journal of Glaciology*, 55, 444–452, 2009.
- Singh, P.: *Snow and glacier hydrology*, vol. 37, Springer Science & Business Media, 2001.
- Singh, S., Kumar, R., Bhardwaj, A., Sam, L., Shekhar, M., Singh, A., Kumar, R., and Gupta, A.: Changing climate and glacio-hydrology in Indian Himalayan Region: a review, *Wiley Interdisciplinary Reviews: Climate Change*, 7, 393–410, 2016.
- Sirguey, P., Mathieu, R., and Arnaud, Y.: Subpixel monitoring of the seasonal snow cover with MODIS at 250 m spatial resolution in the Southern Alps of New Zealand: Methodology and accuracy assessment, *Remote Sensing of Environment*, 113, 160–181, 2009.
- Soncini, A., Bocchiola, D., Confortola, G., Minora, U., Vuillermoz, E., Salerno, F., Viviano, G., Shrestha, D., Senese, A., Smiraglia, C., et al.: Future hydrological regimes and glacier cover in the Everest region: The case study of the upper Dudh Koshi basin, *Science of the Total Environment*, 565, 1084–1101, 2016.
- Vincent, C., Wagon, P., Shea, J. M., Immerzeel, W. W., Kraaijenbrink, P., Shrestha, D., Soruco, A., Arnaud, Y., Brun, F., Berthier, E., and Sherpa, S.: Reduced melt on debris-covered glaciers: investigations from Changri Nup Glacier, Nepal, *The Cryosphere*, 10, 1845, 2016.
- Viviroli, D., Dürr, H. H., Messerli, B., Meybeck, M., and Weingartner, R.: Mountains of the world, water towers for humanity: Typology, mapping, and global significance, *Water resources research*, 43, 2007.
- Wagon, P., Vincent, C., Arnaud, Y., Berthier, E., Vuillermoz, E., Gruber, S., Ménégoz, M., Gilbert, A., Dumont, M., Shea, J., et al.: Seasonal and annual mass balances of Mera and Pokalde glaciers (Nepal Himalaya) since 2007, *The Cryosphere*, 7, 1769–1786, 2013.
- Weiler, M., Seibert, J., and Stahl, K.: Magic components—why quantifying rain, snowmelt, and icemelt in river discharge is not easy, *Hydrological Processes*, 32, 160–166, 2018.
- Westrick, K. J., Storck, P., and Mass, C. F.: Description and evaluation of a hydrometeorological forecast system for mountainous watersheds, *Weather and Forecasting*, 17, 250–262, 2002.
- Whitaker, A., Alila, Y., Beckers, J., and Toews, D.: Application of the distributed hydrology soil vegetation model to Redfish Creek, British Columbia: model evaluation using internal catchment data, *Hydrological processes*, 17, 199–224, 2003.
- Wigmosta, M. S., Vail, L. W., and Lettenmaier, D. P.: A distributed hydrology-vegetation model for complex terrain, *Water resources research*, 30, 1665–1679, 1994.
- Wolff, M., Isaksen, K., Petersen-Øverleir, A., Ødemark, K., Reitan, T., and Brækkan, R.: Derivation of a new continuous adjustment function for correcting wind-induced loss of solid precipitation: results of a Norwegian field study, *Hydrology and Earth System Sciences*, 19, 951–967, 2015.
- Zhao, Q., Liu, Z., Ye, B., Qin, Y., Wei, Z., and Fang, S.: A snowmelt runoff forecasting model coupling WRF and DHSVM, *Hydrology and Earth System Sciences*, 13, 1897–1906, 2009.
- Zhu, Z. and Woodcock, C. E.: Object-based cloud and cloud shadow detection in Landsat imagery, *Remote Sensing of Environment*, 118, 83–94, 2012.