

Detecting dominant changes in irregularly sampled multivariate water quality data sets

Christian Lehr^{1,2}, Ralf Dannowski¹, Thomas Kalettka¹, Christoph Merz^{1,3}, Boris Schröder^{4,5}, Jörg Steidl¹ and Gunnar Lischeid^{1,2}

[1]{Leibniz Centre for Agricultural Landscape Research (ZALF), Müncheberg, Germany}

[2]{University of Potsdam, Institute for Earth and Environmental Sciences, Potsdam, Germany}

[3]{Institute of Geological Sciences, Workgroup Hydrogeology, Freie Universität Berlin, Germany}

[4]{Landscape Ecology and Environmental Systems Analysis, Institute of Geoecology, Technische Universität Braunschweig, Langer Kamp 19c, 38106 Braunschweig, Germany}

[5] {Berlin-Brandenburg Institute of Advanced Biodiversity Research (BBIB), Altensteinstraße 6, 14195 Berlin, Germany}

15 Correspondence to: C. Lehr (lehr@zalf.de)

Abstract

Time series of groundwater and stream water quality often exhibit substantial temporal and spatial variability, whereas typical existing monitoring data sets, e.g. from environmental agencies, are usually characterized by relatively low sampling frequency and irregular sampling in space and / or time. This complicates the differentiation between anthropogenic influence and natural variability as well as the detection of changes in water quality which indicate changes of single drivers. We suggest the new term 'dominant changes' for changes in multivariate water quality data which concern 1) multiple variables, 2) multiple sites and 3) long-term patterns and present an exploratory framework for the detection of such dominant changes in data sets with irregular sampling in space and time. Firstly, a non-linear dimension reduction technique was used to summarize the dominant spatiotemporal dynamics in the multivariate water quality data set in a few components. Those were used to derive hypotheses on the dominant drivers influencing water quality. Secondly, different sampling sites were compared with respect to median component values. Thirdly, time series of the components at single sites were analysed for long-term patterns. We tested the approach with a joint stream water and groundwater data set quality consisting of 1572 samples, each comprising sixteen variables, sampled with a spatially and temporally irregular sampling scheme at 29 sites in northeast Germany from 1998 to 2009. The first four components were interpreted as 1) agriculturally induced enhancement of the natural background level of solute concentration, 2) redox sequence from reducing conditions in deep groundwater to post oxic conditions in shallow groundwater and oxic conditions in stream water, 3) mixing ratio of deep and shallow groundwater to the streamflow and 4) sporadic events of slurry application in the agricultural practice. Dominant changes were observed for the first two components. The changing intensity of the 1st component was interpreted as response to the temporal variability of the thickness of the unsaturated zone. A steady increase of the 2nd component at most stream water sites pointed towards progressing depletion of the denitrification capacity of the deep aquifer.

1 Introduction

Numerous high frequency sampling studies unravelled the high temporal variability
50 of stream water quality (e.g., Kirchner et al., 2004; Cassidy and Jordan, 2011;
Halliday et al., 2012; Neal et al., 2012; Wade et al., 2012; Aubert et al., 2013;
Kirchner and Neal, 2013; Tunaley et al. 2016; Rode et al., 2016; Blaen et al., 2017).
Therefore, monitoring water quantity and quality on the timescale of the hydrological
response of the catchment is a key requirement for understanding water quality
55 dynamics and its driving processes in detail (Kirchner et al., 2004; Neal et al., 2012;
Halliday et al., 2012). While the development of sensor technology, data loggers and
transmission technology hopefully will help to significantly increase the number of
high-frequency monitoring programmes in the future, most of the existing monitoring
programmes so far applied a rather low sampling frequency. Nonetheless, there is
60 common agreement that for short periods with high-frequency data, longer periods of
low-frequency monitoring provide invaluable context (Burt et al., 2011; Neal et al.,
2012; Halliday et al., 2012; Bieroza et al., 2014). This is especially true for existing
long term records which are required as reference to distinguish between natural
short term and long term variability of the observed variables and the assessment of
65 the effects of anthropogenic influence on water quality such as changes in land use
in the catchment (Burt et al., 2008; Howden et al., 2011).

The intriguing temporal and spatial variability in water quality monitoring data sets
can in most cases hardly be related to single causal factors. Instead, a variety of
biogeochemical processes (e.g., Stumm and Morgan, 1996; Neal, 2004; Beudert et
70 al., 2015), climatic (e.g., Neal, 2004) and hydrological (e.g., Molenat et al., 2008)
variability and anthropogenic influences, for example agricultural (e.g., Basu et al.,
2010; Basu et al., 2011; Aubert et al., 2013) or forestal (e.g., Neal, 2004) land use,
land use change (e.g., Scanlon et al., 2007; Raymond et al., 2008) or urbanization
(e.g., Kroeze et al., 2013), interact at different scales impeding identification of clear
75 cause-effect relationships. Usually a single solute is affected by numerous different
drivers at different scales (cf., e.g., Molenat et al., 2008; Lischeid et al., 2010;
Schuetz et al., 2016 for NO_3^-). Inversely, a single driver usually has an impact on
various solutes (Massmann et al., 2004; Lischeid and Bittersohl, 2008). This

suggests that trend analyses of single variables might easily be misleading with
80 respect to the identification of driving factors. For this purpose techniques which are
able to account for the interaction of multiple drivers and observed variables are
preferable.

On the other hand, despite their complexity, catchments are highly constrained
systems. Usually only a few dominant processes determine the main dynamics of
85 stream flow, groundwater head or water quality (Grayson and Blöschl, 2000;
Sivakumar, 2004; Lischeid et al., 2016). Using joint information from different solutes
is an established way to derive hypotheses on processes or other causal factors that
are dominant in the monitored data. For this purpose, dimension reduction
techniques, especially the linear principal component analysis (PCA), have been
90 used in analyses of multivariate water quality data for long, mostly as exploratory tool
for descriptive process identification (e.g., Usunoff and Guzmán-Guzmán, 1989;
Haag and Westrich, 2002; Cloutier et al., 2008) or for determining mixing ratios (e.g.,
Hooper et al., 1990; Capell et al., 2011). If the analysed data consist of time series of
one or several variables observed at different sites, then the temporal features of the
95 results of the dimension reduction can be analysed in a spatially explicit way, e.g.
with respect to seasonal patterns or long term developments at the monitored sites
(Lischeid and Bittersohl, 2008; Lischeid et al., 2010).

However, many of the methods commonly used for analysing temporal
developments in monitoring data sets require regularly sampled data. In practice the
100 spatiotemporal design of sampling campaigns and monitoring networks often evolves
during the sampling period in an irregular way. In order to obtain a regularly sampled
data set, additional information with a different sampling design, e.g. from pilot
studies or single sampling campaigns, might not be utilized in the analysis at all.
Further irregularities in the spatiotemporal structure of environmental monitoring data
105 sets arise typically during the monitoring itself from a variety of reasons such as
failure of sensors or data loggers, measurement errors, loss of samples, periods of
ice or drought, etc.. Thus, in environmental monitoring practice, data sets with gaps
and periods with corrupted measurements are more the rule rather than the
exception (c.f., e.g., Zhang et al., 2018 for river quality data).

110 Lischeid et al. (2010) suggested a combination of exploratory data analysis
methods to detect and analyse dominant processes and their temporal development
in multivariate water quality data sets that is capable of dealing with irregular time
series. We built on that and extended it towards the detection of ‘dominant changes’
in time series of multivariate water quality data that are monitored at different sites,
115 i.e. at different parts of a catchment or in different catchments within a region. In
analogy to the dominant process concept (Grayson and Blöschl, 2000; Sivakumar,
2004), we use the term ‘dominant changes’ in a broad and descriptive sense referring
to systemic changes that clearly exceed the ‘usual’ range of heterogeneities in the
temporal, spatial or inter-variable structure of the observed water quality data. We
120 considered changes as dominant that concerned 1) main components of the
multivariate water quality data set rather than single water quality variables
(multivariate components); 2) behaviour at various sites rather than at single sites
(multiple sites); and 3) long-term behaviour rather than short-term fluctuations or
single events (long-term patterns).

125 To identify the dominant changes, we combined exploratory data analysis methods
for non-linear dimension reduction, spectral analysis, linear and non-linear trend
estimation and monotonic trend test in one exploratory framework. The suggested
approach was tested with a multivariate water quality data set that has been sampled
with a spatially and temporally irregular sampling scheme in northeast Germany from
130 1998 to 2009. In the following, we present and discuss the results of our case study
according to the three aspects of dominant changes: 1) multivariate components, 2)
multiple sites and 3) long-term patterns. We continue with a discussion of 4) effects
of the irregular sampling and 5) methodological aspects of the exploratory framework.

135 **2 Data**

2.1 Study area

The study area is the upper part of the basin of the Ucker river located in the
northeast of Germany, about 90 km north of Berlin, which drains to the Baltic Sea
another 50 km further north. It is part of the Leibniz Centre for Agricultural Landscape

140 Research (ZALF) long-term monitoring region AgroScapeLab Quillow, the LTER-D
(Long Term Ecological Research Network, Germany) and the TERENO (Terrestrial
Environmental Observatories, <http://teodoor.icg.kfa-juelich.de>) Northeastern German
Lowland Observatory. Water samples have been taken in the adjacent catchments of
145 subcatchments Strom (235.8 km²) and Peege (25.6 km²) (Figure 1). At the ZALF
weather station Dedelow, which is situated approximately 500m northeast of Q_97
(Figure 1), a mean annual precipitation of 550 mm and a mean annual temperature of
8.9° C was observed for the hydrological years within the study period (1997-11 to
2009-10). The mean annual climatic water balance for this period, calculated from
150 daily precipitation and potential evapotranspiration, was found to be -103 mm,
exhibiting high interannual variability with -148 mm in the summer half year and +45
mm in the winter half year.

The topography of the region developed basically during the Pomerian stage and
the Mecklenburgian stage of the Weichselian ice age, i.e. 15,200 to 14,100 years
155 before present. Altitude varies from 20 m in the lowlands of the Ucker river to more
than 100 m above sea level in the southwestern part of the study area. During the
Pleistocene, repeated advances and recessions of the ice sheet deposited highly
heterogeneous unconsolidated sediments of about 150 m to 200 m thickness. The
base consists of a thick Oligocene clay layer which separates the upper freshwater
160 groundwater system from saline groundwater underneath. Based on borehole
surveys, up to seven aquifers divided by layers of till have been identified within the
unconsolidated Quaternary sediments. In some parts of the region patches of
halophilious plants are found in the lowlands indicating local upwelling of saline
groundwater from the underlying Tertiary aquifer through windows of the Oligocene
165 clay layer.

Loamy and sandy loamy soils prevail that developed from the till substrate. Most of
the region is intensively used as cropland, although the fraction of arable land differs
between the catchments (Table 1). Forests comprise only a minor fraction of the area
(Table 1). Land cover did not change within the study period from 1998 to 2009. The
170 riparian zone of the catchments is mostly used as grassland, underlain by peat and

organic and sandy fluvial deposits. The hummocky landscape includes about 1300 closed drainage basins and small ponds with an area of the water surface < 1 ha (Kalettka and Rudat, 2006; Lischeid et al., 2016). Many of the larger depressions have been connected by ditches to facilitate drainage. Partly, these ditches have later
175 been replaced by underground pipes for land reclamation. In addition, agricultural soils are extensively drained by subsurface tile drainage systems. From the 13th century till the end of the 19th century, the energy of the natural water courses was also occasionally used to power mills. Today, those mills are not active any longer and have been replaced in most cases by weirs for water management or ramps. For
180 more details on the study site, please see Merz and Steidl (2015).

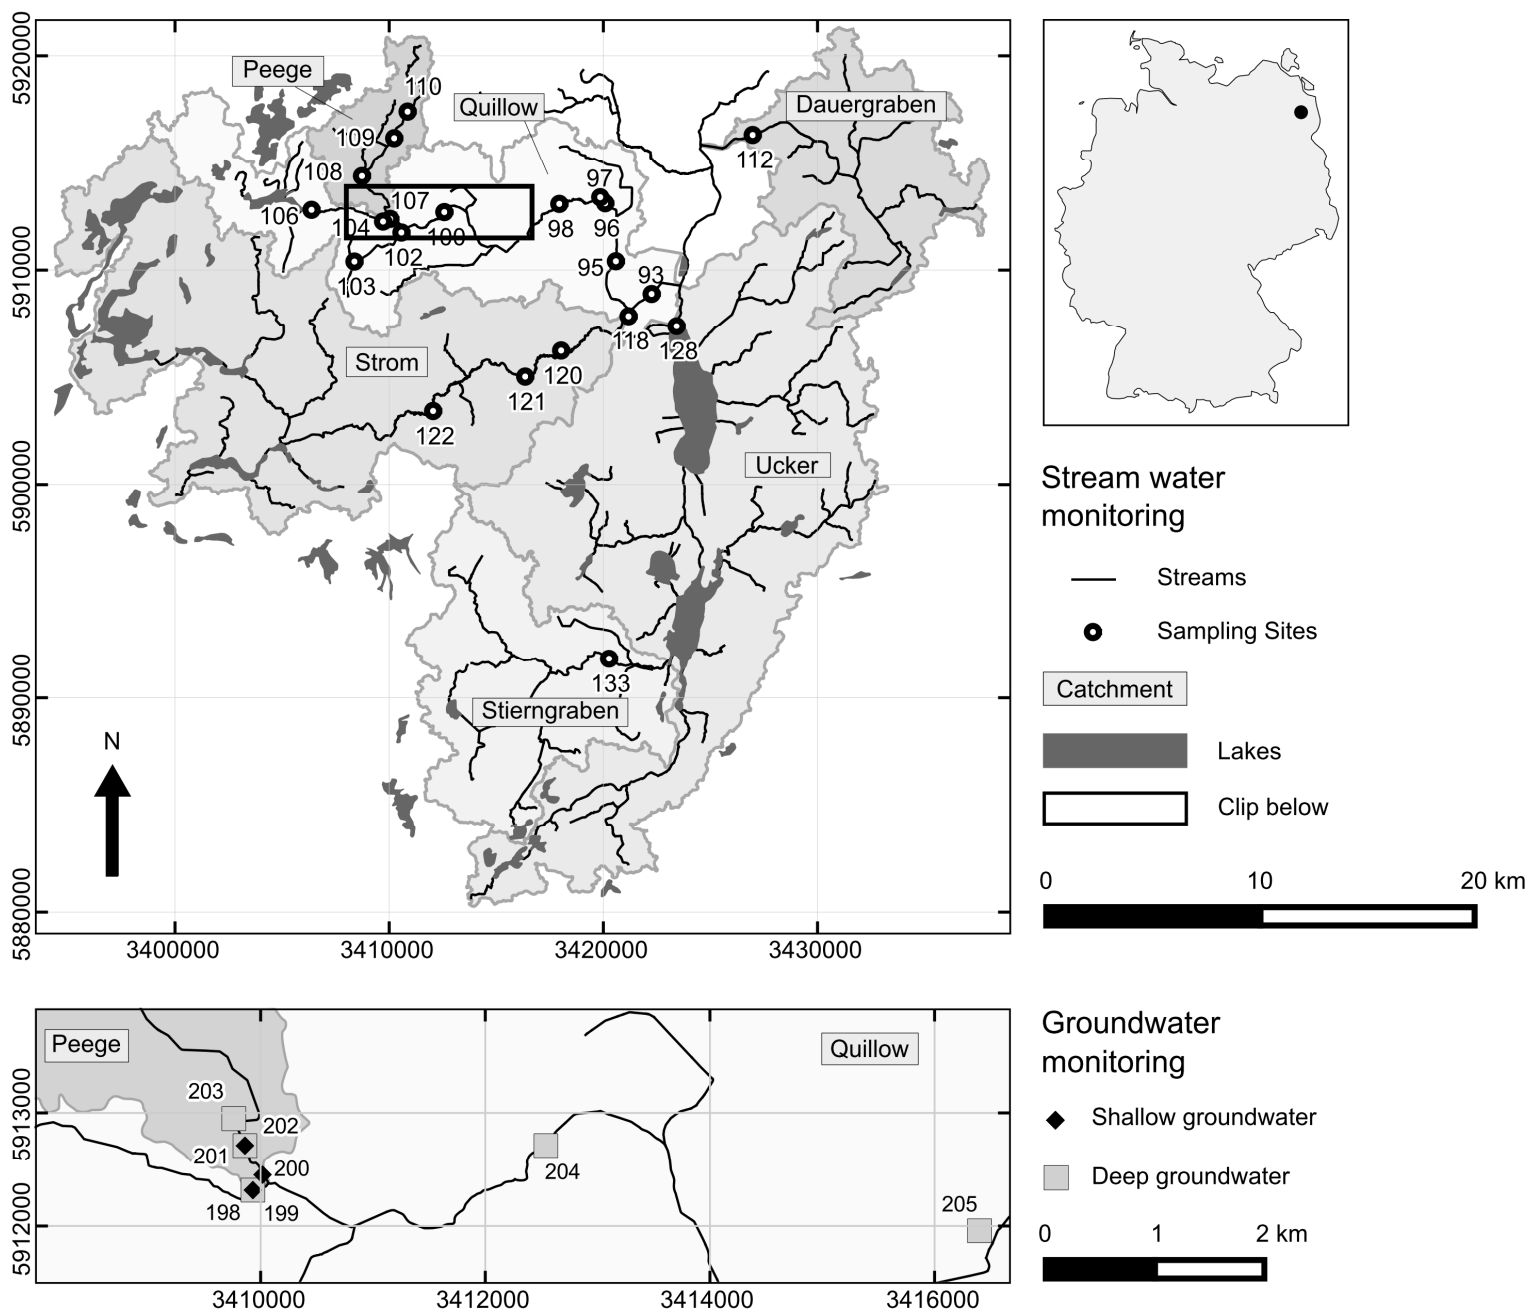


Figure 1 Map of the study area. Coordinates of UTM-zone 33N are given in m. Upper panel: Stream water monitoring sites and the location of the study area (Upper Ucker river catchment) within Germany. Lower panel: Section with the included groundwater monitoring sites. For better readability only the number of the ID of the monitoring sites is shown.

Table 1 Share of land use classes in the different catchments (percent of land cover) based on CORINE Land Cover data (2000).

	Settlements / Industry	Arable land	Grass-land	Lakes	Others	Wet-land	Wood-land
Dauergraben	1.7	92.1	4.1	1	0.3	-	0.8
Ucker	4.6	62.3	5.6	7.7	2.2	2.4	15.2
Stierngraben	1.4	61.2	15.8	1.2	0.9	-	19.5
Strom	2.2	54	7	6.9	1.2	-	28.7
Quillow	2.3	77	9.3	1.3	1.4	-	8.7
Peege	0	78.3	5.5	-	-	-	16.2

2.2 Sampling and analysis

The monitoring aimed to cover the spatial and temporal variability of water quality along the Quillow stream, its tributaries and the adjacent streams. The main focus of the monitoring was the Quillow catchment. Here, eight sampling sites were located along the main stream, and another four at each of the two tributaries Peege and Strom (Figure 1 and Table S1). At the streams Dauergraben and Stierngraben and at the Ucker river, stream water quality was monitored at one site respectively. Stream water sampling started in 1998 and was performed until 2009. Discharge data was only available at sites Q_93 and S_118 (Figure 1). Thus we did not include it in the presented analysis. Groundwater quality was monitored in the Quillow catchment only, close to the middle reaches of the stream and close to the mouth of the Peege tributary, from 2000 to 2008 (Lower panel Figure 1). At this site, an up to 15 m thick horizontal till layer separates a shallow and very heterogeneous unconfined aquifer from a mainly confined deep aquifer. The separating till layer crops out further downstream (Merz and Steidl, 2015). Both aquifers were monitored (Table S2). The deep aquifer is known to be confined except at well Gd_204. Groundwater level in the deep aquifer was measured daily with automatic data loggers at wells Gd_198, Gd_201, Gd_203 and Gd_204 (Merz and Steidl, 2014a).

Groundwater quality (Merz and Steidl, 2014b) and stream water quality (Kalettka and Steidl, 2014) monitoring in the Quillow catchment covers a wide range of water quality parameters. For the multivariate analysis in this study, we considered from the

joint groundwater and stream water quality data set only the 16 variables with less than 5% missing values, i.e. NH_4^+ , NO_3^- , NO_2^- , PO_4^{3-} , Na^+ , K^+ , Mg^{2+} , Ca^{2+} , Cl^- , O_2 , pH, 215 water temperature, redox potential (Eh), electric conductivity (EC), SO_4^{2-} , and DOC (Table S3). Each sample contained measurements of all 16 variables. Those water samples for which more than two of the 16 monitored variables were missing were excluded from the analysis, resulting in a set of 1572 samples. In total, 0.69% of the values in the dataset were missing. In addition, we considered HCO_3^- and Fe^{2+} 220 concentration from the groundwater monitoring (Table S3).

The number of temporal replicates varied between one and 127 per site (Figure 2). In general, streams were sampled at approximately monthly intervals, and groundwater samples were taken every three months. Median [mean] sampling intervals were 29 [38.7] days for stream water and 98 [125.3] days for groundwater. 225 The one shorter sampling interval at site GdQ_198 was an exceptional sample taken during maintenance work. In total, sampling intervals between two consecutive samples varied between nine and 714 days (Figure 2). The sites were sampled roughly similarly across seasons (left panel Figure 2). The most important systematic deviation from this rule were the Peege sites and the most upstream sites of the 230 Quillow (left panel Figure 2 and Figure 1), which often fall dry in summer (Merz and Steidl, 2015).

Further details on the data and measurement methods are provided by Merz and Steidl (2015). The selection of water quality data used in this article and the groundwater level data have been published under CC-BY 4.0 and can be accessed 235 at doi: 10.4228/ZALF.2017.340 and doi: 10.4228/ZALF.2000.272 respectively.

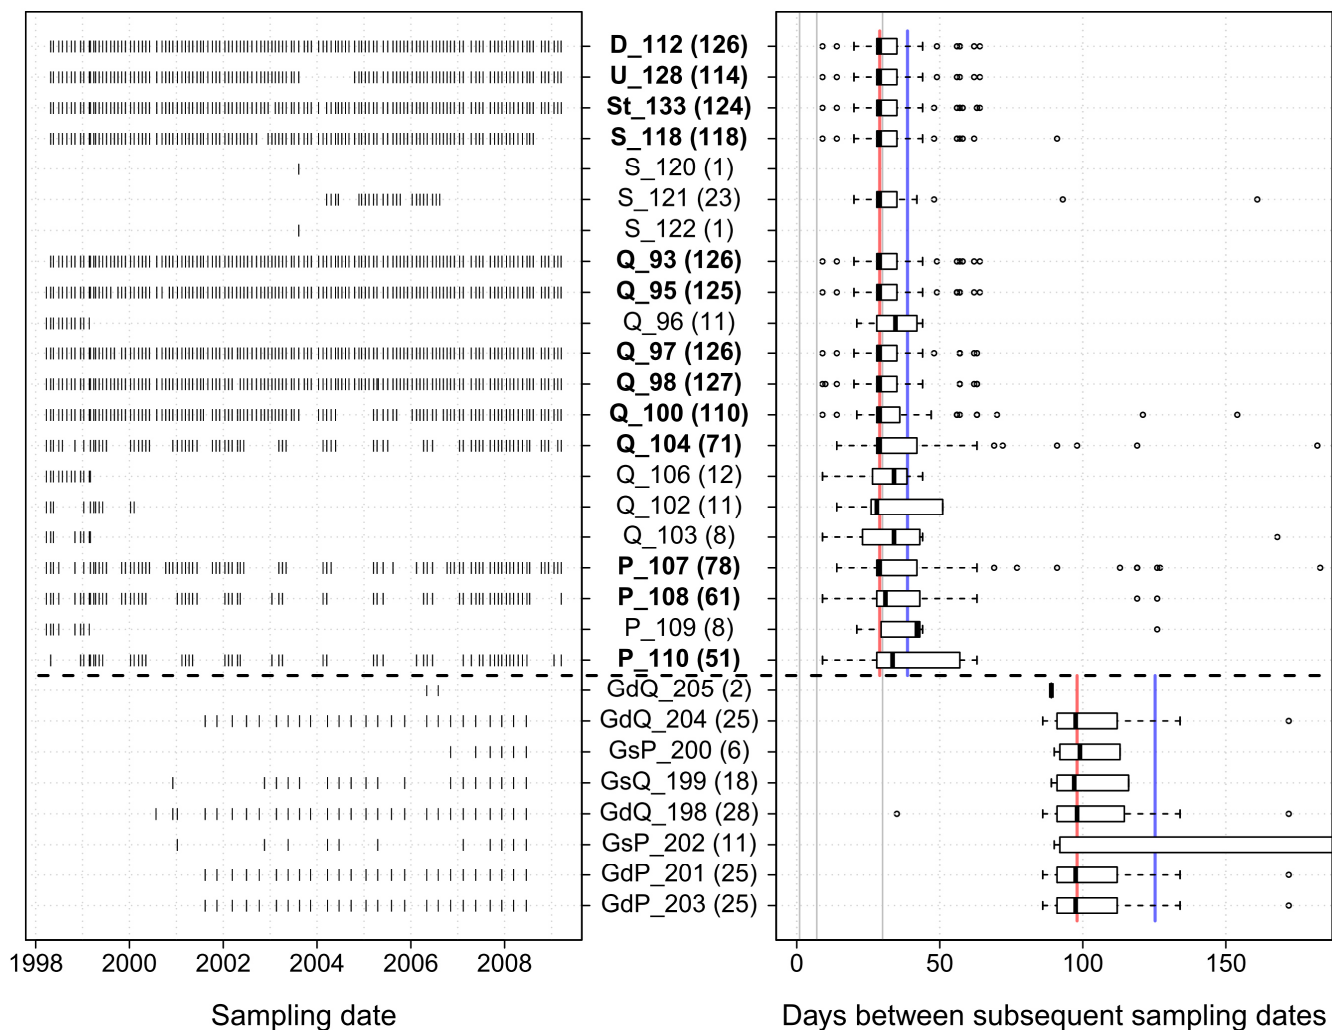


Figure 2 Left panel: Sampling dates at the sites for the whole monitoring period. Right panel: Boxplots of the variability of sampling intervals during the monitoring period. For better readability, the maximum of the x-axis is limited to 180 days. Median (red) and mean (blue) of sampling intervals are shown separately for the groundwater and stream water sites. Grey vertical lines mark the 1-day, 1-week and 1-month interval. Both panels: The dashed horizontal line separates groundwater sites (bottom) from stream water sites (top). Subscripts: P = Peege, Q = Quillow, S = Strom, St = Stierngraben, U = Ucker, D = Dauergraben, Gs = shallow groundwater, Gd = deep groundwater. The number of samples at each site is given in brackets. Names of the sites with more than 50 samples are printed bold.

3 Methods

250 3.1 Data preprocessing

Missing values were replaced by the median of the respective variable. This concerned at most DOC (3.44% of the values) and NO_2^- (2.54%), whereas the percentage of missing values was less than 2% for each of the other 14 variables (Table S3). Values below detection limit were replaced by 0.5 times that limit. To
255 achieve equally weighted variables the values were z-normalized to zero mean and unit standard deviation for each variable separately.

3.2 Exploratory framework

To identify the dominant changes, we firstly used the non-linear dimension
260 reduction technique Isometric Feature Mapping to derive the main multivariate water quality components. To account for the interaction of groundwater and stream water, both groundwater and stream water samples have been analysed together in one joint analysis. Secondly, we studied differences between the sites with respect to median component values. Thirdly, we analysed the time series of the components at
265 sites with more than 50 samples. Seasonal patterns were analysed with the Lomb-Scargle approach (Lomb, 1976; Scargle, 1982; Scargle, 1989) and – if significant – were subtracted from the series prior to trend analyses. Please note that the term ‘seasonal’ refers to the annual cycle throughout the article. Linear trends were estimated with the Theil-Sen estimator and tested for significance with the Mann-
270 Kendall Test. Non-linear trends were depicted with the locally weighted regression (LOESS) approach (Cleveland, 1979; Cleveland and Devlin, 1988). We then related resulting low-frequency patterns to the long-term groundwater head dynamics, likewise determined as LOESS smooth of the de-seasonalised series. Time series analysis at different sites allowed to check whether long-term patterns were
275 consistent, pointing to more general effects in the study area.

As the methods do not require regularly sampled data in space or time, we considered every sample as additional information of the spatiotemporal variability of

the observed water quality in the study area rather than noise. Consequently, irrespective of irregularities of sampling intervals at a site or differences in sampling intervals and numbers of samples between the different sites, we included as many samples in the analysis as possible to increase the informative value and support the representativeness of the study in space and time. This might lead to a bias in the determination of the components, as well as in the estimation of the trends of the components and their significance, if deviations from a regular sampling scheme follow a systematic pattern. To check for that, we tested the distribution of sampling intervals at all sites with $N > 50$ (Table S1) for normality with the Shapiro-Wilk-test and the temporal development of the lengths of the sampling intervals for the whole observation period for monotonic trends with the Mann-Kendall-test. For all tested sites a Gaussian distribution of sampling intervals as well as a monotonic trend of the length of sampling intervals during the observation period was rejected.

3.3 Dimension reduction

Dimension reduction methods aim to represent a data set with a given number of dimensions (here the number of measured hydrochemical variables) in a new data space with substantially less dimensions. This is achieved by projecting the data in a new ordination system which makes a more efficient use of the intrinsic structures of the data set than the original one. The axes of the new ordination system are usually called 'components' or 'dimensions'. In the following, we will use the term 'components'. For the values of a component we will use the term 'scores'. The reduction of the dataset's dimensionality is achieved by considering only some of the new components for further analysis. The selection process is a trade-off between reduction of the dimensionality and minimizing the loss of potentially informative structures. Typically only the first few components are selected as they depict the main structures in the data set.

In the projection, different methods focus on different aspects of the data. For example, PCA aims for maximizing variance on the first components, classical multidimensional scaling (CMDS) at preserving the interpoint distances of the input

data in the projection, and self-organizing maps (SOM) at preserving the neighbourhood relations (topology) of the input data in the projection (Lee, 2007). In
310 the last years, a variety of non-linear dimension reduction methods has been developed (Van der Maaten et al., 2009). Although being sensitive to noisy data, Isometric Feature Mapping (Isomap; Tenenbaum et al., 2000) was one of the best performing approaches when applied to real-world-data (Geng et al., 2005). It has been successfully applied in environmental research disciplines, e.g. biodiversity
315 studies (Mahecha et al., 2007), soil sciences (Schilli et al., 2010), climatology (Gámez et al., 2004), and biogeochemistry (Weyer et al., 2014).

3.3.1 Principal component analysis

In our study, the well-established linear principal component analysis (PCA) served
320 as benchmark for the non-linear Isometric Feature Mapping. PCA is one of the most widespread dimension reduction methods going back to research of Pearson (1901) and Hotelling (1933). For a brief introduction to PCA, please see, e.g., Jolliffe and Cadima (2016), for a comprehensive one Jolliffe (2002). PCA aims to successively maximize the variance of the data set on the new calculated components. The scores
325 of the components are calculated as weighted linear combinations of the original variables. The weights (loadings) of the linear combination define the axes of the data space in which the data is projected. The loadings are the eigenvectors derived from an eigenvalue decomposition of the covariance matrix of the analysed variables. If the analysed variables are z-normalized, as was done here, their covariance matrix
330 is equivalent to the (Pearson) correlation matrix. The components are ordered with decreasing size of their eigenvalues. The share of variance that is assigned to a component is proportional to the size of its eigenvalue in relation to the sum of all eigenvalues. Thus, the ratio of total variance that is captured by the considered components gives a measure of performance of the PCA. PCA was performed in R
335 (R Core Team, 2017) with the function 'princomp' of the default package 'stats'.

3.3.2 Isometric Feature Mapping

Isometric feature mapping (Isomap) is a non-linear extension of CMDS. It aims to
340 approximate the global non-linearity in a dataset by local linear fittings (Geng et al.,
2005). This is done by mapping approximated geodesic interpoint-distances to an
Euclidean distance matrix via a neighbourhood graph G (Tenenbaum et al., 2000).
The geodesic distance between two points is the distance along the surface of a
(non-linear) manifold, in contrast to the straight-line Euclidean distance (Geng et al.,
345 2005). The neighbourhood graph G consists of segments that connect every data
point to its k nearest neighbours directly via Euclidean distances. For all non-
connected points the shortest path along the neighbourhood graph G is computed as
the smallest sum of connected segments via the Dijkstra-algorithm (Dijkstra, 1959).
This approximation of the geodesic distances allows the adaptation of G to the global
350 non-linear structures in a data set. The only free parameter k has to be optimized by
checking the performance of several runs. The more linear the data, the higher will
the optimum k be. If k equals the possible number of connections of one data point to
all other data points, the approximations of the geodesic distances are equal to the
Euclidean distances and the Isomap results are congruent to those of CMDS and
355 linear PCA (Gámez et al., 2004). Finally the neighbourhood graph G is embedded in
the Euclidean space.

In contrast to PCA, assessing performance based on the eigenvalues of the
components is not applicable for Isomap. Performance of the dimension reduction of
the Isomap approach was assessed and compared to performance of the PCA by the
360 squared Pearson correlation coefficient (R^2) of the interpoint distances in the high-
dimensional data space and in the low-dimensional projection spanned by selected
components (Lischeid and Bittersohl 2008; Lischeid et al., 2010). A perfect fit would
yield a value of 1 and a value of 0 reflects no correlation between the distance
matrices of the original data and of the projection. Please note, that with this measure
365 the contribution of single components to the overall performance does not
necessarily decrease monotonically with increasing order of the components, as it is
the case for the eigenvalue-based performance measure of PCA. For the local
assessment of representation of interpoint distances at the individual sites, only the

data points from the respective sites were used. Because the selection of data points
 370 at a site is only a subset of the global data set for which the dimension reduction was
 performed, the performances regarding the representation of interpoint distances
 differ between the individual sites as well as compared to the overall performance for
 the global data set. At some sites it can even happen that adding more components
 does not for every component improve the representation of interpoint distances in
 375 the low-dimensional projection. Isomap and the determination of the distance
 matrices were performed with the R-package 'vegan' (Oksanen et al., 2009).

3.3.3 Interpretation of components

The analysis focused on those components that explained a major fraction of the
 380 total interpoint distances. The considered components were regarded to reflect
 dominant drivers influencing water quality. Here, the term 'driver' was used for
 biogeochemical and hydrological processes as well as for anthropogenic influences
 affecting water quality. Correspondingly we formulated a hypothesis for each
 considered component. The interpretation of the components is based on analysing
 385 (i) the correlations between measured variables and component scores as well as (ii)
 spatial and temporal patterns of the scores.

Correlation between scores of a selected component cp_x and values of single
 variables might be blurred due to the effects of other components on the same
 variable. We excluded those effects by analysing the relationships between scores of
 390 the selected component cp_x and the residuals of the multiple linear regression mlr of
 the single variable v_i at hand and the remaining other considered components $CP \setminus x$
 (residuals):

$$cor(cp_x, residuals[mlr(v_i, CP \setminus x)]) , \quad (1)$$

where $CP \setminus x$ is the set of m considered components, without the selected
 395 component cp_x , β_0 and β_j the intercept and coefficients of the regression

$$mlr(v_i, CP \setminus x) = \beta_0 + \sum_{j \in \{CP \setminus x\}} \beta_j cp_j + residuals \quad (2)$$

To assess the relationships between components and residuals we used bivariate scatterplots. To summarize the relationships between components and residuals we used Spearman rank correlation, which enables to consider non-linear relationships as well, as long as they are monotonic. Besides, it is less sensitive to extreme values than Pearson correlation.

3.4 Time series analysis

At sites with more than 50 samples, time series of component scores were analysed for seasonal patterns, linear trends and non-linear trends. The sites were compared with respect to the identified long-term patterns to detect general patterns in the study area. The significance level for trend and frequencies in this study was set to $p \leq 0.05$. At each site, the fractions of variance of a time series that were assigned to its seasonal pattern, linear trend or non-linear trend were determined as the R^2 of the respective pattern with the component series. In case of significant seasonal patterns, the estimations of the trends were based on the de-seasonalised series. Accordingly, the fractions of variance assigned to the trends were determined as the R^2 of the trend pattern with the de-seasonalised series. The decomposition of the time series in a seasonal component and a non-linear trend derived with LOESS was inspired by the STL-approach of Cleveland et al. (1990).

3.4.1 Lomb-Scargle method

Standard Fourier analysis requires equidistant time series which was not given in our study. Therefore the estimation of seasonal patterns in the time series was done with the Lomb-Scargle method, which is an extension of Fourier-Analysis to the uneven-spaced case genuinely invented in astrophysics (Lomb, 1976; Scargle, 1982). The application of the Lomb-Scargle method in this study follows to a large extent the workflow suggested by Glynn et al. (2006) as well as Hocke and Kämpfer (2009). Details are given in the Appendix A. The implementation used in this manuscript can be accessed as R-script at doi: 10.4228/ZALF.2017.340.

3.4.2 Theil-Sen estimator and Mann-Kendall test

The linear trend was estimated with the non-parametric Theil-Sen estimator which is the median of all interpoint slopes in a time series (Theil, 1950; Sen, 1968). The
430 Mann-Kendall test (Mann, 1945; Kendall, 1990) was used to test for significant
monotonic trends. Identified trends are not necessarily linear. Being based on rank
correlation, data do not have to obey any specific distribution. Please note that we
did not account for the effect of overestimation of the significance of trends with the
Mann-Kendall test due to short-term autocorrelation (Yue et al., 2002). That would
435 have required an assessment of the lag-1 autocorrelation which was hampered by
the irregular sampling. Neither did we consider long-term memory and its effects on
the statistical significance of the trends (Cohn and Lins 2005; Zhang et al., 2018).
Consequently, we did not consider the possible effects of the irregular sampling on
the long-term memory (fractal scaling) of the water quality series either (Zhang et al.,
440 2018). Due to the limited number of samples per year and non-equidistant sampling,
the seasonal Mann-Kendall test was not applicable (Figure 2). Instead, significant
seasonal patterns according to the Lomb-Scargle approach were subtracted prior
trend analysis. The Mann-Kendall test was performed with the R-package 'Kendall'
(McLeod, 2011).

445

3.4.3 Locally weighted regression (LOESS)

We assessed non-linear trends and low-frequency patterns with locally weighted
regression (LOESS; Cleveland, 1979; Cleveland and Devlin, 1988), where the
smoothing is done by local fitting of a second order polynomial to each point x in the
450 data set using weighted least squares. The weights for each value to be fitted are
scaled to the range from 0 to 1 by the distance $d(x)$ between x and its q^{th} closest
point. The ratio of q to the number n of all data points, i.e. the span of the local
regression smoother, defines the degree of smoothing. We used the default
smoothing span which is a proportion of $q/n = 0.75$ of x 's nearest neighbours. Data
455 points further away than the q^{th} data point do not contribute to the regression. Within

the range of the span, the weights w_i of the neighbouring points x_i in the least square fit decrease with increasing distance of x_i to x symmetrically around x according to the tricubic weighting function $w_i(x) = (1 - [(|x_i - x|) / d(x)]^3)^3$. Again, significant seasonal patterns according to the Lomb-Scargle approach were subtracted prior trend analysis. For details about choosing different LOESS-parametrisations, please
460 see Cleveland (1979) as well as Cleveland and Devlin (1988). Local extrema of the LOESS smooth were identified with the R-package 'EMD' (Kim and Oh, 2009; 2014.).

4 Results

465 4.1 Multivariate components

We achieved the best performance of the Isomap dimension reduction with $k = 1300$ (Table 2). In the following, results are presented for the first four Isomap components representing 88% of the interpoint distances of the total data set. For single sites (with more than 15 samples), between 29 and 97 % of the respective
470 interpoint distances were represented (Table S4).

The 1st component depicted 42% of the interpoint distances of the total data set. Plotting residuals of the variables versus the 1st component showed strong positive correlations for NO_3^- , Na^+ , K^+ , Mg^{2+} , Ca^{2+} , Cl^- , EC, SO_4^{2-} , DOC and slightly less, but still positive, correlations for O_2 and Eh. Temperature was the only variable
475 correlating negatively with the 1st component (Figure 3). Visualization of the component scores versus residuals of solute concentration revealed predominantly linear relationships (Figure S1).

The 2nd component reflected 18% of the interpoint distances in the data. It exhibited clear positive correlation with O_2 concentration, pH and Eh, and weaker
480 correlation with Na^+ , K^+ and DOC. It was inversely correlated with Ca^{2+} , EC and SO_4^{2-} (Figure 3 and Figure S2). In the groundwater samples, HCO_3^- and Fe^{2+} had been determined as well. Both solutes were negatively correlated with this component (Figure 4 upper panel). NO_3^- concentration in the deep groundwater samples was very low (with 27% of the samples below detection limit) and did not show any clear

485 correlation with the 2nd component. Low component scores in the groundwater came along with high Ca²⁺ and HCO₃⁻ concentration.

The relationship of scores of component one and two in the groundwater is shown in the lower panel of Figure 4. Except for the two shallow wells close to the Peege stream (Gs_200, Gs_202; cf. Figure 1) scores of the 1st and 2nd component are
490 negatively related (Figure 4 lower panel).

The 3rd component represented 6% of the interpoint distances in the data set. The residuals exhibited positive correlation for Na⁺, Mg²⁺, Cl⁻, pH and temperature. Negative correlations were found for NO₃⁻, Ca²⁺, O₂, Eh, and DOC (Figure 3 and Figure S3).

495 Another 22% of the interpoint distances in the data were assigned to the 4th component. Residuals of the component scores showed negative correlation for NH₄⁺, PO₄³⁻, K⁺, temperature, and DOC and positive correlation for O₂ (Figure 3 and Figure S4). The range of component values was spanned mainly by single large values of NH₄⁺, PO₄³⁻, and K⁺ that cannot be explained with the preceding three
500 components (Figure S4). This highlights the importance of particular events for the 4th component.

Table 2 Cumulated R² of the reproduction of the interpoint distances of the data in the projection by the first ten components of the best Isomap run and linear PCA.

Component	1	2	3	4	5	6	7	8	9	10
Isomap	0.42	0.6	0.66	0.88	0.94	0.96	0.97	0.98	0.98	0.99
PCA	0.39	0.57	0.65	0.88	0.94	0.95	0.97	0.98	0.99	0.99

505

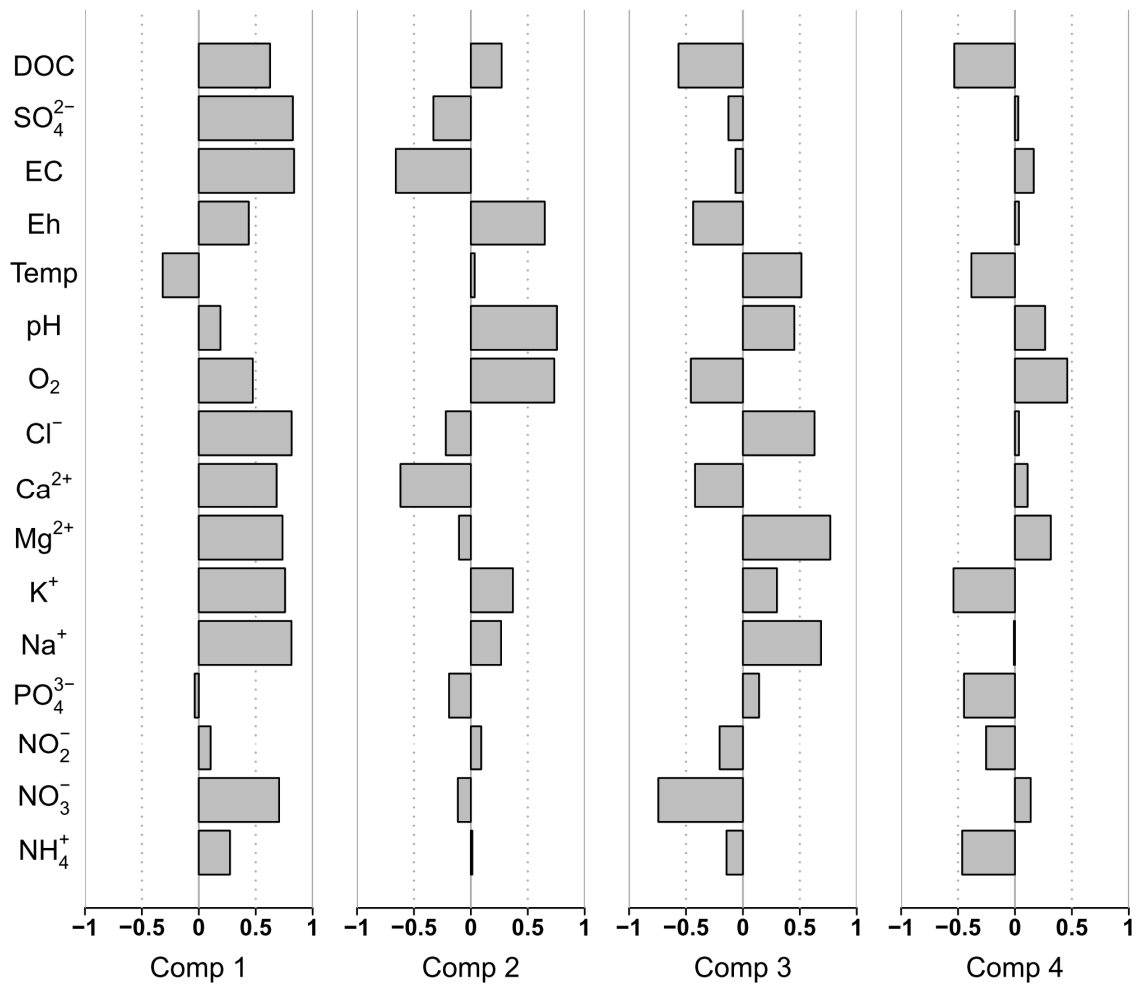


Figure 3 Spearman rank correlation of a component and the residuals of the multiple linear regression of the measured variable and the remaining three other components.

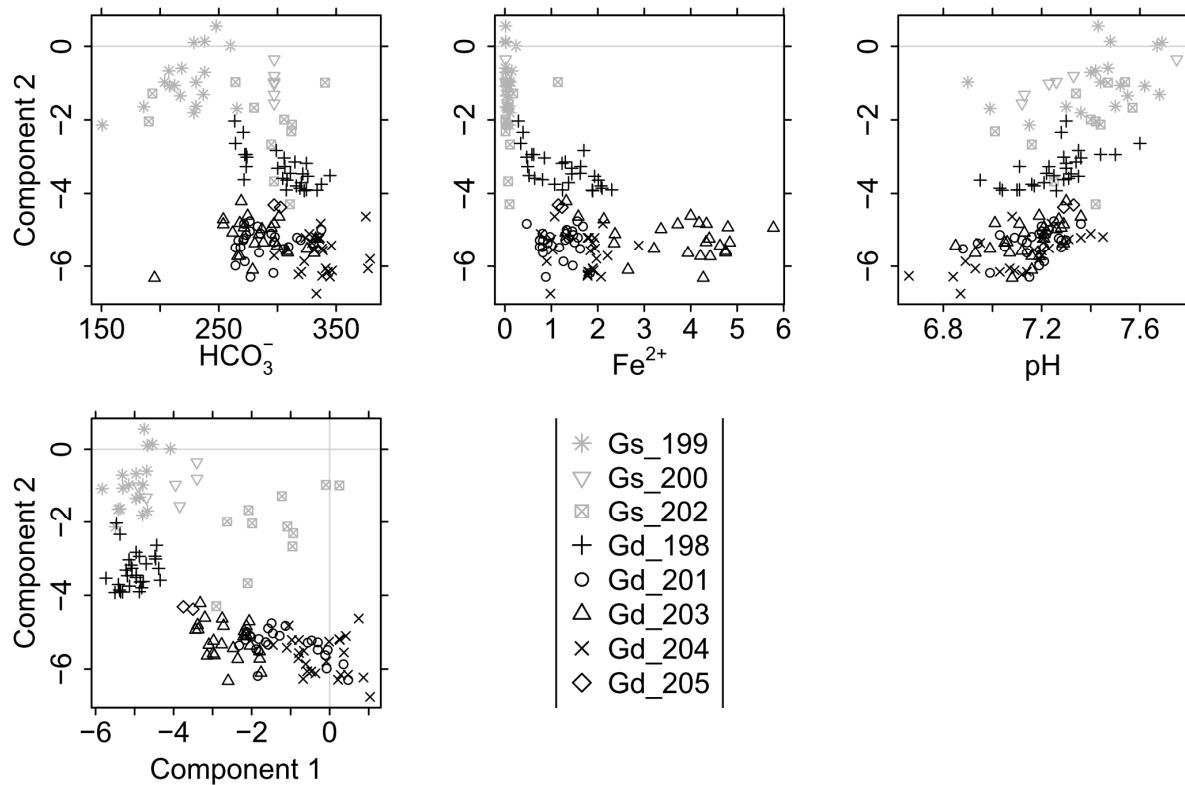


Figure 4 Upper panel: Selection of variables versus scores of component 2 for the groundwater samples. Concentration in mgL^{-1} . Lower panel: Scores of component 1 versus component 2 at the groundwater sites.

4.2 Multiple sites

Median values of scores of the 1st component clearly differed between streams (Figure 5 A). At the Strom sites, the median score values were considerably lower than those from the other stream water sampling sites. The median values of scores of the sites at the Quillow and Stierngraben showed intermediate values followed by the Ucker site, the Peege sites and finally the Dauergraben with the highest median score value. Groundwater samples in general exhibited consistently low scores of the 1st component, but without clear differences between deep and shallow groundwater samples. Mixing of water from different streams was visible at site Q_93 downstream the confluence of the Quillow (Q_95) and of the Strom stream (S_118), as well as at site Q_100 downstream the confluence of Q_104, Q_102 and P_107 (Figure 1 and

Figure 5 A).

Stream water samples exhibited the highest scores of the 2nd component, whereas
530 low scores were limited to deep groundwater samples, and shallow groundwater
samples were in an intermediate position (Figure 5 B). Median values of the stream
water sites were approximately on the same level except for the sites Q_103, Q_106
and U_128 which exhibited noticeably higher median values than the other stream
water sites and the two Peege sites P_109 and P_108, which exhibited median
535 values on the same level as the shallow groundwater sites Gs_199 and G_200. The
scores in the deep groundwater clearly showed the largest absolute values,
indicating the significance of deep groundwater for this component (Figure 5 B).

Scores of the 3rd component in the deep groundwater were consistently higher
than in shallow groundwater, while the stream water samples covered the whole
540 range of values (Figure 5 C). Lowest scores of the 3rd component were found at the
Peege sites and in the shallow groundwater, highest scores at Ucker, Dauergraben
and the deep groundwater. At the Quillow stream, scores tended to increase from the
spring to the outlet. The effect of mixing of tributaries with different water qualities
was visible along the course of the Peege and Quillow streams downstream of the
545 respective confluences at the sites P_108, Q_95 and Q_93 (Figure 1 and Figure 5
C).

The range of values of the 4th component was strongly biased towards negative
values, caused by single events at some sites which exhibited very low values
(Figure 5 D).

550

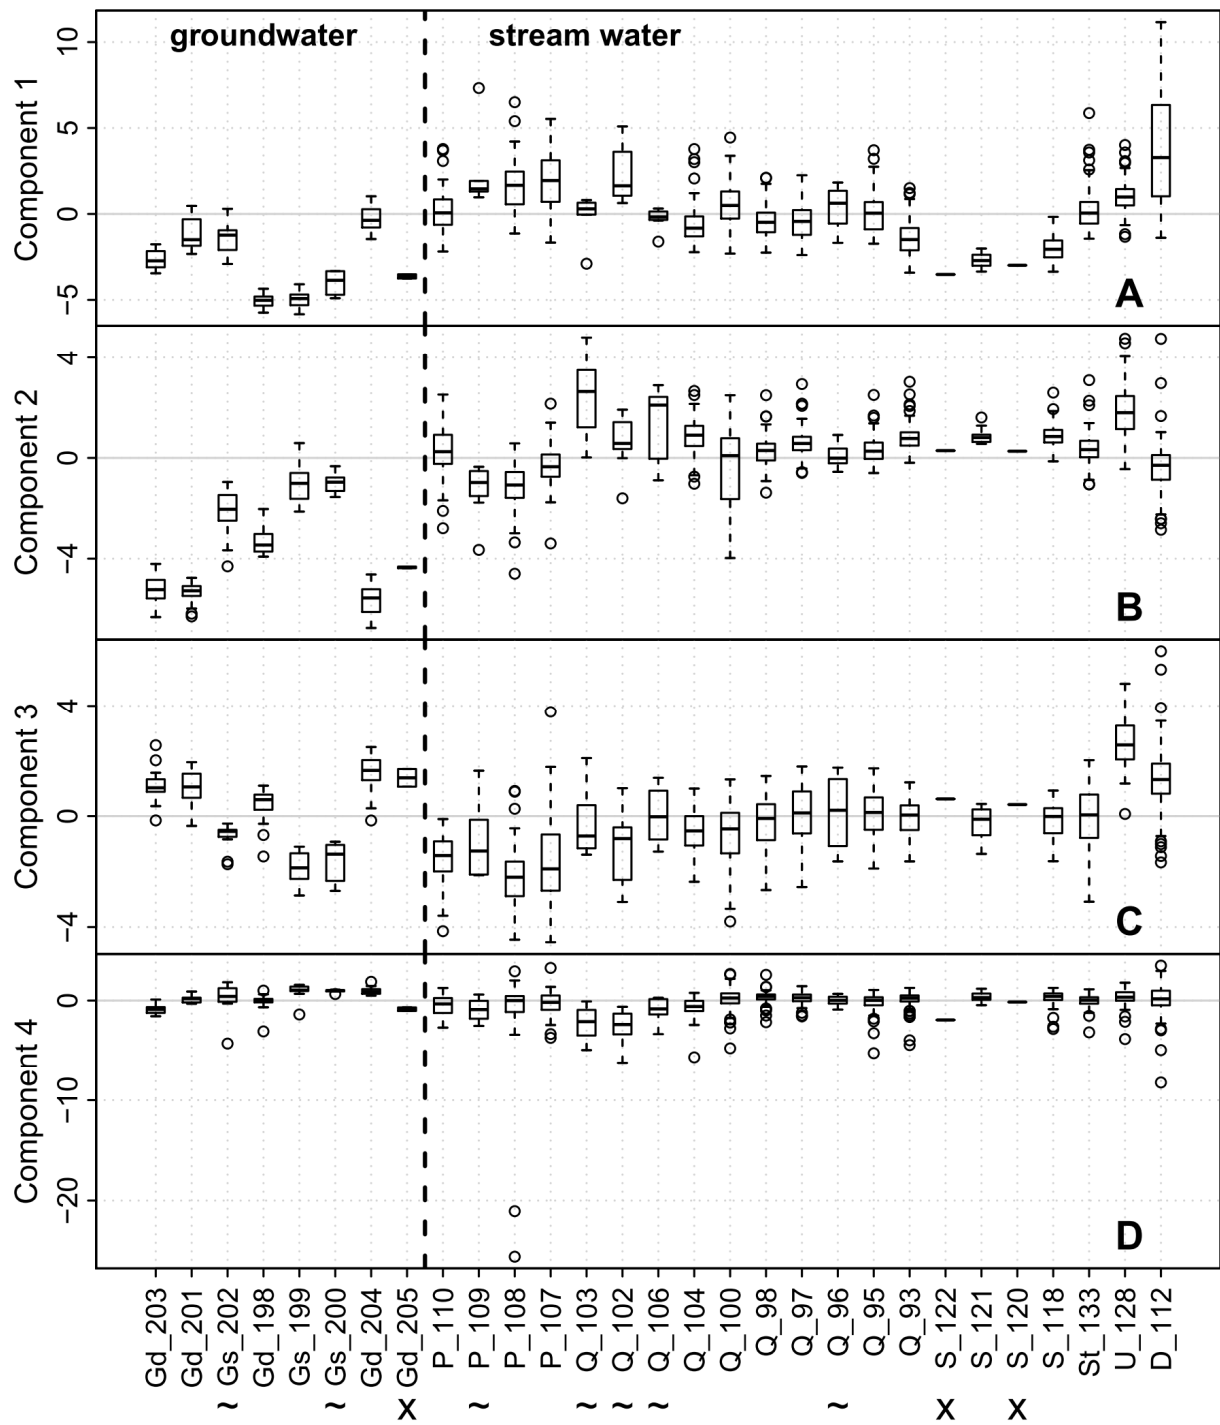


Figure 5 Boxplots of scores of component 1 to 4 at different sites. Sites with $N < 13$ are marked with '~', those with $N < 3$ with 'X'. Subscripts: P = Peege, Q = Quillow, S = Strom, St = Stierngraben, U = Ucker, D = Dauergraben, Gs = shallow groundwater, Gd = deep groundwater.

4.3 Long-term patterns

Time series of scores of the components were studied at sites with more than 50 temporal replicates. This applied for 13 stream water sites (Table S1). All dominant frequencies (for details, please see Appendix A) interpreted as seasonal patterns had a period length in the range between 350 and 380 days. For de-seasonalisation these seasonal patterns were subtracted from the time series prior to analysis for linear and non-linear trends.

Most of the time series of the scores of the 1st component exhibited clear seasonal patterns with maximum scores during the winter season (Figure 6 and Figure 7). Between 30 and 67 % of the variance were assigned to the seasonal pattern. At all sites we found significant negative monotonic trends (Figure 6). The strongest decline was found at site D_112, the weakest trend at site Q_97 (not shown). The linear trend comprised between 9 and 48 % of the variance of the de-seasonalised time series (Figure 6). In contrast, the LOESS smooth depicted 14 to 57 % of the variance (Figure 6). It showed a decrease until December 2004 approximately and an increase thereafter (Figure 8). The de-seasonalised time series of groundwater heads showed a similar behaviour, with the minimum water level in June 2006 (Figure 8). Timing of the minimum values of the scores of the 1st component varied between sites, spanning a range from 17th February 2004 to 17th of March 2009 (Figure 8). As an example, Figure 7 gives the time series of scores of the 1st component at site Q_93, the seasonal pattern extracted from the series and the de-seasonalised time series with the non-linear trend estimated with the LOESS smoother.

Unlike for the 1st component, only five of the thirteen considered time series of the 2nd component exhibited a clear significant seasonal pattern, accounting for 17 to 48 % of variance (Figure 6). The maxima of the seasonal patterns of the sites at Quillow and Ucker were in spring, at Stierngraben and Dauergraben in summer. In contrast, significant monotonic trends were found at most of the stream water sampling sites. All significant trends of the 2nd component were positive. The linear trend comprised between 5 and 16 % of the variance of the time series, while the LOESS smooth comprised between 4 and 25 %.

590 Values of the 3rd component showed a clear seasonal pattern with maxima in summer (Figure 6). Between 30 and 60 % of the variance were assigned to the seasonal signal. The only exception was site D_112 where the seasonal pattern was distorted by strong maxima in the winters of 2003, 2004 and 2007. Only at four sites significant linear trends were found. All of them were negative, comprising between 6 and 13 % of the variance. The LOESS smooth depicted between 0 and 21 % of the variance.

595 For the 4th component, significant seasonal patterns with maxima in summer were observed at 7 of the 13 analysed series, comprising between 17 and 61 % of the variance (Figure 6). Five sites showed a significant monotonic trend, comprising between 5 and 10 % of the variance. A negative trend was observed at site St_133 only. Four sites showed a positive trend. The LOESS smooth depicted between 1
600 and 16 % of the variance.

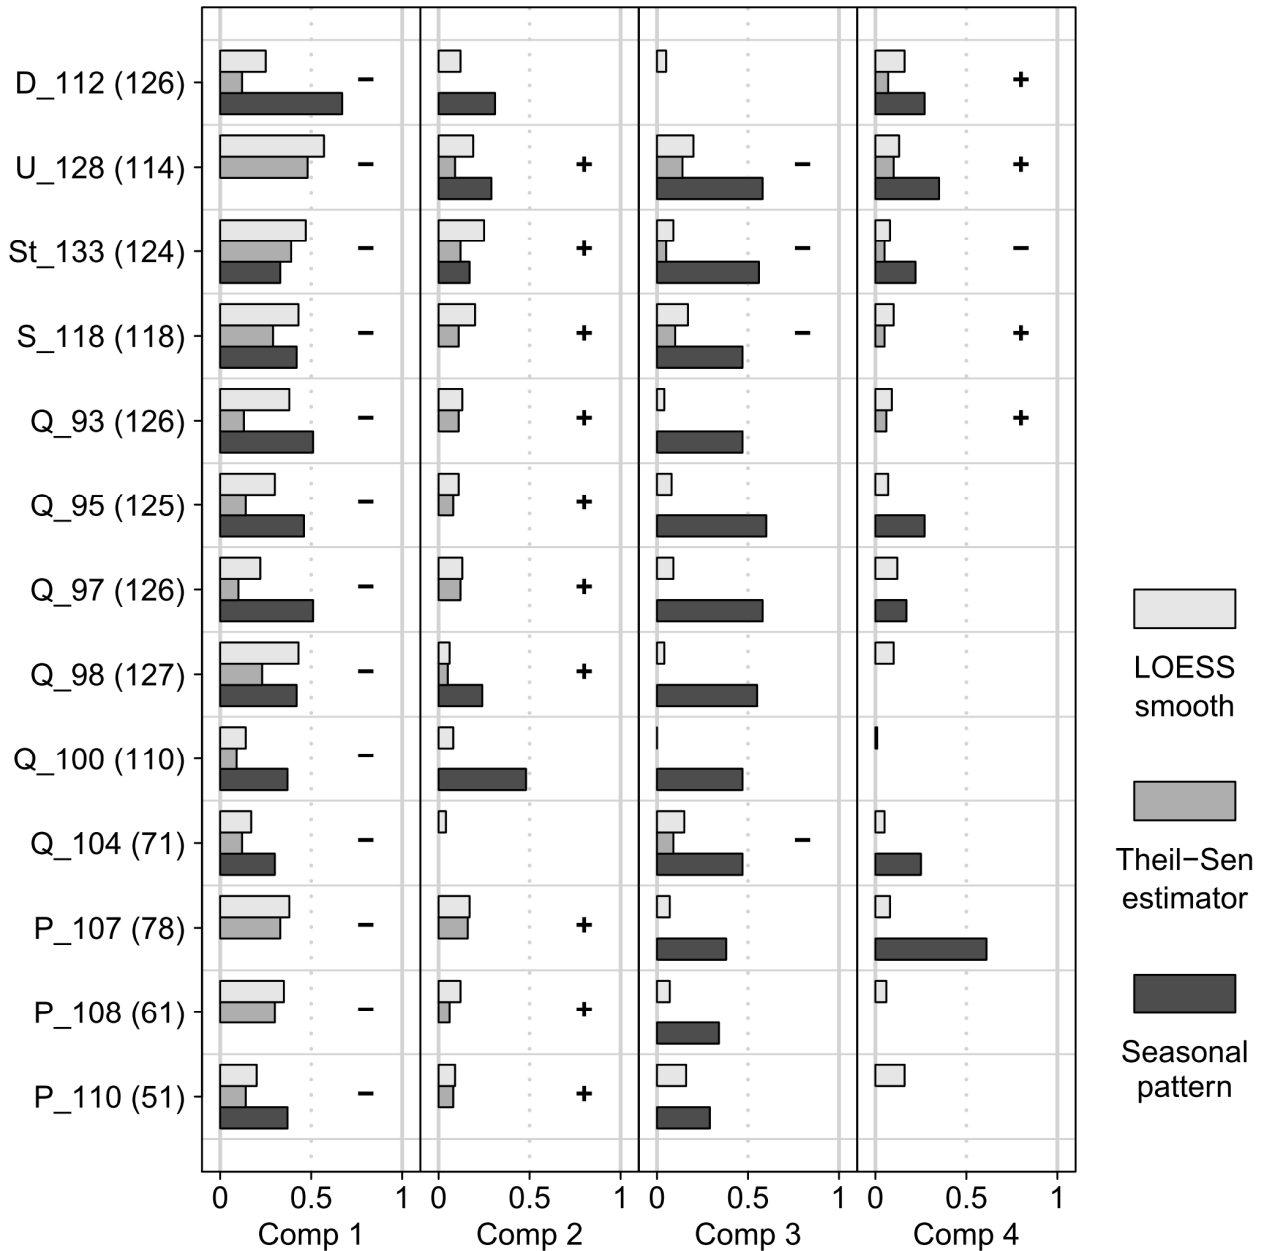


Figure 6 Fraction of variance of the time series of the Isomap component scores of sites with $N > 50$ assigned to the seasonal pattern (dark grey) and the trend estimated by the linear Theil-Sen estimator (mid grey) as well as the non-linear LOESS smooth (light grey). Fraction of variance is derived as R^2 of the scores of the respective component with the seasonal pattern or the estimated trend. Only significant seasonal patterns and linear trends are shown. The sign of the linear Theil-Sen estimator is given in the respective line. The number of samples at each site is given in brackets.

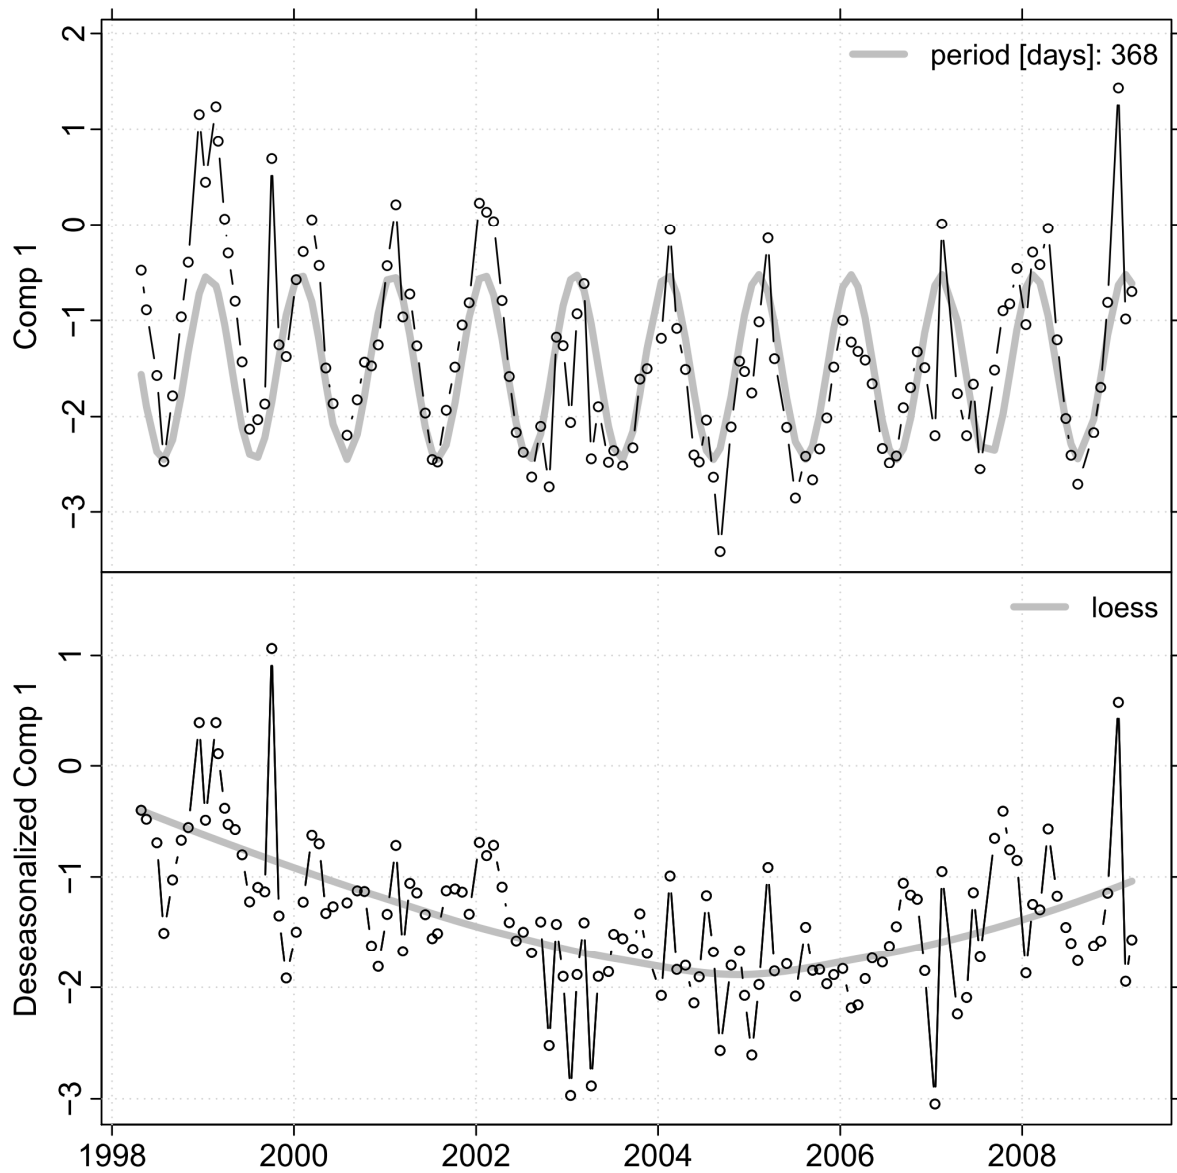


Figure 7 Upper panel: Time series of scores of the 1st component at site Q_93 (N = 126) in black and the seasonal pattern estimated with Lomb-Scargle in grey. Lower panel: The de-seasonalised series in black and the non-linear trend estimated with LOESS in grey.

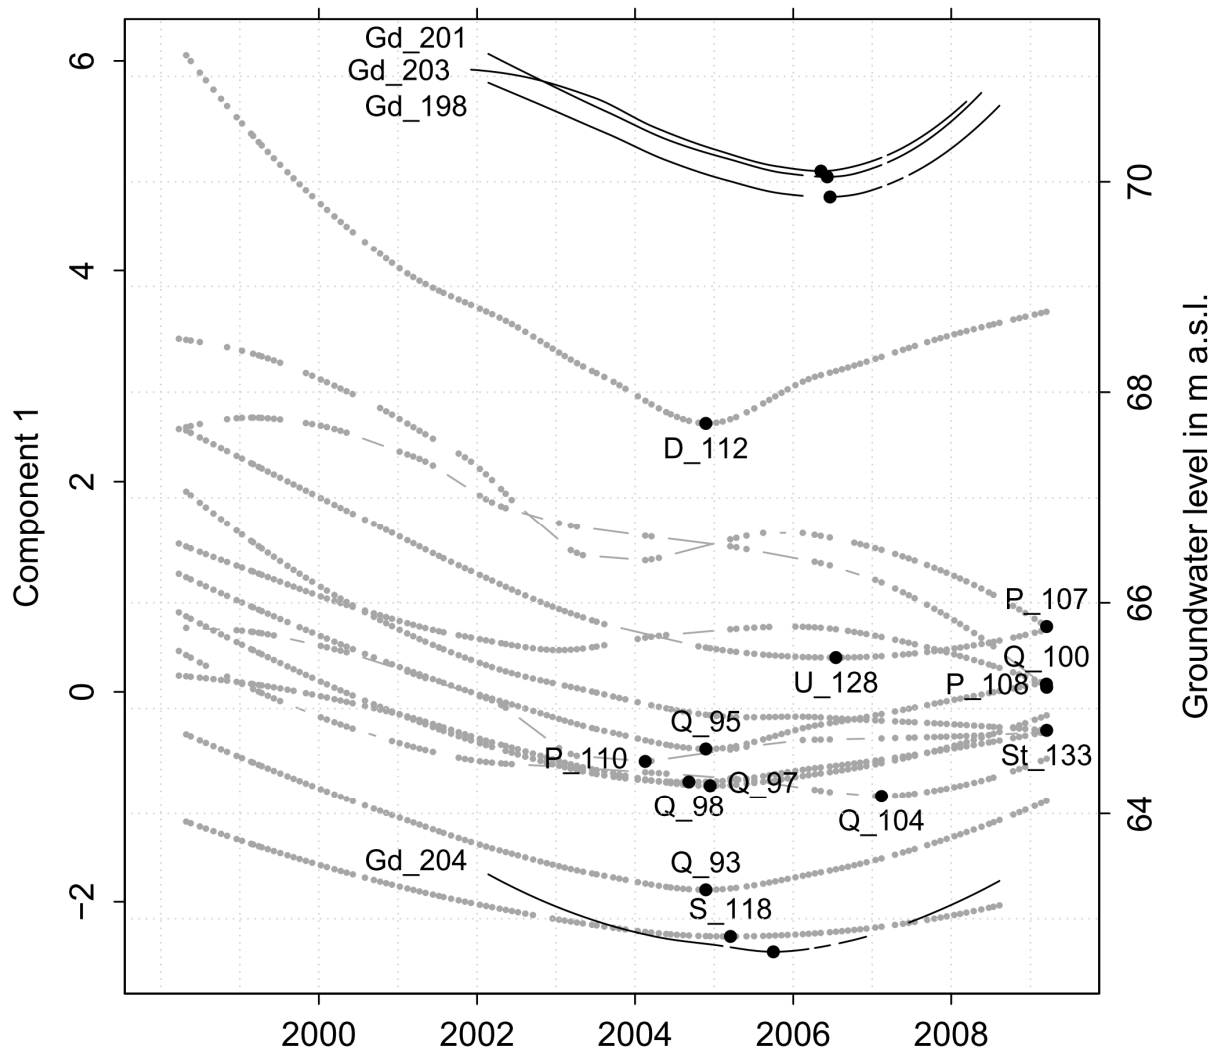


Figure 8 Left y-axis: LOESS smooth of time series of the 1st component at sites with $N > 50$ in grey. If a significant seasonal pattern was present, this was removed before smoothing. Right y-axis: LOESS smooth of the de-seasonalised groundwater level at four sites in black. The black dots mark the minima of the LOESS-smoothed series.

625 5 Discussion

5.1 Multivariate components

Non-linear Isomap performed in this study only slightly better with respect to the

representation of interpoint distances than PCA (Table 2), suggesting that mainly linear relationships were of importance for the overall dynamics in the data set. As there were only minor differences, we will present in the following the results of Isomap only.

For PCA and Isomap, the 1st component represents by definition the correlation structure that predominantly can be extracted from the set of variables as a whole. If all the loadings of the 1st component of a PCA have the same sign, it is a weighted average of all the analysed variables (Jolliffe, 2002; Jolliffe and Cadima, 2016). The stronger the analysed variables are linearly correlated, the more the 1st component approximates the arithmetic mean of all variables (for examples with hydrometric data see Lischeid, et al., 2010; Lehr et al., 2015). Furthermore, the 1st component serves as reference for all the subsequent components.

In this study each sample of the multivariate water quality data set is uniquely defined by a sampling site and a sampling date. Thus, the 1st component depicted a) for each sampling site the pattern that was most prominent in the time series of the variables correlating with the 1st component, and b) between the sampling sites the difference in concentration level of those variables. High values of the 1st component indicate synchronous appearance of relatively high Eh and EC together with relatively high concentration of NO₃⁻, Cl⁻, SO₄²⁻, Na⁺, K⁺, Mg²⁺, Ca²⁺, DOC, O₂ accompanied with relatively low temperature (Figure 3).

The whole study region is characterized by relatively intense agriculture (Table 1). Thus, in addition to the natural background, we assume a general effect of the agricultural practice on the solute concentration level and the dynamics of the water quality series in the area. Enhanced concentration of NO₃⁻, Cl⁻, SO₄²⁻ and Ca²⁺ is typical for groundwater and stream water in regions with intense agriculture compared to forested areas (Broers and van der Grift, 2004; Fitzpatrick et al., 2007; Lischeid and Kalettka, 2012). Nitrogen and potassium are the main ingredients of mineral fertilizers. Cl⁻ and SO₄²⁻ are the dominating anions in potassium fertilizers. SO₄²⁻ is a major ingredient of phosphorus fertilizers and ingredient in some nitrogen fertilizers. Calcite is present in some nitrogen fertilizers or is applied separately via liming. DOC might be leached from slurry application or via tile drains after

mechanical destruction of topsoil aggregates during tillage (Graeber et al., 2012). In
660 addition, cations from the soil matrix might be leached by an enhanced anion
concentration (mainly NO_3^-) (Jessen et al., 2017). Overall the application of fertilizers
and other agricultural practices like tillage tend to enhance the solute concentration
of seepage water (Pierson-Wickmann et al., 2009). Thus, we interpreted the 1st
665 component as the enhancement of the natural background level of solute
concentration due to agricultural practices.

Compared to the 1st component, the relationships of the 2nd component with Eh,
pH and O_2 concentration were clearer expressed (Figure 3 and Figure S2). The
range of the scores of the 2nd component was spanned by the lowest values in the
670 deep groundwater and the highest values in the stream water (Figure 5 B) whereas
shallow groundwater exhibited intermediate scores. This sequence corresponds to
redox conditions expected in those water categories. Thus, we interpreted the 2nd
component as a redox controlled component covering a sequence from reducing
conditions in deep groundwater to post oxic conditions in shallow groundwater and
oxic conditions in stream water. O_2 and NO_3^- concentration in deep groundwater
675 samples usually was below the detection limit which is a common feature in this
region (Merz et al., 2009). NO_3^- in seepage and groundwater can be denitrified by
microorganisms which use the oxidation of sulphides to sulphate as electron donor
for denitrification (Massmann et al., 2003, Jørgensen et al., 2009). We ascribed the
high SO_4^{2-} and Fe^{2+} concentration to oxidation of pyrite (Figure 4 upper panel and
680 Figure S2). Pyrite and other sulphides are abundant in the Pleistocenic sediments of
North Germany (e.g., Weymann et al., 2010). Consequently, the pH decreases,
calcite gets dissolved and the HCO_3^- concentration increases. Part of the released
 Ca^{2+} replaces Na^+ and K^+ being sorbed to clay minerals.

We interpreted the clear separation in the 3rd component between relatively low
685 scores for the shallow aquifer and relatively high scores for the deep aquifer as
reflection of two opposing gradients (Figure 5 C). High concentration of NO_3^- , O_2 and
DOC and relatively high Eh values being negatively related to the 3rd component
(Figure 3) is indicative for groundwater close to the surface, whereas enhanced
concentration of the positively related solutes Na^+ , Mg^{2+} and Cl^- is characteristic for

690 local upwelling of saline groundwater from the underlying Tertiary aquifers at greater
depth (Hannemann and Schirrmeister 1998; Tesmer et al., 2007). The scores of the
stream water samples, in turn, reflect the mixing ratio of groundwater from the two
aquifers to the streamflow. We expect the baseflow maintained from the deep aquifer
to be relatively enriched with geogenic solutes compared to the water that stems from
695 the shallow aquifer or faster responding flow components like tile drain discharge and
surface runoff. Water from the shallow aquifer is expected to be relatively enriched
with surface born solutes compared to water that stems from the deep aquifer.

The range of values of the 4th component was dominated by single extremely low
scores, reflecting samples with high concentration of NH_4^+ , PO_4^{3-} , and K^+ (Figure S4).
700 The catchments of the analysed streams are only sparsely populated and mainly
characterized by intensive agriculture (Table 1). In agricultural landscapes slurry is a
typical source in which those nutrients occur in high concentration (Hooda et al.,
2000). We are not aware of any other high-concentration sources of this combination
of nutrients in the region. The little number of scores with very low scores implied that
705 there were merely single events occurring at some of the sites only. This fits to the
finding that the timing of slurry application is crucial for the amount of nutrient loss to
the streams (Hooda et al., 2000; Cherobim et al., 2017). Thus, we interpreted the
negative peaks of the 4th component as sporadic events of slurry application, being
either unintentionally directly applied to the stream during the spreading of the slurry
710 or being leached via surface runoff and tile drain discharge after application.

5.2 Multiple sites

The interpretation of the 1st component as agriculturally induced enhancement of
the natural background level of most of the water quality variables is consistent with
715 the spatial pattern of median component scores at the different sites. The highest
scores were found in the Dauergraben stream and in the Peege stream (Figure 5 A).
Both catchments are characterized by intense agriculture, a relatively dense network
of tile drains, and hardly any buffer strips along the streams leading to a rapid
transmission of solute enriched waters from the fields to the streams. In contrast, the

720 Strom stream exhibited the lowest scores among all streams. Compared to the other
streams, the valley of the Strom stream is clearly deep cut. Therefore, the Strom
stream is expected to receive along its whole length continuous and substantial
groundwater inflow from the deep aquifer. In addition, the valley slopes are covered
725 with forest and not in agricultural use, acting as a buffer strip for the agricultural
impact. Furthermore, the fraction of arable land in the Strom catchment is smallest,
and the fraction of woodland is largest compared to the other catchments (Table 1).
Main parts of the Strom catchment are situated within a nature conservation area
furthermore limiting the agricultural impact in its riparian zone.

Deep groundwater, shallow groundwater and the stream water were well
730 separated by the 2nd component (Figure 5 B). Exceptions were the sites at the
Peege, which are mainly supplied with water from tile drainage and the shallow
aquifer and consequently yield median values similar to the shallow groundwater.
The largest positive median values of the 2nd component, being higher than those of
735 the other stream water sites, were observed at sites with less than 13 samples
(Q_103 and Q_106) and at the site U_128 which received at least partly waters from
a different region than the other stream water sites (Figure 1 and Figure 5 B). Thus,
for the purpose of this study, we restricted our analysis on the spatial variability of the
redox component to the categories of deep groundwater, shallow groundwater and
stream water.

740 However, we took a closer look at the non-linear structure that became apparent
for the deep groundwater samples in some of the residual plots of the 2nd component
(Figure S2). In addition, we related the groundwater values of the 2nd component to
the 1st component and the HCO_3^- and Fe^{2+} concentration (Figure 4). The negative
relationship between the 2nd component and the 1st component in the deep
745 groundwater suggests that the agricultural load represented by the 1st component
acts as a driver for the sulphide oxidation represented by the 2nd component. Among
all deep groundwater wells, the deepest groundwater well Gd_198 exhibited the
lowest scores of the 1st component (Figure 5 A) and the highest scores of the 2nd
component (Figure 4 lower panel and Figure 5 B). This suggests that due to the
750 relatively low agricultural load the oxidation of sulphides was the least pronounced

among all deeper wells. Similar relationships between the extent of sulphate oxidation in the aquifer and agriculturally borne NO_3^- input have been found in other studies (e.g., Zhang et al., 2009; Jessen et al., 2017 and references therein).

We expected the ratio of groundwater from the deep aquifer contributing to the streamflow to increase in general with increasing catchment size. The Peege stream
755 is mainly fed by the shallow aquifer and yielded consequently median values of the 3rd component similar to the shallow groundwater sites (Figure 5 C). The streams of Quillow, Strom and Stierngraben, showed little higher median values, indicating the larger proportion of groundwater from the deep aquifer contributing to runoff
760 compared to the Peege stream. The sites U_128 and D_112 showed the highest median values of the 3rd component among the stream water sites, being equal or even higher than those of the deep groundwater sites (Figure 5 C). Both sites have subsurface catchments that do not include the deep groundwater samplings sites in this study. Site D_112 is on the eastern side of the river Ucker, while all groundwater
765 sampling sites are on the western side of it (Figure 1). In addition, its higher median value of the 3rd component was partly due to several peaks during the winter time. Those coincide with high values of Cl^- . These might indicate road salt application, but we did not investigate this further, as it considered only this single site. Site U_128 is situated at the outlet of the lake Unteruckersee upstream of the confluence of the
770 Quillow stream (Figure 1). There, we did not expect a contribution of the groundwater sampled in the Quillow catchment either.

All the stream water sampling sites with negative peaks of the 4th component are located near arable fields which are known to get fertilised by slurry (Figure 5 D). For example the two most affected sites Q_102 and Q_103 receive slurry input from a
775 large pig farm close by (personal communication G. Verch). Overall, only a few slurry input events accounted for 22% of the representation of the interpoint distances of all the water quality samples of the water quality data set in the Isomap projection (Figure 5 D). However, the performance of the representation of the interpoint distances after adding the 4th component differed substantially between the different
780 sites (Table S4). In case of site S_121 the representation of interpoint distances with four components ($R^2 = 0.68$) was even slightly worse than with three components (R^2

= 0.66) (Table S4). This indicated an anomaly at this specific site compared to all other sites with respect to the 4th component, respectively the solutes which mainly determine the 4th component. We traced this phenomenon back to one single sample
785 from the 25th of May 2004 which comprised relatively high DOC values and at the same time relatively low values of K⁺, which is opposing the relationships indicative for the 4th component (Figure 3). The deterioration of the representation of the interpoint distances after adding the 4th component at this site vanished in an Isomap analysis which was performed without this sample. We were not able to find an
790 explanation for this exceptional sample. However, it underlined that by applying a dimension reduction method every single sample is put into perspective of the global features of the data set as depicted by the components. Overall, the 4th component underlines the necessity to develop and use methods in environmental data analysis which enable to consider non-linear processes as well as singular and site-specific
795 events.

5.3 Long-term patterns

Dominant changes were observed for the first two components (Figure 6). We interpreted the non-linear long term trend of the 1st component at most stream water
800 sites (Figure 8) as the response of stream water quality to the interannual variability of depth to groundwater. An increase in the thickness of the unsaturated zone leads in general to longer residence time of seepage water, increasing retardation and buffering of topsoil seepage water, which is reducing the solute concentration originating from the surface in the seepage water and consequently reducing the
805 values of the 1st component.

Trends similarly shaped to the non-linear trend of the 1st component of stream water quality were observed for the water level in the deep groundwater. In general, the turning points of the deep groundwater head time series lag behind those of the scores of the 1st component of the stream water sites by approximately 1.5 years
810 (Figure 8). The earlier date of the turning point at groundwater gauge Gd_204 in October 2005 is most probably an artefact, caused by the effect of the large time

gaps in 2006 and 2007 on the de-seasonalising at this site and has to be considered with care.

We suggest that the time lag between stream water chemistry and water level in the deep aquifer is due to different response times to changes in the moisture conditions of the unsaturated zone. Compared to the relatively fast response of the stream water quality, the groundwater level in the deep aquifer reacts slower. In general, the overall trend of groundwater recharge reflects a relatively slow response to changes in the regional water balance. The velocity of seepage in the sediments of the upstream region of the Quillow catchment is estimated to be roughly 1 m per year.

The seasonal patterns, i.e. the annual variability, in the time series of the scores of the 1st component in the streams were ascribed to transient hydraulic decoupling of the mostly affected topsoils from the streams in summer. Usually there is hardly any seepage during the dry summer months at all. This leads often to drought in the uppermost stream reaches (left panel Figure 2 and Merz and Steidl, 2015). Thus, shallow groundwater and tile drain discharge, both sources with relatively high agricultural load, did not contribute to stream discharge during these periods and larger areas of the catchment got hydraulically decoupled from the stream network (Merz and Steidl, 2015). Similar effects of the seasonal variability of the hydrological connectivity of streams, groundwater and tile drainage in agricultural catchments on the concentration level of agriculturally born solutes in the stream water have been reported, e.g. for NO_3^- in the Schaugraben study catchment in the North of Germany (Wriedt et al., 2007) and for NO_3^- and Cl^- in the Kervidy-Naizin catchment in western France (Molenat et al., 2008; Aubert et al., 2013).

The other dominant change of stream water chemistry observed in this study was the continuous increase of the 2nd component at most stream water sites (Figure 6). All of the sampling sites with very low values of the 2nd component were in the deep aquifer (Figure 5 B). The positive trends of the 2nd component at most stream water sites were ascribed to changes in the chemistry of the groundwater-borne baseflow. Considering the interpretation of the 2nd component, this translates into enhanced oxidation of geogenic sulphides in the deeper aquifer due to the continuous input of

agriculturally born NO_3^- and DOC and subsequent calcite dissolution. Geogenic sulphides, such as pyrite, serve as electron donors for denitrification. The consumption of the geogenic sulphides is irreversible and might lead to the depletion of the denitrification capacity in the deep aquifer in the long run (Merz et al., 2009; Zhang et al., 2009; Merz and Steidl, 2015). Consequently, buffering of NO_3^- surplus from agricultural land use is expected to decrease and NO_3^- concentration in the groundwater and the stream water is expected to increase. The hypothesised long-term development should be of concern for the water resources and environmental protection agencies with respect to future water quality and related international commitments, such as the Water framework (EU, 2000), the Groundwater (EU, 2006) and the Nitrate directive (EU, 1991) of the European Union. Substantial time lags have to be considered for the response of groundwater quality to measures that reduce leaching of NO_3^- (e.g., Pierson-Wickmann et al., 2009; Meals et al., 2010). In the Quillow catchment, we expect travel times in the order of magnitude of decades for the seepage water to reach the deep aquifer.

We did not observe dominant changes for the other two water quality components during the course of the observation period. The main temporal feature of the 3rd component was a very distinct and steady seasonal pattern, as could be expected for the mixing ratio of groundwater from the deep aquifer. All stream water sites with $n > 50$, except for D_112, showed a distinct seasonal pattern with maximum scores in the summer, which is consistent with the assumption that the fraction of deep groundwater in the streams is highest during this period (Figure 6). The seasonal pattern at site D_112 was disturbed by the winter peaks we ascribed to road salt application (section 5.2).

Because of its strong dependence from single events (Figure 5 D), the results of the estimation of the seasonal patterns and the trends of the 4th component have to be considered with care. The maxima of the seasonal pattern in summer at some sites were interpreted as reduced nutrient inputs to the stream due to nutrient uptake of plants and maximum buffering capacity of the unsaturated zone in summer. There were no indications for any effects of those events that we ascribed to the direct effect of slurry application on samples taken on the subsequent sampling dates at the

affected sites. This is presumably due to the width of the sampling interval (Figure 2).

875 In case of dependence of a component from single events, 'change' might be also
related to clustering of those events during certain parts of the series, either for series
at single sites or sets of series. Most of the 'extreme' events of the 4th component
appeared during the first half of the observation period (not shown). However,
because of the small number of clearly outstanding events, we did not investigate this
880 further (Figure 5 D).

In this study, the presented analysis of changes in water quality was limited by the
temporal resolution of the data. Aspects such as long-term memory effects, as
indicated by fractal scaling of solute series (Kirchner et al., 2000) and the observed
scale-crossing non-self-averaging behaviour of solute series (Kirchner and Neal,
885 2013) were not considered. However, we assume that the suggested use of
multivariate components gives some robustness to the detected changes compared
to the analysis of single solutes.

5.4 Effects of the irregular sampling

890 There was an obvious spatial bias with a focus on the Quillow catchment itself,
conditioned by the focus of the monitoring (section 2.2, Figure 1). Stream sampling
sites were only partly independent from each other, as the same streams had been
sampled along different reaches. This needs to be considered in the interpretation of
the components. In our exploratory approach, differences between subsequent
895 stream reaches helped to identify the effects of tributaries or groundwater that
recharged between the respective sampling sites. In that way, the stream was used
as a measurement device for biogeochemical processes and water-borne solute
transport in different parts of the catchment and the interlinkages of groundwater and
stream water.

900 It is important to note that our approach does not require the same number of
samples per site (Figure 2). The derived components constitute a frame in which all
samples are integrated independent of the number of sample per site. Thus, in our

application we get the information of how those sites with very little samples group or behave in relation to the others. Even a few samples might indicate for example that the respective site behaves similar to other sites with respect to some components and very different with respect to other components. The influence of single samples for the integration of the different sites into the global pattern of the water quality relationships summarized by the 4th component is an illustrative example for that (section 5.2). Thus, even occasional sampling at some sites helps assessing the strength of effects of the respective drivers at these sites and might support or contradict hypotheses on spatial variability and related long-term patterns of those influences. This information would be lost if those samples would be excluded beforehand.

In addition, the approach followed here does not require identical temporal sampling resolution at all sites or synchronous sampling dates. Thus, a strictly regular sampling design, which is hardly feasible, is no prerequisite. Correspondingly, data from different monitoring programs could be used for a joint analysis. Sampling intervals at the sampling sites with $N > 50$ were not normally distributed and biased towards deviations that are longer than the median (right panel Figure 2). Several series exhibited large time gaps. However, as sampling intervals did not change systematically throughout the monitoring period we assume that the effects on the results of the significance test with Mann-Kendall were negligible (section 3.2). In comparison, the trend estimations with Theil-Sen estimator and LOESS are more robust, as they incorporate the exact sampling dates explicitly in the calculations. Thus, we do not expect major effects on the sign of the Theil-Sen estimator or the general shape of the LOESS smooth at the given temporal resolution.

In general, the interpretation of the components should consider the temporal structure of the data set. For example in this study the drying out of the streams at the Peege sites and the most upstream sites of the Quillow in summer was the most important systematic deviation from an otherwise roughly similar sampling across seasons (left panel Figure 2). This information was included in the interpretation of the 1st component (section 5.3). If the monitoring would in general not have been performed roughly similarly across seasons, e.g. if one or more seasons would in

general be missing, the estimation of the seasonality would not be applicable. If the
935 monitoring would be such that there would be different seasons sampled in different
years, this would have to be considered in the estimation of the trend.

5.5 Exploratory framework

The application of a dimension reduction approach was motivated by the
940 assumption that drivers influencing water quality usually affect more than one solute,
and that single solutes are affected by more than one driver. Like in preceding
studies (e.g., Lischeid and Bittersohl, 2008; Lischeid et al., 2010), the representation
of water quality data in low-dimensional space required only a few components to
capture the 'main features' of the data set.

945 Whether the relationships in the data set are mainly linear ones, as in this study, or
whether there are considerably non-linear relationships as well, is usually not known
in advance. Thus, if the aim is to consider and check for possible non-linear
relationships in the analysis we recommend using PCA as a linear benchmark for
Isomap (demonstrated by Lischeid and Bittersohl, 2008). In a straightforward way this
950 allows for 1) assessing whether the dominant correlation structures in the data set
are mainly linear or non-linear, and 2) identifying those components, samples, sites
and periods deviating from the linear behaviour as captured by the PCA.

Based on the correlation of component scores and residuals, we formulated for
each considered component a hypothesis on a dominant driver influencing water
955 quality. Again, whether the relationships are linear, as it was for most of the global
relationships in this study (Figure S1-S4), is usually not known beforehand.
Summarizing the relationships between residuals and components with Spearman
rank correlation enables to consider non-linear relationships between residuals and
components as well, as long as they are monotonic. However, the main benefit in this
960 study was that Spearman rank correlation is less sensitive to extreme values
compared to Pearson correlation. This concerned especially the assessment of the
relationships of the residuals of SO_4^{2-} and Cl^- with the 2nd component and the
residuals of PO_4^{3-} and NH_4^+ with the 4th component (Figure S2 and S4), which were

way stronger expressed with Pearson correlation due to a few single extreme values.
965 The derived correlations differ from default loadings of PCA, which are defined as the
coefficients of the linear combination of the analysed variables which is used to
calculate the principal component scores. Those coefficients, scaled by the square
root of the eigenvalue of the respective component, are equivalent to the Pearson
970 correlation of PCA component scores and analysed variables. It is important to note
that the differences in the evaluation of the correlations of components and the
measured variables might lead to different interpretations of the components.

The treatment of censored values can substantially affect the derived components
and the subsequent interpretation of the results and has to be considered carefully
(Helsel, 2012 and references therein). For the application of Isomap, it is required to
975 provide numerical values for the values below the detection limit. For simplicity, we
here used half the detection limit as a marker for values below the detection limit. We
checked for the effect of this substitution by comparing the Isomap results of the
presented analysis with another Isomap analysis in which we excluded the two most
affected variables NO_2^- and PO_4^{3-} (Figure S4). The correlation of the Isomap scores
980 of the interpreted components 1 to 4 of version 1 (with NO_2^- and PO_4^{3-}) versus
version 2 (without NO_2^- and PO_4^{3-}) yielded a R^2 of cp1: 0.99, cp2: 0.98, cp3: 0.97,
cp4: 0.64. The comparison of the two versions with respect to the Spearman rank
correlations of Isomap scores of the first four components and the residuals (please
see Figure 3 for the respective values of version 1) yielded a R^2 of cp1: 0.98, cp2:
985 0.99, cp3: 0.99, cp4: 0.88. Thus the first three components are virtually identical. The
4th component is affected, because PO_4^{3-} is one of the important variables for this
component (Figure 3). Still, the similarity of the correlations of Isomap scores and the
4th component of both versions suggests that the characteristics of the 4th component
were not merely introduced by the substitution of the values below the detection limit
990 for PO_4^{3-} . Thus, overall, the substitution did not substantially affect the interpretation
of the considered components; however, we acknowledge that the replacement of
censored data with some fraction of the reporting limit is not generally appropriate for
dealing with censored data (Gilliom and Helsel, 1986; Singh and Nocerino, 2002;
Helsel, 2005; Helsel, 2006; Helsel, 2012). For data sets which are more heavily
995 affected by censored values other dimension reduction methods such as the rank

based approaches suggested by Helsel (2012) should be preferred.

For data sets in which the number of measured variables differs between the sites there is a trade-off between number of considered variables versus number of considered sites. Depending on the focus of the study different selections of the data set can be used. For example if the main focus of the study is to analyse the multivariate water quality dynamics in detail it might be worthwhile to disregard some sites to be able to include more variables. If the focus is to maintain the spatial coverage of the monitoring, like in this study, more sites might be of more value than additional variables. Depending on the available resources a third option would be to perform two analyses, one focusing on more variables, one on more sites, and comparing the results. If it is possible to link the considered components, like we did in the preceding paragraph, this proceeding can be used for spatial extrapolation of the hypotheses derived from the version which included more variables. However, in our case the sketched trade-off was not dramatic. Thus, we excluded only the variables with more than 5% missing values (section 2.2) to keep the possible effect of any method of replacement rather low.

To prevent adding variables with little information gain it is recommendable to perform a correlation analysis beforehand and rule out highly correlated variables. For this purpose we recommend not to rely only on a numerical measure of correlation, but to visually examine the scatterplots of the respective variables to check for systematic deviations from the global relationship. There might be e.g. some sites or seasons in which the otherwise tight relationship gets weaker pointing to local or temporal phenomena.

Technically it is possible to combine other data than solutes (e.g. sediment data, biological indicators, etc.) together with the solutes in one joined data set for the derivation of the components. However, the multivariate components derived by the dimension reduction approach are the basis of the subsequent interpretation of the results. It has to be considered as well that all included variables are equally weighted due to the z-scaling prior to the dimension reduction. Thus, including other types of data might in some cases complicate the interpretation. In general, we recommend not to mix variables with different scales of measures (e.g. nominal

variables and ratio scaled variables) in the data base for the derivation of the components.

1030 Instead, data which was not used in the derivation of the components can be used as additional information for their interpretation. For example in this study, we used in addition to the spatiotemporal features of the components other variables like groundwater level series, Fe_2^+ and HCO_3^- concentration from the groundwater samples, the spatial distribution of land use, and expert knowledge on the study area for the derivation of the hypotheses. A thorough testing of the hypotheses, for 1035 example through hydrochemical modelling or numerical experiments with virtual catchments was out of the scope of this study.

1040 However, an interpretation of the components as distinct drivers is no prerequisite for the further analysis of the components. In any case, the components constitute, and can simply be used as, a condensed representation of similar behaviour among the analysed variables according to the constraints of the used dimension reduction method.

1045 For PCA and Isomap each component describes subsequently the correlation structure that is most prominent in the remainder of what has not already been assigned to the higher-ranked components. This implies that each component has to be interpreted with respect to the higher ranked components. Also, the consideration of the respective other components in the interpretation of a component can be helpful to carve out its characteristics as it was done here with the residuals of the multiple linear regression of the respective three other components and the measured variables (e.g. Figure S1). Beyond that, it can be helpful to elucidate the 1050 interaction of the components as it was done here e.g. for scores of the 1st and 2nd component (Figure 4 lower panel).

1055 The sites differed substantially with respect to the median values of the four analysed multivariate components (Figure 5). However, these components comprised the largest fraction of the interpoint distances at any single site with more than 18 samples (Table S4). We conclude that our results identified major regional phenomena rather than site-specific peculiarities. This is consistent with the prior

assumption that there are a few dominant drivers which determine the main stream water and groundwater quality dynamics in the region. This gives some confidence to hypothesize that these drivers presumably play a major role even in adjacent
1060 catchments that have not been sampled so far.

To detect and characterize the dominant changes in the multivariate water quality data we explored whether there were shifts in time in specific components, whether they were linear or non-linear in nature, and if trends did occur at many or only at single sites. For example for the scores of the 1st component, the Mann-Kendall
1065 approach identified monotonic trends at various stream water sampling sites (Figure 6). However, the linear trend estimation failed to detect the non-linear trend that was observed at many series (Figure 8). This reflects the well-known sensitivity of global linear trend estimation to low-frequency patterns that are not entirely covered by the observation period (Koutsoyiannis, 2006; Milliman et al., 2008; Lins and Cohn, 2011).

1070 The LOESS smooths of the de-seasonalised series, on the other hand, did clearly reveal the similarity between the long term behaviour of groundwater level in the deep aquifer and series of the 1st component. In our exploratory approach, the LOESS smooth of the de-seasonalised series served as a descriptive tool for illustrating rather than for proving non-linear long-term patterns. No significance test
1075 was applied. The outcome of the LOESS smoother highly depends on the parameterisation of the approach (i.e., the degree of smoothness) that would have to be justified prior testing of significance.

6 Conclusions

1080 We suggested and tested an exploratory approach for the detection of dominant changes in multivariate water quality data sets with irregular sampling in space and time. The combination of the selected methods aimed to provide a broadly applicable exploratory framework for typical existing monitoring data sets, e.g. from environmental agencies, which are often characterized by relatively low sampling
1085 frequency and irregularities of the sampling in space and / or time. In the approach, we applied a dimension reduction method to derive multivariate water quality

components and analysed their spatiotemporal features with respect to changes that concerned more than single sites, short-term fluctuations or single events.

The components can be used irrespective of an interpretation as drivers
1090 influencing water quality. By definition, the components are a sparse description of
the common dynamics among the water quality variables. Thus, similar behaviour in
space and time among the water quality variables as well as systematic changes in
the multivariate water quality data can be addressed in a purely descriptive manner.
This can be used for example to test the often implicit assumption of constant
1095 boundary conditions of scientific process and modelling studies. Furthermore, the
components and their spatiotemporal features per se can serve as reference for
further studies, e.g. detailed process studies with higher temporal resolution, and the
assessment of future developments of water quality in an area. In this study, the
components were used to develop hypotheses on dominant drivers influencing water
1100 quality and to analyse the temporal and spatial variability of those influences.

It is emphasized that the presented approach is readily applicable with data from
common monitoring programs without specific requirements concerning sampling
frequency or regular distribution of sampling sites, sampling dates, and sampling
intervals, except that there should be no systematic bias in the respective distribution.
1105 Even variables which have to be excluded from the derivation of the components, for
example because of the amount of missing values or because they have been
monitored only at subsets of the sampling sites, can be related to the components as
additional information for their interpretation. For example in this study we used the
concentration of Fe^{2+} and HCO_3^- in the groundwater as additional information for the
1110 interpretation of the 2nd component. Thus the approach allows an efficient use of
existing monitoring data as well as the consideration of often neglected 'irregular'
pieces of data from e.g. pilot studies or single sampling campaigns. Irregularities in
the structure of a data set are not seen as fundamental hindrance, but as additional
source of information. We see this as a major advantage for the analysis of
1115 comprehensive water quality monitoring programs, both from a scientific perspective
and from a more applied point of view of e.g. water resources and environmental
agencies. Therefore, we recommend the approach especially for the exploratory

assessment of existing long term low frequency multivariate water quality monitoring data sets.

1120

Data availability

A selection of R-scripts that covers the main steps of the exploratory framework is provided at doi: 10.4228/ZALF.2017.340 under CC-BY 4.0 licence. It comes together with the water quality data used in this manuscript and some examples of exploratory plots not included in this manuscript.

1125

Acknowledgements

The long-term monitoring program that provided the data for this study would not have been possible without the diligent work of many colleagues. We would like to thank Roswitha Schulz, Dorith Henning, Ralph Tauschke, Joachim Bartelt (†), Peter Bernd and Bernd Schwien for installation of sampling sites, including numerous groundwater wells, and for performing the sampling program in spite of sometimes harsh field conditions. In addition we acknowledge the painstaking work of Rita Schwarz (†) and Melitta Engel in the chemical laboratory of the Institute of Landscape Hydrology as well as of the staff of the central chemical laboratory of the Leibniz Centre for Agricultural Landscape Research. We thank Gernot Verch of the research station Dedelow for the information on the historical development of agricultural land use in the study area. We thank the editor Stacey Archfield for the smooth handling of the review process and the two anonymous referees for their contributions and constructive comments, especially the issue of censored values, which helped to improve the manuscript. Christian Lehr received funding from the Leibniz Association (SAW-2012-IGB-4167) within the International Leibniz Research School: Aquatic boundaries and linkages in a changing environment (Aqualink). We used free software products under the GNU General Public Licence and thank the respective communities. Maps and the determination of the catchments' areas were carried out with Quantum GIS 2.14.1 (<http://www.qgis.org/index.php>) and statistical analyses and the graphs were performed using the R statistical software

1140

1145

environment, version 3.4.1 (R Core Team, 2017; <http://www.r-project.org>).

1150 **References**

Aubert, A. H., Gascuel-Oudou, C., Gruau, G., Akkal, N., Faucheux, M., Fauvel, Y., Grimaldi, C., Hamon, Y., Jaffrézic, A., Lecoz-Boutnik, M., Molénat, J., Petitjean, P., Ruiz, L. and Merot, P.: Solute transport dynamics in small, shallow groundwater-dominated agricultural catchments: insights from a high-frequency, multisolute 10 yr-long monitoring study, *Hydrology and Earth System Sciences*, 17, 1379-1391, doi: 1155 10.5194/hess-17-1379-2013, 2013.

Basu, N. B., Destouni, G., Jawitz, J. W., Thompson, S. E., Loukinova, N. V., Darracq, A., Zanardo, S., Yaeger, M., Sivapalan, M., Rinaldo, A. and Rao, P. S. C.: Nutrient loads exported from managed catchments reveal emergent biogeochemical 1160 stationarity, *Geophysical Research Letters*, 37, doi: 10.1029/2010GL045168, 2010.

Basu, N. B., Thompson, S. E. and Rao, P. S. C.: Hydrologic and biogeochemical functioning of intensively managed catchments: A synthesis of top-down analyses, *Water Resources Research*, 47, doi: 10.1029/2011WR010800, 2011.

Beudert, B., Bäessler, C., Thorn, S., Noss, R., Schröder, B., Dieffenbach-Fries, H., 1165 Foullois, N. and Müller, J.: Bark Beetles Increase Biodiversity While Maintaining Drinking Water Quality, *Conservation Letters*, 8, 272-281, doi: 10.1111/conl.12153, 2015.

Bieroza, M. Z., Heathwaite, A. L., Mullinger, N. J. and Keenan, P. O.: Understanding nutrient biogeochemistry in agricultural catchments: the challenge of 1170 appropriate monitoring frequencies, *Environmental Science: Processes & Impacts*, 16, 1676–1691, doi: 10.1039/C4EM00100A, 2014.

Blaen, P. J., Khamis, K., Lloyd, C., Comer-Warner, S., Ciocca, F., Thomas, R. M., MacKenzie, A. R. and Krause, S.: High-frequency monitoring of catchment nutrient 1175 exports reveals highly variable storm event responses and dynamic source zone activation, *Journal of Geophysical Research: Biogeosciences*, 122, 2265–2281, doi: 10.1002/2017JG003904, 2017.

Broers, H. P. and van der Grift, B.: Regional monitoring of temporal changes in

groundwater quality, *Journal of Hydrology*, 296, 192-220, doi: 10.1016/j.jhydrol.2004.03.022, 2004.

1180 Burt, T. P., Howden, N. J. K., Worrall, F. and McDonnell, J. J.: On the value of long-term, low-frequency water quality sampling: avoiding throwing the baby out with the bathwater, *Hydrological Processes*, 25, 828-830, doi: 10.1002/hyp.7961, 2011.

Burt, T. P., Howden, N. J. K., Worrall, F. and Whelan, M. J.: Importance of long-term monitoring for detecting environmental change: lessons from a lowland river in south east England, *Biogeosciences*, 5, 1529-1535, doi: 10.5194/bg-5-1529-2008, 2008.

Capell, R., Tetzlaff, D., Malcolm, I., Hartley, A. and Soulsby, C.: Using hydrochemical tracers to conceptualise hydrological function in a larger scale catchment draining contrasting geologic provinces, *Journal of Hydrology*, 408, 164-177, doi: 10.1016/j.jhydrol.2011.07.034, 2011.

Cassidy, R. and Jordan, P.: Limitations of instantaneous water quality sampling in surface-water catchments: Comparison with near-continuous phosphorus time-series data, *Journal of Hydrology*, 405, 182–193, doi: 10.1016/j.jhydrol.2011.05.020, 2011.

Cherobim, V. F., Huang, C.-H. and Favaretto, N.: Tillage system and time post-liquid dairy manure: Effects on runoff, sediment and nutrients losses, *Agricultural Water Management*, 184, 96–103, doi: 10.1016/j.agwat.2017.01.004, 2017.

Cleveland, R., Cleveland, W., McRae, J. and Terpenning, I.: STL: A seasonal-trend decomposition procedure based on loess, *Journal of Official Statistics*, 6, 3-73, 1990.

Cleveland, W. S.: Robust Locally Weighted Regression and Smoothing Scatterplots, *Journal of the American Statistical Association*, 74, 829-836, doi: 10.1080/01621459.1979.10481038, 1979.

Cleveland, W. S. and Devlin, S. J.: Locally Weighted Regression: An Approach to Regression Analysis by Local Fitting, *Journal of the American Statistical Association*, 83, 596-610, doi: 10.1080/01621459.1988.10478639, 1988.

1205 Cloutier, V., Lefebvre, R., Therrien, R. and Savard, M. M.: Multivariate statistical analysis of geochemical data as indicative of the hydrogeochemical evolution of groundwater in a sedimentary rock aquifer system, *Journal of Hydrology*, 353, 294-313, doi: 10.1016/j.jhydrol.2008.02.015, 2008.

Cohn, T. A. and Lins, H. F.: Nature's style: Naturally trendy, *Geophysical Research Letters*, 32, doi: 10.1029/2005GL024476, 2005.

EU: Council Directive 91/676/EEC of 12 December 1991 concerning the protection of waters against pollution caused by nitrates from agricultural sources, *Official Journal of the European Communities*, 1-8, 1991.

EU: Directive 2000/60/EC of the European Parliament and of the Council of 23
1215 October 2000 establishing a framework for Community action in the field of water policy, *Official Journal of the European Communities*, 1-70, 2000.

EU: Directive 2006/118/EC of the European Parliament and of the Council of 12 December 2006 on the protection of groundwater against pollution and deterioration, *Official Journal of the European Union*, 19-31, 2006.

1220 Fitzpatrick, M., Long, D. and Pijanowski, B.: Exploring the effects of urban and agricultural land use on surface water chemistry, across a regional watershed, using multivariate statistics, *Applied Geochemistry*, 22, 1825-1840, doi: 10.1016/j.apgeochem.2007.03.047, 2007.

Gámez, A. J., Zhou, C. S., Timmermann, A. and Kurths, J.: Nonlinear
1225 dimensionality reduction in climate data, *Nonlinear Processes in Geophysics*, 11, 393-398, doi: 10.5194/npg-11-393-2004, 2004.

Geng, X., Zhan, D.-C. and Zhou, Z.-H.: Supervised nonlinear dimensionality reduction for visualization and classification, *IEEE Transactions on Systems, Man, and Cybernetics, Part B (Cybernetics)*, 35, 1098-1107, doi:
1230 10.1109/TSMCB.2005.850151, 2005.

Gilliom, R. J. and Helsel, D. R.: Estimation of Distributional Parameters for Censored Trace Level Water Quality Data: 1. Estimation Techniques, *Water*

Resources Research, 22, 135-146, doi: 10.1029/WR022i002p00135, 1986.

1235 Glynn, E., Chen, J. and Mushegian, A.: Detecting periodic patterns in unevenly spaced gene expression time series using Lomb--Scargle periodograms, *Bioinformatics*, 22, 310-316, doi: 10.1093/bioinformatics/bti789, 2006.

1240 Graeber, D., Gelbrecht, J., Pusch, M. T., Anlanger, C. and von Schiller, D.: Agriculture has changed the amount and composition of dissolved organic matter in Central European headwater streams, *Science of The Total Environment*, 438, 435-446, doi: 10.1016/j.scitotenv.2012.08.087, 2012.

Grayson, R. and Blöschl, G. (Ed.): *Spatial patterns in catchment hydrology: observations and modelling*, Cambridge University Press Cambridge, UK, 2000.

1245 Haag, I. and Westrich, B.: Processes governing river water quality identified by principal component analysis, *Hydrological Processes*, 16, 3113-3130, doi: 10.1002/hyp.1091, 2002.

Halliday, S. J., Wade, A. J., Skeffington, R. A., Neal, C., Reynolds, B., Rowland, P., Neal, M. and Norris, D.: An analysis of long-term trends, seasonality and short-term dynamics in water quality data from Plynlimon, Wales, *Science of The Total Environment*, 434, 186-200, doi: 10.1016/j.scitotenv.2011.10.052, 2012.

1250 Hannemann, M. and Schirrmeister, W.: Paläohydrogeologische Grundlagen der Entwicklung der Süß-/Salzwassergrenze und der Salzwasseraustritte in Brandenburg, *Brandenburg Geowissenschaftliche Beiträge*, 5, 61-72, 1998.

1255 Helsel, D. R.: More Than Obvious: Better Methods for Interpreting Nondetect Data, *Environmental Science & Technology*, 39, 419A-423A, doi: 10.1021/es053368a, 2005.

Helsel, D. R.: Fabricating data: How substituting values for nondetects can ruin results, and what can be done about it, *Chemosphere*, 65, 2434-2439, doi: 10.1016/j.chemosphere.2006.04.051, 2006.

Helsel, D. R.: *Statistics for Censored Environmental Data Using Minitab and R*, 2nd

1260 ed., John Wiley & Sons, 2012.

Hocke, K.: Phase estimation with the Lomb-Scargle periodogram method, *Annales geophysicae*, 16, 356–358, 1998.

Hocke, K. and Kämpfer, N.: Gap filling and noise reduction of unevenly sampled data by means of the Lomb-Scargle periodogram, *Atmospheric Chemistry and Physics*, 9, 4197-4206, doi: 10.5194/acp-9-4197-2009, 2009.

Hooda, P. S., Edwards, A. C., Anderson, H. A. and Miller, A.: A review of water quality concerns in livestock farming areas, *Science of The Total Environment*, 250(1), 143–167, doi: 10.1016/S0048-9697(00)00373-9, 2000.

Hooper, R. P., Christophersen, N. and Peters, N. E.: Modelling streamwater chemistry as a mixture of soilwater end-members — An application to the Panola Mountain catchment, Georgia, U.S.A., *Journal of Hydrology*, 116, 321-343, doi: 10.1016/0022-1694(90)90131-G, 1990.

Horne, J. and Baliunas, S.: A prescription for period analysis of unevenly sampled time series, *The Astrophysical Journal*, 302, 757-763, 1986.

Hotelling, H.: Analysis of a complex of statistical variables into principal components, *Journal of Educational Psychology*, 24, 417-441, doi: 10.1037/h0071325, 1933.

Howden, N. J. K., Burt, T. P., Worrall, F. and Whelan, M. J.: Monitoring fluvial water chemistry for trend detection: hydrological variability masks trends in datasets covering fewer than 12 years, *J. Environ. Monit.*, 13, 514-521, doi: 10.1039/C0EM00722F, 2011.

Jessen, S., Postma, D., Thorling, L., Müller, S., Leskelä, J. and Engesgaard, P.: Decadal variations in groundwater quality: A legacy from nitrate leaching and denitrification by pyrite in a sandy aquifer, *Water Resources Research*, 53, 184-198, doi: 10.1002/2016WR018995, 2017.

Jolliffe, I.: *Principal Component Analysis*, 2nd ed., Springer, 2002.

Jolliffe, I. T. and Cadima, J.: Principal component analysis: a review and recent developments, *Philosophical Transactions of the Royal Society of London A: Mathematical, Physical and Engineering Sciences*, 374, doi: 10.1098/rsta.2015.0202, 1290 2016.

Jørgensen, J. C., Jacobsen, O. S., Elberling, B. and Aamand, J.: Microbial Oxidation of Pyrite Coupled to Nitrate Reduction in Anoxic Groundwater Sediment, *Environmental Science & Technology*, 43, 4851-4857, doi: 10.1021/es803417s, 2009.

Kalettko, T. and Rudat, C.: Hydrogeomorphic types of glacially created kettle holes in North-East Germany, *Limnologica - Ecology and Management of Inland Waters*, 36, 54–64, doi: 10.1016/j.limno.2005.11.001, 1295 2006.

Kalettko, T. and Steidl, J.: Measurement of stream water chemical ingredients, Quillow catchment, Germany, doi: 10.4228/ZALF.1998.265, 2014.

Kendall, M.: *Rank Correlation Methods*, Charles Griffin Book Series, 1990.

1300 Kim, D. and Oh, H.-S.: EMD: A Package for Empirical Mode Decomposition and Hilbert Spectrum, *The R Journal*, 1, 40-46, 2009.

Kim, D. and Oh, H.-S.: *EMD: Empirical Mode Decomposition and Hilbert Spectral Analysis*, 2014.

1305 Kirchner, J., Feng, X. and Neal, C.: Fractal stream chemistry and its implications for contaminant transport in catchments, *Nature*, 403, 524-527, 2000.

Kirchner, J., Feng, X., Neal, C. and Robson, A.: The fine structure of water-quality dynamics: the (high-frequency) wave of the future, *Hydrological Processes*, 18, 1353-1359, doi: 10.1002/hyp.5537, 2004.

1310 Kirchner, J. W. and Neal, C.: Universal fractal scaling in stream chemistry and its implications for solute transport and water quality trend detection, *Proceedings of the National Academy of Sciences*, 110, 12213-12218, doi: 10.1073/pnas.1304328110, 2013.

Koutsoyiannis, D.: Nonstationarity versus scaling in hydrology, *Journal of Hydrology*, 324, 239-254, doi: 10.1016/j.jhydrol.2005.09.022, 2006.

1315 Kroeze, C., Hofstra, N., Ivens, W., Löhr, A., Strokal, M. and van Wijnen, J.: The links between global carbon, water and nutrient cycles in an urbanizing world — the case of coastal eutrophication, *Current Opinion in Environmental Sustainability*, 5, 566-572, doi: 10.1016/j.cosust.2013.11.004, 2013.

Lahmer, W., Dannowski, R., Steidl, J., Pfützner, B.: Flächendeckende
1320 Modellierung von Wasserhaushaltsgrößen für das Land Brandenburg, *Studien und Tagungsberichte Schriftenreihe des Landesumweltamtes Brandenburg*, 27, 2000.

Lee, J. A. and Verleysen, M.: *Nonlinear Dimensionality Reduction*, Springer, 2007.

Lehr, C., Pöschke, F., Lewandowski, J. and Lischeid, G.: A novel method to evaluate the effect of a stream restoration on the spatial pattern of hydraulic
1325 connection of stream and groundwater, *Journal of Hydrology*, 527, 394-401, doi: 10.1016/j.jhydrol.2015.04.075, 2015.

Lins, H. F. and Cohn, T. A.: Stationarity: Wanted Dead or Alive?, *JAWRA Journal of the American Water Resources Association*, 47, 475-480, doi: 10.1111/j.1752-1688.2011.00542.x, 2011.

1330 Lischeid, G. and Bittersohl, J.: Tracing biogeochemical processes in stream water and groundwater using non-linear statistics, *Journal of Hydrology*, 357, 11-28, doi: 10.1016/j.jhydrol.2008.03.013, 2008.

Lischeid, G.; Krám, P. and Weyer, C.: In: Müller, F.; Baessler, C.; Schubert, H. & Klotz, S. (Ed.), *Tracing Biogeochemical Processes in Small Catchments Using Non-*
1335 *linear Methods*, Springer Netherlands, 2010.

Lischeid, G., Kalettka, T., Merz, C. and Steidl, J.: Monitoring the phase space of ecosystems: Concept and examples from the Quillow catchment, Uckermark, *Ecological Indicators*, 65, 55-65, doi: 10.1016/j.ecolind.2015.10.067, 2016.

Lomb, N.: Least-squares frequency analysis of unequally spaced data,

1340 Astrophysics and space science, 39, 447-462, 1976.

Mahecha, M. D., Martínez, A., Lischeid, G. and Beck, E.: Nonlinear dimensionality reduction: Alternative ordination approaches for extracting and visualizing biodiversity patterns in tropical montane forest vegetation data, *Ecological Informatics*, 2, 138-49, doi: 10.1016/j.ecoinf.2007.05.002, 2007.

1345 Mann, H. B.: Nonparametric Tests Against Trend, *Econometrica*, 13, 245-259, 1945.

Massmann, G., Pekdeger, A. and Merz, C.: Redox processes in the Oderbruch polder groundwater flow system in Germany, *Applied Geochemistry*, 19, 863-886, doi: 10.1016/j.apgeochem.2003.11.006, 2004.

1350 Massmann, G., Tichomirowa, M., Merz, C. and Pekdeger, A.: Sulfide oxidation and sulfate reduction in a shallow groundwater system (Oderbruch Aquifer, Germany), *Journal of Hydrology*, 278, 231-243, doi: 10.1016/S0022-1694(03)00153-7, 2003.

McLeod, A.: Kendall: Kendall rank correlation and Mann-Kendall trend test, 2011. URL: <https://CRAN.R-project.org/package=Kendall> (last access: 08 October 2017).

1355 Meals, D. W., Dressing, S. A. and Davenport, T. E.: Lag Time in Water Quality Response to Best Management Practices: A Review, *Journal of Environmental Quality*, 39, 85-96, 2010.

Merz, C. and Steidl, J.: Measurement of groundwater heads, Quillow catchment, Germany, doi: 10.4228/ZALF.2000.272, 2014a.

1360 Merz, C. and Steidl, J.: Measurement of ground water chemical ingredients, Quillow catchment, Germany, doi: 10.4228/ZALF.2000.266, 2014b.

Merz, C. and Steidl, J.: Data on geochemical and hydraulic properties of a characteristic confined/unconfined aquifer system of the younger Pleistocene in northeast Germany, *Earth System Science Data*, 7, 109-116, doi: 10.5194/essd-7-

1365 109-2015, 2015.

Merz, C., Steidl, J. and Dannowski, R.: Parameterization and regionalization of redox based denitrification for GIS-embedded nitrate transport modeling in Pleistocene aquifer systems, *Environmental Geology*, 58, 1587, doi: 10.1007/s00254-008-1665-6, 2009.

1370 Milliman, J. D., Farnsworth, K. L., Jones, P. D., Xu, K. H. and Smith, L. C.: Climatic and anthropogenic factors affecting river discharge to the global ocean, 1951–2000, *Global and Planetary Change*, 62, 187–194, doi: 10.1016/j.gloplacha.2008.03.001, 2008.

1375 Molenat, J., Gascuel-Oudou, C., Ruiz, L. and Gruau, G.: Role of water table dynamics on stream nitrate export and concentration in agricultural headwater catchment (France), *Journal of Hydrology*, 348, 363-378, doi: 10.1016/j.jhydrol.2007.10.005, 2008.

1380 Neal, C.: The water quality functioning of the upper River Severn, Plynlimon, mid-Wales: issues of monitoring, process understanding and forestry, *Hydrology and Earth System Sciences*, 8, 521-532, doi: 10.5194/hess-8-521-2004, 2004.

1385 Neal, C., Reynolds, B., Rowland, P., Norris, D., Kirchner, J. W., Neal, M., Sleep, D., Lawlor, A., Woods, C., Thacker, S., Guyatt, H., Vincent, C., Hockenhull, K., Wickham, H., Harman, S. and Armstrong, L.: High-frequency water quality time series in precipitation and streamflow: From fragmentary signals to scientific challenge, *Science of The Total Environment*, 434, 3-12, doi: 10.1016/j.scitotenv.2011.10.072, 2012.

1390 Oksanen, J., Blanchet, F. G., Friendly, M., Kindt, R., Legendre, P., McGlinn, D., Minchin, P. R., O'Hara, R. B., Simpson, G. L., Solymos, P., Stevens, M. H. H., Szoecs, E. and Wagner, H. 2017. *vegan: Community Ecology Package*. URL: <https://CRAN.R-project.org/package=vegan> (last access: 08 October 2017).

Pearson, K. F.: LIII. On lines and planes of closest fit to systems of points in space, *Philosophical Magazine*, 2, 559-572, doi: 10.1080/14786440109462720, 1901.

Pierson-Wickmann, A.-C., Aquilina, L., Martin, C., Ruiz, L., Molénat, J., Jaffrézic, A.

and Gascuel-Oudou, C.: High chemical weathering rates in first-order granitic
1395 catchments induced by agricultural stress, *Chemical Geology*, 265, 369-380, doi:
10.1016/j.chemgeo.2009.04.014, 2009.

Press, W., Flannery, B., Teukolsky, S., Vetterling, W. and others: *Numerical
recipes*, Cambridge university press, 2007.

Raymond, P. A., Oh, N.-H., Turner, R. E. and Broussard, W.: Anthropogenically
1400 enhanced fluxes of water and carbon from the Mississippi River, *Nature*, 451, 449-
452, doi: 10.1038/nature06505, 2008.

Scanlon, B. R., Jolly, I., Sophocleous, M. and Zhang, L.: Global impacts of
conversions from natural to agricultural ecosystems on water resources: Quantity
versus quality, *Water Resources Research*, 43, doi: 10.1029/2006WR005486, 2007.

1405 Scargle, J.: Studies in astronomical time series analysis. II-Statistical aspects of
spectral analysis of unevenly spaced data, *The Astrophysical Journal*, 263, 835-853,
1982.

Scargle, J.: Studies in astronomical time series analysis. III-Fourier transforms,
autocorrelation functions, and cross-correlation functions of unevenly spaced data,
1410 *The Astrophysical Journal*, 343, 874-887, 1989.

Schilli, C., Lischeid, G. and Rinklebe, J.: Which processes prevail?: Analyzing
long-term soil solution monitoring data using nonlinear statistics, *Geoderma*, 158,
412-420, doi: 10.1016/j.geoderma.2010.06.014, 2010.

Schuetz, T., Gascuel-Oudou, C., Durand, P. and Weiler, M.: Nitrate sinks and
1415 sources as controls of spatio-temporal water quality dynamics in an agricultural
headwater catchment, *Hydrology and Earth System Sciences*, 20, 843-857, doi:
10.5194/hess-20-843-2016, 2016.

Sen, P. K.: Estimates of the Regression Coefficient Based on Kendall's Tau,
Journal of the American Statistical Association, 63, 1379-1389, doi:
1420 10.1080/01621459.1968.10480934, 1968.

Singh, A. and Nocerino, J.: Robust estimation of mean and variance using environmental data sets with below detection limit observations, *Chemometrics and Intelligent Laboratory Systems*, 60, 69-86, doi: 10.1016/S0169-7439(01)00186-1, 2002.

1425 Sivakumar, B.: Dominant processes concept in hydrology: moving forward, *Hydrological Processes*, 18, 2349-2353, doi: 10.1002/hyp.5606, 2004.

Stumm, W. and Morgan, J.: *Aquatic chemistry*, Wiley, 1996.

R Core Team 2017. R: A Language and Environment for Statistical Computing. R Foundation for Statistical Computing, Vienna, Austria. URL: <https://www.R-project.org/> (last access: 08 October 2017).

1430 Rode, M., Wade, A. J., Cohen, M. J., Hensley, R. T., Bowes, M. J., Kirchner, J. W., Arhonditsis, G. B., Jordan, P., Kronvang, B., Halliday, S. J., Skeffington, R. A., Rozemeijer, J. C., Aubert, A. H., Rinke, K. and Jomaa, S.: Sensors in the Stream: The High-Frequency Wave of the Present, *Environmental Science & Technology*, 50, 10297–10307, doi: 10.1021/acs.est.6b02155, 2016.

Tenenbaum, J., Silva, V. and Langford, J.: A global geometric framework for nonlinear dimensionality reduction, *Science*, 290, 2319-2323, 2000.

1440 Tesmer, M., Möller, P., Wieland, S., Jahnke, C., Voigt, H. and Pekdeger, A.: Deep reaching fluid flow in the North East German Basin: origin and processes of groundwater salinisation, *Hydrogeology Journal*, 15, 1291-1306, doi: 10.1007/s10040-007-0176-y, 2007.

Theil, H.: A rank-invariant method of linear and polynomial regression analysis, 1, 2 and 3, 53, 386-392, 1950.

1445 Tunaley, C., Tetzlaff, D., Lessels, J. and Soulsby, C.: Linking high-frequency DOC dynamics to the age of connected water sources, *Water Resources Research*, 52, 5232–5247, doi: 10.1002/2015WR018419, 2016.

Usunoff, E. J. and Guzmán-Guzmán, A.: *Multivariate Analysis in Hydrochemistry:*

An Example of the Use of Factor and Correspondence Analyses, *Ground Water*, 27, 27-34, doi: 10.1111/j.1745-6584.1989.tb00004.x, 1989.

1450 Van der Maaten, L., Postma, E. and van den Herik, H.: Dimensionality Reduction: A Comparative Review, *TiCC-TR 2009-005*, 2009.

Wade, A. J., Palmer-Felgate, E. J., Halliday, S. J., Skeffington, R. A., Loewenthal, M., Jarvie, H. P., Bowes, M. J., Greenway, G. M., Haswell, S. J., Bell, I. M., Joly, E., Fallatah, A., Neal, C., Williams, R. J., Gozzard, E. and Newman, J. R.:
1455 Hydrochemical processes in lowland rivers: insights from in situ, high-resolution monitoring, *Hydrology and Earth System Sciences*, 16, 4323–4342, doi: 10.5194/hess-16-4323-2012, 2012.

Weyer, C., Peiffer, S., Schulze, K., Borcken, W. and Lischeid, G.: Catchments as heterogeneous and multi-species reactors: An integral approach for identifying
1460 biogeochemical hot-spots at the catchment scale, *Journal of Hydrology*, 519, Part B, 1560-1571, doi: 10.1016/j.jhydrol.2014.09.005, 2014.

Weymann, D., Geistlinger, H., Well, R., von der Heide, C. and Flessa, H.: Kinetics of N₂O production and reduction in a nitrate-contaminated aquifer inferred from laboratory incubation experiments, *Biogeosciences*, 7, 1953-1972, doi: 10.5194/bg-7-
1465 1953-2010, 2010.

Wriedt, G., Spindler, J., Neef, T., Meißner, R. and Rode, M.: Groundwater dynamics and channel activity as major controls of in-stream nitrate concentrations in a lowland catchment system?, *Journal of Hydrology*, 343, 154-168, doi: 10.1016/j.jhydrol.2007.06.010, 2007.

1470 Yue, S., Pilon, P., Phinney, B. and Cavadias, G.: The influence of autocorrelation on the ability to detect trend in hydrological series, *Hydrological Processes*, 16, 1807-1829, doi: 10.1002/hyp.1095, 2002.

Zhang, Y.-C., Slomp, C. P., Broers, H. P., Passier, H. F. and Cappellen, P. V.: Denitrification coupled to pyrite oxidation and changes in groundwater quality in a
1475 shallow sandy aquifer, *Geochimica et Cosmochimica Acta*, 73, 6716-6726, doi:

10.1016/j.gca.2009.08.026, 2009.

Zhang, Q., Harman, C. J., and Kirchner, J. W.: Evaluation of statistical methods for quantifying fractal scaling in water-quality time series with irregular sampling, *Hydrology and Earth System Sciences*, 22, 1175-1192, doi: 10.5194/hess-22-1175-1480 2018, 2018.

Appendix A

Lomb-Scargle

A given discrete time series $Y(t_i)$ with $(i = 1, \dots, N)$ and centred around zero can be
1485 described as a superposition from sin- and cos-terms with amplitudes a and b , time
 t_i , angular frequency $\omega = 2\pi f$ and a noise term n_i .

$$Y(t_i) = a \cos \omega t_i + b \sin \omega t_i + n_i \quad (1)$$

Lomb (1976) introduced an additional factor Tau to consider for deviations from the
evenly spaced case.

$$1490 \quad \tau_j = \frac{1}{2\omega_j} \bullet \arctan 2 \left(\sum_i^N \sin 2\omega_j (t_i - t_{ave}), \sum_i^N \cos 2\omega_j (t_i - t_{ave}) \right) \quad (2)$$

The constant $t_{ave} = \min(t) - \max(t)$ scales the term to the centre of the period covered
by the series for every frequency j . If the starting point of the series is set to zero t_{ave}
enables to correct for offsets between the spectral components and thus allows to
1495 correctly reconstruct the original series out of its spectral components (Hocke 1998;
Hocke and Kämpfer, 2009).

With these two extensions of the time term, equation 1 can be rewritten as

$$Y(t_i) = A \cos(\omega(t_i - \tau - t_{ave}) + \phi) + n_i \quad (3)$$

with amplitude $A = \sqrt{a^2 + b^2}$ and phase $\phi = \arctan(b/a)$.

1500 The Lomb-Scargle periodogram $P_N(\omega)$ (equation 4) normalized with the total variance
of the data σ^2 equals the linear least square fit of the time series model in equations
1 and 3 for a certain frequency (Lomb, 1976; Press et al., 2007).

$$P_N(\omega) = \frac{1}{2\sigma^2} \left\{ \frac{\left(\sum_i^N Y(t_i) \cos[\omega_j(t_i - \tau - t_{ave})] \right)^2}{\sum_i^N \cos^2[\omega_j(t_i - \tau - t_{ave})]} + \frac{\left(\sum_i^N Y(t_i) \sin[\omega_j(t_i - \tau - t_{ave})] \right)^2}{\sum_i^N \sin^2[\omega_j(t_i - \tau - t_{ave})]} \right\} \quad (4)$$

1505 The amplitudes a and b can be computed out of the square root of the corresponding sin- and cos-terms of the normalized Lomb-Scargle periodogram, which yields the normalized power spectral density at certain frequencies (Hocke and Kämpfer, 2009).

$$a = \sqrt{\frac{2}{N}} \frac{\sum_i^N Y(t_i) \cos[\omega_j(t_i - \tau - t_{ave})]}{\sqrt{\sum_i^N \cos^2[\omega_j(t_i - \tau - t_{ave})]}} \quad b = \sqrt{\frac{2}{N}} \frac{\sum_i^N Y(t_i) \sin[\omega_j(t_i - \tau - t_{ave})]}{\sqrt{\sum_i^N \sin^2[\omega_j(t_i - \tau - t_{ave})]}} \quad (5)$$

1510 Different modified series can be reconstructed out of any set of spectral components. So the method might be used i.e. as band-pass-filter or filling of gaps in the series (Hocke and Kämpfer, 2009).

The number of frequencies in which the series is decomposed is calculated with the empirical formula derived out of Monte Carlo simulations by Horne and Baliunas (1986) (Glynn et al., 2006; Press et al., 2007).

$$N_{indep} \approx -6.362 + 1.193N + 0.00098N^2 \quad (6)$$

1515 The false-alarm probability or statistical significance level p of the $P_N(\omega)$ value at a certain frequency is calculated with equation (Scargle, 1982; Glynn et al., 2006; Press et al., 2007).

$$p = 1 - (1 - e^{-z})^M \quad (7)$$

1520 M is the number of test frequencies which is here set to N_{indep} and z is the tested value of $P_N(\omega)$ at a certain frequency. To diminish aliasing, which means reappearing of higher frequencies' power in the power of lower ones, the highest test frequency is set to the Nyquist-rate $f_{max} = f_{Nyquist} = 1/(2\Delta t)$. Because of the irregular sampling, the

sampling rate Δt is approximated here by the average sampling interval $\Delta t = (t_N - t_1) / N$. The lowest test frequency is the inverse of the sampling range

1525 $f_{min} = 1 / (t_N - t_1)$ (Scargle, 1982; Press et al., 2007).

Although N_{indep} should be the number of independent frequencies in the signal it is possible that frequencies lying close to each other 'share' the same underlying trigger. This leakage of power is promoted by the uneven sampling and oversampling of the frequency domain $M > N$ (Scargle, 1989; Horne and Baliunas, 1986). In
1530 addition, the effect may be enhanced because of local high sampling density, autocorrelation in the data or very strong momentum of the underlying trigger.

With regard to these circumstances, which apply especially for the groundwater level series in this study, only the 'dominant frequencies' were used to identify seasonal patterns. The term 'dominant frequency' is used here for the peaks in between
1535 groups of significant frequencies. If such groups build 'significance-plateaus' the median of this plateau is taken as dominant frequency.