

Second response to referee #2 of the review of the manuscript: Controls of fluorescent tracer retention by soils and sediments (hess-2019-229): Report from 18 Nov 2018

Marcus Bork^{1,2}, Jens Lange², Markus Graf-Rosenfellner¹, and Friederike Lang¹

¹Soil Ecology, Faculty of Environment and Natural Resources, University of Freiburg, Freiburg, Germany

²Hydrology, Faculty of Environment and Natural Resources, University of Freiburg, Freiburg, Germany

Correspondence: Marcus Bork (marcus.bork@bodenkunde.uni-freiburg.de)

1 Answers to referee #2

We thank the referee for spending his time to review our manuscript again. We would also like to thank the editor for once again giving us the opportunity to further improve our manuscript. Below, we described point by point how we addressed the comments (in italics) in the revised paper. In blue you will find the revisions and the positions of the corresponding changes in the revised manuscript:

Comment 1: *1- The English is still to revise in the whole paper, as example some parts are specified in the following:*

Response 1: We thank the referee for his time and effort in listing the language mistakes. The manuscript was edited twice by Kenton Stutz (see acknowledgement), a native speaker, and we apologize for overlooking some mistakes. We did our best again to find and correct them and hope to have fixed them now. Below, after the wrong sentence in italics follows in blue the corrected sentence:

- *Lines 3-4 pg 1. "Recently, attempts have been made to use such dyes to trace organic pollutants in soil, but the controls of sorption of UR and SRB in soils are still incomplete and poorly standardized."*
- Recently, attempts have been made to trace organic pollutants in soil with such dyes, but the knowledge on the controls of sorption of UR and SRB in soils is still incomplete and poorly standardized. (p.1, 1.3-4)
- *Lines 10-13 pg 2 : Some studies suggest that it is generally possible to use fluorescent tracers to mimic the transport of organic pollutants (Sabatini and Austin, 1991; Passeport et al., 2010; Lange et al., 2011; Durst et al., 2013), although detailed insights into internal mobility controlling processes are missing so far, especially for soil systems..." so far?*
- Some studies suggest that it might generally be possible to use fluorescent tracers to mimic the transport of organic pollutants (Sabatini and Austin, 1991; Passeport et al., 2010; Lange et al., 2011; Durst et al., 2013), although detailed knowledge on mobility controlling processes, especially for soil systems, is largely missing. (p.2, 1.14-17)

- Lines 18-20 pg 2: *Smart and Laidlaw (1977) investigated the sorption of several dye tracers, amongst others UR and SRB, on different organic (humus, sawdust) and inorganic (kaolinite, limestone, orthoquartzite) materials". .. amongst others?*
- 5 – *Smart and Laidlaw (1977) investigated the sorption of several dye tracers, including UR and SRB, on different organic (humus, sawdust) and inorganic (kaolinite, limestone, orthoquartzite) materials. (p.2, l.24-26)*
- Lines 24-25 pg 2: *"UR and SRB adsorbed stronger on positively charged surfaces than on negatively charged ones".. ones?*
- *UR and SRB showed stronger adsorption on positively than on negatively charged surfaces. (p.2, l.30-31)*
- Lines 29-30 pg 2: *"In the past, UR and SRB fluorescence tracers are mainly used in hydrogeological research to identify water flow in saturated zones such as aquifers and karst regions".. In the past.. are..?*
- 10 – This sentence has been completely changed: *As described above, UR and SRB have mainly been used in systems where sorption plays a minor role. (p.3, l.1-4)*
- Lines 23-24 pg 5 : *"In the following, the tracer-soil suspension was agitated for 42h until sorption equilibrium".. in the following?*
- 15 – *Then, the tracer-soil suspension was agitated for 42h until sorption equilibrium. (p.6, l.3-4)*
- Line 23 pg 7 : *"The adsorption of UR in top- and subsoil strongly decreased with increasing pH" should be corrected to "The adsorption of UR in top- and subsoil strongly decreased by increasing pH" and accordingly all similar sentences.*
- Here we consulted our native speaker again: "increase by" would be followed by a rate or number, "increase with" means a tendency of relationship. So "with" is correct in the way we use it here.
- 20 – Further language corrections are made directly in the manuscript and are not listed here again.

Comment 2: *2- Please better explain the following sentences: Lines 17-18 pg 2:"A few sorption studies of fluorescent tracers were carried out using pure organic or inorganic sorbents but the controls of sorption were examined rather by random than by systematically controlled experiments (Tab.1)".*

Response 2: We thank the referee for this comment as it shows that this point has not been made clear enough. This sentence is explained in detail in the paragraph (p.2, l. 22-34) that is connected to this sentence. Here, we explain that, for example, Smart and Laidlaw (1977) investigated the sorption of UR and SRB on organic and inorganic materials but did not control the pH. Therefore, it remains unclear whether the differences in adsorption of tracers are related to the pH or to the content of organic matter. This is what we mean by "systematically controlled". All parameters except one are fixed. Hence, differences in adsorption can be clearly attributed to this one parameter. We modified the sentence to make this point more clear:

Revision in the marked manuscript: A few sorption studies of fluorescent tracers were carried out using pure organic or inorganic sorbents. However, the controls of sorption were not examined by systematically controlled experiments (Tab.1) that varied only one parameter and left all others constant. (p.2, 1.22-24)

Comment 3: 3- *In the introduction section on the paper it should be specified what types of contaminant behaviour are better described by using uranine (UR) and sulforhodamine B (SRB) dyes.*

Response 3: We thank the referee for this comment. We included a corresponding sentence in the introduction.

Revision in the marked manuscript: So far, UR was mainly used in surface waters as a tracer for light decay (Lange et al., 2011, Gutowski et al., 2015) while SRB was found to be suitable to mimic adsorption on sediments (Durst et al., 2013, Dollinger et al., 2017). (p.2, 1.6-8)

Comment 4: 4- *The authors describe both UR and SRB to be good tracers to predict the fate and transport of similar substances and analyse flow pathways, measure water velocities and determine hydrodynamic dispersion in groundwater, although their experiments are limited to consider batch tests and to obtain sorption isotherms. They should indicate why they only considered them.*

Response 4: The statement that UR and SRB are used to predict the fate and transport of similar substances is deduced from the literature (p.1, 1.25-26) from studies that used them in groundwater, i.e systems where sorption plays a limited role. The aim of our study was to investigate the sorption properties of UR and SRB in soils and sediments, i.e. systems where sorption is important. Batch tests are suitable tools for this purpose as individual factors that influence sorption can be precisely controlled. We have revised the corresponding paragraph in the introduction and hope it is clearer now.

Revision in the marked manuscript: As described above, UR and SRB have mainly been used in systems where sorption plays a minor role. However, in order to use these tracers in soils and sediments, i.e. systems where sorption is the main process that controls solute retention, their sorption properties must be very well known. For this reason, the present study aims to identify the main controls of UR and SRB adsorption in soils and sediments. In particular, we investigated the influence of clay, OM, pH and their interactions on tracer adsorption by selectively controlling each factor in batch experiments. These types of experiments have the main advantage that experimental conditions can exactly be defined. Batch experiments are appropriate tools to investigate the influence of a single factor independent of transport processes (i.e. preferential flow) or transport-related soil properties (i.e. porosity). To face the challenge of experiments with complex matrices, such as soils and sediments, we did not only compare natural substrates but also manipulated them in a controlled way. (p.3, 1.1-20)

Comment 5: 5- *The introduction to a research paper simply introduces the topic being researched. It should be relatively brief, concise and clear. The introduction contains the aim and objectives of the paper and then three to five reasons, details and/or facts supporting your research followed by a conclusion. The final part of the Introduction of the manuscript should be revised as it contains details should be added to Material and methods and not conclusions were presented.*

Response 5: We agree with the referee and thank him for raising this point. We removed the corresponding paragraph from the introduction (p.3, 1.17-20) and inserted the references that justify our experimental treatments in the material and methods section (p.5, 1.10, 1.15, and 1.22).

Comment 6: 6- *Please indicate a reference justifying your omissions in the experiment set up and assumptions.*

Response 6: We thank the referee for this comment. As the referee recommended, the justification references for our treatments are now included in the material and methods section (p.5, 1.10, 1.15, and 1.22). For more clarity, we changed a sentence within the material and methods section and justified it with a further reference (p.5, 1.32, p.6, 1.1). Additionally, we included a further reference in the data analysis section (OECD, 2000) (p.6, 1.17).

5 **Revision in the marked manuscript:** The tracer concentrations were low and still in the range of linear sorption. In this case, sorption sites are in excess and far from being saturated (Schwarzenbach et al., 2003). Therefore, we assumed that the tracers did not compete during sorption. (p.5, 1.27-29)

Comment 7: 7- *As specified by the authors, linear sorption isotherms were considered as "it is widely used and enables comparison with literature data". Please better explain why this was not an outcome from experiments and results.*

10 **Response 7:** We thank the referee for this comment. As explained in the material and methods section (p.6, 1.8-11), we identified the linear sorption range in pre-tests. The main experiment was then conducted with these concentrations. We revised the corresponding sentence and hope that it is clearer now.

Revision in the marked manuscript: According to our pre-tests, these tracer concentrations were in the linear sorption range and were high enough to obtain a clear tracer signal to background ratio. (p.6, 1.9-11)

15 **Comment 8:** 8- *In the result section, Figures and Tables should be clearly introduces and described in the text rather than only reported into brackets, for example Figure 1 shows results for .. etc*

Response 8: We thank the referee for raising this point. However, to save space and to avoid redundancies, we only cited the figures and tables in parenthesis.

20 For a better understanding we have added another sentence to the caption of Fig.7: **The width of the bars represents the measure of sorption and "low" and "high" refers to the soil properties.**

Controls of fluorescent tracer retention by soils and sediments

Marcus Bork^{1,2}, Jens Lange², Markus Graf-Rosenfellner¹, and Friederike Lang¹

¹Soil Ecology, Faculty of Environment and Natural Resources, University of Freiburg, Freiburg, Germany

²Hydrology, Faculty of Environment and Natural Resources, University of Freiburg, Freiburg, Germany

Correspondence: Marcus Bork (marcus.bork@bodenkunde.uni-freiburg.de)

Abstract.

Fluorescent dyes like uranine (UR) and sulforhodamine B (SRB) have been used for decades as artificial tracers in hydrological studies. Recently, attempts have been made to ~~use such dyes to~~ trace organic pollutants in soil ~~with such dyes~~, but the ~~knowledge on the~~ controls of sorption of UR and SRB in soils ~~are~~ ~~is~~ still incomplete and poorly standardized. For this reason, we selectively controlled clay, organic matter (OM) and pH within batch experiments and quantified systematically the impact and possible interactions of these controls on the adsorption of UR and SRB. Sorption isotherms were determined using a sandy sediment and a silty loamy sub- and topsoil (0.6 - 2.8 %-organic carbon (OC)) at pH values of 5.5, 6.5 and 7.5. Additionally, OM was removed from top- and subsoil samples by H₂O₂-treatment and the clay mineral montmorillonite was added to the sandy sediment. We found a negative relationship between the linear sorption coefficient K_d and pH that was stronger for UR than for SRB. Increasing repulsion forces between negative sorption sites and tracer functional groups at higher pH values might explain these results. Adsorption of UR and SRB increased with increasing clay content due to more specific surface area and associated sorption sites. An addition of 4 % of the clay mineral montmorillonite sufficed to adsorb nearly 100 % of both tracers. The influence of OM was more complex: while the adsorption of UR increased with increasing OC concentration, ~~that of SRB decreased~~ ~~the opposite was observed for SRB~~. Our study indicates the high relevance of physico-chemical properties of soils and sediments for the fate of applied tracers and for their more conservative or non-conservative behaviour. Overall, the reported results will help to optimise the use of fluorescent tracers in terrestrial ecosystems and to increase their potential as a cheap and fast tool to gain insights into the fate of pollutants in soils and sediments.

1 Introduction

Fluorescent dyes are used in various applications, such as chemical sensing (Basabe-Desmonts et al., 2007), dye lasers (Li and Psaltis, 2008) or fluorescent labeling of biomolecules (Giepmans et al., 2006; Resch-Genger et al., 2008; Gonçalves, 2009). They are detectable at low concentrations, simple to handle and characterized by low toxicity (Flury and Wai, 2003; Leibundgut et al., 2009). For this reason, fluorescent dyes have ~~been also used~~ ~~also been used for decades~~ as artificial tracers in hydrological studies ~~for decades~~ to investigate transport processes in surface ~~water bodies~~ ~~waters~~ and groundwater (Omoti and Wild, 1979b; Sabatini and Austin, 1991; Vanderborght et al., 2002; Hillebrand et al., 2015, e.g.). One of the most frequently used fluorescent tracer is the xanthene dye uranine (UR) that is ~~used~~ ~~applied~~ to analyse flow pathways, measure water velocities and determine hydrodynamic dispersion mainly in groundwater (Flury and Wai, 2003). Uranine is subject to photolysis, but ~~in the dark it is~~

mostly is assumed to be conservative (Flury and Wai, 2003), meaning that transport is only affected largely conservative in the dark (Flury and Wai, 2003), so that transport in aquifers is mainly influenced by convection, diffusion, and dispersion. Recently, researchers additionally used non-conservative tracers, such as sulforhodamine B (SRB) in mixture with conservative tracers. This „multi-tracer approach“ characterises environmental compartments and predicts the fate of chemically similar substances ;
5 such as pesticides (Sabatini and Austin, 1991; Passeport et al., 2010; Lange et al., 2011; Schuetz et al., 2012; Durst et al., 2013; Maillard et al., 2016). So far, UR was mainly used in surface waters as a tracer for light decay (Lange et al., 2011; Gutowski et al., 2015) while SRB was found to be suitable to mimic adsorption on sediments (Durst et al., 2013; Dollinger et al., 2017). Since many different processes like volatilisation, sorption and degradation by light or microorganisms affect the fate of substances in environmental compartments, different tracers are necessary to mimic these individual processes. The development of this approach multi-tracer approaches results from an increasing need to assess the capacity of natural soils or artificial soil and wetland systems to retain pollutants and prevent water bodies from pollution. Since the detection and quantification of organic micropollutants (e.g. pesticides) is time-consuming and expensive, it is desirable to have faster and cheaper analysis tools.

Some studies suggest that it is generally might generally be possible to use fluorescent tracers to mimic the transport of organic pollutants (Sabatini and Austin, 1991; Passeport et al., 2010; Lange et al., 2011; Durst et al., 2013), although detailed insights into internal knowledge on mobility controlling processes are missing so far, especially for soil systems, is largely missing. Prerequisite for successful multi-tracer experiments in soils and sediments are similar sorption properties of both, the organic pollutant and the respective tracer. This work focuses on the prominent fluorescent tracers UR and SRB. Due to their functional groups (carboxyl group for UR and sulphonic groups for SRB) it is likely that their sorption behaviour will strongly depend on pH, organic matter (OM) and texture of the sorbing matrix. The physico-chemical environment thus dictates a conservative or non-conservative tracer behaviour.

A few sorption studies of fluorescent tracers were carried out using pure organic or inorganic sorbents but. However, the controls of sorption were examined rather by random than not examined by systematically controlled experiments (Tab. 1) that varied only one parameter and left all others constant. Smart and Laidlaw (1977) investigated the sorption of several dye tracers, amongst others including UR and SRB, on different organic (humus, sawdust) and inorganic (kaolinite, limestone, orthoquartzite) materials. For UR they found moderate adsorption to organic and inorganic materials whereas SRB showed low adsorption to on organic materials but higher sorption on mineral surfaces. However, since the pH was not controlled, tracer adsorption to humus could have been enhanced by a pH effect additionally in addition to the presence of OM. Kasnavia et al. (1999) and Sabatini (2000) conducted sorption experiments with UR and SRB at neutral pH on inorganic materials like negatively charged silica (SiO_2) and sandstone and positively charged alumina (Al_2O_3) and limestone. UR and SRB adsorbed stronger on positively charged surfaces showed stronger adsorption on positively than on negatively charged ones surfaces. They also found a strong decrease of UR-sorption and a less strong decrease of SRB-sorption when they increased the pH from 7 to 9. Recently, Dollinger et al. (2017) found that sorption of SRB in soils mainly correlated with clay content while sorption of UR mainly followed content of organic carbon (OC) and pH.

In the past, as described above, UR and SRB fluorescence tracers are mainly used in hydrogeological research to identify water flow in saturated zones such as aquifers and karst regions. In these applications the complex sorption behaviour of UR and SRB on organic matter and clay at different pH values often plays a limited role. However, in order to use these tracers in soils and sediments, sorption processes are more relevant and result in a wider range of K_d values (linear sorption coefficients). Use of UR and SRB in surface water bodies and soils, therefore, requires more knowledge of sorption processes. Since many researchers use K_d values to describe and model linear adsorption processes, considering their controls is crucial. The aim of our study is, therefore, i.e. systems where sorption is the main process that controls solute retention, their sorption properties must be very well known. For this reason, the present study aims to identify the main controls of UR and SRB adsorption in soils, and to systematically quantify their impact and possible interactions.

We and sediments. In particular, we investigated the influence of clay, OM, pH and their interactions on the adsorption of UR and SRB in soils and sediments-tracer adsorption by selectively controlling each factor in batch experiments. These types of experiments have the main advantage that experimental conditions are exactly controlled can exactly be defined. Batch experiments are appropriate tools to investigate the influence of single properties-a single factor independent of transport processes (i.e. preferential flow) and-or transport-related soil properties (i.e. porosity). To face the challenge of experiments with complex matrices, such as soils and sediments, we not only compared-did not only compare natural substrates but also manipulated them in a controlled way. For the investigation of the influence of OM, we used samples of top- and subsoil with different OM contents and additionally decreased OM by oxidation similar to studies by Kaiser and Zech (2000). For clay, we followed the procedure by Tahir and Marschner (2016) by adding seven different amounts of the clay montmorillonite to a sandy sediment. For pH, we determined K_d values at specific pH values (5.5, 6.5 and 7.5) as done by Boxall et al. (2002).

Also, Several researchers have used K_{OC} -values (e.g. Sabatini and Austin, 1991; Keefe et al., 2004; Durst et al., 2013) to investigate and model the adsorption-simulate the adsorption behaviour of fluorescent dye tracers on organic matter, several researchers have used-despite K_{OC} -values (e.g. Sabatini and Austin, 1991; Keefe et al., 2004; Durst et al., 2013). However, their use has some-have various limitations (U.S. Environmental Protection Agency, 1999; OECD, 2000). Hence, we additionally evaluated-This study therefore evaluates the suitability of K_{OC} -values for investigating-to assess adsorption of UR and SRB on organic matter.

2 Materials and Methods

2.1 The substrates

In the following section, characterisation of soils and sediment and the analysis of physico-chemical soil properties are described. We collected soil samples from an urban grassland site in Freiburg (Germany) at depths of 5-15 cm (topsoil) and 50-60 cm (subsoil). The samples had similar pH but different OC content (Tab. 2). Furthermore, we used a sandy sediment (quartz sand) purchased from Kepes Handesgesellschaft mbH Sand und Kies (Freiburg, Germany). In the following, Below, top- and subsoil, and-as well as the sandy sediment are subsequently termed as substrates. For the experiments, stones and

roots were removed by hand. Then, all samples were air-dried and passed through a 2 mm sieve. The residual gravimetric water-content was determined as the difference between the sample weight of air-dried sample and the sample weight after 24 h of drying at 105 °C. Residual water contents ranged from 0.1 % (sediment) to 2.2 % (topsoil) (see Tab. S1). Therefore, we decided to omit the correction of air-dried samples by water content and used the air-dried soil mass as reference. Texture was determined using sieving, sedimentation and the pipette method (Gee and Or, 2002). The pH was measured at room temperature (approx. 23 °C ± 2 °C) after over-night equilibration of 10 g sample in 25 mL solution (ultrapure water and 0.01 M CaCl₂-solution) with a pH-Meter (Metrohm, Germany). Additionally, we analysed the content of dissolved organic carbon (DOC) in centrifuged (2490 g, 1 h, Heracus Megafuge 40 Centrifuge, Thermo Scientific, MA, USA) and filtered (folded filter, 125 mm, 80 g · m⁻², Munktell Filter AB, Sweden) soil extracts with a soil-solution ratio of 1:5 after acidification using a TOC-Analyser (multi N/C 2100 S, Analytik Jena, Germany). Centrifugation and filtration of the samples were necessary to remove solid organic matter and mineral particles.

As a measure of OM we determined the OC of the substrates, which was measured with a CNS-analyser (Vario El Cube, Elementar, Germany) after grinding the samples with a vibratory disc mill (Siebtechnik GmbH, Germany). Since the sediment contained carbonate-bound carbon (1.13 %), its OC content was determined as the difference of the total carbon content before and after heating the sample at 550 °C. At this temperature, it is assumed that all OC had transformed into CO₂ (Bisutti et al., 2004).

The specific surface area (SSA) was determined using N₂- adsorption method with a Quantachrome Autosorb-1 instrument (Quantachrome Instruments, FL, USA). Samples were degassed at 80 °C and the SSA was calculated using the Brunauer–Emmett–Teller (BET) equation by Brunauer et al. (1938).

Amorphous Fe-, Al- and Mn-oxides (Fe_o, Al_o and Mn_o) were extracted by oxalate according to Schwertmann (1964) and crystalline and amorphous Fe-, Al- and Mn-oxides (Fe_d, Al_d and Mn_d) by dithionite according to Mehra and Jackson (1958) in order to estimate their contribution to tracer sorption. The molar concentrations of amorphous and crystalline metals equal the sum of oxalate-extracted metals (Me_o) and dithionite-extracted metals (Me_d), respectively. In addition, we calculated the Me_o/Me_d-ratio which indicates the fraction of more amorphous metal oxides in relation to the more crystalline oxides. All element concentrations were determined by ICP-OES (Spectro Ciros CCD, Spectro Analytical Instruments GmbH, Germany).

2.2 The tracers

Tracer solutions of UR (Simon & Werner, Flörsheim, Germany) and SRB (Chroma, Münster, Germany) were dissolved in 0.01 M CaCl₂ and stored at approximately 6 °C. To prevent photolytic decay, the amber-glass bottles were wrapped with aluminium foil. The tracer fluorescence was measured in a synchronous scan method ($\Delta\lambda = 25$ nm, wavelength range: 250-650 nm) at maxima of 488 nm (UR) and 560 nm (SRB) using the luminescence spectrometer LS-50B (Perkin Elmer, MA, USA). To ensure 100% fluorescence intensity for both tracers during measurement, the pH was raised to 9-10 using one drop of 1.5 M EDTA solution. This step was necessary due to the ~~pH-dependency~~ pH-dependence of tracer fluorescence (Smart and Laidlaw, 1977) (Tab. 3). The calibration of the fluorescence measurements was conducted in watery electrolyte extracts of each substrate in order to exclude matrix effects. For this purpose, 20 g substrate material was dispersed in 100 mL

0.01 M CaCl₂ and was agitated overnight using a rotating shaker (3040 GFL, Burgwedel, Germany). After centrifuging at 2490 g for 1 h and filtration by a folded filter, the extracts were diluted with ultrapure water by a factor of 10 to reduce the background fluorescence. The calibration solutions were prepared in the range of 0 - 5 μg · L⁻¹ (UR) and 0 - 100 μg · L⁻¹ (SRB). These concentrations were chosen to ensure a linear calibration range.

5 2.3 Batch experiments

2.3.1 Substrate treatments

In the following section, we describe how we have prepared the various treatments to investigate the influence of pH, OC and clay on UR and SRB adsorption (Fig. 1). ~~The~~ To investigate the influence of the pH, the initial pH-values of all samples were adjusted to 7.5, 6.5 and 5.5 using HCl and NaOH in variable concentrations (Fig. 1) as done, for example, by Boxall et al. (2002). At pH 5.5 and 6.5 only the first and the sixth concentration were measured in triplicate, while the other four concentrations in between were single measurements. The small variance of the triplicate measurements (6.2% ± 4.5%, see Fig. S1) made this simplification possible. The effect of varying OC and clay contents was studied at pH 7.5. ~~In the following~~ Below, altered substrates, either by H₂O₂-treatment (low and high OC) in the case of top- and subsoil or by the addition of clay (Clay0, Clay1 and Clay2) in the case of sediment or by adjusting the pH are termed as treatments.

15 To decrease ~~OC-concentration~~ the OC content as was for example done by Kaiser and Zech (2000), approximately 200 g of each soil sample (top- and subsoil) was dispersed in a H₂O₂ solution (w=30%) and equilibrated at 20 °C for 15 h. Afterwards, the suspension was heated for approximately two weeks at 80 °C until evolution of CO₂ ended. Within this time, H₂O₂ was repeatedly added to the suspension. Subsequently, the sample was rinsed with ultrapure water on a folded filter and dried at 40 °C. By this treatment the OC content decreased from 2.8 to 0.7% OC (topsoil) and from 0.6 to 0.1% OC
20 (subsoil) (Tab. 2).

The clay content was modified by adding different quantities of the clay mineral montmorillonite (K10, powder, Sigma Aldrich, St. Louis, MO) to the sediment as was for example done by Tahir and Marschner (2016). To investigate the influence of the clay content on the tracer sorption for a broader range of clay contents, we first conducted single adsorption measurements at different quantities of clay addition (0.1%, 0.5%, 1.0%, 2.0%, 2.5%, 5% and 10% clay). In a second step, we chose three
25 clay contents and used the following treatments (Fig. 1) for analysing sorption isotherms: Clay0 (sediment, 0.1% clay), Clay1 (sediment + 1% clay) and Clay2 (sediment + 2% clay).

2.3.2 Sorption isotherms

Isotherms for fluorescent tracer adsorption were prepared using the batch equilibrium method according to the OECD guideline 106 (OECD, 2000). For each substrate, 10 g was suspended in 45 mL 0.01 M CaCl₂ solution in 100 mL amber-glass bottles
30 and agitated overnight in a rotating shaker (3040 GFL, Burgwedel, Germany) at 10 rpm. Subsequently, 5 mL of the tracer solution was added to the suspension and the pH was adjusted to 5.5, 6.5 or 7.5 by adding HCl or NaOH. The tracer solution contained both tracers at the same ~~-~~ time. The tracer concentrations were low and still in the range of linear sorption. In

this case, sorption sites are in excess and far from being saturated (Schwarzenbach et al., 2002). Therefore, we assumed that the tracers did not ~~interact in solution and did not~~ compete during sorption ~~due to an excess of sorption places and low tracer concentrations (linear sorption range). In the following.~~ Then, the tracer-soil suspension was agitated for 42 h until sorption equilibrium. This time was identified in pre-tests where we tested the tracer adsorption by conducting the batch experiment for 5 24 h, 48 h and 72 h. During the equilibration time, the pH was measured two times (after approx. 16 - 24 h) and was, if necessary, corrected again by adding HCl or NaOH. After equilibration, solid and liquid phase were separated by centrifugation at 2490 g for 45 min. Following this, 5 mL of the supernatant was separated and diluted by 45 mL ultrapure water in order to suppress DOC-fluorescence and therefore increase the limit of quantification (LOQ) of tracers. For each sorption isotherm six tracer concentrations in ranges of 20 - 45 $\mu\text{g} \cdot \text{L}^{-1}$ (UR) and 400 - 900 $\mu\text{g} \cdot \text{L}^{-1}$ (SRB) were prepared in triplicate. ~~In~~ According to 10 our pre-tests ~~these concentrations were found to be,~~ these tracer concentrations were in the linear sorption range and were high enough to obtain a clear tracer signal to background ratio ~~and to be low enough to ensure linear sorption isotherms.~~ At pH 5.5 and 6.5 the highest and the lowest concentration of the sorption isotherms were prepared in triplicate, the other concentrations were only prepared once. At pH 7.5 all concentrations were prepared in triplicate. Moreover, the experiments were conducted at room temperature (approx. $23^\circ\text{C} \pm 2^\circ\text{C}$); Fernández-Pascual et al. (2018) showed that adsorption of UR and SRB is not 15 temperature dependent at this temperature range.

2.3.3 Data analysis

The content of adsorbed tracer q (eq) [$\mu\text{g} \cdot \text{kg}^{-1}$] at chemical equilibrium was calculated as follows ~~÷~~(OECD, 2000)

$$q(\text{eq}) = \frac{(c_0 - c_{\text{aq}}(\text{eq})) \cdot V_0}{m_{\text{sample}}} \quad (1)$$

where c_0 [$\mu\text{g} \cdot \text{L}^{-1}$] is the initial tracer concentration, $c_{\text{aq}}(\text{eq})$ [$\mu\text{g} \cdot \text{L}^{-1}$] is the measured tracer concentration in the liquid 20 phase at chemical equilibrium, V_0 [L] is the sample volume and m_{sample} [g] is the sample weight. Since sorption data were still in the linear range, the adsorption percentage x_{adsorbed} [%] was calculated according to the equation:

$$x_{\text{adsorbed}} = \frac{m_{\text{sorb}}}{m_0} \cdot 100 (\%) \quad (2)$$

with m_{sorb} [μg] = $q(\text{eq}) \cdot m_{\text{sample}}$ the mass of adsorbed tracer on the soil and m_0 [μg], the initial mass of tracer. The linear sorption coefficient K_d [$\text{L} \cdot \text{kg}_{\text{soil}}^{-1}$] is defined as follows:

$$25 \quad K_d = \frac{q(\text{eq})}{c_{\text{aq}}} \quad (3)$$

It is determined as slope of the linear sorption isotherms and a measure of sorption strength. We decided to use this equation because it is widely used and enables comparison with literature data. To evaluate the goodness of K_d -values, standard errors and 95 %-confidence intervals were calculated. Linear regression was performed using the `lm`-function of the R programming

language (R Development Core Team, 2008). Relating the K_d to the fraction of organic matter (f_{OC} , [$\text{kg}_C \cdot \text{kg}_{\text{soil}}^{-1}$]) yields the K_{OC} [$\text{L} \cdot \text{kg}_C^{-1}$], a measure for adsorption on organic matter::

$$K_{OC} = \frac{K_d}{f_{OC}}. \quad (4)$$

Data analysis was performed using the R programming language (R Development Core Team, 2008).

5 3 Results and discussion

3.1 Physico-chemical properties of substrates and treatments

The three substrates topsoil, subsoil and sediment were chosen to represent some common occurring natural materials. In agreement, the OC content of the topsoil (2.7 %, Tab. 2) was in accordance with that of other terrestrial European topsoils (de Brogniez et al., 2015). In contrast to the topsoil, the subsoil showed a low OC content (0.6 %), which is related to the relatively low depth of the taken sample (50-60 cm). This was intended to have samples with similar texture but a preferable different OC content. In the sediment we measured a slightly higher OC content (0.8 %) than in the subsoil. However, this value has to be considered carefully because the high inorganic carbon content of the sediment could have influenced the accuracy of the measurement of organic carbon. In contrast to OC, the ~~clay contents~~ clay contents of top- and subsoil are similar (24.0 and 22.4 %) and differ clearly from that of the sediment (0.1 %), which was intended to examine the influence of the clay on the adsorption of the tracers. In general, top- and subsoil are comparable to those used for example by Dollinger et al. (2017) for examining sorption of UR and SRB whereas the sediment is similar to the substrates used by Sabatini (2000).

In general, metal oxide and hydroxide contents of our samples, were comparable to soils in central Germany (Wiseman and Puttmann, 2005). They increased in the following order: sediment \ll topsoil $<$ subsoil. The Me_d (amorphous and crystalline Fe-, Al- and Mn-oxides) was higher in the subsoil than in the topsoil, indicating more positive sorption places in the subsoil. The Me_o/Me_d -ratio was nearly twice as high in the topsoil (0.67) than in the subsoil (0.38) indicating more amorphous metal oxides in the topsoil. Since iron oxides like ferrihydrite and goethite are positively charged at high pH-values (Cornell and Schwertmann, 2003), they are important sorbents for molecules with negative charged functional groups like UR and SRB.

The SSA was twice as high in the subsoil ($24 \text{ m}^2 \cdot \text{g}^{-1}$) as in the topsoil (12 and $10 \text{ m}^2 \cdot \text{g}^{-1}$, Tab. 2) despite a slightly higher clay content in the topsoil (24.0 %) than in the subsoil (22.4 %). This could be related to a different composition of the clay fraction in both soils or by clogging of clay mineral interlayers by organic matter, especially in the topsoil, which was also observed e.g. by Mikutta et al. (2006b) and Mikutta et al. (2006c). Furthermore, the SSA slightly increased after the H_2O_2 -treatment, which was also observed by Feller et al. (1992). They explained this observation as follows: the organic matter (OM) partially sticks soil particles together or clogs soil pores, which, after the removal of OM, become accessible again for N_2 during the measurement. The lowest SSA was, as expected, measured for the sediment ($1.1 \text{ m}^2 \cdot \text{g}^{-1}$). By the addition of the pure clay mineral montmorillonite with a high SSA ($249 \text{ m}^2 \cdot \text{g}^{-1}$) the clay content of the treatments Clay1 and Clay2 was increased to $3.6 \text{ m}^2 \cdot \text{g}^{-1}$ and $6.1 \text{ m}^2 \cdot \text{g}^{-1}$.

3.2 Influence of pH

3.2.1 Sorption of UR

The adsorption of UR in top- and subsoil strongly decreased with increasing pH (Fig. 2, Fig. 3; data can be found in the supplement: Tab. S2, S3 and S4). The K_d -value decreased from pH 5.5 to 7.5 by a factor of 22 in the topsoil and 12 in the subsoil (Tab. 4). Similar observations concerning the direction of the relation between pH and ~~UR-adsorption~~ UR adsorption were made by other researchers, e.g. by Smart and Laidlaw (1977) and Peterson (2010). Omoti and Wild (1979a) reported a K_d -value of $10.3 \text{ L} \cdot \text{kg}^{-1}$ at pH 6.5 - 7.0 for UR adsorption in ~~batch-experiment~~ batch experiment (Tab. 1), which is approximately between the values that we measured ($3.3 \pm 0.4 \text{ L} \cdot \text{kg}^{-1}$ at pH 7.5 and $46.7 \pm 7.7 \text{ L} \cdot \text{kg}^{-1}$ at pH 6.5). At high pH-values, most solid surfaces in soils (variable charges of functional groups of OM and edges of clay minerals as well as permanent charges of clay minerals) are negatively charged and become, with decreasing pH, neutral or, at more acidic conditions, positively charged (Blume et al., 2016). The same ~~is the case for~~ applies the carboxyl and hydroxyl groups of the UR molecule ~~that is~~, which are determined by its pK_a -values (Zanker and Peter, 1958). Therefore, attracting forces between UR and various sorbents at low pH turn into repulsive forces between negative charges at higher pH and, thus, a reduced affinity to adsorption.

At pH 5.5 and 6.5, the adsorption of UR was much higher in the topsoil than in subsoil (Fig. 3). This difference vanished at pH 7.5. Assuming that the OM content is the main difference between top- and subsoil, we can conclude that the influence of OM on the adsorption of UR is higher in more acidic soils. An explanation could be the following: At pH 7.5 most variable charged sorption places in the soil are negatively charged and the adsorption of UR depends only slightly on the content of OM. In contrast, a large part of the variable charged sorption places are protonated and available for ~~UR-adsorption~~ UR adsorption at pH 5.5. In this case, UR adsorption distinctly depends on the OM content.

In our experiments, we observed much higher K_d -values (max. $73.2 \pm 12.8 \text{ L} \cdot \text{kg}^{-1}$, Tab. 4) than other researchers reported before (max. approximately $10 \text{ L} \cdot \text{kg}^{-1}$ measured e.g. by Sabatini (2000) or Dollinger et al. (2017)). The reason is that, in the past, UR was mainly used as a conservative tracer, thus under conditions where UR did not showed adsorption (high pH, sandy texture). However, if we use UR in a multi-tracer approach to mimic the (sorption) behaviour of similar substances we could use its sorption properties.

3.2.2 Sorption of SRB

In contrast to UR, the adsorption of SRB in top- and subsoil decreased only slightly with increasing pH (Fig. 2, Fig. 3). This observation can be explained by its two sulphonic groups that are negatively charged at pH-values above 1.5 and one positive charge (Kasnavia et al., 1999). Therefore, the charge of SRB does not change over a wide range of ~~pH-values~~ pH values. Furthermore, Polat et al. (2011) have shown that SRB is an amphiphilic molecule, which means that the molecule possesses both hydrophilic and hydrophobic properties. Consequently, SRB has a complex sorption behaviour and ~~can be~~ is attracted by a wide range of surfaces including hydrophobic and negative or positive charged surfaces. This results in low pH-dependence of SRB-adsorption.

3.2.3 Comparison of sorption of UR and SRB

The K_d -value declined linearly with increasing pH (Fig. 3). This effect was more pronounced for UR than for SRB indicating a stronger ~~pH-dependence~~ pH dependence of UR adsorption. We explain this observation by different functional groups of UR and SRB. The sulphonic groups of SRB have the same negative charge over a wide range of pH due to its low pK_a -value ($pK_a < 1.5$, Kasnavia et al., 1999) while the carboxyl and hydroxyl groups of UR become more negatively charged with increasing pH due to deprotonation (Zanker and Peter, 1958). Therefore, we assume that UR adsorption increasingly happens through hydrophobic interactions with OM when the pH decreases, but not for SRB because its functional group remains negative charged. This observation could be a hint that the variations in molecular charge of the sorbant with changing pH, is much more important than that of the adsorbing surfaces in the soil.

10 3.3 Influence of OC content

3.3.1 Sorption of UR

In both subsoil treatments and the untreated topsoil, approx. 35 % of UR was adsorbed, which corresponded to K_d -values of $2.3 \pm 0.5 - 3.3 \pm 0.4 \text{ L} \cdot \text{kg}^{-1}$ (Fig. 4 and Fig.5; data can be found in the supplement: Tab. S2, S3 and S4). These K_d -values are in accordance with those of other researchers who worked with similar substrates at comparable conditions (Tab. 1). For example, Dollinger et al. (2017) calculated K_d -values of $1 - 5 \text{ L} \cdot \text{kg}^{-1}$ for UR adsorption in soil samples with 19 - 29 % clay, 1 - 5 % OC at pH above 8.0. Moreover, these results also suggest a low dependence of UR adsorption on OM at pH 7.5. Hence, we ~~suppose~~ assume that not the number of sorption sites ~~is controlling the UR adsorption~~ controls the adsorption of UR, but the electrochemical repulsion of UR by ~~negative~~ negatively charged sorbents.

Nevertheless, despite mainly negative sorption sites almost one third of UR was adsorbed at pH 7.5. At these conditions, adsorption potentially took place by cation bridges (e.g. by Ca^{2+} - ions) between the negative functional groups of OM and the ~~UR-molecule~~ UR molecule (Guggenberger and Kaiser, 2003; Schaumann and Thiele-Bruhn, 2011) or took place on positively charged metal oxides. More or less organic sorption sites are thus not crucially influencing the sorption behaviour of UR. At first sight, these observations ~~contradicts~~ contradict findings of other researchers. Dollinger et al. (2017) found that adsorption of UR mainly depends on OC content and pH and also Smart and Laidlaw (1977) found increasing UR adsorption with increasing humus concentration. However, as both studies did not control the pH, their findings may have been influenced by low pH rather than by increased OC content.

In the H_2O_2 -treated topsoil UR adsorption was three times lower than in the other treatments (K_d -value of $0.6 \pm 0.3 \text{ L} \cdot \text{kg}^{-1}$, Fig. 5). This result might be attributed to sample treatment. H_2O_2 did not oxidise the entire OC to CO_2 , but produced a number of smaller organic molecules (Mikutta et al., 2005) that remained in the soil pores as indicated by higher DOC concentrations (Tab. 2). These small organic molecules competed with UR for sorption sites and reduced overall UR adsorption.

3.3.2 Sorption of SRB

In contrast to UR, K_d -values of SRB decreased monotonically with increasing OC content from $16.4 \pm 1.4 \text{ L} \cdot \text{kg}^{-1}$ at 0.1 % – OC to $2.8 \pm 0.3 \text{ L} \cdot \text{kg}^{-1}$ at 2.7 % – OC (Fig. 4 and Fig.5), which corresponded to a 50% reduction of adsorption from 83 % to 40 %. Only at the highest OC content SRB and UR adsorption were similar. Furthermore, we measured stronger SRB adsorption in the subsoil than in the topsoil at all pH-values (Fig. 2) as was also observed by Vanderborght et al. (2002). According to Based on this result, we assume that SRB adsorption mainly took place on the mineral phase, e.g. on metal oxides and hydroxides that are positively charged due to their high point of zero charge (PZC) (Cornell and Schwertmann, 2003). Coating of mineral surfaces by organic substances reduced mineral sorption places and therefore positively charged sorption sites that led to a reduced adsorption of SRB. This result is in accordance with findings of Smart and Laidlaw (1977) who observed lower SRB adsorption on organic than mineral surfaces. When solute retention is determined by adsorption and not by transport processes (like preferential flow) and transport-related properties (i.e. porosity), results from batch and column experiments with similar soils are comparable. In contrast to our results, Albrecht et al. (2003) found higher K_d -values for SRB adsorption in the upper horizon ($9.1 \text{ L} \cdot \text{kg}^{-1}$) than in the lower horizon ($4.4 \text{ L} \cdot \text{kg}^{-1}$). However, these results are probably related not only to the OC content, which changed only slightly from top to bottom, but also to the texture, which became much coarser from the upper to the lower horizon. Furthermore, the results from our batch experiment are in accordance with results from column experiments in Durst et al. (2013). They used a silty sediment with an high OC content of 5.2 % at pH 7.5 and calculated also a relatively low K_d -value of $3.2 \text{ L} \cdot \text{kg}^{-1}$ for SRB adsorption (Tab. 1). However, decreasing adsorption of SRB with increasing OC content has not been reported before.

3.4 Influence of clay content

3.4.1 Sorption of UR

UR adsorption in the sediment samples without clay addition (Clay0) was minimal (Fig. 4 and Fig. 6; data can be found in the supplement: Tab.S2,S3 and S4). This minimal adsorption tendency of UR at low clay content (and simultaneous low OC-, oxide- and hydroxide-content) was likely caused by the lack of sorption places and by repulsive forces due to negative charges of the sand particles and the UR-molecule. This has been observed by many other researchers (e.g. Smart and Laidlaw, 1977; Hadi et al., 1997; Kasnavia et al., 1999; Sabatini, 2000) and is the reason why UR is generally assumed to be a conservative tracer in groundwater studies (e.g. Leibundgut et al., 2009).

However, adsorption of UR increased linearly with clay content ($UR_{ads.} = 38.79 \cdot Clay - 9.33$, $r^2 = 0.988$) and reached 100 % adsorbed tracer until 2.5 % clay addition (Fig. 6). In general, more clay leads to higher adsorption because of increases due to the increase in SSA. In our samples the SSA increased from $1.1 \text{ m}^2 \cdot \text{g}^{-1}$ in treatment Clay0 to $3.6 \text{ m}^2 \cdot \text{g}^{-1}$ and nearly doubled ($6.1 \text{ m}^2 \cdot \text{g}^{-1}$) in treatment Clay2 (Tab. 2).

Not only the clay quantity and the SSA influenced adsorption of UR in our experiments, but other effects may play a role. That became apparent in the comparison between K_d -values of the untreated subsoil (high OC) and that of the sediment with 2 % clay addition (Clay2). Although the untreated subsoil had 10 times the clay content (22.4 %) and 4 times the SSA

($24 \text{ m}^2 \cdot \text{g}^{-1}$) than the sediment, its K_d -value was only half ($2.3 \pm 0.2 \text{ L} \cdot \text{kg}^{-1}$, Tab. 4). This suggests that the type and composition of the clay fraction influenced UR adsorption. In our batch experiments, we used the clay mineral montmorillonite with a very high specific surface ($249 \text{ m}^2 \cdot \text{g}^{-1}$). The soil contained a mix of clay minerals that probably had less total or less accessible sorption places than the fresh montmorillonite. The pores of the topsoil clay fraction could be clogged by organic matter (Mikutta et al., 2006b, c) and, thus, be less accessible than those of the fresh clay mineral montmorillonite.

3.4.2 Sorption of SRB

SRB only slightly adsorbed to the sediment without clay addition (Clay0, Fig. 4 and Fig. 6) due to the lack of sorption places. With increasing clay addition, the fraction of adsorbed SRB increased exponentially ($SRB_{ads.} = 97.65 \cdot (1 - e^{(-1.06 \cdot Clay)})$) and reached nearly 100 % at three percent clay content. This result is in accordance with Dollinger et al. (2017) who concluded that SRB adsorption is strongly correlated with clay content. In contrast to UR, the adsorption of SRB in relation to clay content increased faster, which potentially could be explained by its higher affinity for mineral surfaces as also observed by Smart and Laidlaw (1977).

As with UR, the quality of clay affected the adsorption of SRB. ~~When~~ SRB adsorption in the treatments Clay2 and topsoil compared to adsorption in treatments with low OC at pH 7.5 (Fig. 5 and Fig. 6), ~~both treatments show~~ showed similar SRB adsorption (approx. 80 %), ~~despite the clay contents differing although the clay content differs~~ by a factor of 10 (Tab. 2). A different composition of the clay fraction of the topsoil in comparison to the fresh montmorillonite can also explain these results.

3.5 Limitations of K_{OC} -values

The most important assumptions for the calculation of K_{OC} -values are (i) that the main sorption of the target substance occurs on OM and (ii) that adsorption mainly occurs by nonpolar interactions (OECD, 2000). Hence, the sorption mechanism should mainly be simple partitioning between the liquid and the organic phase. The U.S. Environmental Protection Agency (1999) listed further limitations of the K_{OC} -concept including an organic fraction (f_{OC}) between 1 - 20 percent and a content of swelling clays like montmorillonite has to be low. Due to their K_{OW} -values (Tab. 3) and their charged functional groups, UR and SRB can be regarded as more polar tracers. This was also demonstrated by this study and by Kasnavia et al. (1999) who calculated K_{OW} -values, found a strong ~~pH-dependence~~ pH dependence for both tracers, and reported a high hydrophobicity for UR. Therefore, we expect polar sorption interactions like electrochemical interactions and ligand exchange and also adsorption on mineral surfaces rather than partitioning between liquid and organic phase. A calculation of K_{OC} -values from our data would thus be inappropriate. For example, increasing K_{OC} -values for both tracers would have been calculated for the sediment treatments with rising clay content, although the content of OM - and adsorption to OM - did not change. The adsorption of the tracers was instead related to more abundant adsorbing mineral surfaces of the clay mineral montmorillonite. Moreover, a decreasing K_{OC} -value with rising pH can be expected due to increasing repulsive forces between negative functional groups of tracers and sorbents. In both cases, a parameter other than the OM content would lead to different K_{OC} -values. Hence, K_{OC} -values should be regarded as inappropriate parameters to describe or compare adsorption characteristics of UR and SRB.

4 Conclusions

Overall, our systematic batch experiments indicated that increasing clay content led to a strong increase of adsorption of both UR and SRB. In contrast higher OM contents mainly caused lower adsorption of SRB and had only small effect on UR (Fig. 7). Increasing pH led to increasing adsorption of both tracers. Thus, we conclude that (i) adsorption of UR is mainly influenced by pH, while (ii) adsorption of SRB is mainly influenced by the quality of the substrate: positively by clay and negatively by OM. Furthermore, we conclude that (iii) SRB has a higher affinity to mineral surfaces and (iv) UR has a higher affinity to organic surfaces, especially at low pH-values. Moreover, K_{OC} -values should not be used to characterise the sorption of polar fluorescent tracers.

From our experiments no general assumptions can be derived regarding the comparative sorption strength or mobility of the tracers in a given soil. Rather, the conditions under which they are used have to be specified. Only then a statement like "SRB is more sorptive than UR" has validity. Due to the complex adsorption behaviour of UR and SRB in soils and sediments, it will be difficult to find a suitable tracer to completely mimic the sorption characteristics of a specific organic pollutant. Nevertheless, this approach is promising if organic pollutants are classified into larger groups with similar properties and if tracers are identified representing the sorption and transport of these groups. The potential benefits of such a cheaper, faster and easier to operate approach for first approximations of the environmental fate of organic pollutants make further experiments worthwhile. Our analyses stress the substrate dependence of tracer substances and help standardise procedures to characterise and evaluate the tracer capacities of fluorescent substances for the use in specific substrates.

Author contributions. Writing - Original Draft: M.B.; Writing - Review & Editing: M.B., J.L., M.G-R. and F.L.; Conceptualization and Methodology: M.B., J.L., M.G-R. and F.L.; Formal Analysis, Investigation, Validation and Visualization: M.B.; Funding Acquisition: J.L., M.G-R. and F.L.; Project Administration: J.L.

Competing interests. The authors declare that they have no conflict of interest.

Acknowledgements. We thank Lars Best and especially Stefanie Bittner for their extraordinary support during the extensive laboratory analysis. Furthermore, we thank Kenton Stutz for his detailed and very helpful linguistic and technical corrections of the manuscript. This research was funded by the Federal Ministry of Education and Research (BMBF) (02WRM1366B) support measure "Regional water resource management (ReWaM)" in the project MUTReWa (Measures for a sustainable approach to pesticides and their transformation products in the regional water management). The article processing charge was funded by the German Research Foundation (DFG) and the University of Freiburg in the funding programme Open Access Publishing.

References

- Albrecht, A., Schultze, U., Bugallo, P., Wydler, H., Frossard, E., and Flüßler, H.: Behavior of a surface applied radionuclide and a dye tracer in structured and repacked soil monoliths, *Journal of Environmental Radioactivity*, 68, 47–64, [https://doi.org/10.1016/S0265-931X\(03\)00029-8](https://doi.org/10.1016/S0265-931X(03)00029-8), 2003.
- 5 Basabe-Desmonts, L., Reinhoudt, D. N., and Crego-Calama, M.: Design of fluorescent materials for chemical sensing, *Chemical Society reviews*, 36, 993–1017, <https://doi.org/10.1039/b609548h>, 2007.
- Bisutti, I., Hilke, I., and Raessler, M.: Determination of total organic carbon – an overview of current methods, *TrAC Trends in Analytical Chemistry*, 23, 716–726, <https://doi.org/10.1016/j.trac.2004.09.003>, 2004.
- Blume, H.-P., Brümmer, G. W., Fleige, H., Horn, R., Kandeler, E., Kögel-Knabner, I., Kretschmar, R., Stahr, K., and Wilke, B.-M.: Schef-
10 fer/Schachtschabel Soil Science, Springer Berlin Heidelberg, Berlin, Heidelberg, <https://doi.org/10.1007/978-3-642-30942-7>, 2016.
- Boxall, A. B., Blackwell, P., Cavallo, R., Kay, P., and Tolls, J.: The sorption and transport of a sulphonamide antibiotic in soil systems, *Toxicology Letters*, 131, 19–28, [https://doi.org/10.1016/S0378-4274\(02\)00063-2](https://doi.org/10.1016/S0378-4274(02)00063-2), 2002.
- Brunauer, S., Emmett, P. H., and Teller, E.: Adsorption of Gases in Multimolecular Layers, *Journal of the American Chemical Society*, 60, 309–319, <https://doi.org/10.1021/ja01269a023>, 1938.
- 15 Cornell, R. M. and Schwertmann, U.: The iron oxides: Structure, properties, reactions, occurrences and uses / R.M. Cornell, U. Schwertmann, Wiley-VCH, Weinheim and Cambridge, 2nd ed. edn., 2003.
- de Brogniez, D., Ballabio, C., Stevens, A., Jones, R. J. A., Montanarella, L., and van Wesemael, B.: A map of the topsoil organic carbon content of Europe generated by a generalized additive model, *European Journal of Soil Science*, 66, 121–134, <https://doi.org/10.1111/ejss.12193>, 2015.
- 20 Dervev, A.: Beitrag zum Sorptionsverhalten von Fluoreszenztracern: Publikation Gewässerkunde, 63, Diploma thesis, University of Bern, Bern, 1985.
- Dollinger, J., Dages, C., and Voltz, M.: Using fluorescent dyes as proxies to study herbicide removal by sorption in buffer zones, *Environmental science and pollution research international*, <https://doi.org/10.1007/s11356-017-8703-4>, 2017.
- Durst, R., Imfeld, G., and Lange, J.: Transport of pesticides and artificial tracers in vertical-flow lab-scale wetlands, *Water Resources Research*, 49, 554–564, 2013.
- 25 Feller, C., Schouller, E., Fabien, T., Rouiller, J., and Herbillon, A. J.: N₂-BET specific surface areas of some low activity clay soils and their relationships with secondary constituents and organic matter contents, *Soil Science*, 153, 293–299, <https://doi.org/10.1097/00010694-199204000-00005>, 1992.
- Fernández-Pascual, E., Zaman, S., Bork, M., Lang, F., and Lange, J.: Long-term mesocosm experiments to investigate degradation of fluorescent tracers, *Journal of Hydrology X*, p. 100014, <https://doi.org/10.1016/j.hydroa.2018.100014>, 2018.
- 30 Flury, M. and Wai, N. N.: Dyes as tracers for vadose zone hydrology, *Reviews of Geophysics*, 41, <https://doi.org/10.1029/2001RG000109>, 2003.
- Gee, G. W. and Or, D.: Particle-size analysis, in: *Methods of Soil Analysis: Part 4 Physical Methods*, edited by Dane, J. H. and Topp, C. G., vol. 5 of *SSSA Book Series*, pp. 255–293, Soil Science Society of America, 2002.
- 35 Giepmans, B. N. G., Adams, S. R., Ellisman, M. H., and Tsien, R. Y.: The fluorescent toolbox for assessing protein location and function, *Science (New York, N.Y.)*, 312, 217–224, <https://doi.org/10.1126/science.1124618>, 2006.

- Gonçalves, M. S. T.: Fluorescent labeling of biomolecules with organic probes, *Chemical reviews*, 109, 190–212, <https://doi.org/10.1021/cr0783840>, 2009.
- Guggenberger, G. and Kaiser, K.: Dissolved organic matter in soil: Challenging the paradigm of sorptive preservation, *Geoderma*, 113, 293–310, [https://doi.org/10.1016/S0016-7061\(02\)00366-X](https://doi.org/10.1016/S0016-7061(02)00366-X), 2003.
- 5 Gutowski, L., Olsson, O., Lange, J., and Kümmerer, K.: Photolytic transformation products and biological stability of the hydrological tracer Uranine, *Science of The Total Environment*, 533, 446–453, <https://doi.org/10.1016/j.scitotenv.2015.07.002>, 2015.
- Hadi, S., Leibundgut, C., Friedrich, K., and Maloszewski, P.: New fluorescent tracers, in: *Tracer hydrology 97*, edited by Kranjc, A., Balkema, Rotterdam, 1997.
- Hillebrand, O., Nödler, K., Sauter, M., and Licha, T.: Multitracer experiment to evaluate the attenuation of selected organic micropollutants in a karst aquifer, *Science of The Total Environment*, 506–507, 338–343, <https://doi.org/10.1016/j.scitotenv.2014.10.102>, 2015.
- 10 Kaiser, K. and Zech, W.: Dissolved organic matter sorption by mineral constituents of subsoil clay fractions, *Journal of Plant Nutrition and Soil Science*, 163, 531–535, 2000.
- Kasnavia, T., Vu, D., and Sabatini, D. A.: Fluorescent Dye and Media Properties Affecting Sorption and Tracer Selection, *Ground Water*, 37, 376–381, <https://doi.org/10.1111/j.1745-6584.1999.tb01114.x>, 1999.
- 15 Keefe, S. H., Barber, L. B., Runkel, R. L., Ryan, J. N., McKnight, D. M., and Wass, R. D.: Conservative and reactive solute transport in constructed wetlands, *Water Resources Research*, 40, n/a–n/a, <https://doi.org/10.1029/2003WR002130>, 2004.
- Lange, J., Schuetz, T., Gregoire, C., Elsässer, D., Schulz, R., Passet, E., and Tournebise, J.: Multi-tracer experiments to characterise contaminant mitigation capacities for different types of artificial wetlands, *International Journal of Environmental Analytical Chemistry*, 91, 768–785, <https://doi.org/10.1080/03067319.2010.525635>, 2011.
- 20 Leibundgut, C., Maloszewski, P., and Klls, C.: *Tracers in Hydrology*, John Wiley & Sons, Ltd, Chichester, UK, 2009.
- Li, Z. and Psaltis, D.: Optofluidic dye lasers, *Microfluidics and Nanofluidics*, 4, 145–158, <https://doi.org/10.1007/s10404-007-0225-9>, 2008.
- Mägdefessel, J.: *Zum Fließverhalten von Tracern und Schadstoffen im Porengrundwasser*, Diploma thesis, University of Freiburg, Freiburg i. Br., 1990.
- Maillard, E., Lange, J., Schreiber, S., Dollinger, J., Herbstritt, B., Millet, M., and Imfeld, G.: Dissipation of hydro-
25 logical tracers and the herbicide S-metolachlor in batch and continuous-flow wetlands, *Chemosphere*, 144, 2489–2496, <https://doi.org/10.1016/j.chemosphere.2015.11.027>, 2016.
- Mehra, O. P. and Jackson, M. L.: Iron Oxide Removal from Soils and Clays by a Dithionite-Citrate System Buffered with Sodium Bicarbonate, *Clays and Clay Minerals*, 7, 317–327, <https://doi.org/10.1346/CCMN.1958.0070122>, 1958.
- Mikutta, C., Lang, F., and Kaupenjohann, M.: Citrate impairs the micropore diffusion of phosphate into pure and C-coated goethite, *Geochimica et Cosmochimica Acta*, 70, 595–607, <https://doi.org/10.1016/j.gca.2005.10.032>, 2006b.
- 30 Mikutta, C., Krüger, J., Lang, F., and Kaupenjohann, M.: Acid Polysaccharide Coatings on Microporous Goethites, *Soil Science Society of America Journal*, 70, 1547, <https://doi.org/10.2136/sssaj2005.0340>, 2006c.
- Mikutta, R., Kleber, M., Kaiser, K., and Jahn, R.: Review: Organic Matter Removal from Soils using Hydrogen Peroxide, Sodium Hypochlorite, and Disodium Peroxodisulfate, *Soil Science Society of America Journal*, 69, 120, <https://doi.org/10.2136/sssaj2005.0120>, 2005.
- 35 OECD: *OECD Guideline for the testing of chemicals 106: Adsorption - Desorption Using a Batch Equilibrium Method*, 2000.
- Omoti, U. and Wild, A.: Use of fluorescent dyes to mark the pathways of solute movement through soils under leaching conditions: 1. Laboratory experiments, *Soil Science*, 128, 28–33, 1979a.

- Omoti, U. and Wild, A.: Use of fluorescent dyes to mark the pathways of solute movement through soils under leaching conditions: 2. Field experiments, *Soil Science*, 128, 98–104, 1979b.
- Passeport, E., Tournebize, J., Jankowsky, S., Prömse, B., Chaumont, C., Coquet, Y., and Lange, J.: Artificial Wetland and Forest Buffer Zone: Hydraulic and Tracer Characterization, *Vadose Zone Journal*, 9, 73, <https://doi.org/10.2136/vzj2008.0164>, 2010.
- 5 Peterson, C.: pH Dependence and Unsuitability of Fluorescein Dye as a Tracer for Pesticide Mobility Studies in Acid Soil, *Water, Air, & Soil Pollution*, 209, 473–481, <https://doi.org/10.1007/s11270-009-0215-5>, 2010.
- Polat, B. E., Lin, S., Mendenhall, J. D., VanVeller, B., Langer, R., and Blankschtein, D.: Experimental and molecular dynamics investigation into the amphiphilic nature of sulforhodamine B, *The journal of physical chemistry. B*, 115, 1394–1402, <https://doi.org/10.1021/jp109866q>, 2011.
- 10 R Development Core Team: R: A Language and Environment for Statistical Computing, <http://www.R-project.org>, 2008.
- Resch-Genger, U., Grabolle, M., Cavaliere-Jaricot, S., Nitschke, R., and Nann, T.: Quantum dots versus organic dyes as fluorescent labels, *Nature methods*, 5, 763–775, <https://doi.org/10.1038/NMETH.1248>, 2008.
- Sabatini, D. A.: Sorption and Intraparticle Diffusion of Fluorescent Dyes with Consolidated Aquifer Media, *Ground Water*, 38, 651–656, <https://doi.org/10.1111/j.1745-6584.2000.tb02700.x>, 2000.
- 15 Sabatini, D. A. and Austin, T. A. I.: Characteristics of Rhodamine WT and Fluorescein as Adsorbing Ground-Water Tracers, *Ground Water*, 29, 341–349, <https://doi.org/10.1111/j.1745-6584.1991.tb00524.x>, 1991.
- Schaumann, G. E. and Thiele-Bruhn, S.: Molecular modeling of soil organic matter: Squaring the circle?, *Geoderma*, 166, 1–14, <https://doi.org/10.1016/j.geoderma.2011.04.024>, 2011.
- Schuetz, T., Weiler, M., and Lange, J.: Multitracer assessment of wetland succession: Effects on conservative and nonconservative transport processes, *Water Resources Research*, 48, 2012.
- 20 Schwarzenbach, R. P., Gschwend, P. M., and Imboden, D. M.: *Environmental Organic Chemistry*, John Wiley & Sons, Inc, Hoboken, NJ, USA, <https://doi.org/10.1002/0471649643>, 2002.
- Schwertmann, U.: Differenzierung der Eisenoxide des Bodens durch Extraktion mit Ammoniumoxalat-Lösung, *Zeitschrift für Pflanzenernährung, Düngung, Bodenkunde*, 105, 194–202, <https://doi.org/10.1002/jpln.3591050303>, 1964.
- 25 Scientific Committee on Consumer Products: Opinion on Acid Red 52, 24 June 2008, European Commission, 2008.
- Smart, P. L. and Laidlaw, I. M. S.: An evaluation of some fluorescent dyes for water tracing, *Water Resources Research*, 13, 15–33, <https://doi.org/10.1029/WR013i001p00015>, 1977.
- Tahir, S. and Marschner, P.: Clay amendment to sandy soil—effect of clay concentration and ped size on nutrient dynamics after residue addition, *Journal of Soils and Sediments*, 16, 2072–2080, <https://doi.org/10.1007/s11368-016-1406-5>, 2016.
- 30 U.S. Environmental Protection Agency: Understanding variation in partition coefficient, K_d, values, volume I: the K_d model, methods of measurement, and application of chemical reaction codes, 1999.
- U.S. Environmental Protection Agency: Estimation Programs Interface Suite™ for Microsoft® Windows, v 4.11. United States Environmental Protection Agency, Washington, DC, USA, 2012.
- Vanderborght, J., Gähwiler, P., and Flüher, H.: Identification of Transport Processes in Soil Cores Using Fluorescent Tracers, *Soil Science Society of America Journal*, 66, 774, <https://doi.org/10.2136/sssaj2002.0774>, 2002.
- 35 Wernli, H. R.: Naphtionat - ein neuer Fluoreszenztracer zur Wassermarkierung, *Deutsche Gewässerkundliche Mitteilungen*, 1986.
- Wernli, H. R.: Einführung in die Tracerhydrologie: Hydrologisches Praktikum, 2011.

Wiseman, C. L. S. and Puttmann, W.: Soil organic carbon and its sorptive preservation in central Germany, *European Journal of Soil Science*, 56, 65–76, <https://doi.org/10.1111/j.1351-0754.2004.00655.x>, 2005.

Zanker, V. and Peter, W.: Die prototropen Formen des Fluoresceins, *Chemische Berichte*, 91, 572–580, <https://doi.org/10.1002/cber.19580910316>, 1958.

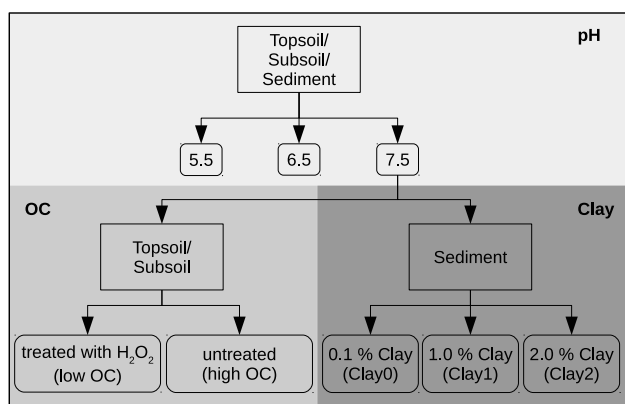


Figure 1. Experimental design for the different treatments of the batch experiments.

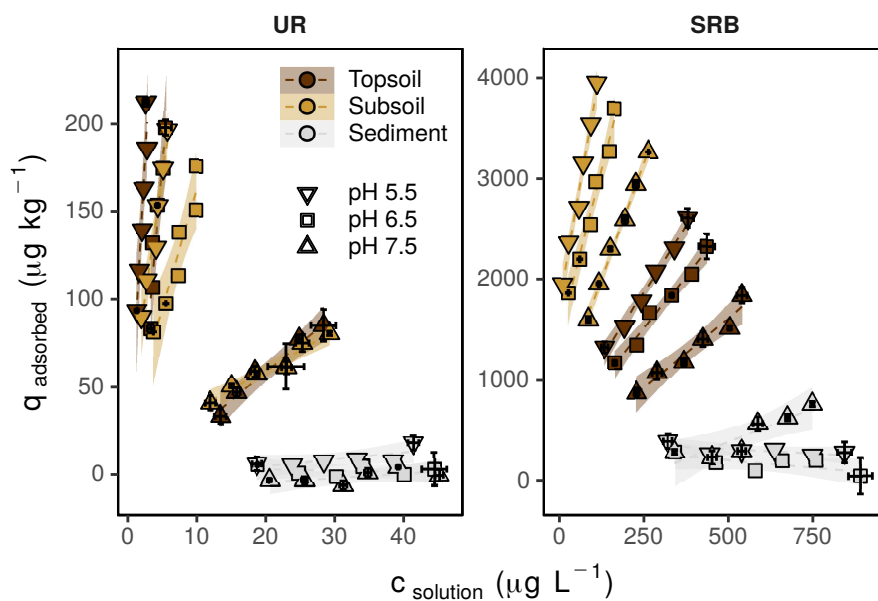


Figure 2. Sorption-isotherms for UR and SRB determined at pH 5.5 (down-pointing triangle), 6.5 (square) and 7.5 (up-pointing triangle) in topsoil (brown), subsoil (yellow) and sediment (grey). The errorbars represent the standard deviation of the tracer concentration measured in solution (c_{solution}) and the calculated content of adsorbed tracer (q_{adsorbed}) ($n=3$). Note the different concentration ranges of UR and SRB. The transparent areas around the regression lines represent the 95 %-confidence intervals.

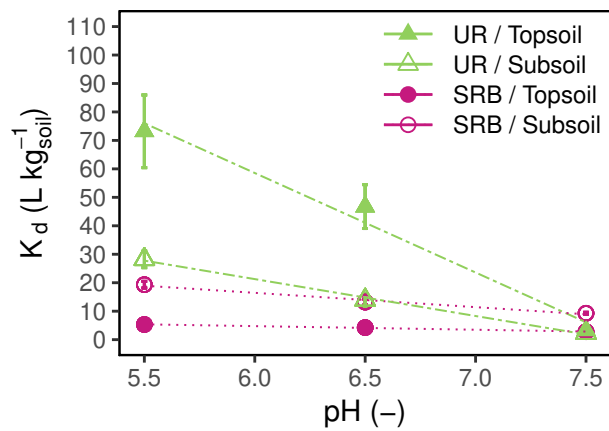


Figure 3. K_d -values as function of pH for UR (triangles, dash-dotted lines) and SRB (circles, dotted lines) in topsoil (filled symbols) and subsoil (open symbols). The error bars represent the standard errors of K_d -values from linear regression (n=18).

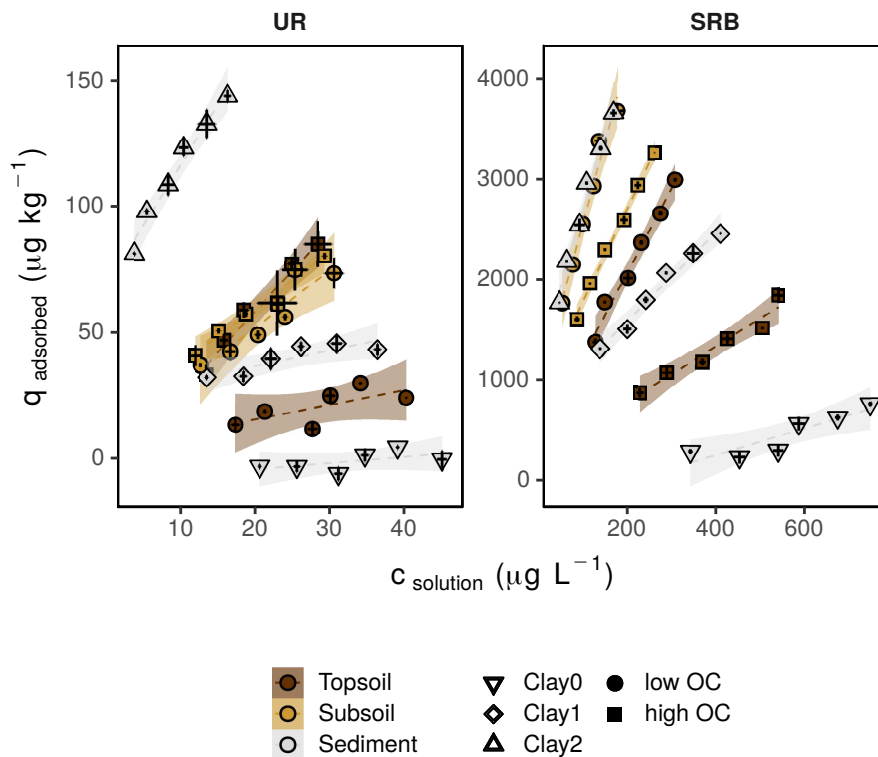


Figure 4. Sorption-isotherms for UR and SRB in topsoil (brown), subsoil (yellow) and sediment (grey) at different OC (filled symbols) and clay (open symbols) conditions. The high OC treatments (square) represent the untreated samples, low OC (circle) the H_2O_2 -treated samples. Clay0 (down-pointed triangle) represents the sediment without clay addition, Clay1 (diamond) and Clay2 (up-pointed triangle) are sediment plus 1% and 2% clay addition. The errorbars represent the standard deviation of the tracer concentration measured in solution (c_{solution}) and the calculated content of adsorbed tracer (q_{adsorbed}) ($n=3$). Note the different concentration ranges of UR and SRB. The transparent areas around the regression lines represent the 95%-confidence intervals.

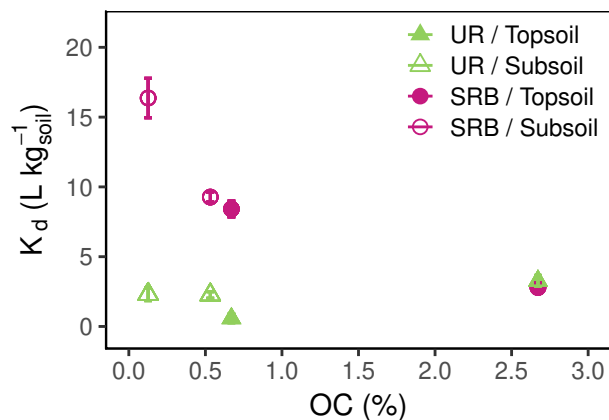


Figure 5. K_d -values as function of OC (%) for UR (triangles) and SRB (circles) in topsoil (filled symbols) and subsoil (open symbols). For each tracer and type of substrate (top- or subsoil) the K_d -value at lower OC-value result from the H_2O_2 -treatment. The error bars represent the standard errors of K_d -values from linear regression.

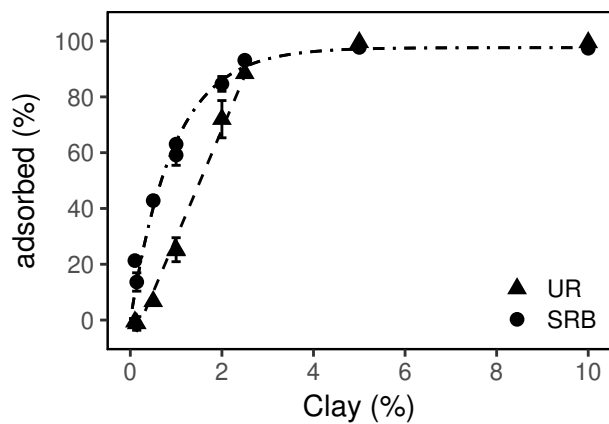


Figure 6. Adsorbed percentage as a function of the clay content for UR (triangles) and SRB (circles) in the sediment (n=18 for data points at 0.14, 1 and 2% clay- addition and n=1 for all other data points). The errorbars represent the standard deviation. The dashed line is the linear regression line of UR adsorption and the dot-dashed line is the exponential regression line of SRB adsorption.

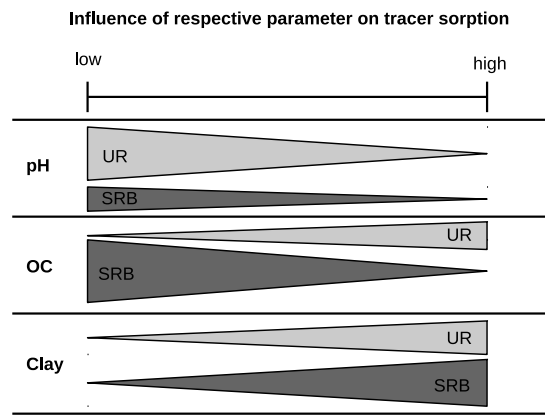


Figure 7. Schematic figure of the influence of the parameters OC, Clay and pH on the adsorption of the fluorescent tracers UR and SRB. The width of the bars represents the measure of sorption and "low" and "high" refers to the soil properties.

Table 1. K_d -values for UR and SRB found by several researchers.

K_d ($L \cdot kg_{soil}^{-1}$)		Exp.*	Sand	Silt (%)	Clay	pH (-)	OC (%)	t_{batch} (h)	Source
UR	SRB								
1 - 9.7	4.7 - 77.4	B	7.8 - 77	13 - 62	8 - 35	6.0 - 8.5	0.5 - 8.6	24	(Dollinger et al., 2017)
-	1.8 - 3.2	C	20.8	72.8	6.4	7.5	5.2 ^a	-	(Durst et al., 2013) ^b
0	2.9	B	10	80	10	-	5.3	-	(Schuetz et al., 2012)
-	4.4 - 9.1	B		silty loam		7.2 - 7.3	< 4.8	48	(Albrecht et al., 2003)
10	-	B		limestone		neutral	0.8	> 24	(Sabatini, 2000)
-	1.2 - 3.2	B		sand stone		neutral	0.04	> 24	(Sabatini, 2000)
-	2.4 - 18.3	B	45	34	21	3.6 - 4.0	2.0 - 0.3	48	(Vanderborght et al., 2002)
0 - 1.35	-	B		sandy silty material		-	-	-	(Hadi et al., 1997)
0.05 - 0.33	-	B/C	97.3	2.2	0.5	7.9	0.3	2	(Sabatini and Austin, 1991)
0.28 - 0.4	29.4 - 36.6	B	79	19	2.0	-	-	-	(Mägdefessel, 1990) ^c
0.48	42	B	79	19	2	-	-	-	(Mägdefessel, 1990) ^d
0	-	B		sandy material		prob. > 7.0	-	-	(Dervey, 1985; Wernli, 1986) ^c
0	4.8 - 8.6	B		sandy material		-	-	-	(Wernli, 1986) ^d
1.3 - 10.3	-	B/C		loamy sand		6.5 - 7.0	2	24	(Omoti and Wild, 1979a)
0.2 - 4.8	1.3 - 15.3	B	97.6 - 95.6	2.3	0.1 - 2.1	7.5	0.8	48	this study
0.6 - 73.2	2.7 - 19.3	B	25.4 - 26.3	50.6 - 51.3	22.4 - 24.0	5.5 - 7.5	0.1 - 2.7	48	this study

* B: Batch experiment; C: Column experiment

^a Total organic carbon

^b Boundaries of sand and silt size ranges differ slightly in this study: Sand [50-1000 μm], Silt [2-50 μm].

^c cited in Leibundgut et al. (2009)

^d cited in Wernli (2011)

Table 2. Texture, pH-values, OC-, and metal oxide-contents (mean of three measurements), DOC concentrations (median of two measurements) and specific surface area (median of two measurements) of top- and subsoil and the sediment in dependence of the respective treatment (high or low OC). The treatment "high OC" are the untreated samples and "low OC" the H₂O₂-treated samples. Me_o is the summed content of all oxalate extractable metal oxides (Fe_o + Al_o + Mn_o) and Me_d is the summed content of all dithionite extractable metal oxides (Fe_d + Al_d + Mn_d).

Substrate	Treatment	OC (%)	Sand : Silt : Clay (%)	pH ^g (-)	Me _o ^d (mmol · kg ⁻¹)	Me _d ^d (mmol · kg ⁻¹)	Me _o / Me _d (-)	DOC ^e (mg · L ⁻¹)	SSA ^e (m ² · g ⁻¹)
Topsoil	low OC	0.7							
Topsoil	high OC	2.7	25.4 : 50.6 : 24.0	4.8 / 4.8	137 ± 4.0	206 ± 4.1	0.67	45 ± 0.3	12 ± 0.02
Subsoil	low OC	0.1							
Subsoil	high OC	0.6	26.3 : 51.3 : 22.4	4.3 / 4.3	92 ± 2.6	243 ± 12	0.38	29 ± 0.03	10 ± 0.12
Clay (pure) ^a	-	-	0 : 0 : 100	-	-	-	-	-	249 ± 0.28 ^f
Sediment	Clay0	0.8	97.6 : 2.3 : 0.1	9.1 / 8.1	2 ± 0.04	18 ± 2.4	0.10	4 ± 0.1	1.1 ± 0.04
Se+Clay ^b	Clay1	-	96.6 : 2.3 : 1.1 ^c	-	-	-	-	-	3.6 ^c
Se+Clay ^b	Clay2	-	95.6 : 2.3 : 2.1 ^c	-	-	-	-	-	6.1 ^c

^a Montmorillonite.

^b Addition of 1 % or 2 % of the clay mineral montmorillonite.

^c Values are calculated from Clay content and SSA for sediment and the pure clay mineral.



^d Mean and standard deviation of three measurements.

^e Range of two measurements.

^f Standard deviation of four measurements.

^g pH in H₂O / pH in 0.01 M CaCl₂-solution.

Table 3. Characterisation of fluorescent tracers.

Parameter	Uranine	Sulforhodamine B
Molecular Structure		
Cas-No.	518-47-8	3520-42-1
C.I. (Name)	Acid Yellow 73 ^a	Acid Red 52 ^a
Chem. formula	C ₂₀ H ₁₀ O ₅ Na ₂	C ₂₇ H ₂₉ N ₂ NaO ₇ S ₂
Toxicity	Harmless ^a	Sufficient ^a
M _w (g · mol ⁻¹)	376	580
Ex. / Em. (nm)	491/516 ^a	560 / 585 ^a
Solubility (g · L ⁻¹)	300 (20 °C) ^a	10 (10 °C) ^a
Relative fluorescence intensity (%) *	100 ^a	7 ^a
pK _a [-]	1.95 / 5.05 / 7.00 ^b	< 1.5 ^c
log(K _{OW})	3.35 ^d / -0.67 ^e	1.3 ^f

^a Source: Leibundgut et al. (2009)

^b Source: Zanker and Peter (1958)

^c Source: Kasnavia et al. (1999)

^d log(K_{OW}) for the twofold protonated (neutral) species (dominant species between pH 1.95 and 5.05), Calculated with U.S. Environmental Protection Agency (2012)

^e log(K_{OW}) for the disodium salt (twofold negative charged) species (dominant species above pH 7.00), Calculated with U.S. Environmental Protection Agency (2012)

^f log(K_{OW}) at pH 7.15, Source: Scientific Committee on Consumer Products (2008)

* values in pure natural water (groundwater)

Table 4. K_d -values for UR and SRB adsorption in topsoil, subsoil and sediment at pH 5.5, 6.5 and 7.5 with different clay and OC treatments. The OC treatment "high OC" represents the untreated samples and "low OC" the H_2O_2 -treated samples. The clay treatments Clay0, Clay1 and Clay2 represent the sediment with 0 %, 1 % and 2 % clay additions, respectively.

pH (-)	Substrate	Treatment	K_d^a	conf. interval	K_d^a	conf.interval	R^2	
			($L \cdot kg_{soil}^{-1}$)		($L \cdot kg_{soil}^{-1}$)		UR	SRB
			UR		SRB			
5.5	Subsoil	high OC	28.2 ± 2.9 ***	[20.1, 36.2]	19.3 ± 1.2 ***	[16.1, 22.6]	0.96	0.99
5.5	Topsoil	high OC	73.2 ± 12.8 **	[37.7, 108.6]	5.3 ± 0.3 ***	[4.5, 6.1]	0.89	0.99
6.5	Subsoil	high OC	13.9 ± 2.3 **	[7.5, 20.3]	13.2 ± 1.1 ***	[10.3, 16.2]	0.90	0.98
6.5	Topsoil	high OC	46.7 ± 7.7 **	[25.3, 68.2]	4.2 ± 0.3 ***	[3.4, 5.1]	0.90	0.98
7.5	Subsoil	low OC	2.3 ± 0.5 **	[1.0, 3.6]	16.4 ± 1.4 ***	[12.4, 20.3]	0.86	0.97
7.5	Subsoil	high OC	2.3 ± 0.2 **	[1.6, 2.9]	9.3 ± 0.3 ***	[8.3, 10.2]	0.96	0.99
7.5	Topsoil	low OC	0.6 ± 0.3 *	[-0.3, 1.4]	8.4 ± 0.6 ***	[6.8, 10.0]	0.46	0.98
7.5	Topsoil	high OC	3.3 ± 0.4 ***	[2.2, 4.4]	2.8 ± 0.3 **	[1.9, 3.7]	0.95	0.95
7.5	Sediment	Clay0	0.2 ± 0.2 *	[-0.2, 0.7]	1.3 ± 0.3 *	[0.4, 2.2]	0.34	0.80
7.5	Se + 1 % Clay ^b	Clay1	0.6 ± 0.2 *	[0.1, 1.1]	4.5 ± 0.3 ***	[3.6, 5.3]	0.74	0.98
7.5	Se + 2 % Clay ^b	Clay2	4.8 ± 0.4 ***	[3.7, 5.9]	15.3 ± 1.0 ***	[12.5, 18.2]	0.97	0.98

^a K_d -values were determined by linear regression and are presented \pm standard error

^b Addition of 1 % or 2 % of the clay mineral montmorillonite.

significance levels of K_d -values: (***) $p < 0.001$; (**) $p < 0.01$; (*) $p < 0.05$