# Satellite soil moisture data assimilation for improved operational continental water balance prediction

3 Siyuan Tian<sup>1</sup>, Luigi J. Renzullo<sup>1</sup>, Robert C. Pipunic<sup>2</sup>, Julien Lerat<sup>2</sup>, Wendy Sharples<sup>2</sup>, Chantal Donnelly<sup>2</sup>

4 <sup>1</sup>Fenner School of Environment & Society, Australian National University, Canberra, 2601, Australia

5 <sup>2</sup>Bureau of Meteorology, Melbourne, 3000, Australia

6 Correspondence to: Siyuan Tian (siyuan.tian@anu.edu.au)

7 Abstract. A simple and effective two-step data assimilation framework was developed to improve soil moisture representation 8 in an operational large-scale water balance model. The first step is a *Kalman* filter type sequential state updating process that 9 exploits temporal covariance statistics between modelled and satellite-derived soil moisture to produce analysed estimates. 10 The second step is to use analysed surface moisture estimates to impart mass conservation constraints (mass redistribution) on 11 related states and fluxes of the model using tangent linear modelling theory in a post-analysis adjustment after the state updating 12 at each time step. In this study, we assimilate satellite soil moisture retrievals from both SMAP and SMOS missions 13 simultaneously into the Australian Water Resources Assessment Landscape model (AWRA-L) using the proposed framework 14 and evaluate its impact on the model's accuracy against in-situ observations across water balance components. We show that 15 the correlation between simulated surface soil moisture and in-situ observation increases from 0.54 (open-loop) to 0.77 (data 16 assimilation). Furthermore, indirect verification of root-zone soil moisture using remotely sensed Enhanced Vegetation Index 17 (EVI) time series across cropland areas results in significant improvements from 0.52 to 0.64 in correlation. The improvements 18 gained from data assimilation can persist for more than one week in surface soil moisture estimates and one month in root-19 zone soil moisture estimates, thus demonstrating the efficacy of this data assimilation framework.

## 20 1 Introduction

21 Accurate estimation of soil moisture is fundamental to monitoring and forecasting water availability and land surface 22 conditions under extreme events such as droughts, heatwaves and floods (Ines et al., 2013;Sheffield and Wood, 2007;Tian et 23 al., 2019b). The spatial pattern of soil moisture can vary significantly due to the heterogeneous spatial distribution of rainfall 24 and variability in soil properties, land cover type and topography. Due to this large spatial variability, the utility of groundbased, point-scale measurements is limited in estimating soil water availability at continental scale. Soil moisture estimates 25 26 from land surface models are adversely affected by the uncertainties of atmospheric forcing, model dynamics and model 27 parameterization. Remotely sensed data can provide spatially and temporally varying constraints on the modelling of 28 biophysical landscape variables that are often superior to that achieved by a single static set of model parameters. Data assimilation merges models and observations in a way that take advantage of their respective strength (e.g. uncertainty, coverage), resulting in improved accuracy, coverage, and ultimately forecasting capability.

31 The assimilation of satellite soil moisture (SSM) into land surface and hydrology models has been repeatedly demonstrated to 32 improve model representation of soil water dynamics, evapotranspiration and streamflow (De Lannov and Reichle, 33 2016:Draper et al., 2012:Kumar et al., 2009:Li et al., 2012:Pipunic et al., 2008:Reichle and Koster, 2005:Renzullo et al., 34 2014; Tian et al., 2019a; Tian et al., 2017; Crow and Yilmaz, 2014; Su et al., 2014a; Alvarez-Garreton et al., 2015; Crow and Ryu, 35 2009;Baldwin et al., 2017;Patil and Ramsankaran, 2017;Wanders et al., 2014b;Peters-Lidard et al., 2011). Accurate knowledge 36 of initial soil moisture states gained from data assimilation contributes significantly to the skill of flood forecasting, drought 37 monitoring and weather forecasts (Bolten et al., 2009:Carrera et al., 2019:Wanders et al., 2014b:Yan et al., 2018:Alvarez-38 Garreton et al., 2015). Wanders et al. (2014a) found that the assimilation of remotely sensed soil moisture in combination with 39 discharge observation can improve the quality of the operational flood alerts, both in terms of timing and in the exact height 40 of the flood peak.

41 Methods of assimilation are many and varied, however commonalities exist between them. These commonalities are such, that 42 for any time step, the time integrated first guess (the forecast) of soil moisture states are adjusted by an amount determined by 43 the difference between observed and modelled soil moisture (the innovation), which is weighted by the respective error 44 variances of modelled and observed quantities (the gain), to generate revised soil moisture states (the analysis). At the end of 45 this process, the revised model soil moisture states are out of balance with the other stores and fluxes, until the model integrates 46 forward to the next time step, whereupon water balance discontinuity is progressively removed through model physics. Soil 47 moisture is the linchpin between atmospheric fluxes, surface- and ground-water hydrology, thus it is important that any changes 48 in modelled state variables are not detrimental to other components of the water balance. However, the assimilation of remotely 49 sensed soil moisture or total water storage data may lead to undesired impacts on groundwater or evapotranspiration 50 simulations due to the mass imbalance or random error covariances (Girotto et al., 2017; Tangdamrongsub et al., 2020; Tian et 51 al., 2017). Studies considering mass conservation in data assimilation often require extra data sources such as 52 evapotranspiration and runoff as constraints or without considering the fluxes (Li et al., 2012:Pan and Wood, 2006).

From an operational water balance perspective, is it important that the method of data assimilation be: i) computationally 53 54 efficient for routine, automated simulation over the whole model domain; ii) robust to data gaps; and iii) make lasting positive 55 improvements to future predictions of soil water stores and fluxes. An additional constraint is that if a data assimilation method is applied to an existing operational system, then it ought to require minimal modification to the system framework, and be as 56 57 least disruptive as possible to the model performance. Currently, there are few operational continental water balance modelling 58 systems that provide near-real time soil moisture estimates that have been constrained through the assimilation of satellite 59 observations, and mainly at a relatively coarse resolution. Some recent examples include surface soil wetness observations 60 from Advanced Scatterometer (ASCAT) active radar system, on the meteorological operational satellite (MetOp), being

assimilated into Unified Model (Davies et al., 2005) through nudging to provide soil moisture analysis at 40 km globally 61 62 (Dharssi et al., 2011). Additionally, ASCAT data are used in the ECMWF (European Centre for Medium-Range Weather 63 Forecasts) Land Data Assimilation System through a simplified Extended Kalman Filter approach (de Rosnay et al., 2013) to provide near-real time surface soil moisture and root-zone soil moisture at 25-km resolution globally. SMOS (Soil Moisture 64 and Ocean Salinity) brightness temperatures have been assimilated in ECMWF's global NWP (Numerical Weather Prediction) 65 66 system through the Surface Data Assimilation System, based on the Extended Kalman filter, to produce soil moisture reanalysis 67 at 40-km resolution (Muñoz-Sabater, 2015). Level-2 Radiometer soil moisture retrievals from SMAP mission (Entekhabi et al., 2010) have been assimilated into the real-time instance of the NASA Land Information System (LIS) over the 68 Conterminous United States (CONUS) to produce hourly outputs at 0.03° resolution using ensemble Kalman filter 69 70 (Blankenship et al., 2018). However, unlike the aforementioned systems where data assimilation is inherent in the system 71 design, many operational water balance models, or catchment hydrology models, are calibrated to observations a priori. 72 Including data assimilation as an afterthought restrains the flexibility of the system, thereby limiting the complexity of the data 73 assimilation scheme for operational use.

74 In this study, we develop a simple, computationally efficient, and effective data assimilation framework with mass 75 conservation for incorporating satellite soil moisture products into an existing operational national water balance model. We 76 demonstrate the application of the method to the Australian Water Resources Assessment Landscape model (AWRA-L), which 77 provides daily water balance estimates at ~5-km resolution across Australia, with the assimilation of satellite soil moisture 78 from both SMOS and SMAP. The proposed data assimilation framework is a two-step process that requires minimal modification of the existing operational system. The first step is the sequential state updating, with weightings between models 79 80 and observations derived from the Triple Collocation (TC) approach (Chen et al., 2018;Crow and Van den Berg, 2010;Crow and Ryu, 2009;Crow and Yilmaz, 2014;Su et al., 2014b;Yilmaz and Crow, 2014). The second step is to impart mass 81 82 conservation constraints on related states and fluxes such as root-zone soil water storage, evapotranspiration and streamflow, 83 thus improving the accuracy of the water balance post assimilation. Accurate initial water balance conditions are of critical importance in the forecasting of water availability and land surface water dynamics. However, few studies quantify how long 84 85 the impacts of data assimilation persist in the model system's memory. To explore the impacts of data assimilation on model 86 predictions, we quantified the persistence of the correction to key model components with respect to open-loop simulations, 87 to illustrate the potential gains from data assimilation in improving water balance forecasts.

#### 88 2 Materials

#### 89 2.1 Australian Water Resources Assessment Modelling system

90 The Australian Water Resources Assessment Landscape (AWRA-L) model (Van Dijk, 2010) underpins the annual national 91 water resource assessments and water use accounts for Australia (Frost et al., 2018). The operational implementation of the 92 AWRA-L by the Australian Bureau of Meteorology provides daily 0.05-degree (approximately 5 km) national gridded water 93 balance estimates. The outputs from the operational AWRA-L has been widely used in various agricultural applications and

94 natural resources risk assessment and planning, including commodity forecasting, irrigation scheduling, flood and drought risk

95 analysis, as well as flood forecasting (Frost et al., 2018;Hafeez et al., 2015;Nguyen et al., 2019;Van Dijk et al., 2013;van Dijk

96 and Renzullo, 2011). The version of the AWRA-L model used in the study was obtained from the Community Modelling

97 system (AWRA-CMS) and is freely available from https://github.com/awracms/awra cms.

98 AWRA-L is a one-dimensional grid-based model that simulates water balance for each grid cell across the modelling domain 99 by distributing rainfall influx into plant-accessible water, soil moisture and groundwater stores, and computing outflux such 100 as evapotranspiration, runoff and deep drainage. The soil water column is partitioned into three layers (surface: 0-10 cm. shallow: 10–100 cm, and deep: 1–6 m) and simulated separately for two hydrological response unit, i.e. deep-rooted (trees) 101 102 and shallow-rooted (grass) vegetation. The water storage for the surface-layer soil is termed  $S_0$ , while  $S_s$  is used for the 103 shallow-layer and  $S_d$  for the deeper-layer. In addition to the modelling of soil columns, the model includes a surface water and 104 a groundwater storage that are simulated at each grid cell and conceptualized as a small unimpaired catchment. In this study, 105 we used forcing inputs from the AWAP (Australian Water Availability Project) gridded climate data including daily 106 precipitation, air temperature and solar exposure (Jones et al., 2009), and interpolated site-based wind speed (McVicar et al., 107 2008). It is acknowledged that the accuracy of the model estimates is limited in regions with insufficient coverage in the 108 ground-based observation network (e.g. rain gauges) which is the raw source of AWAP gridded data used to force the model. 109 This is limited to very remote and mostly uninhabited arid regions in Australia.

#### 110 **2.2 Satellite soil moisture (SSM)**

To maximize daily spatial coverage, we used two satellite soil moisture products derived from passive L-band systems: the 111 112 Soil Moisture Active-Passive (SMAP) product from NASA (Entekhabi et al., 2010); and the product from the European Space 113 Agency's (ESA's) Soil Moisture and Ocean Salinity (SMOS) mission (Kerr et al., 2001). The SMAP product is the level-2 114 enhanced radiometer half-orbit 9-km EASE-grid soil moisture (Chan et al., 2018). The SMOS product is the level-2 soil moisture product on ~ 25-km grid (Rahmoune et al., 2013). Both SMAP and SMOS produce volumetric soil moisture estimates 115 116 (units m<sup>3</sup>/m<sup>3</sup>) of approximately the upper 5 cm of soil. Available swath data for each product covering Australia were collated 117 for each 24-hour period approximating the AWRA-CMS operational time steps and resampled to a regular 0.05-degree grid 118 across the modelling domain using linear interpolation from 2015 to 2019. The volumetric soil moisture retrievals from both 119 SMAP and SMOS were converted into water storage units (mm) to be consistent in units and soil depths with model estimates, 120 using mean and variance matching to remove the systematic bias. Figure 1 shows an example of daily composites of SMAP (Fig1.a) and SMOS (Fig1.b) soil moisture retrievals in model units compared to AWRA-L estimates of So (Fig1.c). For regions 121 122 with sparse rain-gauge coverage such as central Western Australia (Figl.c), AWRA-L modeled  $S_{o}$  persists as zeros or very 123 low values for the experiment period, reflecting a deficiency in the gauge-based analysis of daily rainfall used to drive model 124 simulations. The result of mean and variance matching in these gauge-sparse areas will flatten the variability of SSM time 125 series to zero when using values of the modelled S0 for these areas directly. To resolve this problem, and fully leverage the 126 information available in the SSM products to fill the gaps in modelled outputs across the continent, we derived a set of 127 coefficients for the mean and variance matching over the gauge sparse regions by sampling modelled and SSM data from cells 128 surrounding the gaps. Specifically, we fitted a linear model between the maximum SSM values through time and the 129 coefficients for mean and variance matching for each cell in neighboring region. We applied the derived linear relationship to 130 estimate the correspond 'slope' and 'intercept' from the maximum SSM values in the rainfall gaps. This provided a 131 transformation of the SSM into water storage unit (mm) and ensures the assimilation can effectively influence the spatial 132 pattern of soil moisture over the sparsely gauged regions.

#### 133 2.3 Validation data

## 134 2.3.1 In-situ measurements

135 Evaluation of the modelled soil water storages was made against measurements from three soil moisture monitoring networks 136 in Australia from 2016 to 2018, namely OzNet (Smith et al., 2012), CosmOz (Hawdon et al., 2014) and OzFlux (Fig. 1d). 137 AWRA-L model estimates of water storage in surface soil layer were compared against in situ measurements from the top 10 138 cm of soil across all three networks. The depths of in situ measurements of root-zone moisture varied across networks from 0-30 cm to 0-1 m. As such, AWRA-L soil water storages over the root-zone were constructed by combining surface- and shallow-139 140 layer soil water storage in the appropriate proportions to be consistent with in situ measurement depth. OzFlux sites are also 141 used for the evaluation of AWRA-L evapotranspiration estimates, which were calculated from accumulated latent heat flux 142 measurements at each location. In total, there are 45 sites for soil moisture validation and 14 sites for evapotranspiration 143 validation. Streamflow observations for 110 catchments across Australia have been used in the validation based on the quality 144 and data availability (Fig. 1d).

# 145 2.3.2 Vegetation index

146 In water-limited regions like Australia, shallow-rooted vegetation normally responds quickly to soil water availability, 147 typically within a month. Consistency between root-zone soil water storage and vegetation greenness may be considered as an 148 indirect independent verification of the simulation of root-zone soil water dynamics (Tian et al., 2019a; Tian et al., 2019b). The 149 0.05-degree monthly Enhanced Vegetation Index (EVI) from Moderate Resolution Imaging Spectroradiometer (MODIS, 150 MYD13C2 v6) was used to evaluate estimates of monthly root-zone soil water storage (the sum of water storage in surfacelayer  $(S_0)$  and shallow-layer  $(S_s)$  within the AWRA-L soil column) over cropland regions of the continent. The EVI is used 151 152 here to characterize vegetation dynamics since it is less sensitive to atmospheric effects and canopy background noise, and has 153 a greater dynamic range (i.e., less likely to saturate) in areas of dense vegetation compared to the Normalized Difference 154 Vegetation Index (NDVI). The choice of root-zone soil water storage at the 0-1 m depth is due to the average rooting depths 155 varying from 30 - 80 cm over the cropland areas in Australia (Donohue et al., 2012; Figueroa-Bustos et al., 2018; Incerti and 156 O'Leary, 1990). The 250-m land cover classification map from Geoscience Australia (Lymburner, 2015) was resampled to

157 0.05 degree over the model domain and used in the identification of cropland areas.

#### 158 **3 Method**

## 159 **3.1 Triple collocation-based error characteristics**

Triple collocation (TC) was developed as a method of quantifying error characteristics in geophysical variables when the 160 161 true error structure is elusive. It was first applied to near-surface wind data (Stoffelen, 1998) and later extensively applied to 162 soil moisture (Chen et al., 2018;Crow and Yilmaz, 2014;Dorigo et al., 2017;McColl et al., 2014;Scipal et al., 2008;Su et al., 163 2014a; Yilmaz and Crow, 2014; Zwieback et al., 2013; Crow and Van den Berg, 2010) and rainfall (Alemohammad et al., 164 2015; Massari et al., 2017). The assumption of this approach is that three independent data sets of the same geophysical 165 variable can be used to infer the error variances in each. Here we use TC as a way of inferring error variances from our three 166 independent estimates of surface soil moisture, AWRA-L S<sub>0</sub>, SMAP, and SMOS from 2015 to 2019. Those three collocated 167 measurements were assumed to be linearly related to the true value with additive random errors. To ensure the errors from 168 the three independent sources were unbiased relative to each other, SMAP and SMOS soil moisture retrievals were rescaled 169 to the reference model estimates (AWRA-L  $S_0$ ) using temporal mean and variance matching. McColl et al. (2014) shows that 170 the error variances ( $\sigma^2$ ) of each data set can be calculated from the temporal variance and covariance between data sets 171 respectively as:

172 
$$\sigma_x^2 = \left(Q_{x,x} - \frac{Q_{x,y}Q_{x,z}}{Q_{y,z}}\right), \quad \sigma_y^2 = \left(Q_{y,y} - \frac{Q_{x,y}Q_{y,z}}{Q_{x,z}}\right) \quad \text{and} \quad \sigma_z^2 = \left(Q_{z,z} - \frac{Q_{z,y}Q_{x,z}}{Q_{x,y}}\right)$$
(1)

173 where x, y and z denote AWRA-L, SMAP and SMOS soil moisture estimates respectively and Q denotes temporal variance 174 and covariance between the data sets. These estimates of error variance are used in the determination of the weighting of each 175 data source in the data assimilation (Section 3.2).

## 176 3.2 Sequential state updating

The data assimilation method used here is a time sequential updating of model state(s) given observations of relevant model variables (Reichle, 2008). There are two key modelling components in data assimilation: the dynamics operator, which describes the time integration of the system states and fluxes, which in this study is the AWRA-CMS; and the observation operator, which provides the mathematical mapping from state to observation space. The role of the observation operator is to perform a mapping between observation and state space, as often observations are not directly comparable to model states.

182 The common state updating equation for sequential data assimilation is written as:

183 
$$x_t^a = x_t^f + K_t[y_t - H(x_t^f)]$$
 (2)

which says that the best estimate of model state, known as analysis  $(x_t^a)$ , is equal to the first guess or forecast  $(x_t^f)$  plus a 184 weighted difference between observations,  $y_t$ , and the model equivalent to the observation,  $H(x_t^f)$ , for that time step. In this 185 186 study, the AWRA-L model soil water storage in  $S_{\theta}$  for shallow-rooted vegetation and deep-rooted vegetation at surface layer 187 are updated directly through the sequential data assimilation. Satellite surface soil moisture (SSM) products from both SMOS 188 and SMAP are used as the observations to update the model simulation. The observation operator H here is the aggregation of 189 soil water storage estimates in the top-soil laver for two land cover types, i.e. shallow-rooted vegetation and deep-rooted 190 vegetation. When both SMAP and SMOS observations are available, Equation 2 can be written as a weighted linear combination of model estimates  $(x_t^f)$  and satellite observations  $(y_t^{SMAP} : SMAP \text{ observations}, y_t^{SMOS} : SMOS \text{ observations})$  as: 191

193 
$$x_t^a = K_x x_t^f + K_y y_t^{SMAP} + K_z y_t^{SMOS}$$
 (3)  
194

195 The gain factor, *K*, contains the error variances ( $\sigma^2$ ) for both model estimates and observations and can be written as: 196

197 
$$K_x = \frac{\frac{1}{\sigma_x^2}}{\frac{1}{\sigma_x^2} + \frac{1}{\sigma_y^2} + \frac{1}{\sigma_z^2}}, K_y = \frac{\frac{1}{\sigma_y^2}}{\frac{1}{\sigma_x^2} + \frac{1}{\sigma_y^2} + \frac{1}{\sigma_z^2}} \text{ and } K_z = \frac{\frac{1}{\sigma_z^2}}{\frac{1}{\sigma_x^2} + \frac{1}{\sigma_y^2} + \frac{1}{\sigma_z^2}},$$
 (4)

198

192

199 where x, y, z denotes AWRA-L estimates, SMAP and SMOS soil moisture retrievals respectively. If only one satellite 200 observation is available for a time step, the gain factor is calculated using the error variance from the corresponding 201 observation. If neither SMAP nor SMOS are available, the analysis remains the same as the model forecast. Observation error 202 variance is often estimated through field campaigns (Draper et al., 2009; Panciera et al., 2013), but these rarely represent the 203 spatial and temporal variability of errors in gridded satellite products. Alternatively, data providers often specify error 204 estimates, but their magnitude can be overly optimistic. Here, we applied the triple collocation approach (Section 3.1) to 205 characterise the temporal error variances of the model estimates and the two satellite observations for each grid cell across 206 Australia. The analysis receives higher contribution from observation with smaller error variance (Eq. 2). Given the relatively short time series (small number) of observations, however, a single set of error variances is calculated for all time. This results 207 in spatially varying but temporally static error variances (and thus gain weights) for each of the three sources (Fig. 2). We 208 209 acknowledge the limitations of assuming a temporally constant error variances and future refinements to the assimilation 210 method will consider introducing seasonally varying error variances.

## 211 3.3 Analysis increment redistribution (AIR)

212 The assimilation of satellite soil moisture temporarily violates mass conservation in the model through the analysis update.

213 The difference between the analysis,  $x_t^a$ , and the forecast,  $x_t^f$ , (known as the *analysis increment*) represents an amount of

214 water that has been added or subtracted from the system that was not present at the start of model integration for the given

215 time step. In this study, we use the concept of tangent linear modelling (Errico, 1997; Giering, 2000) to redistribute the

analysis increment of surface soil water storage,  $S_0$ , to all the relevant model states and fluxes as a way of maintaining mass

- 217 (i.e. water) balance within each model time step. This adjustment is applied after the sequential state updating as the second-
- 218 step in the assimilation framework, which we refer to as analysis increment redistribution (AIR).

The adjoint and tangent linear models were originally used in variational data assimilation (Bouttier and Courtier, 2002) and have been used to estimate the sensitivity of model outputs with respect to input (Errico, 1997). We assume the input perturbation here is the analysis increment after the data assimilation (i.e.  $x_t^a - x_t^f$  from Eq. 2), then the change in other model outputs due to the change in inputs can be determined through tangent linear modelling. Assuming model variable *b* is related to the state variable *x*, the relationship between them can be simply described as:

$$224 \quad b = M(x), \tag{5}$$

where *M* denotes the model operator. The change in output variable  $\Delta b$  at time step *t* due to the input change  $\Delta x$  can be determined by

$$227 \quad \Delta b_t = \frac{\partial M}{\partial x_t} \Delta x_t. \tag{6}$$

In this study, we applied the tangent linear modelling approach to correct the model forecast of soil water storage for shallow-layer ( $S_s$ ), and deep-layer soil water storage ( $S_d$ ), evapotranspiration ( $E_{tot}$ ), and total streamflow ( $Q_{tot}$ ) after the state updating of surface soil moisture ( $S_0$ ) at each time step. Note that this process ensures that the correction is affecting all model states in proportion to their sensitivity against changes in the  $S_0$ . All the model equations regarding to the mass redistribution were derived using model equations (Frost et al., 2018;Van Dijk, 2010) and can be found in the Appendix A.

## 233 4. Results

#### **4.1 Impact on surface soil water storage estimates**

Error variances were derived using TC for AWRA-L model estimates and the SSM products, and showed that for the majority of the grid cells over the continent SMAP soil moisture had smaller error variance than SMOS and the model estimates. This is consistent with other studies that have shown SMAP provides the best-performing satellite soil moisture product over the majority of applicable global land pixels (Chen et al., 2018). Figure 2 shows the relative weightings (derived from the TC error variances) of model estimates, SMOS and SMAP soil moisture in the data assimilation. The analysed surface soil water storage estimates ( $S_0$ ) receive a greater contribution from SSM products, in particular SMAP observations, compared to model simulations (Fig. 2). Figure 3 gives an example of the temporal change in modelled  $S_0$  242 estimates before and after the assimilation for 2017. The temporal dynamics of  $S_0$  estimates after the assimilation has been

243 highly adjusted towards SSM retrievals and in consistency with in-situ measurements.

AWRA-L model simulations are driven by gauge-based rainfall analyses. As such the model has difficulty in adequately

- 245 simulating soil moisture patterns over regions lacking in rain gauge coverage, such as Western Australia and central
- 246 Australia (Fig. 1c). Water storage simulations over these regions default to zero, thus very little or no weight was given to
- 247 the AWRA-L estimates in these regions (Fig. 2a). Figure 4 shows different spatial patterns of daily average  $S_0$  estimates for
- 248 December 2019 from model open-loop (OL) without data assimilation and with data assimilation through TC-derived
- 249 weighting (DA-TC). Data assimilation has the effect of adding moisture to AWRA-L  $S_0$  simulations over most of gauge-
- sparse areas as shown in Figure 4c. Analysed AWRA-L simulations of  $S_0$  are dominated by the satellite SSM data as a result
- of TC weighting in the region which largely eliminates the erroneous artefacts associated with deficient rainfall data forcing.
- 252 Reduced water storage in the surface layer of the soil column was found over southeast of Australia, particularly within the
- 253 Murray-Darling Basin. This suggests that AWRA-L OL simulations underestimated the severity of the drought experienced
- 254 in the region in December 2019. The analysis increments of AWRA-L  $S_0 (x^a x^f)$  were compared with the difference
- 255 between in-situ rainfall observations from OzFlux network, *P<sup>0zFlux</sup>* and AWAP rainfall forcing, *P<sup>AWAP</sup>*, (Fig. 5). The
- 256 increasing  $S_0$  simulations align with missing or underestimated rainfall events in the AWAP rainfall forcing
- 257  $(P^{OzFlux} P^{AWAP} > 0)$  and vice versa (Fig. 5). This supports the hypothesis that data assimilation correctly distributes
- 258 water into the system and mitigates the impact of uncertainty in rainfall forcing.

#### 259 4.2 Impact on root-zone soil water storage and fluxes estimates

260 If the analysis increment redistribution (AIR) is not applied, the soil water storage in the surface layer  $(S_0)$  is the only state 261 variable directly updated with SSM (DA-TC). Other variables such as root-zone soil water storage, evapotranspiration and 262 streamflow are adjusted with model integration to the next time step using the analysed  $S_0$  as the surface layer initial condition. 263 Therefore, the observed changes in those variables following DA-TC (Fig.6, centre column) are relatively small when 264 compared to model open-loop estimates (Fig.6, left column). For example, the OL soil water storage of shallow-layer ( $S_c$ ) 265 estimates in those gauge-sparse regions of Australia remain zero or very low due to the AWAP rainfall forcing. The predictions of  $S_s$  receive relatively small contribution from the analysed  $S_0$  since the analysis increment of  $S_0$  is small compared to the 266 267 field compacity of  $S_s$ .

One known issue of sequential state updating is the temporary break of water balance at each time step until the next model integration. The proposed AIR approach (Section 3.2) adjusts variables coupled with surface soil moisture after the state updating at each time step. Significant difference in the spatial patterns of  $S_s$ ,  $E_{tot}$  and  $Q_{tot}$  after the mass redistribution (DA-TCAIR) can be seen in Fig. 6 (right column) compared to model open-loop or forecasts after only  $S_0$  updating. The changes

272 in estimates of S<sub>s</sub> and E<sub>tot</sub> over coastal regions are relatively small due to more accurate rainfall forcing data with the dense

273 network of rain-gauges. Finally, the Qtot estimates after AIR are lower than the DA-TC and OL. This reduction in streamflow

274 over south-eastern Australia and northern Australia is consistent with the reduced surface soil moisture in those regions (Fig.4c).

#### 275 4.3 Quantitative evaluation

276 Estimates of surface soil moisture, root-zone soil moisture, evapotranspiration and streamflow after data assimilation (DA-277 TC) and data assimilation with mass redistribution (DA-TCAIR) were compared with time series of in-situ observations. We 278 compared the model outputs after DA-TC and DA-TCAIR separately to investigate the benefits of maintaining mass balance 279 in data assimilation. Pearson's correlation coefficients were computed from time series of model estimates and observations 280 between January 2016 to December 2018 for each site. The distribution of correlation coefficients for OL, DA-TC and DA-TCAIR are displayed as boxplots in Figure 7. Consistent, significant improvement in modelled surface layer soil water storage 281 282 estimates  $(S_0)$  were observed across all sites (Fig. 7a) with the single exception of an OzFlux site located in a tropical rainforest, 283 where microwave SSM retrievals are known to be typically poor (Njoku and Entekhabi, 1996). TC-based assimilation (DA-284 TC) increases the correlation between in-situ surface SM measurements from 0.47 to 0.72 on average for CosmOz sites, 0.54 285 to 0.69 for OzFlux sites, and 0.56 to 0.77 for OzNet sites compared to OL. This is a significant improvement in AWRA-L 286 simulations of surface soil moisture dynamics with an increase in correlation of 0.23 on average across all in-situ sites.

287 Overall subtle improvements were observed across the AWRA-L estimates of root-zone soil water storage, evapotranspiration 288 and streamflow after the assimilation (DA-TC) (Fig. 7b, c, d). The level of improvement is not surprising since those variables 289 were not directly updated through DA-TC and are only influenced through the integration of the model to the next time step. 290 Degradation was found in root-zone soil moisture estimation for a few OzFlux and OzNet monitoring sites. This is likely due 291 to the break of water balance in the assimilation, since the estimates followed by the second step of AIR (DA-TCAIR) slightly 292 increases the correlation with in-situ observations compared to model open-loop and the estimates after assimilation without 293 mass redistribution (DA-TC). Moreover, the model estimates of root-zone soil moisture from model OL are in good agreement 294 with in-situ observations as is with average correlation above 0.8 (Fig. 7b), which leaves little room for improvements.

295 Although the corrections of other water balance estimates from the analysis increments redistribution are relatively small 296 compared to direct state updating, they are improvements nevertheless. Slight improvements were similarly found in 297 streamflow estimates after the AIR (Fig. 7d). Figure 8 shows an example of the OL estimates of streamflow, the analysed streamflow after the application of AIR, and the streamflow observations,  $Q_{tot obs}$ . Also displayed is the streamflow analysis 298 increments, i.e.  $Q_{tot}^a - Q_{tot}^f$  for each time step. The negative streamflow analysis increment (Fig. 8) indicates that water is 299 removed from the surface water store after the assimilation of SSM and application of AIR, which is appears to compensate 300 301 for the overall overestimate of OL simulations, in this example. Although the change in streamflow due to the soil moisture 302 data assimilation is small compared to the disparity between model and observed streamflow, the adjustment in the direction 303 towards observations highlights the importance of accurate antecedent soil moisture conditions in the simulation of runoff 304 response. The joint assimilation of gauge-measured streamflow and satellite soil moisture retrievals into AWRA-L is expected

305 to improve the streamflow simulation.

306 A limited number of root-zone soil moisture monitoring sites as well as the large spatial disparity between the point-scale in-307 situ measurements and modelling resolution (~5 km grid cell) represent substantial limitations for wide-area evaluation of 308 root-zone soil moisture estimates. An indirect verification of AWRA-L simulations of root-zone soil moisture was based on a 309 comparison against satellite-derived EVI. This provided an independent, albeit indirect, way of evaluating the impact of data 310 assimilation over larger areas. We calculated the correlation between time series of monthly average AWRA-L root-zone soil 311 moisture estimates from OL, DA-TC and DA-TCAIR against EVI for cropland across Australia from 2015 to 2018. Cropland 312 cover type was selected based on the rooting depths of the dominant grass species and wheat varieties in the area that have 313 been shown to have rooting depths spanning at least half the combined soil depths (0-1m) of the surface- and shallow-layer 314 soil water storage in AWRA-L. Figure 9a shows the relative change in correlation between root-zone soil water storage 315 simulations from DA-TCAIR and those from model OL against EVI data for cropland areas of Australia. Significant 316 improvements were found after the data assimilation and mass redistribution for the vast majority of model grid cells (Fig. 9a). 317 The averaged correlation with EVI is 0.64 from DA-TCAIR compared to 0.52 for model open-loop. The root-zone soil water 318 storage estimates after the mass redistribution are significantly improved over the cropland in Western Australia and southern 319 Australia with more than 20% increase in correlation comparing to DA-TC without mass redistribution (Fig. 9b). This 320 demonstrates that enforcing mass balances as part of the soil moisture data assimilation at each time step is essential to 321 improving the simulation of root-zone soil water balance. Limited difference between DA-TC and DA-TCAIR were found 322 over cropland regions over south-eastern Australia, likely due to the overall good performance of AWRA-L OL root-zone soil 323 moisture estimates in those areas (Fig. 7b). The improved consistency with EVI after data assimilation highlights the potential 324 of improving agricultural planning with more accurate information of root-zone soil water availability.

## 325 4.4 Implications for water balance forecasting

326 To quantify how long improvements in model state last in AWRA-L simulations, we used OL and DA-TCAIR estimates 327 between 1 March 2018 and 28 February 2019. The model states for each day over this one-year period served as initial 328 conditions for 100-day AWRA-L simulations from which we calculated the number of days it took for the simulation from the 329 analysed DA-TCAIR states to converge to within +/- 5% of those from OL. Results showed that data assimilation can impact 330 model states and fluxes for weeks and sometimes up to 2-3 months (Fig. 10). The impacts of data assimilation can persist in simulated  $S_0$  for as long as a week over coastal regions, and longer in central Western Australia and Northern Australia with 331 332 up to a month persistence in winter and spring (Fig. 10a). There is less impact on  $S_0$  simulations during wet season (Summer-Autumn) in Northern Australia since the  $S_0$  can saturate rapidly due to the heavy rainfall. Overall, the longest persistence is 333 334 found in winter with a continental average of 13 days; the shortest is 6 days on average in autumn and summer. The memory 335 of initial conditions in simulations of  $S_s$  can persist even longer due to the slower response to rainfall variability and higher field capacity (Fig. 10b). Summer persistence for  $S_s$  is the least with a continental average of 30 days; in winter this increased to 45 days.

On average, the impact of antecedent soil moisture conditions on evapotranspiration simulations can persist for 1 week over coastal areas, but up to months in central Western Australia (Fig. 10c). The continental average varies from 13 to 20 days for each season. The areas with the longest persistence are those areas with artefacts of zero rainfall in the forcing. This demonstrates that improvements in AWRA-L estimates after SSM assimilation over regions with sparse rain-gauge coverage can persist in the system for more than 2 months. The impact on runoff varies from 1 week to 3 months over the continent (Fig. 10d). The majority of areas impacted for more than 2 months are in locations of low rainfall and runoff. However, in areas of heavy runoff, e.g. north-eastern Australia, there is between 1-2 week of persistence.

## 345 **5. Discussion**

346 In this study, we assimilated SMAP and SMOS data into an operational AWRA-L water balance modelling system through a 347 simple sequential state updating approach, with weightings derived using triple collocation approach (DA-TC), followed by a 348 post-adjustment for mass redistribution (DA-TCAIR). Previous data assimilation studies using the AWRA-L model opted for 349 ensemble-based methods (Renzullo et al., 2014; Shokri et al., 2019; Tian et al., 2019a; Tian et al., 2017; Tian et al., 2019b). 350 Ensemble based methods rely on *a priori* knowledge of uncertainty in forcing data and model error variances to derive spatially 351 and temporally varying gain matrices at each time step. However ensembles often require post hoc correction such as state 352 inflation (Anderson et al., 2009) to achieve optimal performance, and many members (> 10) comprised of multiple model 353 runs to infer statistically meaningful error variances, which can be computationally costly. In contrast, the proposed DA-TC/-354 TCAIR framework is simple, effective and computationally efficient and requires minimal modification in the current 355 operational system. The gain factor in the proposed assimilation framework is temporally constant but spatially varying. It is derived from the temporal covariances between modelled and satellite-derived soil moisture for each grid cell across the 356 357 domain through the widely used triple collocation (TC) method (Chen et al., 2018;Crow and Van den Berg, 2010;Crow and Yilmaz, 2014;Su et al., 2014b;Yilmaz and Crow, 2014). The significant improvements in AWRA-L model surface soil 358 moisture estimation demonstrates the efficiency of the proposed assimilation approach (Fig. 7a). Temporally varying gain 359 360 factor is considered for future improvement to the approach once a longer time series of SMAP data is available.

Pan and Wood (2006) used mass redistribution in a two-step constrained Kalman filter that required error covariances derived from evapotranspiration and runoff observations. However, these observations are often not available for continental scale of studies. Li et al. (2012) redistribute the mass imbalance within soil layers during the assimilation but without the updates of fluxes. Our proposed method based on tangent linear modelling redistributes the mass change across all the states and fluxes related to surface soil moisture states without the need for extra observations. The analysis increment redistribution (AIR) method conserves the mass balance thereby improving water balance estimates (Fig. 7), in particular it can improve the root367 zone soil moisture estimates over croplands (Fig. 9). Although the improvements are limited, the streamflow estimates from 368 the AIR are predominantly a better match to observations (Fig. 8). Model physics limits the strength of coupling between an 369 analysed state and resulting fluxes (Kumar et al., 2009;Walker et al., 2001). Thus a small level of improvement in performance 370 in AWRA-L streamflow in response to soil moisture state updating is not unexpected due to a weak coupling between the 371 states and fluxes. Calibration of model parameters using satellite and in-situ observations may lead to further improvements.

Many studies have demonstrated the assimilation of satellite soil moisture can improve model forecasts due to the correction 372 373 for initial soil moisture conditions (Crow and Rvu, 2009; Pauwels et al., 2001; Scipal et al., 2008). Getirana et al. (2020a) and 374 Getirana et al. (2020b) found that using initial conditions derived from the assimilation of GRACE (Gravity Recovery and Climate Experiment) total water storage observations can improve the seasonal streamflow and groundwater forecast due to 375 376 the long memory of groundwater and soil moisture. However, few studies quantify how long the impacts of data assimilation 377 can persist in the model system's memory for different states. In this study, we found that the impact of different initial conditions of root-zone soil water storage has a long memory in the system, exceeding 2 months (Fig. 10b). The constraints on 378 379 the simulations of surface soil moisture, evapotranspiration and streamflow can persist 1-2 weeks due to the high temporal 380 variability. This highlights the potential gains from data assimilation for agricultural planning and flood forecasting, as a result 381 of improved short-term water balance forecasts.

#### 382 6. Conclusion

383 In this study, we proposed a simple and robust framework for assimilating SMAP and SMOS soil moisture products into the 384 operational Australian Water Resources Assessment modelling system. The method involves the sequential (daily) updating 385 of the model's surface soil water storage with satellite soil moisture observations using weights determined through triple 386 collocation (DA-TC). Furthermore, we proposed an additional component to the data assimilation whereby the analysis increment of the upper layer soil water storage is propagated into relevant model states and fluxes as a way of maintaining 387 388 mass balance (DA-TCAIR). Evaluation against in-situ measurements showed that simulations of surface soil moisture 389 dynamics is improved significantly after TC data assimilation with an average increase of 0.23 correlation units compared with 390 open-loop simulations. An evaluation of the root-zone soil moisture, evapotranspiration and streamflow estimates showed that 391 the TC-AIR appeared to provide marginal, yet positive, improvement over the TC data assimilation method alone. However, 392 in an indirect verification of modelled root-zone soil moisture against satellite-derived EVI, DA-TCAIR was seen to provide 393 significant improvement over the TC method alone. This demonstrates that by enforcing mass balances as part of the SSM 394 data assimilation each time step, AWRA-L can better represent soil water dynamics such that it has greater consistency with 395 observed vegetation response.

396

397 The assimilation of satellite soil moisture estimates together with the mass redistribution reduces the uncertainties in model 398 estimates resulting mainly from uncertain forcing and model physics, and provides temporally and spatially varying constraints on model water balance estimates. For example, the assimilation resolves the gaps in rainfall forcing over Western Australia and central Australia. We demonstrate that the impacts of data assimilation can persist in the model system for more than a week for surface soil water storage and more than a month for root-zone soil water storage. This highlights the importance of accurate initial hydrological states for improving forecast skill over longer lead times. Hence, an operational water balance modelling system, with satellite data assimilation, has strong potential to add value for assessing and predicting water availability for a range of decision makers across industries and sectors.

- 405
- 406

## 407 Appendix A

For a complete understanding and description of the AWRA-L model equations, please refer to Frost et al (2016). Here weonly present those parts of the model equation related to S0.

410

411 The analysis increments after the data assimilation can be calculated as:

 $412 \quad \Delta S_0 = S_0^a - S_0^f,$ 

where  $S_0^a$  denotes the analysed upper-layer soil water storage and  $S_0^f$  denotes the forecast, or initial estimate. The change in  $S_0$ affects the drainage to the lower-layer soil water storage ( $D_0$ ) and interflow draining laterally from the top soil layer ( $Q_{I0}$ ). The corresponding change in drainage to lower-layer soil water storage from the increment  $\Delta S_0$  is calculated as:

416 
$$\Delta D_0 = (1 - \beta_0) k_{0sat} \left[ \left( \frac{s_0^a}{s_0 max} \right)^2 - \left( \frac{s_0^f}{s_0 max} \right)^2 \right],$$

417  $\Delta Q_{I0} = \beta_0 k_{0sat} \left[ \left( \frac{s_0^a}{s_0 max} \right)^2 - \left( \frac{s_0^f}{s_0 max} \right)^2 \right],$ 

where the  $k_{0sat}$  and S0max are model parameters representing the saturated hydraulic conductivity and maximum storage of the upper soil layer, respectively. The proportion of overall top layer drainage that is lateral drainage ( $\beta_0$ ) given as:

420 
$$\beta_0 = \tanh\left(k_\beta\beta\frac{s_0^a}{s_0max}\right) \tanh\left(k_\zeta\left(\frac{k_{0sat}}{k_{ssat}}-1\right)\frac{s_0^a}{s_0max}\right)$$

421 where  $\beta$  and  $k_{\beta}$  are the slope radians and scaling factor, and  $k_{\zeta}$  is a scaling factor for the ratio of saturated hydraulic 422 conductivity. The revised lower-layer soil water storage  $S_s^a$  is then determined as:

$$423 \quad S_s^a = S_s^f + \Delta D_0$$

424 The change in  $S_s$  will lead to the change in the shallow soil water storage ( $D_s$ ) and lateral interflow ( $Q_{Is}$ ). The soil water storage 425 at lower layer is thus updated as:

$$426 \quad S_d^a = S_s^a + \Delta D_s.$$

- 427 Similarly, the groundwater storage  $S_g$  will be adjusted with the increment of deep soil layer drainage.
- 428 The total runoff  $(Q_{tot}^a)$  should be updated as:

429 
$$Q_{tot}^a = (1 - e^{-k_r})(S_r^f + Q_{tot}^f + \Delta Q_{Is} + \Delta Q_{I0}),$$

- 430 where  $k_r$  is a routing delay factor.
- 431 The surface water storage  $S_r$  should be updated accordingly as:
- $432 \quad S_r^a = S_r^f + \Delta Q_{Is} + \Delta Q_{I0} \Delta Q_{tot}.$
- 433 The total evapotranspiration change ( $\Delta E_{tot}$ ) caused by the changes in  $S_0$  and  $S_s$  can be updated as follow:
- 434  $\Delta E_{tot} = \delta E_s * \Delta S_0 + \delta E_t * \Delta S_s$ ,
- 435 where the  $E_s$  is the evaporation flux from the surface soil store ( $S_0$ ) and  $E_t$  is the total actual plant transpiration. The term  $\delta E_s$
- 436 is given as
- 437  $\delta E_s = (1 f_{sat})E_{t\_rem}\delta f_{soile},$
- 438 where  $f_{soile}$  is relative soil evaporation and  $f_{sat}$  is the fraction of the grid cell that is saturated, and

439 
$$E_{t\_rem} = E_0 - (E_t - \delta E_t)$$
,

440 The term  $\delta E_t$  is from the changes in root-water uptake from shallow and deep soil layers as

441 
$$\delta E_t = \delta U_s + \delta U_d$$

442 with

443 
$$\delta U_s = \delta U_{smax} \frac{\max(abs(\delta U_{smax}, \delta U_{dmax}))}{\delta U_{smax} + \delta U_{dmax}}$$

444 
$$\delta U_d = \delta U_{dmax} \frac{\max(abs(\delta U_{smax}, \delta U_{dmax}))}{\delta U_{smax} + \delta U_{dmax}}$$

- 445  $\delta U_{smax} = \frac{U_{s0}}{w_{slim}} \delta w_s, \ \delta U_{dmax} = \frac{U_{d0}}{w_{dlim}} \delta w_d$ , where  $U_{smax}$  and  $U_{dmax}$  are the maximum root water uptake from the shallow soil
- store and from deep soil store.  $w_{slim}$  and  $w_{dlim}$  is the water-limiting relative water content from the *shallow and deep* soil
- 447 layer.
- 448 Finally,
- 449  $\delta f_{soile} = \frac{f_{soilmax}}{w_{0lim}} \delta w_0$ , where  $f_{soilmax}$  is the scaling factor corresponding to unlimited soil water supply, with
- 450  $\delta w_0 = \frac{1}{S_{0max}}$ ,  $\delta w_s = \frac{1}{S_{smax}}$ , and  $\delta w_d = \frac{1}{S_{dmax}}$ ,
- 451 where the  $w_z$  is the relative soil wetness of layer z, *i.e.* either 0, s or d.
- 452

## 453 Data Availability

The AWRA-CMS code is accessible from github (<u>https://github.com/awracms/awra\_cms</u>). SMAP product used here is the level-2 enhanced radiometer half-orbit 9-km EASE-grid soil moisture from the US National Snow and Ice Data Center (https://nsidc.org). SMOS level-2 soil moisture product is available from ESA's SMOS online dissemination service (<u>https://smos-diss.eo.esa.int/oads/access/</u>). The MYD13C2 EVI data is accessible through Land Processes Distributed Active 458 Archive Centre (https://lpdaac.usgs.gov). The National Dynamic Land Cover Dataset of Australia is available from Geoscience

459 Australia (https://www.ga.gov.au).

## 460 Author contribution

- 461 ST developed and led the implementation of the method in AWRA-CMS. ST led the writing of the manuscript and graphics
- 462 creation. LR co-wrote project plan and co-developed the method. LR guided the application and evaluation. LR contributed to
- 463 manuscript writing. RP facilitated sharing of data feeds; coordinated the transition of method to operational implementation;
- 464 editing and review of manuscript. JL guided the selection of streamflow observation and reviewed the manuscript. WS guided
- 465 the modification to AWRA-CMS and reviewed the manuscript. CD co-wrote project plan and reviewed the manuscript.

## 466 Competing interests

467 The authors declare that they have no conflict of interest.

## 468 Acknowledgements

- 469 This project is supported by collaborative research agreement between the Australian Bureau of Meteorology and Australian
- 470 National University. We would like to thank Stuart Baron-Hay from the Bureau of Meteorology for his help with
- 471 implementation of the in AWRA-CMS. This research was undertaken with the assistance of resources and services from the
- The information of the in AWRAY Civis. This research was undertaken with the assistance of resources and services from the
- 472 National Computational Infrastructure (NCI), which is supported by the Australian Government through the National
- 473 Collaborative Research Infrastructure Strategy.

## 474 References

- Alemohammad, S. H., McColl, K. A., Konings, A. G., Entekhabi, D., and Stoffelen, A.: Characterization of precipitation
  product errors across the United States using multiplicative triple collocation, Hydrol. Earth Syst. Sci., 19, 3489-3503,
  10.5194/hess-19-3489-2015, 2015.
- Alvarez-Garreton, C., Ryu, D., Western, A. W., Su, C. H., Crow, W. T., Robertson, D. E., and Leahy, C.: Improving operational
  flood ensemble prediction by the assimilation of satellite soil moisture: comparison between lumped and semi-distributed
  schemes, Hydrology and Earth System Sciences, 19, 1659-1676, 10.5194/hess-19-1659-2015, 2015.
- Anderson, J., Hoar, T., Raeder, K., Liu, H., Collins, N., Torn, R., and Avellano, A.: The data assimilation research testbed: A
   community facility, Bulletin of the American Meteorological Society, 90, 1283-1296, 2009.
- Baldwin, D., Manfreda, S., Keller, K., and Smithwick, E.: Predicting root zone soil moisture with soil properties and satellite
   near-surface moisture data across the conterminous United States, J Hydrol, 546, 393-404, 2017.
- Blankenship, C. B., Case, J. L., Crosson, W. L., and Zavodsky, B. T.: Correction of forcing-related spatial artifacts in a land surface model by satellite soil moisture data assimilation, IEEE Geoscience and Remote Sensing Letters, 15, 498-502, 2018.
- Bolten, J. D., Crow, W. T., Zhan, X., Jackson, T. J., and Reynolds, C. A.: Evaluating the utility of remotely sensed soil moisture retrievals for operational agricultural drought monitoring, Ieee J-Stars, 3, 57-66, 2009.

- 489 Bouttier, F., and Courtier, P.: Data assimilation concepts and methods March 1999, Meteorological training course lecture 490 series. ECMWF, 718, 59, 2002.
- 491 Carrera, M. L., Bilodeau, B., Bélair, S., Abrahamowicz, M., Russell, A., and Wang, X.: Assimilation of passive L-band 492 microwave brightness temperatures in the Canadian land data assimilation system: Impacts on short-range warm season 493 numerical weather prediction, Journal of Hydrometeorology, 20, 1053-1079, 2019.
- 494
- Chan, S. K., Bindlish, R., O'Neill, P., Jackson, T., Njoku, E., Dunbar, S., Chaubell, J., Piepmeier, J., Yueh, S., Entekhabi, D., 495 Colliander, A., Chen, F., Cosh, M. H., Caldwell, T., Walker, J., Berg, A., McNairn, H., Thibeault, M., Martinez-Fernandez, J.,
- 496 Uldall, F., Seyfried, M., Bosch, D., Starks, P., Collins, C. H., Prueger, J., van der Velde, R., Asanuma, J., Palecki, M., Small,
- 497 E. E., Zreda, M., Calvet, J., Crow, W. T., and Kerr, Y.: Development and assessment of the SMAP enhanced passive soil
- 498 moisture product, Remote Sensing of Environment, 204, 931-941, 10.1016/j.rse.2017.08.025, 2018.
- 499 Chen, F., Crow, W. T., Bindlish, R., Colliander, A., Burgin, M. S., Asanuma, J., and Aida, K.: Global-scale evaluation of 500 SMAP, SMOS and ASCAT soil moisture products using triple collocation, Remote Sensing of Environment, 214, 1-13, 2018.
- 501 Crow, W., and Van den Berg, M.: An improved approach for estimating observation and model error parameters in soil 502 moisture data assimilation. Water Resources Research, 46, 2010.
- 503 Crow, W. T., and Rvu, D.: A new data assimilation approach for improving runoff prediction using remotely-sensed soil 504 moisture retrievals, Hydrology and Earth System Sciences, 13, 1-16, DOI 10.5194/hess-13-1-2009, 2009.
- 505 Crow, W. T., and Yilmaz, M. T.: The auto-tuned land data assimilation system (ATLAS), Water resources research, 50, 371-506 385, 2014.
- 507 Davies, T., Cullen, M. J. P., Malcolm, A. J., Mawson, M. H., Staniforth, A., White, A. A., and Wood, N.: A new dynamical 508 core for the Met Office's global and regional modelling of the atmosphere, Q J Roy Meteor Soc, 131, 1759-1782, 509 10.1256/qj.04.101, 2005.
- 510 De Lannoy, G. J., and Reichle, R. H.: Global assimilation of multiangle and multipolarization SMOS brightness temperature
- 511 observations into the GEOS-5 catchment land surface model for soil moisture estimation, Journal of Hydrometeorology, 17, 512 669-691, 2016.
- 513 de Rosnay, P., Drusch, M., Vasiljevic, D., Balsamo, G., Albergel, C., and Isaksen, L.: A simplified Extended Kalman Filter 514 for the global operational soil moisture analysis at ECMWF, O J Roy Meteor Soc, 139, 1199-1213, 10.1002/gj.2023, 2013.
- 515 Dharssi, I., Bovis, K. J., Macpherson, B., and Jones, C. P.: Operational assimilation of ASCAT surface soil wetness at the Met 516 Office, Hydrology and Earth System Sciences, 15, 2729-2746, 10.5194/hess-15-2729-2011, 2011.
- 517 Donohue, R. J., Roderick, M. L., and McVicar, T. R.: Roots, storms and soil pores: Incorporating key ecohydrological 518 processes into Budyko's hydrological model, J Hydrol, 436, 35-50, 2012.
- 519 Dorigo, W., Wagner, W., Albergel, C., Albrecht, F., Balsamo, G., Brocca, L., Chung, D., Ertl, M., Forkel, M., and Gruber, A.:
- 520 ESA CCI Soil Moisture for improved Earth system understanding: State-of-the art and future directions, Remote Sensing of
- 521 Environment, 203, 185-215, 2017.
- 522 Draper, C. S., Walker, J. P., Steinle, P. J., De Jeu, R. A., and Holmes, T. R.: An evaluation of AMSR-E derived soil moisture 523 over Australia, Remote Sensing of Environment, 113, 703-710, 2009.
- 524 Draper, C. S., Reichle, R. H., De Lannoy, G. J. M., and Liu, Q.: Assimilation of passive and active microwave soil moisture 525 retrievals, Geophysical Research Letters, 39, Artn L04401
- 10.1029/2011gl050655, 2012. 526
- 527 Entekhabi, D., Njoku, E. G., O'Neill, P. E., Kellogg, K. H., Crow, W. T., Edelstein, W. N., Entin, J. K., Goodman, S. D.,
- 528 Jackson, T. J., Johnson, J., Kimball, J., Piepmeier, J. R., Koster, R. D., Martin, N., McDonald, K. C., Moghaddam, M., Moran,
- 529 S., Reichle, R., Shi, J. C., Spencer, M. W., Thurman, S. W., Tsang, L., and Van Zyl, J.: The Soil Moisture Active Passive 530 (SMAP) Mission, P Ieee, 98, 704-716, 10.1109/Jproc.2010.2043918, 2010.

- 531 Errico, R. M.: What is an adjoint model?, Bulletin of the American Meteorological Society, 78, 2577-2592, 1997.
- Figueroa-Bustos, V., Palta, J. A., Chen, Y., and Siddique, K. H.: Characterization of root and shoot traits in wheat cultivars with putative differences in root system size, Agronomy, 8, 109, 2018.
- Getirana, A., Jung, H. C., Arsenault, K., Shukla, S., Kumar, S., Peters-Lidard, C., Maigari, I., and Mamane, B.: Satellite
   Gravimetry Improves Seasonal Streamflow Forecast Initialization in Africa, Water Resources Research, 56, ARTN
   e2019WR026259
- 537 10.1029/2019WR026259, 2020a.
- Getirana, A., Rodell, M., Kumar, S., Beaudoing, H. K., Arsenault, K., Zaitchik, B., Save, H., and Bettadpur, S.: GRACE
  Improves Seasonal Groundwater Forecast Initialization over the United States, Journal of Hydrometeorology, 21, 59-71,
  10.1175/Jhm-D-19-0096.1, 2020b.
- 541 Giering, R.: Tangent linear and adjoint biogeochemical models, GEOPHYSICAL MONOGRAPH-AMERICAN 542 GEOPHYSICAL UNION, 114, 33-48, 2000.
- Girotto, M., De Lannoy, G. J., Reichle, R. H., Rodell, M., Draper, C., Bhanja, S. N., and Mukherjee, A.: Benefits and pitfalls
  of GRACE data assimilation: A case study of terrestrial water storage depletion in India, Geophysical research letters, 44,
  4107-4115, 2017.
- Hafeez, F., Frost, A., Vaze, J., Dutta, D., Smith, A., and Elmahdi, A.: A new integrated continental hydrological simulation
  system, Water J. Aust. Water Assoc, 42, 75-82, 2015.
- Hawdon, A., McJannet, D., and Wallace, J.: Calibration and correction procedures for cosmic-ray neutron soil moisture probes
   located across Australia, Water Resources Research, 50, 5029-5043, 10.1002/2013wr015138, 2014.
- Incerti, M., and O'Leary, G.: Rooting depth of wheat in the Victorian Mallee, Australian Journal of Experimental Agriculture,
   30, 817-824, 1990.
- Ines, A. V. M., Das, N. N., Hansen, J. W., and Njoku, E. G.: Assimilation of remotely sensed soil moisture and vegetation with a crop simulation model for maize yield prediction, Remote Sensing of Environment, 138, 149-164, 10.1016/j.rse.2013.07.018, 2013.
- Jones, D. A., Wang, W., and Fawcett, R.: High-quality spatial climate data-sets for Australia, Aust Meteorol Ocean, 58, 233, 2009.
- Kerr, Y. H., Waldteufel, P., Wigneron, J. P., Martinuzzi, J. M., Font, J., and Berger, M.: Soil moisture retrieval from space:
  The Soil Moisture and Ocean Salinity (SMOS) mission, Ieee T Geosci Remote, 39, 1729-1735, Doi 10.1109/36.942551, 2001.
- Kumar, S. V., Reichle, R. H., Koster, R. D., Crow, W. T., and Peters-Lidard, C. D.: Role of Subsurface Physics in the
  Assimilation of Surface Soil Moisture Observations, Journal of Hydrometeorology, 10, 1534-1547, 10.1175/2009jhm1134.1,
  2009.
- Li, B., Toll, D., Zhan, X., and Cosgrove, B.: Improving estimated soil moisture fields through assimilation of AMSR-E soil
   moisture retrievals with an ensemble Kalman filter and a mass conservation constraint, Hydrology and Earth System Sciences,
   16, 105-119, 10.5194/hess-16-105-2012, 2012.
- Lymburner, L., Tan, P., McIntyre, A., Thankappan, M., Sixsmith, J. : Dynamic Land Cover Dataset Version 2.1, Geoscience
   Australia, Canberra, <a href="http://pid.geoscience.gov.au/dataset/ga/83868">http://pid.geoscience.gov.au/dataset/ga/83868</a>, 2015.
- 567 Massari, C., Crow, W., and Brocca, L.: An assessment of the performance of global rainfall estimates without ground-based 568 observations, Hydrology and earth system sciences, 21, 4347, 2017.
- 569 McColl, K. A., Vogelzang, J., Konings, A. G., Entekhabi, D., Piles, M., and Stoffelen, A.: Extended triple collocation:
- 570 Estimating errors and correlation coefficients with respect to an unknown target, Geophysical research letters, 41, 6229-6236,
- 571 2014.

- 572 McVicar, T. R., Van Niel, T. G., Li, L. T., Roderick, M. L., Rayner, D. P., Ricciardulli, L., and Donohue, R. J.: Wind speed 573 climatology and trends for Australia, 1975–2006: Capturing the stilling phenomenon and comparison with near-surface
- 574 reanalysis output, Geophysical Research Letters, 35, 2008.
- 575 Muñoz-Sabater, J.: Incorporation of passive microwave brightness temperatures in the ECMWF soil moisture analysis, Remote 576 Sensing, 7, 5758-5784, 2015.
- 577 Nguyen, H., Wheeler, M. C., Otkin, J. A., Cowan, T., Frost, A., and Stone, R.: Using the evaporative stress index to monitor 578 flash drought in Australia, Environmental Research Letters, 14, 064016, 2019.
- 579 Njoku, E. G., and Entekhabi, D.: Passive microwave remote sensing of soil moisture, J Hydrol, 184, 101-129, Doi 10.1016/0022-1694(95)02970-2, 1996.
- Pan, M., and Wood, E. F.: Data assimilation for estimating the terrestrial water budget using a constrained ensemble Kalman
   filter, Journal of Hydrometeorology, 7, 534-547, Doi 10.1175/Jhm495.1, 2006.
- Panciera, R., Walker, J. P., Jackson, T. J., Gray, D. A., Tanase, M. A., Ryu, D., Monerris, A., Yardley, H., Rüdiger, C., and
  Wu, X.: The soil moisture active passive experiments (SMAPEx): Toward soil moisture retrieval from the SMAP mission,
  Ieee T Geosci Remote, 52, 490-507, 2013.
- 586 Patil, A., and Ramsankaran, R.: Improving streamflow simulations and forecasting performance of SWAT model by 587 assimilating remotely sensed soil moisture observations, J Hydrol, 555, 683-696, 2017.
- Pauwels, V. R. N., Hoeben, R., Verhoest, N. E. C., and De Troch, F. P.: The importance of the spatial patterns of remotely
  sensed soil moisture in the improvement of discharge predictions for small-scale basins through data assimilation, J Hydrol,
  251, 88-102, Doi 10.1016/S0022-1694(01)00440-1, 2001.
- 591 Peters-Lidard, C. D., Kumar, S. V., Mocko, D. M., and Tian, Y.: Estimating evapotranspiration with land data assimilation 592 systems, Hydrol Process, 25, 3979-3992, 2011.
- 593 Pipunic, R. C., Walker, J. P., and Western, A.: Assimilation of remotely sensed data for improved latent and sensible heat flux 594 prediction: A comparative synthetic study, Remote Sensing of Environment, 112, 1295-1305, 10.1016/j.rse.2007.02.038, 2008.
- Rahmoune, R., Ferrazzoli, P., Kerr, Y. H., and Richaume, P.: SMOS Level 2 Retrieval Algorithm Over Forests: Description
   and Generation of Global Maps, Ieee J-Stars, 6, 1430-1439, 10.1109/Jstars.2013.2256339, 2013.
- Reichle, R. H., and Koster, R. D.: Global assimilation of satellite surface soil moisture retrievals into the NASA Catchment
   land surface model, Geophysical Research Letters, 32, Artn L02404
- 599 10.1029/2004gl021700, 2005.
- 600 Reichle, R. H.: Data assimilation methods in the Earth sciences, Advances in water resources, 31, 1411-1418, 2008.
- 601 Renzullo, L. J., van Dijk, A. I. J. M., Perraud, J. M., Collins, D., Henderson, B., Jin, H., SmiAssimilation of a ERS scatterometer
- 602 derived soil moisture index in the ECMWF numerical weather prediction systemth, A. B., and McJannet, D. L.: Continental
- satellite soil moisture data assimilation improves root-zone moisture analysis for water resources assessment, J Hydrol, 519,
- 604 2747-2762, 10.1016/j.jhydrol.2014.08.008, 2014.
- Scipal, K., Holmes, T., De Jeu, R., Naeimi, V., and Wagner, W.: A possible solution for the problem of estimating the error structure of global soil moisture data sets, Geophysical Research Letters, 35, 2008.
- 607 Sheffield, J., and Wood, E. F.: Characteristics of global and regional drought, 1950-2000: Analysis of soil moisture data from 608 off-line simulation of the terrestrial hydrologic cycle, J Geophys Res-Atmos, 112, Artn D17115
- 609 10.1029/2006jd008288, 2007.
- 610 Shokri, A., Walker, J. P., van Dijk, A. I., and Pauwels, V. R.: On the use of adaptive ensemble Kalman filtering to mitigate
- 611 error misspecifications in GRACE data assimilation, Water Resources Research, 55, 7622-7637, 2019.

- Smith, A. B., Walker, J. P., Western, A. W., Young, R. I., Ellett, K. M., Pipunic, R. C., Grayson, R. B., Siriwardena, L., Chiew,
  F. H. S., and Richter, H.: The Murrumbidgee soil moisture monitoring network data set, Water Resources Research, 48, Artn
  W07701
- 615 10.1029/2012wr011976, 2012.
- 516 Stoffelen, A.: Toward the true near-surface wind speed: Error modeling and calibration using triple collocation, Journal of 517 geophysical research: oceans, 103, 7755-7766, 1998.
- Su, C. H., Ryu, D., Crow, W. T., and Western, A. W.: Beyond triple collocation: Applications to soil moisture monitoring,
  Journal of Geophysical Research: Atmospheres, 119, 6419-6439, 2014a.
- Su, C. H., Ryu, D., Crow, W. T., and Western, A. W.: Beyond triple collocation: Applications to soil moisture monitoring, J
   Geophys Res-Atmos, 119, 6419-6439, 10.1002/2013jd021043, 2014b.
- Tangdamrongsub, N., Han, S.-C., Yeo, I.-Y., Dong, J., Steele-Dunne, S. C., Willgoose, G., and Walker, J. P.: Multivariate data assimilation of GRACE, SMOS, SMAP measurements for improved regional soil moisture and groundwater storage estimates,
- 624 Advances in Water Resources, 135, 103477, 2020.
- Tian, S. Y., Tregoning, P., Renzullo, L. J., van Dijk, A. I. J. M., Walker, J. P., Pauwels, V. R. N., and Allgeyer, S.: Improved water balance component estimates through joint assimilation of GRACE water storage and SMOS soil moisture retrievals,
- 627 Water Resources Research, 53, 1820-1840, 10.1002/2016wr019641, 2017.
- Tian, S. Y., Renzullo, L. J., van Dijk, A. I. J. M., Tregoning, P., and Walker, J. P.: Global joint assimilation of GRACE and
  SMOS for improved estimation of root-zone soil moisture and vegetation response, Hydrology and Earth System Sciences,
  23, 1067-1081, 10.5194/hess-23-1067-2019, 2019a.
- Tian, S. Y., Van Dijk, A. I. J. M., Tregoning, P., and Renzullo, L. J.: Forecasting dryland vegetation condition months in
   advance through satellite data assimilation, Nat Commun, 10, ARTN 469
- 633 10.1038/s41467-019-08403-x, 2019b.
- Van Dijk, A. I., Peña-Arancibia, J. L., Wood, E. F., Sheffield, J., and Beck, H. E.: Global analysis of seasonal streamflow
   predictability using an ensemble prediction system and observations from 6192 small catchments worldwide, Water Resources
   Research, 49, 2729-2746, 2013.
- Van Dijk, A. I. J. M.: AWRA Technical Report 3, Landscape Model (version 0.5) Technical Description, WIRADA, CSIRO
   Water for a Healthy Country Flagship, Canberra, 2010.
- van Dijk, A. I. J. M., and Renzullo, L. J.: Water resource monitoring systems and the role of satellite observations, Hydrol.
  Earth Syst. Sci., 15, 39-55, 10.5194/hess-15-39-2011, 2011.
- Walker, J. P., Willgoose, G. R., and Kalma, J. D.: One-dimensional soil moisture profile retrieval by assimilation of nearsurface measurements: A simplified soil moisture model and field application, Journal of Hydrometeorology, 2, 356-373, 2001.
- Wanders, N., Karssenberg, D., de Roo, A., de Jong, S. M., and Bierkens, M. F. P.: The suitability of remotely sensed soil
  moisture for improving operational flood forecasting, Hydrology and Earth System Sciences, 18, 2343-2357, 10.5194/hess18-2343-2014, 2014a.
- Wanders, N., Karssenberg, D., Roo, A. d., De Jong, S., and Bierkens, M.: The suitability of remotely sensed soil moisture for
   improving operational flood forecasting, Hydrology and Earth System Sciences, 18, 2343-2357, 2014b.
- Yan, H., Zarekarizi, M., and Moradkhani, H.: Toward improving drought monitoring using the remotely sensed soil moisture
   assimilation: A parallel particle filtering framework, Remote sensing of environment, 216, 456-471, 2018.
- 450 Yilmaz, M. T., and Crow, W. T.: Evaluation of assumptions in soil moisture triple collocation analysis, Journal of 451 hydrometeorology, 15, 1293-1302, 2014.

- Zwieback, S., Dorigo, W., and Wagner, W.: Estimation of the temporal autocorrelation structure by the collocation technique
- with an emphasis on soil moisture studies, Hydrological sciences journal, 58, 1729-1747, 2013.



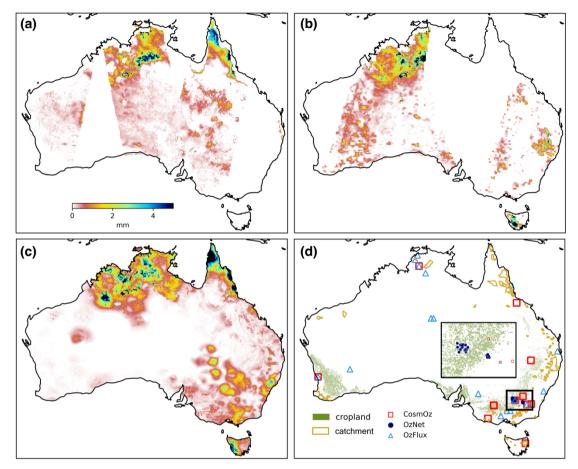


Figure 1: Satellite soil moisture retrievals in model unit (mm) for (a) SMAP and (b) SMOS compared to (c) AWRA-L estimates of
surface soil water storage for 1 Jan 2019. (d) Locations of in-situ soil moisture monitoring networks (CosmOz, OzNet and OzFlux),
catchments for streamflow validation and grid cells classified as cropland. The rectangular inset map provides a zoomed view into
the OzNet network region in south eastern Australia.

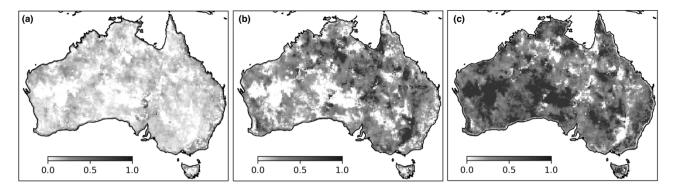

662


Figure 2: Gain weights for sequential data assimilation derived from Triple Collocation (TC) showing the relative contribution of the respective estimate in (a) AWRA-simulated surface soil water storage  $S_0$ , (b) SMOS soil moisture, and (c) SMAP soil moisture.

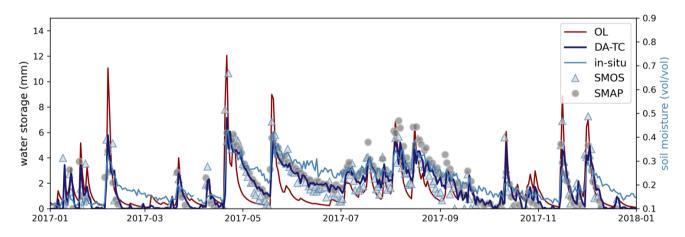


666

Figure 3: Time series of AWRA-L surface soil water storage estimates from open-loop (OL) compared to estimates after data assimilation (DA-TC) of SMAP and SMOS soil moisture retrievals at CosmOz monitoring site: Bennets (35.826°E, 143.004°S). Note

669 that the in-situ soil moisture values are in volumetric unit.

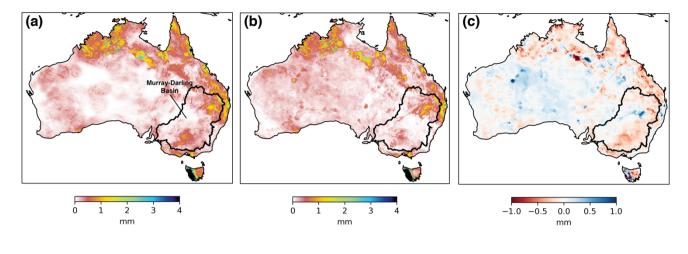


- 670 671
- 672
- 673 Figure 4: Comparison of average daily surface soil water storage estimates (S<sub>0</sub>) for December 2019 from (a) model open-loop (OL),
- 674 (b) joint assimilation of SMAP and SMOS with Triple Collocation (DA-TC) and (c) average change between daily estimates from
- 675 DA-TC and OL.

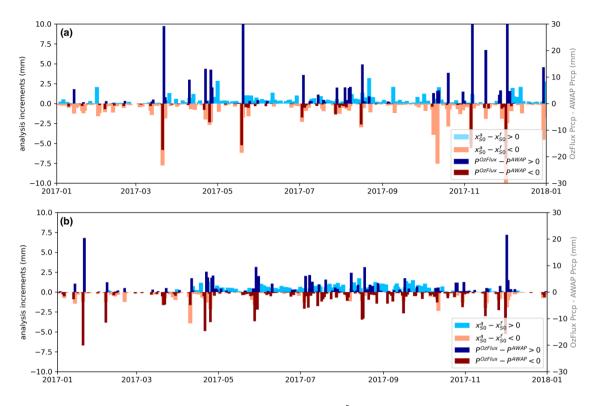


676

Figure 5: Analysis increments of AWRA-L surface soil water storage  $(x_{S0}^a - x_{S0}^f)$  in comparison with difference between in-situ rainfall observations and rainfall forcing from AWAP used in AWRA-L modelling  $(P^{OzFlux} - P^{AWAP})$  for (a) Yanco site (34.989°E, 146.291°S) and (b) Wombat Forest (37.422°E, 144.094°S).

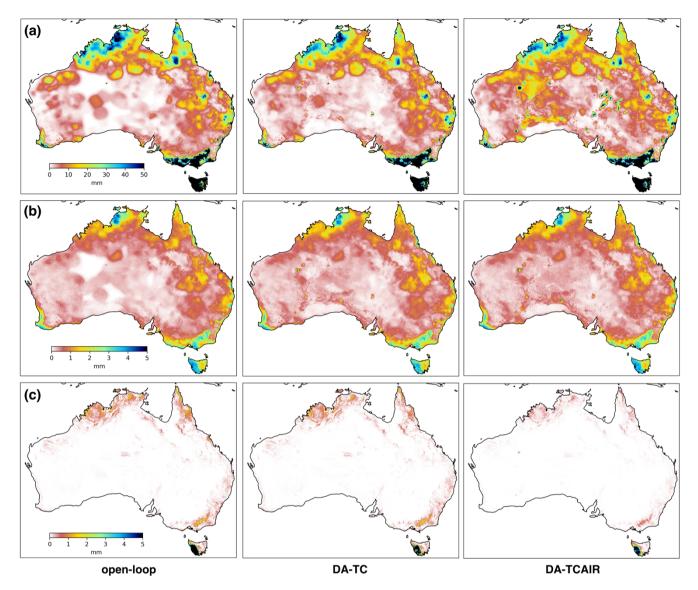

680

Figure 6: Averaged estimates of (a) shallow layer (10-100cm) soil water storage ( $S_s$ ), (b) evapotranspiration ( $E_{tot}$ ), and (c) total streamflow ( $Q_{tot}$ ) for December 2019 from model open-loop, data assimilation (DA-TC), and after the analysis increments redistribution (DA-TCAIR).

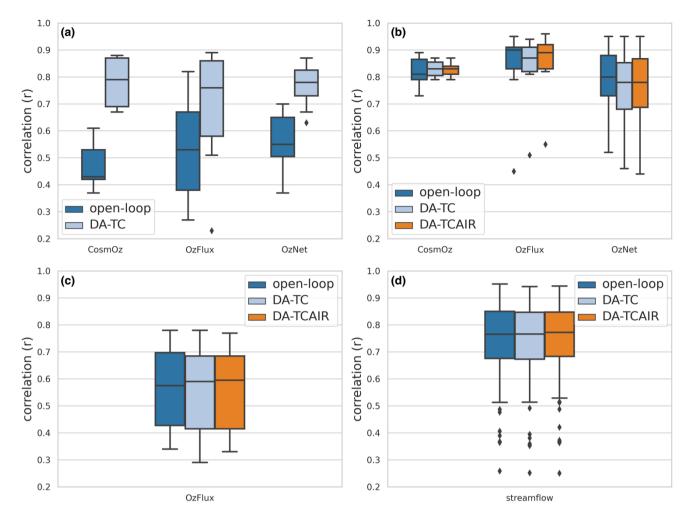

686

Figure 7: Distribution of correlation statistics of AWRA-L water balance estimates against in-situ measurements of (a) surface soil
 moisture, (b) root-zone soil moisture, (c) evapotranspiration and (d) streamflow.

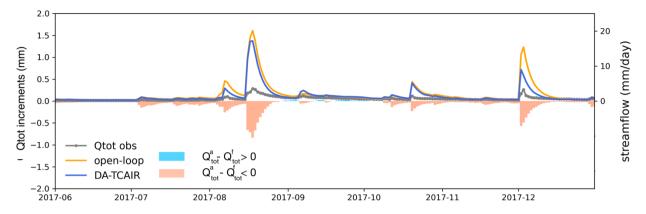


Figure 8: Changes in streamflow  $Q_{tot}$  estimates after the analysis increments redistribution (DA-TCAIR) for a catchment in southeastern Australia (centre coordinates: 36.63°E, 147.43°S) compared to in-situ streamflow observations ( $Q_{tot}$  obs) and model openloop.




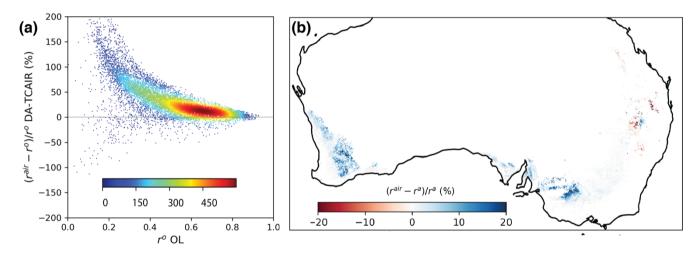




Figure 9: Comparison of vegetation index, EVI, with modelled root-zone soil moisture over cropland: (a) changes in correlations after data assimilation (DA-TCAIR,  $r^{air}$ ) compared to model OL ( $r^{o}$ ); (b) changes in correlations between DA-TCAIR and DA-TC.

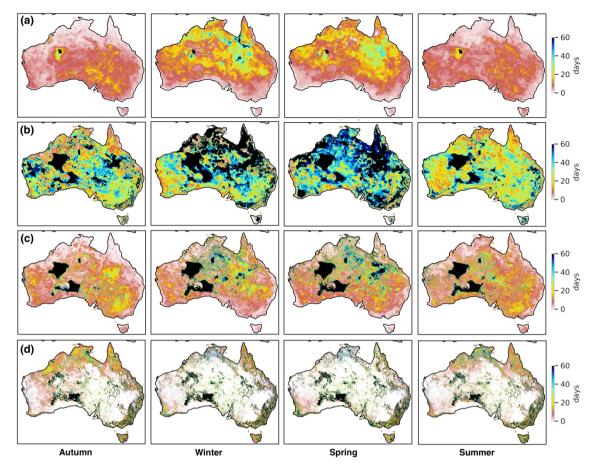

709 710

710 Figure 10: Quantified impacts of data assimilation on forecasting AWRA-L state variables using the initial condition from DA-

711 TCAIR: average time period that the impact of data assimilation can persist in autumn (2018.03-2018.05), Winter (2018.06-2018.08),

712 Spring (2018.09-2018.11) and Summer (2018.12-2019.02) on (a) upper-layer soil water storage S<sub>0</sub>, (b) lower-layer soil water storage

713  $S_s$ , (c) total evapotranspiration  $E_{tot}$  and (d) total runoff  $Q_{tot}$ .