

Future water temperature of rivers in Switzerland under climate change investigated with physics-based models

Adrien Michel^{1,2}, Bettina Schaeffli^{3,4}, Nander Wever⁵, Harry Zekollari^{6,7,8}, Michael Lehning^{1,2}, and Hendrik Huwald^{1,2}

¹School of Architecture, Civil and Environmental Engineering, École Polytechnique Fédérale de Lausanne (EPFL), Lausanne, Switzerland

²WSL Institute for Snow and Avalanche Research (SLF), Davos, Switzerland

³Institute of Geography & Oeschger Centre for Climate Change Research, University of Bern, Bern, Switzerland

⁴Institute of Earth Surface Dynamics (IDYST), University of Lausanne, Lausanne, Switzerland

⁵Department of Atmospheric and Oceanic Sciences, University of Colorado Boulder, Boulder, USA

⁶Laboratory of Hydraulics, Hydrology and Glaciology (VAW), Eidgenössische Technische Hochschule (ETH), Zürich, Switzerland

⁷Swiss Federal Institute for Forest, Snow and Landscape Research (WSL), Birmensdorf, Switzerland

⁸Department of Geoscience and Remote Sensing, Delft University of Technology, Delft, the Netherlands

Correspondence: Adrien Michel (adrien.michel@epfl.ch)

Abstract.

~~Rivers are ecosystems~~ River ecosystems are highly sensitive to climate change and projected future increase in air temperature is expected to increase the stress for these ecosystems. Rivers are also an important socio-economical factor impacting ~~amongst others~~, amongst others, agriculture, tourism, electricity production, and drinking water supply and quality. In addition to changes in water availability, climate change will impact ~~the temperature of rivers~~ river temperature. This study presents a detailed analysis of river temperature and discharge evolution over the 21st century in Switzerland, ~~a country covering a wide range of Alpine and lowland hydrological regimes~~. In total, 12 catchments are studied. ~~These are~~, situated both in the lowland Swiss Plateau and in the Alpine regions ~~and cover overall 10% of the country's area. This represents the so far largest study of climate change impacts on river temperature in Switzerland.~~ The impact of climate change is assessed using a chain of physics-based models forced with the most recent climate change scenarios for Switzerland including low, mid, and high emission pathways. The suitability of such models is discussed in detail and recommendations for future improvements are provided. The model chain is shown to provide robust results ~~and while~~ remaining limitations are identified. These are mechanisms missing in the model to correctly simulate water temperature in Alpine catchments during the summer season. A clear warming of river water is modelled during the 21st century. At the end of the century (2080-2090), the median annual river temperature increase ranges between +0.9°C for low emission and +3.5°C for high emission scenarios for both ~~Swiss Plateau-lowland~~ and Alpine catchments. At the seasonal scale, the warming on the ~~Swiss Plateau-lowland~~ and in the Alpine regions exhibits different patterns. For the ~~Swiss Plateau, the spring and fall warming is comparable to the warming~~ lowland the summer warming is stronger than the one in winter, ~~while the summer warming is stronger~~ but still moderate. In Alpine catchments, only a very limited warming is expected in winter. The period of maximum discharge in Alpine catchments, currently occurring during mid-summer, will shift to earlier in the year by a few weeks (low emission) or almost two months (high

emission) by the end of the century. In addition, a noticeable soil warming is expected in Alpine regions due to glacier and snow cover decrease. ~~These effects combined lead to a summertime river warming of +6.0°C in Alpine catchments by the end of the century for high emission scenarios. Two metrics are used to show the adverse effects of river temperature increase both on natural and human systems.~~ All results of this study ~~along with the necessary source code are provided with~~ are provided
5 with the corresponding source code used for this manuscript.

1 Introduction

River systems are considered to be among the ecosystems most sensitive to ~~climate change~~ Climate Change (CC) (Watts et al., 2015) and the projected future increase in air temperature (IPCC, 2021) ~~are is~~ expected to increase the stress for these ecosystems. Water temperature is one of the most important variables for aquatic ecosystems, influencing both chemical and
10 biological processes (Benyahya et al., 2007; Temnerud and Weyhenmeyer, 2008). Certain fish species are highly sensitive to warm water, which can promote specific diseases (e.g. proliferative kidney disease, PKD) or prevent reproduction (Caissie, 2006; Carraro et al., 2016). ~~In Alpine regions, along to water temperature, glacier retreat will also contribute to accelerate changes in ecosystems (Cauvy-Fraunié and Dangles, 2019; Fell et al., 2021). Higher, while higher~~ temperatures might be favorable for some other species, enhancing biological invasion, ~~which has already been observed~~ (Paillex et al., 2017; Niedrist
15 and Füreder, 2021). ~~In general, river temperature rise is expected to lead to a shift of many species' habitat to higher elevations. However, man-made or natural barriers (e.g. dams, power plants, waterfalls) might prevent migration to thermal refuges further upstream. In this context, it is necessary to underline that Alpine streams offer environmental heterogeneity and host a variety of species and genetic diversity; changes in water availability and in temperature will have an impact on the biodiversity and the ecosystem services at all levels~~ Alpine regions, together with water temperature, glacier retreat is also expected to contribute
20 to accelerated changes in ecosystems (Cauvy-Fraunié and Dangles, 2019; Fell et al., 2021).

River Hence, river temperature is an important ~~socio-economical~~ socio-economic factor. The literature clearly identified several ~~sectors which are vulnerable~~ vulnerable sectors: agriculture, tourism, electricity production, ~~and as well as~~ drinking water supply and quality (e.g. Hock et al., 2005; Barnett et al., 2005; Schaeffli et al., 2007; Bourqui et al., 2011; Viviroli et al., 2011; Beniston, 2012; Hannah and Garner, 2015). For example, during the exceptional heat wave and dry period in central and
25 northern Europe from April through August 2018, local electricity production at the Swiss nuclear power plant Mühleberg, canton Bern, had to be temporarily reduced due to unusually high water temperature of the Aare river.

Increase in surface water temperature is also expected to affect ground water temperatures ~~that are fed by river~~ through river water infiltration, with significant consequences on the biochemistry of these reservoirs (Epting et al., 2021). ~~However, the dynamics of groundwater temperature are complex, and changes in precipitation patterns might lead to a cooling of ground~~
30 ~~water due to shifts in recharge periods toward colder seasons (Epting et al., 2021). For all the above reasons, quantitative information on the future evolution of river temperature is essential and necessary. This study attempts to provide such information and predictions on the basis of different emission scenarios.~~

River temperature is expected to be affected by CC mainly through the influence of rising air temperature, changes in precipitation, and changes in snow and ice melt. At global scale, several Several global scale studies have shown a clear trend in river temperature at various locations over the last decades (Morrison et al., 2002; Webb and Nobilis, 2007; van Vliet et al., 2013; Null et al. 2013; Ficklin et al., 2014; Hannah and Garner, 2002; Morrison et al., 2002; Webb and Nobilis, 2007; van Vliet et al., 2013; Null et al., 2013; Ficklin et al., 2014; Hannah and Garner, 2002) as well as well in lake surface temperature (Dokulil, 2014; O'Reilly et al., 2015; Woolway and Merchant, 2017; Woolway et al., 2020a, b). In at various locations over the last decades. For Switzerland, a recent study shows found a mean increase of in river temperature of 0.33 ± 0.03 °C per decade between 1980 and 2018, which is associated with an increase in air temperature (Michel et al., 2020). This research also shows study also showed that the response to CC in Alpine catchments is different than in from those on the Swiss Plateau (lowland) catchments. The comparison of the future evolution of lowland versus Alpine catchments is one of the focal points of the present work.

. So far, the warming rate of rivers in Swiss Plateau catchments has been almost twice that of Alpine catchments. Studies investigating the future evolution of water temperature in Switzerland and the Alps in general are sparse are sparse and cover only few catchments (see e.g. CH2011, 2011; Råman Vinnå et al., 2018).

For all the above reasons, quantitative information on the future evolution of river temperature is necessary. River temperature is expected to be affected by CC mainly through the influence of rising air temperature, changes in precipitation, and changes in snow and ice melt. For instance, using the CH2011 (CH2011, 2011) SRES A1B CC scenario and a conceptual runoff model along with a simplified physics-based model for water temperature, Råman Vinnå et al. (2018) find an increase of $+0.08$ °C per decade for the Rhône river and of $+0.10$ °C per decade for the Aare river throughout the 21st century. For simulating the future river temperature evolution, a wide range of existing hydrological models is available (see the discussion in the review of Horton et al., 2021). Systematic reviews of such models exist in the literature (e.g. Benyahya et al., 2007; Gallice et al., 2015). These models are generally grouped divided into two main families: statistical and physics-based models. Statistical models rely on statistical relations to reproduce the variables of interest based on available input data. They present different level of complexity from linear relationships (see e.g. Hrachowitz et al., 2010; Segura et al., 2015) to machine learning (see e.g. Feigl et al., 2021). They require an extensive calibration phase (or learning phase in the case of machine learning models), and calibrated models might not be valid outside of the observed temperature range, which is an important drawback in case of climate change CC studies (Benyahya et al., 2007; Leach and Moore, 2019).

Physics-based models use a physical formulation of the mass or energy conservation to simulate discharge or temperature. These models generally require more input data than statistical models and are significantly more demanding in terms of computation. There are only a few coupled physics-based hydro-thermal models resolving discharge and temperature at the same time; a review of these models can be found in the work of Gallice et al. (2016). Most of these coupled models use statistical degree-day methods to simulate snowmelt. However In addition, a more physics-based representation of the snow and ice related processes in space and time, despite requiring usually more input data, allows for improved snow-runoff modelling during the snowmelt season, which is crucial in Alpine catchments (Martin and Etchevers, 2005; Magnusson et al., 2011; Lisi et al., 2015; Benyahya et al., 2019). In the case of water temperature simulations in the context of CC, (Martin and Etchevers, 2005; Magnusson et al., 2011; Lisi et al., 2015; Benyahya et al., 2019)

Therefore, a physics-based models are shown to be more sensitive to rising air temperature than statistical models (Leach and Moore, 2019; was chosen.

In this study, we use the snowmelt and runoff model Alpine3D (Lehning et al., 2006) coupled to the the semi-distributed hydrological model StreamFlow (Gallice et al., 2016). This model chain has already been successfully applied to Alpine hydrological modelling by Comola et al. (2015), Wever et al. (2017), Brauchli et al. (2017), and Griessinger et al. (2019). Discharge is a key variable required for simulating the water temperature of streams, and it will be considered alongside stream temperature. Discharge is however not the main focal point here and some The present study has two main objectives: i) Assess the ability of a physics-based model chain to simulate discharge and water temperature. This is achieved by using performance metrics over calibration and validation periods, and by assessing in how far the models are able to reproduce currently observed trends. ii) Investigate the impact of CC on river temperature. Despite the existence of extensive recent studies on discharge evolution in Switzerland with climate change under CC in Switzerland over a larger set of catchments already exist (Brunner et al., 2019a, b; Muelchi et al., 2020, 2021). In the present study, the model chain is run over 12 catchments covering together 10% of the area of Switzerland; 7 are located in the Swiss Plateau, and 5 in the Swiss Alps. They cover a wide range of catchment sizes (from 3.4 to 973 km², see Figure 1). The models are run for 5 periods of ten years between 1990 and 2090 and forced with an hourly downscaled version of the CH2018 climate change scenarios (CH2018, 2018; Michel et al., 2021b). The time series obtained from the models are analysed on monthly to annual time scales to describe and investigate the impact of CC. Some key indicators regarding ecology and industrial water usage are also computed, similar to the ones computed in the work of Michel et al. (2020) over a historical period. (Brunner et al., 2019a, b; Muelchi et al., 2020, 2021), discharge is included in our analysis given the coupling of water temperature and discharge. For both objectives, the comparison of lowland versus Alpine catchments is one of the focal points of this research.

The focus is on Switzerland, a country presenting a wide topographic heterogeneity leading to different discharge and thermal regimes between the lowland Swiss Plateau regions, where the hydrological cycle is mainly precipitation driven, and the high altitude Alpine regions, where snow and glacier melt play an important role.

We use the snowmelt and runoff model Alpine3D (Lehning et al., 2006) coupled to the semi-distributed hydrological model StreamFlow (Gallice et al., 2016). This model chain has already been successfully applied in Alpine discharge modelling studies by Comola et al. (2015), Wever et al. (2017), Brauchli et al. (2017), and Griessinger et al. (2019).

2 Data

2.1 Catchments

For this study, 12 catchments are selected; they are shown in Figure 1 and their characteristics are listed in Table 1. They cover a wide range of catchment sizes (from 3.4 to 973 km²). The objective is to have include representative catchments both on the Swiss Plateau and in the Swiss Alps. The selection of catchments Further selection is based on the following requirements: Sufficient availability of hydrological and meteorological measurements (Sections 2.2, 2.3) and of climate change scenarios (Section 2.4). Moreover, catchments with, as well as CC scenarios. Other selection criteria are minimal anthropogenic

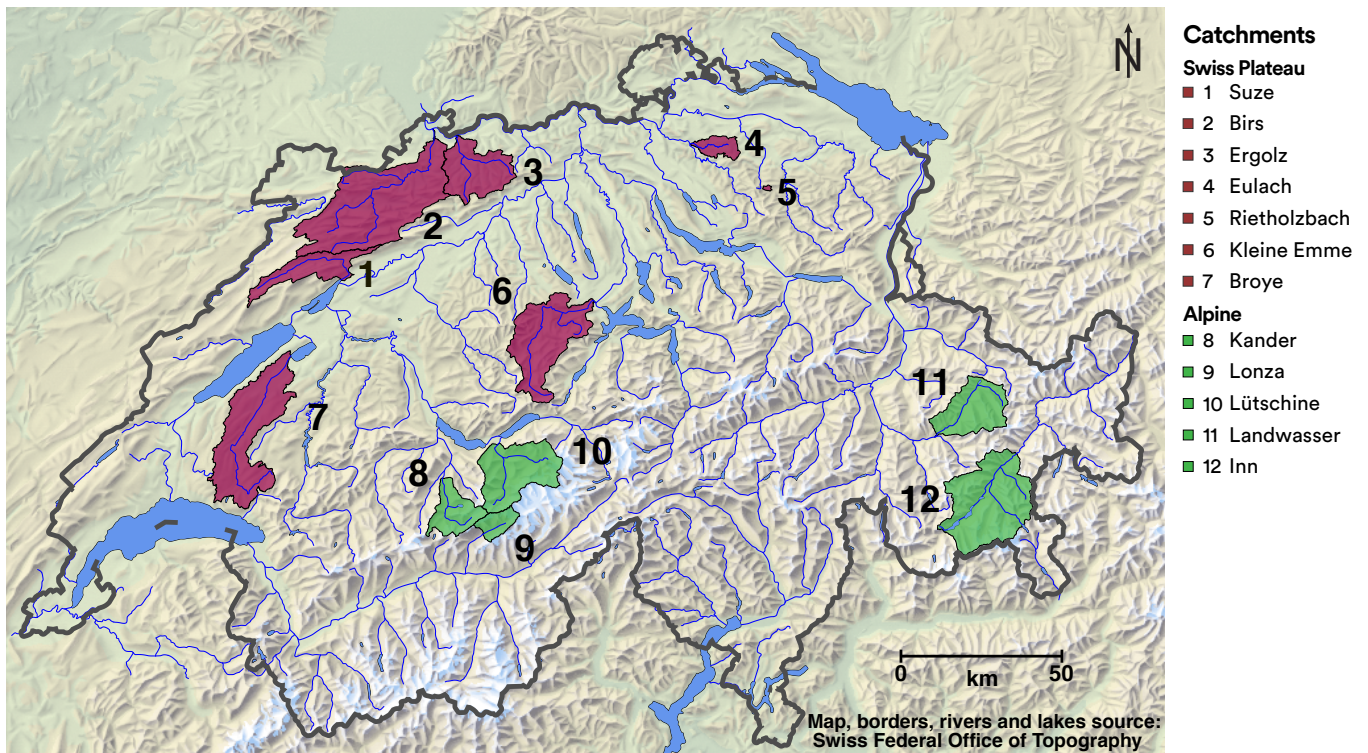


Figure 1. Map of Switzerland showing the location of the simulated catchments. Maps providing details of individual [catchment-catchments](#) are shown in Supplementary Figure S1. Data [provided by the source](#): Swiss Federal Office of Topography ([swisstopoSwisstopo](#)).

disturbances and [without important absence of larger](#) lakes along the watercourse [are chosen since these effects are not taken into account in the models](#) ([Section since the models do not take into account these effects](#) (Section 3.3)). [These criteria strongly reduce the number of candidate Alpine catchments](#) [Dams being very abundant in Switzerland](#) (Belletti et al., 2020; Mulligan et al., 2020), [the choice of Alpine catchments to be simulated is rather limited](#), resulting in the [following set: set of](#) Inn, Kander, Landwasser, 5 Lonza, and Lütshine [catchments](#).

For the Swiss Plateau, more catchments satisfy the requirements. Considering a range of catchment sizes, the following catchments are retained: Birs, Broye, Ergolz, Eulach, Kleine Emme, Rietholzbach, and Suze. This selection is also based on the [catchments of interest use of those catchments](#) for groundwater studies, [for which results from this study are integrated in the work of Epting et al. \(2021\)](#) (Epting et al., 2021).

10 For some catchments, the simulations are extended further downstream of the hydrological gauging station [being](#) used for calibration, to allow for connection to lakes, and [to cover areas required for the study performed in the work for the use of the simulation results in a related ground water study](#) of Epting et al. (2021). A detailed map showing the topography, catchment boundaries, stream network, and locations of hydrological and meteorological stations for each catchment is shown in Figure S1.

Table 1. Details of the selected catchments. Details about of land-cover are given in Section 2.5 and S3, note that built-; built-up areas are treated as rock. Details about of discharge stations (Q stationstations) and water temperature stations (T stationstations) are given in Table S1. Details about of meteorological stations are given in Table S2. Mean annual water temperature and discharge are given at the gauging stations, which do not necessarily correspond to the points-outlets simulated with climate change-CC scenarios (see text). They-; they are computed over the period 2005-2015, except for the Ergolz (2014-2018).

Catchment	Area (km ²)	Mean elevation (m)	Min–Max elevation (m)	Glacier cover (%)	Field cover (%)	Forest cover (%)	Rock cover (%)	Mean annual discharge (mm h ⁻¹)	Mean annual water temperature (°C)	Q station	T station	Meteo stations
Swiss Plateau Catchments												
Birs	973.4	747	257–1436	0	44.1	48.5	7.4	1.57	11.0	2106	2106	BAS CHA RUE
Broye	627.3	667	429–1509	0	71.0	22.5	6.5	1.47	11.2	2034	2034	CDF NEU PAY
Ergolz	301.3	564	261–1151	0	45.4	43.5	11.2	1.11	12.0	2202	ER1	BAS BUS RUE
Eulach	74.2	535	410–884	0	44.3	32.7	23	0.95	10.7	ZH523	ZH523	KLO SMA TAE
Kleine Emme	479.9	1053	436–2319	0	51.6	44.9	3.5	2.7	9.6	2634	2634	LUZ NAP PIL
Reitholzbach	3.4	794	672–927	0	78.7	21.3	0	2.5	8.5	2414	2414	TAE STG
Suze	214.9	985	432–1602	0	47.2	46.5	6.2	2.1	9.0	A024	A024	CDF CHA NEU
Alpine Catchments												
Inn	625.2	2463	903–4029	6.4	46.4	11.7	35.5	2.8	5.0	2462	2462	COV SAM BER2 BER3 KES2 ZNZ2
Kander	180.2	2139	774–3662	13.3	31.7	16.3	38.7	4.2	6.8	A017	A017	ABO INT JUN
Landwasser	295.4	2134	958–3127	0.2	55.3	24.1	20.4	1.5	4.3	2355	2327	DAV WFJ DAV2 DAV3 DAV4 KLO2 PAR2 SLF2 ZNZ2
Lonza	78.6	2619	1513–3864	26.4	23	6	44.6	5.1	4.1	2269	2269	ABO INT JUN VIS GAN2
Lütschine	384.7	2032	575–4121	14.7	37	22.3	26.0	4.2	6.0	2109	2109	ABO INT JUN LHO2 SCH2

2.2 Hydrological data

Quality controlled water temperature and discharge ~~measurements~~ measurements at hourly resolution are provided by the Federal Office for the Environment, FOEN (FOEN, 2019), the Office for Water and Waste of the Canton of Bern, AWA (AWA, 2019), the Office for Waste, Water, Energy and Air of the Canton Zurich, AWEL (AWEL, 2019) and by Holinger AG. Details
5 ~~about of~~ the hydrological stations used are given in Table S1 and Figure S1.

2.3 Meteorological data

Meteorological data used in this study are provided by the MeteoSwiss (MCH) automatic monitoring network, distributed through IDAWEB (2020), and by the Inter-Cantonal Measurement and Information System (IMIS, 2019). Each catchment is simulated using forcing data from 2 to 9 IMIS and/or MCH stations, depending on the number of available stations in within or
10 nearby the catchment (for details see Tables 1, S2 ~~and Figure~~, and Figure S1). The variables used at hourly resolution to force the model are: air temperature (TA), precipitation accumulation (PSUM), wind velocity (VW), relative humidity (RH) and incoming shortwave ~~solar~~ radiation (ISWR). Only variables that are available at measurement stations and in the downscaled CH2018 CC scenarios dataset (see Section 2.4) are used, to ensure that the historical and ~~climate change runs use exactly the~~
CC model runs use the exact same set of forcing data.

15 Note that ~~stations of the IMIS network do not provide ISWR. In addition, IMIS stations are~~ IMIS stations do not measure ISWR; they are also not equipped with heated precipitation gauges. For these stations, precipitation is deduced from snow depth variations during the winter season using the snow settling calculated by the SNOWPACK model (Lehning et al., 2002b) and from interpolation from of nearby MCH stations with heated rain gauges in case of absence of snow.

Incoming longwave radiation (ILWR) ~~is also~~, required to force the models (~~see Section 3.1~~) and, is measured at some MCH
20 stations. However, this variable is not included in the CH2018 dataset used to force the model during ~~climate change~~ CC simulations. As a consequence, both for historical and ~~climate change~~ CC periods, ILWR is calculated at the location of the meteorological stations applying an "all sky" approach described in ~~the work of~~ Omstedt (1990), which uses TA, RH, and ISWR to estimate the cloud cover fraction and the longwave downward radiation. Methods used for interpolating the input data are described in Section 3.2.

25 2.4 Climate change scenarios

Recent climate change scenarios are available for Switzerland from the CH2018 dataset (NCCS, 2018) at daily resolution, based on the European Coordinated Regional Climate Downscaling Experiment, EURO-CORDEX. ~~For the purpose of this study~~ Since detailed physics-based snow models require sub-daily granularity, a downscaled version of this dataset at hourly resolution ~~has been produced (Michel et al., 2021b, a), as detailed physics-based snow models require forcing at sub-daily~~
30 granularity and at stations scale is used (Michel et al., 2021b, a). This dataset also includes an extension of the CH2018 scenarios to the IMIS station network. The temporal downscaling is ~~done using a~~ performed using an improved delta change approach which is shown to correctly preserve the seasonal means of the CC scenarios. Since ~~the requirements of this method regarding~~

~~the length of the historical timeseries are stricter than the requirements of the~~ this method requires longer historical time series than the procedure used to derive the CH2018 scenarios (~~i.e. longer historical timeseries are required~~), some stations ~~are had to be~~ excluded from the original dataset, ~~reducing the numbers of available stations~~. In addition, the ~~downscaling method used enforces an analysis of results~~ used downscaling method requires the results to be analyzed at a monthly or seasonal scale,
5 ~~since~~ shorter time periods ~~being not may not be~~ correctly captured (see discussion in Michel et al., 2021b).

Most IMIS stations were installed after 2000, ~~such that only 10 years entailing that only 10-year~~ periods of downscaled CC scenarios can be constructed (~~see Michel et al., 2021b~~). ~~For the~~ For all IMIS stations, the temporally downscaled dataset for CC scenarios is computed for each individual decade ~~and for all stations~~ between 1990 and 2100. For the MCH stations, which generally have much longer data availability, ~~scenarios for 30 years~~ also scenarios for 30-year periods between 1980 and
10 2100 were ~~also constructed along with 10 years~~ constructed in addition to the 10-year periods. Using the time series derived over 30 years would be beneficial since ~~30 years~~ 30-year periods are generally considered to capture the climatic ~~eyes better than 10 years~~ trends better than 10-year periods (Michel et al., 2021b) and ~~is are~~ often the standard length for CC studies (WMO, 2017). However, this would prevent the usage of IMIS stations. Magnusson et al. (2011) and Schlögl et al. (2016) have shown that increasing the number of stations used to force the model ~~does improve~~ indeed improves the simulations over Alpine
15 catchments. ~~In addition, the computational limits of the models used here prevent simulations of 30 years periods~~. Accordingly, we use the ~~10 years~~ 10-year time series in this work. In Section S7 we assess the impact of using ~~10 years compared to 30 years~~ 10-year versus 30-year periods and show that only the range of warming ~~obtained~~ is impacted, not the median values.

Out of the 68 CC scenarios provided in ~~the work of~~ Michel et al. (2021b), 21 are used in the present study: 7 for the RCP2.6 emission ~~scenario~~ scenarios (low to negative emission), 7 for the RCP4.5 emission scenarios (moderate emission), and 7 for
20 the RCP8.5 scenarios (business-as-usual). ~~Climate change~~ These CC scenarios originate from 7 chains of GCMs and RCMs ~~as~~ detailed in Table 2. Only these 7 model chains contain all the variables and RCPs needed for the simulations performed here. The CC simulations are run over the hydrological years 1991-2000, 2006-2015, 2031-2040, 2056-2065, and 2081-2090, referred to as CC periods. For simplicity, we use full decade names further in this paper (e.g. 1990-2000 for the hydrological years 1991-2000, meaning 1 ~~Oct.~~ October 1990 to 30 ~~Sept.~~ September 2000). The period 2005-2015 is used to validate the
25 CC simulations ~~versus against~~ measurements for catchments where long enough historical measurements are available (~~see Section S8~~). ~~This validation shows that forcing the models with CC scenarios leads to small over- or underestimation of the total discharge in Alpine catchments. This is expected since the used CC scenarios show lower performance in Alpine compared to Swiss Plateau areas for precipitation (Warscher et al., 2019). Overall, it is confirmed that the output of Alpine3D and StreamFlow, when forced with CC scenarios, is coherent with historical time series.~~

. In the following, the meteorological seasons used for the analysis are abbreviated as follows: Winter = DJF (December, January, and February), Spring = MAM (March, April, and May), Summer = JJA (June, July and August), and Fall = SON (September, October, and November).

2.5 Elevation, glacier, catchment geometry, and land cover data

Table 2. Climate change model chains used in this study. For each model chain [the RCP2.6, RCP4.5 and RCP8.5 scenarios](#) are used.

GCM	RCM	Seed	Resolution
ICHEC-EC-EARTH	DMI-HIRHAM5	r3i1p1	0.11°
ICHEC-EC-EARTH	SMHI-RCA4	r12i1p1	0.11°
MIROC-MIROC5	SMHI-RCA4	r1i1p1	0.44°
MOHC-HadGEM2-ES	KNMI-RACMO22E	r1i1p1	0.44°
MOHC-HadGEM2-ES	SMHI-RCA4	r1i1p1	0.44°
MPI-M-MPI-ESM-LR	SMHI-RCA4	r1i1p1	0.44°
NCC-NorESM1-M	SMHI-RCA4	r1i1p1	0.44°

~~Multiple geographical data are needed to perform the~~ [To perform](#) simulations with Alpine3D. ~~A~~, a digital elevation model is needed, as well as a land use classification to initialize the pixels in the model in an appropriate state and [to](#) define the soil and canopy properties. For ~~glacierized~~ [glaciated](#) catchments, the ~~glaciated area and glacier ice area and~~ [thickness](#) need to be provided.

5 The digital elevation model (DEM) is derived from the DTM25 dataset at ~~25m~~ [25 m](#) resolution provided by Swisstopo, averaged to the resolutions used for the simulations (100- m and 500- m). Land cover data are derived from the 2006 version of the Copernicus CORINE Land Cover (European Environment Agency, 2013) dataset (CLC) at 100- m resolution (upscaled to 500- m resolution). CLC land cover classes are translated into the land cover classes available in Alpine3D (see Table S3). The catchment and hydrological network, together with sub-catchments attached to each river reach, are derived using the TauDEM
10 software (Tarboton, 1997) with a wrapper to force it to reproduce exactly the river network provided by the Swiss Federal Office for the Environment (FOEN) (Swiss Federal Office of the Environment, 2013, 2020). Details ~~about of~~ [this method](#) along with an evaluation are given in Section S3.

Detailed glacier thickness maps (i.e. ice thickness above bedrock surface) are used at the starting point for each ~~past and future~~ simulation. The evolution of the glacier geometry is simulated with the model GloGEMflow (Zekollari et al., 2019).
15 Details are presented in Section ~~3.1. Note that the~~ [3.1. The](#) glacier maps overwrite the CLC land cover classes ~~, and that a pixel and pixels~~ considered as glacier in CLC but not in the glacier model ~~is turned into a bare rock pixel~~ [are turned into bare rock pixels](#).

Glacier coverage and mean elevation indicated in Table 1 are obtained from the glacier height grids and DEM described above, which means that they might differ slightly from values given by the data provider for the gauging stations.

20 3 Models

The models used in this study, GloGEMflow, Alpine3D and StreamFlow, are presented in detail in ~~the work of~~ Zekollari et al. (2019), Lehning et al. (2006) and Gallice et al. (2016), respectively. Here we only provide ~~an a short~~ [overview](#) of the models and emphasize aspects relevant for the present application. The main workflow of ~~the Alpine3D and Streamflow models is presented~~

in Figure 2. All model setup files for Alpine3D and StreamFlow, along with soil properties, DEM, land-use, glacier cover, and stream and watershed delineation files are provided (see Data and code availability). StreamFlow is shown in Figure 2.

For Alpine3D, as well as for StreamFlow, significant optimization work was necessary in order to use the model chain for such a computationally intensive study. Details about the optimization procedure are presented in the work of Michel (2021).

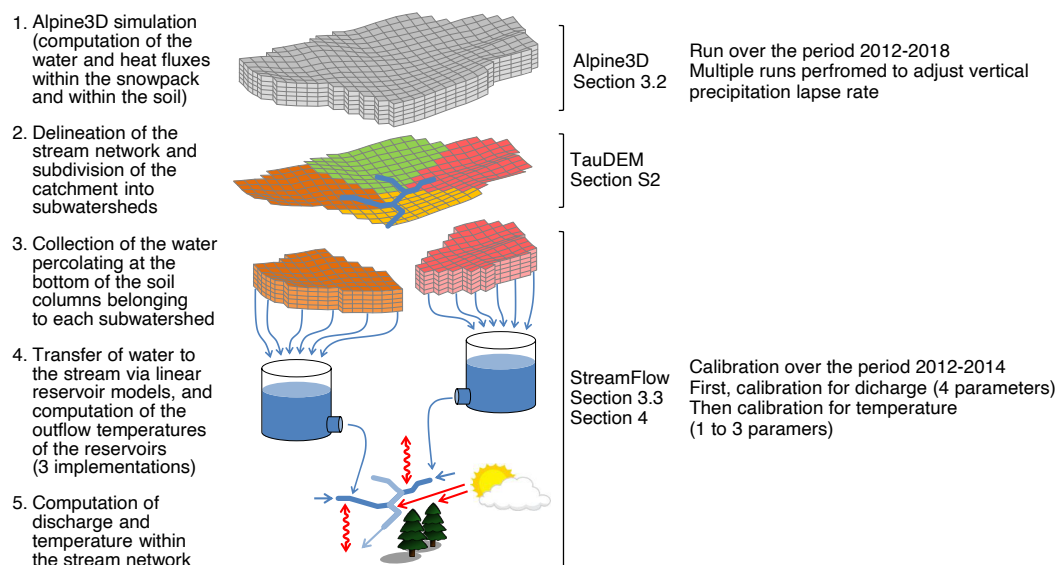


Figure 2. Details of the models' workflow. The calibration and validation periods indicated hold-are valid for all catchments except for the Eulach catchment (where the periods 2015-2016 and 2017-2018 are used instead). Figure adapted from (Gallice et al., 2016).

5 3.1 GloGEMflow

GloGEMflow calculates the evolution of all individual glaciers along their flowlines by explicitly accounting for both surface mass balance and ice flow processes. The mass balance is calculated from a positive degree-day approach (Huss and Hock, 2015), while ice flow is described through the shallow-ice approximation (Hutter, 1983). GloGEMflow was extensively evaluated over the European Alps, by relying on observed mass balances, surface velocities, and glacier changes, and by comparing the simulated glacier changes to those from high-resolution 3D modelling studies that focus on individual glaciers (e.g. Jouvét et al., 2009; Zekollari et al., 2014). The simulated glacier extents under the CH2018 CC scenarios considered in this study were transformed from the GloGEMflow 1D model grid to the 2D model grid (at both 100- m and 500- m resolution) by ensuring that the area and volume of was conserved for each elevation band was conserved. This conversion was performed by taking the 2D reference glacier geometry (Huss and Farinotti, 2012) as a starting point, and applying a uniform absolute change in ice thickness per elevation band to match the GloGEMflow modelled area. Subsequently, the resulting 2D ice thickness was changed uniformly (same relative change) per elevation band to match the modelled GloGEMflow volume.

3.2 Alpine3D

Alpine3D is a spatially distributed version of the multi-layer snow and soil model SNOWPACK, which explicitly solves the mass and energy balance equations and simulates the snow micro-structure (Lehning et al., 2002b, a). As discussed in the introduction, previous studies have shown the added value of a complex snow model in Alpine environments, while we argue that for Swiss Plateau regions, such complex models may not be required. However, Alpine3D provides the vertically resolved soil temperature, which is required in StreamFlow and not provided in simpler models. In addition, using Alpine3D throughout allows to have ~~consistent modelling~~ a consistent land-surface model between all catchments. Alpine3D is run at 500-m resolution for all catchments except the small Rietholzbach catchment, where a resolution of 100-m is used. The resolution is chosen to reduce the computational cost and it has been shown to have only a minor impact on simulated snow depth (Schlögl et al., 2016). The input data for Alpine3D are interpolated to the grids using various algorithms provided by the MeteIO library (Bavay and Egger, 2014). The air temperature is first de-trended for elevation (using a vertical lapse rate computed from the measurements), then interpolated using an inverse distance weighting, and finally re-trended. An analog procedure is applied for longwave radiation (using a ~~fixed constant~~ lapse rate of $-31.25 \text{ W m}^{-2} \text{ W m}^{-2} \text{ km}^{-1}$ to mimic the effect of decreasing air temperature), for wind velocity (using the lapse rate computed from the measurements) and for precipitation, where values of the vertical lapse rate range between ~~10-%~~ 10 km^{-1} and ~~50-%~~ 50 km^{-1} (see Section 3.1). Finally, cloud cover is derived at each meteorological station from ISWR (if available) and interpolated to the grids using an inverse distance weighting algorithm. This cloud cover is then used to ~~correct~~ adjust the theoretical diffuse and direct radiation at each pixel (Helbig, 2009). Topographical shading is taken into account and a simple model of reflected radiation from surrounding terrain is used.

Alpine3D ~~also~~ contains a two-layer canopy module simulating the micro-meteorology in the forest, the evapotranspiration, and the interaction between trees and snow, including snow interception (Gouttevin et al., 2015). Grass, crops and other land covers are not directly simulated by the canopy module, and the evapotranspiration here is parameterized through the value of the roughness length used in the computation of the latent heat flux. Water infiltration in snow and soil is handled through a simple bucket model. ~~A more complex option of explicitly solving Richard's equation for water transport in the snowpack or in the soil is implemented in SNOWPACK and described in the work of Wever et al. (2014, 2015). These studies discussed that As shown in previous studies, the bucket scheme performs well on seasonal time scales, while Richard's equation, which provides more accurate results on sub-daily time scales or very early in the melt season, also comes at higher computation costs. This higher computational cost prevents the usage of this implementation in the large study performed here. For the same reason, the provides adequate performance on daily and seasonal timescales (Wever et al., 2014, 2015).~~ Alpine3D ~~module simulating snow transport by wind (Mott et al., 2008) is not enabled.~~ Alpine3D does not handle partially covered snow pixels, which might delay the melt at the end of the snow season due to overestimated albedo.

Both Alpine3D and StreamFlow are run at hourly resolution. The model writes gridded output for all interpolated forcing variables ~~along~~, together with the soil temperature at various depths and the runoff at the bottom of the soil column. ~~Maps of~~

snow depth and SWE are only partially used in the discussion here, but might be of interest for further studies on the spatial impact of CC on snow depth in the future, and are therefore included in the model output.

3.3 StreamFlow

StreamFlow is a semi-distributed model concurrently simulating discharge and temperature ~~at the same time~~ in each river segment. The runoff ~~output~~ at the bottom of the soil column produced in as calculated by Alpine3D is collected and summed up totalized at the scale of each ~~each~~ sub-catchment in StreamFlow (see Figure 2), and the residence time in the soil is determined with an approach using two linear reservoirs in series (Perrin et al., 2003) ~~, with reservoir coefficients to be calibrated with~~ reservoirs calibrated coefficients. A parameter representing a fraction of water loss (representing emulating deep soil infiltration or the difference between surface and subsurface catchment area) can be calibrated in addition. A single parameter set is calibrated for the entire catchment, with the reservoir parameters being scaled to the sub-catchment size (Gallice et al., 2016).

Based on this sub-catchment runoff, the model ~~then~~ uses either a lumped approach (where each stream reach is resolved as one a single element, receiving input from its related sub-catchment) or a discretized approach (where reaches are separated into sub-elements based on the resolution used) to compute reach-scale water temperature and runoff routing to the outlet.

For water routing at the reach scale or at the sub-element scale, either an instant routing is considered or a routing scheme based on the Muskingum-Cunge approach, which solves a diffusive-wave approximation of the shallow water equation (Cunge, 1969; Ponce and Changanti, 1994). Regardless of the water routing scheme, heat is explicitly advected along together with the mass.

The water temperature in the soil reservoirs at the sub-catchment scale (which determines the water temperature when leaving the reservoirs and entering the river reaches) can be computed in StreamFlow either by (a) using the approach of Comola et al. (2015) based on energy balance between groundwater and soil temperature (where one parameter needs to be calibrated), (b) using the approach of the Hydrological Simulation Program–Fortran, HSPF (Bicknell et al., 1997), or (c) simply taking the soil temperature at a given depth. The HSPF approach essentially approximates the time evolution of the water temperature in the reservoirs by smoothing and adding an offset to the time series of air temperature (the smoothing factor and offset are calibrated parameters). For all three approaches, forcing values averaged over each sub-catchment are used. Different routing and soil water temperature schemes are tested for choosing the most suitable ~~for this application (see Sections ?? and S5)one~~.

Once the water is routed to the river, the evolution of the water temperature is obtained by computing the energy balance for each reach (~~either lumped or discretised~~) considering solar and longwave radiations considering short- and longwave radiation, sensible and latent heat fluxes, heat exchange and friction with the streambed, ~~friction with the ground~~, and heat advection from upstream reaches and from water infiltration input from the stream-hillslope interface. The latent heat flux is computed using a simplified Penman equation (Hannah et al., 2004; Haag and Luce, 2008; Magnusson et al., 2012) and the sensible heat flux is computed from a classical approach ~~Brown (1969) also implemented in the work of Comola et al. (2015). The heat transfer coefficient (Brown, 1969). The coefficient of heat transfer~~ between the ground and the river needs to be calibrated. Note that the soil depth used for streambed exchange and for the infiltrating water temperature in the approach (a) and (c) are the same.

Different depths are tested and the soil depth leading to the best results is used (~~Sections ?? and Section S5~~). ~~Section S5~~ shows that the soil depth chosen for streambed exchange has only a weak impact).

Input data from Alpine3D used in StreamFlow benefits from the treatment performed in Alpine3D, i.e. topographic shading and shading from vegetation present in the land cover dataset used (see ~~Section 2.5) along 2.5) combined~~ with the impact of
5 vegetation on wind speed. ~~Small-scale~~ Small-scale riparian vegetation shading is not accounted for, which might lead to an overestimation of the radiation input in small streams. However, Section S9 shows that this has only a minor ~~effect. There is yet no possibility to include anthropogenic disturbances in StreamFlow such as water retention, pumping or energy input. Since dams are very abundant in Switzerland (Belletti et al., 2020; Mulligan et al., 2020), it reduces the choice of Alpine catchments to be simulated.~~ impact.

10 4 **Models calibration and validation**

3.1 Calibration and validation of models

~~This section presents the calibration and validation of the models. In the following, meteorological seasons abbreviated as follows: Winter = DJF (December, January, and February), Spring = MAM (March, April, and May), Summer = JJA (June, July and August), and Fall = SON (September, October, and November). Sensitivity analysis on calibration period length is
15 shown in Section S4, inter-comparison of different models setup for StreamFlow is shown in Section S5, and detailed figures for each catchment for the calibration and validation phase are shown in Section S6, Figures S6 to S29. Figures S30 to S33 show the snow depth of Alpine catchments simulated by Alpine3D at the location of stations measuring snow depth. Additional plots for Alpine catchments calibration are shown in Section S9.~~

3.2 **Calibration and validation setup**

20 For the calibration/validation phases process, Alpine3D is run for the hydrological years 2012-2018. Each Alpine3D simulations ~~are always~~ simulation is started in July and the ~~first~~ first 3 months serve as spin-up. Before formal ~~parameters~~ parameter calibration in StreamFlow, multiple model runs of Alpine3D are performed with different values of the precipitation vertical lapse rate ~~in order~~ to adjust the yearly total mass balance in Alpine catchments. In addition, modeled snow heights are compared to measurements to assess ~~how well the capacity of~~ Alpine3D reproduces in reproducing observed snow season dynamics
25 in terms of season duration. Alpine3D has therefore undergone some parameter adjustment but ~~cannot be calibrated as a physics-based model~~ is not calibrated in a strict sense.

After this initial performance check of Alpine3D, StreamFlow is calibrated over the years 2012-2014 and validated over the years 2015-2018. ~~An exception here~~ The only exception is the Eulach catchment, where due to the lack of water temperature measurements before 2014, Alpine3D is run over 2015-2018, while the calibration and validation periods are 2015-2016
30 and 2017-2018. Every StreamFlow simulation is run using the first two years of data for spin-up and then re-starts from the beginning of the time period. Section S4 shows sensitivity tests for the Broye and Lonza catchments using a longer simulation

Table 3. Calibration parameters and range of values used in StreamFlow, see ~~the work of~~ Gallice et al. (2016) for details.

Parameter	Range	Units
Discharge parameters		
Maximum infiltration rate	[0,100]	mm day ⁻¹
Upper reservoir τ	[1,50]	day
Lower reservoir τ	[100,1000]	day
Fraction of lost water	[0,40]	%
Water temperature parameters		
Streambed heat transfer coefficient	[0,100]	W m ⁻² K ⁻¹
Offset (HSPF module)	[-3,1]	s
Smoothing factor (HSPF module)	[1e-7,5e-6]	K s ⁻¹
Diffusion time (energy balance module)	[1e-3,100]	day

time period (2002-2018). Different calibration periods are used within these 17 years to test ~~whether there is a strong influence on for a significant influence on the~~ hydrological model output (Myers et al., 2021), which was not the case.

Depending on the setup, between 5 and 7 parameters need to be calibrated in StreamFlow (4 for discharge, the remaining for water temperature, see Table 3). The calibration is ~~completed~~ ~~performed~~ with a Monte Carlo approach, first for the 4 parameters of the discharge module (50'000 runs), and then for the ~~1 to 3~~ parameters of the water temperature module (10'000 runs). The calibration for water temperature is run only for the best parameter set obtained from ~~the~~ discharge calibration, and is run ~~for different soil temperature depths from~~ ~~with soil temperature calculated by~~ Alpine3D (~~see Section at different depths (the depth leading to the best results being kept, see Section S5).~~

The sequential calibration is motivated by the fact that the model is significantly faster when only discharge is computed. The 10 random sets are drawn from uniform distributions, with bounds indicated in Table 3 (taken and slightly adapted from the work of Gallice et al., 2016). All other ~~parameters of the model~~ ~~model parameters~~, such as ~~width-to-height relationship~~ ~~aspect ratio~~ of the reach cross-section, are taken from ~~the work of~~ Gallice et al. (2016). As performance metrics, we use the Kling-Gupta efficiency (KGE) coefficient (Gupta et al., 2009) for discharge and the root mean square error (RMSE) for water temperature.

~~To assess-~~

15 4 Results

4.1 StreamFlow calibration and validation results

Before proper calibration, the performance of the different StreamFlow modules is assessed (see details in Section S5). To this end, the calibration is performed using either the lumped or discretized, and the direct or Muskingum-Cunge approaches

for reach-scale water routing (4 combinations), and the three sub-catchment temperature schemes. These are tested both at 100-m and 500-m resolution (24 combinations in total, ~~Section S5). We find that using~~, and the 100 m resolution ~~slightly improves the results (Table S6), StreamFlow is thus run at 100 m resolution for the CC analysis. Note that even when using the lumped approach for routing, the StreamFlow simulation resolution impacts the delineation of sub-catchments and river reaches, and thus the simulated water and heat input to the river reaches is retained~~. The more complex and computationally more demanding water routing schemes do not improve the performance, ~~consequently~~ the lumped and direct approaches are ~~thus~~ used (Table S5). Finally, the HSPF approach for sub-catchment temperature yielded the best results across all ~~studied~~ catchments and is therefore selected (Table S7, Figures S4 and S5). Note that employing the HSPF scheme results in a lower impact of the soil temperature on the simulated water temperature (only through conduction between water and streambed).

~~Additional discussion about the performance of the HSPF scheme in Alpine catchments is presented in Sections 4.1.2, S5, and S9.~~

4.2 StreamFlow calibration and validation results

~~Table 4 shows the KGE and RMSE values from the calibration and validation of StreamFlow. These values indicate a good performance in comparison to other results in the literature (e.g. Köplin et al., 2010; Råman Vinnå et al., 2018). In particular, the RMSE values for water temperature are lower than in the work of Gallée et al. (2016) for an Alpine catchment (the Dischmabach catchment, part of the Landwasser catchment) using the first version of StreamFlow. All calibrated parameter values for each catchment are summarized in Table using the retained setup. For each catchment, all calibrated parameter values are summarized in Table S8 and detailed per-catchment plots for the calibration and validation phase are shown in Section S6, Figures S6 to S29. Figures S30 to S33 show the snow depth for Alpine catchments simulated by Alpine3D at the location of stations measuring snow depth. Daily time series of simulated and measured water temperature of four catchments are shown in Figure 3. These time series show that catchments with similar performance metrics (Table 4) can still show a different quality of fit to corresponding observed data. This is best visible by an overestimation of water temperature in Alpine catchments in summer, which underlines the limitation of using lumped model performance metrics such as KGE and RMSE over the entire year, and the need to perform a more detailed analysis, as presented below and in Sections 5.1 and S9.~~

~~Daily time series of simulated and measured water temperature of four catchments are shown in Figure 3. The time series show that catchments with similar performance metrics (see Table 4) can still show a different quality of fit to observed data. This is most clearly visible by an overestimation of water temperature in Alpine catchments in summer, which underlines the limitation of using lumped model performance metrics such as KGE and RMSE over the entire year, and the need to perform a more detailed analysis, as presented below.~~

4.1.1 Swiss Plateau catchments

Validation results ~~for the plateau of the Swiss Plateau~~ catchments show that the KGE ranges between 0.67 and 0.87 and the RMSE between 0.91 and 1.81 °C (~~see Table 4. For these catchments, the Table 4~~ These values indicate a good performance compared to previous studies (e.g. Köplin et al., 2010; Råman Vinnå et al., 2018). The simulated validation time series for both

Table 4. Performance of [the StreamFlow model](#) during the calibration and validation periods evaluated with Kling-Gupta efficiency (KGE) for discharge and RMSE for water temperature.

Catchment	Calibration period		Validation period	
	KGE (-)	RMSE (°C)	KGE (-)	RMSE (°C)
Swiss Plateau Catchments				
Birs	0.84	1.06	0.86	1.20
Broye	0.75	0.91	0.78	0.91
Ergolz	0.85	1.17	0.84	1.39
Eulach	0.74	1.18	0.67	1.08
Kleine Emme	0.79	1.08	0.70	1.07
Rietholzbach	0.74	1.63	0.75	1.81
Suze	0.84	1.68	0.87	1.50
Alpine Catchments				
Inn	0.94	1.02	0.87	1.25
Kander	0.89	0.69	0.78	1.18
Landwasser	0.83	0.92	0.72	1.15
Lonza	0.92	0.89	0.91	1.01
Lütschine	0.89	1.28	0.84	1.37

discharge and water temperature lie in the range of the historical variability of the measurements (Figures S6, S8, S10, S12, S18, S26, S28 to S19). The dynamics of high [water-river](#) temperature and discharge events [along with as well as](#) the annual cycles are well captured. There are no strong seasonal patterns [for the errors in water temperature in these catchments of errors in river temperature](#) (except for a slight underestimation in spring), and there is no correlation between errors in [discharge and water simulated discharge and river](#) temperature (Figures S7, S9, S11, S13, S6 to S19, S27, S29). However, there is an overestimation of discharge in winter, but without an impact on [the](#) simulated water temperature.

The error on [river](#) temperature is slightly larger for the Suze catchment compared to the other Swiss Plateau catchments (see Table 4 and Figure 3). We attribute this to the fact that this region is karstic, with enhanced [ground-water](#) infiltration and resurgence to the surface, which impacts the water temperature. In addition, the gauging station is situated downstream of a cement factory, making anthropogenic [disturbances in the measurements influence on the stream temperature](#) likely (see Michel et al., 2020). [For In](#) the Eulach catchment, a large fraction of water (about 33 %) is directly lost to deeper groundwater via the calibrated water loss parameter. [However, this This](#) is coherent with the ratio of precipitation and discharge observed in this catchment as described in [the work of Huggenberger and Epting \(2011\)](#). A sizeable soil water loss is also modelled for the Birs. Again, this is not surprising since both the Birs and Eulach catchments have been selected [specifically deliberately](#) because of their river-fed ground-watershed in order to be used in the study of Epting et al. (2021). Finally, the longer run performed for the Broye catchment (2002-2018, Figure S3) shows that [river temperature in](#) the extremely warm years 2003, 2015, and 2017 and the relatively cooler years 2007 and 2014 [are well captured in the modelled water temperatures. is well captured by the model.](#)

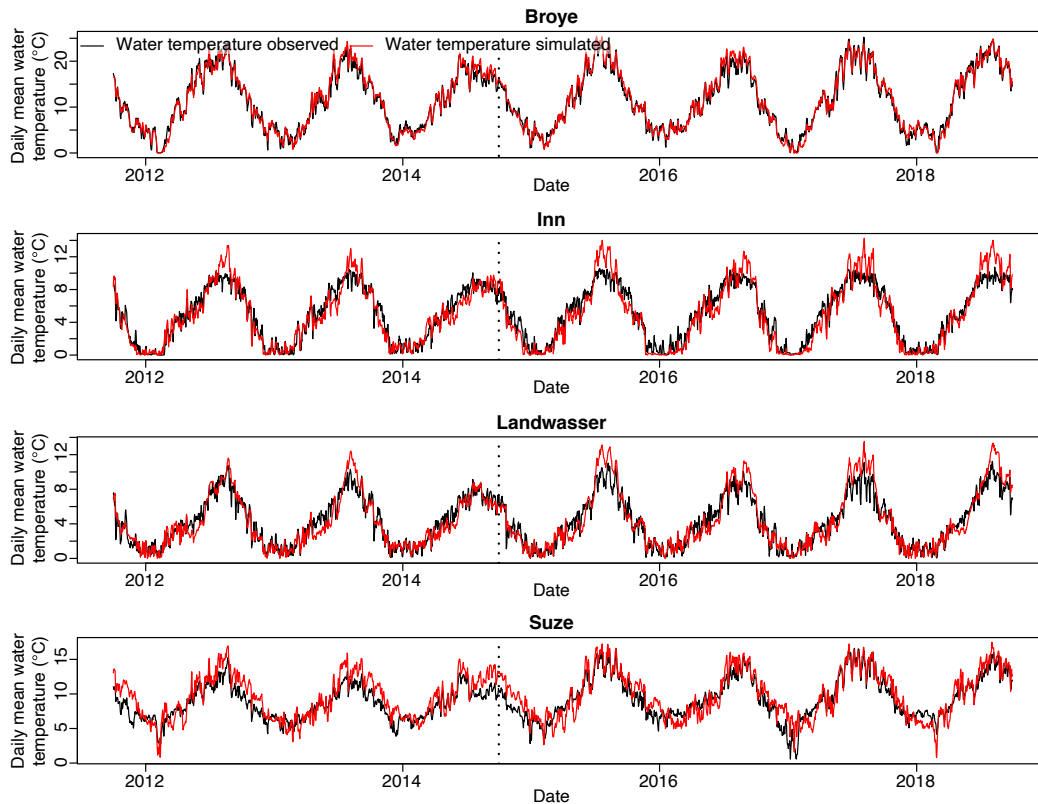


Figure 3. Daily mean water temperature observed (black) and simulated (red) over the calibration periods (left of the dashed-dotted line) and over the validation period (right of the dashed-dotted line) for four catchments: the Broye (Swiss Plateau), the Inn (Alpine), the Landwasser (Alpine), and the Suze (Swiss Plateau). These four catchments were chosen to represent the variation in the catchment type. Note that the extent of the y-axes (daily mean water temperature range) is different for every panel. Other catchments are shown in Section S6.

4.1.2 Alpine catchments

Alpine3D and StreamFlow perform very well in terms of snow cover and discharge for two of the simulation in 2 of the 5 Alpine catchments. The annual discharge cycle is well reproduced for the Kander (Figures S14, S15, and S29 S22, S23, and S31) and the Lütschine (Figures S22, S23, and S31 S28, S29, and S33). The results are less good for the Inn (Figures S12, S13, and S28 S26, S27, and S30) and the Lonza (Figures S20 and S21 S26 and S27); this is clearly visible from the discharge plots, but even though it is not necessarily reflected in the KGE values. For the Landwasser (Figures S18, S19, and S30 S24, S25, and S32), the melt season is clearly anticipated by Alpine3D, with a clear impact on water temperature, starts too early, as shown by the negative correlation between discharge and water-river temperature errors in spring and summer. These points-issues highlight the difficulty of accurately reproducing snow and glacier melt-induced runoff dynamics in Alpine environments, even when using a very sophisticated snow model. A possible explanation is the scarcity of meteorological measurements

in Alpine regions, which ~~is expected to decrease according to Magnusson et al. (2011) and Schlögl et al. (2016)~~ decreases the performance of ~~the models (Magnusson et al., 2011)~~ models.

For ~~Regarding~~ water temperature, lower model ~~performances are obtained in summer~~ performance is obtained for Alpine catchments ~~compared to in summer compared to Swiss~~ Plateau catchments. Sudden ~~high~~ water temperature peaks of up to +4°C above the ~~corresponding~~ measurements are occasionally simulated in summer, leading to an error of up to +2°C in the summer seasonal mean (Figure 3). ~~This does not depend on the calibration period used. Since in Alpine catchments a larger water temperature increase is expected during future summers compared to the Swiss Plateau catchments (see discussion below and in the work of this error needs to be understood.~~

Another illustration of overestimated summer water temperatures is the summer ~~of~~ 2003. Michel et al. (2020) used historical measurements to show that large amounts of snow and glacier melt contribute to mitigate increased ~~water river~~ temperature during hot summers; ~~in~~. ~~In~~ their analysis, Alpine catchments in Switzerland were not affected by the extremely warm summer of 2003. In the ~~current present~~ study, the model overestimates the temperature ~~increase anomaly~~ for the year 2003 in the ~~high Alpine Lonza catchment where the model has been run for a longer time period~~ high-alpine Lonza catchment, while it produces correct results for the lowland Broye catchment (Figure S3).

~~The summer overestimation appears in all Alpine catchments simulated here (but not during all summers), regardless of a potential summer discharge underestimation. Indeed, the negative correlation between water temperature and discharge errors found for the Inn and the Landwasser are not obtained neither in the Lonza and nor for the Lütshine, meaning that the underestimation of summer discharge cannot explain the overestimated simulated water temperature (Figures S15, S21, S23, S25).~~

~~Ample discussion on this issue and its consequences is presented in~~ Section ~~S9~~ extensively ~~discusses the influence of solar radiation and other energy fluxes in the Alpine catchments. This discussion shows that approximation of topographic shading due to the spatial resolution of Alpine3D and the underestimation of riparian vegetation shading can slightly contribute to the overestimation of summer water temperature, but not explain the magnitude of the error observed. The analysis suggests that the small upstream reaches are overly sensitive to variations in the forcing, causing too high temperature in the upper part of the catchment, which then gets advected downstream.~~ 5.1.

~~This result is most likely due to shortcomings in the current Alpine3D-StreamFlow model chain. All water leaving the snowpack is assumed to infiltrate the soil at the pixel scale in Alpine3D, and the runoff at the bottom of the soil column is collected in StreamFlow at the sub-catchment scale, after a transfer through the two linear reservoirs emulating fast and delayed lateral subsurface runoff. The water leaving these two reservoirs is assigned the temperature determined by the used sub-catchment temperature scheme. It still remains unclear, what exactly causes the sensitivity of small upstream tributaries, showing too strong warming in summer. The following components are not explicitly simulated in StreamFlow and all can contribute to the mentioned summer overestimation: i) cold advection from remaining, hydrologically well-connected snow patches (connected via surface and subsurface flow), ii) cold advection from local groundwater systems, iii) cold advection from melting ice (if present), see Thornton et al. (2021); Yan et al. (2021).~~

4.2 Climate change simulations

In any of the three parametrizations for the infiltrating water temperature available in StreamFlow, there is no direct accounting of snowmelt. In the approaches of Gallice et al. (2016) and Comola et al. (2015) this can be partially corrected by explicitly using the soil temperature, which is influenced by the soil runoff water temperature in Alpine3D, but we show in Section 5 S5 that these approaches lead to poorer results compared to the HSPF approach. This latter approach is shown to be in general well performing in comparison to other approaches, but suffers from not directly accounting for snow and glacier melt (Leach and Moore, 2015). In spring, the air being still relatively cold, this has not too much impact on the simulated water temperatures. In summer, however, this cold water not being accounted for can explain the exaggerated sensitivity of small upstream reaches. Figure S59 shows the infiltrating water temperature simulated by the HSPF scheme over the Landwasser 10 catchment and its correlation with the summer overestimation observed, confirming that the HSPF scheme, and in particular the absence of a cooling mechanism, is the cause of the overestimation.

However, the cooling effect from snow and glacier melt is expected to decrease in the future since in the European Alps the glacier melt peak water is occurring at present (Huss and Hoek, 2018; Compagno et al., 2021) and the snow cover is expected to decrease (CH2018, 2018). Accordingly, the lack of parametrization of cold water input will be of lesser importance in future 15 periods. It can even be expected to actually result in an underestimation of the simulated future water temperature warming in Alpine catchments if the warming is obtained from a comparison with a past period. While the absence of cold advection of snow and glacier melt is considered as the most likely missing cooling mechanism, hydrology in mountain regions is complex (Thornton et al., 2021), in particular the groundwater storage and release, and it can not be excluded that the HSPF scheme also fails to capture this complexity.

20 To complete this analysis, it is important to assess how the overestimated water temperature in summer in the past in Alpine catchments translate in the future simulated under CC. This is particularly relevant because the water temperature is determined by many non-linear effects. We thus assess here how the summer mean water temperature is evolving in the future to see if this error may be increasing over time.

For the Inn catchment, the difference between simulated mean summer water temperature in the cool summer 2014 and in 25 the warm summer 2015 is 4.8°C . Since the downscaled time series use the historical inter-annual variability over the period 2005-2015 as baseline data, which are reshaped to match with the decadal seasonal signal of climate change (see Michel et al., 2021b), the difference between the years 2014 and 2015 is also present in the CC time series (in the last two years of the 10-year period). The model can thus be run with CC time series and the difference between the last two years can be compared to the historical difference between 2014 and 2015 (in terms of summer average). Using the RCP8.5 scenarios for the decade 2080-2090, the 30 mean difference of the 7 scenarios is of 6.7°C between these two years. A value of 5.8°C is obtained for the RCP2.6 scenarios.

The difference between warmer and cooler years will thus increase in the future, however in reasonable limits: as shown in Section 4.2.1, this will be accompanied by a marked decrease in discharge, especially with the RCP8.5 emission scenario, further increasing the sensitivity to warm air temperature and contributing to the increase in the difference between warm and

cold summers. Accordingly, the fact that the difference between cold and warm years remains reasonably low under RCP8.5 scenarios (despite of a mean air temperature increase of up to +8°C in summer for some scenarios compared to the reference period), supports our hypothesis that the model chain yields reasonable estimates of future summer water temperature changes even for high Alpine catchments.

5 In general, we show the high skill of the physics-based model chain used to reproduce discharge and water temperature in the Swiss Plateau catchments. For the Alpine catchments, good results are obtained in all seasons except summer. The summer error is explained by the lack of cooling mechanism (snow and glacier melt and/or cold advection from local groundwater systems). We provide evidence that this error will not have too much impact on the water temperature simulated for future periods. However, results obtained in summer in Alpine catchments need to be confirmed by further studies (see Section 5.3).

10

5 Climate change simulations – Results and discussion

This section presents the results of the CC simulations over the periods 2030-2040, 2055-2065, and 2080-2090. The results Simulation results are shown in terms of changes (delta) compared to the reference period 1990-2000. Absolute change is used for water, soil, and air temperature, and relative change for other variables. Detailed plots for each catchments catchment are included in Supplementary Materials Section Section S10, Figures S60 to S74S97. The results for annual mean river temperature for all catchments are summarized in Table 5. Detailed annual 5. Annual and seasonal values for all catchments are presented in Tables S9 to S12. Boxplots presented in this section are constructed from all CC scenarios and all individual years, so the range shows both the model uncertainty, the natural inter-annual variability, and the catchment's variability when multiple catchments are combined.

20 First, Before simulating the future discharge and river temperature, the results for the Swiss Plateau catchments are presented and discussed, followed by the results for the performance of the models when forced with CC scenarios over the historical period was assessed. Section S8 shows that forcing the models with CC scenarios leads to small over- or underestimation of the total discharge in Alpine catchments. While water temperature is the main focus, relevant findings regarding simulated discharge changes in the future are also presented. In the discussion, results are compared to trends and behaviours observed in past periods and related previous publications. When comparing to data of past periods, we refer to the observations described in the work of Michel et al. (2020) unless stated otherwise. This is expected since the used CC scenarios show lower performance for precipitation in Alpine areas compared to Swiss Plateau areas (Warscher et al., 2019). Overall, it is confirmed that the output of Alpine3D and StreamFlow, when forced with CC scenarios over an historical time period, is consistent with the output obtained when forcing the models with measured meteorological inputs.

30

4.1 Swiss Plateau Catchments

4.2.1 Swiss Plateau catchments

The model results ~~for from~~ CC simulations over the Swiss Plateau catchments are similar among all considered catchments. ~~Figure 4 shows the combined results for all considered Plateau catchments. Boxplots in the figures in this section are constructed from all climate change scenarios and all individual years, so the range shows both the model uncertainty, the~~
5 ~~natural inter-annual variability, and catchments variability when multiple catchments are combined.~~ The similarities in water river warming between catchments show that catchment size does not play a noticeable role for the warming rate, as already observed for past periods (Michel et al., 2020).

Figure 4 shows the combined results for all considered Swiss Plateau catchments. For short-term projections, i.e. the period 2030-2040, the mean trend of averaged annual water river temperature for the Swiss Plateau catchments is ~~+0.26~~ 0.27 \pm ~~0.07~~
10 0.03 °C per decade (combining all 3 RCPs, the uncertainty indicated is the standard deviation), which is in line with the $+0.33 \pm 0.03$ °C per decade observed over entire Switzerland for the period 1979-2018 (Michel et al., 2020). No significant annual discharge trends are modelled for this period.

Over the same period, the mean air temperature trend over Swiss Plateau catchments is ~~0.32~~ 0.33 \pm ~~0.09~~ 0.02 °C per decade, corresponding to a ratio between water river and air temperature trends of 0.8 for this period, which compares very well to the
15 ratio obtained from historical observations (Michel et al., 2021b) and in the studies of Null et al. (2013) and Leach and Moore (2019). This result underlines the ability of the model chain to correctly capture the observed changes in the contemporary period. The expected warming water temperature increase is consistently more pronounced in summer (~~+0.32~~ \pm ~~0.11~~ °C per decade) than in winter (~~+0.21~~ \pm ~~0.9~~ °C per decade) for all studied catchments, time periods, and CC change scenarios.

For the periods 2055-2065 and 2080-2090, some differences between the RCP emission scenarios appear, ~~due to the growing~~
20 ~~difference between the forcing climate scenarios.~~ For RCP2.6, no relevant additional changes are expected beyond 2030-2040. For RCP4.5, the situation between 2055-2065 and 2080-2090 remains similar, while for RCP8.5 there is an acceleration of the changes in discharge and temperature. ~~For the period 2055-2065, the median annual increase ranges from +1.0°C for RCP2.6 to +2.1°C for RCP8.5 in absolute values compared to the reference period, and some specific summers in RCP8.5 are close to +4°C.~~ By the end of the century, the median annual water river temperature increase reaches +3.5°C for RCP8.5. ~~The increase in river temperature at the end of the century with RCP8.5 ranges between +3.2 and +3.3°C in all seasons, except in summer when an increase of +4.1°C is predicted. For some~~ For some specific summers and CC scenarios, the warming can reach up to ~~+7.5~~ 7.5 °C (Table S9). These results are in line with recent predictions of Swiss lake surface water temperature over the 21st century ~~obtained by Råman Vinnå et al. (2021). These results (Råman Vinnå et al., 2021). They~~ are also comparable to results
25 in the literature for other regions of the world with a comparable climate regime and using similar climate change scenarios and time periods. For example, Piotrowski et al. (2021) obtain an annual warming of +2 to +3°C for the period 2070-2100 for RCP8.5 in lowland catchments situated in the USA-United States and in Poland using statistical and machine learning models, ~~and in a large scale study van Vliet et al. (2013) obtain.~~ Similarly, a large-scale study by van Vliet et al. (2013) predicted a warming of ~~about~~ +3 °C by the end of the century for rivers in central Europe using the former SRES A2 scenarios (which predict a warming slightly ~~less pronounced~~ lower than RCP8.5).

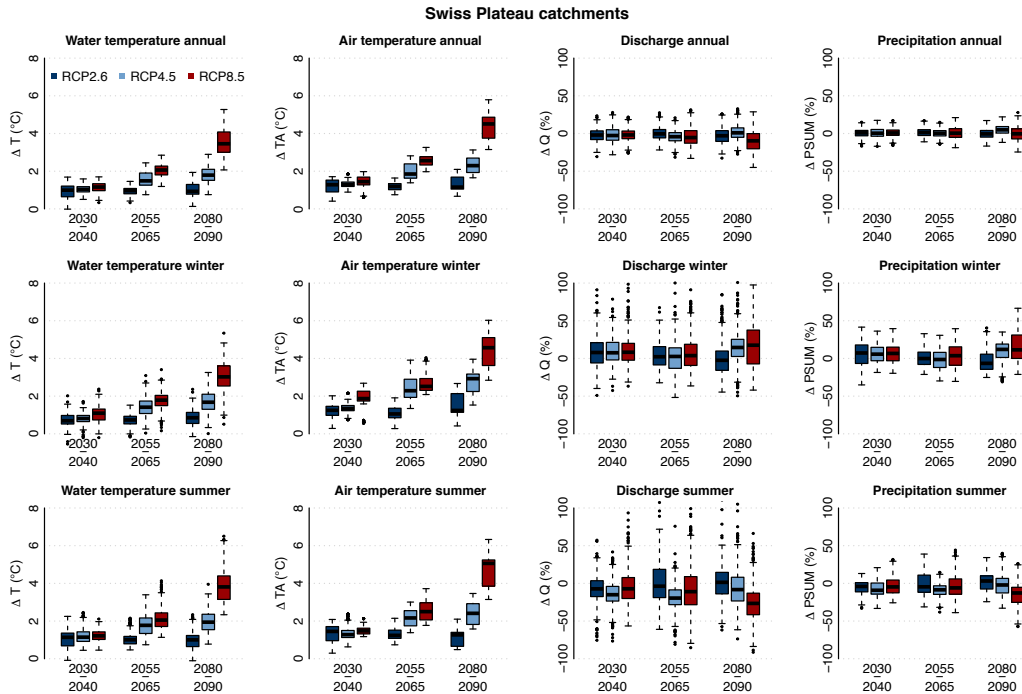


Figure 4. Changes in water-river temperature (ΔT), air temperature (ΔTA), discharge (ΔQ), and precipitation ($\Delta PSUM$), from left to right column), over the periods 2030-2040, 2055-2065, and 2080-2090, compared to the reference period 1990-2000 for the Swiss Plateau catchments and for the 3 RCPs. The first row shows the annual changes, the second row the winter seasonal changes, and the last row the summer seasonal changes.

Changes in annual discharge patterns, linked to precipitation changes, appear with RCP4.5 and RCP8.5 in the periods 2055-2065 and 2080-2090 (more marked for RCP8.5 and for the latter period). An increase in winter discharge and a decrease in summer discharge are expected, simulated with no significant change at the annual scale. ~~The significant decrease in summer discharge predicted by the end of the century (median -5% for RCP2.6, -18% for RCP4.5 and -42% for, except for RCP8.5, all three with considerable variability) will have some serious consequences in terms of water availability and will impact future management of water resources. For the Broye catchment, the decrease in discharge reaches a median value of -75% in summer for RCP8.5 at the by the end of the century. The observed decrease in summer discharge is always larger than the decrease in precipitation from CC models due to the increase of the evapotranspiration due to enhanced evapotranspiration (ET) fraction.~~ Simulated changes in ET for four catchments are shown in Figure S72. Results show an S96, indicating an median increase in ET of about +15% by the end of the century in the summer season, combined with a deficit of precipitation of about -25-13% for the emission scenario RCP8.5. A special case is the Eulach catchment, which is much more urbanised compared to the other studied catchments, explaining the lower change in ET observed there. The changes in ET are similar for the RCP4.5 and RCP8.5 scenarios and only about 1.5 times larger than the one expected with the RCP2.6 scenarios, showing that ET will be

Table 5. Change of annual mean water-river temperature for all 3 periods and 3 RCPs compared to the reference period 1990-2000. The median value of all years and scenarios is indicated along-together with the range of the values.

Catchment	Δ River temperature ($^{\circ}$ C)								
	2030-2040			2055-2065			2080-2090		
	RCP2.6	RCP4.5	RCP 8.5	RCP2.6	RCP4.5	RCP 8.5	RCP2.6	RCP4.5	RCP 8.5
Plateau	+0.9 [+0.1,+1.4]	+1.1 [+0.5,+1.4]	+1.1 [+0.5,+1.5]	+0.9 [+0.3,+1.2]	+1.5 [+0.8,+2.1]	+2.1 [+1.2,+2.5]	+0.9 [+0.1,+1.6]	+1.7 [+0.8,+2.5]	+3.3 [+2.1,+4.4]
Birs	+1.0 [+0.2,+1.3]	+1.0 [+0.8,+1.3]	+1.2 [+0.5,+1.5]	+1.0 [+0.5,+1.2]	+1.4 [+1.0,+2.1]	+2.0 [+1.4,+2.4]	+0.9 [+0.4,+1.5]	+1.8 [+1.2,+2.4]	+3.3 [+2.5,+4.4]
Broye	+1.1 [+0.0,+1.6]	+1.1 [+0.7,+1.4]	+1.2 [+0.5,+1.7]	+1.0 [+0.5,+1.3]	+1.5 [+0.9,+2.3]	+2.2 [+1.4,+2.6]	+1.0 [+0.3,+1.7]	+1.8 [+1.1,+2.5]	+3.6 [+2.6,+4.7]
Ergolz	+1.0 [+0.2,+1.3]	+1.0 [+0.7,+1.2]	+1.1 [+0.5,+1.4]	+0.9 [+0.5,+1.2]	+1.3 [+0.9,+2.1]	+1.9 [+1.4,+2.4]	+0.9 [+0.4,+1.5]	+1.7 [+1.1,+2.3]	+3.2 [+2.3,+4.4]
Eulach	+1.0 [-0.0,+1.4]	+1.0 [+0.6,+1.2]	+1.0 [+0.3,+1.6]	+1.0 [+0.4,+1.3]	+1.4 [+0.8,+2.3]	+1.9 [+1.2,+2.6]	+0.9 [+0.3,+1.6]	+1.6 [+1.0,+2.4]	+3.2 [+2.4,+4.6]
Kleine Emme	+1.1 [+0.3,+1.7]	+1.2 [+0.7,+1.5]	+1.3 [+0.7,+1.7]	+1.0 [+0.7,+1.5]	+1.7 [+1.0,+2.4]	+2.4 [+1.6,+2.8]	+1.1 [+0.4,+1.9]	+2.0 [+1.3,+2.9]	+4.2 [+2.8,+5.3]
RHB	+1.0 [+0.3,+1.5]	+1.1 [+0.5,+1.6]	+1.1 [+0.5,+1.6]	+1.0 [+0.5,+1.4]	+1.4 [+0.8,+2.4]	+2.1 [+1.4,+2.7]	+0.9 [+0.3,+1.8]	+1.7 [+1.0,+2.6]	+3.6 [+2.2,+5.0]
Suze	+0.9 [+0.1,+1.4]	+1.1 [+0.5,+1.4]	+1.1 [+0.5,+1.5]	+0.9 [+0.3,+1.2]	+1.5 [+0.8,+2.1]	+2.1 [+1.2,+2.5]	+0.9 [+0.1,+1.6]	+1.7 [+0.8,+2.5]	+3.3 [+2.1,+4.4]
Alpine	+0.7 [+0.3,+1.2]	+0.8 [+0.6,+1.1]	+0.9 [+0.4,+1.4]	+0.8 [+0.5,+1.2]	+1.3 [+0.7,+2.0]	+1.7 [+1.1,+2.3]	+0.8 [+0.4,+1.6]	+1.6 [+0.9,+2.4]	+3.3 [+1.9,+4.7]
Inn	+0.8 [+0.3,+1.3]	+0.9 [+0.5,+1.3]	+0.8 [+0.6,+1.4]	+0.8 [+0.5,+1.2]	+1.3 [+0.7,+2.1]	+1.8 [+0.9,+2.6]	+0.8 [+0.2,+1.3]	+1.5 [+0.5,+2.3]	+3.1 [+2.1,+4.6]
Kander	+0.6 [+0.3,+0.9]	+0.7 [+0.3,+0.9]	+0.7 [+0.4,+1.1]	+0.7 [+0.3,+1.2]	+1.2 [+0.5,+1.8]	+1.6 [+0.8,+2.5]	+0.7 [+0.3,+1.4]	+1.4 [+0.7,+2.4]	+2.9 [+1.4,+4.3]
Landwasser	+1.0 [+0.3,+1.6]	+1.1 [+0.6,+1.4]	+1.2 [+0.6,+1.7]	+1.0 [+0.6,+1.5]	+1.7 [+0.5,+2.4]	+2.2 [+1.1,+3.1]	+1.1 [+0.2,+1.8]	+1.9 [+0.9,+2.8]	+3.9 [+2.3,+5.3]
Lonza	+0.8 [+0.1,+1.2]	+0.8 [+0.5,+1.1]	+0.9 [+0.6,+1.3]	+0.8 [+0.4,+1.3]	+1.3 [+0.4,+1.9]	+1.8 [+0.8,+2.6]	+0.9 [-0.0,+1.4]	+1.5 [+0.8,+2.5]	+3.1 [+1.6,+4.8]
Lutschine	+0.7 [+0.3,+1.2]	+0.8 [+0.6,+1.1]	+0.9 [+0.4,+1.4]	+0.8 [+0.5,+1.2]	+1.3 [+0.7,+2.0]	+1.7 [+1.1,+2.3]	+0.8 [+0.4,+1.6]	+1.6 [+0.9,+2.4]	+3.3 [+1.9,+4.7]

limited mainly by water availability and that potential additional water during wetter summers will have a very high potential to evaporate. This is also clear-seen from the large variability in ET for the RCP8.5 scenarios.

~~The expected increase in water temperature will have a large impact on both natural and human systems. To evaluate this impact in the future, we use two indicators introduced by Michel et al. (2020): A) The number of days per year when the daily maximum temperature is above 25° C, which is a legal threshold in Switzerland for unrestricted water usage, e.g. for industrial cooling, and B) a metric indicating the number of days per year when salmonid fish are exposed to Proliferative Kidney Disease (PKD). The latter metric is based on the model developed by Carraro et al. (2016) counting the number of days per year for which the minimal daily temperature exceeds 15° C for at least 28 consecutive days. Values for these two indicators are shown for 4 catchments in Figure 8.-~~

The values obtained over the historical period here match very well the values obtained from measurements in the work of Michel et al. (2020), showing again the robustness of the results obtained when the models are forced with CC scenarios. For each of the 4 catchments in Figure 8, both indicators grow over time and with increased greenhouse gas emissions. Catchments such as the Birs and the Eulach, which are currently less subject to high water temperature, will reach both the legal threshold of 25°C and the PKD exposure limit rather often in the future. By the middle of the century PKD will find favourable conditions to spread in summer in all 7 investigated catchments (for all RCPs), with possibly devastating impact on salmonid fish population. For catchments with relatively warm water temperatures in current conditions, such as the Broye and the Kleine Emme, the legal limit of 25°C will be reached almost every year already by 2030-2040 regardless of the emission scenarios. This will persist for future time periods, even under RCP2.6, which already can be considered a target with low probability (Stocker, 2013). By the end of the century and with high emission scenarios, the water temperature will be above this threshold for around 2 months per year in these two catchments. This will entail either stopping regular water usage for industry and cooling in such catchments, or a necessary adaptation of current regulation, at the risk of further enhancing the impacts and increasing the stress and pressure on these ecological systems.

Left: Number of days per year when the temperature is above the threshold of 25°C, for each year in each time period and for each scenario, for 4 Swiss Plateau catchments. These four catchments were chosen to represent the variation in the Swiss Plateau catchment type. Right: Number of days per year when salmonid populations are exposed to PKD, based on the metric presented in the work of Michel et al. (2020), for each year in each time period and for each scenario, for 4 Swiss Plateau catchments. These four catchments were chosen to represent the variation in the Swiss Plateau catchment type.

4.3 Alpine catchments

4.2.1 Alpine catchments

At annual scale, the ~~water temperature rise observed~~ simulated water temperature increase in Alpine catchments is close to that observed ~~over~~ across the Swiss Plateau (see Table 5), despite a slightly higher air temperature increase (see Figures 4 and 5). ~~Warming~~ The warming is more limited for the early periods in Alpine environments, but ~~it~~ reaches the same level as in the Swiss Plateau catchments towards the ~~Plateau catchments toward the~~ end of the century. This slower warming in Alpine catchments compared to Swiss the Plateau catchments in early periods of the 21st century is coherent with current trends observed in Switzerland ~~–~~

(Michel et al., 2020). At seasonal time scale, ~~in turn, water temperature change is very~~ the change in river temperature is different between Swiss Plateau and Alpine catchments. ~~While in the Plateau catchments~~ In the Swiss Plateau catchments (Figure 4), the warming is ~~similar in all seasons except for summer, the seasonal pattern is completely different in Alpine catchments, as demonstrated in Figure 5, cf. Figure 4 for comparison. Furthermore, to~~ slightly higher in summer than in winter, with the spring and fall seasons in between. In Alpine catchments (Figure 5), the warming is rather limited in winter and spring, but 2 to 3 times higher during summer and fall.

To expand the analysis, ~~Figure to other quantities simulated by Alpine3D, Figure~~ 6 shows the simulated evolution of snow and ice water equivalent, of solid precipitation, and of soil surface temperature on a yearly and seasonal basis, for all considered Alpine catchments combined (for individual catchments, see Figures ~~S674 to S78~~S672 to S76). The ~~evolution of the~~ annual discharge and temperature cycles for the ~~3-4~~ time periods and ~~the~~ 3 RCPs ~~is are~~ shown for the Inn catchment in Figure 7 (see also ~~S80 to S83~~ Figures S77 to S80 for the other Alpine catchments). Finally, maps of snow and glacier covers for the five Alpine catchments, the periods 1990-2000 and 2080-2090, RCP2.6 and 8.5, and for the months of February, May, and December are shown in figures S81 to S95.

During the winter season (~~figure~~ Figure 5), despite an air temperature increase similar to that projected for the Swiss Plateau, the ~~water-river~~ temperature increase is very limited, ~~reaching only~~ only reaching a median value of +1.31.4°C at the end of the century with RCP8.5 scenarios. This reduced winter warming in Alpine catchments is consistent with observations from the past decades (Michel et al., 2020). At the same time, an increase in discharge between +109% in 2030-2040 (for the 3 RCP scenarios) and up to +4035% for RCP8.5 at the end of the century is expected. ~~Except for RCP8.5 at the end of the century~~ On the long term, no significant difference in ~~overall precipitation is expected. However, a decrease is expected in solid precipitation in winter, along with a significant decrease in mean SWE of up to -50% for RCP8.5 at the end of the century~~ (Figure 6). ~~The fact that the decrease in mean SWE is more marked than the decrease in solid precipitation shows that more melt is expected during the winter season in the future~~ winter precipitation is expected. The combination of the lower fraction of solid precipitation (i.e. more rain) and the enhanced snowmelt explains the increase in winter discharge.

The most important limiting factor for the Alpine river temperature rise in winter (even with a mean air temperature rise of up to +4.34.2°C for RCP8.5 at the end of the century compared to the reference period), is simply that the air temperature mostly remains below freezing at higher elevations, especially during the night. In these periods, the ~~water-river~~ temperature stays above the air temperature and does not experience any warming. In addition, for near-future periods or low emission scenarios, the snow cover often prevents an increase in soil temperature in winter (Figure 6).

During the spring season, ~~a shift toward earlier snowmelt is illustrated by a substantial decrease in SWE (Figure~~ earlier snowmelt occurs (Figure 6), which ~~under RCP8.5 is already marked in the period 2055-2065 and~~ gets even more pronounced ~~toward towards~~ the end of the century. ~~Note that for computing correct snowmelt delta in spring, the winter change in SWE has to be subtracted from the change observed in spring. Indeed, future reduced SWE in spring is not only due to enhanced melt, but is also resulting from a lower initial SWE at the beginning of the season. For and for RCP8.5 at the end of the century, the increase of (the melt contribution to runoff in the spring season is about will increase up to 20% %).~~ In addition, a significant reduction of solid precipitation is expected in future spring seasons. These effects combined lead to a considerable increase in discharge and a shift of the peak runoff ~~toward towards~~ earlier times in the year. Even for the low and moderate emission scenarios RCP2.6 and RCP4.5, this shift is clearly visible at the end of the century, ~~and for~~. For RCP8.5, we also observe a flatter peak anticipated by occurring almost 2 months earlier than during the reference period (see Figure 7 and S77 to S80). These results are consistent with ~~the study on discharge by Muelchi et al. (2020).~~

findings of Muelchi et al. (2020) concerning the evolution of discharge. Despite this increase in spring discharge, the river warming is slightly more marked in spring than in winter for the periods 2055-2065 and 2080-2090, ~~owing to a significant~~

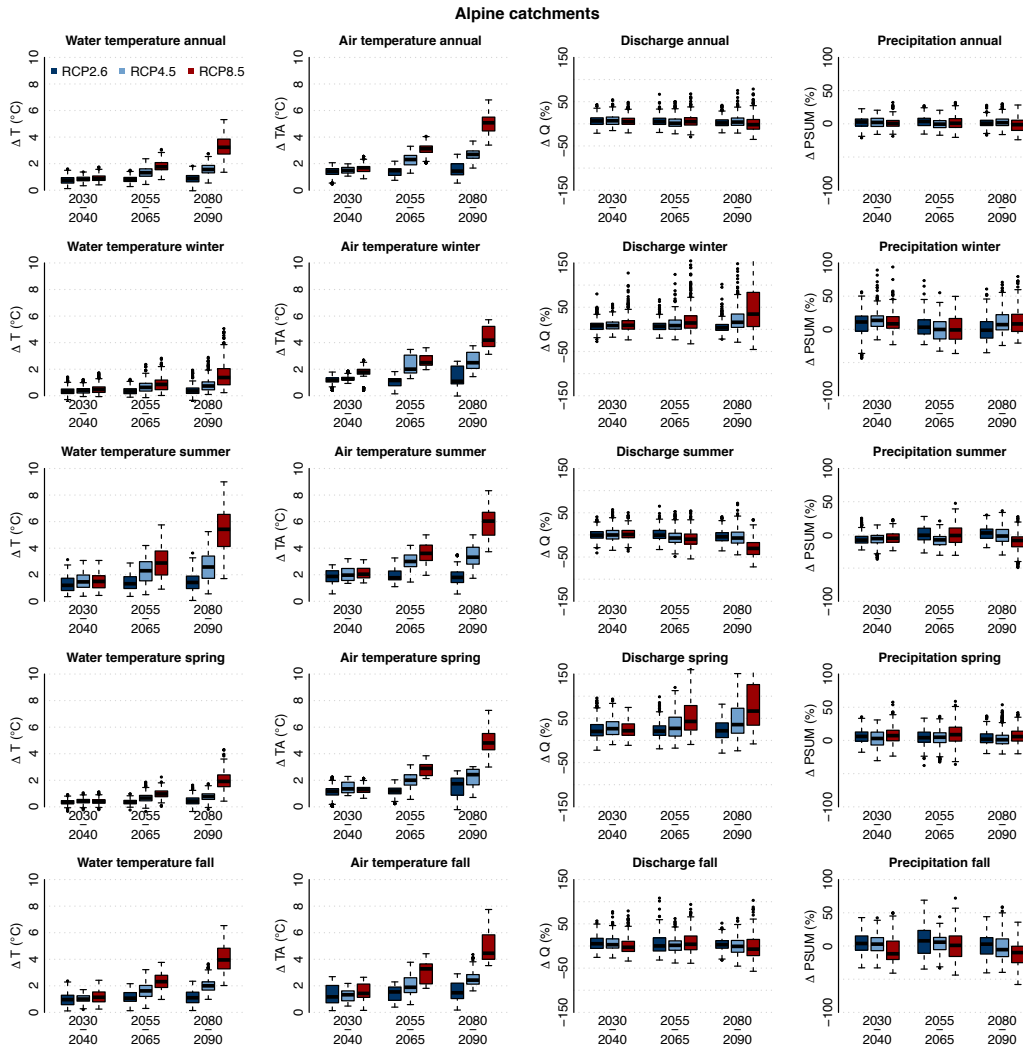


Figure 5. Changes in water-river temperature (ΔT), air temperature (ΔTA), discharge (ΔQ), and precipitation ($\Delta PSUM$), from left to right column, over the periods 2030-2040, 2055-2065, and 2080-2090 and for the 3 RCPs, compared to the reference period 1990-2000, averaged over all considered Alpine catchments. Row 1 shows the annual change, row 2 the winter seasonal change, row 3 the summer seasonal change, row 4 the spring seasonal change, and row 5 the fall seasonal change.

increase in spring air and soil temperature. While in winter the snow cover is still present and the negative air temperatures do not lead to any significant soil surface warming, in spring, the soil surface warms almost at the same rate as the air, due to a smaller snow-covered area. As amply discussed in Sections 3 and ??, As discussed in Section 5.1, the advection of snowmelt cold-water cold water from snowmelt is not captured in the model-chain-used model chain. Accordingly, the water-river

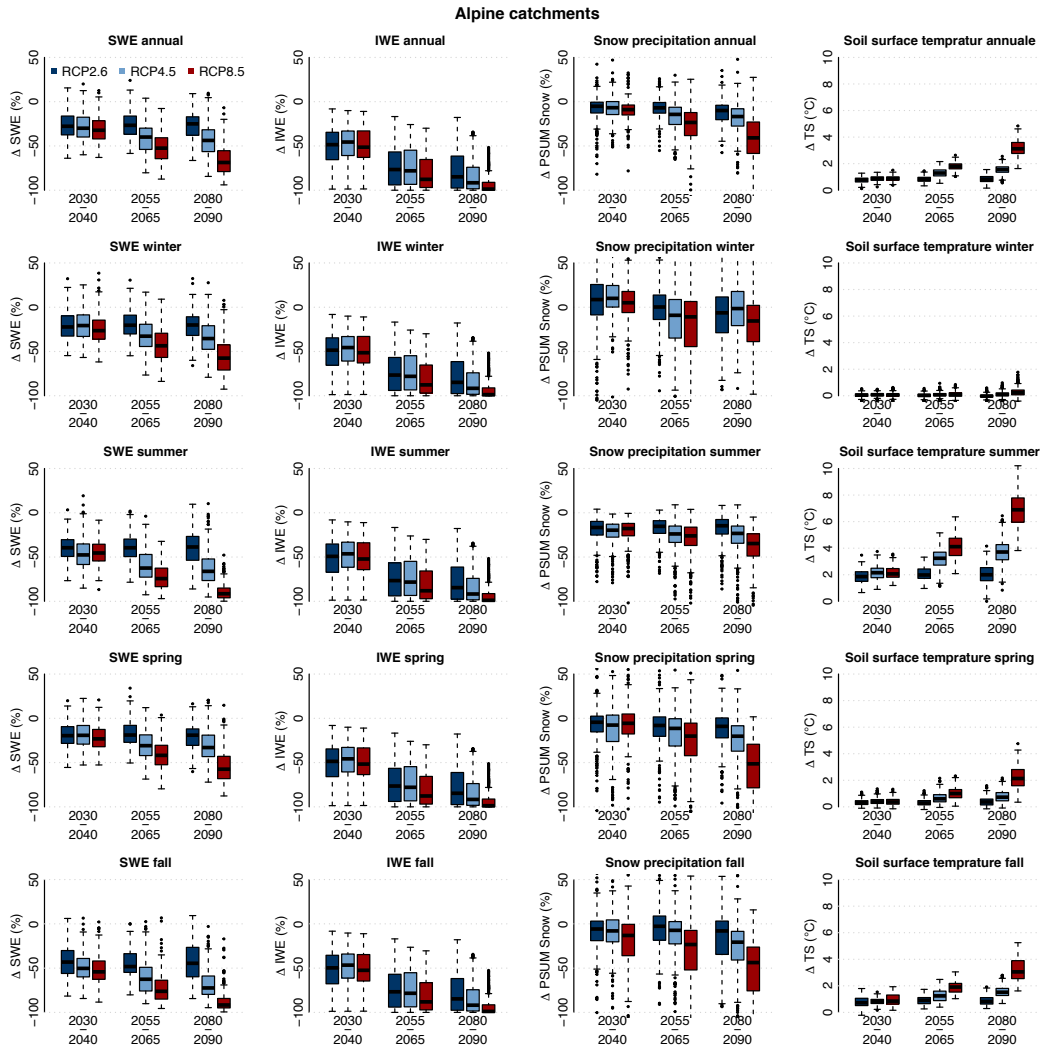


Figure 6. Change-Changes in snow water equivalent in the catchments (ΔSWE), in ice water equivalent (mass stored-in-glaciers-of-glacier ice and in-snow in glacier pixels) in the catchments (ΔIWE), in solid precipitation ($\Delta PSUM$ snow), and in soil surface temperature (ΔTS), from left to right column over the periods 2030-2040, 2055-2065, and 2080-2090 and for the 3 RCP scenarios, compared to the reference period 1990-2000, averaged over all considered Alpine catchments. Row 1 shows the annual change, row 2 the winter seasonal change, row 3 the summer seasonal change, row 4 the spring seasonal change, and row 5 the fall seasonal change.

temperature warming might be overestimated in spring since the predicted enhanced melting might inject considerable amounts of cold water to the stream network.

The summer season shows distinctively different water-temperature-change-changes in river temperature patterns and intensity between RCPs and time periods. For the near future (2030-2040), the expected water-river temperature increase remains

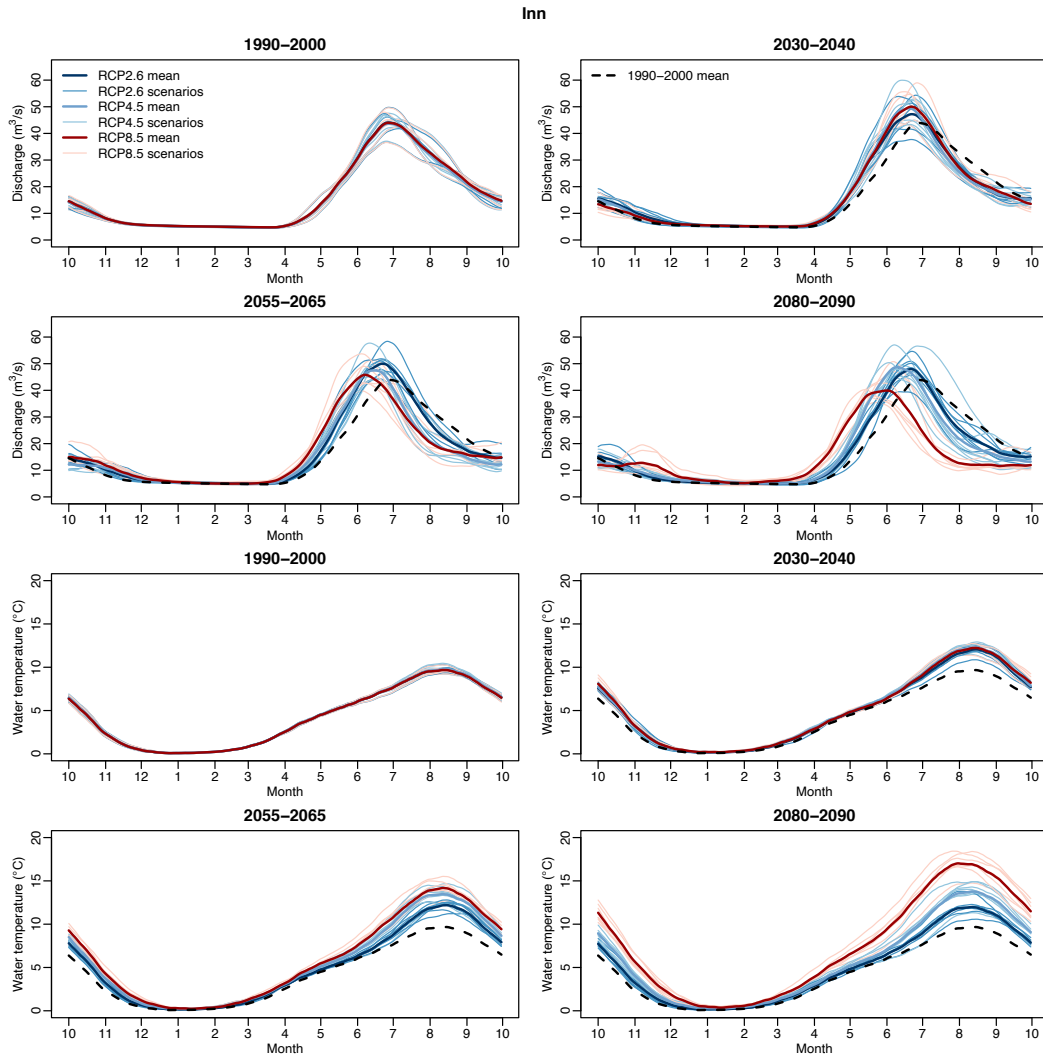


Figure 7. Annual cycle of discharge (top) and river temperature (bottom) for of the Inn catchment. The cycles are obtained by computing the average for each day of the year and by applying a circular moving average of 30 days. Dark lines show the mean for each RCP over each period, light lines show individual scenarios. Black dashed lines indicate the mean over the reference period 1990-2000 (only shown in subsequent periods to ease comparison).

below the air temperature increase, similar as alike for the Swiss Plateau catchments. Advancing in time and looking especially at RCP8.5 scenarios, the water temperature river warming catches up with the air temperature warming and even slightly exceeds it during the warmest summers, rise leading to a median water temperature warming of about river warming of $+6.054^{\circ}\text{C}$ ($+5.9^{\circ}\text{C}$ for the air temperature). Some summers in some CC scenarios can exhibit a water temperature warming of $+9^{\circ}\text{C}$. Again, the discussion in Sections 3 and ?? on the errors observed during model calibration for summer over the Alpine

~~catchments requires a critical analysis of these values (see Section 5.3)–, Table S9 and S10). However, since overestimation was observed during the model validation for summer over the Alpine catchments, these results need to be carefully interpreted and discussed (see Section 5.1).~~

5 ~~In summer, the median of the SWE decrease for~~ During fall, a discharge reduction occurs at the beginning of the season, caused by the shift of annual peak discharge to earlier in spring and summer, followed by a discharge increase later in the season due to an increased fraction of liquid precipitation and rapid melting of occasional snowfall. Such fall melt events contribute to cool the soil; accordingly, the water temperature increase is similar to the one predicted over the Swiss Plateau.

5 Discussion

5.1 Model chain performance

10 For the Swiss Plateau catchments, the errors in river temperature (RMSE) obtained during the calibration and validation periods are far below the CC signal for RCP4.5 and RCP8.5~~by the end of the century is –100%, meaning that all remaining snow is melting–~~, which underlines the robustness of the simulated trends. The results obtained are coherent with past and current observations in Switzerland and in central Europe (Moatar and Gailhard, 2006; Webb and Nobilis, 2007; Arora et al., 2016; Michel et al., 2017) and are in agreement with other results in the literature, both in terms of predicted changes in discharge and water temperature, and in terms of processes and CC sensitivity (Null et al., 2013; Ficklin et al., 2014; Du et al., 2019; Leach and Moore, 2019; Wondzell et al., 2020).
15 The studied catchments can be assumed to be representative for undisturbed Swiss catchments in general (Michel et al., 2020).

For Alpine catchments, the calibration results for discharge and water temperature show a low model error in winter, spring and fall. Over these seasons, results are coherent with observed trends. Summer discharge and snow depletion in the melt season
20 are not perfectly captured in all catchments, but results are coherent with the literature (Brunner et al., 2019a; Muelchi et al., 2020). During summer, simulated river temperatures show instances of sudden overestimation in four out of the five studied Alpine catchments. These overestimations do not appear during all summers and there is no temporal coincidence between the instances of temperature overestimation and low discharge conditions. Furthermore, only two of the rivers concerned with this overestimation problem (the Inn and the Landwasser) show a correlation between river temperature and discharge errors
25 (Figures S21, S23, S25, S27, and S29), suggesting that the underestimation of summer discharge cannot explain the overestimation of river temperature.

Section S9 extensively discusses the influence of solar radiation and other energy fluxes on temperature simulation errors in Alpine catchments. In summary, it can be stated that the approximation of topographic shading due to the spatial resolution of Alpine3D and the underestimation of riparian vegetation shading can slightly contribute to the overestimation of summer river
30 temperature, but does not explain the magnitude and behaviour of the observed errors. The analysis rather suggests that the small upstream reaches are overly sensitive to variations in the forcing, causing too high temperature in the upper part of the catchment, which then gets advected downstream.

The most probable hypothesis explaining this over sensitivity is that some mechanisms are not explicitly captured in the model. All the water draining from the snowpack is assumed to infiltrate the soil at the pixel scale in Alpine3D, while the runoff at the bottom of the soil column is collected in StreamFlow at the sub-catchment scale, after a transfer through the two linear reservoirs emulating fast and delayed lateral subsurface runoff. The water leaving these two reservoirs inherits the temperature determined by the sub-catchment temperature scheme in use. The fact that the model performs well in Swiss Plateau catchments regardless of catchment size and local topography suggests that the problem for Alpine catchments is related to processes that are only at play at high elevations. The following processes are not explicitly simulated in StreamFlow (in any of the implemented schemes for infiltrating soil water temperature) and can all contribute to the mentioned temperature overestimation during summer: i) cold water advection from remaining, hydrologically well connected snow patches (connected via surface

5 temperature determined by the sub-catchment temperature scheme in use. The fact that the model performs well in Swiss Plateau catchments regardless of catchment size and local topography suggests that the problem for Alpine catchments is related to processes that are only at play at high elevations. The following processes are not explicitly simulated in StreamFlow (in any of the implemented schemes for infiltrating soil water temperature) and can all contribute to the mentioned temperature overestimation during summer: i) cold water advection from remaining, hydrologically well connected snow patches (connected via surface

10 ii) cold water advection from local groundwater systems (see Thornton et al., 2021), iii) cold water advection from melting glacier ice (if present, see Du et al., 2021).

The chosen HSPF approach for sub-catchment infiltrating water temperature is shown to generally perform well in comparison to other approaches (see Section 3.1 and Leach and Moore, 2015), but it is exclusively based on air temperature and cannot explicitly capture any of the three processes mentioned above (note that the other two available approaches lead to even more problematic results during the summer season). This has only little impact on the simulated river temperatures in spring, when the air temperature is still relatively low. In summer, however, ignoring these cooling mechanisms can explain the exaggerated sensitivity of small upstream reaches. Figure S59 shows the infiltrating water temperature simulated by the HSPF scheme over the Landwasser catchment and its correlation with the simulated overestimation in summer, confirming that the HSPF scheme might be the cause of the overestimation. Our results suggest that this simple approach is not suited for complex Alpine terrain and that a different and probably more complex method should be developed.

15 problematic results during the summer season). This has only little impact on the simulated river temperatures in spring, when the air temperature is still relatively low. In summer, however, ignoring these cooling mechanisms can explain the exaggerated sensitivity of small upstream reaches. Figure S59 shows the infiltrating water temperature simulated by the HSPF scheme over the Landwasser catchment and its correlation with the simulated overestimation in summer, confirming that the HSPF scheme might be the cause of the overestimation. Our results suggest that this simple approach is not suited for complex Alpine terrain

20 and that a different and probably more complex method should be developed.

The cooling effect from snow and glacier melt, which are missing in the model, can be expected to become less important in the future, because of the general glacier retreat and the increase of the average winter snow line. In addition, the Alpine3D simulations performed here show that in the majority of the scenarios and of the years early in the summer. However, the SWE decrease in spring, about -70%, means the median of the SWE reduction under RCP8.5 by the end of the century is about -60 %, meaning that the available snow to be melted in summer is reduced by -70%. The glacier melt will also diminish in the future. The the same amount.

25 -60 %, meaning that the available snow to be melted in summer is reduced by -70%. The glacier melt will also diminish in the future. The the same amount.

In fact, the lack of proper cold water input parameterization can even be expected to actually result in an underestimation of the computed river warming in Alpine catchments. This would arise if the CC signal is computed with respect to a past period with summer temperature overestimation caused by missing cold water advection resulting from snowmelt, not represented in the model, will thus be relatively less important and if this effect disappears in the future (Du et al., 2021). However, we cannot conclusively attribute the overestimation to snow and glacier melt being not captured, and other factors might be at play here.

30 the model, will thus be relatively less important and if this effect disappears in the future (Du et al., 2021). However, we cannot conclusively attribute the overestimation to snow and glacier melt being not captured, and other factors might be at play here.

Consequently, the results obtained for summer warming in Alpine rivers should be interpreted with caution. The main result of this part of the study is to show the need for more complex models to reliably simulate all the water flowpaths and thermal interactions in Alpine terrain.

Despite the limitations for the summer season in Alpine catchments, the simulated seasonal warming pattern, particularly pronounced in summer, is in agreement with results by Du et al. (2019) for the partially glaciated Athabasca catchment in Canada, by Piotrowski et al. (2021) for the mountainous Cedar catchment in Poland, and by Ficklin et al. (2014) over the Columbia river basin in the western US and Canada. For the period 2081-2100 and RCP8.5, Ficklin et al. (2014) obtained river temperature warming comparable or higher than that of the air temperature for the upper part of the catchment, similar to our results for Alpine catchments.

In summary, we show the high skill of the used physics-based model chain to reproduce discharge and water temperature in the Swiss Plateau catchments. For the Alpine catchments, good results are obtained in all seasons except for summer and mechanisms explaining this lower performance are provided.

5.2 Climate change impact

The expected increase in river temperature will have a large impact on both natural and societal systems. To evaluate this future impact, we use two metrics introduced by Michel et al. (2020): i) The number of days per year when the daily maximum river temperature is above 25°C (this is a legal threshold in Switzerland for unrestricted water usage, e.g. for industrial cooling), and ii) a metric indicating the number of days per year when salmonid fish are exposed to Proliferative Kidney Disease (PKD). The latter metric is based on the model of Carraro et al. (2016) counting the number of days per year for which the minimum daily temperature exceeds 15°C for at least 28 consecutive days. Values for these two indicators are shown for four catchments in Figure 8. Note that these two metrics are meaningful only for Swiss Plateau catchments.

The metrics values obtained over the historical period match well the corresponding values obtained from measurements (Michel et al., 2020), underlining again the robustness of the results obtained when the models are forced with CC scenarios. For each of the four catchments shown in Figure 8, both indicators grow over time and with increased greenhouse gas emissions. Catchments such as the Birs and the Eulach, which are currently less prone to high river temperatures, will reach and exceed both the legal threshold of 25°C and the PKD critical value more frequently in the future than in current conditions. The By the middle of the century, river temperatures conditions during summer will be favourable for the spread of PKD in all 7 investigated catchments (for all RCPs), with possibly devastating impact on salmonid fish population. For catchments with relatively warm river water under current conditions, such as the Broye and the Kleine Emme, the legal limit of 25°C will be reached almost every year already by 2030-2040 regardless of the emission scenario. By the end of the century and with high emission scenarios, the river temperature will be above this threshold for around 2 months per year in these 2 catchments. This will prompt either stopping regular water usage for industry and cooling in such catchments, or a necessary adaptation of current regulation and legislation, at the risk of further enhancing the impacts and increasing the stress and pressure on these ecological systems.

In Alpine catchments, the large decrease in summer snow cover and the retreat of glaciers, causing a reduction of surface shrinking of glaciers (Huss and Hock, 2018; Compagno et al., 2021) lead to a drastic warming of the soil surface owing to lower surface albedo and the loss of the insulating snow layer, lead in these areas to a drastic soil surface warming absence of a thermally insulating layer (Figure 6). In 2030-2040 (all scenarios) and during the second part of the 21st century under

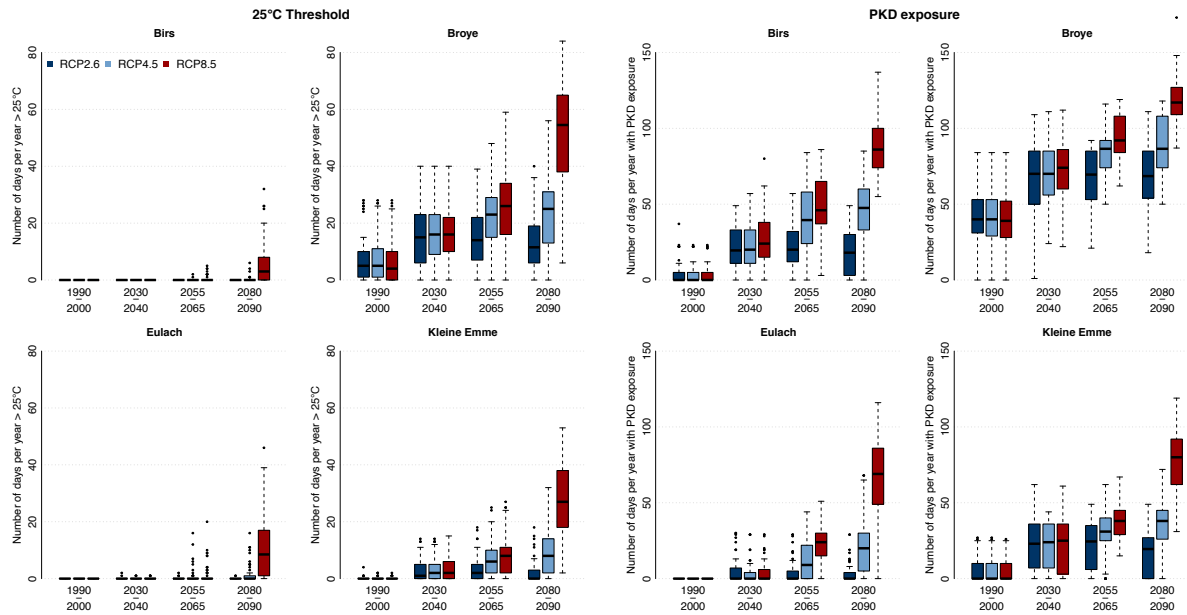


Figure 8. Left: Number of days per year when the river temperature is above the threshold of 25°C, for each year in each time period and for each scenario, for 4 Swiss Plateau catchments. Right: Number of days per year when salmonid populations are exposed to PKD, based on the metric presented in Michel et al. (2020), for each year in each time period and for each scenario, for 4 Swiss Plateau catchments. These 4 catchments were chosen to represent the variation in the Swiss Plateau catchment type.

RCP2.6, this soil warming remains limited, with increases below those of an increase lower than that of the air temperature. However, for RCP4.5 and RCP8.5 and periods further ahead, these changes in land cover cause a substantial soil temperature warming increase, which can exceed the warming of the air temperature, and which contributes thereby to the substantial increase in water temperature. A similar soil temperature increase. Such an increase in soil temperature is not simulated for the lowland catchments (Figure S79 S97). In addition, Alpine catchments will experience a sharp decrease in runoff discharge during the second half of the summer (see Figure 7), which will might exacerbate the sensitivity of the rivers to higher energy influx (see Section ??) energy input and contribute to the higher temperature elevation simulated for Alpine catchments compared to the lowland ones in summer and early fall.

During fall, a discharge reduction occurs at the beginning of the season, caused by the shift of annual peak discharge to earlier in spring and summer, followed by a discharge increase later in the season due to an increased fraction of liquid precipitation and rapid melting of occasional snowfall. These fall melt events contribute to cool the soil; accordingly, higher temperatures in the overall soil warming in fall remains limited and significantly below the prediction for the Swiss Plateau catchments. summer season. Therefore, despite the uncertainty linked to the simulated summer river temperatures, our results provide strong evidence of a more pronounced warming during summer in Alpine rivers compared to lowland rivers (which is also consistent with the literature).

At the end of fall, and similar to winter, air temperature is mostly below the freezing point, limiting thereby the warming of water and leading to limited water temperature increase over fall, on average. However, as depicted in Figure 7, the future water temperature in September will be much higher than during past decades, meaning that the period when the ecosystem will be affected by a critical warming will extend from June to the end of September. Overall, the seasonal pattern of warming simulated in Alpine catchments, with a strong warming in summer, is in agreement with the results obtained by Du et al. (2019) for the partially glacierized Athabasca catchment in the northwest USA, by Piotrowski et al. (2021) for the mountainous Cedar catchment in Poland (especially for a machine learning model compared to statistical models), and by Ficklin et al. (2014) over the Columbia river basin situated across the western USA/Canada border. For the period 2081-2100 and RCP8.5, Ficklin et al. (2014) obtains river warming similar or higher than that for the air for the upper part of the catchment, as simulated in the present study for Alpine catchments.

5.3 Role of discharge variations for summer water temperature

Discharge reduction is mentioned in the previous paragraph as a factor of enhanced water warming. From simple thermodynamics, we can expect reduced discharge to have a direct impact on water river temperature. However, historical data do not exhibit a strong correlation between changes in discharge and changes in water river temperature during summer, except during unusually warm and dry summers when low discharge exacerbates the warming (Michel et al., 2020). In Alpine catchments, the summer mean water temperature has been shown to have a low inter-annual variability, even during dry and warm summers (Michel et al., 2020).

To investigate the relationship between water temperature change and discharge change changes in river temperature and discharge during summer, we apply uni- and multivariate linear models on ΔT are used, taking ΔTA , ΔQ , or both as predictors. The models are applied separately for the Swiss Plateau and for the Alpine catchments for the summer season, the period 2080-2090, and for RCP8.5 (Table 6 and Figure S73 S98). For the Swiss Plateau catchments, both ΔTA and ΔQ are identified as significant predictors when used separately (with a lower predictive power an adjusted- R^2 of only 0.06 when using ΔQ), but when used together the significance of ΔQ disappears and the explanatory power of the model is not improved compared to using ΔTA alone. In Thus, in the Swiss Plateau catchments, there is thus no strong correlation between changes in summer discharge and changes in water temperature, as observed from historical data. Wondzell et al. (2019) river temperature. This is coherent with historical observations and with results by Wondzell et al. (2019), which show a much weaker impact of discharge change on water temperature compared to changes in air temperature for the upper Middle Fork John Day River, located in northeast Oregon, USA.

In Alpine catchments, however, ΔQ remains significant in the multivariate model and increases the R^2 value from 0.73-0.69 (when using only ΔTA) to 0.89-0.81. In addition, using ΔQ alone allows to explain 2/3-almost half of the variability in ΔT . This analysis shows that a change in discharge influences the change in water temperature in Alpine catchments during summer. Due to the problem of overestimated summer river temperatures in Alpine catchments, we have low confidence in this specific result and cannot draw a convincing conclusion on possible differences between lowland and Alpine catchments concerning

the sensitivity of river temperature to discharge. Accurately quantifying this sensitivity in Alpine regions in a changing climate, with the expected decrease in snow and glacier cover, would be of great interest in further studies.

There is no straightforward explanation for this different sensitivity of water temperature change to discharge change between Swiss Plateau and Alpine catchments. The most likely reason is the difference in flow regime between Plateau and Alpine rivers. In Swiss Plateau catchments, the summer discharge is already low nowadays compared to the other seasons. In Alpine regions, the annual cycle is more pronounced and the summer season is currently characterized by high discharge. The expected shift in peak discharge from mid-summer to late spring and the low flow conditions at the end of the summer expected in the future might lead to an increased sensitivity to air temperature. This growing sensitivity of water temperature, amplified by discharge reduction during summer, contributes to the different summer warming intensity in the Alpine catchments compared to the Swiss Plateau catchments.

Table 6. Summary of the linear models for changes in water river temperature (ΔT) using changes in air temperature (ΔTA), water discharge (ΔQ), or both, as predictors. Changes in the period 2080-2090 compared to the reference period 1990-2000 are used for RCP8.5. The table shows the coefficients, the *p-values* associated to each predictor, and the adjusted R^2 (discounting the effect of additional explanatory variables) of each model. The linear models are applied separately for the Swiss Plateau catchments (top) and the Alpine catchments (bottom).

Swiss Plateau catchments			
Predictor(s)	Coefficient(s)	<i>p-value</i> (s)	R^2
ΔTA	$0.76\text{--}0.82 \pm 0.02$	$<2e\text{--}16$	$0.74\text{--}0.71$
ΔQ	$0.020\text{--}0.01 \pm 0.001$	$<2e\text{--}16\text{--}3e\text{--}8$	$0.38\text{--}0.06$
ΔTA and ΔQ	$0.77\text{--}0.82 \pm 0.03$ and $6e\text{--}4\text{--}0.02$ and $4e\text{--}7 \pm 1e\text{--}3\text{--}8e\text{--}4$	$<2e\text{--}16$ and $0.58\text{--}1$	$0.74\text{--}0.71$
Alpine catchments			
Predictor(s)	Coefficient(s)	<i>p-value</i> (s)	R^2
ΔTA	$1.07\text{--}1.14 \pm 0.03\text{--}0.04$	$<2e\text{--}16$	$0.73\text{--}0.69$
ΔQ	$-0.071\text{--}0.05 \pm 0.002\text{--}0.003$	$<2e\text{--}16$	$0.67\text{--}0.44$
ΔTA and ΔQ	$0.72\text{--}0.92 \pm 0.03$ and $-0.042\text{--}0.04$ and -0.03 ± 0.002	$<2e\text{--}16$ and $<2e\text{--}16$	$0.89\text{--}0.81$

5.3 Robustness, Current limitations and open questions future model development

The model shows good performance during the validation period. The errors in water temperature (RMSE) observed during the calibration and validation periods are far below the CC signal for RCP4.5 and RCP8.5, which underlines the robustness of the simulated trends. The results obtained are coherent with past and current observations in Switzerland and in central Europe (Moatar and Gailhard, 2006; Webb and Nobilis, 2007; Arora et al., 2016; Michel et al., 2020) and show good agreement with other results in the literature both in terms of absolute discharge and temperature changes predicted and in terms of processes and climate change sensitivity (Null et al., 2013; Ficklin et al., 2014; Du et al., 2019; Leach and Moore, 2019; Wondzell et al., 2019; Muel The studied catchments can be assumed to be representative of Swiss catchments in general (Michel et al., 2020), and the results

obtained here can be considered as representative baseline of future trends. In Alpine catchments, despite some discrepancies between modelled and observed summer temperatures, we argue that the CC results can also be considered as being robust, as explained below.

5 First, the proposed cause for the overestimation of summer water temperatures (cold water input parametrization) has a relatively minor impact when using CC scenarios because cold water input is reduced for all scenarios and future time periods. In addition, the results obtained for the near future (2030-2040) or with low emission scenarios are in agreement with the observations performed over the last four decades in Switzerland (both for the different behaviours observed in Swiss Plateau and Alpine catchments). Finally, for the early period 2030-2040 or with low emission scenarios, the increase of water temperature in summer in Alpine catchments is similar to the increase simulated in Swiss Plateau catchments. The differences appear only later and with high emission scenarios along with marked changes in the snow and glacier cover and of the discharge regime. This suggests that a potentially overestimated warming simulated in Alpine catchments during the calibration and validation periods does not affect the estimation of future warming to a large extent.

10 The more marked impact of CC in water temperature in Alpine catchments simulated here is explained by an increase in soil temperature and a large reduction in discharge, jointly leading to higher sensitivity of water to air temperature in summer. These simulated processes are also in line with observations from recent warm years in Alpine catchments with reduced snow cover (Michel et al., 2020) and with other climate change impact study in mountainous catchments (Ficklin et al., 2014; Du et al., 2019; Piotrowski et al., 2020).

In essence, despite the higher complexity in modelling the Alpine regions compared to the lower elevation ones, we have shown strong evidence that the simulated differential warming between Alpine and Swiss Plateau catchments is consistent with observations, robust and plausible. We interpret the results on Alpine catchments as first results of CC simulations in this type of catchments, providing relevant new information and insights, which come with several sources of uncertainty however. In particular, the impact of cold water release from snowmelt or cold water soil reservoirs should be implemented in models for further studies (Yan et al., 2021; Thornton et al., 2021).

25 ~~There are~~ Besides the problem of simulating summer river temperature in Alpine catchments, there are a few other shortcomings in the models used. Riparian vegetation is not completely accounted for in the model chain Alpine3D-StreamFlow, while it is shown to have a strong local effect on water-~~river~~ temperature (see among other Kalny et al., 2017; Trimmel et al., 2018; Dugdale et al., 2018; Wondzell et al., 2019). The inclusion-integration of riparian vegetation would be a necessary addition in such models to assess its effectiveness as a mitigation strategy. Also, no dynamic interaction with the water table is taken into account. ~~While in our study catchments with different amounts of groundwater interaction are used (Epting et al., 2021), the model shows similar performances across them, suggesting that it has only a weak impact for our study. However, interaction~~ represented in the model. Interaction with groundwater might be a significant driver factor for water temperature in other some catchments (Qiu et al., 2019; Johnson et al., 2020; O'Sullivan et al., 2020). Further model improvement to better represent the interplay of soil infiltration-water infiltration in soil, cold water advection and groundwater dynamics might be of key importance for key elements in future CC impact assessments on water temperature because this might come in parallel with newly-recently developed methods for groundwater and irrigation water management (García-Gil et al., 2015), ~~which might~~.

~~Such methods could~~ even include specific ~~water-heat-thermodynamic water~~ management, such as ~~winter-water-infiltration-for-summer-river-cooling~~ water infiltration during winter for river cooling during summer (Epting et al., 2013).

~~This also relates to another crucial limitation of the setup used: the fact that only mostly natural undisturbed river courses are studied since the model does not deal with any kind of anthropogenic structures, such as~~ Further extensions are needed to account for anthropogenic influences like dams, pumping, deviations, intakes or discharge, which influence the water temperature (Michel et al., 2020; Seyedhashemi et al., 2021) ~~.The patterns of water usage for irrigation, electricity production or industrial cooling will likely evolve and change in the future due to CC but are not considered in the model used, limiting the current study to mostly natural undisturbed catchments.~~ In addition, Michel et al. (2020) showed with historical data that the presence of lakes along the watercourse changes the warming rate of rivers. This two-way interaction in river-lake-river systems also remains to be investigated in more detail in future ~~works, especially taking into account~~ studies, especially considering the expected shifts in lake mixing (Råman Vinnå et al., 2021) and in the Alpine flow regime.

~~It is also noteworthy that future~~ Future extreme events are not covered here because the used models are not validated for extreme events and the forcing time series are not capturing such events (Michel et al., 2021b). In central Europe, a clear link between summertime dry spells and heat waves ~~in summer~~ has been found (Fischer et al., 2007b, a) and ~~they~~ both are expected to increase in frequency and amplitude in the future (NCCS, 2018). As a consequence, it is likely that even more pronounced warming than predicted here will ~~arise~~ result during extremely warm and dry summers in the future. ~~It is also worth noting that the recently released CMIP6 CC scenarios predict a stronger warming in mid-latitude in the northern hemisphere than the CMIP5 CC scenarios used in this work (IPCC, 2021).~~

Finally, ~~both the downscaling method used for CC scenarios and the computational limitations forbid transient runs over the whole 21st century. Transient runs would be informative about the time of emergence of transition in water temperature such as the ones predicted for Alpine catchments. Finally,~~ only one model chain is used for the snow and hydrological simulations, while significant differences can be obtained across models in terms of discharge and water temperature simulation over climate change periods (Carletti et al., 2021; Piotrowski et al., 2021).

6 Conclusion

This work presents the first extensive study of climate change (CC) impact on river ~~water~~ temperatures in Switzerland and, to the best of our knowledge, in Alpine areas. A chain of physics-based models ~~has been~~ is used with 21 CC scenarios, spanning three different emission pathways (RCP2.6, RCP4.5, and RCP8.5), ~~and~~. The model chain is applied to two categories of catchments, namely the lowland Swiss Plateau catchments ~~and~~, and the higher elevation Alpine catchments, ~~which exhibit different discharge and thermal regimes.~~

We demonstrate the ability of ~~the developed~~ a physics-based model chain to reliably simulate the ~~water temperature of river~~ temperature in a variety of catchments ~~over Switzerland and we discuss local limitations that have been identified.~~

~~This work shows that the computation of the temperature of water entering the stream network is a critical factor in Alpine catchments and that omitting this cold advection from snow and ice melt or local coldwater storage (such as in the used HSPF~~

approach) leads to an overestimation of the in Switzerland, with a notable exception for summer water temperature over the historical periods. Other in Alpine catchments. We tested several aspects of the physical models used physics-based models, such as the impact of using different calibration periods, using a lumped approach versus a discretized approach for water routing, or using a simple in-stream routing computation versus a more complex one, together with the calibration period length are tested. Therefore scheme. Higher complexity routing and discretization schemes do not improve the quality of the simulations. Results show the critical importance of correctly computing the water temperature entering the stream network in Alpine catchments; the results furthermore underline that omitting processes, such as cold water advection originating from snow and ice melt or local cold water storage, could lead to an overestimation of the river temperature during summer. In this sense, this study offers a solid basis for future work with broad and solid foundation for future development and application of physics-based hydrological models in the context of climate change modelling-CC modelling. The study identifies a few flaws of the models and provides evidence for necessary improvements in these models.

Our results The results of the climate change impact study show that a clear distinct warming of river water is expected for the 21st century -At in all investigated regions. By the end of the century (2080-2090), the median annual water river temperature increase in Swiss Plateau the studied catchments amounts to $+0.9^{\circ}\text{C}$ for RCP2.6, (with a range of 0.1 - 1.9°C), and to $+3.5$ - 3.3°C for RCP8.5 (2.1 - 5.3°C) compared to the reference period 1990-2000. In Alpine catchments, it amounts to $+0.9^{\circ}\text{C}$ for RCP2.6 (0.0 - 1.8°C) and to $+3.2^{\circ}\text{C}$ for RCP8.5 (1.4°C - 5.3°C). A significant reduction in summer discharge will occur in Swiss Plateau catchments is predicted for high emission scenarios by the end of the century, with a median value of -42% . No significant discharge trends are expected, in any season, with low emission scenarios-

-27% for the Swiss Plateau catchments and of -31% for the Alpine catchments. At the seasonal time scale, the warming on the Swiss Plateau and in the Alpine regions exhibit exhibits different patterns. For On the Swiss Plateau, the spring and fall warming is comparable to the warming in winter, while the summer warming is stronger but still moderate. In Alpine catchments, only a very limited warming is expected in winter. An important discharge increase in winter and spring is expected in these catchments due to enhanced snowmelt and a larger fraction of precipitation falling as rain. Accordingly, the period of maximum discharge in the summer warming only slightly exceeds the winter one (by about 20%), and it is only weakly affected by changes in discharge. In the Alpine catchments, currently occurring during mid-summer, will shift to earlier in the year by a few weeks (RCP2.6) or almost two months (RCP8.5) by the end of the century the warming is rather limited during the cold months. In summer, the marked discharge reduction in Alpine catchments for high emission scenarios leads to an increase in sensitivity of water temperature to low discharge, which is not observed in the Swiss Plateau catchments. By the end of the century and for high emission scenarios, the reduced snow cover in spring and identified model limitations regarding river temperature simulation lower our confidence in the exact value of the predicted warming. However, we show that sizeable decrease in snow and ice cover expected during summer will lead to amplified warming of the soil. Along with the increased sensitivity of water temperature to low discharge conditions, this leads to a summertime river warming of $+6.0^{\circ}\text{C}$ (2.1 - 9.2°C) in Alpine catchments. This range is comparable to the air temperature warming. Refinement of results with a model chain that includes an improved parametrization of a significant increase in soil temperature, which then will most likely lead to large further river warming. In addition, this study quantifies the expected reduction in cold water advection and of groundwater

~~table dynamics should be attempted in the future~~ from melting glacier and snow, which is also expected to contribute to the summertime river warming in Alpine catchments.

5 ~~The Our~~ results show that river systems in Switzerland (and likely the entire Alps and adjacent regions) will undergo substantial changes in the near future, both in terms of water temperature and water availability. Two metrics have been used to quantify future impacts of river warming on ecology and on industrial cooling water use. This highlights the urgent need for both adaptation and mitigation strategies. The current rapid advances in water temperature modelling should thus cross the boundaries of purely scientific applications and be made available to a broader public for operational use in water temperature forecast and warning systems. Future development of monitoring systems will also be of ~~large-great~~ importance for improving the understanding of water temperature processes and ~~how this is represented~~ their representation in models.

10 *Author contributions.* The paper was written by Adrien Michel with contributions from all co-authors. Adrien Michel compiled the data, further developed and ran the models, and performed the analysis. Nander Wever supported the model development. Harry Zekollari performed the GloGEMflow simulations. Adrien Michel, Bettina Schaeffli, Michael Lehning, and Hendrik Huwald designed the study. All authors gave critical feedback on the manuscript.

Competing interests. BS is editor at HESS. The other authors declare that they have no conflict of interest.

15 *Code and data availability.* All results produced throughout this paper are either publicly available on Envidat (link will be added at publication time) or available upon request to the main author for large datasets. The source codes of MeteoIO, SNOWPACK, Alpine3D, and StreamFlow are available at <https://models.slf.ch>. The following versions have been used in this work: MeteoIO 3.0.0 (rev 2723), SNOWPACK 3.6.1 (rev 1878), Alpine3D 3.2.1 (rev 570), and StreamFlow 1.2.2 (rev 368). Additional pre- and post-processing tools, the setup of the simulations and necessary data are available on Envidat (link will be added at publication time). The source code of the model
20 GloGEMflow can be obtained upon request to the corresponding author. The downscaled climate change scenarios are also available on Envidat (<https://www.envidat.ch/#/metadata/climate-change-scenarios-at-hourly-resolution>). Unfortunately, the historical meteorological and hydrological measurements can not be shared publicly, but they are available upon request from the respective data providers or via the corresponding author.

Acknowledgements. ~~The work~~ This research was funded by the Swiss Federal Office for the Environment (FOEN), Hydrology Division, CH-3003 Bern under grant no. 15.0003.PJ / Q102-0785. The Federal Office of Meteorology and Climatology (MeteoSwiss), the WSL Institute for Snow and Avalanche Research (SLF), the Swiss Federal Office of Topography (Swisstopo), the Federal Office for the Environment (FOEN), the Office for Water and Waste of the Canton of Bern (AWA), the Office for Waste, Water, Energy and Air of the Canton Zurich (AWEL), and Holinger AG are acknowledged for free access to their data.

Petra Schmocker-Fackel and Fabia Hüsler (FOEN) are sincerely acknowledged for their support. We thank Jannis Epting (~~UniBas~~) ~~for~~ the University of Basel for instructive discussions about groundwater, Ionut Iosifescu (WSL) for his help regarding the data portal Envidat, Mathias Bavay (SLF) for his help in Alpine3D model development, and Tristan Brauchli (Crealp) for helpful discussions throughout this project. Harry Zekollari acknowledges the funding received from WSL (internal innovative project), the BAFU Hydro-CH2018 project and a Marie Skłodowska-Curie Individual Fellowship (Grant 799904).

The vast majority of work was performed with ~~performed with~~ open and free languages and software (mainly C, C++, bash, Python, R, MeteoIO, Snowpack, Alpine3D, StreamFlow, TauDEM, GDAL, SQL, and QGIS, ~~along with and~~ countless libraries), ~~and the~~. The authors acknowledge the open-source community for its invaluable contribution to science. The simulations were performed on the Piz Daint supercomputer of the Swiss National Supercomputing Center (CSCS, grants s938 ~~,~~ and s1031). The CSCS technical team is acknowledged for ~~his~~ its help and support during this project.

References

- Arora, R., Tockner, K., and Venohr, M.: Changing river temperatures in northern Germany: trends and drivers of change, *Hydrological Processes*, 30, 3084–3096, <https://doi.org/10.1002/hyp.10849>, 10.1002/hyp.10849, 2016.
- Barnett, T. P., Adam, J. C., and Lettenmaier, D. P.: Potential impacts of a warming climate on water availability in snow-dominated regions, *Nature*, 438, 303 EP –, <http://dx.doi.org/10.1038/nature04141>, 2005.
- 5 Bavay, M. and Egger, T.: MeteIO 2.4.2: a preprocessing library for meteorological data, *Geoscientific Model Development*, 7, 3135–3151, <https://doi.org/10.5194/gmd-7-3135-2014>, <https://www.geosci-model-dev.net/7/3135/2014/>, 2014.
- Belletti, B., Garcia de Leaniz, C., Jones, J., Bizzi, S., Börger, L., Segura, G., Castelletti, A., van de Bund, W., Aarestrup, K., Barry, J., Belka, K., Berkhuisen, A., Birnie-Gauvin, K., Bussettini, M., Carolli, M., Consuegra, S., Dopico, E., Feierfeil, T., Fernández, S., Fernandez Garrido, P., Garcia-Vazquez, E., Garrido, S., Giannico, G., Gough, P., Jepsen, N., Jones, P. E., Kemp, P., Kerr, J., King, J., Łapińska, M., Lázaro, G., Lucas, M. C., Marcello, L., Martin, P., McGinnity, P., O’Hanley, J., Olivo del Amo, R., Parasiewicz, P., Pusch, M., Rincon, G., Rodriguez, C., Royte, J., Schneider, C. T., Tummers, J. S., Vallesi, S., Vowles, A., Verspoor, E., Wanningen, H., Wantzen, K. M., Wildman, L., and Zalewski, M.: More than one million barriers fragment Europe’s rivers, *Nature*, 588, 436–441, <https://doi.org/10.1038/s41586-020-3005-2>, 10.1038/s41586-020-3005-2, 2020.
- 10
- 15 Beniston, M.: Is snow in the Alps receding or disappearing?, *Wiley Interdisciplinary Reviews: Climate Change*, 3, 349–358, <https://doi.org/10.1002/wcc.179>, <https://onlinelibrary.wiley.com/doi/abs/10.1002/wcc.179>, 2012.
- Benyahya, L., Caissie, D., St-Hilaire, A., Ouarda, T. B., and Bobée, B.: A Review of Statistical Water Temperature Models, *Canadian Water Resources Journal / Revue canadienne des ressources hydriques*, 32, 179–192, <https://doi.org/10.4296/cwrj3203179>, 10.4296/cwrj3203179, 2007.
- 20 Bicknell, B. R., Imhoff, J. C., Kittle, J. L., Donigan, A. S., and Johanson, R. C.: *Hydrological Simulation Program–FORTRAN User’s Manual for Version 11*, U.S. Environmental Protection Agency, National Exposure Research Laboratory, Athens, GA, USA., <https://books.google.ch/books?id=oDfTPAAACAAJ>, 1997.
- Bourqui, M., Hendrickx, F., and Le Moine, N.: Long-term forecasting of flow and water temperature for cooling systems: Case study of the Rhone River, France, *AHS Publ*, 348, 135–142, 2011.
- 25 Brauchli, T., Trujillo, E., Huwald, H., and Lehning, M.: Influence of Slope-Scale Snowmelt on Catchment Response Simulated With the Alpine3D Model, *Water Resources Research*, 53, 10 723–10 739, <https://doi.org/10.1002/2017WR021278>, <https://agupubs.onlinelibrary.wiley.com/doi/abs/10.1002/2017WR021278>, 2017.
- Brown, G. W.: Predicting Temperatures of Small Streams, *Water Resources Research*, 5, 68–75, <https://doi.org/10.1029/WR005i001p00068>, 1969.
- 30 Brunner, M. I., Björnson Gurung, A., Zappa, M., Zekollari, H., Farinotti, D., and Stähli, M.: Present and future water scarcity in Switzerland: Potential for alleviation through reservoirs and lakes, *Science of The Total Environment*, 666, 1033–1047, <https://doi.org/10.1016/j.scitotenv.2019.02.169>, <https://www.sciencedirect.com/science/article/pii/S0048969719306576>, 2019a.
- Brunner, M. I., Farinotti, D., Zekollari, H., Huss, M., and Zappa, M.: Future shifts in extreme flow regimes in Alpine regions, *Hydrology and Earth System Sciences*, 23, 4471–4489, <https://doi.org/10.5194/hess-23-4471-2019>, <https://hess.copernicus.org/articles/23/4471/2019/>, 2019b.
- 35 Caissie, D.: The thermal regime of rivers: a review, *Freshwater Biology*, 51, 1389–1406, <https://doi.org/10.1111/j.1365-2427.2006.01597.x>, <https://onlinelibrary.wiley.com/doi/abs/10.1111/j.1365-2427.2006.01597.x>, 2006.

- Carletti, F., Michel, A., Casale, F., Bocchiola, D., and Lehning, M.: A comparison of hydrological models with different levels of complexity in Alpine regions in the context of climate change, To be submitted to Hydrology and Earth System Sciences, 2021.
- Carraro, L., Mari, L., Hartikainen, H., Strepparava, N., Wahli, T., Jokela, J., Gatto, M., Rinaldo, A., and Bertuzzo, E.: An epidemiological model for proliferative kidney disease in salmonid populations, *Parasites & Vectors*, 9, 487, <https://doi.org/10.1186/s13071-016-1759-z>, 10.1186/s13071-016-1759-z, 2016.
- 5 Cauvy-Fraunié, S. and Dangles, O.: A global synthesis of biodiversity responses to glacier retreat, *Nature Ecology & Evolution*, 3, 1675–1685, <https://doi.org/10.1038/s41559-019-1042-8>, 10.1038/s41559-019-1042-8, 2019.
- CH2011: Swiss Climate Change Scenarios CH2011, Tech. rep., C2SM, MeteoSwiss, ETH, NCCR Climate, and OcCC, <https://doi.org/10.3929/ethz-a-006720559>, 2011.
- 10 CH2018: CH2018 – Climate Scenarios for Switzerland, Tech. rep., MeteoSwiss, Eidgenössische Technische Hochschule Zürich (ETH), University of Bern (Unibe), National Centre for Climate Services (NSSC), and Swiss Academy of Science (scnat), 2018.
- Comola, F., Schaeffli, B., Rinaldo, A., and Lehning, M.: Thermodynamics in the hydrologic response: Travel time formulation and application to Alpine catchments, *Water Resources Research*, 51, 1671–1687, 2015.
- Compagno, L., Eggs, S., Huss, M., Zekollari, H., and Farinotti, D.: Brief communication: Do 1.0 °C, 1.5 °C or 2.0 °C matter for the future evolution of Alpine glaciers?, *The Cryosphere Discussions*, 2021, 1–9, <https://doi.org/10.5194/tc-2021-31>, <https://tc.copernicus.org/preprints/tc-2021-31/>, 2021.
- 15 Cunge, J. A.: On The Subject Of A Flood Propagation Computation Method (Muskingum Method), *Journal of Hydraulic Research*, 7, 205–230, <https://doi.org/10.1080/00221686909500264>, 10.1080/00221686909500264, 1969.
- Dokulil, M. T.: Impact of climate warming on European inland waters, *Inland Waters*, 4, 27–40, <https://doi.org/10.5268/IW-4.1.705>, <https://www.tandfonline.com/doi/abs/10.5268/IW-4.1.705>, 2014.
- 20 Du, X., Shrestha, N. K., and Wang, J.: Assessing climate change impacts on stream temperature in the Athabasca River Basin using SWAT equilibrium temperature model and its potential impacts on stream ecosystem, *Science of The Total Environment*, 650, 1872–1881, <https://doi.org/10.1016/j.scitotenv.2018.09.344>, 2019.
- Du, X., Silwal, G., and Faramarzi, M.: Investigating the impacts of glacier melt on stream temperature in a cold-region watershed: coupling a glacier melt model with a hydrological model, *Journal of Hydrology*, p. 127303, <https://doi.org/10.1016/j.jhydrol.2021.127303>, <https://www.sciencedirect.com/science/article/pii/S0022169421013536>, 2021.
- 25 Dugdale, S. J., Malcolm, I. A., Kantola, K., and Hannah, D. M.: Stream temperature under contrasting riparian forest cover: Understanding thermal dynamics and heat exchange processes, *Science of The Total Environment*, 610-611, 1375–1389, <https://doi.org/10.1016/j.scitotenv.2017.08.198>, <http://www.sciencedirect.com/science/article/pii/S0048969717321952>, 2018.
- 30 Epting, J., Händel, F., and Huggenberger, P.: Thermal management of an unconsolidated shallow urban groundwater body, *Hydrology and Earth System Sciences*, 17, 1851–1869, <https://doi.org/10.5194/hess-17-1851-2013>, <https://hess.copernicus.org/articles/17/1851/2013/>, 2013.
- Epting, J., Michel, A., Affolter, A., and Huggenberger, P.: Climate change effects on groundwater recharge and temperatures in Swiss alluvial aquifers, *Journal of Hydrology X*, 11, 100071, <https://doi.org/10.1016/j.hydroa.2020.100071>, <https://www.sciencedirect.com/science/article/pii/S2589915520300225>, 2021.
- 35 Feigl, M., Lebedzinski, K., Herrnegger, M., and Schulz, K.: Machine learning methods for stream water temperature prediction, *Hydrology and Earth System Sciences Discussions*, 2021, 1–35, <https://doi.org/10.5194/hess-2020-670>, <https://hess.copernicus.org/preprints/hess-2020-670/>, 2021.

- Fell, S. C., Carrivick, J. L., Cauvy-Fraunié, S., Crespo-Pérez, V., Hood, E., Randall, K. C., Nicholass, K. J. M., Tieg, S. D., Dumbrell, A. J., and Brown, L. E.: Fungal decomposition of river organic matter accelerated by decreasing glacier cover, *Nature Climate Change*, <https://doi.org/10.1038/s41558-021-01004-x>, 10.1038/s41558-021-01004-x, 2021.
- Ficklin, D. L., Barnhart, B. L., Knouft, J. H., Stewart, I. T., Maurer, E. P., Letsinger, S. L., and Whittaker, G. W.: Climate change and stream temperature projections in the Columbia River basin: habitat implications of spatial variation in hydrologic drivers, *Hydrology and Earth System Sciences*, 18, 4897–4912, <https://doi.org/10.5194/hess-18-4897-2014>, <https://www.hydrol-earth-syst-sci.net/18/4897/2014/>, 2014.
- Fischer, E. M., Seneviratne, S. I., Lüthi, D., and Schär, C.: Contribution of land-atmosphere coupling to recent European summer heat waves, *Geophysical Research Letters*, 34, <https://doi.org/10.1029/2006GL029068>, <https://agupubs.onlinelibrary.wiley.com/doi/abs/10.1029/2006GL029068>, 2007a.
- Fischer, E. M., Seneviratne, S. I., Vidale, P. L., Lüthi, D., and Schär, C.: Soil Moisture–Atmosphere Interactions during the 2003 European Summer Heat Wave, *Journal of Climate*, 20, 5081–5099, <https://doi.org/10.1175/JCLI4288.1>, 10.1175/JCLI4288.1, 2007b.
- Gallice, A., Schaeffli, B., Lehning, M., Parlange, M. B., and Huwald, H.: Stream temperature prediction in ungauged basins: review of recent approaches and description of a new physics-derived statistical model, *Hydrology and Earth System Sciences*, 19, 3727–3753, <https://doi.org/10.5194/hess-19-3727-2015>, <https://www.hydrol-earth-syst-sci.net/19/3727/2015/>, 2015.
- Gallice, A., Bavay, M., Brauchli, T., Comola, F., Lehning, M., and Huwald, H.: StreamFlow 1.0: an extension to the spatially distributed snow model Alpine3D for hydrological modelling and deterministic stream temperature prediction, *Geoscientific Model Development*, 9, 4491–4519, <https://doi.org/10.5194/gmd-9-4491-2016>, <https://www.geosci-model-dev.net/9/4491/2016/>, 2016.
- García-Gil, A., Vázquez-Suñé, E., Ángel Sánchez-Navarro, J., and Mateo Lázaro, J.: Recovery of energetically overexploited urban aquifers using surface water, *Journal of Hydrology*, 531, 602–611, <https://doi.org/10.1016/j.jhydrol.2015.10.067>, <https://www.sciencedirect.com/science/article/pii/S0022169415008525>, 2015.
- Gouttevin, I., Lehning, M., Jonas, T., Gustafsson, D., and Mölder, M.: A two-layer canopy model with thermal inertia for an improved snowpack energy balance below needleleaf forest (model SNOWPACK, version 3.2.1, revision 741), *Geoscientific Model Development*, 8, 2379–2398, <https://doi.org/10.5194/gmd-8-2379-2015>, <https://www.geosci-model-dev.net/8/2379/2015/>, 2015.
- Griessinger, N., Schirmer, M., Helbig, N., Winstral, A., Michel, A., and Jonas, T.: Implications of observation-enhanced energy-balance snowmelt simulations for runoff modeling of Alpine catchments, *Advances in Water Resources*, 133, 103410, <https://doi.org/10.1016/j.advwatres.2019.103410>, <https://www.sciencedirect.com/science/article/pii/S0309170818310236>, 2019.
- Gupta, H. V., Kling, H., Yilmaz, K. K., and Martinez, G. F.: Decomposition of the mean squared error and NSE performance criteria: Implications for improving hydrological modelling, *Journal of Hydrology*, 377, 80–91, <https://doi.org/10.1016/j.jhydrol.2009.08.003>, <http://www.sciencedirect.com/science/article/pii/S0022169409004843>, 2009.
- Haag, I. and Luce, A.: The integrated water balance and water temperature model LARSIM-WT, *Hydrological Processes*, 22, 1046–1056, <https://doi.org/10.1002/hyp.6983>, 2008.
- Hannah, D. M. and Garner, G.: River water temperature in the United Kingdom: Changes over the 20th century and possible changes over the 21st century, *Progress in Physical Geography: Earth and Environment*, 39, 68–92, <https://doi.org/10.1177/0309133314550669>, 10.1177/0309133314550669, 2015.
- Hannah, D. M., Malcolm, I. A., Soulsby, C., and Youngson, A. F.: Heat exchanges and temperatures within a salmon spawning stream in the Cairngorms, Scotland: seasonal and sub-seasonal dynamics, *River Research and Applications*, 20, 635–652, <https://doi.org/doi.org/10.1002/rra.771>, 2004.

- Helbig, N.: Application of the radiosity approach to the radiation balance in complex terrain, Ph.D. thesis, University of Zurich, Zürich, 10.5167/uzh-30798, 2009.
- Hock, R., Jansson, P., and Braun, L. N.: Modelling the Response of Mountain Glacier Discharge to Climate Warming, pp. 243–252, Springer Netherlands, Dordrecht, https://doi.org/10.1007/1-4020-3508-X_25, 10.1007/1-4020-3508-X_25, 2005.
- 5 Horton, P., Schaefli, B., and Kaulzaric, M.: Why do we have so many different hydrological models? A review based on the case of Switzerland, Submitted to WIREs Water, <https://doi.org/10.31223/X5CK5K>, 10.31223/X5CK5K, 2021.
- Hrachowitz, M., Soulsby, C., Imholt, C., Malcolm, I. A., and Tetzlaff, D.: Thermal regimes in a large upland salmon river: a simple model to identify the influence of landscape controls and climate change on maximum temperatures, *Hydrological Processes*, 24, 3374–3391, <https://doi.org/10.1002/hyp.7756>, <https://onlinelibrary.wiley.com/doi/abs/10.1002/hyp.7756>, 2010.
- 10 Huggenberger, P. and Epting, J.: Urban geology : process-oriented concepts for adaptive and integrated resource management, Springer Basel, <https://doi.org/10.1007/978-3-0348-0185-0>, 2011.
- Huss, M. and Farinotti, D.: Distributed ice thickness and volume of all glaciers around the globe, *Journal of Geophysical Research: Earth Surface*, 117, F04 010, <https://doi.org/10.1029/2012JF002523>, 2012.
- Huss, M. and Hock, R.: A new model for global glacier change and sea-level rise, *Frontiers in Earth Science*, 3, 1–22, <https://doi.org/10.3389/feart.2015.00054>, 2015.
- 15 Huss, M. and Hock, R.: Global-scale hydrological response to future glacier mass loss, *Nature Climate Change*, 8, 135–140, <https://doi.org/10.1038/s41558-017-0049-x>, 10.1038/s41558-017-0049-x, 2018.
- Hutter, K.: *Theoretical Glaciology*, Reidel Publ. Co., Dordrecht, 1983.
- IPCC: Summary for Policymakers. In: *Climate Change 2021: The Physical Science Basis. Contribution of Working Group I to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change*, Cambridge University Press, In Press, Cambridge, United Kingdom and New York, NY, USA, 2021.
- 20 Jackson, F. L., Fryer, R. J., Hannah, D. M., Millar, C. P., and Malcolm, I. A.: A spatio-temporal statistical model of maximum daily river temperatures to inform the management of Scotland’s Atlantic salmon rivers under climate change, *Science of The Total Environment*, 612, 1543–1558, <https://doi.org/10.1016/j.scitotenv.2017.09.010>, <http://www.sciencedirect.com/science/article/pii/S0048969717323525>,
- 25 2018.
- Johnson, Z. C., Johnson, B. G., Briggs, M. A., Devine, W. D., Snyder, C. D., Hitt, N. P., Hare, D. K., and Minkova, T. V.: Paired air-water annual temperature patterns reveal hydrogeological controls on stream thermal regimes at watershed to continental scales, *Journal of Hydrology*, 587, 124 929, <https://doi.org/10.1016/j.jhydrol.2020.124929>, 2020.
- Jouvet, G., Huss, M., Blatter, H., Picasso, M., and Rappaz, J.: Numerical Simulation of Rhonegletscher from 1874 to 2100, *J. Comput. Phys.*, 30 228, 6426–6439, <https://doi.org/10.1016/j.jcp.2009.05.033>, 10.1016/j.jcp.2009.05.033, 2009.
- Kalny, G., Laaha, G., Melcher, A., Trimmel, H., Weihs, P., and Rauch, H. P.: The influence of riparian vegetation shading on water temperature during low flow conditions in a medium sized river, *Knowl. Manag. Aquat. Ecosyst.*, p. 5, <https://doi.org/10.1051/kmae/2016037>, 10.1051/kmae/2016037, 2017.
- Köplin, N., Viviroli, D., Schädler, B., and Weingartner, R.: How does climate change affect mesoscale catchments in Switzerland? – a framework for a comprehensive assessment, *Advances in Geosciences*, 27, 111–119, <https://doi.org/10.5194/adgeo-27-111-2010>, <https://adgeo.copernicus.org/articles/27/111/2010/>, 2010.
- 35 Leach, J. A. and Moore, R. D.: Observations and modeling of hillslope throughflow temperatures in a coastal forested catchment, *Water Resources Research*, 51, 3770–3795, <https://doi.org/10.1002/2014WR016763>, 2015.

- Leach, J. A. and Moore, R. D.: Empirical Stream Thermal Sensitivities May Underestimate Stream Temperature Response to Climate Warming, *Water Resources Research*, 0, <https://doi.org/10.1029/2018WR024236>, <https://agupubs.onlinelibrary.wiley.com/doi/abs/10.1029/2018WR024236>, 2019.
- Lee, S.-Y., Fullerton, A. H., Sun, N., and Torgersen, C. E.: Projecting spatiotemporally explicit effects of climate change on stream temperature: A model comparison and implications for coldwater fishes, *Journal of Hydrology*, 588, 125066, <https://doi.org/10.1016/j.jhydrol.2020.125066>, 2020.
- Lehning, M., Bartelt, P., Brown, B., and Fierz, C.: A physical SNOWPACK model for the Swiss avalanche warning: Part III: meteorological forcing, thin layer formation and evaluation, *Cold Regions Science and Technology*, 35, 169–184, [https://doi.org/10.1016/S0165-232X\(02\)00072-1](https://doi.org/10.1016/S0165-232X(02)00072-1), <http://www.sciencedirect.com/science/article/pii/S0165232X02000721>, 2002a.
- 10 Lehning, M., Bartelt, P., Brown, B., Fierz, C., and Satyawali, P.: A physical SNOWPACK model for the Swiss avalanche warning: Part II. Snow microstructure, *Cold Regions Science and Technology*, 35, 147–167, [https://doi.org/10.1016/S0165-232X\(02\)00073-3](https://doi.org/10.1016/S0165-232X(02)00073-3), <http://www.sciencedirect.com/science/article/pii/S0165232X02000733>, 2002b.
- Lehning, M., Völsch, I., Gustafsson, D., Nguyen, T. A., Stähli, M., and Zappa, M.: ALPINE3D: a detailed model of mountain surface processes and its application to snow hydrology, *Hydrological Processes*, 20, 2111–2128, <https://doi.org/10.1002/hyp.6204>, <https://onlinelibrary.wiley.com/doi/abs/10.1002/hyp.6204>, 2006.
- 15 //onlinelibrary.wiley.com/doi/abs/10.1002/hyp.6204, 2006.
- Lisi, P. J., Schindler, D. E., Cline, T. J., Scheuerell, M. D., and Walsh, P. B.: Watershed geomorphology and snowmelt control stream thermal sensitivity to air temperature, *Geophysical Research Letters*, 42, 3380–3388, <https://doi.org/10.1002/2015GL064083>, <https://agupubs.onlinelibrary.wiley.com/doi/abs/10.1002/2015GL064083>, 2015.
- Magnusson, J., Farinotti, D., Jonas, T., and Bavay, M.: Quantitative evaluation of different hydrological modelling approaches in a partly glacierized Swiss watershed, *Hydrological Processes*, 25, 2071–2084, <https://doi.org/10.1002/hyp.7958>, <https://onlinelibrary.wiley.com/doi/abs/10.1002/hyp.7958>, 2011.
- 20 //onlinelibrary.wiley.com/doi/abs/10.1002/hyp.7958, 2011.
- Magnusson, J., Jonas, T., and Kirchner, J. W.: Temperature dynamics of a proglacial stream: Identifying dominant energy balance components and inferring spatially integrated hydraulic geometry, *Water Resources Research*, 48, W06 510, <https://doi.org/10.1029/2011WR011378>, 2012.
- 25 Martin, E. and Etchevers, P.: Impact of Climatic Changes on Snow Cover and Snow Hydrology in the French Alps, pp. 235–242, Springer Netherlands, Dordrecht, https://doi.org/10.1007/1-4020-3508-X_24, 10.1007/1-4020-3508-X_24, 2005.
- Michel, A.: Past and future impacts of climate change on Swiss river temperature and discharge investigated with data analysis and numerical modelling, Ph.D. thesis, EPFL, Lausanne, TBD, 2021.
- Michel, A., Brauchli, T., Lehning, M., Schaeffli, B., and Huwald, H.: Stream temperature and discharge evolution in Switzerland over the last 30 50 years: annual and seasonal behaviour, *Hydrology and Earth System Sciences*, 24, 115–142, <https://doi.org/10.5194/hess-24-115-2020>, <https://hess.copernicus.org/articles/24/115/2020/>, 2020.
- Michel, A., Sharma, V., Lehning, M., and Huwald, H.: Dataset for: Climate change scenarios at hourly time-step over Switzerland from an enhanced temporal downscaling approach, <https://doi.org/http://dx.doi.org/10.16904/envidat.201>, <https://www.envidat.ch/dataset/climate-change-scenarios-at-hourly-resolution>, 2021a.
- 35 Michel, A., Varun, S., Lehning, M., and Huwald, H.: Climate change scenarios at hourly time-step over Switzerland from an enhanced temporal downscaling approach, *International Journal of Climatology*, n/a, <https://doi.org/10.1002/joc.7032>, <https://rmets.onlinelibrary.wiley.com/doi/abs/10.1002/joc.7032>, 2021b.

- Moatar, F. and Gailhard, J.: Water temperature behaviour in the River Loire since 1976 and 1881, *Comptes Rendus Geoscience*, 338, 319–328, <https://doi.org/10.1016/j.crte.2006.02.011>, <http://www.sciencedirect.com/science/article/pii/S1631071306000332>, 2006.
- Morrison, J., Quick, M. C., and Foreman, M. G.: Climate change in the Fraser River watershed: flow and temperature projections, *Journal of Hydrology*, 263, 230–244, [https://doi.org/10.1016/S0022-1694\(02\)00065-3](https://doi.org/10.1016/S0022-1694(02)00065-3), <http://www.sciencedirect.com/science/article/pii/S0022169402000653>, 2002.
- Mott, R., Faure, F., Lehning, M., löwe, H., Hynek, B., Michlmayer, G., Prokop, A., and Schöner, W.: Simulation of seasonal snow-cover distribution for glacierized sites on Sonnblick, Austria, with the Alpine3D model, *Annals of Glaciology*, 49, 155–160, <https://doi.org/10.3189/172756408787814924>, 2008.
- Muelchi, R., Rössler, O., Schwanbeck, J., Weingartner, R., and Martius, O.: Future runoff regime changes and their time of emergence for 93 catchments in Switzerland, *Hydrology and Earth System Sciences Discussions*, 2020, 1–25, <https://doi.org/10.5194/hess-2020-516>, <https://hess.copernicus.org/preprints/hess-2020-516/>, 2020.
- Muelchi, R., Rössler, O., Schwanbeck, J., Weingartner, R., and Martius, O.: Moderate runoff extremes in Swiss rivers and their seasonal occurrence in a changing climate, *Hydrology and Earth System Sciences Discussions*, 2021, 1–28, <https://doi.org/10.5194/hess-2020-667>, <https://hess.copernicus.org/preprints/hess-2020-667/>, 2021.
- Mulligan, M., van Soesbergen, A., and Sáenz, L.: GOODD, a global dataset of more than 38,000 georeferenced dams, *Scientific Data*, 7, 31, <https://doi.org/10.1038/s41597-020-0362-5>, 10.1038/s41597-020-0362-5, 2020.
- Myers, D. T., Ficklin, D. L., Robeson, S. M., Neupane, R. P., Botero-Acosta, A., and Avellaneda, P. M.: Choosing an arbitrary calibration period for hydrologic models: How much does it influence water balance simulations?, *Hydrological Processes*, 35, e14045, <https://doi.org/10.1002/hyp.14045>, <https://onlinelibrary.wiley.com/doi/abs/10.1002/hyp.14045>, 2021.
- NCCS: CH2018 - Climate Scenarios for Switzerland, National Centre for Climate Services, Zürich, 2018.
- Niedrist, G. H. and Füreder, L.: Real-time warming of Alpine streams: (re)defining invertebrates’ temperature preferences, *River Research and Applications*, 37, 283–293, <https://doi.org/10.1002/rra.3638>, <https://onlinelibrary.wiley.com/doi/abs/10.1002/rra.3638>, 2021.
- Null, S. E., Viers, J. H., Deas, M. L., Tanaka, S. K., and Mount, J. F.: Stream temperature sensitivity to climate warming in California’s Sierra Nevada: impacts to coldwater habitat, *Climatic Change*, 116, 149–170, <https://doi.org/10.1007/s10584-012-0459-8>, 10.1007/s10584-012-0459-8, 2013.
- Omstedt, A.: A coupled one-dimensional sea ice–ocean model applied to a semi-enclosed basin, *Tellus A: Dynamic Meteorology and Oceanography*, 42, 568–582, <https://doi.org/10.3402/tellusa.v42i5.11899>, 10.3402/tellusa.v42i5.11899, 1990.
- O’Reilly, C. M., Sharma, S., Gray, D. K., Hampton, S. E., Read, J. S., Rowley, R. J., Schneider, P., Lenters, J. D., McIntyre, P. B., Kraemer, B. M., Weyhenmeyer, G. A., Straile, D., Dong, B., Adrian, R., Allan, M. G., Anneville, O., Arvola, L., Austin, J., Bailey, J. L., Baron, J. S., Brookes, J. D., Eyto, E., Dokulil, M. T., Hamilton, D. P., Havens, K., Hetherington, A. L., Higgins, S. N., Hook, S., Izmet’eva, L. R., Joehnk, K. D., Kangur, K., Kasprzak, P., Kumagai, M., Kuusisto, E., Leshkevich, G., Livingstone, D. M., MacIntyre, S., May, L., Melack, J. M., Mueller-Navarra, D. C., Naumenko, M., Noges, P., Noges, T., North, R. P., Plisnier, P.-D., Rigosi, A., Rimmer, A., Rogora, M., Rudstam, L. G., Rusak, J. A., Salmaso, N., Samal, N. R., Schindler, D. E., Schladow, S. G., Schmid, M., Schmidt, S. R., Silow, E., Soylyu, M. E., Teubner, K., Verburg, P., Voutilainen, A., Watkinson, A., Williamson, C. E., and Zhang, G.: Rapid and highly variable warming of lake surface waters around the globe, *Geophysical Research Letters*, 42, 10,773–10,781, <https://doi.org/10.1002/2015GL066235>, <https://agupubs.onlinelibrary.wiley.com/doi/abs/10.1002/2015GL066235>, 2015.

- O'Sullivan, A. M., Devito, K. J., Ogilvie, J., Linnansaari, T., Pronk, T., Allard, S., and Curry, R. A.: Effects of Topographic Resolution and Geologic Setting on Spatial Statistical River Temperature Models, *Water Resources Research*, 56, e2020WR028122, <https://doi.org/10.1029/2020WR028122>, 2020.
- Paillex, A., Schuwirth, N., Lorenz, A. W., Januschke, K., Peter, A., and Reichert, P.: Integrating and extending ecological river assessment: Concept and test with two restoration projects, *Ecological Indicators*, 72, 131–141, <https://doi.org/10.1016/j.ecolind.2016.07.048>, <http://www.sciencedirect.com/science/article/pii/S1470160X16304460>, 2017.
- Perrin, C., Michel, C., and Andréassian, V.: Improvement of a parsimonious model for streamflow simulation, *Journal of Hydrology*, 279, 275–289, 2003.
- Piotrowski, A. P., Osuch, M., and Napiorkowski, J. J.: Influence of the choice of stream temperature model on the projections of water temperature in rivers, *Journal of Hydrology*, 601, 126–129, <https://doi.org/10.1016/j.jhydrol.2021.126629>, 2021.
- Ponce, V. and Changanti, P.: Variable-parameter Muskingum-Cunge method revisited, *Journal of Hydrology*, 162, 433–439, [https://doi.org/10.1016/0022-1694\(94\)90241-0](https://doi.org/10.1016/0022-1694(94)90241-0), <http://www.sciencedirect.com/science/article/pii/0022169494902410>, 1994.
- Qiu, H., Blaes, P., Comer-Warner, S., Hannah, D. M., Krause, S., and Phanikumar, M. S.: Evaluating a Coupled Phenology-Surface Energy Balance Model to Understand Stream-Subsurface Temperature Dynamics in a Mixed-Use Farmland Catchment, *Water Resources Research*, 55, 1675–1697, <https://doi.org/10.1029/2018WR023644>, 2019.
- Råman Vinnå, L., Wüest, A., Zappa, M., Fink, G., and Bouffard, D.: Tributaries affect the thermal response of lakes to climate change, *Hydrology and Earth System Sciences*, 22, 31–51, <https://doi.org/10.5194/hess-22-31-2018>, <https://www.hydrol-earth-syst-sci.net/22/31/2018/>, 2018.
- Råman Vinnå, L., Medhaug, I., Schmid, M., and Bouffard, D.: The vulnerability of lakes to climate change along an altitudinal gradient, *Communications Earth & Environment*, 2, 35, <https://doi.org/10.1038/s43247-021-00106-w>, 10.1038/s43247-021-00106-w, 2021.
- Santiago, J. M., Muñoz Mas, R., Solana-Gutiérrez, J., García de Jalón, D., Alonso, C., Martínez-Capel, F., Pórtoles, J., Monjo, R., and Ribalaygua, J.: Waning habitats due to climate change: the effects of changes in streamflow and temperature at the rear edge of the distribution of a cold-water fish, *Hydrology and Earth System Sciences*, 21, 4073–4101, <https://doi.org/10.5194/hess-21-4073-2017>, <https://www.hydrol-earth-syst-sci.net/21/4073/2017/>, 2017.
- Schaepli, B., Hingray, B., and Musy, A.: Climate change and hydropower production in the Swiss Alps: quantification of potential impacts and related modelling uncertainties, *Hydrology and Earth System Sciences*, 11, 1191–1205, <https://doi.org/10.5194/hess-11-1191-2007>, <https://www.hydrol-earth-syst-sci.net/11/1191/2007/>, 2007.
- Schlögl, S., Marty, C., Bavay, M., and Lehning, M.: Sensitivity of Alpine3D modeled snow cover to modifications in DEM resolution, station coverage and meteorological input quantities, *Environmental Modelling & Software*, 83, 387–396, <https://doi.org/10.1016/j.envsoft.2016.02.017>, <http://www.sciencedirect.com/science/article/pii/S1364815216300378>, 2016.
- Segura, C., Caldwell, P., Sun, G., McNulty, S., and Zhang, Y.: A model to predict stream water temperature across the conterminous USA, *Hydrological Processes*, 29, 2178–2195, <https://doi.org/10.1002/hyp.10357>, <https://onlinelibrary.wiley.com/doi/abs/10.1002/hyp.10357>, 2015.
- Seyedhashemi, H., Moatar, F., Vidal, J.-P., Diamond, J. S., Beaufort, A., Chandesris, A., and Valette, L.: Thermal signatures identify the influence of dams and ponds on stream temperature at the regional scale, *Science of The Total Environment*, 766, 142–147, <https://doi.org/10.1016/j.scitotenv.2020.142667>, <https://www.sciencedirect.com/science/article/pii/S0048969720361969>, 2021.
- Stocker, T. F.: The Closing Door of Climate Targets, *Science*, 339, 280–282, <https://doi.org/10.1126/science.1232468>, <https://science.sciencemag.org/content/339/6117/280>, 2013.

- Tarboton, D.: TauDEM, Utah State University <http://hydrology.usu.edu/taudem/taudem5/>, 1997.
- Temnerud, J. and Weyhenmeyer, G.: Abrupt changes in air temperature and precipitation: Do they matter for water chemistry?, *Global Biogeochemical Cycles*, 22, 2008.
- AWA: Fließgewässer, Bau-, Verkehrs- und Energiedirektion, Canton Bern, <https://www.bve.be.ch/bve/de/index/wasser/wasser/messdaten/fluessgewaesser.html>, 2019.
- AWEL: Messdate, Amt für Abfall, Wasser, Energie und Luft, Canton Zürich, <https://awel.zh.ch/internet/baudirektion/awel/de/wasser/messdaten.html>, 2019.
- European Environment Agency: CORINE Land Cover (CLC) 2006, Version 17, Copenhagen K, Denmark, <https://land.copernicus.eu/pan-european/corine-land-cover/clc-2006>, 2013.
- 10 FOEN: Hydrological data and forecast, Swiss Federal Office of the Environment, <https://www.hydrodaten.admin.ch/en>, 2019.
- IDAWEB: MeteoSwiss, Federal Office of Meteorology and Climatology, <https://gate.meteoswiss.ch/idaweb/login.do>, 2020.
- IMIS: WSL Institute for Snow and Avalanche Research, SLF, IMIS measuring network, <https://www.slf.ch/en/avalanche-bulletin-and-snow-situation/measured-values/description-of-automated-stations.html>, 2019.
- Swiss Federal Office of the Environment: L'ordre des cours d'eau selon Strahler pour le réseau hydrographique numérique
15 au 1:25'000 de la Suisse, <https://www.bafu.admin.ch/bafu/fr/home/themes/eaux/etat/cartes/reseau-hydrographique-suisse/reseau-hydrographique--ordre-des-cours-deau-pour-le-reseau-hydro.html>, 2013.
- Swiss Federal Office of the Environment: Subdivision de la Suisse en bassins versants (Bassins versants Suisse), ref: J417-0015, <https://www.bafu.admin.ch/bafu/fr/home/themes/eaux/etat/cartes/geodonnees-sur-la-subdivision-de-la-suisse-en-bassins-versant.html>, 2020.
- Thornton, J., Therrien, R., Mariethoz, G., Linde, N., and Brunner, P.: Simulating fully-integrated hydrological dynamics in complex Alpine
20 headwaters, Submitted to *Water Resources Research*, pp. 1–28, <https://doi.org/10.31223/X5RG7Q>, 2021.
- Trimmel, H., Weihs, P., Leidinger, D., Formayer, H., Kalny, G., and Melcher, A.: Can riparian vegetation shade mitigate the expected rise in stream temperatures due to climate change during heat waves in a human-impacted pre-alpine river?, *Hydrology and Earth System Sciences*, 22, 437–461, <https://doi.org/10.5194/hess-22-437-2018>, <https://www.hydrol-earth-syst-sci.net/22/437/2018/>, 2018.
- van Vliet, M. T., Franssen, W. H., Yearsley, J. R., Ludwig, F., Haddeland, I., Lettenmaier, D. P., and Kabat, P.: Global river discharge and
25 water temperature under climate change, *Global Environmental Change*, 23, 450–464, <https://doi.org/10.1016/j.gloenvcha.2012.11.002>, <https://www.sciencedirect.com/science/article/pii/S0959378012001331>, 2013.
- Viviroli, D., Archer, D. R., Buytaert, W., Fowler, H. J., Greenwood, G. B., Hamlet, A. F., Huang, Y., Koboltschnig, G., Litaor, M. I., López-Moreno, J. I., Lorentz, S., Schädler, B., Schreier, H., Schwaiger, K., Vuille, M., and Woods, R.: Climate change and mountain water resources: overview and recommendations for research, management and policy, *Hydrology and Earth System Sciences*, 15, 471–504,
30 <https://doi.org/10.5194/hess-15-471-2011>, <https://www.hydrol-earth-syst-sci.net/15/471/2011/>, 2011.
- Warscher, M., Wagner, S., Marke, T., Laux, P., Smiatek, G., Strasser, U., and Kunstmann, H.: A 5 km Resolution Regional Climate Simulation for Central Europe: Performance in High Mountain Areas and Seasonal, Regional and Elevation-Dependent Variations, *Atmosphere*, 10, <https://doi.org/10.3390/atmos10110682>, <https://www.mdpi.com/2073-4433/10/11/682>, 2019.
- Watts, G., Battarbee, R. W., Bloomfield, J. P., Crossman, J., Daccache, A., Durance, I., Elliott, J. A., Garner, G., Hannaford, J., Hannah, D. M., Hess, T., Jackson, C. R., Kay, A. L., Kernan, M., Knox, J., Mackay, J., Monteith, D. T., Ormerod, S. J., Rance, J., Stuart, M. E., Wade, A. J., Wade, S. D., Weatherhead, K., Whitehead, P. G., and Wilby, R. L.: Climate change and water in the UK – past changes and future prospects, *Progress in Physical Geography: Earth and Environment*, 39, 6–28, <https://doi.org/10.1177/0309133314542957>, 10.1177/0309133314542957, 2015.

- Webb, B. W. and Nobilis, F.: Long-term changes in river temperature and the influence of climatic and hydrological factors, *Hydrological Sciences Journal*, 52, 74–85, <https://doi.org/10.1623/hysj.52.1.74>, 2007.
- Wever, N., Fierz, C., Mitterer, C., Hirashima, H., and Lehning, M.: Solving Richards Equation for snow improves snowpack meltwater runoff estimations in detailed multi-layer snowpack model, *The Cryosphere*, 8, 257–274, <https://doi.org/10.5194/tc-8-257-2014>, <https://www.the-cryosphere.net/8/257/2014/>, 2014.
- Wever, N., Schmid, L., Heilig, A., Eisen, O., Fierz, C., and Lehning, M.: Verification of the multi-layer SNOWPACK model with different water transport schemes, *The Cryosphere*, 9, 2271–2293, <https://doi.org/10.5194/tc-9-2271-2015>, <https://www.the-cryosphere.net/9/2271/2015/>, 2015.
- Wever, N., Comola, F., Bavay, M., and Lehning, M.: Simulating the influence of snow surface processes on soil moisture dynamics and streamflow generation in an alpine catchment, *Hydrology and Earth System Sciences*, 21, 4053–4071, <https://doi.org/10.5194/hess-21-4053-2017>, <https://www.hydrol-earth-syst-sci.net/21/4053/2017/>, 2017.
- WMO: WMO Guidelines on the Calculation of Climate Normals, Tech. rep., World Meteorological Organization, 2017.
- Wondzell, S. M., Diabat, M., and Haggerty, R.: What Matters Most: Are Future Stream Temperatures More Sensitive to Changing Air Temperatures, Discharge, or Riparian Vegetation?, *JAWRA Journal of the American Water Resources Association*, 55, 116–132, <https://doi.org/10.1111/1752-1688.12707>, 2019.
- Woolway, R. I. and Merchant, C. J.: Amplified surface temperature response of cold, deep lakes to inter-annual air temperature variability, *Scientific Reports*, 7, 4130, <https://doi.org/10.1038/s41598-017-04058-0>, 10.1038/s41598-017-04058-0, 2017.
- Woolway, R. I., Jennings, E., and Carrea, L.: Impact of the 2018 European heatwave on lake surface water temperature, *Inland Waters*, 10, 322–332, <https://doi.org/10.1080/20442041.2020.1712180>, 10.1080/20442041.2020.1712180, 2020a.
- Woolway, R. I., Kraemer, B. M., Lenters, J. D., Merchant, C. J., O’Reilly, C. M., and Sharma, S.: Global lake responses to climate change, *Nature Reviews Earth & Environment*, 1, 388–403, <https://doi.org/10.1038/s43017-020-0067-5>, 10.1038/s43017-020-0067-5, 2020b.
- Yan, H., Sun, N., Fullerton, A., and Baerwalde, M.: Greater vulnerability of snowmelt-fed river thermal regimes to a warming climate, *Environmental Research Letters*, 16, 054006, <https://doi.org/10.1088/1748-9326/abf393>, 2021.
- Zekollari, H., Fürst, J. J., and Huybrechts, P.: Modelling the evolution of Vadret da Morteratsch, Switzerland, since the Little Ice Age and into the future, *Journal of Glaciology*, 60, 1155–1168, <https://doi.org/10.3189/2014JoG14J053>, 2014.
- Zekollari, H., Huss, M., and Farinotti, D.: Modelling the future evolution of glaciers in the European Alps under the EURO-CORDEX RCM ensemble, *The Cryosphere*, 13, 1125–1146, <https://doi.org/10.5194/tc-13-1125-2019>, <https://tc.copernicus.org/articles/13/1125/2019/>, 2019.