

Landscape structures regulate the contrasting response of recession along rainfall amounts

Jun-Yi Lee^{1,2}, Ci-Jian Yang^{2,3}, Tsung-Ren Peng¹, Tsung-Yu Lee⁴, Jr-Chuan Huang²

¹Department of Soil and Environmental Sciences, National Chung Hsing University, Taichung 402202, Taiwan

5 ²Department of Geography, National Taiwan University, Taipei 106319, Taiwan

³German Research Centre for Geosciences (GFZ), Telegrafenberg, Potsdam 14473, Germany.

⁴Department of Geography, National Taiwan Normal University, Taipei 106209, Taiwan

Correspondence to: Jr-Chuan Huang(riverhuang@ntu.edu.tw)

Abstract. Streamflow recession reflects hydrological functioning, runoff dynamics, and storage status within catchments and
10 landscape structures and rainstorms are recognized as drivers of recession response. However, the documented recession
responses to landscape structure and rainstorms are inconsistent, and there are fewer studies that concurrently investigate the
combined effects of these two factors on recession. This study tested how landscape structures and rainstorm characteristics
regulate the recession response. A total of 291 pairs of recession parameters—the recession coefficient, a , and exponent, b ,
from the power-law recession model—over 19 subtropical mountainous rivers with a broad rainfall spectrum were derived
15 using the decorrelation process. The results showed that (1) Coefficient a and exponent b , increases and decreases with L/G ,
respectively (L : median of flow-path lengths within a catchment; G : median of flow-path gradients within a catchment). It
implies that long-and-gentle hillslopes are conducive to flow accumulation and connecting different aquifers easily, thus
reducing nonlinearity. (2) For large catchments, the exponent b increases with rainfall amount, because large catchments
contain more spatial heterogeneous landscapes. However, (3) For small catchments, the exponent b decreases with rainfall
20 amount, likely indicating the large rainstorm saturating the whole catchment completely and thus decreasing spatial
heterogeneity in runoff generation. Our finding that L/G and drainage area might regulate the contrasting response of recession
along rainfall amounts requires additional validation in different regions since recession response is crucial when assessing
regional recession in ungauged catchments under the influence of climate change.

1 Introduction

25 Streamflow recession, the falling segment of a hydrograph, represents the rainfall-runoff process and interactions among
different flow paths and aquifers during a rainstorm. Therefore, the streamflow recession and its link with flow paths within
the landscape and aquifers, is particularly critical for baseflow estimation (Palmroth et al., 2010). A power-law relationship,
 $-dQ/dt = \hat{a}Q^b$, between the rate of change in streamflow and streamflow rate Q is widely used to describe the recession at the
catchment scale (e.g. Brutsaert and Nieber, 1977). The recession parameters \hat{a} and b arise from the geometric and hydraulic
30 properties of the aquifer system. The recession coefficient, \hat{a} , is tangled with the unit of streamflow and exponent b , which
represents the nonlinearity of storage and is the slope of the regression line of $\log(-dQ/dt)$ vs $\log(Q)$ (see section 2.2.2).

Since aquifers in various landscape units (e.g., hillslopes, riparian areas, streams, etc.) exhibit different hydraulic properties, theoretical works have shown that the streamflow recession parameters depend on the landscape structure or aquifer properties. In general, coefficient \hat{a} shows a positive correlation with stream length and aquifer slope (Rupp and Selker, 2006), while it exhibits a negative correlation with drainage area, aquifer depth, aquifer heterogeneity (Rupp and Selker, 2006), and inter-hillslope heterogeneity (Harman et al., 2009). On the other hand, exponent b tends to increase with the number of streams (Biswal and Marani, 2010), aquifer heterogeneity (Rupp and Selker, 2006), and inter-hillslope heterogeneity (Harman et al., 2009), whereas it decreases with the total stream length (Biswal and Marani, 2010).

Additionally, theoretical studies have demonstrated that streamflow recession parameters are subject not only to the influences of landscape and aquifer systems but also to the interplay with antecedent storage and rainfall events. For example, coefficient \hat{a} is negatively correlated with the recharge rate (Harman et al., 2009), the streamflow rate (Biswal and Nagesh Kumar, 2014), and the initial groundwater table under unsaturated conditions, while it has a slightly positive correlation under saturated conditions (Rupp and Selker, 2006). The exponent b slightly increases with a wet antecedent condition (Harman et al., 2009). However, drainage network theory indicates that b increases with peak flow while the downstream channel receives more subsurface flow contribution but decreases with peak flow as the downstream channel receives less (Biswal and Nagesh Kumar, 2013). The inconsistent responses in \hat{a} and b among theories indicate a complicated interaction between landscape structure and rainstorms during recession, implying that the recession mechanics in different regions need more exploration.

Tables 1 and S1 respectively summarize and compile previous empirical recession studies and two main takeaways are addressed: 1) The responses of \hat{a} and b to landscape features and structure are inconsistent. Such inconsistent results might be landscape dependent (e.g. different regional conditions). 2) These inconsistent recession responses might be due to different analysis methods. Most previous studies aggregated long-term data to a point-cloud, a collection of multiple recession curves, to retrieve representative recession parameters, while some recent studies retrieved parameters from individual events to elucidate the temporal variability of recession. Fewer studies simultaneously addressed recession responses to landscape structure and distinct rainstorm events. For example, Biswal and Nagesh Kumar (2013) found that the structure of drainage networks might result in contrasting directions in the response of b to peak flow. However, they did not specifically identify which landscape characteristics would predominantly influence the directional switch in the response of parameter b to rainfall.

Everything considered, the theory behind streamflow recession is still developing, and it is clear that we need a better understanding of how landscape structure and rainstorm characteristics affect streamflow recession, especially with the necessity of regional recession assessments under climate change. Thus, this study derived the recession coefficient and exponent in 19 mountainous catchments across Taiwan with multiyear records of hourly streamflow (291 events in total). These catchments, with drainage areas of 77–2,089 km², are characterized by steep, fractured, forested mountains and periodic typhoon invasions. As a result of these characteristics, Taiwan's rivers have short water residence time and limited water retention capacity (Lee et al., 2020). We addressed three research questions: (1) What are the recession characteristics of typhoon events in small mountainous catchments? (2) How do landscape and rainstorm variables affect recession parameters in different regions? (3) In what way do landscape variables regulate the response of recession parameters to rainfall? In this

study, we document the spatial patterns of recession parameters in Taiwan (Sect. 3) and then discuss how recession behaviors change in different landscape settings (Sect. 4).

2 Material and methods

2.1 Study area

70 Taiwan is a mountainous island geographically located at the juncture between the Eurasian and Philippine tectonic plates and climatologically located in the corridor of typhoons. An active mountain belt with frequent typhoons shapes a steep and fractured landscape with verdant forests. The mean annual rainfall is about 2,510 mm, and approx. 40% of annual rainfall is brought by typhoons within a few days. The lowest mean annual temperature is approx. 4°C in montane regions and 22°C in the coastal plains. The mountains of Taiwan reach an elevation of 4,000 m within a short horizontal distance (~75 km) from
75 the coast, creating a steep terrain (Huang et al., 2016). Specifically, the drainage area of most catchments is smaller than ~500 km², and stream lengths are less than ~55 km. The basic catchment descriptions, including landscape variables, can be found in Table S2. Land cover inventories from the Taiwan Ministry of the Interior (www.moi.gov.tw) were reclassified into three major categories, namely water (C_W), forest (C_F), agriculture (C_A), and others. The landscape metric was retrieved from the digital elevation model (DEM) with 20m resolution: A is the drainage area [km²]; DD is the drainage density [km km⁻²], defined
80 as the ratio of total stream length to drainage area; S_m is the gradient of the main stem [%]; HI is the hypsometric integral [-]; ELO is the basin elongation [-], defined as the ratio of the diameter of the circle with the same area as the basin to basin length.

In addition to the primary landscape variables described above, we incorporated flow path associated variables into our study, as flow path is an explicit proxy for aquifer systems. Within a gridded DEM, the flow path is defined as the route followed by water from a grid cell, following the surface flow direction towards the channel cell (see detail in Tetzlaff et al.,
85 2009). Specifically, flow path length L [m] is the length of this route, flow path height H [m] is the elevation difference between a specific cell to the channel cell, and G is the flow path gradient [-], defined as the flow path height divided by flow path length. As such, every grid cell possesses distinct values for L , H and G . Within a catchment, the medians of the L , H , and G distributions serve as representative flow path characteristics. Note that G can also be regarded as a surrogate of flow velocity (most equations used for estimating flow velocity needs gradient to represent the conversion from potential to kinetic energy).
90 Therefore, the composite ratio, L/G [m], can be a proxy for residence time (McGuire et al., 2005; Tetzlaff et al., 2009) and as a means to comprehend the interplay between landscape features and climate impacts on residence time (Seybold et al., 2017). The detailed definition and calculation of the flow path associated variables are illustrated in Table S3 in the supplement.

Streamflow in this steep mountainous island descends quickly after a typhoon invasion. Thus, hourly streamflow records are required to describe the entire streamflow recession since it only lasts a few days after the peak. This study collected hourly
95 streamflow records during 1986-2014 from the Taiwan Water Resource Agency (www.wra.gov.tw) and Tai-Power Company (www.taipower.com.tw). Only the catchments without large water division infrastructures in the upstream area and with total rainfall greater than 30 mm were used to avoid human-manipulated streamflow data. Based on these criteria, nineteen catchments and 291 events were included for further recession analysis. Commensurate with the hourly streamflow, the hourly

rainfall dataset from the Taiwan Central Weather Bureau (www.cwb.gov.tw) was collected, and the Thiessen weighted method was used to estimate areal rainfall in the corresponding catchments. The rainfall period was defined as the elapsed time from 6 h before the rising flow to the peak flow. Hydroclimate metrics of rainstorm and streamflow, including total precipitation (P), duration (D), average precipitation intensity (I_{avg}), total streamflow (Q_{tot}), peak flow (Q_p), antecedent streamflow (Q_{ant}), and runoff coefficient (Q_{tot}/P), were extracted from these datasets (Table S3 and S4).

2.2 Recession analysis

The storage-outflow relationship is typically described by a power law if treating the catchment as a black box. The representative storage is, in fact, composed of many aquifers and thus exhibits a non-linear relationship:

$$Q = mS^n \quad (1)$$

where S is the storage volume within a catchment (in units of volume [L^3] or depth [L]), Q is the rate of streamflow ($[L^3/T]$ or $[L/T]$), and m and n are constants (Vogel and Kroll, 1992). Since S is difficult to directly measure, the relationship between the rate of streamflow decline and streamflow could be derived to represent the recession behavior (Brutsaert and Nieber, 1977) in Eq. (2).

$$-\frac{dQ}{dt} = nm^{\frac{1}{n}}Q^{\frac{2n-1}{n}} = \hat{a}Q^b \quad (2)$$

where \hat{a} is the recession rate and b represents the nonlinearity of storage, which is also the slope of the regression line in the plot of $\log(-dQ/dt)$ vs $\log(Q)$ (the recession plot). Both parameters can be estimated via different assumptions and fitting techniques. Notably, since nonlinearity is dimensionless, \hat{a} is inherently strongly dependent on the units of Q and b via fitting (see details in section 2.2.2). Although the recession plot enables the analysis of streamflow recession and facilitates the derivation of the storage-outflow relationship (Stölzle et al., 2013), the methods of recession segment extraction affect parameter estimation. For example, Stölzle et al. (2013) compared three extraction methods in conjunction with their corresponding parameter estimations. They found that recession characteristics, like recession time ($1/\hat{a}$), varied over 1–2 orders of magnitude, yet nonlinearity, b , varied rather narrowly. Their results suggested that the recession characteristics derived from different procedures have only limited comparability. Further, Dralle et al. (2017) found that the relationship between \hat{a} and antecedent wetness was sensitive to the number of data points and thus the extraction method. Despite the estimated parameters being inconsistent among the procedures, applying the same procedure is still a feasible way to capture the recession responses in a region.

2.2.1 Recession segment extraction

In the extraction procedure, two concerns should be addressed: (1) distinguishing between the early and late recession stages, and (2) eliminating any unexpectedly positive increases in the recession. The early stage (containing pre-storm and surface flow) and the late stage of recession (dominated only by base flow) are indistinguishable and usually determined subjectively.

Some studies have empirically excluded the early-stage recession to eliminate the influence of quick flow (e.g., Brutsaert, 2008; Vogel and Kroll, 1992). Others used a threshold for the minimum length of extraction procedures, which ranged from 2 to 10 days (e.g., Mendoza et al., 2003; Vogel and Kroll, 1992). For eliminating unexpected positive increases during recession, several approaches have been proposed as well, for example, smoothing the hydrograph (Vogel and Kroll, 1992), discarding
135 the segment entirely (Brutsaert, 2008; Kirchner, 2009), and breaking-and-rejoining the recession segments (Millares et al., 2009). Each strategy has its advantages and disadvantages; smoothing the hydrograph may not completely erase the bulges caused by precipitation and discarding the segment loses parts of recession events. Although breaking-and-rejoining the recession, too, disturbs the original streamflow records, the method which maintains the more complete recession event is preferable here.

140 For the recession segment extraction, first, the recession evolution caused by rainstorms was a main concern, and thus we selected the whole recession segment from the peak flow of all individual rainstorm. The whole recession segment represents the interactive mixing of quick and base flow. Second, we screened and broke down the hydrograph where abrupt bulges emerged, erased positive streamflow increases, and concatenated the remaining segments. This elimination procedure produces a curve quite similar to the master recession curve on a long-term scale (Millares et al., 2009). Third, data points corresponding
145 to extremely low streamflow ($Q < 0.1 \text{ mm h}^{-1}$) or recession ($-dQ/dt < 0.01 \text{ mm h}^{-2}$), being likely affected by the limits of streamflow measurement, were excluded. Fourth, rainfall events with an unreasonable ratio of total flow to total rainfall ($Q/P > 1.1$ or $Q/P < 0.1$) were also excluded to guarantee the data quality. Ultimately, a total of 298 rainstorms were selected for further parameter estimation.

2.2.2 Parameter fitting

150 In recession analysis, several fitting methods have been proposed. One approach involves fitting the lower envelope of a collection of multiple recession curves, which is referred to as point-cloud (Brutsaert and Nieber, 1977). Taking the lower envelope can prevent evapotranspiration effect which leads to higher values of $-dQ/dt$. Another is to fit with the entire point-cloud (Brutsaert, 2005; Vogel and Kroll, 1992) as subsoil heterogeneity may overshadow the evapotranspiration effect in larger or steeper catchments (Brutsaert, 2005). Yet another is to fit with the binned means weighted by the square of the standard
155 error of each binned mean (Kirchner, 2009) because the lower values of $-dQ/dt$ could be affected by the measurement errors in the streamflow observations. Recently, a virtual experiment study (Jachens et al., 2020) suggested fitting with individual recession segments to explore the recession responses to individual rainstorms.

The parameter estimation from the retrieved recession segments is described below. Firstly, we corrected low-flow records: The same low flow levels appear frequently in late recession due to the detection limit of instruments, resulting in a series of
160 zero $-dQ/dt$ values that affect parameter estimation, particularly for b . To reduce this bias, we applied the exponential time step method (Roques et al., 2017) in which the time step of the moving window for calculating $-dQ/dt$ exponentially increases along the recession. This extended sampling period helps avoid the occurrence of zero $-dQ/dt$ values (Roques et al., 2017).

An important concern in recession parameter estimation is the dependence between \hat{a} and b , which confounds the interpretation of parameters (Dralle et al., 2015). The decorrelation method assumes that the observed flow, Q , consists of a

165 scale-free flow \hat{Q} and a constant k ($Q = k\hat{Q}$). Thus, the power law formula can be rewritten as $-dQ/dt = ak^{b-1}\hat{Q}^b$, where a is the scale-free recession coefficient [h^{-1}]. For correcting \hat{a} to a , the observed flow Q was divided by a constant Q_0 (which is ideally equal to $1/k$, see detail in Dralle et al., 2015):

$$Q_0 = \exp\left(-\frac{\sum_{i=1}^N (b_i - \bar{b})(\log(\hat{a}_i) - \overline{\log(\hat{a}_i)})}{\sum_{i=1}^N (b_i - \bar{b})^2}\right) \quad (3)$$

170 where \bar{b} and $\overline{\log(\hat{a})}$ is the means of the fitted parameters b $\{b_1, b_2, \dots, b_N\}$ and $\log(\hat{a})$ $\{\log(\hat{a}_1), \log(\hat{a}_2), \dots, \log(\hat{a}_N)\}$, respectively, across N rainfall events in a given catchment. Although the decorrelation method can reduce the unit effect and dependency on b , Biswal (2021) argued that the dependency of \hat{a} and b can't be fully decoupled, and retrieving parameters from the power law and fixing b is preferable. Obviously, decoupling the dependency of \hat{a} and b in recession is unsolved and challenging and necessitates further study. Nevertheless, after the decorrelation process, the number of catchments with a high correlation between a and b ($R^2 > 0.1$) decreased from 9 to 2, apparently mitigating the unit-effect and dependency of b . Finally, 175 events with low goodness of fit ($R^2 < 0.5$) were discarded. As a result, 291 events and all watersheds, with 5 to 26 events each (Table S4), were included for exploring the landscape and rainstorm effects. Each individual storm event may not necessarily occur in all catchments.

3. Results

180 3.1. Recession parameters from individual and point-cloud fits

The streamflow recession plots of catchments W9, W5, and W8, as examples, are illustrated in Fig. 2. The three catchments have distinct differences in landscape, particularly in drainage area (A) and the ratio of flow-path length to gradient (L/G). Catchment W9 has a larger A and lower L/G , W5 has a smaller A and lower L/G , and W8 has a smaller A but higher L/G , see Table S2 for catchment details. Median b values, in descending order, were 2.34 in catchment W9, 1.96 in W5, and 1.63 in 185 W8. The point-cloud-derived b values were 1.45 (W9), 1.37 (W5), and 0.88 (W8), showing that point-cloud-derived b values are smaller than median-derived values (Fig. 2c). Notably, the exponent b decreases with storm magnitude in W5 and W8 but increases with storm magnitude in W9 (Fig. 2b and 2c). The contradictory responses observed in these three catchments might be attributed to variations in their landscape structure and rainstorm characteristics. This apparent association is explored further in the Discussion section.

190 The frequency distributions of the fitted recession coefficients and nonlinearities from all catchments and event records are shown in Figure 3a-b. Recession coefficient a ranged from 0.003 to 0.273 hr^{-1} with a mean of 0.059 hr^{-1} and median of 0.047 hr^{-1} . The large difference between the median and mean reflects a right-skewed distribution. Exponent b ranged from 0.90 to 4.39 with a mean of 1.76 and median of 1.69. The small difference between the median and mean suggests a relatively symmetric distribution. Spatial patterns of recession coefficient and exponent b are illustrated in Fig. 3c-d. Generally, larger 195 recession coefficients were seen in the southwestern plain catchments (Fig. 3c), which have higher L/G ratios. Apart from this,

no other distinct pattern can be found in other, more mountainous catchments. Conversely, the plot of recession nonlinearity shows no clear connection to large-scale landscape features on the island (Fig. 3d).

The recession parameters derived from individual segments and aggregated point-cloud data are illustrated in Fig. 4. The variations of recession responses from individual segments differed greatly among catchments. For parameter a , point-cloud-derived values, which aggregate all recession segments in a catchment, are much larger than the coefficients from individual segments. Notably, when the catchment size exceeds approximately 500 km² (W19), the point-cloud-derived coefficients become similar to the third quantile of the coefficient distribution from individual segments. For exponent b , the values derived from the point-cloud are consistently close to the lower limit of the distribution of the individual segment-derived values and the median and interquartile range of exponent b derived from individual segments are not correlated with drainage area. These distinct differences between coefficients and exponent b from the two fitting methods make comparison and interpretation difficult. The details of the recession characteristics for each catchment can be found in Table S5.

3.2 Relationships between recession parameters and event/landscape variables

To capture how rainfall forcing affects streamflow recession, correlation analyses were performed. The correlation coefficients between recession parameters and event-associated variables are shown in Fig. 5 and Table 2. The total precipitation (P), duration (D), total streamflow (Q_{tot}), antecedent streamflow (Q_{ant}), and runoff coefficient (Q_{tot}/P) were negatively correlated with the recession coefficient, a . The average precipitation intensity (I_{avg}) and peak flow (Q_p), both of which represent the rainstorm magnitude, were not significantly correlated to a . As for initial event conditions, the 7-day antecedent precipitation, AP_{7day} , defined as the seven-day rainfall amount prior to a rainstorm, was not correlated to a , nor were other AP period lengths (3-, 5-, 14-, and 30-day). Unlike the recession coefficient, exponent b was only correlated with two, Q_{ant} and Q_p , with positive and negative correlations, respectively. This indicates that higher antecedent flow could lead to higher nonlinearity and peak flow to lower. Overall, hydrometric forcing moderately controls the coefficient and only slightly affects nonlinearity.

Regarding landscape variables, the average height (H), length (L), and gradient (G) of the flow-path were approx. 120 m, 252 m, and 0.47, respectively (Table S2). The mean L/G value for our catchments was approx. 951m. Forest coverage (C_F), ranging between 11.8-92.1%, was the dominant landscape type for most mountainous catchments. Notably, the catchments in the western plain are characterized by gentle gradients of flow-path, such as catchments W8, W9, W11, W12, W13, and W14, where agricultural are the dominant land cover. The correlations of recession parameters against landscape variables are illustrated in Fig. 5 and Table 2. Most landscape variables (H , L , G , L/G , DD , S_m , HI , C_w , C_F , and C_A) are significantly correlated with the coefficient, particularly the flow-path-associated ones (H , L , G , L/G , and DD). Flow-path height (H), length (L), and gradient (G) were negatively correlated to the coefficient, but L/G and DD were positively correlated. Additionally, the coefficient increases as HI and S_m decrease. Looking at land cover, the coefficient increases with C_w (proportion of water body land cover) and C_A (proportion of agriculture land cover) and decreases with C_F (proportion of forest land cover). Greater water-body or agricultural land area in a catchment lead to a faster recession, yet greater forested land area can slow recession. Correlations between b and the landscape variables were generally weaker and of the opposite sign than the correlations seen with a . There were also less significant correlations. In short, most landscape variables are moderately associated with the

230 coefficient and low-to-moderately with exponent b . Perhaps, putting all catchments with various landscape features together would obscure the landscape's control in recession.

4. Discussion

4.1 Recession parameters in small mountainous rivers

235 The point-cloud estimates are distinctly different from the estimates from the individual recessions (Fig. 4). The larger a and smaller b values derived from the point-cloud compared to those derived from individual segments could be expected due to the influence of antecedent flow and superimposition of recession events (Jachens et al., 2020). Since a and b are inherently dependent and while the decorrelation method might be only valid for some specific cases (Biswal, 2021), the way (e.g. fixing b) to obtain the a or b of an individual event is still goal-dependent (Sharma and Biswal, 2022). Even so, using the median from individual segments is suggested, compared to the point-cloud derivation (Dralle et al., 2017; Jachens et al., 2020).

240 Higher median recession coefficients were found in W8, W11, W12, and W14, which we attributed to the landscape features of shorter and gentler flow paths, i.e., dense drainage networks. By contrast, catchments with longer and steeper flow paths, such as W7 and W15, have lower median recession coefficients. Taken together, these data demonstrate how drainage density and flow-path-associated variables can affect the recession coefficient. The findings presented in Table 2 corroborate this (discussed more in Sect. 4.2). On the other hand, the median of exponent b , is approx. 1.69 (Fig. 3b) with a range of 0.90 to
245 4.39, also comparable to the ranges found in the literature. For example, values of b from 0.5 to 2.1 could be found in 220 Swedish catchments with low-flow data (Bogaart et al., 2016), 0.6 to 1.7 for 22 Taiwanese rivers derived from low-flow data (Yeh and Huang, 2019), and 1.5 to 3.2 for 67 USA watersheds with event data (Biswal and Marani, 2010). Non-linear storage-outflow relationships (b is not equal to 1.0) are prevalent for most catchments worldwide. In our cases, the highest and lowest median values of b were found in W7 and W19, respectively. Despite the fact that these two catchments have similar landscape
250 structures, their exponent b exhibits distinct differences. Perhaps, other controlling factors, such as geological structure (i.e., connectivity between the deep aquifer and the stream, heterogeneous hydraulic properties, and/or the interface slope between the shallow and bedrock layers, see Roques et al., 2022) or land cover (Tague and Grant, 2004), might alter recession behavior as well.

4.2 Landscape structure controls on the median of recession parameters

255 Landscape structure aggregates catchment hydraulic properties, embodying recession parameters conceptually. Therefore, recession behaviors in a catchment could be interpreted from two perspectives, hillslope hydraulics and inter-hillslope heterogeneity (Harman et al., 2009), both of which could be represented by the flow-path-associated variables (e.g., H , L , G , L/G , and DD in Table 2) and drainage area. Notably, heterogeneity increases with drainage area because of the possibility of including a wider range of subsurface conditions. Recession nonlinearity also increases with drainage area since a larger area
260 accommodates more possibility of superimposition of multiple linear reservoirs, which has been seen in the 68 km² Mahurangi

watershed, New Zealand (McMillan et al., 2014), and the 41 ha Panola Mountain Research Watershed, USA (Clark et al., 2009; Harman et al., 2009), though this does not appear to be the case in our study (Fig. 6a).

The correlation analysis showed that flow-path-associated variables (H , L , G , L/G , DD) only have a weak correlation with the recession nonlinearity (Table 2). This could have two explanations: First, some of our catchments are much larger than
265 500 km², which far exceeds the extent of common rainstorms (usually less than 200 km²). In these large catchments, the limited extent of rainstorms would not bring about a comprehensive recession response in the outflow hydrograph (Huang et al., 2012). Second, the drainage area cannot reflect the unknown number of aquifers (Ajami et al., 2011). Moreover, Karlsen et al. (2019) argued that the dependence of b on landscape variables would change with the streamflow rate. Specifically, flow path height, H , dominates the nonlinearity during high flow, whereas the drainage area, A , gains more importance during low flow. The
270 relationship between flow-path-associated variables and drainage area and recession needs to be examined in our catchments.

4.2.1 Landscape structure controls on recession coefficient a

Since drainage area could not solely explain our recession behaviors (Fig. 6a), the flow-path-associated variables and drainage area were used to classify the catchments. Surprisingly, an inverse relationship between the L/G ratio and drainage area emerged (Fig. 6b). The L/G ratio, in fact, is highly correlated to DD and the topographic wetness index (Beven and Kirkby,
275 1979) and is apt to represent the hillslope hydraulics at a catchment scale. In Fig. 6b, all catchments could be simply classified into three types: type A are large catchments (area > 500 km²), B are small catchments with low L/G , and C are small catchments with high L/G . Another correlation analysis was performed between recession parameters and the flow-path-associated variables (H , L , L/G , and DD) according to these classifications (Fig. 7). The recession coefficients significantly correlated with the flow-path-associated variables, particularly in small catchments (Type B and C only). Our variable H ,
280 which exhibits a negative correlation with the recession coefficient, likely suggests that our groundwater flow paths possess greater depth and length, consequently leading to slower drainage rates. Although flow path height, H , denoting potential energy is a component of gradient, it does not necessarily correspond to hydraulic gradient due to the geologic and soil settings varying across regions (Karlsen et al., 2019). Besides, high DD and short L indicate shorter flow paths and thus lead to a higher recession coefficient. In our cases, Type C catchments are characterized by short L and very small H and thus have high L/G
285 ratios and recession coefficients (solid orange dots in Fig. 7c). Individually, extended L or gentle G is conducive to flow accumulation. Thus, the L/G ratio, which integrates both length and gradient, serves as a good proxy for estimating residence time (McGuire et al., 2005; Asano and Uchida, 2012). While the equivalent composite ratio can result from either L or G , the relationship between recession parameters and L/G has the potential to establish a further linkage between recession parameters and water residence time.

290 4.2.2 Landscape structure controls on recession nonlinearity b

The recession nonlinearity conditionally responds to landscape structure (Fig. 7e-7h). If Type A catchments (large area with low L/G , gray solid dots in Fig. 7) are excluded, all flow-path-associated variables become significantly correlated with exponent b . The positive relationship of b with H indicates that steeper and rougher hillslopes present non-linear recession

behavior. Perhaps with the increase of L , subsurface runoff has more chances of flowing through various blocks (e.g., temporarily perched groundwater). The two composite ratios, DD and L/G , are negatively related to the value of b (Fig. 7g-h). Short-and-gentle hillslopes, like Type C catchments, are conducive to larger saturation areas during rainstorms (Bogaart et al., 2016; Sayama et al., 2011), and the expansion of the saturation area indicates that the whole subsurface becomes saturated and connected well, thus reducing heterogeneity. It suggested that the L/G ratio affects the nonlinearity significantly for small catchments; however, it is not the cases of our large catchments, which necessitates further interpretation associated with scale.

300 **4.3 Rainfall amount controls on the variation of recession parameters**

Recession behavior is a convolutional response starting as rain falls within catchments. Thus, we separately examined the recession parameters against hydrometric variables for the three catchment types (Types A, B, and C) to rule out the influences (Fig. 8). This produced two significant findings: (1) the recession coefficient, a , decreases with the rainfall amount in all types and (2) the exponent b shows contrasting responses in Type A and B (Type C is statistically insignificant). In heterogeneity-dominated (large) or hydraulics-dominated (small and steep) catchments, exponent b increases or decreases with rainfall amount, respectively.

4.3.1 Rainfall amount controls on recession coefficient a

Several empirical studies found a positive or independent relationship between a and streamflow; for example, Santos et al. (2019) found that higher streamflow produced a greater a value, reflecting a quick recession in Switzerland's catchments. In Sweden, annual rainfall variation might be independent of the a (Bogaart et al., 2016). However, most studies found a negative relationship between a and storage measures (Table 1). For instance, Biswal and Nagesh Kumar (2014) found a negative correlation between a and the antecedent flow rate, while Ghosh et al. (2015) found that high peak flow events tend to produce a small value of a . In our study, the recession coefficients decreased with rainfall amount in all catchment types (Fig. 8a-c). Harman et al. (2009) demonstrated that the recession coefficient can be expressed as $a = V_0/R^{b-1}$ (where V_0 and R represent the mean of the velocity distribution of hillslope flow and rainfall rate, respectively). In the case of heavy rainfall, the increase of R is much larger than that of V_0 . The effect of this disproportionate rainfall input increase on a could offset the increase in flow velocity, resulting in a negative correlation. Moreover, Biswal and Nagesh Kumar (2014) used a geomorphological recession flow model $a \propto c/q^{b-1}$ (where c and q represent the celerity and rate of channel flow, respectively, and which is similar to Harman's theory) to explain why " a " is negatively correlated with " q ." To sum up, the negative correlation between coefficient a and rainfall amount (e.g. peak flow and prior soil moisture) is consistent with the literature and is prevalent in most regions (also see Table 1).

4.3.2 Opposing controls of rainfall on recession nonlinearity b

Literature covering the variation of recession nonlinearity among events is divergent. Previous studies concluded that nonlinearity is controlled by landscape structure and is static or insensitive to rainfall (Biswal and Marani, 2010; Brutsaert and Nieber, 1977; Dralle et al., 2017). In other studies, nonlinearity decreases with streamflow rate, albeit on different temporal

scales (Shaw and Riha, 2012; Karlsen et al., 2019; Santos et al., 2019), while nonlinearity has been shown to increase with antecedent flow (Jachens et al., 2020). Furthermore, some studies have even argued that nonlinearity can change over the duration of an event dynamically (Rupp and Selker, 2006; Luo et al., 2018; Roques et al., 2022). Across all catchments, we observed an augmentation of exponent b with antecedent flows, but a decline with peak flow (Fig. 5). This augmentation can be attributed to the overlay of recession event flows onto antecedent flows, amplifying the value of b (Jachens et al., 2020). The inverse correlation between b and peak flow suggests that in the majority of catchments, the existence of active fast flow paths could potentially reduce the recession nonlinearity.

Further, our exponent b showed a positive, negative, and flat relationship with rainfall in Type A, B, and C catchments, respectively (Fig. 8d-f). Small catchment areas (Type B and C catchments) may be explained by a 2-dimensional hillslope model (Roques et al., 2022). During heavy rainfall, when fast flow pathways are activated, the exponent b would decrease (Type B catchments, Steep slopes), whereas Type C catchments (gentle slopes) with more homogeneous hydraulic conductivity would experience smaller changes in exponent b . Conversely, the exponent b , increases with the rainfall amount in Type A catchments. In large and heterogeneous catchments, the expansion of the contributing area is less steady and more complicated, and thus the nonlinearity increases with rainfall amount. A contrasting response of exponent b to rainfall similar to the one seen in this study was also found in Biswal and Nagesh Kumar (2013), which attributed it to the change in subsurface flow contributions along the channel that affect the response direction of b . Our study revealed that landscape structure (mainly by A and L/G) and rainfall amount control the direction and magnitude of recession response, respectively. Future research could consider different landscape structures when modeling the intra-event variation of b .

4.4 Landscape structure regulates recession behavior

The above two sections have demonstrated the influence of landscape and rainfall amount on streamflow recession behavior. Thus, a perceptual model which demonstrates the interactive regulation of landscape structure and rainfall amount on recession nonlinearity is introduced (Fig. 9). Landscape structure is considered in two contexts, spatial heterogeneity (drainage area) and hillslope hydraulics (L/G). The drainage area may correlate to the number of perched storages within the catchments, and the L/G ratio, encapsulating hillslope geometry, can indicate the dynamics of the contributing area associated with runoff generation. Along the spatial heterogeneity dimension (from Type B to A, with increasing drainage area), additional perched storages respond increasingly with rainfall amount and thus enhance the recession nonlinearity. Perched storages are expected to occur where the hydraulic conductivity abruptly decreases due to heterogeneous soil properties or geological structures. The existence of perched storages was found in an experimental forested catchment in Taiwan through an intensive soil water monitoring scheme (Liang, 2020). Large catchments may suffer uneven spatial rainfall, which activates perched storages locally, and thus, the nonlinearity increases. On the other hand, along the L/G dimension (increasing from Type B to C), the heterogeneities of hydraulic conductivities decrease. Heavy rainfall, causing saturation and expansion of the saturation area, can mediate the heterogeneity of hydraulic conductivity and thereby reduce nonlinearity.

5. Summary

Streamflow recession, which reflects the rainfall-runoff process after rainstorms, is crucial for baseflow assessment. This study investigated the effects of landscape structure and rainfall amount on recession using power-law recession analysis for 291 rainfall events in small mountainous rivers. In these catchments, the recession coefficient is moderately correlated to landscape structure while nonlinearity is only weakly correlated to landscape structure. If classifying the catchments in accordance with spatial heterogeneity (drainage area) and hillslope hydraulics (L/G), the recession coefficient increases with L/G and nonlinearity decreases with L/G significantly in small catchments. This likely reveals that both spatial heterogeneity and hydraulic properties regulate recession simultaneously. Along the hillslope hydraulics dimension, small catchments with high L/G attributed to their short-and-gentle hillslopes, have higher recession coefficients. Additionally, L/G is negatively correlated to nonlinearity for small catchments, perhaps because short-and-gentle hillslopes can expand saturation area and connect different aquifers easily, thus reducing nonlinearity. Note that a and b are inherently dependent so that some uncertainty might be involved. Even so, both parameters, whether derived using the point-cloud or individual segments (Fig. 4), present similar fluctuations among catchments, which supports our arguments.

Rainfall amount affects the recession coefficient. It decreases with rainfall amount for all catchments. On the other hand, contrasting response directions of nonlinearity to rainfall amount could be found along the dimension of spatial heterogeneity (drainage area). Larger catchments exhibited an increase in recession nonlinearity with higher rainfall, whereas smaller catchments showed a decrease in recession nonlinearity with higher rainfall. Conjointly, an interactive regulation of recession by landscape structure and rainfall amount was proposed. In summary, landscape structure (spatial heterogeneity and hillslope hydraulics) may determine the recession behavior via various aquifer settings, and the rainfall amount tunes the magnitude of recession nonlinearity. If the perceptual model is valid, two challenges should be addressed further. First, the contrasting response direction of nonlinearity to rainfall, depending on the predominance of spatial heterogeneity, requires further theoretical validation. Clarifying which environmental factors could represent the spatial heterogeneity and hillslope hydraulics is also an arduous task but is crucial for recession estimation. Second, the careful determination of the response direction of nonlinearity is crucial to the regional recession assessment. An incorrect direction would strongly affect the interpretation, particularly for climatic scenarios. Validating the landscape structure control in rainstorm scale would aid in completing the understating of recession variations.

385 *Data availability.* Hourly streamflow data can be obtained from Taiwan Water Resource Agency and Tai-Power company.
The authors declare that data supporting the findings of this study are accessible from the article and its supplementary
materials.

Author contributions. Conceptualization and Methodology: JYL and JCH. Data Curation and Validation: TYL. Formal
390 analysis: JYL and CJY. Investigation and Writing – Original Draft: JYL. Writing – Review and Editing: JCH and TRP.

Competing interests. The authors claim no potential competing interests

Acknowledgements. This research was funded by the Ministry of Science and Technology, Taiwan (110-2811-M-005-509, and
395 109-2811-B-002-631) and the NTU Research Center for Future Earth (107L901004). J. Y. Lee and C. J. Yang was supported
by the grants from Ministry of Science and Technology, Taiwan (110-2811-M-005-521, 110-2917-I-564-009).

References

- Ajami, H., Troch, P. A., Maddock III, T., Meixner, T., and Eastoe, C.: Quantifying mountain block recharge by means of catchment-scale storage-discharge relationships, *Water Resour. Res.*, 47, W04504, <https://doi.org/10.1029/2010WR009598>, 2011.
- Asano, Y., and T. Uchida: Flow path depth is the main controller of mean base flow transit times in a mountainous catchment, *Water Resour. Res.*, 48, W03512, <https://doi.org/10.1029/2011WR010906>, 2012.
- Beven, K. J. and Kirkby, M. J.: A physically based, variable contributing area model of basin hydrology, *Hydrol. Sci. J.*, 24, 43–69, <https://doi.org/10.1080/02626667909491834>, 1979.
- Biswal, B. and Marani, M.: Geomorphological origin of recession curves, *Geophys. Res. Lett.*, 37, L24403, <https://doi.org/10.1029/2010GL045415>, 2010.
- Biswal, B. and Nagesh Kumar, D.: Study of dynamic behaviour of recession curves, *Hydrol. Process.*, 28, 784–792, <https://doi.org/10.1002/hyp.9604>, 2014.
- Biswal, B., and Nagesh Kumar, D.: A general geomorphological recession flow model for river basins. *Water Resour. Res.*, 49(8), 4900–4906, <https://doi.org/10.1002/wrcr.20379>, 2013.
- Biswal, B.: Decorrelation is not dissociation: there is no means to entirely decouple the Brutsaert-Nieber parameters in streamflow recession analysis, *Adv. Water. Resour.*, 147, 103822, <https://doi.org/10.1016/j.advwatres.2020.103822>, 2021.
- Bogaart, P. W., Van Der Velde, Y., Lyon, S. W., and Dekker, S. C.: Streamflow recession patterns can help unravel the role of climate and humans in landscape co-evolution, *Hydrol. Earth Syst. Sci.*, 20, 1413–1432, <https://doi.org/10.5194/hess-20-1413-2016>, 2016.
- Brutsaert, W. and Nieber, J. L.: Regionalized drought flow hydrographs from a mature glaciated plateau, *Water Resour. Res.*, 13, 637–643, <https://doi.org/10.1029/WR013i003p00637>, 1977.
- Brutsaert, W.: *Hydrology: an introduction*, Cambridge university press, <https://doi.org/10.1017/CBO9780511808470>, 2005.
- Brutsaert, W.: Long-term groundwater storage trends estimated from streamflow records: Climatic perspective, *Water Resour. Res.*, 44, W02409, <https://doi.org/10.1029/2007WR006518>, 2008.
- Clark, M. P., Rupp, D. E., Woods, R. A., Tromp-van Meerveld, H., Peters, N., and Freer, J.: Consistency between hydrological models and field observations: linking processes at the hillslope scale to hydrological responses at the watershed scale, *Hydrol. Process. Int. J.*, 23, 311–319, <https://doi.org/10.1002/hyp.7154>, 2009.
- Dralle, D. N., Karst, N. J., Charalampous, K., Veenstra, A., and Thompson, S. E.: Event-scale power law recession analysis: quantifying methodological uncertainty, *Hydrol. Earth Syst. Sci.*, 21, 65–81, <https://doi.org/10.5194/hess-21-65-2017>, 2017.
- Dralle, D., Karst, N., and Thompson, S. E.: a, b careful: The challenge of scale invariance for comparative analyses in power law models of the streamflow recession. *Geophys. Res. Lett.*, 42(21), 9285–9293, <https://doi.org/10.1002/2015GL066007>, 2015.
- Harman, C. J., Sivapalan, M., and Kumar, P.: Power law catchment-scale recessions arising from heterogeneous linear small-scale dynamics, *Water Resour. Res.*, 45, W09404, <https://doi.org/10.1029/2008WR007392>, 2009.

- Huang, J.-C., Lee, T.-Y., and Lee, J.-Y.: Observed magnified runoff response to rainfall intensification under global warming, *Environmental Research Letters*, 9, 034008, <https://doi.org/10.1088/1748-9326/9/3/034008>, 2014.
- 435 Huang, J.-C., Lee, T.-Y., Lin, T.-C., Hein, T., Lee, L.-C., Shih, Y.-T., Kao, S.-J., Shiah, F.-K., and Lin, N.-H.: Effects of different N sources on riverine DIN export and retention in a subtropical high-standing island, Taiwan, *Biogeosciences*, 13, 1787–1800, <https://doi.org/10.5194/bg-13-1787-2016>, 2016.
- Huang, J.-C., Yu, C.-K., Lee, J.-Y., Cheng, L.-W., Lee, T.-Y., and Kao, S.-J.: Linking typhoon tracks and spatial rainfall patterns for improving flood lead time predictions over a mesoscale mountainous watershed, *Water Resour. Res.*, 48, W09540, <https://doi.org/10.1029/2011WR011508>, 2012.
- 440 Jachens, E. R., Rupp, D. E., Roques, C., and Selker, J. S.: Recession analysis revisited: impacts of climate on parameter estimation, *Hydrol. Earth Syst. Sci.*, 24, 1159–1170, <https://doi.org/10.5194/hess-24-1159-2020>, 2020.
- Karlsen, R. H., Bishop, K., Grabs, T., Ottosson-Löfvenius, M., Laudon, H., and Seibert, J.: The role of landscape properties, storage and evapotranspiration on variability in streamflow recessions in a boreal catchment, *J. Hydrol.*, 570, 315–328, <https://doi.org/10.1016/j.jhydrol.2018.12.065>, 2019.
- 445 Kirchner, J. W.: Catchments as simple dynamical systems: Catchment characterization, rainfall-runoff modeling, and doing hydrology backward, *Water Resour. Res.*, 45, W02429, <https://doi.org/10.1029/2008WR006912>, 2009.
- Lee, J.-Y., Shih, Y.-T., Lan, C.-Y., Lee, T.-Y., Peng, T.-R., Lee, C.-T., Huang, J.-C.: Rainstorm Magnitude Likely Regulates Event Water Fraction and Its Transit Time in Mesoscale Mountainous Catchments: Implication for Modelling Parameterization. *Water*, 12, 1169, <https://doi.org/10.3390/w12041169>, 2020.
- 450 Liang, W. L.: Dynamics of pore water pressure at the soil–bedrock interface recorded during a rainfall-induced shallow landslide in a steep natural forested headwater catchment, Taiwan. *J. Hydrol.*, 587, 125003, <https://doi.org/10.1016/j.jhydrol.2020.125003>, 2020.
- Luo, Z., Shen, C., Kong, J., Hua, G., Gao, X., Zhao, Z., Zhao, H., and Li, L.: Effects of unsaturated flow on hillslope recession characteristics. *Water Resour. Res.*, 54(3), 2037-2056, <https://doi.org/10.1002/2017WR022257>, 2018
- 455 McGuire, K., McDonnell, J. J., Weiler, M., Kendall, C., McGlynn, B., Welker, J., and Seibert, J.: The role of topography on catchment-scale water residence time, *Water Resour. Res.*, 41, W05002, <https://doi.org/10.1029/2004WR003657>, 2005.
- McMillan, H., Gueguen, M., Grimon, E., Woods, R., Clark, M., and Rupp, D. E.: Spatial variability of hydrological processes and model structure diagnostics in a 50 km² catchment, *Hydrol. Process.*, 28, 4896–4913, <https://doi.org/10.1002/hyp.9988>, 2014.
- 460 Mendoza, G. F., Steenhuis, T. S., Walter, M. T., and Parlange, J.-Y.: Estimating basin-wide hydraulic parameters of a semi-arid mountainous watershed by recession-flow analysis, *J. Hydrol.*, 279, 57–69, [https://doi.org/10.1016/S0022-1694\(03\)00174-4](https://doi.org/10.1016/S0022-1694(03)00174-4), 2003.
- Millares, A., Polo, M. J., and Losada, M. A.: The hydrological response of baseflow in fractured mountain areas, *Hydrol. Earth Syst. Sci.*, 13, 1261–1271, <https://doi.org/10.5194/hess-13-1261-2009>, 2009.

- 465 Palmroth, S., Katul, G. G., Hui, D., McCarthy, H. R., Jackson, R. B., and Oren, R.: Estimation of long-term basin scale evapotranspiration from streamflow time series, *Water Resour. Res.*, 46, W10512, <https://doi.org/10.1029/2009WR008838>, 2010.
- Roques, C., Rupp, D. E., and Selker, J. S.: Improved streamflow recession parameter estimation with attention to calculation of $-dQ/dt$. *Adv. Water Resour.*, 108, 29-43, <https://doi.org/10.1016/j.advwatres.2017.07.013>, 2017.
- 470 Roques, C., Rupp, D. E., de Dreuzy, J.-R., Longuevergne, L., Jachens, E. R., Grant, G., Aquilina, L., and Selker, J. S.: Recession discharge from compartmentalized bedrock hillslopes, *Hydrol. Earth Syst. Sci.*, 26, 4391–4405, <https://doi.org/10.5194/hess-26-4391-2022>, 2022.
- Rupp, D. E., and Selker, J. S.: On the use of the Boussinesq equation for interpreting recession hydrographs from sloping aquifers. *Water Resour. Res.*, 42(12), <https://doi.org/10.1029/2006WR005080>, 2006.
- 475 Santos, A. C., Portela, M. M., Rinaldo, A., and Schaefli, B.: Estimation of streamflow recession parameters: New insights from an analytic streamflow distribution model, *Hydrol. Process.*, 33, 1595–1609, <https://doi.org/10.1002/hyp.13425>, 2019.
- Sayama, T., McDonnell, J. J., Dhakal, A., and Sullivan, K.: How much water can a watershed store?, *Hydrol. Process.*, 25, 3899–3908, <https://doi.org/10.1002/hyp.8288>, 2011.
- Seybold, H., Rothman, D. H., and Kirchner, J. W.: Climate's watermark in the geometry of stream networks. *Geophysical Research Letters*, 44(5), 2272-2280, <https://doi.org/10.1002/2016GL072089>, 2017.
- 480 Sharma, D. and Biswal, B.: Recession curve power-law exponent estimation: is there a perfect approach?, *Hydrol. Sci. J.*, 67(8), 1228–1237, <https://doi.org/10.1080/02626667.2022.2070022>, 2022.
- Shaw, S. B. and Riha, S. J.: Examining individual recession events instead of a data cloud: Using a modified interpretation of $dQ/dt-Q$ streamflow recession in glaciated watersheds to better inform models of low flow, *J. Hydrol.*, 434, 46–54, <https://doi.org/10.1016/j.jhydrol.2012.02.034>, 2012.
- 485 Shiu, C., Liu, S. C., Fu, C., Dai, A., and Sun, Y.: How much do precipitation extremes change in a warming climate?, *Geophys. Res. Lett.*, 39, L17707, <https://doi.org/10.1029/2012GL052762>, 2012.
- Stölzle, M., Stahl, K., and Weiler, M.: Are streamflow recession characteristics really characteristic?, *Hydrol. Earth Syst. Sci.*, 17, 817–828, <https://doi.org/10.5194/hess-17-817-2013>, 2013.
- 490 Tague, C. and Grant, G. E.: A geological framework for interpreting the low-flow regimes of Cascade streams, Willamette River Basin, Oregon, *Water Resour. Res.*, 40, W04303, <https://doi.org/10.1029/2003WR002629>, 2004.
- Tetzlaff, D., Seibert, J., McGuire, K.J., Laudon, H., Burns, D.A., Dunn, S.M., Soulsby, C.: How does landscape structure influence catchment transit time across different geomorphic provinces?, *Hydrological Processes*, 23, 945-953, <http://doi.org/10.1002/hyp.7240>, 2009.
- 495 Vogel, R. M. and Kroll, C. N.: Regional geohydrologic-geomorphic relationships for the estimation of low-flow statistics, *Water Resour. Res.*, 28, 2451–2458, <https://doi.org/10.1029/92WR01007>, 1992.
- Yeh, H. and Huang, C.: Evaluation of basin storage–discharge sensitivity in Taiwan using low-flow recession analysis, *Hydrol. Process.*, 33, 1434–1447, <https://doi.org/10.1002/hyp.13411>, 2019.

Table 1: Summary of empirical recession study results. Blue, red, and grey shades represent positive, negative, and no correlation with factors, respectively. Numbers inside cells correspond to the reference numbers in Table S1. The asterisk (*) represents this study.


Factor	Centrality of recession		Temporal variability of recession					
	Long-term		Inter-annual		Inter-seasonal		Inter-event	
	â	b	â	b	â	b	â	b
<i>Climate/Moisture</i>								
Rainfall	1, 21	1	21	21			*	*
		21						*
Maximum monthly rainfall		2						
Antecedent flow					4, 5		5, 13, 22, *	*
Peak flow							8, *	19, *
							6	19, *
								8, *
Flow rate after peak							5, 6, 9	23
							23	
Total storage change								11
Water table elevation						3		3
Saturated area						3		3
60 cm soil moisture						3		3
Baseflow	1							
Evapotranspiration	1, 21	1			3, 12, 24			24
		21						3
Aridity index	16, 17, 21	15, 16, 17, 21						
Mean relative humidity		2						
<i>Landscape</i>								
Drainage area	10, 16, 20	1, 7, 16, 18, 24						
	1, *	20, *						
Long shape of catchment	10	*						
	*							
Flow path height	*	24, *						
Flow path length	*	*						
Flow path gradient	*	*						
Mean elevation		2						
Standard deviation of elevation		2						
Catchment slope	17, 24	2, 17, 24						

Hypsometric integral	*	*		
Coefficient of variation of slope	16	16		
Topographic wetness index		2		
Ratio of flow-path length to gradient	*	*		
Drainage density	14, *	14		
	10	*		
Subsurface flow contact time		2		
<i>Landcover</i>				
Reforestation			21	21
Water management			21	21
Plateaus coverage		15		
Young volcano rock coverage	14	14		
Forest coverage	18, *	*		
Water bodies coverage	*	16, 21, 24		
	21			
	16	*		
Flood attenuation due to lakes	1	1		
<i>Soil</i>				
Soil depth		24		
Surface hydraulic conductivity	17	21		
	18	17		
Field capacity	16	16		
Moderate infiltration rate soils		2		
Slow infiltration rate soils		2		
Playas with impermeable soils		15		
Organic matter content		2		


Table 2: Spearman correlation coefficients between logarithmic hydrometric characteristics and recession characteristics for all rainfall events at all catchments (n = 291). Grey shades represent statistically significant at the 99% confidence level (p-value < 0.01).

Variable	Meaning	a [hr ⁻¹]	b [-]
Hydrometric			
$AP_{7\text{day}}$ [mm]	7-day antecedent precipitation	-0.080	0.010
P [mm]	Total precipitation	-0.524	-0.083
D [hr]	Duration of precipitation	-0.432	-0.054
I_{avg} [mm hr ⁻¹]	Averaged precipitation intensity	-0.257	-0.026
Q_{tot} [mm]	Total streamflow	-0.609	-0.154
Q_{ant} [mm]	Antecedent streamflow	-0.339	0.266
Q_{p} [mm]	Peak flow	-0.247	-0.228
Q_{tot}/P [-]	Runoff coefficient	-0.337	-0.097
Landscape			
H [m]	Flow-path height	-0.491	0.224
L [m]	Flow-path length	-0.520	0.302
G [-]	Flow-path gradient	-0.453	0.189
L/G [m]	Ratio of flow-path length to gradient	0.470	-0.181
A [km ²]	Drainage area	0.040	-0.095
DD [km]	Drainage density	0.420	-0.217
S_m [%]	Gradient of main stem	-0.318	0.229
HI [-]	Hypsometric integral	-0.498	0.226
ELO [-]	Basin elongation	-0.209	0.319
C_w [%]	Land cover - water bodies	0.330	-0.147
C_F [%]	Land cover - forest	-0.281	0.140
C_A [%]	Land cover - agriculture	0.268	-0.059

510

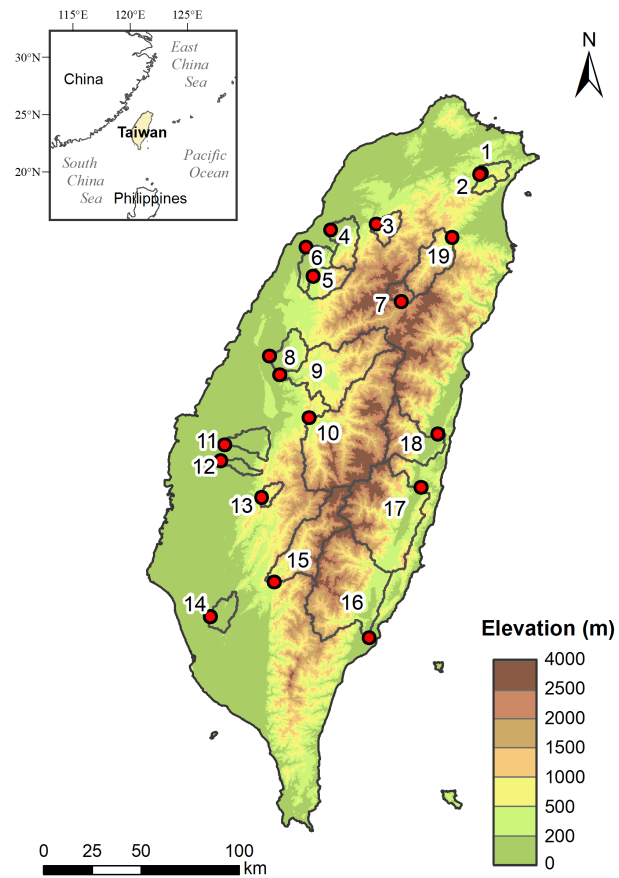

515 **Figure 1: Topographic map of Taiwan and the locations of the selected catchments (red dots) and associated watersheds (outlines). The catchment IDs correspond to the IDs in Tables S2 and S3, in which the primary descriptions of hydrologic events and landscape variables are listed.**

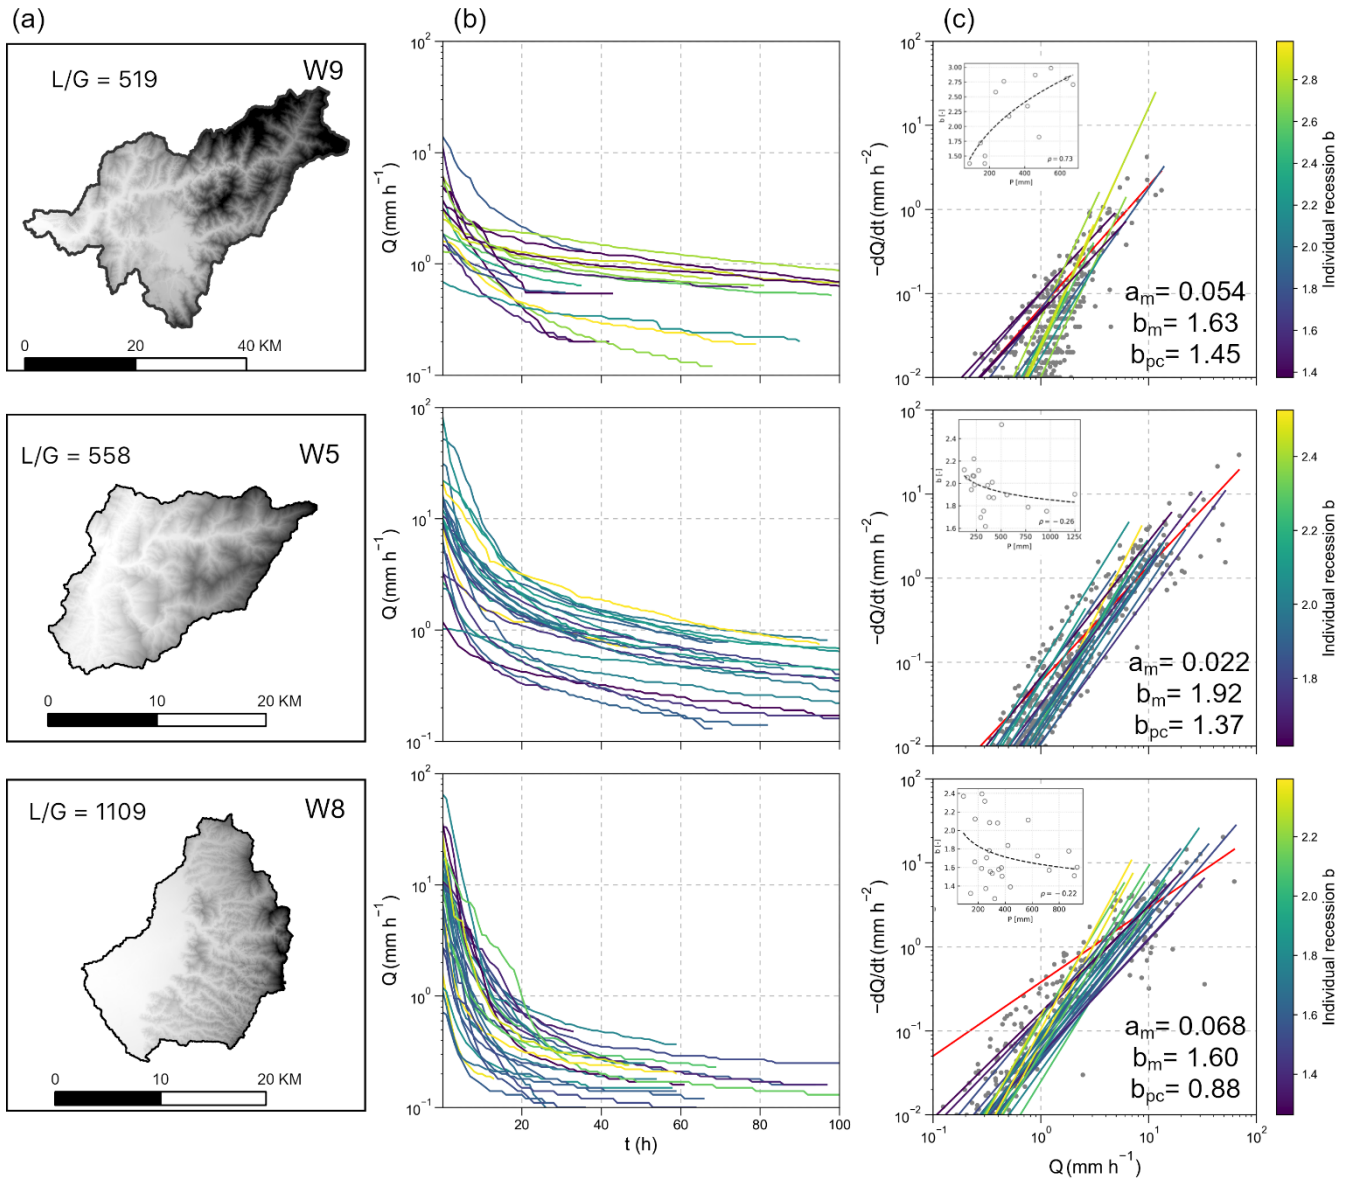

520 **Figure 2: Landscape and recession plots for catchment W9 (row 1), W5 (row 2), and W8 (row 3). Landscape and flow-**
path topography (L/G) are shown in column (a). Selected recession segments from different rainstorms are shown in
column (b). Recession plots of all selected rainstorms are shown in column (c). The median of recession parameters a and b_m
and the parameter b_{pc} derived from the point-cloud are shown in the lower-right corner. The recession b from
individual segments are colored from purple to yellow with increasing value of b , and the red line represents b derived
using the point-cloud method.

525


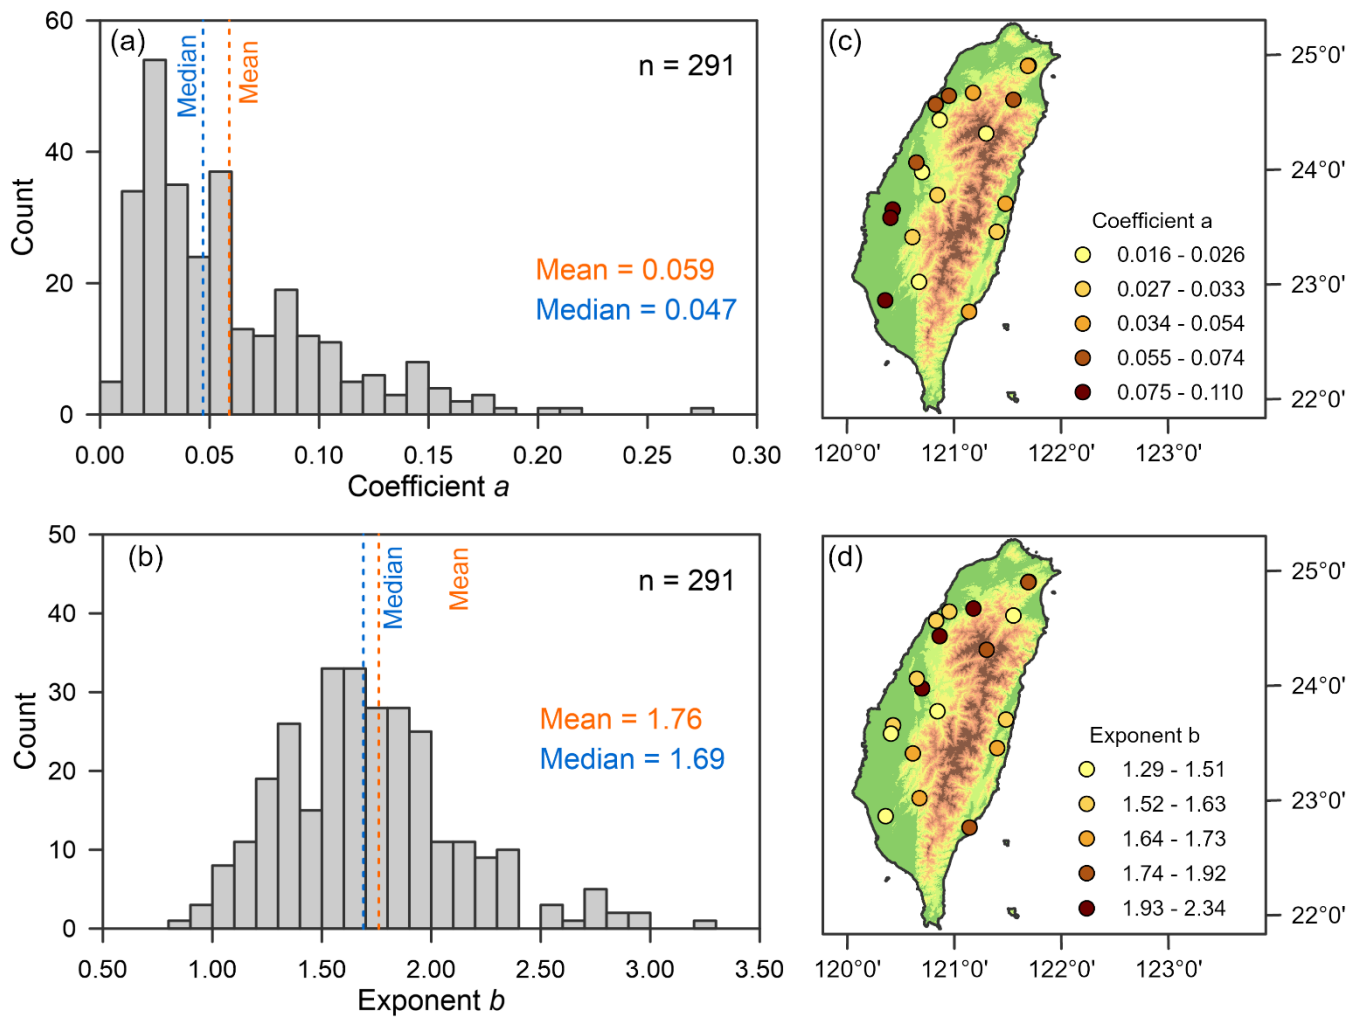


Figure 3: Distributions of recession parameters a (a) and b (b) estimates in all catchments and events. The spatial distributions of the medians of parameters a (c) and b (d). The colors of the dots represent the quantiles category.

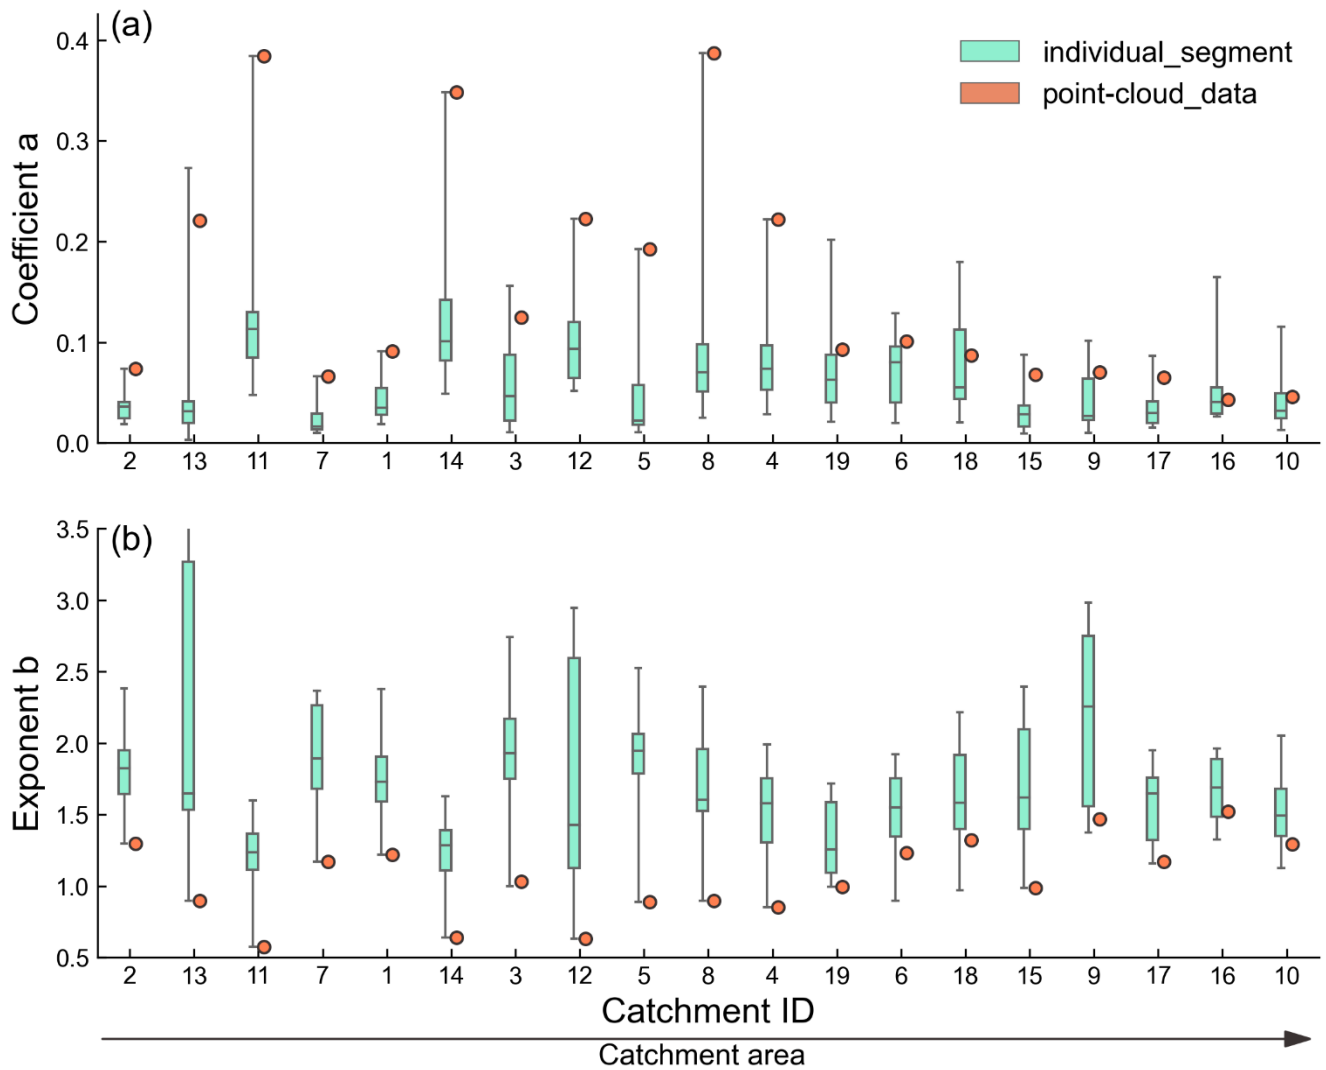

530

Figure 4: Boxplots of coefficient a (a) and exponent b (b) derived from the individual recession segments (cyan box) and point-cloud data (orange dot). The catchments are arranged on the x -axis in ascending order according to drainage area. Boxes show the interquartile and data range.



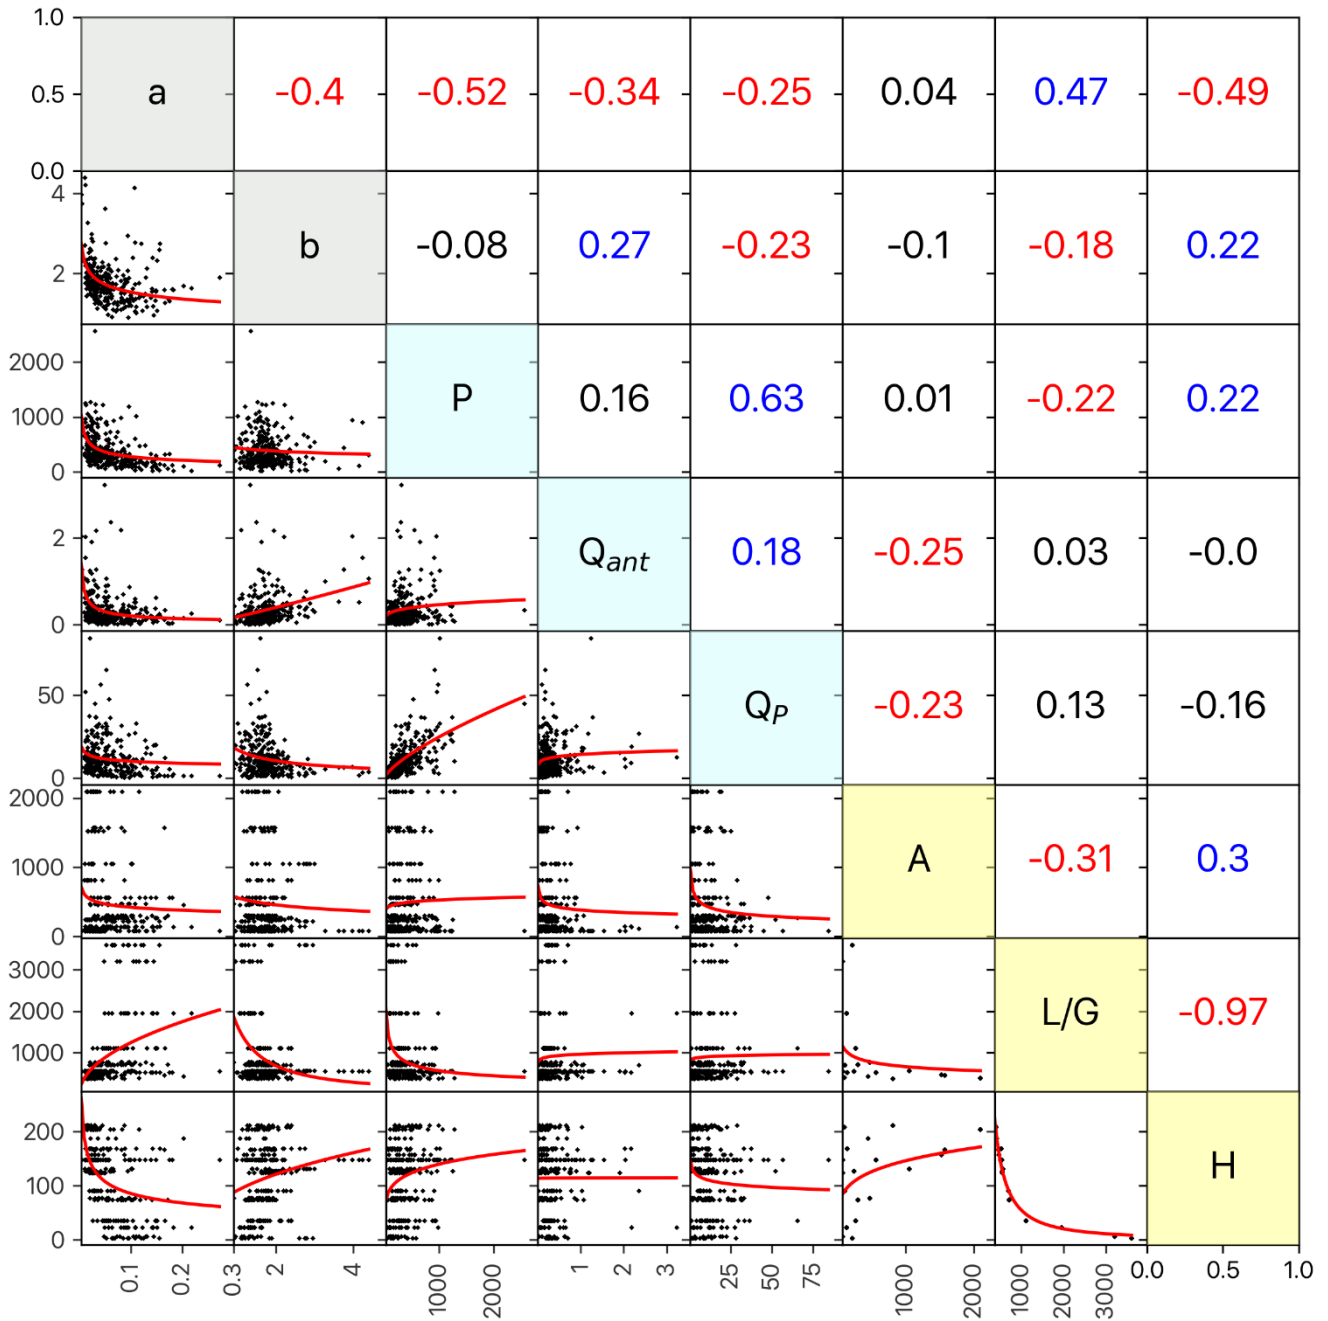


Figure 5: Correlation of recession parameters a and b against rainstorm event and landscape variables. Below the diagonal: pairwise scatter plots of the recession parameters and variables with a power-fit regression (red line). Above the diagonal: corresponding Spearman correlation coefficients. Blue and red values indicate statistically significant ($p < 0.05$) positive and negative correlations, respectively. Note that all catchments and events are shown in this figure.

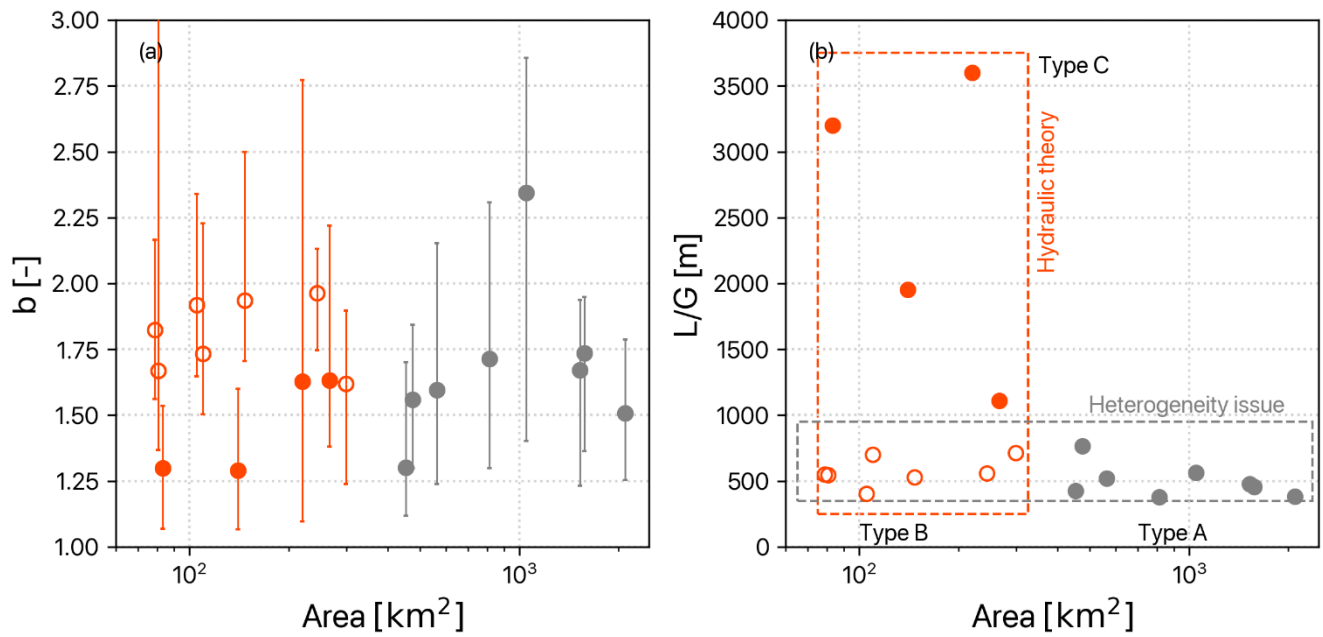

545


Figure 6: The relationship between drainage area and the recession exponent b (a) and the flow path topography (L/G) (b). The error bar on (a) is the range of the individual segment recession exponent values of each catchment. The orange and gray dots represent small and large catchments (< and > 500 km², respectively), respectively, and the solid and hollow dots represent large and small L/G . The recession behaviors in small and large catchments could be explained from two perspectives: hydraulic theory (orange box) and heterogeneity issues (gray box).

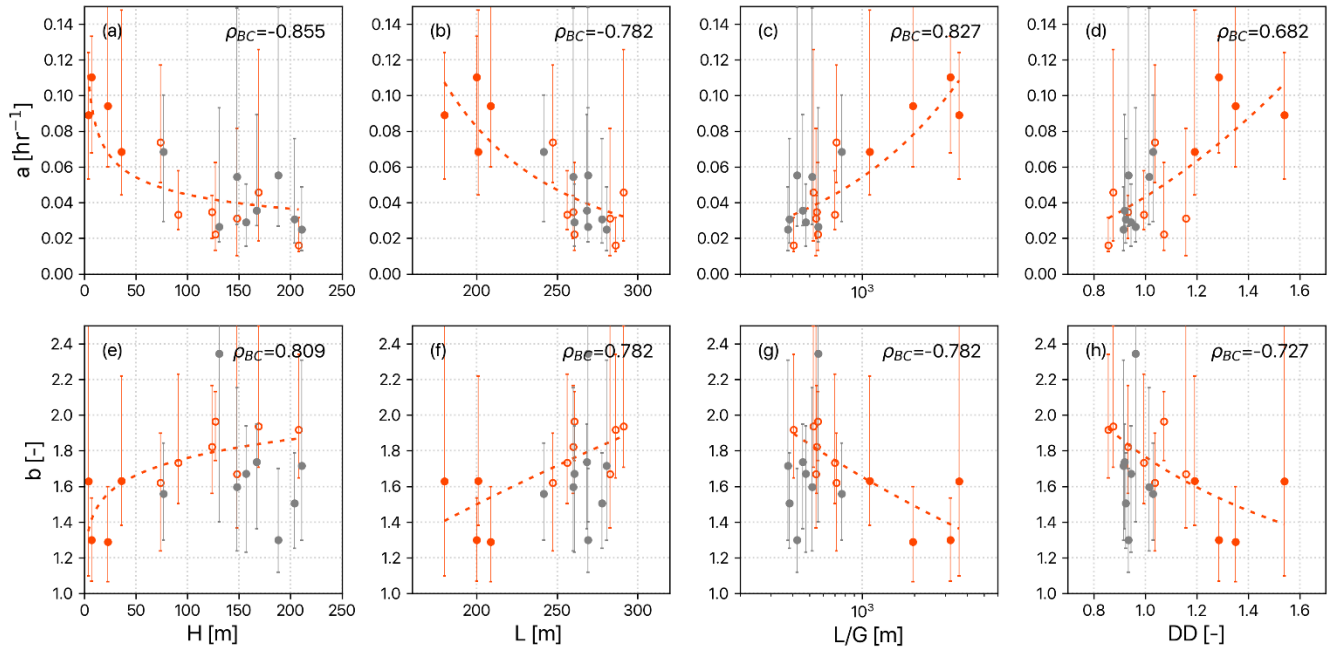

550

Figure 7: Scatter plots of the median and the range of 10th-90th percentile of recession parameters at each catchment against landscape variables. Gray solid, orange hollow, and orange solid dots are Type A, B, and C basins, respectively. The orange dash line is the power-law fit for small catchments (Type B and C). The Spearman correlation coefficient (ρ) is listed in the upper-right corner of each panel.

555

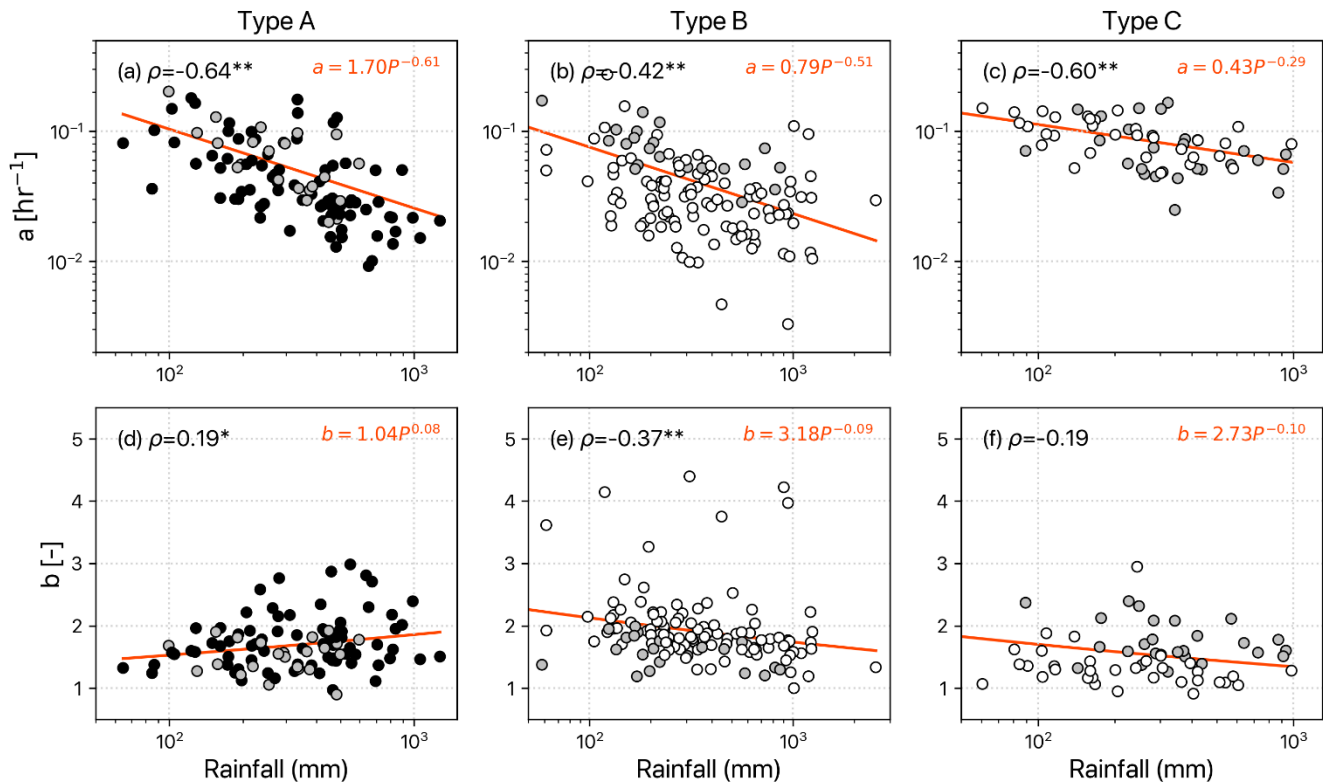

560 **Figure 8: Scatter plots of recession coefficient, a and exponent, b against total rainfall for recession segments at different**
565 catchment types. Type A are large catchments (area > 500 km²), B are small catchments with low L/G ratios, and C are
small catchments with high L/G ratios. Black, gray, and white dot colors represent the low, medium, and large L/G
catchments, respectively. The orange line is the power-law fitting curve with Spearman correlation coefficients in the
upper-left corner of each panel (* and ** denote statistical significance at the 90% and 99% level of confidence,
respectively).

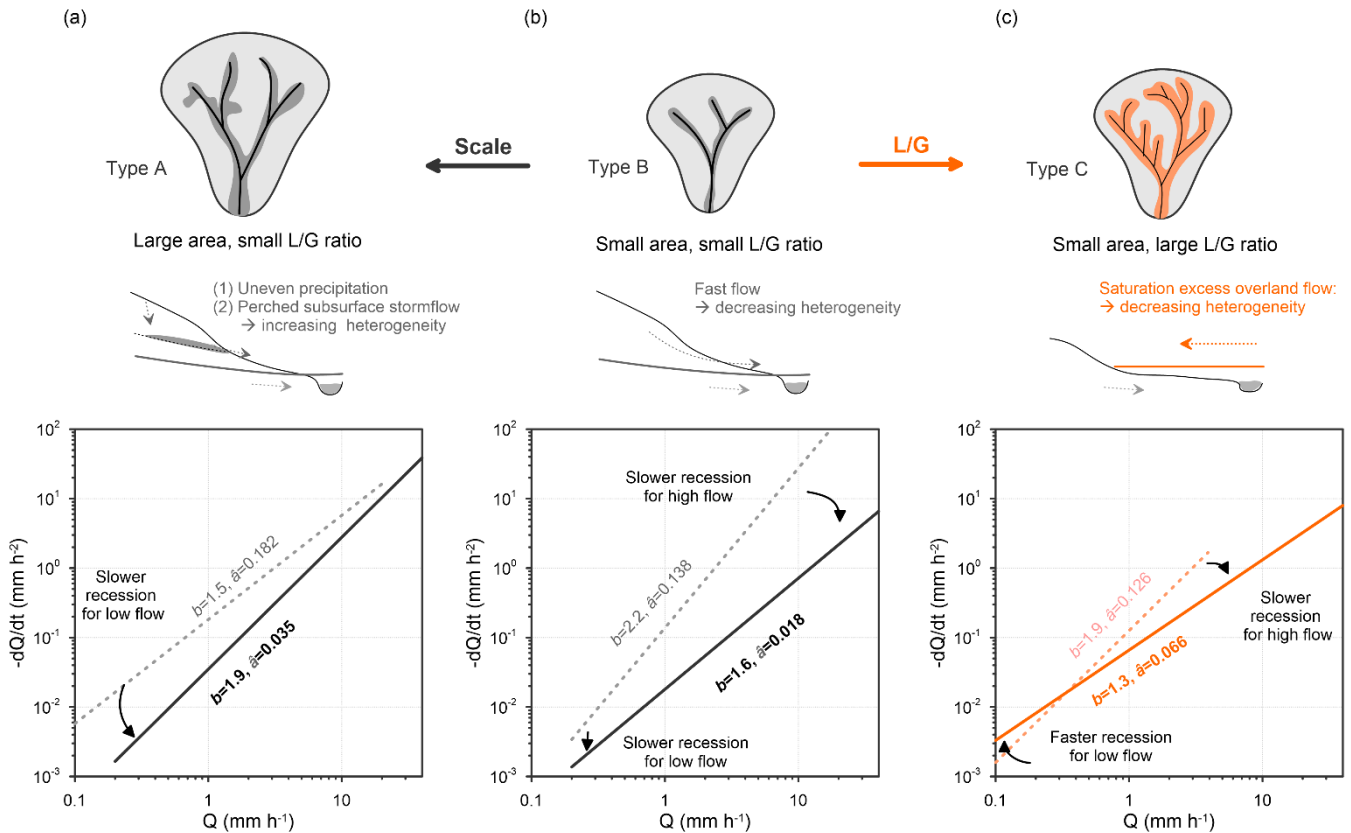


Figure 9: A conceptual diagram illustrating how landscape variables regulate the recession direction during rainstorms. The top row presents the drainage area and the stream network of three landscape types of catchments corresponding to Fig. 6b. The middle row presents the cross-sectional valley with descriptions of drainage behavior. Here, (a) type A, large catchment and steep slope, drains water via multiple sources of subsurface flow; (b) type B, small catchment and steep slope, drains water via fewer sources of subsurface flow; and (c) type C, small catchment and gentle slope, drains via the extension of the saturated zone along the riparian zone. Correspondingly, the bottom row shows how their recession parameters (or regressive line) in recession plots would move from light (dashed line) to heavy (solid line) rainstorms.

570