



Effects of spatial soil moisture variability in forest plots on model parametrization and simulated groundwater recharge estimates

Thomas Fichtner¹, Yuly Juliana Aguilar Avila¹, Katja Ehrenberg¹, Stefan Seeger², Martin Maier², Stephan Raspe³, and Andreas Hartmann¹

¹Institute of Groundwater Management Technische Universität Dresden, 01069 Dresden, Germany

²Georg-August-Universität Göttingen, Soil Physics, 37077 Göttingen, Germany

³Bayerische Landesanstalt für Wald und Forstwirtschaft, Department soil and climate, 85354 Freising, Germany

Correspondence: Thomas Fichtner (thomas.fichtner@tu-dresden.de)

Received: 18 August 2025 – Discussion started: 6 October 2025

Revised: 30 June 2026 – Accepted: 1 July 2026 – Published: 9 September 2026

Abstract. Soil-Vegetation-Atmosphere Transfer (SVAT) models are essential tools for simulating and underplotting the dynamic interactions governing water balance components within forest ecosystems. These models are widely employed to predict hydrological responses to environmental change, including the impacts of shifting meteorological conditions on forested landscapes. Despite their usefulness, the reliability of SVAT models is frequently compromised by uncertainties arising from incomplete or imprecise input data. These limitations often result in model assumptions that may lead to over- or underestimation of critical water balance components such as groundwater recharge. In order to improve the accuracy of SVAT models, observed soil moisture data are integrated to enhance parameterization processes by aligning simulated outputs with measured values. However, uncertainties remain regarding the selection of representative soil moisture profiles for calibration and the extent of measurements necessary to robustly characterize a forest plot. To address these challenges, the present study explores the spatial variability of soil moisture across two forested plots with contrasting soil and vegetation conditions by the deployment of an extensive network of soil moisture probes in 11 profiles per plot. The influence of soil moisture variability on the adjustment of model input parameters during the calibration process and its subsequent impact on the computation of groundwater recharge is evaluated. The findings reveal that soil moisture variability at the plot characterized by a heterogeneous soil was greater, both horizontally and in depth, throughout the study period. These patterns of variability are also mirrored in the different parameter sets obtained from

the calibration of the LWF Brook90 model, based on the recorded soil moisture time series in each of the 11 profiles per plot. The most significant variation is observed in the infiltration and hydraulic soil parameters, whereby this is more pronounced at the plot with heterogeneous soil structure. When examining the groundwater recharge rates calculated using the 30 best-performing parameter sets for each of the 11 profiles, both plots exhibited comparable temporal patterns but substantial differences in total groundwater recharge volumes across profiles. The results also suggest that model-inherent uncertainties, including parameter interactions, equifinality and dimensional simplifications, have a stronger impact on model outputs than uncertainties arising from variability in soil moisture caused by spatial heterogeneity of soil texture and hydraulic properties within the plot. Taking into account both sources of uncertainty, the application of Monte Carlo based subsampling yielded contrasting results. While groundwater recharge at the Kienhorst plot could be reliably estimated using data from only 3 soil profiles at the investigated 20 × 20 m plot, eleven soil profiles were required at the Tharandt site to adequately capture the spatial variability of the system. These numbers are indicative rather than universal thresholds, as the required sampling density is strongly site-specific and depends on local soil structure and model related uncertainties.

1 Introduction

Forests are vital contributors to the hydrological cycle, playing a pivotal role in aquifer recharge while safeguarding the quality and availability of freshwater resources (Chang, 2012). Acting as natural filtration systems, they regulate the movement of water from the topsoil into groundwater reservoirs. The vegetation in forests, especially trees, intercepts rainfall, consuming water by root water uptake as well as transpiration and allowing it to infiltrate slowly into the soil (Hewlett, 2003). Protecting and managing these forested areas is essential for maintaining sustainable groundwater replenishment in both quantity and quality. Furthermore, the availability of water is a critical determinant for the ecological functionality and long-term viability of forest ecosystems. Forests exhibit a pronounced sensitivity to variability in water supply, with significant implications for their growth dynamics, resilience to environmental stressors, and overall productivity (Williams et al., 2013). One of the greatest challenges facing forest ecosystems is the alteration of meteorological conditions due to climate change. Shifts in precipitation patterns, including reduced rainfall during the growing season and an increase in extreme weather events such as droughts and heavy precipitation fundamentally alter soil water dynamics. While drought periods directly limit plant water availability, intense precipitation events may enhance rapid surface runoff or preferential flow, thereby modifying the partitioning between evapotranspiration, runoff and groundwater recharge (Meusburger et al., 2022). Hereby, groundwater recharge represents a key interface between terrestrial ecosystems and long-term water resources, as it determines the replenishment of aquifers that sustain baseflow in streams, buffer drought impacts, and provide drinking water supplies. In forested catchments, recharge processes are strongly controlled by vegetation structure, root distribution, and soil hydraulic properties, making them highly sensitive to climate-induced changes in water balance. In case of alterations in groundwater recharge significant effects on forest structure and species distribution arise, including stress reactions such as widespread tree mortality, reduced canopy cover and increased susceptibility to pests and diseases (Gebeyehu and Hirpo, 2019; Klesse et al., 2023; Senf et al., 2020). Given these challenges, quantifying the magnitude and variability of soil water fluxes contributing to groundwater recharge is thus essential for understanding forest hydrology under changing climatic conditions and for evaluating the sustainability of water resources in forested landscapes.

However, precise estimation of groundwater recharge remains inherently complex as it demands detailed insights into the multifaceted interactions among soil properties, vegetation characteristics, and atmospheric dynamics within forest ecosystems (Schmidt-Walter et al., 2020). In general, key components influencing groundwater recharge in forested landscapes include precipitation, interception, evaporation, surface runoff, transpiration, percolation, and soil storage ca-

capacity. The interplay of these components is regulated by an various site-specific factors, such as climatic conditions (e.g., temperature and precipitation patterns), forest characteristics (e.g., species composition, structural age, plot density, canopy architecture, root system development, and overall tree health), understory vegetation, and soil attributes (e.g., texture, type, and permeability) (Chang, 2006). To address these complexities, environmental monitoring in forest ecosystems seeks to quantify water fluxes with precision as a basis for determining water availability for transpiration across different tree species and its contribution to groundwater recharge.

Using Soil-Vegetation-Atmosphere Transfer (SVAT) models has been established as indispensable tools for simulating hydrological processes within forest ecosystems as they can effectively capture the temporal dynamics of soil moisture and estimate water fluxes in forest environments (Speich et al., 2020; van der Salm et al., 2007). However, their predictive accuracy is often constrained by limitations in the quality and availability of input data as well as by the challenges of defining appropriate initial and boundary conditions. A large number of parameters related to canopy structure, vegetation characteristics, root distribution patterns, and soil hydraulic properties must be defined for effective model implementation (Meusburger et al., 2022). Yet, many of these parameters cannot be directly derived from field observations, resulting in significant uncertainties in parameter estimation (Franks et al., 1997). Such uncertainties frequently can lead to over- or underestimations of critical hydrological components, including water available for transpiration and percolation to the groundwater, thereby reducing the SVAT model's predictive capability (Kirchner, 2006; Kuppel et al., 2018). To address this issue, various strategies have been developed to reduce parameter uncertainty and improve model robustness. These include sensitivity analyses, ensemble simulations, Bayesian calibration frameworks and the use of expert knowledge or literature-based parameter ranges. In this study, automatic calibration techniques leveraging observed site-specific soil moisture measurements, are employed, which represent one effective approach among many (Beven, 2006; Saltelli et al., 2007; Vrugt et al., 2008). Incorporating site-specific observations can support the refinement of input parameters, which may reduce mismatches between simulated and observed values and improve the representation of water balance components. However, the reliability of such improvements depends on the calibration strategy and the inclusion of independent validation data to avoid overfitting. When carefully implemented, improved parameterization can contribute to a more robust understanding of hydrological dynamics and water fluxes within forested landscapes.

However, soil moisture exhibits high spatial and temporal variability even within forest plots, driven by factors such as heterogeneities in soil texture, hydraulic properties, topographic gradients, and dynamic interactions with sur-

face water systems, precipitation, and vegetation distribution (Vereecken et al., 2016; Western et al., 2004). Numerous studies have investigated spatial soil moisture variability (Choi et al., 2007; Fatichi et al., 2015; Mohanty et al., 2000; Ojha et al., 2014; Teuling and Troch, 2005; Vereecken et al., 2008; Western et al., 1999), consistently demonstrating that variability tends to increase across larger spatial scales (Famiglietti et al., 2008; Western et al., 1999). This variability poses a challenge for model calibration, as a parameter set calibrated to a single location often fails to capture the full range of observed soil moisture conditions within a study area (Beven, 2006). Recognizing spatial variability in soil moisture is crucial for improving the predictive performance of hydrological models, particularly in the context of water balance components such as evapotranspiration and infiltration (Famiglietti and Wood, 1994). Research has shown that spatial differences in soil hydraulic properties can lead to substantial variations in simulated water balance components, such as transpiration, runoff, and deep percolation (Montzka et al., 2017). However, uncertainty remains regarding the optimal quantity and selection of soil moisture observations necessary to adequately represent a plot for model calibration and estimation of groundwater recharge. In the context of forest environmental monitoring, the installation of soil moisture observation profiles is often restricted to a limited number of locations (Vorobevskii et al., 2024). This limitation is primarily attributed to the significant financial investment required for advanced measurement technologies, compounded by a general underestimation of the critical role of representative soil moisture data in deriving reliable estimations of forest water balance components.

Recognizing these challenges, this present study seeks to evaluate the gains of installing a larger number of soil moisture sensors to obtain data for model calibration. To address this, an expanded monitoring network comprising multiple soil moisture probes was established across two forest plots at different sites in Germany, each characterized by contrasting environmental and boundary conditions. The collected data were analysed to identify and underplot spatial and temporal soil moisture variability across the study areas, including differences at distinct depths and locations. The observations were further used for the calibration of the SVAT model LWF-BROOK90.jl to assess their influence on estimated model parameters and model outputs, especially on ground water recharge. The focus on plot-scale instead of multi-site or gridded estimations allows for a mechanistic evaluation of model performance under well-controlled conditions, using high-resolution soil moisture data. This level of detail is crucial for understanding site-specific processes such as root-zone dynamics, canopy interception, and soil hydraulic behaviour – factors that are often averaged out or parameterized in large-scale models. By addressing uncertainties associated with soil moisture variability and model parameterization, this our analysis contributes to the ongoing discourse on the spatial resolution required for hydro-

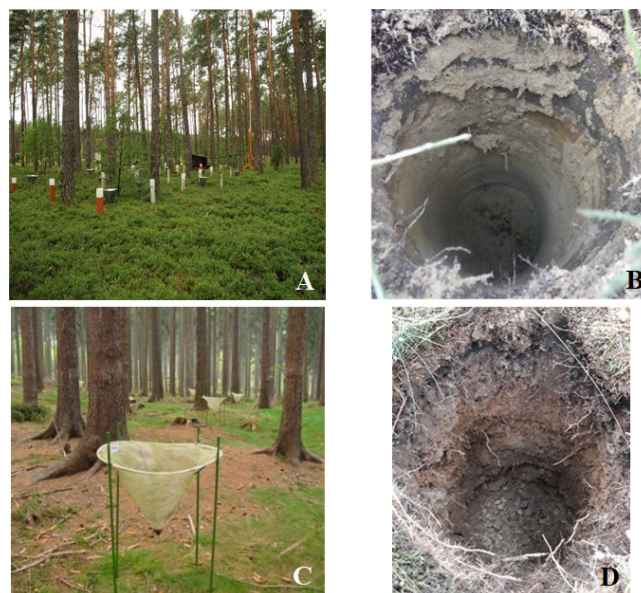


Figure 1. View of Kienhorst plot (A), soil characteristics of Kienhorst plot (B), view of Tharandt plot (C), soil characteristics of Tharandt plot (D) (photograph by Fichtner, 2023).

logical model calibration. The findings should emphasize the importance of balancing single versus multiple parameterizations to ensure representativeness in heterogeneous forest landscapes, ultimately enhancing the accuracy of groundwater recharge estimations in forest landscapes.

2 Methods

2.1 Study sites and data

The research concentrated on two sites within the ICOS (Integrated Carbon Observation System) monitoring network, which are also part of the IPCC Network (Intergovernmental Panel on Climate Change), selected for contrasting soil characteristics and their well-established infrastructure and suitability for comprehensive data collection (Table 1).

2.1.1 Study site Kienhorst

The study area is situated in the heart of the Schorfheide, the largest continuous forested region in the state of Brandenburg, Germany (Fig. 1A). This plot consists of a 115-year-old pine stand, with ground vegetation primarily composed of dwarf shrubs, blueberry herbs and branch mosses (Kallweit and Engel, 2016). Humus form is raw humus with an Of / Oh ratio of 6 (IUSS Working Group (WRB), 2022). The mineral soil consists of fine sand, and roots seem to grow deeper than 1.5 m (Fig. 1B).

Table 1. Characterisation of the two sites instrumented as part of the study.

	Kienhorst	Tharandt
Coordinates (–)	52°58′ N/13°39′ E	50°57′ N, 13°34′ E
Elevation (m)	66	385
Slope (°)	0	4
Median Temperature (°C)	8.5	8.1
Annual Precipitation (mm)	422 (2022), 681 (2023), 580 (2024), 523 (2025)	657 (2022), 864 (2023), 745 (2024), 551 (2025)
Vegetation	Pinus/Vaccinium myrtillus/Bryophyta	Picea/Larix/Bryophyta
Soil type*, soil texture class, stone content	Haplic Podzol, Sand, 0 %	Cambric Podzol, Silt loam, 40 %–60 %, partially perching properties
Geology	Glacial sediments including their periglacial overprints	Periglacial sediments consisting of debris from rhyolite and loess
Hydrogeology	Water level upper aquifer – 17 m b.g. on average	Water level upper aquifer – 13 m b.g. on average

Kallweit and Engel (2016), Anchorstation Tharandter Wald (2026), * IUSS Working Group (WRB) (2022)

2.1.2 Study site Tharandt

The study site is situated in the heart of Tharandter Wald, a dense forest covering approximately 6000 ha on the lower reaches of the northern slopes of the Ore Mountains (Fig. 1C). The forest is characterized by a 129-year-old spruce plot, with ground vegetation primarily composed of grasses and mosses (Anchorstation Tharandter Wald, 2026). Humus form is raw humus overlaying a loamy mineral soil with up to 60 % stone content throughout the profile (Fig. 1D). Roots seem to grow not deeper than 0.8 m. At different locations on the plot (approx. 35 %), the subsoil >0.5 m depth exhibits redoximorphic patterns indicating perching properties, which means extremely low permeability. This results in the accumulation of stagnant water during periods of heavy rainfall, as the infiltrating precipitation encounters significant resistance, hindering its downward movement through the soil layers (Braeutigam, 2012).

2.2 Soil moisture measurements

2.2.1 Set up soil moisture monitoring network

At the two study sites located in distinct climatic regions of Germany, extensive networks of 44 soil moisture probes were deployed. Each of the 11 soil profiles was equipped with four probes placed at depths of 10, 30, 50, and 80 cm (Fig. 2C). The study utilized SMT100 soil moisture probes (Truebner Company, 2026), with integrated temperature measurement, operating based on the Time Domain Transmission (TDT) principle (Fig. 2A) (Qu et al., 2013). The specified accuracy for absolute measurements is ±3 vol % for soil moisture

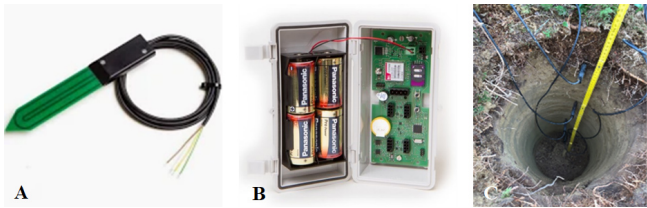


Figure 2. SMT100 Sensor (Truebner Company, 2026) (A), Data logger TrueLog200 (Truebner Company, 2026) (B), soil profile with installed sensors (photograph by Fichtner, 2023) (C).

(without site-specific calibration) and between 0.2 and 0.4 °C for soil temperature. The sensor provides average measurement values across its full length of 10 cm. In this study, the manufacturer’s calibration (multi-point laboratory calibration against gravimetrically determined volumetric water contents in standard mineral soils) was applied instead of site-specific calibration, as the focus was on the soil moisture dynamics rather than absolute values (Sprenger et al., 2015; Demand et al., 2019). To prevent water accumulation on the probes and ensure minimal interference with vertical vapor fluxes, the probes were installed horizontally with their narrow edge oriented vertically (Fig. 2C).

Data was collected every 10 min using the battery-powered TrueLog200 data logger (Fig. 2B). The data loggers are configured and accessed via the accompanying logger software. Equipped with a GSM modem, the loggers can transmit recorded data through the mobile phone network.

2.2.2 Selection of positioning soil moisture measurements

To identify soil moisture variability at the study plot, the location of the 11 soil profiles per plot were installed at randomized locations within an area of 20×20 m (Fig. 3A and B). Previous research has demonstrated that installing soil moisture sensors in a minimum of 10 profiles is sufficient to capture plot-specific variability effectively (Berthelin et al., 2020). The random sampling approach was employed to determine the soil profile coordinates, ensuring that each location was selected with equal probability. This method was chosen to maintain the independence of data points, facilitating robust statistical analysis. Additionally, randomized placement across the study area helps to avoid potential systematic errors caused by unrecognized gradients in soil moisture distribution. This strategy ensures comprehensive coverage of the variability present in the field.

2.3 Water balance model LWF BROOK90.jl

Water balance models or Soil–vegetation–atmosphere transfer (SVAT) models are valuable tools for estimating detailed atmosphere–plant–soil water exchange as well as water fluxes within terrestrial ecosystems using a 1D simplification representing of evapotranspiration and vertical soil water movement processes (Olioso et al., 2005). LWF-BROOK90.jl, a process-based, one-dimensional SVAT model, developed to simulate daily vertical water fluxes within soil–plant–atmosphere systems at the point scale, was applied in this study. In addition to simulating water fluxes and storage dynamics, LWF-BROOK90.jl also includes an isotope module for modelling stable water isotopes; however, isotope simulations were beyond the scope of the present study. Owing to its vertical structure, the model is particularly suited for forest hydrology studies and ecohydrological process analysis, rather than fully distributed catchment-scale simulations. LWF-BROOK90.jl represents a complete reimplementations of the LWF-BROOK90 model in the Julia programming language (Bernhard et al., 2020). It builds upon the R package LWF-BROOK90R, its underlying Fortran source code and the original BROOK90 (v4.8) implementation (Federer et al., 2003; Schmidt-Walter et al., 2020), while preserving the conceptual structure and process formulations of its predecessors. Water movement is represented as a vertically coupled soil–plant–atmosphere continuum consisting of a single-layer (“big-leaf”) canopy, a snowpack when present, a multi-layer soil column with user-defined thickness and hydraulic properties and a conceptual groundwater store. The modeled storage compartments comprise interception (separately for liquid precipitation and snow), snowpack, vertically discretized soil water, plant water storage and groundwater. A more detailed model description including the underlying processes and fluxes is provided in the Supplement, Section Model description.

2.3.1 Model input

In general, the LWF-BROOK90.jl model is driven by daily meteorological forcing data and physically based parameter sets describing soil hydraulic (Mualem-van Genuchten parameters, hydraulic conductivity), canopy as well as vegetation characteristics. All input data are provided as structured csv-files.

Meteorological forcing

Time series of meteorological variables (precipitation, min. and max. air temperature, relative humidity, wind speed and solar radiation) were obtained from the locally operating meteorological stations at both ICOS sites (ICOS Ecosystem Station Kienhorst (DE-Kie), 2025; ICOS Ecosystem Station Tharandt (DE-Tha), 2025) located in grassland areas near the sites. Observations at 30 min resolution were aggregated to daily values representative of the study sites, as LWF-BROOK90.jl is limited to daily meteorological forcing and does not support sub-daily input data. The average duration of precipitation events was fixed at 4 h for all months, following the recommendation in the original BROOK90 documentation as a satisfactory approximation. Although the use of daily forcing combined with a constant storm duration may smooth short-term rainfall extremes and slightly affect infiltration and percolation dynamics, this simplification is considered appropriate for the temporal and spatial scales addressed in this study.

Soil hydraulic parameterization and vertical discretization

At both sites, the modeled soil profiles were subdivided into three main soil horizons with distinct hydraulic properties. An explicit litter layer was not included in the model setup. Instead, litter-related storage and hydraulic effects were implicitly represented within the uppermost soil horizon.

At the Kienhorst site, the model domain extended to a depth of 3 m at the sandy site to adequately represent deep percolation processes, whereas at the Tharandt site the model depth was limited to 1 m due to the presence of underlying bedrock. Initial estimates of soil hydraulic properties down to a depth of 0.8 m were derived from site-specific measurements, including sieve analyses and subsequent determination of Mualem-van Genuchten parameters by using the pedotransfer functions of (Wösten et al., 1999). Thereby, at the Tharandt site the coarse fraction was neglected as a first approximation due to the lack of representative soil water retention measurements and the limited ability of pedotransfer functions to explicitly account for stone content.

For numerical simulation, the profile was discretized into computational layers with a vertical resolution of 5 in the upper 30 and 10 cm in deeper sections. Layer thicknesses were chosen to reflect expected gradients in soil hydraulic prop-

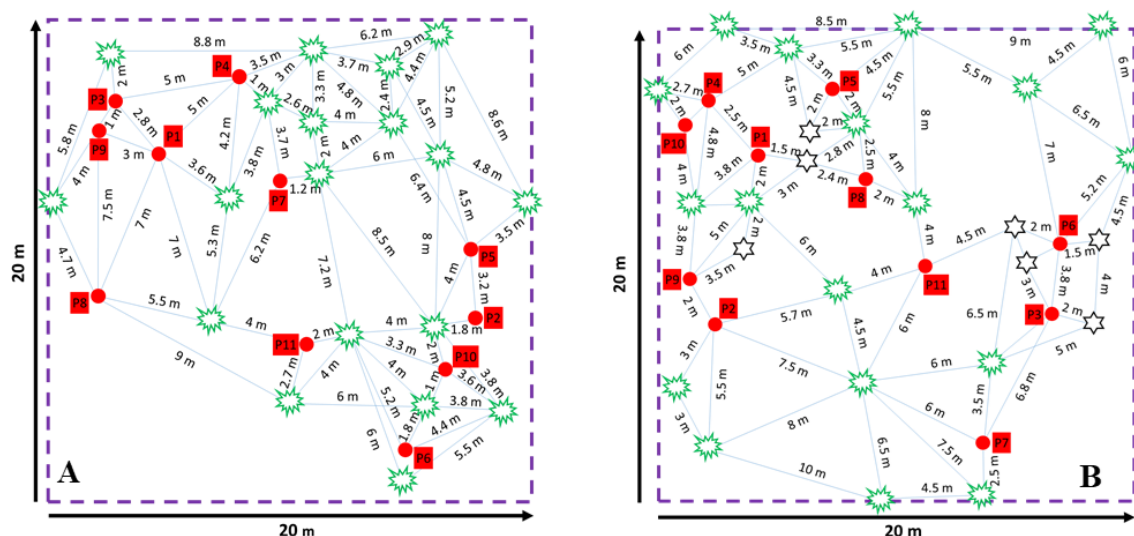


Figure 3. Randomly distributed soil profiles (red) in the 20 × 20 m plot at Kienhorst site (A) and at Tharandt site (B), living trees = green, tree stumps = black.

erties and rooting density. This discretization enables a realistic representation of vertical variability in soil water retention, percolation as well as root water uptake. Additional parameters used to describe soil and infiltration processes (e.g., infiltration exponent that determines distribution of infiltration water with depth, soil depth until which infiltration is distributed, quickflow fraction of infiltrating water at field capacity) were specified based on provided information by ICOS site managers or relevant literature (Tables S1 and S2 in the Supplement).

Vegetation and canopy parameterization

Parameters describing canopy characteristics (e.g., average leaf width, interception capacity per unit LAI or SAI), vegetation hydraulics (e.g., maximum leaf vapour conductance under fully open stomata, vapor pressure deficit at which stomatal conductance is halved) and root system characteristics (e.g., maximum and initial root depth, average radius of the fine or water-absorbing roots) were also defined based on data provided by the managers of the ICOS sites or (Weis et al., 2023) (Tables S1 and S2 in the Supplement).

Maximum LAI (3.5 for Kienhorst/7 for Tharandt) was set according to Weis et al. (2023) (Tables S1–S2 in the Supplement). Seasonal LAI dynamics were derived from site-specific phenological observations, thereby providing a realistic representation of temporal canopy development and its influence on evapotranspiration. Understory leaf area index (LAI), including contributions from dwarf shrubs and bryophytes, can constitute a non-negligible component of total vegetation cover in temperate and boreal forests. Remote sensing and field studies indicate that understory LAI can reach values of approximately $1\text{--}3\text{ m}^2\text{ m}^{-2}$ during the growing season in forest types where low shrubs and mosses are

abundant (Liu et al., 2017). At the Kienhorst site, understory vegetation (mosses and blueberry shrubs) was therefore represented by adding an additional LAI of 1 to the tree LAI, as the model does not allow the simultaneous representation of multiple canopy layers. This adjustment accounts for evapotranspiration from ground vegetation and prevents an overestimation of simulated percolation. However, this simplification is associated with uncertainties, as the single-layer (big-leaf) canopy representation does not explicitly resolve vertical differences in radiation interception, stomatal control, and evaporation between overstory and understory vegetation. Consequently, the approach may introduce biases in simulated evapotranspiration partitioning. Therefore, a validation should be performed using independent measurements or estimates of evapotranspiration to better constrain potential uncertainties arising from the simplified representation of vertical vegetation structure.

Definition of vertical and lateral flow components

Throughfall and snowmelt reaching the soil surface were partitioned into vertical and lateral flow components according to site-specific parameterization. At Kienhorst site, characterized by highly permeable sandy soils, unrestricted vertical drainage was assumed by setting the drainage multiplier drain to 1. This configuration allows free percolation from the deepest soil layer to the conceptual groundwater store. Preferential macropore bypass flow (bypar) was deactivated, as structured preferential flow is not expected in the homogeneous sandy substrate. A small fraction of near-surface runoff was permitted (Maximum 5 %). In contrast, at Tharandt site, preferential bypass flow (bypar) was activated to represent rapid flow pathways associated with the stony and structurally heterogeneous soil matrix, whereas vertical

drainage from the lowest soil layer was also not restricted (drain = 1). Surface runoff was not permitted at this site. At both locations, the parameter controlling slow lateral subsurface flow (dsfl), which represents gradual downslope water release from all soil layers, was effectively disabled by defining the slope parameter (dslope) as zero. Furthermore, the groundwater table option (GWAT) was deactivated at both sites, implying that no dynamic shallow groundwater table was simulated and that recharge was represented solely as percolation to the conceptual groundwater store.

2.3.2 Modell calibration

First of all, reference simulations were conducted to obtain an initial, uncalibrated assessment of evapotranspiration and soil water dynamics under observed meteorological conditions. This allowed early identification of structural model limitations and provided a physically based benchmark for subsequent calibration. To avoid artefacts from uncertain initial states, simulations were preceded by a 15 months warm-up period and the resulting model states served as initial conditions for the subsequent 24-month evaluation period.

Model calibration itself focused on identifying the key soil hydraulic and vegetation-related parameters controlling system dynamics, using soil moisture time series at four depths across 11 profiles. The number of calibrated parameters was limited to a process-relevant subset, with all others fixed within physically plausible ranges. To reduce computational complexity and minimize the risk of overfitting, which is primarily related to the number of calibrated variables, only the most influential inputs were retained. These were selected based on literature knowledge, expert judgment and the physical characteristics of the study area. Parameters expected to have negligible impact on model outcomes were fixed at default or literature-based values, allowing the calibration to focus on the key variables controlling system dynamics (Tables S1 and S2 in the Supplement). Finally, 8 (Kienhorst)/12 (Tharandt) parameters were chosen for calibration within their predefined ranges. These parameters encompassed variables related to canopy structure, vegetation hydraulics, soil physical processes and hydraulic properties; 3 (Kienhorst)/6 (Tharandt) of valid for the entire subsurface, 5 (Kienhorst)/6 (Tharandt) of them with individual variations respecting the defined discretization scheme. A total of 100 000 sets of these selected parameters were generated using Latin Hypercube Sampling (LHS) to ensure broad and unbiased coverage of the parameter space as well as to capture potential variability in model responses within a feasible range of computational costs. Although known parameter correlations, typically determined by soil texture and structure, were not explicitly considered, this approach allows exploration of model sensitivity across a wide range of plausible values. Incorporating correlations could refine sampling, but independent random sampling has been shown to be a valid method for assessing uncertainty in hydrologi-

cal model calibration, particularly when the goal is to capture the overall range of system responses (Beven, 2006; Vrugt et al., 2008). Model calibration was conducted over a 24-month period (March 2023 to March 2025) to capture a wide range of hydro-meteorological conditions, particularly contrasting different soil moisture states, ensuring a robust representation of system behaviour under both wet and dry conditions as well as reducing the likelihood that parameter optimization is biased toward specific short-term patterns or individual events. Remaining predictive uncertainty was evaluated using a split-sample approach to assess model robustness and minimize overfitting. The full simulation period was divided into a calibration (70 %, 24 months) and an independent validation phase (30 %, 9 months), ensuring that model performance was tested under hydrological conditions not used for parameter estimation. The validation period covered both wet and dry states, providing a stringent test of the model's ability to reproduce soil moisture dynamics, evapotranspiration, and drainage responses under contrasting conditions. Although longer validation periods would further increase confidence in long-term transferability, the applied split-sample strategy, combined with reduced parameter freedom, suggests that overfitting effects are limited.

Model performance was evaluated using the Kling-Gupta Efficiency (KGE) score (Section Statistics in the Supplement), as it provides a balanced assessment of correlation, bias and variability between simulated and observed soil moisture dynamics across multiple depths (Gupta et al., 2009). For further analysis of water balance components, the 30 best-performing simulations according to KGE for each of the 11 individual profiles per plot were selected. This selection represents a compromise between model accuracy and the exploration of plausible model behaviour, allowing for a robust and nuanced evaluation of model uncertainty.

2.3.3 Model output and evaluation

In addition to the various variables relevant to water dynamics and recharge processes calculated by the model, such as evapotranspiration, the primary focus of the evaluation was on groundwater recharge generated at daily resolution. While the other variables provided important insights into the water balance and plant–soil interactions, groundwater recharge was of particular interest due to its critical role in sustaining long-term water availability and its sensitivity to both model-inherent factors and the spatial variability of soil moisture used for calibration. To investigate this in detail, the 30 best-performing simulations for individual soil profiles, each based on its respective calibrated parameter set, were analysed to determine whether uncertainties in groundwater recharge rates arising from site characteristic or model structure, such as parameter interactions, equifinality or dimensional simplifications.

The simulated water balance was derived from model outputs and used to quantify the dominant hydrological fluxes

and storage components at the study sites. Temporal dynamics were evaluated at daily resolution and subsequently aggregated to annual scales to capture variability under contrasting hydro-meteorological conditions. Water balance closure was assessed to verify the internal consistency of the simulations and to ensure that fluxes and storage changes were represented coherently.

To determine the number of soil profiles required for a representative estimation of groundwater recharge within 20×20 m plots, a Monte Carlo-based subsampling approach was applied, aiming to quantify how groundwater recharge estimates change with varying numbers of included soil profiles (Davison and Hinkley, 1997; Efron and Tibshirani, 1994; Manly and Manly, 2018). From the 11 available soil profiles, each providing 30 groundwater recharge estimates ($n = 330$), random subsets of increasing size ($n = 1$ – 11) were repeatedly drawn. For each subset, aggregated groundwater recharge was calculated and the procedure was iterated multiple times to capture variability across combinations. Representativeness was assessed based on the stability of distribution metrics: subsets were considered adequate when their mean deviated by less than $\pm 10\%$ from the full dataset and their 95 % confidence intervals substantially overlapped. This approach enables a robust evaluation of the minimum number of profiles required to capture groundwater recharge variability without relying on strict assumptions about sample independence.

3 Results

3.1 Observed soil moisture dynamics

Initially, the visual examination of soil moisture time series across the 11 soil profiles each, measured at four depths (10, 30, 50, and 80 cm) at the Kienhorst (Fig. 4) and Tharandt (Fig. 5) plot, revealed distinct patterns of variability. Seasonal effects were evident at both study locations across nearly all soil depths due to the fluctuating intensity and timing of precipitation events and the changing consumption of water by vegetation.

However, the redistribution and consumption of precipitation water on its way through the unsaturated soil zone resulted in a diminished manifestation of seasonal patterns in the lower soil horizons. Notably, certain soil profiles at the Tharandt plot exhibited an almost uniform low moisture level throughout the year in the lower horizons, indicating limited seasonal variability in these depths. Additionally, rapid and pronounced increases in soil moisture following heavy rainfall events were observed in several, but not all, soil profiles at the Tharandt plot due to waterlogging following heavy rainfall events caused by poorly permeable soil layers. These conditions are consistent with field observations, where it was possible to observe this phenomenon. At the Kienhorst plot, the range of observed soil moisture

values and the variability between individual profiles were consistently low both in dry and wet periods with evident uniformity of soil moisture across all depths. Soil moisture exhibited a consistent pattern across all depths, with a range of approximately 15 vol % between minimum and maximum values. Conversely, the Tharandt plot was characterized by significant fluctuations in soil moisture content, coupled with considerable variability between individual profiles, particularly during and following heavy precipitation events occurring here more often. At this plot, the range between minimum and maximum moisture content reached nearly 50 vol %, highlighting the pronounced heterogeneity of soil water dynamics.

3.2 Model calibration

3.2.1 Simulated soil moisture dynamics and their performance

The uncalibrated reference simulation shows an overall insufficient agreement with the observed soil moisture dynamics at both plots and across all investigated depths (Figs. 6 and 7). While the temporal evolution is generally well represented, including both the seasonal patterns and short-term responses to precipitation events, this is primarily reflected in acceptable values of the KGE correlation component (Tables S4 and S8 in the Supplement). Despite this qualitative agreement in temporal dynamics, the overall KGE values indicate clear limitations in the model's quantitative performance. In particular, systematic discrepancies exist in terms of the magnitude and variability of soil moisture. The simulation tends to overestimate soil moisture, especially during wetter periods, while exhibiting a reduced sensitivity under dry conditions compared to observations. These biases are further supported by elevated values of the KGE components for variability bias and mean bias (Tables S5, S6, S9 and S10 in the Supplement). Overall, these results suggest that the model is capable of reproducing the general system behavior and temporal patterns, but fails to accurately capture the observed soil moisture levels. This highlights the need for model calibration to improve both the magnitude and variability of the simulations, and thereby enhance overall model performance.

Comparison with reference simulations demonstrated that calibration markedly improved the representation of soil moisture, resulting in strong agreement between simulated and observed values in both temporal dynamics and magnitude across most profiles at both study plots over depth.

This improved performance is also reflected in consistently higher KGE values (Figs. 6 and 7, Figs. S1 and S2, Tables S3 and S7 in the Supplement). The model calibration effectively reproduced seasonal variations evident in the measured soil moisture values, including the response to prolonged dry periods and the rapid recovery following significant precipitation events. Minor discrepancies in the abso-

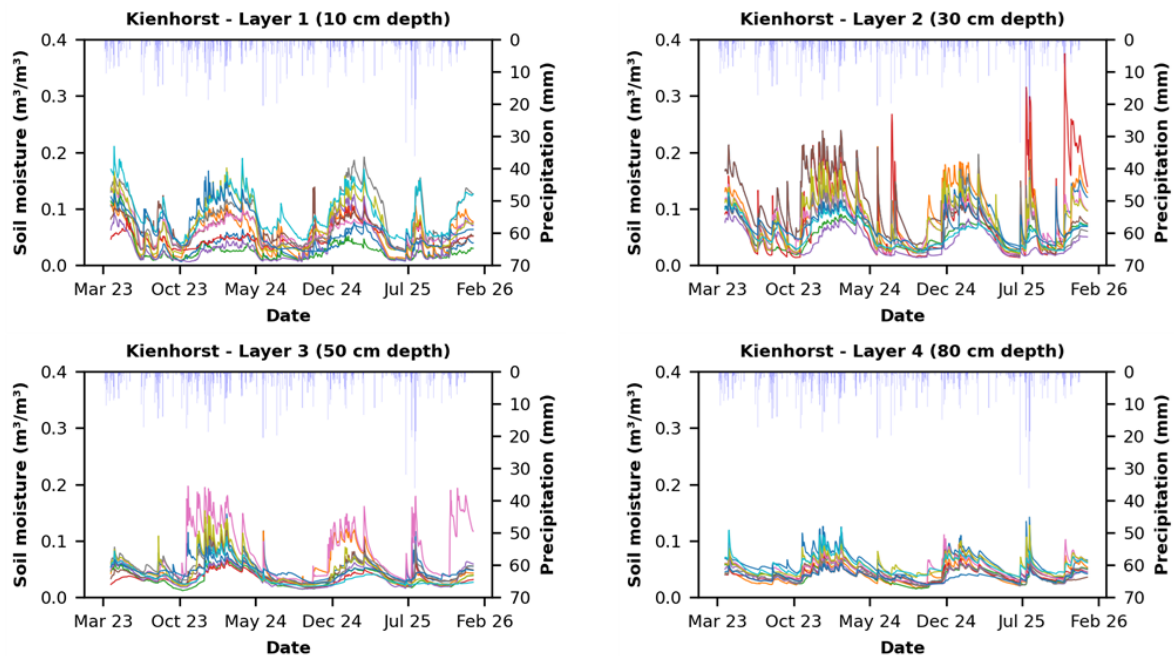


Figure 4. Observed soil moisture at Kienhorst plot – Layer 1, 10 cm, Layer 2, 30 cm, Layer 3, 50 cm and Layer 4, 80 cm, each line represents the soil moisture of one of the 11 profiles, soil moisture raw measurements; no correction for potential sensor spikes or artefacts was performed.

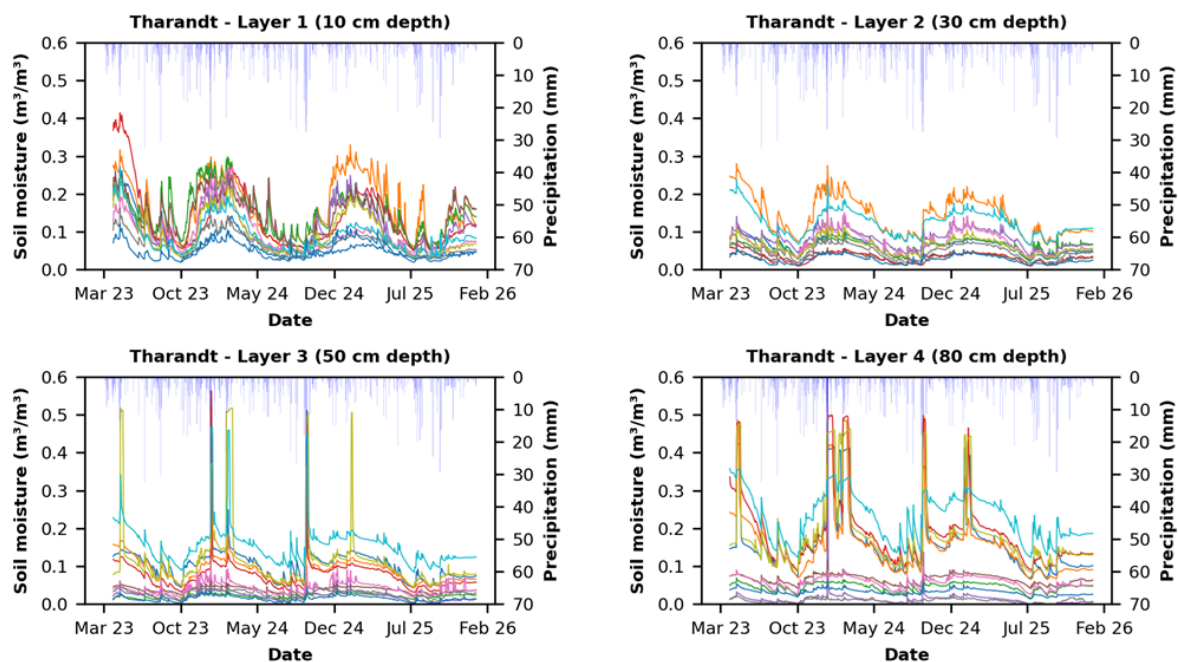


Figure 5. Observed soil moisture at Tharandt plot – Layer 1, 10 cm, Layer 2, 30 cm, Layer 3, 50 cm and Layer 4, 80 cm, each line represents the soil moisture of one of the 11 profiles, soil moisture raw measurements; no correction for potential sensor spikes or artefacts was performed.

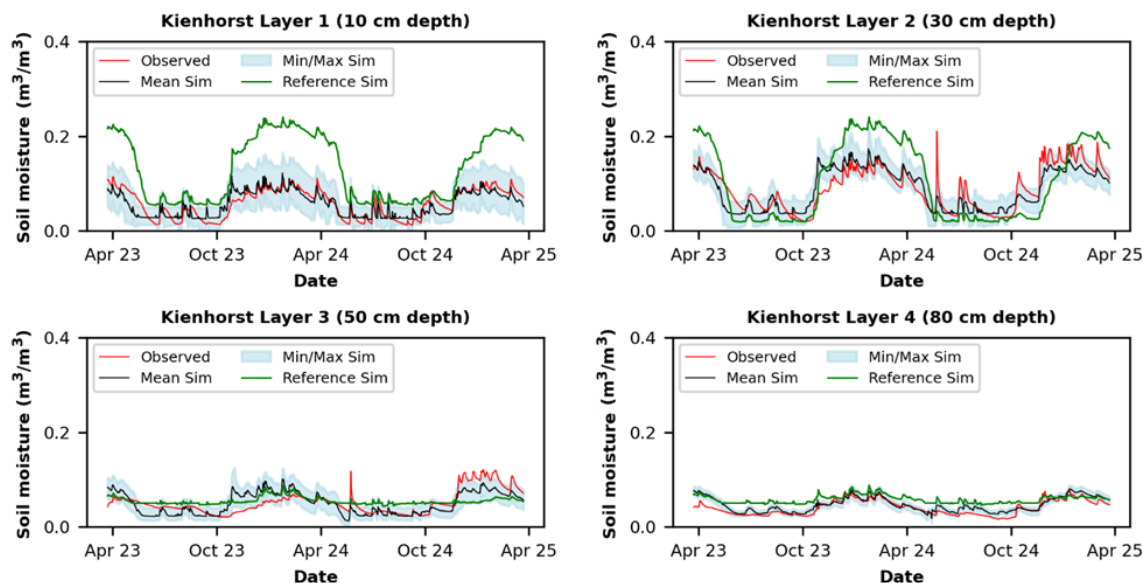


Figure 6. Soil moisture – Observed (red) versus reference simulation (green) as well as average of the 30 best calibrated simulations (black) and their uncertainty bandwidth (blue) exemplary for soil profile 2 at Kienhorst plot – Layer 1, 10 cm, Layer 2, 30 cm, Layer 3, 50 cm and Layer 4, 80 cm.

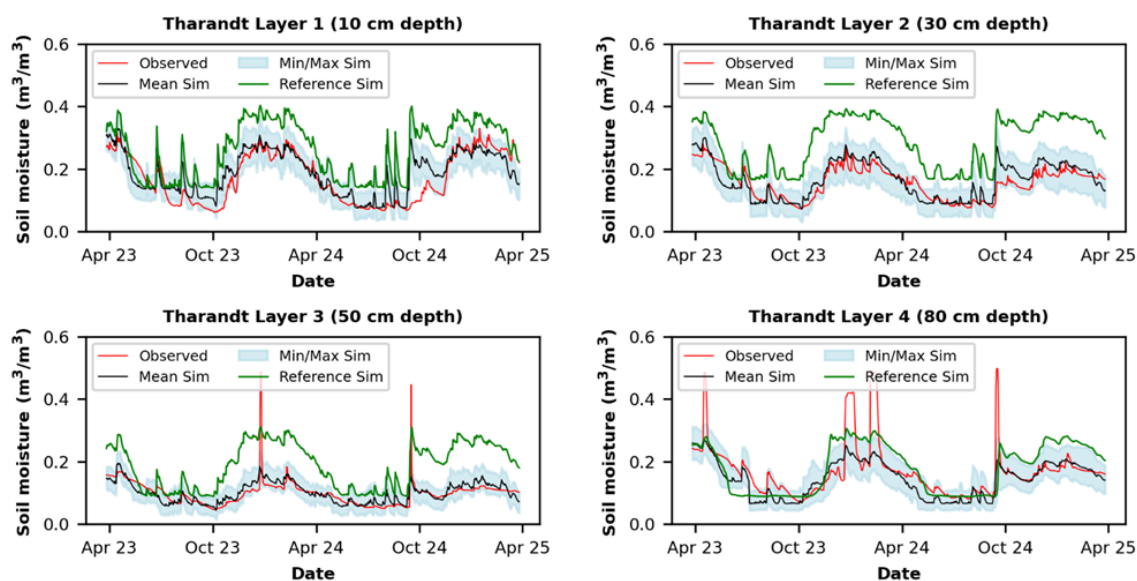


Figure 7. Soil moisture – Observed (red) versus reference simulation (green) as well as average of the 30 best calibrated simulations (black) and their uncertainty bandwidth (blue) exemplary for soil profile 2 at Kienhorst plot – Layer 1, 10 cm, Layer 2, 30 cm, Layer 3, 50 cm and Layer 4, 80 cm.

lute values, timing of peaks and magnitudes were detected in the profiles over the depth. Significant deviations were observed here during periods of extreme wet conditions, especially at the Tharandt plot. Specifically, while the timing of sharp increases in soil moisture following heavy rainfall events closely aligns with the observed data, the model underestimates the magnitude and the duration of these rises

(Fig. 7, depth 50 and 80 cm). Despite the existing deviations, the model performance demonstrates a high level of precision in replicating absolute soil moisture values across the 11 soil profiles and four measured depths (10, 30, 50, and 80 cm), what can be proven by consistently high KGE scores across most profiles (Tables S3 and S7 in the Supplement). Even for profiles with greater variability or complex condi-

tions, the model maintains acceptable accuracy, with KGE values not falling below 0.14 (Gupta et al., 2009). A more detailed analysis of the individual KGE components (Tables S6–S8 and S10–S12 in the Supplement) reveals that the values for correlation, variability bias and mean bias are generally within ranges indicative of a satisfactory reproduction of the observed soil moisture dynamics (Gupta et al., 2009).

The correlation component, in particular, confirms the model's ability to capture the temporal structure of the observations. Slight overestimations of soil moisture variability are reflected in the variability bias values, pointing to a tendency of the model to simulate somewhat stronger fluctuations than observed. Similarly, minor deviations in mean bias indicate small systematic offsets in the simulated moisture levels.

The validation results show a mixed performance overall. At the Kienhorst plot, the model demonstrates an acceptable performance during the validation period. Both the seasonal dynamics and the transitions between wet and dry phases are reproduced reasonably well (Fig. 8). Some overestimation of soil moisture variability is evident, as reflected in elevated values of the KGE variability bias component, while the correlation and mean bias remain within acceptable ranges (Tables S4 to S6 in the Supplement). In contrast, model performance at the Tharandt plot during the validation period is less satisfactory (Fig. 9). The model shows clear limitations in reproducing changes between wet and dry phases, as well as in capturing the variability and correlation of simulated versus observed soil moisture, which is also reflected in the respective KGE components (Tables S8 to S10 in the Supplement). However, it should be noted that the hydrological conditions in 2025 differed substantially from those during the calibration period (2023–2024).

In particular, precipitation amounts were lower, and periods of waterlogging observed during calibration did not occur in 2025. Against this background, the reduced model performance at the Tharandt plot appears plausible, as the model is applied outside the range of conditions it was calibrated for.

3.2.2 Calibrated parameter combinations

The analysis of the variation of the individual calibrated input parameters in the 11 soil profiles each based on the 30 best simulations derived from calibration highlights significantly greater variation in the calibrated parameters at the Tharandt plot compared to the Kienhorst plot (Figs. S5 and S6 in the Supplement). Notably, the highest variation was observed in soil hydraulic and soil process parameters, such as θ_r (residual volumetric water content), n_{par} (width of the soil's pore-size distribution), $ksat$ (saturated hydraulic conductivity), $idepth$ (soil depth until which infiltration is distributed) and $qfpar$ (quickflow shape parameter). Especially at the Tharandt plot, also a strong variation in these parameters can be observed across the discretized soil layers, whereas the

variation over depth is less pronounced at the Kienhorst plot. Increased variation of the calibrated soil hydraulic parameters at the Tharandt plot can be attributed to the heterogeneous soil composition, which is characterised by alternating, poorly permeable layers, stones and underlying layers with low permeability. This heterogeneity increased the sensitivity of the site to precipitation events, which is reflected in pronounced differences in soil moisture dynamics between the profiles and consequently also in the calibrated parameter sets. For the parameters that characterize the vegetation, there was greater variation for the parameter g_{lmax} (maximum leaf vapour conductance).

For further interpretation and to assess the uncertainty associated with the differing characteristics of the 11 soil profiles at both plots, the coefficient of variation (CV) was calculated based on the mean value of the individual calibrated parameters in the 11 profiles (Fig. 10, upper part). The higher CV values observed at the Tharandt plot highlight the greater variability in calibrated soil hydraulic and process parameters (maximum CV 0.80 for Tharandt versus CV 0.16 for Kienhorst). While these differences are consistent with the known variability of site conditions, they represent variability in parameter estimates derived from model calibration rather than direct measurements of soil physical properties.

Further, the CV was calculated based on the individual parameters of the 30 best simulations for the single profiles, reflecting model uncertainty and allows assessment of whether variability in model outcomes is driven more by differences in soil profile characteristics or by the uncertainties inherent in the model structure and parameterization (Fig. 10, lower part). The results show that the variation within the 30 best simulations for the individual soil profiles exceeds the variability observed between the 11 soil profiles for most of the parameters at the Kienhorst and Tharandt plot. This indicates a relatively wide range of parameter sets yielding similarly good model performance. Such behaviour is commonly referred to as equifinality, meaning that different parameter combinations can lead to comparable simulation results (Beven, 1993). At both plots, this model related uncertainty, expressed as the variation among parameter sets, exceeds the variation attributable to differences between soil profiles.

3.3 Influence of spatial variability and model parameter uncertainty on simulated groundwater recharge

The daily groundwater recharge time series revealed pronounced fluctuations throughout the study periods, with seasonal and vegetation-period effects distinctly evident (Fig. 11). At both the Kienhorst and Tharandt plots, groundwater recharge predominantly occurs outside the vegetation period, when the consumption of precipitation water by processes such as evaporation, root water uptake and transpiration is reduced to a minimum. While groundwater recharge at the Tharandt site remains predominantly winter-dominated,

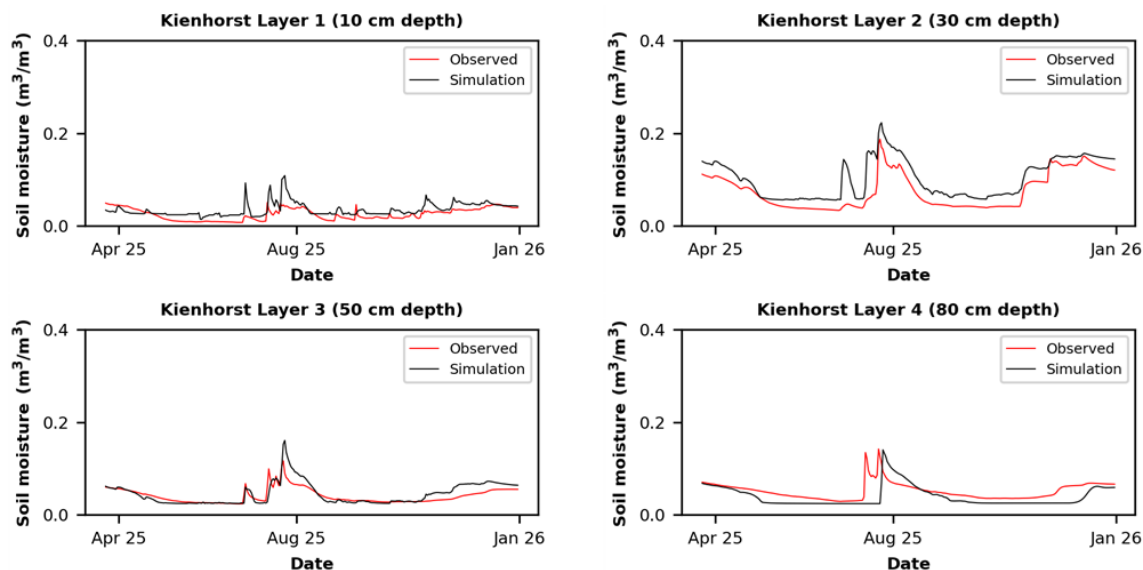


Figure 8. Soil moisture – Observed (red) versus simulated (black) based on the best parameter set of the 30 best simulations during validation period exemplary for profile 1 at Kienhorst plot – Layer 1, 10 cm, Layer 2, 30 cm, Layer 3, 50 cm and Layer 4, 80 cm.

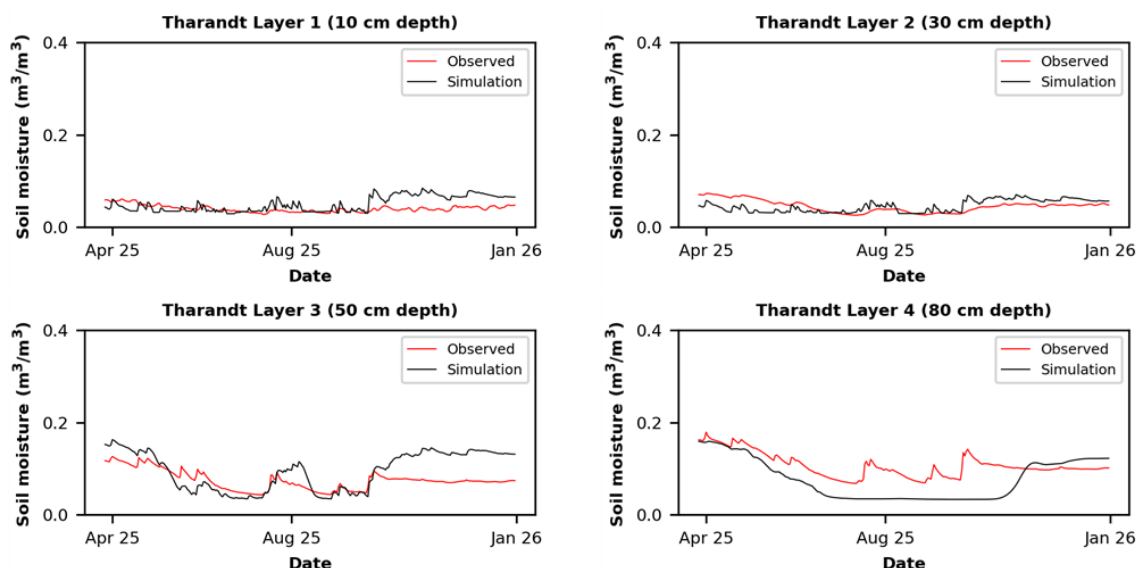


Figure 9. Soil moisture – Observed (red) versus simulated (black) based on the best parameter set of the 30 best simulations during validation period exemplary for profile 1 at Kienhorst plot – Layer 1, 10 cm, Layer 2, 30 cm, Layer 3, 50 cm and Layer 4, 80 cm.

at the Kienhorst site it shows a tendency toward an earlier onset and a partial extension into the vegetation period. Conversely, in the vegetation period between May and October, these processes utilize nearly all available precipitation water, effectively limiting groundwater recharge during the vegetation period. Despite these shared temporal patterns, the magnitude, variability and temporal distribution of recharge events differed substantially between the two contrasting soil environments.

At Kienhorst plot, characterized by a homogeneous sandy soil, groundwater recharge showed smooth, continuous and regulated patterns with only a few distinct spikes following after major precipitation events. The high hydraulic conductivity and low water-holding capacity of the sand, facilitated rapid infiltration and percolation. Consequently, recharge responded almost immediately to rainfall inputs, resulting in uniform recharge pulses. The results displayed relatively small differences in the magnitude and timing of recharge events between the 11 soil profiles, reflecting the overall ho-

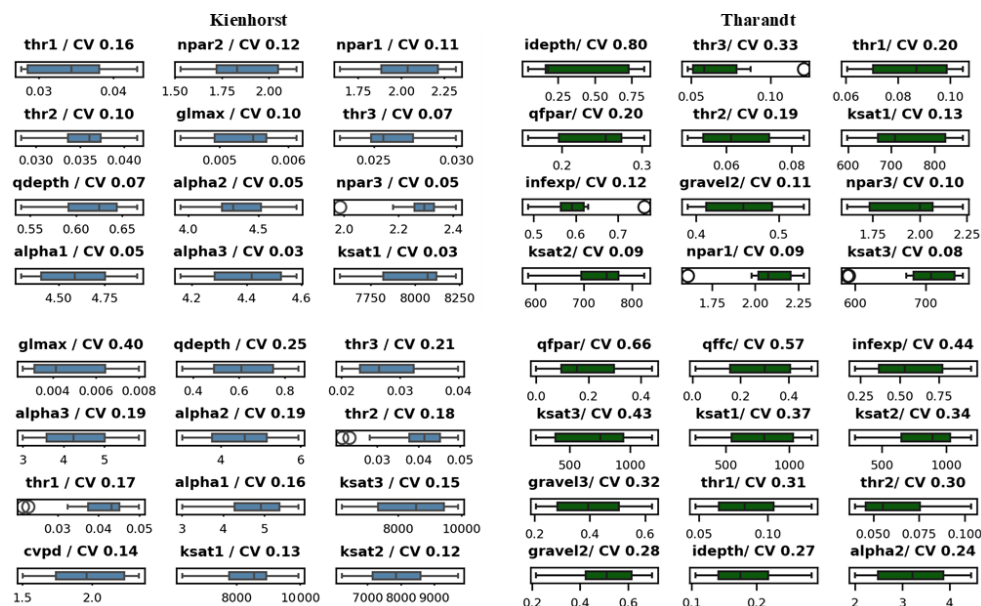


Figure 10. Parameter variation for the 12 parameters with the highest coefficient of variation for the Kienhorst and Tharandt plot – based on the average of calibrated parameter values derived from the 30 best simulations (upper figures) and based on the individual parameters of the 30 best simulations for soil profile 1 (lower figures).

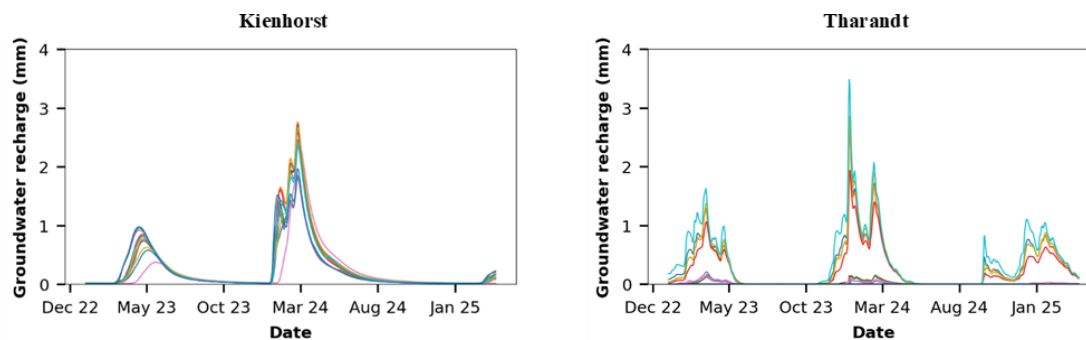


Figure 11. Simulated time series of daily groundwater recharge based on model parameterisation of the individual 11 profiles for Kienhorst and Tharandt plot – mean of the 30 best simulations per soil profile.

mogeneity of the site. Variability among profiles was primarily expressed in the height of individual peaks, while the temporal structure remained largely consistent across simulations.

In contrast, at Tharandt plot, underlain by a heterogeneous loamy soil with a substantial stone content, groundwater recharge occurred in irregular, pulse-like events rather than in a continuously attenuated manner. Peak magnitudes were comparable to those observed at the Kienhorst site; however, recharge was highly variable across soil profiles, with several profiles exhibiting little to no recharge over the simulated period. This indicates a strongly heterogeneous hydrological response, likely reflecting spatial variability in hydraulic properties and preferential flow pathways. The reduced hydraulic conductivity and higher field capacity of the loamy matrix delayed percolation, causing water to be retained in the up-

per soil layers before contributing to recharge. Sensitivity to precipitation events was also lower, recharge increases occurred only after sustained wet periods or when soil moisture approached saturation. Moreover, heterogeneity of soil matrix including bypass flow contributed substantially to the variability among the 11 soil profiles, which is much more pronounced at the Tharandt plot than at the Kienhorst plot.

Considering the range of the 30 simulated time series of groundwater recharge per profile, reflecting model uncertainty, it becomes evident that the largest discrepancies between the individual simulations occur predominantly during periods outside the growing season and following heavy precipitation events (Fig. 12).

The uncertainty band is particularly wide during periods of high recharge, indicating that peak events are more sensitive to parameter choices than low-flow periods. During peri-

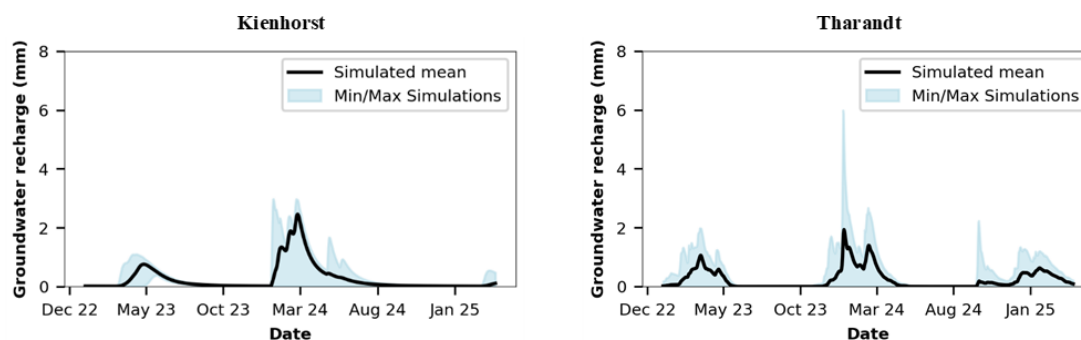


Figure 12. Simulated time series of daily groundwater recharge based on model parameterisation of the individual 11 profiles for Kienhorst and Tharandt plot – mean as well as minimum and maximum values of the 30 best simulations exemplary for soil profile 1.

ods of low recharge, the uncertainty band narrows considerably, indicating that the model is more constrained under dry conditions. Moreover, the spread between the simulations is slightly more pronounced at the Tharandt plot compared to the Kienhorst plot. This indicates that groundwater recharge at Tharandt site is more sensitive to parameter variability and structural assumptions within the model.

An analysis of cumulative groundwater recharge highlights substantial spatial variability across the 11 soil profiles at both plots separated for the years 2023 and 2024 (Fig. 13). At the Kienhorst plot, annual recharge among the 11 profiles ranged from 35 to 72 in 2023 and from 125 to 175 mm in 2024. In contrast, the Tharandt plot showed a wider range of recharge rates, with values between 0 and 145 in 2023 and 0 to 142 mm in 2024, while exhibiting a higher degree of profile-to-profile variability with several profiles showing little to no groundwater recharge over the simulated period. These differences primarily reflect the contrasting soil hydraulic environments: the sandy, homogeneous substrate at the Kienhorst plot promotes efficient percolation and thus higher recharge amounts, whereas the stone-rich, loamy soil at the Tharandt plot restricts percolation and reduces overall recharge.

At Kienhorst site, the groundwater recharge calculated using the model parameterisation based on the mean value of the 11 soil moisture time series lies at the edge of the ensemble in 2023 (72 mm), while it is closed to the centre of the ensemble in 2024 (161 mm), suggesting that the representativeness of the spatially averaged soil moisture signal varies interannually, ranging from a marginal to a central position within the ensemble distribution at this relatively homogeneous site. At the Tharandt plot, the mean-based values fall within the center of the ensemble (74 in 2023 and 69 mm in 2024). However, this apparent agreement masks a pronounced bimodal response among the individual soil profiles: while approximately half of the profiles exhibited little to no groundwater recharge, the remaining profiles generated substantially higher recharge. Consequently, the ensemble mean provides a representative estimate of the average

annual recharge but does not capture the marked spatial heterogeneity arising from preferential flow and spatially variable hydraulic properties.

To further analyse the recharge dynamics and to check the plausibility of calculated values, annual groundwater recharge was expressed as a percentage of annual precipitation. At Kienhorst plot, recharge amounted to 5 % to 10 % of precipitation in 2023 and 20 % to 29 % in 2024. At Tharandt plot, the corresponding values were 0 % to 17 % in 2023 and 0 % to 19 % in 2024. These percentages highlight the strong influence of soil hydraulic properties on the partitioning of precipitation: despite receiving substantially more rainfall, Tharandt plot exhibits to some extent lower recharge efficiency due to higher water retention, the buffering effects of the loamy matrix and preferential pathways promoting localized bypass flow. In contrast, the sandy soil at Kienhorst plot promotes rapid drainage and limited water storage, resulting in a much larger fraction of precipitation contributing to groundwater recharge.

To assess the plausibility of the simulated groundwater recharge and to ensure that the simulated amounts are physically realistic in relation to the available water input and the site-specific evaporative demand, full annual water balance evaluation for the years 2023 and 2024 was carried out based on the mean model parameterisation of the individual 11 profiles (Fig. 14, Tables S13 and S14 in the Supplement).

The results of the water balance indicate that the dominant processes consuming precipitation input differ between the two sites, reflecting both their contrasting soil hydraulic properties and the structure of the model. At the Kienhorst plot, precipitation is primarily partitioned into interception, transpiration and substantial vertical drainage to groundwater, consistent with the rapid percolation and limited storage capacity of the sandy substrate. At the Tharandt plot, in contrast, precipitation is consumed mainly by interception, transpiration and bypass flow, with groundwater recharge remaining comparatively small due to the strong retention and reduced matrix conductivity of the loamy, stone-rich soil as well as the stone induced preferential pathways. The negative

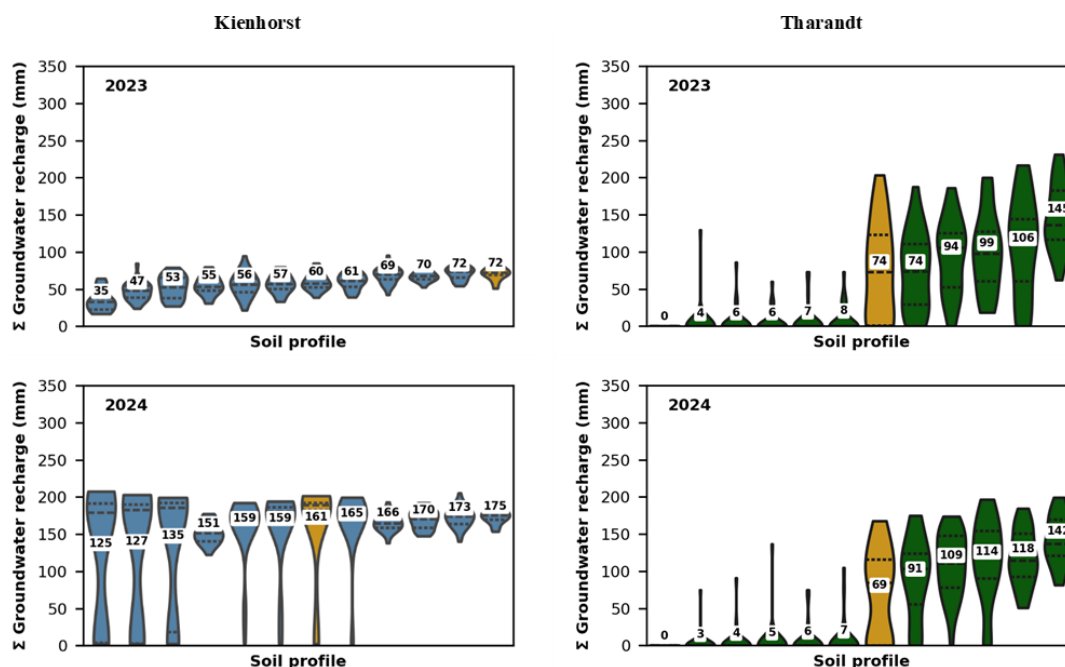


Figure 13. Calculated cumulative groundwater recharge volume ranges based on the parameter sets of the 30 best simulations for the individual 11 soil profiles (blue/green) as well the average value given as a number for each profile – separated for 2023 (upper figures) and 2024 (lower figures) at Kienhorst and Tharandt plot, furthermore the calculated cumulative groundwater recharge volume ranges based on the parameter sets of the 30 best simulations for the mean value of the 11 soil profiles (orange), the violins display the upper bound as the third quartile (75th percentile), the lower bound as the first quartile (25th percentile) as well as the median, the outer edges of the violin extend to the actual minimum and maximum values of the data.

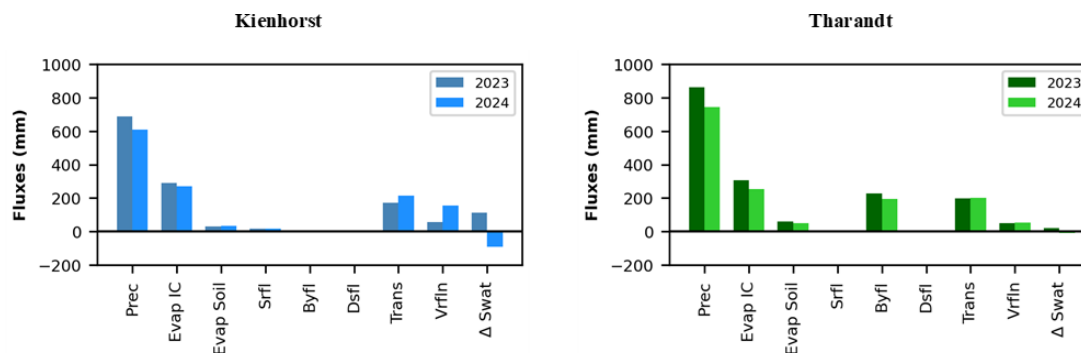


Figure 14. Calculated water balance components based on the mean model parameterisation of the individual 11 profiles for Kienhorst and Tharandt plot – Prec = precipitation, Evap IC = interception evaporation, Evap soil = soil evaporation, Srfi = surface runoff, Byfl = bypass flow, Dsfl = lateral or downslope movement of matric water to streamflow, Trans = transpiration, Vrfli = vertical drainage to groundwater, Gwfl = discharge of groundwater to streamflow, ΔSwat = change of soil water storage.

change of soil water storage at both plots in 2024 indicate a net depletion of soil water storage, which is plausible given the dry conditions in 2024 and the stronger evapotranspirative demand during the growing season. Overall, the balance closes well and the relative magnitudes of the fluxes align with the expected soil hydraulic behaviour at both sites.

3.4 Minimum number of measurements

The results of the performed bootstrapping Monte Carlo-based subsampling procedure show that groundwater recharge estimates vary substantially when only a small number of soil profiles is used and they become statistically stable only once a sufficient sample size is reached (Fig. 15). A comparison of the two study sites highlights slight pronounced differences in the sampling effort required to

achieve the level of statistical reliability. At Kienhorst plot, only three soil profiles are sufficient for 95 % of all sub-set means to remain within $\pm 10\%$ of the overall mean, indicating a relatively homogeneous system with low spatial variability. In contrast, the Tharandt plot all eleven soil profiles are required to achieve the same accuracy threshold. This reflects the pronounced spatial heterogeneity of the site, where approximately half of the profiles exhibit little to no groundwater recharge while the remaining profiles produce substantially higher recharge. Consequently, small sub-sets frequently over- or underestimate the site-scale mean depending on the combination of profiles sampled. These findings demonstrate that the number of profiles needed to obtain robust groundwater recharge estimates is strongly site-dependent and controlled by the spatial variability of recharge processes.

4 Discussion

4.1 Observed soil moisture variability

Observed soil moisture at the investigated forest plots revealed pronounced differences, both laterally across the investigated area and vertically with soil depth with larger fluctuations and absolute values at the Tharandt plot. These differences are primarily driven by site-specific factors like rainfall and throughfall patterns, soil hydraulics as well as subordinated by vegetation properties. The relatively uniform temporal and absolute progression of soil moisture observed at the Kienhorst plot reflects the homogeneous characteristics of its soil matrix. The sandy soil, characterized by evenly distributed pore spaces and low water-holding capacity over the entire soil profile, contributes to the consistent distribution of soil moisture with moderate volumetric content across all depths. In contrast, likewise to the soil moisture patterns found by Berthelin et al. (2023) the soil moisture dynamics at the Tharandt plot exhibit significant variability, attributable to its heterogeneous soil characteristics. This includes alternating layers of silty soil with variable permeability, higher stone content, and underlying geological features such as impermeable layers of clayey material beneath the upper soil horizons. The observations align with the findings of Vereecken et al. (2016), who highlighted the influence of soil texture and hydraulic properties on spatial variability in soil moisture. At Tharandt plot, accumulation of stagnant water during periods of heavy rainfall at some locations underscores the site's sensitivity to rainfall. This phenomenon is consistent with prior studies by Famiglietti and Wood (1994), which emphasize the role of reduced soil permeability and hydraulic conductivity in limiting infiltration rates and enhancing water retention within heterogeneous soil profiles.

4.2 Model calibration

Although the uncalibrated model reproduces the general temporal patterns of soil-moisture dynamics, it systematically overestimates moisture levels and fails to capture the observed variability reflected in the poor variability and mean bias components of KGE. This is indicating structural and parametric deficiencies in the representation of soil hydraulic and vegetation properties. For example, overestimated saturated hydraulic conductivity (K_{sat}) or mis-scaled van Genuchten parameters may lead to overly rapid drainage and exaggerated soil moisture variability. Likewise, an underestimation of soil water storage capacity due to low porosity or limited rooting depth can further contribute to the observed biases. Such shortcomings may lead to unrealistic percolation fluxes and potentially inflated groundwater recharge estimates, underscoring the need for targeted model calibration at the two sites of investigation.

Following the identified performance limitations of the uncalibrated model, the subsequent calibration substantially improved the simulation of soil moisture dynamics and emphasises the need for site-specific calibration. Despite the spatial heterogeneities in soil characteristics, the SVAT model, when calibrated with site-specific soil moisture observations, was capable of capturing the observed dynamics and variability for most profiles at both plots with acceptable precision. The applied calibration substantially enhances confidence in the model's representation of subsurface water storage dynamics.

Nevertheless, discrepancies between observed and simulated soil moisture remain, particularly slight mean bias and variability bias tendencies that point to residual structural or parametric deficiencies. The model results tended to underestimate the rapid rise in soil moisture and struggles to replicate the absolute magnitude of the observed response during high-intensity precipitation events. This mismatch is likely partly related to the use of daily aggregated precipitation input, which smooths short-term rainfall intensities and may therefore attenuate rapid soil moisture responses to individual events. Consequently, short-term peak dynamics and associated rapid percolation pulses may be underrepresented. Because groundwater recharge estimates are directly derived from the simulated percolation response, the inability to represent these rapid transitions implies that recharge may be underestimated during such conditions. These discrepancies suggest limitations in the parameterization of the model for heterogeneous soil profiles and highlight inherent simplifications in the 1D modeling approach when preferential or fast flow processes dominate. Processes that have been identified as important drivers of focused recharge in heterogeneous soils (Berthelin et al., 2023; Ries et al., 2015) are not explicitly resolved in the model. This may restrict the model's capacity to fully capture the complexities of plot-specific conditions and processes such as spatial soil hetero-

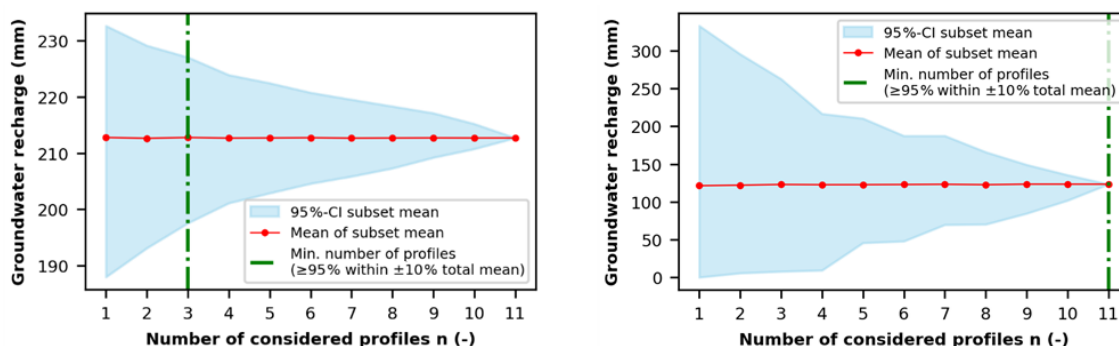


Figure 15. Results of the Monte-Carlo subsampling based on 330 the randomly drawn groundwater recharge subsets for Kienhorst and Tharandt plot – the blue band shows the 95 % confidence interval of the subset means, the red line represents the average subset mean for each sample size and the green vertical line marks the minimum number of soil profiles required for 95 % of all subset means to fall within $\pm 10\%$ of the overall mean.

geneity and the lateral water flux between neighbouring soil compartments (McDonnell, 1990).

In addition, weak or absent soil moisture peaks in the top-soil observed at the Tharandt site may partly be related to water storage and buffering effects in the litter layer, which is not explicitly represented in the model. Instead, litter processes are implicitly incorporated into the uppermost soil layer. This simplification may further contribute to dampened near-surface soil moisture dynamics, particularly during and shortly after precipitation events.

Part of the discrepancy between simulated and observed soil moisture may partly stem from the measurement uncertainty that originates from the accuracy of the soil moisture sensors used in this study, which is $\pm 3\%$ of soil moisture (Truebner Company, 2026) and the effective uncertainty of field soil moisture measurements inherent to all soil moisture measurements (Jackisch et al., 2020). This uncertainty becomes particularly relevant during the substantial fraction of the observation period characterized by very dry conditions ($< 5\text{ vol}\%$), where the relative influence of the sensor error is large and the numerical dominance of dry states in the calibration dataset may influence parameter optimization. Although groundwater recharge predominantly occurs under wetter conditions, where percolation is active and sensor uncertainty is comparatively less critical, indirect calibration effects cannot be fully excluded. There is a risk that the calibration procedure, applied to the full time series, may favour parameter sets that reproduce the prolonged dry states well, while comparatively underrepresenting the wetter periods that are more relevant for groundwater-recharge generation. To assess the potential influence of this bias more systematically, future work should compare calibrations based on the full time series with calibrations restricted to periods exceeding $\theta > 10\text{ vol}\%$, allowing an evaluation of how strongly the representation of dry conditions affects recharge estimates.

Further, the analysis showed that incorporating multi-depth soil moisture observations significantly improves the representativeness of the simulated soil water distribution, especially in heterogeneous soil systems as at Tharandt plot. Multiple observation points along the soil profile allow for a more nuanced assessment of the sensitivity of individual model parameters at different depths by calibrating the model against a higher density of data that captures both surface and subsurface processes. This was also observed by Houska et al. (2014), who demonstrated that the inclusion of soil moisture data at different depths increases the representativeness of the simulated soil water distribution and thus increases the identifiability of model parameters.

Building on the calibration results, the subsequent validation using the calibrated parameter sets revealed a mixed model performance, with acceptable temporal robustness at the Kienhorst plot but clear limitations at Tharandt plot, where the calibrated model struggled to reproduce wet-dry changes and soil moisture variability. These shortcomings are plausible given that the hydrological conditions for the validation period differed substantially from the calibration period. Consequently, the application of the Tharandt parameter set for estimating groundwater recharge in 2025 is associated with increased uncertainty and a site- and period specific recalibration would likely improve model reliability under such altered conditions. In general, it can be stated that the use of the calibrated parameters is unproblematic as long as hydrological conditions do not deviate substantially from those of the calibration period, whereas markedly altered conditions warrant a careful reassessment of their suitability for example through recalibration or by extending the validation period. Despite this limitations at the Tharandt plot, the calibrated parameter sets were retained because they provide a consistent and physically plausible representation of system dynamics during the calibration period and thus form a reliable basis for subsequent analyses for this period.

4.3 Variability of calibrated model parameters

An analysis calibrated model parameter sets for both plots revealed a higher degree of variation in area and depth at the Tharandt plot compared to Kienhorst plot, as indicated by the coefficient of variation (Figs. S5 and S6 in the Supplement). This reflects the greater heterogeneity in soil physical properties observed at Tharandt plot, whereas Kienhorst plot is characterized by more homogeneous plot conditions and is a direct result of the spatially variable observed soil moisture dynamics found within the plots. Despite this broader range of plausible parameter combinations at Tharandt plot, the overall model performance remained at an acceptable level. However, a slightly reduced agreement between observed and simulated soil moisture values was observed compared to Kienhorst plot, suggesting a more complex interplay between parameter uncertainty and model behaviour in heterogeneous environments. The analysis further reveals that key soil hydraulic parameters and soil process parameters show a greater variation compared to vegetation parameters. This underscores their key role in soil water dynamics and highlights their contribution to overall model uncertainty. These insights are supported by the findings of Kreye and Meon (2016), who highlighted the significant impact of sub-scale spatial variability in soil hydraulic properties on hydrological process modelling. Similarly, Scharnagl et al. (2011) pointed out the value of incorporating prior knowledge of soil hydraulic parameters to enhance parameter identifiability in inverse modelling approaches. Complementing these perspectives, Baroni et al. (2010) demonstrated that uncertainties in the determination of soil hydraulic properties can substantially affect the overall performance of hydrological models.

Furthermore, analysis of the 30 best parameter combinations for each individual soil profile revealed that model-based uncertainty (the variation within the 30 best-performing parameter combinations) exceeds plot-based variability (differences between the 11 soil profiles). Both at the Kienhorst plot, where the limited variation in measured soil properties resulted in only minor differences in profile-specific parameterisation, as well as at the Tharandt plot, where input parameters varied more strongly, parameter non identifiability emerged as a key contributor to predictive uncertainty. The wide range of equally well-performing parameter sets for individual profiles reflects the issue of equifinality, where multiple parameter combinations can yield similar simulation outcomes. This suggests that model parameter ambiguity dominates the overall uncertainty. For several parameters, both sources of uncertainty, natural spatial heterogeneity and model-based calibration uncertainty, contributed similarly to the overall variation. At sites with pronounced heterogeneity in soil properties, such as Tharandt, this can amplify the spatial component of uncertainty and partly mask the effects of parameter equifinality. In particular, these findings show that the dominant source of uncertainty can vary significantly depending on plot characteris-

tics. At homogeneous plots, model structural uncertainty and equifinality may outweigh physical variation, while at heterogeneous sites, spatial variability in input data may dominate. Therefore, parameter selection should be guided not only by sensitivity analysis but also by an underplotting of the plot-specific balance between model and data-driven uncertainty.

Based on the findings, the calibration of soil hydraulic parameters should remain plot-specific, as their variability and influence on model outcomes is both large and highly context-dependent. Conversely, parameters with consistently low variability across profiles, such as many vegetation related parameters, may be suitable for regionalization or transfer between plots, potentially improving scalability and reliability of water balance simulations.

4.4 Groundwater recharge estimation

Despite differences, both sites displayed a clear alignment of major recharge periods with seasonal climatic conditions, indicating that atmospheric forcing is the dominant driver of recharge dynamics. In addition to seasonal effects, the main differences in the time series that can be attributed to the different soil properties of both sites. Groundwater recharge at the Kienhorst plot is characterized by smooth and sustained recharge dynamics reflecting the sandy soil texture, associated with high permeability and low field capacity, promoting continuous infiltration and a steady recharge response to precipitation events. Limited water retention in these soils allows for minor recharge even during the vegetation period, albeit at the expense of reduced water availability for plant uptake (Hillel, 2003). In contrast, the loamy and heterogeneous soil at the Tharandt plot, characterised by higher field capacities and lower matrix permeability, substantially delays the onset of percolation. The presence of discontinuous macropores and stone induced preferential pathways promotes rapid but spatially limited bypassing of the matrix, which reduces effective infiltration and prevents deep percolation until the upper soil layers approach their storage capacity. As a result, the recharge response is delayed and occurs irregularly in intermittent, pulse-like events, with groundwater recharge absent in some cases. The restricted matrix infiltration further contributes to the low recharge efficiency despite substantial precipitation inputs. Moreover, the increased water retention at Tharandt plot enhanced soil water availability for vegetation, effectively suppressing groundwater recharge during the vegetation period (Hillel, 2003). These findings underscore the critical role of soil hydraulic properties, particularly conductivity and retention capacity, in regulating the temporal dynamics of groundwater recharge, consistent with observations by Vereecken et al. (2016) as well as the studies of Beven and Binley (1992) and Zhao et al. (2018). This is emphasizing the complexity of water fluxes in heterogeneous soil systems and their limiting effect on recharge efficiency.

The bypass flow at Tharandt plot further influenced the recharge dynamics. Because a portion of the infiltrating water bypassed the fine-textured matrix and percolated directly through preferential pathways, the matrix response remained comparatively sluggish. This process prevented full replenishment of the soil water storage before deeper percolation occurred, reinforcing the damped recharge signal.

Beyond the general attenuation of the recharge signal, Tharandt plot exhibited variability among the 11 simulated soil profiles, exceeding the profile-to-profile differences observed at Kienhorst plot, with some profiles showing no groundwater recharge at all. The combined effects of matrix heterogeneity and bypass flow contributed substantially to the variability among the 11 soil profiles, reflected in differences in both the timing and magnitude of recharge events. Profiles with stronger bypass flow exhibited earlier and occasionally sharper recharge impulses, whereas profiles with weaker bypass flow showed more delayed and smoother recharge trajectories. This divergence reflects the structural heterogeneity of the site, including differences in macroporosity, stone content and the hydraulic properties of preferential flow domains.

Regarding to groundwater recharge and evapotranspiration quantities, the results for both sites fall within the range of values reported in the literature, derived from measurements and obtained from other site-specific simulations. For the Tharandt site, annual recharge rates of 80–150 mm for Tharandt in the period from 1968 to 1999 are suggested by Goldberg and Bernhofer, 2007, while the Groundwater Recharge Viewer from Saxony indicates values of approximately 25–50 mm for this location (Saxon State Office for Environment, Agriculture and Geology, 2025). Furthermore, calculated mean evapotranspiration across all profiles amounts to 566 in 2023 and 510 mm in 2024, which compares well with eddy covariance-based measurements of 479 and 482 mm for the respective years (ICOS Ecosystem Station Tharandt (DE-Tha), 2025), thereby supporting the plausibility of the model results. At the Kienhorst site, groundwater recharge rates derived from site-specific simulations are in the range from 30 to 296 mm in the period 1961 to 2019 (Ziche and Riek, 2024). Especially for the years 2023 and 2024, simulations from the Forest Environmental Monitoring Program of Brandenburg indicate recharge rates of 77 and 172 mm, respectively, alongside evapotranspiration estimates of 457 and 473 mm (Brandenburg State Forestry Enterprise, 2026). These values are in good agreement with the results obtained in this study, further supporting the robustness and plausibility of the simulated water fluxes.

At the Tharandt plot, the heterogeneous soil conditions and the resulting greater variability in parameterisation led to a much higher spread in the estimates of cumulative groundwater recharge across profiles compared with the more homogeneous Kienhorst plot. But neither site heterogeneity nor the range of input parameters alone fully explains the variation in recharge estimates. Rather, other factors, such as

model structure, process representation and calibration uncertainty, appear to play a decisive role in shaping recharge variability at the catchment scale. This observation is consistent with findings by Maxwell and Condon (2016), who emphasised the complex interplay between soil water fluxes, landscape features and recharge processes as well as stressed that heterogeneity does not always lead to higher variability in groundwater recharge results. It further supports the notion that model behaviour can be dominated by structural and parametric uncertainty rather than physical input variability alone. A key contributor to this phenomenon is the concept of equifinality, as extensively discussed by Beven and Freer (2001) and Beven (2006). While the model is able to reproduce the observed soil moisture dynamics with reasonable accuracy using different parameter sets, the existence of multiple parameter sets with comparable performance indicates a high degree of parameter non-uniqueness. This not only increases predictive uncertainty, but also suggests that the model structure, particularly in its one-dimensional form, may not fully capture the spatially distributed and lateral processes that influence soil water movement leading to uncertainties in groundwater recharge estimation.

The results further show that the calculated groundwater recharge based on the parameter sets of the 30 best simulations for the mean value of the 11 soil profiles at the Kienhorst plot provides a generally representative recharge estimate. This averaging over several soil moisture profiles in a forest was also proven to be useful by Berthelin et al. (2023). However, its representativeness varies interannually: in one year, the mean lies close to the edge of the ensemble of profile-specific simulations, whereas in the other year it is located near the centre of the ensemble distribution. This indicates that even in relatively homogeneous settings, the robustness of spatially averaged soil moisture signals is not fully constant over time. In contrast, at the Tharandt plot the mean-based recharge estimate also falls close to the centre of the ensemble; however, this agreement masks a pronounced bimodal distribution among the individual soil profiles. Approximately half of the profiles exhibit little to no groundwater recharge, while the remaining profiles generate comparatively high recharge rates. As a result, the mean provides a numerically representative value but does not reflect the underlying process heterogeneity of the system. This highlights the importance of a differentiated consideration of plot-specific soil profiles and moisture distributions in modelling, in order to ensure realistic results. Solely relying on mean values cannot always adequately capture the system's heterogeneity and poses the risk of systematic biases in the water balance, especially in heterogeneous settings, where nonlinear percolation processes and preferential flow introduce substantial variability.

Hence, in order to cope with uncertainties in obtaining representative recharge estimates, it is advisable to define an adequate number of soil profiles equipped with soil moisture sensors that serve as critical calibration points. The per-

formed analysis (Fig. 14) indicated that below three randomly selected profiles at the Kienhorst plot, spatial variability as well as model uncertainty can still bias the representativeness of recharge estimates. The results demonstrate that at this relatively homogeneous site, the use of at least three soil profiles is recommended to ensure for 95 % of all groundwater recharge subset means to remain within ± 10 % of the overall groundwater recharge mean at the 20×20 m plot scale when using the LWFBrook90 model calibrated with soil moisture data. In contrast, at the Tharandt plot, the strong heterogeneity of recharge responses, characterized by a pronounced bimodal distribution with approximately half of the profiles showing little to no groundwater recharge and the other half exhibiting comparatively high recharge, requires the full set of 11 profiles to achieve the same statistical robustness. Smaller subsets are unable to reliably capture this contrasting behaviour and may therefore lead to substantial bias depending on the selected profiles. In conclusion, the number of soil moisture profiles required for robust groundwater recharge estimation is strongly site-dependent. While three profiles may be sufficient in relatively homogeneous systems such as Kienhorst, highly heterogeneous sites such as Tharandt require full spatial coverage to adequately represent the underlying variability. A targeted monitoring approach should therefore consider site-specific variability structures to balance model reliability with fieldwork feasibility when applying the LWFBrook90 model.

4.5 Transferability and generalizability of the findings

Although the experimental setup is inherently site specific and relies on detailed soil characterization, vegetation information and profile-specific soil moisture observations, the study provides insights that extend beyond the two investigated plots. The results should therefore be interpreted as a proof of concept for high-resolution recharge modelling under realistic field conditions rather than as a universally transferable framework. Importantly, plot-scale analyses remain essential even in the context of multi-site or gridded recharge estimations. Large-scale approaches depend on upscaled parameterisations that may overlook local heterogeneities and nonlinearities in infiltration and percolation, whereas plot-scale studies provide the process understanding and high-resolution data needed to improve these models and to guide the selection of representative parameters. Focusing on plot-scale groundwater recharge allows model performance to be evaluated under well-controlled conditions using detailed soil moisture observations, thereby capturing site-specific processes – such as root-zone dynamics, canopy interception and soil hydraulic behaviour – that are often averaged out or simplified in large-scale frameworks. At the same time, the contrasting environmental conditions across the two forest plots, representing typical combinations of dominant tree species and soil types in Central European forests, suggest that the underlying process relationships are not unique to

these sites but may be indicative of similarly structured and heterogeneous forest soils. Nevertheless, the generalisability of the results remains constrained, and future work should include multi-site comparisons, simplified proxy approaches and scaling strategies to more robustly assess transferability across broader environmental gradients. Bridging the gap between plot-scale understanding and landscape-scale application is therefore essential, and we see this study as a step toward that goal.

5 Conclusions

The findings of the investigation underscore the critical need for a sufficiently dense and vertically resolved network of soil moisture measurements to ensure robust model calibration and to constrain predictive uncertainty for estimating important water balance components like groundwater recharge with a SVAT model. The use of mean values derived from a limited number of measurement profiles for calibration can mask extremes in soil moisture variability, leading to systematic over- or underestimations, especially in heterogeneous environments. The results of this study clearly highlight the need to expand the spatial coverage of soil-moisture measurements and the associated groundwater recharge modelling, particularly at heterogeneous sites where variability in soil matrix properties is higher. Such a denser observation network would enable to cover the influence of soil moisture variability as well as model structure and equifinality on groundwater recharge estimates. Even in areas with low observed spatial variability of soil moisture, model-based uncertainty, resulting from multiple parameter combinations yielding similarly plausible outputs, can dominate simulation outcomes. This underlines the importance of explicitly addressing equifinality and parameter non-uniqueness in model calibration procedures. While the investigations provides indicative thresholds for the number of soil moisture profiles required to capture the dominant sources of uncertainty, the exact number needed to adequately represent both site heterogeneity and model-related uncertainty is highly site-specific and cannot be generalized across locations.

Multi-objective approaches that involve additional data can yield better constrained process parametrizations and give insights into which processes need a more detailed conceptual representation in the model structure. Incorporating isotopic signatures of precipitation and soil water, in addition to soil moisture data, during calibration could be an opportunity to reduce the negative impact of effects such as equifinality on the calibration process and the subsequent estimation of groundwater recharge. Several studies have demonstrated that the complementary use of stable isotope measurements ($\delta^{18}\text{O}$, $\delta^2\text{H}$) in precipitation, along with a comparison to the isotopic signatures in soil water, has proven to be particularly effective in narrowing down parameter uncertainty (Sprenger et al., 2015). By combining isotopic data with soil mois-

ture information, a multidimensional calibration process is enabled, allowing for a more precise identification of parameters that govern key water transport and storage processes within the soil.

Furthermore, the results obtained for evapotranspiration and root water uptake, which significantly influence the estimation of groundwater recharge, can be validated through comparison with measured sap flow data. This validation step not only serves to verify the model's performance but also aids in further reducing the uncertainty in groundwater recharge estimates, thereby providing a promising direction for improving the overall reliability of future SVAT model applications.

Code and data availability. The source code of the LWF-BROOK90.jl model can be downloaded from <https://github.com/fabern/LWFBrook90.jl> (Bernhardt, 2020). The complete soil moisture monitoring data and processed meteorological input data are available from Zenodo (<https://doi.org/10.5281/zenodo.21886983>, Fichtner et al., 2026). The original meteorological data were provided by the Integrated Carbon Observation System (ICOS) and were processed and aggregated to daily values for use as model input. The original ICOS meteorological data were provided directly by the responsible ICOS site operator.

Supplement. The supplement related to this article is available online at <https://doi.org/10.5194/hess-30-5711-2026-supplement>.

Author contributions. Conceptualization: TF, AH, MM, SS, SR; Investigation (field experiments + data collection): TF; Simulation: JA, TF, KE; data analysis: JA, TF, KE; Evaluation + Visualization: TF, KE; writing (original draft preparation): TF; writing (review and editing): TF, KE, AH, MM, SS, SR.

Competing interests. The contact author has declared that none of the authors has any competing interests.

Disclaimer. Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. The authors bear the ultimate responsibility for providing appropriate place names. Views expressed in the text are those of the authors and do not necessarily reflect the views of the publisher.

Acknowledgements. We would like to express our sincere thanks to the Institute of Hydrology and Meteorology at the Technical University of Dresden, in particular Thomas Grünwald, for providing access to the Tharandt site as well as the associated meteorological data and site-characterisation information. Our thanks also go to the

Landesbetrieb Forst Brandenburg, especially Alexander Russ and Rainer Hentschel, for granting access to the Kienhorst site and the corresponding meteorological data, as well as providing detailed information on site characteristics, including soil and vegetation properties. Furthermore, we are grateful to Lindsey Kenyon and Benjamin Gralher for their valuable support during the field campaigns. We would also like to express our sincere gratitude to Paul Schmidt-Walter, Tobias Hohenbrink and Michael Köhler for their invaluable support in setting up the model and assisting with the model parameterisation.

Financial support. This work was funded by the German Federal Ministry of Food and Agriculture (grant no. 2220WK83C4) and the Open Access Funding of the TU Dresden.

Review statement. This paper was edited by Fadji Zaoua Maina and reviewed by Philippe Ackerer and one anonymous referee.

References

- Anchorstation Tharandt Wald: Ankerstation Tharandt Wald – Teilfläche Ökomessfeld, <https://tu-dresden.de/bu/umwelt/hydro/ihm/meteorologie/forschung/mess-und-versuchsstationen/tharandt-ankerstation-oekomessfeld>, last access: 29 July 2026.
- Baroni, G., Facchi, A., Gandolfi, C., Ortuani, B., Horeschi, D., and van Dam, J. C.: Uncertainty in the determination of soil hydraulic parameters and its influence on the performance of two hydrological models of different complexity, *Hydrol. Earth Syst. Sci.*, 14, 251–270, <https://doi.org/10.5194/hess-14-251-2010>, 2010.
- Bernhard, F., Seeger, S., Weiler, M., Gessler, A., and Meusburger, K.: Simulating soil-plant-atmosphere interactions for sub-daily in situ observations of stable isotopes in soil and xylem water to assess two-pore domain model hypothesis, *EGU General Assembly 2020*, Online, 4–8 May 2020, EGU2020-17975, <https://doi.org/10.5194/egusphere-egu2020-17975>, 2020.
- Berthelin, R., Rinderer, M., Andreo, B., Baker, A., Kilian, D., Leonhardt, G., Lotz, A., Lichtenwohrer, K., Mudarra, M., Padilla, I. Y., Pantoja Agreda, F., Rosolem, R., Vale, A., and Hartmann, A.: A soil moisture monitoring network to characterize karstic recharge and evapotranspiration at five representative sites across the globe, *Geosci. Instrum. Method. Data Syst.*, 9, 11–23, <https://doi.org/10.5194/gi-9-11-2020>, 2020.
- Berthelin, R., Olariño, T., Rinderer, M., Mudarra, M., Demand, D., Scheller, M., and Hartmann, A.: Estimating karst groundwater recharge from soil moisture observations – a new method tested at the Swabian Alb, southwest Germany, *Hydrol. Earth Syst. Sci.*, 27, 385–400, <https://doi.org/10.5194/hess-27-385-2023>, 2023.
- Beven, K.: Prophecy, reality and uncertainty in distributed hydrological modelling, *Adv. Water Resour.*, 16, 41–51, [https://doi.org/10.1016/0309-1708\(93\)90028-E](https://doi.org/10.1016/0309-1708(93)90028-E), 1993.
- Beven, K.: A manifesto for the equifinality thesis, *J. Hydrol.*, 320, 18–36, <https://doi.org/10.1016/j.jhydrol.2005.07.007>, 2006.
- Beven, K. and Binley, A.: The future of distributed models: Model calibration and uncertainty prediction, *Hydrol. Process.*, 6, 279–298, <https://doi.org/10.1002/hyp.3360060305>, 1992.

- Beven, K. and Freer, J.: Equifinality, data assimilation, and uncertainty estimation in mechanistic modelling of complex environmental systems using the GLUE methodology, *J. Hydrol.*, 249, 11–29, [https://doi.org/10.1016/S0022-1694\(01\)00421-8](https://doi.org/10.1016/S0022-1694(01)00421-8), 2001.
- Braeutigam, T.: Bodenlehrpfad Tharandter Wald, Landesamt für Umwelt, Landwirtschaft und Geologie, Freiberg, https://www.boden.sachsen.de/download/Boeden_imThWald_Begleitheft.pdf (last access: 7 September 2026), 2012.
- Brandenburg State Forestry Enterprise: Brandenburg Forestry Environmental Monitoring, <https://forstliche-umweltkontrolle.de/> (last access: 29 July 2026), 2026.
- Chang, M.: Forest Hydrology: An Introduction to Water and Forests, 2nd edn., CRC Press, 500 pp., ISBN 978-0-429-16943-4, 2006.
- Chang, M.: Forest Hydrology: An Introduction to Water and Forests, 3rd edn., CRC Press, Boca Raton, 595 pp., <https://doi.org/10.1201/b13614>, 2012.
- Choi, M., Jacobs, J. M., and Cosh, M. H.: Scaled spatial variability of soil moisture fields, *Geophys. Res. Lett.*, 34, <https://doi.org/10.1029/2006GL028247>, 2007.
- Davison, A. C. and Hinkley, D. V.: Bootstrap Methods and their Application, Cambridge University Press, Cambridge, <https://doi.org/10.1017/CBO9780511802843>, 1997.
- Demand, D., Blume, T., and Weiler, M.: Spatio-temporal relevance and controls of preferential flow at the landscape scale, *Hydrol. Earth Syst. Sci.*, 23, 4869–4889, <https://doi.org/10.5194/hess-23-4869-2019>, 2019.
- Efron, B. and Tibshirani, R. J.: An Introduction to the Bootstrap, Chapman and Hall/CRC, New York, 456 pp., <https://doi.org/10.1201/9780429246593>, 1994.
- Famiglietti, J. S. and Wood, E. F.: Multiscale modeling of spatially variable water and energy balance processes, *Water Resour. Res.*, 30, 3061–3078, <https://doi.org/10.1029/94WR01498>, 1994.
- Famiglietti, J. S., Ryu, D., Berg, A. A., Rodell, M., and Jackson, T. J.: Field observations of soil moisture variability across scales, *Water Resour. Res.*, 44, <https://doi.org/10.1029/2006WR005804>, 2008.
- Faticchi, S., Katul, G. G., Ivanov, V. Y., Pappas, C., Paschalis, A., Consolo, A., Kim, J., and Burlando, P.: Abiotic and biotic controls of soil moisture spatiotemporal variability and the occurrence of hysteresis, *Water Resour. Res.*, 51, 3505–3524, <https://doi.org/10.1002/2014WR016102>, 2015.
- Federer, C. A., Vörösmarty, C., and Fekete, B.: Sensitivity of Annual Evaporation to Soil and Root Properties in Two Models of Contrasting Complexity, *J. Hydrometeorol.*, 4, 1276–1290, [https://doi.org/10.1175/1525-7541\(2003\)004<1276:SOAETS>2.0.CO;2](https://doi.org/10.1175/1525-7541(2003)004<1276:SOAETS>2.0.CO;2), 2003.
- Fichtner, T. and Ehrenberg, K.: Soil moisture monitoring and processed meteorological data for forest water balance modelling at Kienhorst and Tharandt site, Zenodo [data set], <https://doi.org/10.5281/zenodo.21886983>, 2026.
- Franks, S. W., Beven, K. J., Quinn, P. F., and Wright, I. R.: On the sensitivity of soil-vegetation-atmosphere transfer (SVAT) schemes: equifinality and the problem of robust calibration, *Agric. For. Meteorol.*, 86, 63–75, [https://doi.org/10.1016/S0168-1923\(96\)02421-5](https://doi.org/10.1016/S0168-1923(96)02421-5), 1997.
- Gebeyehu, M. N. and Hirpo, F. H.: Review on Effect of Climate Change on Forest Ecosystem, *Int. J. Environ. Sci. Nat. Resour.*, 17, 126–129, 2019.
- Goldberg, V. and Bernhofer, C.: Water balance of forested catchments, edited by: Lozán, J. L., Grassl, H., Hupfer, P., Menzel, L., and Schönwiese, C. D.: Global Change: Enough water for all?, University Hamburg, 72–76, ISBN 3-9809668-0-1, 2007.
- Gupta, H. V., Kling, H., Yilmaz, K. K., and Martinez, G. F.: Decomposition of the mean squared error and NSE performance criteria: Implications for improving hydrological modelling, *J. Hydrol.*, 377, 80–91, <https://doi.org/10.1016/j.jhydrol.2009.08.003>, 2009.
- Hewlett, J. D.: Principles of Forest Hydrology, University of Georgia Press, Athens, 192 pp., ISBN 978-0-8203238-0-0, 2003.
- Hillel, D. (Ed.): Introduction to Environmental Soil Physics, Academic Press, Burlington, 498 pp., <https://doi.org/10.1016/B978-012348655-4/50025-3>, 2003.
- Houska, T., Multsch, S., Kraft, P., Frede, H.-G., and Breuer, L.: Monte Carlo-based calibration and uncertainty analysis of a coupled plant growth and hydrological model, *Biogeosciences*, 11, 2069–2082, <https://doi.org/10.5194/bg-11-2069-2014>, 2014.
- ICOS Ecosystem Station Kienhorst (DE-Kie): Integrated Carbon Observation System (ICOS) RI, Ecosystem Thematic Centre, https://meta.icos-cp.eu/resources/stations/ES_DE-Kie (18 August 2025), 2025.
- ICOS Ecosystem Station Tharandt (DE-Tha): Integrated Carbon Observation System (ICOS) RI, Ecosystem Thematic Centre, https://meta.icos-cp.eu/resources/stations/ES_DE-Tha (18 August 2025), 2025.
- IUSS Working Group (WRB): World Reference Base for Soil Resources, International soil classification system for naming soils and creating legends for soil maps, 4th edn., International Union of Soil Sciences (IUSS), Vienna, Austria, 236 pp., ISBN 979-8-9862451-1-9, 2022.
- Jackisch, C., Germer, K., Graeff, T., Andrä, I., Schulz, K., Schiedung, M., Haller-Jans, J., Schneider, J., Jaquemotte, J., Helmer, P., Lotz, L., Bauer, A., Hahn, I., Šanda, M., Kumpan, M., Dorner, J., de Rooij, G., Wessel-Bothe, S., Kottmann, L., Schittenhelm, S., and Durner, W.: Soil moisture and matric potential – an open field comparison of sensor systems, *Earth Syst. Sci. Data*, 12, 683–697, <https://doi.org/10.5194/essd-12-683-2020>, 2020.
- Kallweit, R. and Engel, J.: 30 Jahre forstliches Umweltmonitoring in Brandenburg, Ministerium für Ländliche Entwicklung, Umwelt und Landwirtschaft des Landes Brandenburg, Eberswalde, <https://forst.brandenburg.de/sixcms/media.php/9/efs63.pdf> (last access: 7 September 2026), 2016.
- Kirchner, J. W.: Getting the right answers for the right reasons: Linking measurements, analyses, and models to advance the science of hydrology, *Water Resour. Res.*, 42, <https://doi.org/10.1029/2005WR004362>, 2006.
- Klesse, S., Babst, F., Evans, M. E. K., Hurley, A., Pappas, C., and Peters, R. L.: Legacy effects in radial tree growth are rarely significant after accounting for biological memory, *J. Ecol.*, 111, 1188–1202, <https://doi.org/10.1111/1365-2745.14045>, 2023.
- Kreye, P. and Meon, G.: Subgrid spatial variability of soil hydraulic functions for hydrological modelling, *Hydrol. Earth Syst. Sci.*, 20, 2557–2571, <https://doi.org/10.5194/hess-20-2557-2016>, 2016.
- Kuppel, S., Tetzlaff, D., Maneta, M. P., and Soulsby, C.: What can we learn from multi-data calibration of a process-based eco-hydrological model?, *Environ. Model. Softw.*, 101, 301–316, <https://doi.org/10.1016/j.envsoft.2018.04.003>, 2018.

- Liu, Y., Liu, R., Pisek, J., and Chen, J. M.: Separating overstory and understory leaf area indices for global needleleaf and deciduous broadleaf forests by fusion of MODIS and MISR data, *Biogeosciences*, 14, 1093–1110, <https://doi.org/10.5194/bg-14-1093-2017>, 2017.
- Manly, B. F. J. and Manly, B. F. J.: *Randomization, Bootstrap and Monte Carlo Methods in Biology*, 3rd edn., Chapman and Hall/CRC, New York, 480 pp., <https://doi.org/10.1201/9781315273075>, 2018.
- Maxwell, R. M. and Condon, L. E.: Connections between ground-water flow and transpiration partitioning, *Science*, 353, 377–380, <https://doi.org/10.1126/science.aaf7891>, 2016.
- McDonnell, J. J.: A Rationale for Old Water Discharge Through Macropores in a Steep, Humid Catchment, *Water Resour. Res.*, 26, 2821–2832, <https://doi.org/10.1029/WR026i011p02821>, 1990.
- Meusburger, K., Trotsiuk, V., Schmidt-Walter, P., Baltensweiler, A., Brun, P., Bernhard, F., Gharun, M., Habel, R., Hagedorn, F., Köchli, R., Psomas, A., Puhlmann, H., Thimonier, A., Waldner, P., Zimmermann, S., and Walthert, L.: Soil–plant interactions modulated water availability of Swiss forests during the 2015 and 2018 droughts, *Glob. Change Biol.*, 28, 5928–5944, <https://doi.org/10.1111/gcb.16332>, 2022.
- Mohanty, B. P., Famiglietti, J. S., and Skaggs, T. H.: Evolution of soil moisture spatial structure in a mixed vegetation pixel during the Southern Great Plains 1997 (SGP97) Hydrology Experiment, *Water Resour. Res.*, 36, 3675–3686, <https://doi.org/10.1029/2000WR900258>, 2000.
- Montzka, C., Herbst, M., Weihermüller, L., Verhoef, A., and Vereecken, H.: A global data set of soil hydraulic properties and sub-grid variability of soil water retention and hydraulic conductivity curves, *Earth Syst. Sci. Data*, 9, 529–543, <https://doi.org/10.5194/essd-9-529-2017>, 2017.
- Ojha, R., Morbidelli, R., Saltalippi, C., Flammini, A., and Govindaraju, R. S.: Scaling of surface soil moisture over heterogeneous fields subjected to a single rainfall event, *J. Hydrol.*, 516, 21–36, <https://doi.org/10.1016/j.jhydrol.2014.01.057>, 2014.
- Olioso, A., Inoue, Y., Ortega-Farias, S., Demarty, J., Wigneron, J.-P., Braud, I., Jacob, F., Lecharpentier, P., Ottlé, C., Calvet, J.-C., and Brisson, N.: Future directions for advanced evapotranspiration modeling: Assimilation of remote sensing data into crop simulation models and SVAT models, *Irrig. Drain. Syst.*, 19, 377–412, <https://doi.org/10.1007/s10795-005-8143-z>, 2005.
- Qu, W., Bogen, H. R., Huisman, J. A., and Vereecken, H.: Calibration of a Novel Low-Cost Soil Water Content Sensor Based on a Ring Oscillator, *Vadose Zone J.*, 12, vj2012.0139, <https://doi.org/10.2136/vj2012.0139>, 2013.
- Ries, F., Lange, J., Schmidt, S., Puhlmann, H., and Sauter, M.: Recharge estimation and soil moisture dynamics in a Mediterranean, semi-arid karst region, *Hydrol. Earth Syst. Sci.*, 19, 1439–1456, <https://doi.org/10.5194/hess-19-1439-2015>, 2015.
- Saltelli, A., Ratto, M., Andres, T., Campolongo, F., Cariboni, J., Gatelli, D., Saisana, M., and Tarantola, S.: *Global Sensitivity Analysis. The Primer*, John Wiley & Sons Inc., 304 pp., ISBN 978-0-470-05997-5, 2007.
- Saxon State Office for Environment, Agriculture and Geology: Groundwater Recharge Viewer, <https://gwn-sachsen.de> (last access: 18 August 2025), 2025.
- Scharnagl, B., Vrugt, J. A., Vereecken, H., and Herbst, M.: Inverse modelling of in situ soil water dynamics: investigating the effect of different prior distributions of the soil hydraulic parameters, *Hydrol. Earth Syst. Sci.*, 15, 3043–3059, <https://doi.org/10.5194/hess-15-3043-2011>, 2011.
- Schmidt-Walter, P., Trotsiuk, V., Meusburger, K., Zacios, M., and Meessenburg, H.: Advancing simulations of water fluxes, soil moisture and drought stress by using the LWF-Brook90 hydrological model in R, *Agric. For. Meteorol.*, 291, 108023, <https://doi.org/10.1016/j.agrformet.2020.108023>, 2020.
- Senf, C., Buras, A., Zang, C. S., Rammig, A., and Seidl, R.: Excess forest mortality is consistently linked to drought across Europe, *Nat. Commun.*, 11, 6200, <https://doi.org/10.1038/s41467-020-19924-1>, 2020.
- Speich, M. J. R., Zappa, M., Scherstjanoi, M., and Lischke, H.: FORests and HYdrology under Climate Change in Switzerland v1.0: a spatially distributed model combining hydrology and forest dynamics, *Geosci. Model Dev.*, 13, 537–564, <https://doi.org/10.5194/gmd-13-537-2020>, 2020.
- Sprenger, M., Volkmann, T. H. M., Blume, T., and Weiler, M.: Estimating flow and transport parameters in the unsaturated zone with pore water stable isotopes, *Hydrol. Earth Syst. Sci.*, 19, 2617–2635, <https://doi.org/10.5194/hess-19-2617-2015>, 2015.
- Teuling, A. J. and Troch, P. A.: Improved understanding of soil moisture variability dynamics, *Geophys. Res. Lett.*, 32, <https://doi.org/10.1029/2004GL021935>, 2005.
- Truebner Company: https://www.truebner.de/en/smt100.php?utm_source=chatgpt.com, last access: 29 July 2026.
- van der Salm, C., Reinds, G. J., and de Vries, W.: Water balances in intensively monitored forest ecosystems in Europe, *Environ. Pollut.*, 148, 201–212, <https://doi.org/10.1016/j.envpol.2006.10.043>, 2007.
- Vereecken, H., Huisman, J. A., Bogen, H., Vanderborght, J., Vrugt, J. A., and Hopmans, J. W.: On the value of soil moisture measurements in vadose zone hydrology: A review, *Water Resour. Res.*, 44, <https://doi.org/10.1029/2008WR006829>, 2008.
- Vereecken, H., Schnepf, A., Hopmans, J. W., Javaux, M., Or, D., Roose, T., Vanderborght, J., Young, M. H., Amelung, W., Aitkenhead, M., Allison, S. D., Assouline, S., Baveye, P., Berli, M., Brüggemann, N., Finke, P., Flury, M., Gaiser, T., Govers, G., Ghezzehei, T., Hallett, P., Franssen, H. J. H., Heppell, J., Horn, R., Huisman, J. A., Jacques, D., Jonard, F., Kollet, S., Lafolie, F., Lamorski, K., Leitner, D., Mcbratney, A., Minasny, B., Montzka, C., Nowak, W., Pachepsky, Y., Padarian, J., Romano, N., Roth, K., Rothfuss, Y., Rowe, E. C., Schwen, A., Šimůnek, J., Tiktak, A., Dam, J. van, Zee, S. E. A. T. M. van der, Vogel, H. J., Vrugt, J. A., Wöhling, T., and Young, I. M.: Modeling soil processes: Review, key challenges, and new perspectives, *Vadose Zone J.*, 15, <https://doi.org/10.2136/vj2015.09.0131>, 2016.
- Vorobevskii, I., Luong, T. T., Kronenberg, R., and Petzold, R.: High-resolution operational soil moisture monitoring for forests in central Germany, *Hydrol. Earth Syst. Sci.*, 28, 3567–3595, <https://doi.org/10.5194/hess-28-3567-2024>, 2024.
- Vrugt, J. A., Hyman, J. M., Robinson, B. A., Higdon, D., and Diks, C. G. H.: Accelerating Markov chain Monte Carlo simulation by differential evolution with self-adaptive randomized subspace sampling, *Int. J. Nonlinear Sci.*, 10, 273–290, <https://doi.org/10.1515/IJNSNS.2009.10.3.273>, 2008.

- Weis, W., Ahrends, B., Böhner, J., Falk, W., Fleck, S., Habel, R., Klemmt, H.-J., Meesenburg, H., Müller, A.-C., Puhlmann, H., Wehberg, J.-A., Wellpott, A., and Wolf, T.: Standortsfaktor Wasserhaushalt im Klimawandel, Zentrum Wald Forst Holz Weihenstephan, Forstliche Forschungsberichte, München, Nr. 224, 190 pp., 2023, ISBN 3-933506-55-7, 2023.
- Western, A., Zhou, S.-L., Grayson, R., McMahon, T., Blöschl, G., and Wilson, D.: Spatial Correlation of Soil Moisture in Small Catchments and Its Relationship to Dominant Spatial Hydrological Processes, *J. Hydrol.*, 286, 113–134, <https://doi.org/10.1016/j.jhydrol.2003.09.014>, 2004.
- Western, A. W., Grayson, R. B., Blöschl, G., Willgoose, G. R., and McMahon, T. A.: Observed spatial organization of soil moisture and its relation to terrain indices, *Water Resour. Res.*, 35, 797–810, <https://doi.org/10.1029/1998WR900065>, 1999.
- Williams, P. A., Craig, A. D., Macalady, A. K., Griffin, D., Woodhouse, C. A., Meko, D. M., Swetnam, T. W., Rauscher, S. A., Seager, R., Grissino-Mayer, H. D., Dean, J. S., Cook, E. R., Gangodagamage, C., Cai, M., and McDowell, N. G.: Temperature as a potent driver of regional forest drought stress and tree mortality, *Nat. Clim. Change*, 3, 292–297, <https://doi.org/10.1038/nclimate1693>, 2013.
- Wösten, J. H. M., Lilly, A., Nemes, A., and Le Bas, C.: Development and use of a database of hydraulic properties of European soils, *Geoderma*, 90, 169–185, [https://doi.org/10.1016/S0016-7061\(98\)00132-3](https://doi.org/10.1016/S0016-7061(98)00132-3), 1999.
- Zhao, L. J., Eastoe, C. J., Liu, X. H., Wang, L. X., Wang, N. L., Xie, C., and Song, Y. X.: Origin and residence time of groundwater based on stable and radioactive isotopes in the Heihe River Basin, northwestern China, *J. Hydrol. Reg. Stud.*, 18, 31–49, <https://doi.org/10.1016/j.ejrh.2018.05.002>, 2018.
- Ziche, D. and Riek, W.: Wasserhaushaltsmodellierung für Flächen der Forstlichen Umweltkontrolle Brandenburg und Berlin, Hochschule für Nachhaltige Entwicklung Eberswalde, Eberswalde, 2024.